FEA RECEIPT # 519952 DATE: MAR 25 2011 RECEIVED

MAR 29 2011 **HUMAN CREMATORY** AIR GENERAL PERMIT REGISTRATION FORM Bureau of Air Monitoring & Mobile Sources

Part II. Notification to Permitting Office

(Detach and submit to appropriate permitting office; keep copy onsite)

Instructions: To give notice to the Department of an eligible facility's intent to use this air general permit, the owner or operator of the facility must detach and complete this part of the Air General Permit Registration Form and submit it to the appropriate Department of Environmental Protection or local air pollution control program office which has permitting authority. Please type or print clearly all information, and enclose the appropriate air general permit registration processing fee pursuant to Rule 62-4.050, F.A.C. (\$100 as of the effective date of this form)

MUNICIPALITY
Registration Type 0090054-0
Check one:
 INITIAL REGISTRATION – Notification of intent to: □ Construct and operate a proposed new facility. □ Operate an existing facility not currently using an air general permit (e.g., a facility proposing to go from an air operation permit to an air general permit).
RE-REGISTRATION (for facilities currently using an air general permit) - Notification of intent to: ☐ Continue operating the facility after expiration of the current term of air general permit use. ☐ Continue operating the facility after a change of ownership. ☐ Make an equipment change requiring re-registration pursuant to Rule 62-210.310(2)(e), F.A.C., or any other change not considered an administrative correction under Rule 62-210.310(2)(d), F.A.C.
Surrender of Existing Air Operation Permit(s) - For Initial Registrations Only
If the facility currently holds one or more air operation permits, such permit(s) must be surrendered by the owner or operator upon the effective date of this air general permit. In such case, check the first box, and indicate the operation permits being surrendered. If no air operation permits are held by the facility, check the second box. All existing air operation permits for this facility are hereby surrendered upon the effective date of this air general permit; specifically permit number(s):
No air operation permits currently exist for this facility.
General Facility Information
Facility Owner/Company Name (Name of corporation, agency, or individual owner who or which owns, leases, operates, controls, or supervises the facility.) Beckman-Williamson Funeral Home, LLC
Site Name (Name, if any, of the facility site; e.g., Plant A, Metropolis Plant, etc. If more than one facility is owned, a registration form must be completed for each.) Atlas Crematory
Facility Location (Provide the physical location of the facility, not necessarily the mailing address.)
Street Address: 2111 South U.S. Highway 1
City: Rockledge County: Brevard Zip Code:32955 -3726
Facility Start-Up Date (Estimated start-up date of proposed new facility.) (N/A for existing facility) N/A existing facility.

DEP Form No. 62-210.920(2)(c) Effective: January 10, 2007

Owner/Authorized Representative

Name and Position Title (Person who, by signing this form below, certifies that the facility is eligible to use this

air general permit.)

Print Name and Title: Charles Sikes, President

Owner/Authorized Representative Mailing Address

Organization/Firm: Beckman-Williamson, LLC

Street Address: 101 North Brevard Avenue

City: Cocoa Beach

County: Brevard

Zip Code: 32931

Owner/Authorized Representative Telephone Numbers

Telephone: 321-784-0116

Cell phone (optional):

Fax: 321-781-8304

Facility Contact (If different from Owner/Authorized Representative)

Name and Position Title (Plant manager or person to be contacted regarding day-to-day operations at the facility.)

Print Name and Title:

Facility Contact Mailing Address

Organization/Firm:

Street Address:

City:

County:

Zip Code:

Facility Contact Telephone Numbers

Telephone:

Fax:

Cell phone (optional):

Owner/Authorized Representative Statement

This statement must be signed and dated by the person named above as owner or authorized representative

I, the undersigned, am the owner or authorized representative of the owner or operator of the facility addressed in this Air General Permit Registration Form. I hereby certify, based on information and belief formed after reasonable inquiry, that the facility addressed in this registration form is eligible for use of this air general permit and that the statements made in this registration form are true, accurate and complete. Further, I agree to operate and maintain the facility described in this registration form so as to comply with all applicable standards for control of air pollutant emissions found in the statutes of the State of Florida and rules of the Department of Environmental Protection and revisions thereof.

I will promptly notify the Department of any changes to the information contained in this registration form.

Signature

3/23/1/ Date

DEP Form No. 62-210.920(2)(c) Effective: January 10, 2007

T	\sim			•
Lacian			o ti	anc
Design		UШ	au	OHS

If this is an initial registration for a proposed new human crematory unit, provide design calculations to confirm a sufficient volume in the secondary chamber combustion zone to provide for at least a 1.0 second gas residence time at 1800 degrees F.

Manufacturer's' design calculations attached. - See Attachment 1 for compliance test report

Description of Facility

Registration is not for proposed new human crematory unit(s).

(NEED INFORMATION FOR ALL UNITS

Below, or as an attachment to this form, provide a description of all crematory operations at the facility in sufficient detail to demonstrate the facility's eligibility for use of this air general permit and to provide a basis for tracking any future equipment or process changes at the facility. Describe all air pollutant-emitting processes and equipment at the facility, and identify any air pollution control measures or equipment used.

Equipment Description

Atlas Crematory is replacing a Power Pak II crematory with a U.S. Cremation Equipment Model "Classic" manufactured by U.S. Cremation Equipment.

The "Classic" is a multi-chamber unit having an average 150 - 200 lbs/hr fired with natural gas. The primary chamber burner is rated at 500,000 Btu/hr, and the secondary chamber burner is rated at 1,500,000 Btu/hr, for a total of 2,000,000 Btu/hr. Control of air pollution is achieved through the design of the "Classic" crematory, including its ability to operate the secondary chamber between 1600 - 1850 degrees Fahrenheit at a residence time in excess of 1.0 second. The design also includes fully automatic PLC based controls, independent fuel/air systems, preheated combustion air, secondary chamber temperature monitor an recorder, primary burner temperature interlock (prevents primary burner from firing prior to the secondary chamber reaching it's set point temperature), UV continuous scanning flame detectors on burners, and an opacity sensor which can temporarily suspends operation of the primary chamber burner. In attachment 2 we have include a copy of the crematory spec.

Emissions Summary

Emission Summary and Calculations – Air pollution control is demonstrated through identical source stack testing. (see Attachment 1). See Attachment 3 for tabular summary of emissions. Criteria pollutant emissions values, except CO and PM are based on emission factors from AP-42, Table 2.1-12. The emission for CO and PM are derived from results of the identical source stack test.

Retention Time

The retention time was measured on an identical unit at 1.95 seconds at 1800°F.

* SEE ATTACHED E-MATL DATED 04/07/11
AS AN ADDENDUM TO THIS FORM.

PROVIDES A LIST OF EXISTING EQUIPMENT.

DEP Form No. 62-210.920(2)(c) Effective: January 10, 2007

* ADDENDUM TO #0090054-006

Dibble, Dickson

PAGE 9, DESCRIPTION OF FACILITY

From:

Luis Llorens [ai@cfl.rr.com]

Sent:

Thursday, April 07, 2011 8:48 AM

To:

Dibble, Dickson

Cc: Subject: cwilkerson@uscremationequipment.com Atlas Crematory AIRS ID# 0090054-005-AG

Attachments:

2011-04-05 Guiding Light 0112701.pdf

Dear Dick:

The model and serial number of the cremators currently installed at Atlas Crematory are:

B & L

Model N20AA

Serial # 636-419-02

Mathews

Model PP II

Serial # 374329

EXISTING EQUIPMENT

THIS UNIT IS BEAUG REPLACED BY EUROS

Regarding the stack test submitted, the unit was a "Classic Cremator" I asked the test firm to clear that up. See Attached letter.

If you have any more questions, please call me at 407-574-2021 or reply to this email.

Respectfully,

AI ENVIRONMENTAL CONSULTING SERVICES, INC.

Luis Llorens

Dibble, Dickson

From:

Dibble, Dickson

Sent:

Wednesday, March 30, 2011 9:23 AM

To:

'llorens@americanincinerators.com'

Cc:

Ajhar, Rebecca

Subject:

Airs ID# 0090054-005-AG; Beckman-Williamson Funeral Home LLC dba Atlas Crematory,

2111 US Hwy 1, Rockledge, FL 32955-3726

Attachments:

ID#0090054;Beckman_WilliamsonFuneralHomeLLCdbaAtlasCrematory.pdf

Tracking:

Recipient

Delivery

Read

........g.

'llorens@americanincinerators.com'

Ajhar, Rebecca

Delivered: 3/30/2011 9:23 AM

Read: 3/30/2011 9:25 AM

Good morning Luis!

I hope this e-mail finds you well.

I am in receipt of a Human Crematory Air General Permit Registration Form for the subject item facility which was prepared by Al Environmental Consulting Services for the purpose of replacing an IE&E, Power Pak II human cremator with a US Cremation Equipment "Classic" Model US 100, cremation unit.

I have performed a cursory review of the form (see pdf file attached) and made an equipment comparison between the Registration form and our database records. Our database records indicate that there is a second cremation unit on site, but the form makes no reference to it. In order for me to perform a thorough review of the facility and complete the registration and entitlement process, the form (Description of Facility-Page 9) should include the identifying details (Make, Model, & S/N) of all existing tort units, not just the unit being replaced or installed.

The form reads:

Description of Facility

Below, or as an attachment to this form, provide a description of <u>all</u> crematory operations at the facility in sufficient detail to demonstrate the facility's eligibility for use of this air general permit and to provide a basis for tracking any future equipment or process changes at the facility. Describe <u>all</u> air pollutant-emitting processes and equipment at the facility, and identify any air pollution control measures or equipment used.

If you, or the preparer of this form can provide me with the identification information for the second unit, I would greatly appreciate it. You may provide the information via e-mail and I will simply attach the e-mail as an addendum to the Registration form

Secondly, the Registration form indicates that Compliance Test Results are from a identical unit, but nowhere in the Compliance Test Report, Attachments #1, and 1A through 1F is there any reference to a specific Make and Model of the unit being tested. The only cross reference made in the report is that the tests were performed at "...Unit #2 at Guiding Light Cremations, LLC, ID 0112701 located at 2431 SW 56th Terrace in West Park, Florida.". If you would be so kind, in the future please make sure there is a reference to the Make and Model of the identical tested equipment on the Compliance Test Report which is being submitted.

Thank you for your assistance in these matters and if you have any questions, comments or concerns please e-mail or call.

Have a great day!

Sincerely yours,

Dickson E. Dibble

Dickson E. Dibble, ES III

Air General Permit Program
FL Dept of Environmental Protection
Div. of Air Resource Management
Bureau of Air Monitoring & Mobile Sources
Tel. (850) 717-9071
FAX (850) 717-9001
GIC - #59571
Dickson.Dibble@dep.state.fl.us



Please note: Florida has a very broad public records law. Most written communications to or from state officials regarding state business are public records available to the public and media upon request. Your e-mail communications may therefore be subject to public disclosure

Dibbete, Dickson

From: Luis Llorens [llorens@americanincinerators.com]

Sent: Wednesday, March 30, 2011 12:27 PM

To: Dibble, Dickson

Cc: cwilkerson@uscremationequipment.com

Subject: RE: Airs ID# 0090054-005-AG; Beckman-Williamson Funeral Home LLC dba Atlas

Crematory, 2111 US Hwy 1, Rockledge, FL 32955-3726

Dear Dick:

certified that the units are the same and are identical. The cremators at Guiding Light cremations are U.S. Cremation Equipment model "Classic".

I took a look at the report and Arlington Environmental did not write it in the report. They are providing me with a letter stating this fact.

I will contact Atlas and get the serial numbers and models for you.

Luis

From: Dibble, Dickson [mailto:Dickson.Dibble@dep.state.fl.us]

Sent: Wednesday, March 30, 2011 9:23 AM **To:** <u>llorens@americanincinerators.com</u>

Cc: Ajhar, Rebecca

Subject: Airs ID# 0090054-005-AG; Beckman-Williamson Funeral Home LLC dba Atlas Crematory, 2111 US Hwy 1,

Rockledge, FL 32955-3726

Good morning Luis!

I hope this e-mail finds you well.

I am in receipt of a Human Crematory Air General Permit Registration Form for the subject item facility which was prepared by Al Environmental Consulting Services for the purpose of replacing an IE&E, Power Pak II human cremator with a US Cremation Equipment "Classic" Model US 100, cremation unit.

I have performed a cursory review of the form (see pdf file attached) and made an equipment comparison between the Registration form and our database records. Our database records indicate that there is a second cremation unit on site, but the form makes no reference to it. In order for me to perform a thorough review of the facility and complete the registration and entitlement process, the form (Description of Facility-Page 9) should include the identifying details (Make, Model, & S/N) of all existing tort units, not just the unit being replaced or installed.

The form reads:

Description of Facility

Below, or as an attachment to this form, provide a description of <u>all</u> crematory operations at the facility in sufficient detail to demonstrate the facility's eligibility for use of this air general permit and to provide a basis for tracking any future equipment or process changes at the facility. Describe <u>all</u> air pollutant-emitting processes and equipment at the facility, and identify any air pollution control measures or equipment used.

If you, or the preparer of this form can provide me with the identification information for the second unit, I would greatly appreciate it. You may provide the information via e-mail and I will simply attach the e-mail as an addendum to the Registration form

Secondly, the Registration form indicates that Compliance Test Results are from a identical unit, but nowhere in the Compliance Test Report, Attachments #1, and 1A through 1F is there any reference to a specific Make and Model of the unit being tested. The only cross reference made in the report is that the tests were performed at "...Unit #2 at Guiding

Light Cremations, LLC, ID 0112701 located at 2431 SW 56th Terrace in West Park, Florida.". If you would be so kind, in the factor please make sure there is a reference to the Make and Model of the identical tested equipment on the Compliance Test Report which is being submitted.

Thank you for your assistance in these matters and if you have any questions, comments or concerns please e-mail or call.

Have a great day!

Sincerely yours,

Dickson E. Dibble

Dickson E. Dibble, ES III

Air General Permit Program
FL Dept of Environmental Protection
Div. of Air Resource Management
Bureau of Air Monitoring & Mobile Sources
Tel. (850) 717-9071
FAX (850) 717-9001
GIC - #59571
Dickson,Dibble@dep.state.fl.us



Please note: Florida has a very broad public records law. Most written communications to or from state officials regarding state business are public records available to the public and media upon request. Your e-mail communications may therefore be subject to public disclosure

The Department of Environmental Protection values your feedback as a customer. DEP Secretary Herschel T. Vinyard Jr. is committed to continuously assessing and improving the level and quality of services provided to you. Please take a few minutes to comment on the quality of service you received. Simply click on this link to the DEP Customer Survey. Thank you in advance for completing the survey.



Arlington Environmental Services, Inc.

Post Office Box 657 ~ Okeechobee, Florida 34973 605 SW Park Street, Suite 209 ~ Okeechobee, Florida 34974 Telephone (863) 467-0555 ~ Facsimile (863) 357-0810 www.arlingtonenvironmental.com

U.S. Cremation Equipment 598 South Northlake Boulevard, Suite 1016 Altamonte Springs, FL 32701

RE: FID 0112701 - Guiding Light Cremations, LLC

Emission Testing Conducted March 3 & 4, 2010

Make: US Cremation Equipment Model: Classic Human Crematory

To Whom It May Concern:

Emission testing for Particulate, Visible, Carbon Monoxide, and Hydrogen Chloride, EPA Methods 1-5, 9, 10, and 26A, was conducted on March 3 & 4, 2010 at the above referenced facility. The units tested were manufactured by US Cremation Equipment and both units were model Classic Human Crematory. In the event you have any questions please do not hesitate to contact me at (863) 467-0555.

Sincerely,

Noah A. Handley, P.E.

Afri Hel

Vice President, Principal Engineer,

Arlington Environmental Services, Inc.

Attachment 1 Compliance Test Report

energy of the control of the control



Arlington Environmental Services, Inc.

"Specializing in Visible Emission and Stack Testing"

April 7, 2010

ELECTRONIC CORRESPONDENCE

Broward County
Air Quality Division
1 North University Drive, Suite 203
Plantation, Florida 33324

Re: Guiding Light Cremations LLC, Unit 2 AIRS ID: 0112701

To Whom It May Concern:

On March 03 and 04, 2010, source tests for particulate, visible and carbon monoxide (EPA Methods 1-5, 9 and 10) were conducted on the exhaust stack servicing the crematory incinerator, Unit #2 at Guiding Light Cremations, LLC, ID 0112701 located at 2431 SW 56th Terrace in West Park, Florida.

The tests were performed in order to comply with the Broward County Department of Planning and Environmental Protection, Air Quality Division, Chapter 27 Article IV, Air Quality, Section 27-179(c)(2). The results comply with Florida's Human Crematory Rule 62-296.401(5), FAC.

The following emission point was tested:

EU002 Exhaust stack servicing the afterburner

To the best of my knowledge, this completes all of the required initial tests. If, for any reason, this is incorrect, please contact me as soon as possible.

Sincerely,

Delira M. Carter

Debra Carter

/dc

Electronic Copy to: Geronimo Mena, Jr., Guiding Light Cremations LLC David Krohn, Guiding Light Cremations, LLC

Source Test Report for Particulate, Visible and CO Emissions

EPA Methods 1-5, 9 and 10

Report 2985-S

March 03 and 04, 2010

prepared for

Guiding Light Cremations, LLC Unit #2 Facility ID 0112701



Arlington Environmental Services, Inc.

Post Office Box 657 ~ Okeechobee, Florida 34973 ~ Telephone 863.467.0555

Table of Contents

		<u>Pa</u>	age
1.0	Introduction	·	1
2.0	Certification of Test R	Results	2
3.0	Allowable Emission I	Determination	3
4.0	Cyclonic Flow Determ	nination	3
5.0	Summary of Results.		4
6.0	Particulate Emission	Results	5
7.0	Visible Emission Resu	ılts	6
8.0	Carbon Monoxide En	nission Results	7
9.0	 9.1 EPA Method 1 9.2 EPA Method 2 9.3 EPA Method 3 9.4 EPA Method 4 9.5 EPA Method 5 9.6 EPA Method 9 	d Analytical Procedures.	8
10.0		minationmpling Points per Traverse	11 12
11.0	Summary of Field and	d Laboratory Data	13
	Attachment A -	Field Data	
	Attachment B -	Laboratory Data	
	Attachment C -	Process Data	
	Attachment D -	Calculations for Run 1	
	Attachment E -	Calibration Data	
	Attachment F -	Project Participants	

1.0 Introduction

Guiding Light Cremations LLC operates a human crematory located at 2431 SW 56th Terrace in West Park, FL. On March 03 and 04, 2010, source tests for particulate, visible and carbon monoxide emissions (EPA Methods 1-5, 9 and 10) were conducted on Unit #2 exhaust stack servicing the crematory incinerator.

The tests were performed in order to comply with the Broward County Department of Planning and Environmental Protection, Air Quality Division, Chapter 27 Article IV, Air Quality, Section 27-179(c)(2). The results comply with Florida's Human Crematory Rule 62-296.401(5), FAC.

Courtney Pitters of the Broward County Division of Environmental Protection, Air Quality Division was present for a portion of the tests.

The retention time for this unit during the test was 1.75 seconds. The substantiating calculations are presented in Appendix D.

The average particulate emission rate, as determined by EPA Method 5, was 0.0159 gr/dscf. (corrected to $7\% \text{ O}_2$). The allowable particulate emission rate is 0.080 gr./dscf. (corrected to $7\% \text{ O}_2$).

The average carbon monoxide emission rate as determined by EPA Method 10, was 0.86 ppm . (corrected to 7% O₂). The allowable carbon monoxide emission rate is 100 ppm (corrected to 7% O₂).

The average visible emission rate as determined by EPA Method 9, was 0.0%. The allowable visible emission rate (highest six minute average) is 5% with up to 15% allowed in a one hour period.

The results of this test verify compliance with the Florida Department of Environmental Protection Human Crematory Rule 62-296.401(5), Florida Administrative Code.

2.0 Certification of Test Results

Facility Tested: Guiding Light Cremations LLC

2431 SW 56th Terrace West Park, FL 33325

Type Process - Human Crematory

Abatement Device - Afterburner

Report 2985-S

March 03 and 04, 2010

Run Numbers 1, 2 and 3

Actual Particulate Emissions - 0.0159gr/dscf (corrected to 7% O₂) Allowable Particulate Emissions - 0.0800 gr./dscf (corrected to 7% O₂)

Actual Carbon Monoxide Emissions - 0.86 ppm (corrected to 7% O₂) Allowable Carbon Monoxide Emissions - 100 ppm (corrected to 7% O₂)

Actual Visible Emissions - 0.0% Allowable Visible Emissions - 5% with up to 15% allowed in a one hour period

All testing and analysis were performed in accordance with the Florida Department of Environmental Protection Human Crematory Rule 62-296.401(5), Florida Administrative Code.

I hereby certify that to my knowledge, all information and data submitted in this report is true and correct.

William D. Arlington

il alington

Project Director

3.0 Allowable Emission Determination

The allowable emissions were determined in accordance with 62.296.401(5) F.A.C. Substantiating data and calculations are presented in the Appendix D.

4.0 Cyclonic Flow Determination

Due to the configuration of the system, cyclonic flow was considered to be non-existent at the sampling site.

5.0 Summary of Results
Guiding Light Cremations, LLC
Unit #2
Report 2985-S

	Run 1	Run 2	Run 3	Average
Date	3/3/2010	3/4/2010	3/4/2010	
Start Time	16:20	9:30	11:00	
Stop Time	17:23	10:33	12:05	
Process Rate (lbs.)	175	180		178
Particulate Emission Rate (gr./dscf @ 7% O ₂)	0.0188	0.0099	0.0189	0.0159
Allowable Particulate Emission Rate (gr./dscf @7% O ₂)	0.080	0.080	0.080	0.080
Visible Emission Rate (%) (highest six minute average) Allowable Visible Emission Rate (%) (with up to 15% for 6 min. per hour)				0.00 5
Carbon Monoxide Emission Rate (ppm @7% O ₂)	0.79	1.04	0.74	0.86
Allowable Carbon Monoxide Emission Rate (ppm @7% O ₂)	100	100	100	100

6.0 Particulate Emission Results Guiding Light Cremations, LLC Unit #2 Report 2985-S

	Run 1	Run 2	Run 3
Area (square feet)	3.08	3.08	3.08
Stack Pressure (inches Hg)	29.88	30.07	30.07
Meter Pressure (inches Hg)	30.06	30.26	30.29
Sample Volume (Std. Cu. Ft.)	52.965	54.952	57.861
Water Vapor (Cubic Feet)	5.52	5.85	6.03
Sample Moisture (percent)	9.44	9.62	9.43
Saturation Moisture (percent)	100.00	100.00	100.00
Molecular Weight (lbs/lb Mole wet)	28.29	28.18	28.27
Velocity (fpm)	887	879	985
Volumetric Flow Rate (acfm)	2734	2710	3036
Volumetric Flow Rate (scfm)	891	933	963
Concentration (gr/dscf)	0.0101 .	0.0051	0.0104
Concentration@7% O2 (gr/dscf)	0.0188	0.0099	0.0189
Mass Emission Rate (lbs./hr.)	0.08	0.04	0.09
Percent Isokinetic	99.51	98.54	100.56

7.0 Visible Emission Results Guiding Light Cremations, LLC Unit #2 Report 2985-S

Emission Point	Allowable Emission Rate (highest six minute average)	Emission Rate (highest six minute average)	Average Opacity
Exhaust Stack	0	0.00	0.00

8.0 Carbon Monoxide Emission Results Guiding Light Cremations, LLC Unit #2 Report 2985-S

·	Run1	Run 2	Run 3	Average
Date	3/3/2010	3/4/2010	3/4/2010	
Start Time	16:20	9:30	11:00	
Stop Time	17:23	10:33	12:05	
Percent Oxygen	13.43	13. 79	13.23	
Carbon Monoxide (PPM)	0.42	0.53	0.41	
Carbon Monoxide Emissions (PPM @ 7% O ₂)	0.79	1.04	0.74	0.86
Carbon Monoxide Allowable (PPM@ 7% O ₂)	100	100	100	100

9.0 Overview of Field and Analytical Procedures

9.1 EPA Method 1 - Sample and Velocity Traverses for Stationary Sources

Principle – To aid in the representative measurement of pollutant emissions and/or total volumetric flow rate from a stationary source, a measurement site where the effluent stream is flowing in a known direction is selected and the cross-section of the stack is divided into a number of equal areas. A traverse point is then located within each of these equal areas. See Sampling Point Determination.

Applicability – This method is applicable to flowing gas streams in ducts, stacks and flues. This method cannot be used when: 1) flow is cyclonic or swirling 2) a stack is smaller than about 12 inches in diameter, or 0.071 cross-sectional area or 3) the measurement site is less than two stack or duct diameters downstream or less than a half diameters upstream from a flow disturbance. The procedures in this method were utilized in its entirety according to the procedures outlined in 40 CFR Part 60, Appendix A.

9.2 EPA Method 2 - Determination of Stack Gas Velocity and Volumetric Flow Rate

Principle - Type S Pitot Tube - The average gas velocity in a stack is determined from the gas density and from measurement of the average velocity head with a Type S pitot tube.

Applicability - This method is applicable for measurement of the average velocity of a gas stream and for quantifying gas flow.

This procedure is not applicable at measurement sites which fail to meet the criteria of Method I. This method cannot be used for direct measurement in cyclonic or swirling gas streams. The procedures in this method were utilized in its entirety according to the procedures outlined in 40 CFR Part 60, Appendix A.

9.3 Method 3 - Gas Analysis for the EPA Determination of Dry Molecular Weight

Principle – A gas sample is extracted from a stack by one of the following methods 1) Single-point grab sampling 2) single-point, integrated sampling or 3) multi-point, integrated sampling, the gas sample is analyzed for percent CO_2 , percent O_2 , and if necessary for CO. For dry molecular weight determination, either an Orsat or a Fyrite analyzer may be used for the analysis.

Applicability – This method is applicable for determining carbon dioxide and oxygen concentrations and dry molecular weight of a sample from a gas stream of a fossil fuel combustion process. The method may also be applicable to other processes where it has been determined that compounds other than CO₂, O₂, CO, and nitrogen are not present in concentrations sufficient to affect the results. The procedures in this method were utilized in its entirety according to the procedures outlined in 40 CFR Part 60, Appendix A.

9.4 EPA Method 4 - Determination of Moisture Content in Stack Gases

Principle - A gas sample is extracted at a constant rate from the source; moisture is removed from the sample stream and determined either volumetrically or gravimetrically.

Applicability – This method is applicable for determining the moisture content of stack gas. There are two procedures given to determine the moisture. The procedure for the reference method to determine the moisture content was used to calculate the emission data. The reference method was conducted simultaneously with the pollutant emission measurement run, calculation of percent isokinetic, pollutant emission rate, etc. for the run is based upon the results of the reference method or its equivalent. The procedures in this method were utilized in its entirety according to the procedures outlined in 40 CFR Part 60, Appendix A.

9.5 EPA Method 5 - Determination of Particulate Emissions from Stationary Sources

Principle – Particulate matter is withdrawn isokinetically from the source and collected on a glass fiber filter maintained at a temperature in the range of 120 - 248° For such other temperature as specified by an applicable subpart of the standards or approved by the Administrator, U.S. Environmental Protection Agency, for a particular application.

The particulate mass which includes any material that condenses at or above the filtration temperature, is determined gravimetrically after removal of uncombined water.

Applicability – This method is applicable for the determination of particulate emissions from stationary sources. The procedures in this method were utilized in its entirety according to the procedures outlined in 40 CFR Part 60, Appendix A.

Impinger Train Optional, May Be Replaced By An Equivelent Condumer Temperature Sensor Well Sensor Heat Traced Glass Filter Heat Traced Heat Area Manameter Temperature Water Glass Filter Heat Area Manameter Temperature Water Glass Filter Heat Area Manameter Temperature Water Glass Filter Glass Filter Glass Filter Heat Area Manameter Temperature Water Glass Filter Glass Filter

Diagram of EPA Method 5 Sampling Train

Figure F5-1. Particulate Sampling Train.

9.6 EPA Method 9 - Visual Determination of the Opacity of Emissions from Stationary Sources

Principle – The opacity of emissions from stationary sources is determined visually by a qualified observer.


Applicability – This method is applicable for the determination of the opacity of emissions from stationary sources pursuant to 60.11(b) and for qualifying observers for visually determining the opacity of emissions.

9.7 EPA Method 10 - Determination of Carbon Monoxide Emissions from Stationary Sources

Principle – An integrated or continuous gas sample is extracted from a sampling point and analyzed for carbon monoxide (CO) content using a Luft-type nondispersive infrared analyzer or equivalent.

Applicability – This method is applicable for the determination of carbon monoxide emissions from stationary sources only when specified by the test procedures for determining compliance with new source performance standards. The procedures in this method were utilized in its entirety according to the procedures outlined in 40 CFR Part 60, Appendix A.

10.0 Sampling Point Determination Minimum Number of Sampling Points

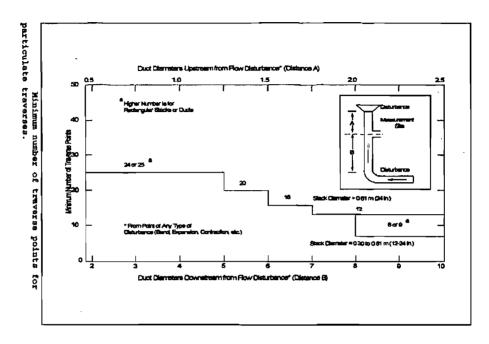

Per Particulate Traverse

Circular Stacks

The number of sampling points is selected according to the above diagram, with the number of points equaling the next higher multiple of four.

Rectangular Stacks


The number of sampling points is determined using the matrix below.

Number of Traverse Points	Subarea Layout Matrix
9	3 x 3
12	4 x 3
16	4 x 4
20	5 x 4
25	5 x 5
30	6 x5
36	6 x 6
42	7 x 6
49	7 x 7

10.1 Sampling Point Determination Guiding Light Cremations, LLC Unit #2 Report 2985-S

Stack Configuration	Rectangular
Side 1 - with ports (inches)	24
Side 2 - (inches)	18.5
Equivalent Diameter	20.89
Distance A - Ports to Downstream Disturbance (inches)	24
Distance A - Ports to Downstream Disturbance (diameters)	1.15
Distance B - Ports to Upstream Disturbance (inches)	48
Distance B - Ports to Upstream Disturbance (diameters)	2.30
Number of Test Ports	6
Number of Sampling points per Traverse	5
Number of Points Sampled	25

Photograph of Stack

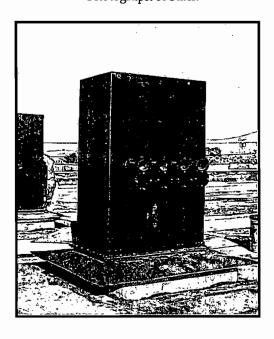

Traverse Point Location			
Traverse Point No.	Inches to Stack Wall		
1	1.9		
2 .	5.6		
3 .	9.3		
4	13.0		
5	16.7		

11.0 Summary of Field and Laboratory Data Guiding Light Cremations, LLC Unit #2 Report 2985-S

<u> </u>	Run 1	Run 2	Run 3
Date	3/3/2010	3/4/2010	3/4/2010
Start Time	16:20	9:30	11:00
Stop Time	17:23	10:33	12:05
СР	0.84	0.84	0.84
Υ	0.9947	0.9947	0.9947
^Ha (inches H2O)	1.7304	1.7304	1.7304
Diameter of Nozzle (inches)	0.7503	0.7503	0.7503
Stack Diameter or Equivlant (inches)	20.89	20.89	20.89
Static Pressure (inches H2O)	-0.02	-0.02	-0.02
Barometric Pressure (inches Hg)	29.88	30.07	30.07
Test Time (minutes)	60	60	60
Meter Volume (cubic feet)	53.623	54.165	57.845
Square Root ^P (inches H2O)	0.156	0.159	0.171
Orifice Pressure ^H (inches H2O)	2.458	2.583	3.000
Average Meter Temperature (Deg. F)	74.0	63.4	71.4
Average Stack Temperature (Deg. F)	1004.4	931.5	1054.1
Particulate Sample Weight (grms)	0.0347	0.0181	0.0391
Water Collected (grms)	117.1	124.1	127.8
Percent CO2	5.1	4.5	5.0
Percent O2	13.4	13.8	13.2
Molecular Weight (lbs/lb Mole)	29.36	29.27	29.33
Nozzle Area (square feet)	0.00307	0.00307	0.00307

Attachment A - Field Data



Arlington Environmental Services, Inc. Particulate Field Data

Plant	Guidi	ng Light Cremations, LLC	Y _{qa}	0.98	71	
Report		2985-S-1	^^Ha	1.73	04	
Date		03/03/10	Dn	0.75	603	
Operator	_	WA	Diameter (in.)		24 X 18.	5
Time		16:20 - 17:23	Traverses X Points	4	Х	6
K Factor		100.0	Static Pressure		-0.015	-
Assumed 1	Moisture %	12	Barometric Pressur	e (in. Hg)	2	9.88
Dry Gas M	leter No.	1	Test Time (min.)		60	
Nozzle ID	No.	#24	Metered Volume		53.623	
Wet Bulb ¹	Temperatur	e NA	Avg. Sq Rt ^P	-	0.156	
Post Leak	Check	.004 cfm @ 20" Hg	Avg. ^H	2.45	58	
Cp Factor	_	0.84	Avg. Meter Temp.		74.0	
Υ		0.9947	Avg. Stack Temp.	_	1004.4	

Traverse	Sampling	DG METER	Velocity	Pressure	Meter	Pump	Impinger	Filter	Stack
Point	Time	(cu.ft.)	Head	Orifice Meter	Temperature	Vacuum	Temperature	Temperature	Temperature
Number	(min.)	518.024	(^P) in. H20	(^H) in. H20	(F)	(in. Hg.)	(F)	(F)	(F)
1	2.5	520.21	0.020	2.00	71	4.5	63	234	1075
2	2.5	522.23	0.025	2.50	71	5.0	52	239	1083
3	2.5	524.34	0.025	2.50	70	5.5	52	237	1090
4	2.5	526.58	0.025	2.50	71	5.5	53	245	1069
5	2.5	528.96	0.025	2.50	71	5.5	54	245	979
6	2.5	531.43	0.025	2.50	71	5.5	53	247	1015
1	2.5	533.52	0.020	2.00	72	5.0	56	247	976
2	2.5	535.52	0.020	2.00	72	5.0	53	251	1036
3	2.5	537.56	0.025	2.50	72	6.0	53	241	1024
4	2.5	540.47	0.030	3.00	73	7.0	- 54	256	1024
5	2.5	542.64	0.030	3.00	74	7.0	54	258	1017
6	2.5	545.12	0.030	3.00	75	7.0	55	232	1011
1	2.5	547.22	0.020	2.00	75	5.5	57	232	1004
2	2.5	549.65	0.020	2.00	75	5.5	55	242	987
3	2.5	551.54	0.025	2.50	75	6.0	57	249	984
4	2.5	553.82	0.025	2.50	76	6.0	56	244	971
5	2.5	556.31	0.030	3.00	76	7.0	56	253	963
6	2.5	558.78	0.030	3.00	76	7.0	56	246	952
1	2.5	561.11	0.020	2.00	76	6.0	58	244	964
2	2.5	563.03	0.020	2.00	77	6.0	55	245	1011
3	2.5	565.76	0.020	2.00	77	6.0	55	246	1012
4	2.5	567.21	0.025	2.50	77	7.0	56	243	972
5_	2.5	569.42	0.025	2.50	77	7.0	56	248	958
6	2.5	571.647	0.030	3.00	77	7.5	56	253	928



Arlington Environmental Services, Inc. Particulate Field Data

Plant	Guid	ing Light Cremations, LLC	Y_{qa}	0.9884				
Report		2985-S-2	^Ha	1.7304				
Date		03/04/10	Dn		0.75	503		
Operator		WA .	Diameter ((in.) 24 X 18.5			8.5	
Time		9:30 - 10:33	Traverses	es X Points 4 X			6	
K Factor		100.0	Static Pres	Static Pressure -0.015			5	
Assumed	Assumed Moisture % 10		Barometrio	Barometric Pressure (in. Hg)		30.07		
Dry Gas N	/leter No.]	1	Test Time	e (min.)60				
Nozzle ID	No.	#24	Metered V	/olume 54.165				
Wet Bulb	Wet Bulb Temperature NA		Avg. Sq R	Rt ^P 0.159			9	
Post Leak	Post Leak Check .008 cfm @ 20 " Hg		Avg. ^H	2.583				
Cp Factor	Cp Factor 0.84		Avg. Mete	er Temp. 63.4				
Υ	_	0.9947	Avg. Stacl	ck Temp. 931.5		5		

Traverse	Sampling	DG METER	Velocity	Pressure	Meter	Pump	Impinger	Filter	Stack
Point	Time	(cu.ft.)	Head	Orifice Meter	Temperature	Vacuum	Temperature	Temperature	Temperature
Number	(min.)	572.759	(^P) in. H20	(^H) in. H20	(F)	(in. Hg.)	(F)	(F)	(F)
1	2.5	574.24	0.010	1.00	58	3.5	61	245	800
2	2.5	576.21	0.015	1.50	58	5.0	54	242	881
3	2.5	577.91	0.020	2.00	57	6.0	52	245	866
4	2.5	579.98	0.020	2.00	57	6.5	51	247	847
5	2.5	582.01	0.020	2.00	58	7.0	51	249	821
6	2.5	584.31	0.020	2.00	58	7.0	51	246	794
1	2.5	586.31	0.020	2.00	59	7.0	51	248	838
2	2.5	588.28	0.020	2.00	60	7.0	52	249	891
3	2.5	590.68	0.025	2.50	61	8.0	52	250	886
4	2.5	592.77	0.025	2.50	62	8.0	. 53	244	873
5	2.5	595.24	0.030	3.00	62	9.0	53	247	848
6	2.5	597.52	0.025	2.50	63	8.5	54	247	833
1	2.5	600.02	0.025	2.50	64	9.0	56	250	928
2	2.5	602.01	0.025	2.50	65	9.0	54	243	986
. 3	2.5	604.31	0.030	3.00	65	9.0	54	244	985
4	2.5	606.91	0.035	3.50	66	10.5	55	255	979
5	2.5	609.88	0.035	3.50	67	10.5	55	246	969
6	2.5	612.21	0.035	3.50	67	10.5	55	243	968
1	2.5	614.46	0.025	2.50	68	9.0	57	248	1 044
2	2.5	617.45	0.030	3.00	68	10.5	56	249	1 056
3	2.5	619.48	0.035	3.50	69	12.0	57	246	1 060
4	2.5	622.34	0.035	3.50	69	12.0	57	248	1 064
5	2.5	624.56	0.035	3.50	70	12.0	57	251	1 065
6	2.5	626.924	0.025	2.50	70	10.5	57	252	107 <u>3</u>



Arlington Environmental Services, Inc. Particulate Field Data

Plant	Guiding Light Cremations, LLC		Y_{qa}	1.0045			
Report		2985-S-3	^Ha	1.7304			
Date		03/04/10	Dn		0.75	03	
Operator		WA	Diameter ((in.) 24 X 18.5			
Time		11:00 - 12:05	Traverses	X Points ⁻	4	Х	6
K Factor		100.0	Static Pres	-0.015			
Assumed	Assumed Moisture % 8		Barometric	c Pressure (in. Hg) 30.		30.07	
Dry Gas M	/leter No	1	Test Time	e (min.) 60			
Nozzle ID	No.	#24	Metered V	/olume 57.845			5
Wet Bulb	Temperatur	e NA	Avg. Sq Rt	:^P -	P 0.171		
Post Leak	Post Leak Check .004 cfm @ 20" Hg		— Avg. ^H	3.000			
Cp Factor	Cp Factor 0.84		Avg. Meter	r Temp. 71.4			
Υ	0.9947		Avg. Stack	ck Temp. 1054.1			1

Traverse	Sampling	DG METER	Velocity	Pressure	Meter	Pump	Impinger	Filter	Stack
Point	Time .	(cu.ft.)	Head	Orifice Meter	Temperature	Vacuum	Temperature	Temperature	Temperature
Number	(min.)	627.279	(^P) in. H20	(^H) in. H20	(F)	(in. Hg.)	(F)	(F)	(F)
1	2.5	630.02	0.045	4.50	68	8.5	65	227	1 056
2	2.5	632.64	0.045	4.50	68	8.5	54	235	1 188
3	2.5	635.76	0.050	5.00	68	10.5	56	247	1212
4	2.5	639.12	0.050	5.00	68	11.0	57	250	1222
5	2.5	641.87	0.035	3.50	68	11.0	59	236	1 164
6	2.5	644.20	0.030	3.00	69	10.0	59	248	1091
1	2.5	646.66	0.025	2.50	70	7.0	60	247	1093
2	2.5	649.11	0.030	3.00	70	8.0	58	250	1 101
3	2.5	651.33	0.025	2.50	70	8.0	58	249	1086
4	2.5	653.53	0.030	3.00	71	9.0	58	248	1088
5	2.5	656.76	0.035	3.50	71	9.5	58	252	1016
6	2.5	658.94	0.035	3.50	71	9.5	58	242	1013
		*							
1	2.5	661.05	0.020	2.00	72	7.0	60	243	1018
2	2.5	663.27	0.025	2.50	72	9.5	59	241	1045
3	2.5	665.30	0.020	2.00	72	8.5	58	249	1038
4	2.5	667.71	0.030	3.00	73	9.5	58	245	1022
5	2.5	670.28	0.030	3.00	73	9.5	58	247	1004
6	2.5	672.48	0.030	3.00	73	10.0	58	247	989
11	2.5	674.18	0.015	1.50	74	7.0	59	246	968
2	2.5	676.26	0.020	2.00	74	8.5	59	238	1015
3	2.5	678.14	0.020	2.00	74	9.0	59	248	1006
4	2.5	680.41	0.025	2.50	74	9.5	59	243	977
5	2.5	682.68	0.025	2.50	75	10	59	244	939
_6	2.5	685.124	0.025	2.50	75	75	60	240	947

Arlington Environmental Services, Inc. (863) 467-0555

VISIBLE EMISSION TEST

Method Used (Circle One) Method 9 203A	Observat 3	ion Date	10		Start Time 0930			Stop Time [C30			
Company Name Everglades Facility Name	203B Report <u>2985-S</u>	Min	0	15	30	45	Min	0	15	30	45
Everglades Facility Name	Crematorium ARS 1112721	1	0	0	0	0	31	0	0	0	0
Street Address		2	0	0	0	0	32	0	0	0	0
1 2421 511 56 7000		3	0	0	0	0	33	0	0	0	0
City West Park FA	7 3023	4	0	0	0	0	34	0	0	0	0
(154) 381 - 8888		5	Ö	0	0	0	35	0	0	0	0
Process Human Crematory Control Equipment	2 Operating Mode 16 S	6	0	0	0	0	38	0	0	0	0
Control Equipment After burner	Operating Mode F	7	0	0	0	0	37	0	0	0	0
Describe Emission Point		8	0	0	0	0	38	0	0	0	0
Rectangular Stack HiorEmis.Point	Ht Rei to Observer	9	0	0	0	0	39	0	0	0	0
_~20'	Ht Rel to Observer ~ / 5 Direction to Emis. Pt (Degrees) ~ 3 3 4	10	0	0	0	0	40	0	0	0	0
Distance to Emis. Pt. ~ 800 '		11	0	0	0	0	41	0	0	0	0
Verticie Angle to Obs. < /8 °	Direction to Obs. Pt. (Degrees) ~ 336	12	0	0	0	0	42	0	0	0	0
Distance and Direction to Obs. Pt from Emission Pt		13	0	0	0	0	43	0	0	0	0
Describe Emissions		14	0	0	0	0	44 .	0	0	0	0
None Emission Color	Water Droplet Plume	15	0	0	0	0	45	0	0	0	0
Clear	Water Droplet Plume Attached Detached None None	16	0	0	0	0	46	0	0	0	0
Describe Pluma Background		17	0	0	0	0	47	0	0	Ö	0
Background Color Blue & White	Sky Conditions Scuffered	18	0	0	0	0	48	0	Ö	0	0
Wind Speed ~ 12-15 MPH	Wind Direction NW	19	0	0	0	0	49	0	0	0	0
Ambient Temp. ~ 58°F	Wet Buib Temp. % RH	20	0	0	0	0	50	0	0	0	0
Source Lav	yout Sketch Draw North Arrow	21	0	0	0	0	51	O	0	0	0
	□ IN □ MN	22	0	0	0	0	52	0	0	0	0
		23	0	0	0	0	53	0	0	0	0
units unit 2		24	0	0	0	0	54	0	O	0	0
Obser	vation Point	25	0	0	0	0	55	0	0	D	0
Back Top	<u> </u>	26	0	0	0	0	56	0	0	0	0
	~20 Feet	27	0	0	0	0	57	0	0	0	0
Obsen	ver's Position	28	0	0	0	0	58	O	0	0	0
	Side View	29	0	0	0	0	59	9	0	0	0
Sun Location	Stack	30	0	0	0	0	60	0	0	0	0
Sun Locatien	Line Sun Wind		r of Read	% were			Highest	Opacity 6 Min P	eriod	0	
Latitude Longitude	Declination	Min	of opacit	Max	95 			Opacity 6 Min P		0	
		. L	s Name (P		Stev	e We	bb				
Comments			s Signatur	Sty	cin	_ L.	W	ell	Date	3-4	-10
		Organiza		Arlin	gton	Envir	onme	ntal S	Servic		
		Certifled	Ву	Whit	low E	nterp	rises	•	Date	1/15	/10



Attachment B - Laboratory Data

Particulate Laboratory Data Guiding Light Cremations, LLC Unit #2 Report 2985-S

Run 1

C:1	lter	NI.	 ha:

1484

Final Weight Tare Weight Difference 0.3891 grams 0.3713 grams 0.0178 grams

Beaker Number

1C

Final Weight Tare Weight Difference 114.0708 grams 114.0533 grams 0.0175 grams

Filter Blank Number

1483

Final Weight Tare Weight Difference 0.3700 grams 0.3699 grams 0.0001 grams

Wash Down Blank

Volume of Rinse Solution of Residue Total Residue 70 mls 0.00000784 grams/mls 0.0005488 grams/mls

Total Particulate Weight

0.0347 grams

Water Collected

Final Impinger Water Initial Impinger Water Final Silica Weight Silica Tare Weight 309 MLS 200 MLS 208.3 GRAMS 200.0 GRAMS

Total Water Collected

117.1 GRAMS

Analyst

· truit

Particulate Laboratory Data Guiding Light Cremations, LLC Unit #2 Report 2985-S

Run 2

Fil	ltor	N	ım	hai

1485

Final Weight Tare Weight Difference 0.3827 grams 0.3704 grams 0.0123 grams

Beaker Number

2C

Final Weight Tare Weight Difference 117.5130 grams 117.5064 grams 0.0066 grams

Filter Blank Number

1483

Final Weight Tare Weight Difference 0.3700 grams 0.3699 grams 0.0001 grams

Wash Down Blank

Volume of Rinse Solution Residue Total Residue 95 mls 0.00000784 grams/ml 0.0007448 grams/ml

Total Particulate Weight

0.0181 grams

Water Collected

Final Impinger Water Initial Impinger Water Final Silica Weight Silica Tare Weight 315 MLS 200 MLS 209.3 GRAMS 200.0 GRAMS

Total Water Collected

124.1 grams

Analyst

- 4

Particulate Laboratory Data Guiding Light Cremations, LLC Unit #2 Report 2985-S

Run 3

Filter Number

1486

Final Weight Tare Weight Difference 0.4004 grams 0.3677 grams 0.0327 grams

Beaker Number

3C

Final Weight Tare Weight Difference 114.4563 grams 114.4492 grams 0.0071 grams

Filter Blank Number

1483

Final Weight Tare Weight Difference 0.3700 grams 0.3699 grams 0.0001 grams

Wash Down Blank

Volume of Rinse Solution Residue Total Residue 75 mls. 0.00000784 grams/ml. 0.000588 grams

Total Particulate Weight

0.0391 grams

Water Collected

Final Impinger Water Initial Impinger Water Final Silica Weight Silica Tare Weight 317 mls. 200 mls. 211.0 grams 200.0 grams

Total Water Collected

127.8 grams


Analyst

J

Attachment C - Process Data

Emission Control Device and Process Data

Company Guiling highT	Crem	LADITA	
Installation 47 # 2	·		
Date 3-4-10 R	eport No	2985-	<u>S</u>
Type of Installation Commerce	· · · · · · · · · · · · · · · · · · ·		·
Type of Material Processed Human	Ren	ains:	
Type(s) of Fuel Used Natural	•		
Type of Pollution Control System A			
General Condition of Control Equipment			
		•	
Run No.	3-3-10	3-4-10	3-4-10
Start Time	16:20	9-30	10:00
Stop Time	17:23	10:33	12:05
Fuel Used	NG	NG	NG
Scrubber Water Flow Rate (GPM)	NA	NA	NA
Pressure Drop (in. H2O)	NA	NA	NA
Total Operating +emp 0 2	1680	1630	1720
Process Rate ('\b's s/Hr.)	175	-18	30 -
Percent Recycle	NA	NA	NA
	·		
Signature Col. Confe	Title		
Name	<u>:</u>		

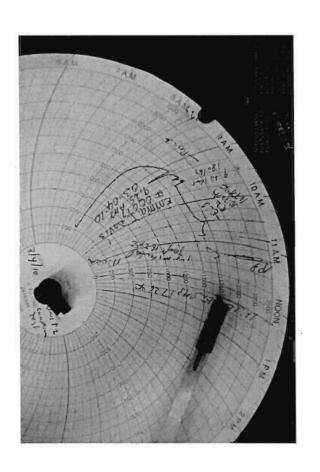

Attachment D - Calculations for Run 1

CALCULATIONS FOR RUN 1 Guiding Light Cremations, LLC Unit #2 Report 2985-S

Page 1 of 2

STACK AREA

(SIDE 1) X (SIDE 2) / 144 24.00 X 18.50 / 144 3.08 SQ.FT.

STACK PRESSURE

BAROMETRIC PRESSURE + (STATIC PRESSURE/ 13.6)
29.88 + (-0.02 /13.6)
29.88 IN.HG

METER PRESSURE

BAROMETRIC PRESSURE + (ORIFICE PRESURE/13.6) 29.88 + (2.46 / 13.6) 30.06 IN.Hg

SAMPLE VOLUME

17.64 X (Y) X METER VOLUME X METER PRESSURE / (METER TEMP. + 460)
17.64 X 0.9947 X 53.623 X 30.06 / (74.0 + 460)
52.965 STD.CU.FT.

WATER VAPOR VOLUME

.04715 X WATER COLLECTED 0.04715 X 117.1 5.52 STD.CU.FT.

SAMPLE MOISTURE

100 X WATER VAPOR VOLUME / (WATER VAPOR VOLUME + SAMPLE VOLUME)
100 X 5.52 / (5.52 + 52.965)
9.44 %

SATURATION MOISTURE

100 X (VAPOR PRESSURE @ STACK TEMP. / STACK PRESSURE) 100 X (######### / 29.88) 100.00 %

STACK MOISTURE FRACTION

(THE LESSER OF SAMPLE MOISTURE OR SATURATION MOISTURE) / 100 0.094

DRY MOLECULAR WEIGHT OF STACK GAS

(.28 X (100-%N2)) + (.44 X %CO2) + (.32 X %O2)

(.28 X (100 - (5.14 + 13.43) + (.44) 5.1 + (.32) 13.43) 29.36

CALCULATIONS FOR RUN 1 Guiding Light Cremations, LLC Unit #2 Report 2985-S

Page 2 of 2

MOLECULAR WEIGHT OF STACK GAS

MOLECULAR WEIGHT X (1 - MOISTURE) + (18 X MOISTURE) 29.36 X (1 - 0.094) + (18 X 0.094) 28.29

STACK VELOCITY

85.49 X CP X 60 X SQ.(^P) X SQ.(STACK TEMP + 460)/SQ.(STACK PRESSURE X MOLECULAR WT.)
85.49 X 0.840 X 60 X 0.156 X SQ.(1004.4 + 460) / SQR(29.88 X 28.29
887 FPM

VOLUMETRIC FLOW RATE (ACFM)

VOLUMETRIC FLOW RATE (SCFM) DRY

17.64 X (ACFM) X STACK PRESSURE X (1-MOISTURE) / (STACK TEMP. + 460)
17.64 X 2734 X 29.88 X (1 - 0.094) / (1004.4 + 460)
891 SCFM (DRY)

CONCENTRATION (gr/dscf)

Total Particulate Weight X 15.43 / Sample Volume 0.0347 X 15.43 / 52.96 0.0101

CONCENTRATION@7% O2 (gr/dscf)

Concentration X 13.9 / (20.9 - %o2) 0.0101 X 13.9 / (20.9 - 13.43) 0.0188

MASS EMISSION RATE (LBS./HR.)

CONCENTRATION X (SCFM- DRY) X 60 / 7000 0.0101 X 891 X 60 / 7000 0.08 LBS/HR

PERCENT ISOKINETIC

. (STACK PRES. X VELOCITY X NOZZLE AREA X TEST TIME X (1-MOISTURE))

0.0945	Χ (1004.38	+ 460)	X	52.96	X	60
29.88	X	887	Х	0.00307 99.51		60.00	X (1- 0.094)

ResidenceTime Unit 2

					-
· · · · · · · · · · · · · · · · · · ·	RESIDENCE T	IRAC	CALCIII ATIC	\	
	KESIDENCE I	I I VI I	CALCULATIC	M	-
					<u> </u>
	CORRECTION FO	R QL	IENCHED AIR A	TOU	TLET
					•
PLANT:	Guiding Light				
SOURCE:	Unit #2			_	
LOCATION:				_	
DATE:					
STACK PRESSURE:	30.07				
CHARGE RATE:					
•		SOU	RCE PARAMET	ERS	
	OUTLET STACK		AMBIENT AIR		SECONDARY CHAMBER
TEMPERATURE,F	1064		65		1624
AIR FLOW,ACFMD	2662				
AIR FLOW,ACFM	2826				
H2O FLOW,ACFM	164				
PRESSURE,PSI	14.77		14.77		14.77
AIR ENTHALPY,BTU/LB	375.5		125.4		528.0
H2O ENTHALPY,BTU/LB	709.8	1	231.2	1	1012.2
SCC VOLUME,CFT	1				71
HUMIDITY RATIO			0.02		
	EQUATIONS		5,62		_
					_
	1. MASS = PVM/R	T	M = MOLECUL	AR WI	FIGHT
			R = 1545 ft-lbf/ll		
	MASS (lbm/min) =	(nsia			ol) x (144 sq.in/sq.ft)
	The too (Ibrilling		5 ft-lbf/lbm-mol x		
		(101			
	2. HEAT LOSS FR	OM S	CC = HEAT GAI	INEDI	L RV AMRIENT AIR
			,STACK) - (M(All		
<u>-</u>			O,STACK) - M(H		
	101(1120,000)	141(112			VID.)
	OUTLET FLOWS				
	OCILLI LOWS				_
	M(DRY AIR) =		69.66	lh/mir	<u> </u>
_	M(H2O) =			lb/mir	
	M(TOTAL) =		72.33		
	WI(TOTAL) -		12.33	וווווועוו	1
					,
					_
-	DEGIDENCE T		0.41.01		
	RESIDENCE T	IME	CALCULATIO	אכ	

ResidenceTime Unit 2

	CORRECTION F	OR QU	ENCHED AIR A	TOU	TLET
	SCC DRY AIR				
	(M x ENTHALPY	CHANG	GE)scc = (M x El	NTHA	LPY CHANGE)amb.
	H(Mscc) =		152.5	BTU/	lbm
	H(Mamb) =		250.1	BTU/	lbm
_	M(amb) =		0.610	x M(s	scc)
	M(scc) + M(amb)) =	69.660	lb/mii	n .
	M(scc)AIR =		43.274	lb/mii	n .
_					
	SCC H2O				
	M(scc)H2O + M(amb)H2	O = M(outlet)H2	O	
	M(amb.) H2O =				dry air
	M(amb.) AIR =		26.39	lb/mi	n
	M(amb.) H2O =		. 0.53	lb/mi	n
	M(scc) H2O =		2.14	lb/mi	n
	, ,				
	SCC VOLUMET	RIC FLO)W		
	V = MRT/PM	@	1624	F	
			14.77	psi	
	AIR:			•	
		V =	2261.3	ACF	M
	H2O:				,
_		V =	179.9	ACF	<u> </u>
	TOTAL SCC:				
_		V =	2441.2	ACFI	M
_					1
	SCC RESIDENC	ETIME			
	RESIDENCE TIM	ΛΕ =	1.75	SEC	ONDS


Attachment E - Calibration Data

9/20/2009 29.98 ACTUAL VACUUM 24.0 24.0 24.0 22.5 22.5 22.5 22.0	^H (IN H2O) 0.31 0.31 0.31	Y= ^Ha= TIME (MIN.) 10 10	0.9947 1.7304 AMBIENT TEMP INITIAL 83 83 83	MAX % VARI MAX % VARI AMBIENT TEMP. FINAL 83		1.8562% 1.2487% METER TEMP.	PASS PASS METER READING	METER								
24.0 24.0 24.0 24.0 24.0 22.5 22.5	(IN H2O) 0.31 0.31 0.31	(MIN.) 10 10	TEMP INITIAL 83 83	TEMP. FINAL	TEMP.			METER								
24.0 24.0 24.0 24.0 24.0 22.5 22.5	(IN H2O) 0.31 0.31 0.31	(MIN.) 10 10	TEMP INITIAL 83 83	TEMP. FINAL	TEMP.			METER								
22.5				83 83	82 83 85	FINAL 83 84 85	INITIAL 719.500 722.767 726.050	READING FINAL 722.767 726.050 729.337	VM (CU,FT,) 3.2670 3.2830 3.2870	VM :ORRECTE 3.1872 3.1969 3.1920	Vcr STD 3.1328 3.1328 3.1328	Vcr NOMINAL 3,2166 3,2166 3,2166	Y 0.9829 0.9799 0.9814 0.9814	VARIATION 0.0015 -0.0015 0.0000 0.0186	^H (IN. H2O) 1.7327 1.7295 1.7247 1.7290	VARIATION 0.0037 0.0005 -0.0042 0.0008
	0.66 0.66	10 10 10	84 84 85	84 84 85	86 86 87	86 87 87	730.400 735.138 739.858	735.138 739.858 744.580	4.7380 4.7200 4.7220	4.5966 4.5749 4.5727	4.5721 4.5721 4.5679	4.7031 4.7031 4.7074	0.9947 0.9994 0.9990 0.9977	-0.0030 0.0017 0.0013 0.0023	1.7208 1.7193 1.7208 1.7203	0.0005 -0.0011 0.0005 0.0058
19.5 18.0 18.0	1.15 1.15 1.10	10 10 10	86 87 88	86 87 88	88 90 91	89 90 91	745.400 751.583 757.678	751.563 757.678 763.873	6.1830 6.0950 6.1950	5.9783 5.8771 5.9620	5.9224 5.9170 5.9116	6.1145 6.1201 6.1257	0.9907 1,0068 0.9916 0.9963	-0.0057 0.0105 -0.0048 0.0037	1.7788 1.7772 1.7000 1.7520	0.0268 0.0252 -0.0520 0.0125
20.5 20.5 20.5	1.85 1.85 1.85	10 10 10	88 88 . 88	88 88 88	91 92 93	92 92 93	765,300 773,178 781.096	773.178 781.096 789.010	7.8780 7.9180 7.9140	7.5887 7.6203 7.6027	7.5765 7.5765 7.5765	7.8509 7.8509 7.8509	0.9984 0.9943 0.9966 0.9964	0.0020 -0.0021 0.0002 0.0036	1.7390 1.7375 1.7343 1.7369	0.0021 0.0005 -0.0026 0.0038
17.5 17.5 17.5	3.55 3.55 3.55	10 10 10	88 88 88	88 88 88	93 94 95	94 95 95	790,000 800,963 811.885	800,963 811.885 822.812	10,9630 10,9220 10,9270	10.5659 10.5074 10.5028	10.5451 10.5451 10.5451	10.9270 10.9270 10.9270	0,9980 1,0036 1,0040 1,0019	-0.0039 0.0017 0.0021 0.0019	1.7164 1.7133 1.7116 1.7139	0,0026 -0,0005 -0,0021 0,0096
N	DATE	3/21/2009)	BAROMETRI	C PRESSUF	RE	30,12									
ACTUAL VACUUM 21.0 21.0 21.0	^H (IN H2O) 1.15 1.15 1.15	TIME (MIN.) 10 10	AMBIENT TEMP INITIAL 76 75 75	AMBIENT TEMP. FINAL 75 75 74	METER TEMP. INITIAL 82 81 80	METER TEMP. FINAL 81 80 80	METER READING INITIAL 679.000 685.182 691.342	METER READING FINAL 685.182 691.342 697.478	VM (CU.FT.) 6.1820 6.1600 6.1360	VM ORRECTE 6.0828 6.0723 6.0543	Vcr STD 6.0082 6.0110 6.0138	Vcr NOMINAL 6,0555 6,0526 6,0498	Y 0.9877 0.9899 0.9933 0.9903	VARIATION -0.0086 -0.0064 -0.0030 -0.0060	^H (IN. H2O) 1.7590 1.7606 1.7606 1.7600	VARIATION -0.0011 0.0005 0.0005 0.0171
														PASS		PASS
CK (Yqa)		A ^{da} "	(O / Vm) X	sqr(.319 x Tm	X 29 / (^Ha)	(Pb + (Havg	/ 13,6) x Md)) X sqq ^H av	3							
Run 1 0.9871	Run 2 0,9884	Run 3 1.0045	Average 0.9934						,							
					•											
ASTM THERMOMET (DEG F) 32 212 352	ER															
0,750	0.751	AVERAGE 0.7503														_
ACCORDING	TO DESIGN	I SPECI <u>FICA</u>	TIONS									_	_		_	
	18.0 18.0 18.0 20.5 20.5 20.5 20.5 17.5 17.5 17.5 17.5 17.5 17.5 17.5 17	18.0 1.15 18.0 1.10 20.5 1.85 20.5 1.85 20.5 1.85 20.5 1.85 17.5 3.55 17.5 3.55 17.5 3.55 17.5 3.55 17.5	18.0 1.15 10 18.0 1.10 10 20.5 1.85 10 20.5 1.85 10 20.5 1.85 10 17.5 3.5 10 17.5 3.5 10 17.5 3.5 10 17.5 3.5 10 17.5 3.5 10 17.5 3.5 10 17.5 3.5 10	18.0 1.15 10 87 18.0 1.10 10 88 20.5 1.85 10 88 20.5 1.85 10 88 20.5 1.85 10 88 17.5 3.55 10 88 17.5 3.55 10 88 17.5 3.55 10 88 17.5 3.55 10 76 ACTUAL AH TIME TEMP R VACUUM (IN H2O) (MIN.) INITIAL 21.0 1.15 10 76 21.0 1.15 10 75 21.0 1.15 10 75 CK (Yqa) Y _{qb} (O / Vm) X Run 1 Run 2 Run 3 Average 0.9871 0.9884 1.0045 0.9934 TION ASTM THERMOMETER (DEG F) 32 212 352 110 AVERAGE	18.0 1.15 10 87 87 18.0 1.10 10 88 88 20.5 1.85 10 88 88 20.5 1.85 10 88 88 20.5 1.85 10 88 88 20.5 1.85 10 88 88 17.5 3.55 10 88 88 17.5 3.55 10 88 88 17.5 3.55 10 88 88 17.5 3.55 10 88 88 17.5 3.55 10 7 ACTUAL AH TIME TEMP TEMP. ACTUAL AH TIME TEMP TEMP. R VACUUM (IN H2O) (MIN.) INITIAL FINAL 21.0 1.15 10 75 75 21.0 1.15 10 75 75 21.0 1.15 10 75 74 CK (Yqa) Y _{qa} - (O / Vm) X sqr(.319 x Tm Run 1 Run 2 Run 3 Average 0.9871 0.9884 1.0045 0.9934	18.0 1.15 10 87 87 90 18.0 1.10 10 88 88 91 20.5 1.85 10 88 88 92 20.5 1.85 10 88 88 92 20.5 1.85 10 88 88 92 20.5 1.85 10 88 88 93 17.5 3.55 10 88 88 93 17.5 3.55 10 88 88 94 17.5 3.55 10 88 88 95 IN DATE 3/21/2009 BAROMETRIC PRESSUF AMBIENT METER AGTUAL AH TIME TEMP TEMP. TEMP. R VACUUM (IN H2O) (MIN.) INITIAL FINAL INITIAL PARTICE PRESSUF AMBIENT METER PROPERTION TO THE PROPERTION TEMP. CK (Yqa) Y _{qa} - (Q / Vm) X sqr(.319 x Tm X 29 / (^Ha) Run 1 Run 2 Run 3 Average 0.9871 0.9884 1.0045 0.9934 THERMOMETER (DEG F) 32 212 352 AVERAGE 0.750 0.751 0.7503	18.0 1.15 10 87 87 90 90 18.0 1.10 10 88 88 88 91 91 20.5 1.85 10 88 88 92 92 20.5 1.85 10 88 88 92 92 20.5 1.85 10 88 88 93 93 17.5 3.55 10 88 88 93 93 17.5 3.55 10 88 88 94 95 17.5 3.55 10 88 88 95 95 IN DATE 3/21/2009 BAROMETRIC PRESSURE AMBIENT METER METER ACTUAL AH TIME TEMP TEMP. TEMP. TEMP. TEMP. R VACUUM (IN H2O) (MIN.) INITIAL FINAL INITIAL FINAL 21.0 1.15 10 75 75 81 80 21.0 1.15 10 75 75 81 80 80 CK (Yqa) Y _{qa} - (O / Vm) X sqr(.319 x Tm X 29 / (^He x (Pb + (Havg 0.9871 0.9884 1.0045 0.9934)) ASTM THERMOMETER (DEG F) 32 212 352	18.0 1.15 10 87 87 90 90 751.583 18.0 1.10 10 88 88 91 91 757.678 20.5 1.85 10 88 88 92 92 773.178 20.5 1.85 10 88 88 92 92 773.178 20.5 1.85 10 88 88 93 93 761.096 17.5 3.55 10 88 88 94 95 800.963 17.5 3.55 10 88 88 94 95 800.963 17.5 3.55 10 88 88 99 95 95 611.865 IN DATE 3/21/2009 BAROMETRIC PRESSURE 30.12 AMBIENT AMBIENT METER METER METER ACTUAL AH TIME TEMP TEMP. TEMP. TEMP. READING R VACUUM (IN H2O) (MINL) INITIAL FINAL INITIAL 21.0 1.15 10 76 75 82 81 679.000 21.0 1.15 10 75 75 81 80 685.182 21.0 1.15 10 75 75 81 80 685.182 21.0 1.15 10 75 74 80 80 691.342 CK (Yqa) Y _{qa} - (O / Vm) X sqr(.319 x Tm X 29 / (*He x (Pb + (Havg / 13.6) x Md)) Run 1 Run 2 Run 3 Average 0.9871 0.9884 1.0045 0.9934	18.0 1.15 10 87 87 90 90 751.583 757,678 18.0 1.10 10 88 88 88 91 91 757.678 763,873 20.5 1.85 10 88 88 92 92 773.178 761.096 20.5 1.85 10 88 88 93 93 781.096 769.010 17.5 3.55 10 88 88 93 94 790.000 800.963 17.5 3.55 10 88 88 94 95 800.983 811.885 17.5 3.55 10 88 88 95 95 811.885 822.812 IN DATE 3/21/2009 BAROMETRIC PRESSURE 30.12 AMBIENT AMBIENT METER METER METER METER METER METER ACTUAL AH TIME TEMP TEMP. TEMP. READING READING READING READING 21.0 1.15 10 75 75 81 80 685.182 691.342 21.0 1.15 10 75 75 81 80 685.182 691.342 21.0 1.15 10 75 75 81 80 685.182 691.342 21.0 1.15 10 75 75 81 80 685.182 691.342 21.0 1.15 10 75 75 81 80 691.342 697.478 CK (Yqa) Y _{qu} . (O / Vm) X sqr(.319 x Tm X 29 / (*He x (Pb + (Havg / 13.6) x Md)) X sqq *H avg Run 1 Run 2 Run 3 Average 0.9871 0.9884 1.0045 0.9934	18.0 1.15 10 88 88 88 91 91 751.583 757.678 6.0950 18.0 1.10 10 88 88 88 91 91 757.678 763.873 6.1950 20.5 1.85 10 88 88 92 92 773.178 781.096 20.5 1.85 10 88 88 92 92 773.178 781.096 20.5 1.85 10 88 88 93 93 93 781.096 789.010 7.9140 17.5 3.55 10 88 88 93 94 790.000 800.963 10.9630 17.5 3.55 10 88 88 99 95 800.963 811.885 10.9220 17.5 3.55 10 88 88 98 95 95 811.885 822.812 10.9270 IN DATE 3/21/2009 BROMETRIC PRESSURE 30.12 AMBIENT AMBIENT METER METER METER METER METER METER ACTUAL AH TIME TEMP TEMP. TEMP. TEMP. READING READING VM R VACUUM (IN HZO) (MIN.) INITIAL FINAL INITIAL FINAL INITIAL FINAL (CU-FT.) 21.0 1.15 10 76 75 82 81 80 685.182 691.342 6.1820 21.0 1.15 10 75 74 80 80 691.342 697.478 6.1360 CK (Yqa) Y _{sp} . (O / Vm) X sqr(.319 x Tm X 29 / ("Ha x (Pb + (Havg / 13.6) x Md)) X sqn AH avg Run 1 Run 2 Run 3 Average 0.9871 0.9884 1.0045 0.9934	18.0 1.15 10 87 97 90 90 751583 757.678 6.0950 5.8771 18.0 1.10 10 88 88 89 91 91 757.678 763.873 6.1850 5.9620 20.5 1.85 10 88 88 91 92 765.300 773.178 781096 7.5897 20.5 1.85 10 88 88 93 93 93 761.966 799.010 7.9140 7.6203 20.5 1.85 10 88 88 93 93 93 761.966 799.010 7.9140 7.6203 20.5 1.85 10 88 88 93 93 93 761.966 799.010 7.9140 7.6203 20.5 1.85 10 88 88 93 93 93 761.966 799.010 7.9140 7.6203 20.5 17.5 3.55 10 88 88 93 93 94 790.000 800.963 10.9630 10.5659 17.5 3.55 10 88 88 94 95 800.963 811.885 10.9220 10.5074 17.5 3.55 10 88 88 94 95 85 811.885 822.812 10.9270 10.5028 20.9 20.9 20.9 20.9 20.9 20.9 20.9 20.9	18.0	18.0 1.15 10 87 87 87 90 90 751.583 757.678 6.0950 5.8771 5.9170 6.1201 18.0 1.10 10 88 88 91 91 757.678 763.87 6.1950 5.9820 5.916 6.1221 20.5 1.85 10 88 88 91 92 773.178 763.07 773.178 7.6780 7.5850 7.7565 7.8509 20.5 1.85 10 88 88 92 92 773.178 761.096 79180 7.6203 7.5765 7.8509 20.5 1.85 10 88 88 93 93 761.096 769.010 7.9140 7.6027 7.5765 7.8509 20.5 1.85 10 88 88 93 93 761.096 769.010 7.9140 7.6027 7.5765 7.8509 20.5 1.85 10 88 88 93 93 761.096 769.010 7.9140 7.6027 7.5765 7.8509 20.5 1.85 10 88 88 93 93 761.096 769.010 7.9140 7.6027 7.5765 7.8509 20.5 1.75 3.55 10 88 88 94 95 800.963 811.885 10.9220 10.5074 10.5451 10.9270 17.5 3.55 10 88 88 94 95 801.885 812.881 10.9220 10.5074 10.5451 10.9270 17.5 3.55 10 88 88 95 95 811.885 10.9220 10.5074 10.5451 10.9270 17.5 3.55 10 88 88 95 95 811.885 10.9220 10.5074 10.5451 10.9270 17.5 3.55 10 88 88 95 95 811.885 10.9220 10.5074 10.5451 10.9270 17.5 3.55 10 88 88 95 95 811.885 10.9220 10.5074 10.5451 10.9270 17.5 3.55 10 88 88 95 95 811.885 10.9220 10.5074 10.5451 10.9270 17.5 3.55 10 88 88 95 95 811.885 10.9220 10.5074 10.5451 10.9270 17.5 3.55 10 88 88 95 95 811.885 10.9220 10.5074 10.5451 10.9270 17.5 3.55 10 88 88 95 95 811.885 10.9220 10.5074 10.5451 10.9270 17.5 3.55 10 88 88 95 95 811.885 10.9220 10.5074 10.5451 10.9270 17.5 3.55 10 88 88 95 95 811.885 10.9220 10.5074 10.5451 10.9270 17.5 3.55 10 88 88 95 95 811.885 10.9220 10.5074 10.5451 10.9270 17.5 3.55 10 88 88 95 95 811.885 10.9220 10.5074 10.5451 10.9270 17.5 3.55 10 88 88 95 95 811.885 10.9220 10.5074 10.5451 10.9270 17.5 3.55 10 88 88 95 95 811.885 10.9220 10.5074 10.5451 10.9270 17.5 3.5 3.5 3.5 3.5 3.5 3.5 3.5 3.5 3.5 3	18.0	18.0 1.15 10 88 88 91 91 757.878 76.878 6.0950 5.8771 5.9170 6.1201 1.0068 0.0105 18.0 1.10 10 88 88 88 91 91 757.878 76.873 6.0950 5.8771 5.9170 6.1201 1.0068 0.0105 18.0 1.10 10 88 88 88 91 92 765.300 7725.178 7.8780 7.5800 5.9520 5.9116 1.0058 0.0964 0.00037 1.0058 1.85 10 88 88 92 92 92 775.378 781086 7.9180 7.5807 7.585 7.8509 0.9844 0.0021 20.5 1.85 10 88 88 92 92 92 775.378 781086 7.9180 7.5802 7.585 7.8509 0.9844 0.0021 20.5 1.85 10 88 88 92 92 92 775.378 781086 7.9180 7.203 7.5765 7.8509 0.9844 0.0021 20.5 1.85 10 88 88 93 93 94 790.000 800.963 10.9820 10.5076 1.0064 10.0061 10.0061 11.75 10.0061 1	18.0 1.15 10 88 88 91 91 91 757.878 763.373 6,150 5,8771 5,9170 6,1201 1,0688 0,0105 1,7772 18.0 19.0 10 88 88 91 91 91 757.878 763.373 6,150 5,050 5,916 6,150 0,9963 0,0037 1,7520 0,9963 0,0037 1,7520 0,9963 0,0037 1,7520 0,9963 0,0037 1,7520 0,9963 0,0037 1,7520 0,9963 0,0037 1,7520 0,0038 0,0037 1,7520 0,0038 0,0037 1,7520 0,0038 0,0037 1,7520 0,0038 0,0037 1,7520 0,0038 0,0037 1,7520 0,0038 0,0037 1,7520 0,0038 0,0037 1,7520 0,0038 0,0037 1,7520 0,0038 0,0037 1,7520 0,0038 0,0037 1,7530 0,0038 0,0

Nozzle Calibration

Nozzle ID #24

A = 0.750 B = 0.750 C = 0.751 Average 0.7503

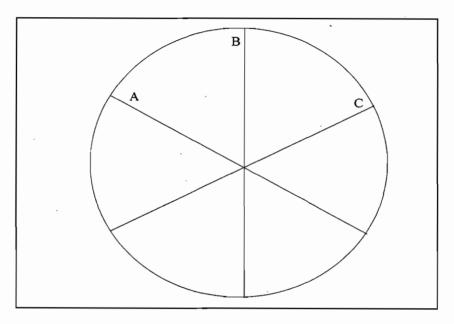

Calibration Date


3/4/2010

Calibrated by

ns

PITOT CALIBRATION

(Type S Pitot Tube Inspection)

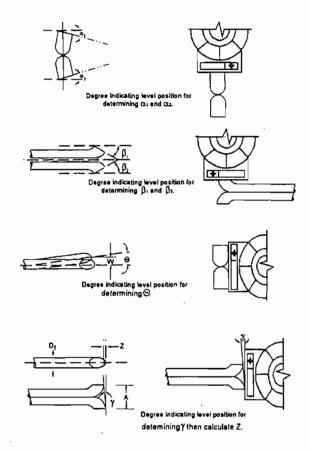

Level and Perpendicular?	Yes
Obstruction?	No
Damaged?	No
$\alpha_1 \left(-10^{\circ} \leq \alpha_1 \leq +10^{\circ}\right)$	2
α_2 (-10° \leq $\alpha_2 \leq$ + 10°)	0
$\beta_1 \left(-5^{\circ} \leq \beta_1 \leq +5^{\circ}\right)$	1
β_2 (-5° \leq β_2 \leq +5°)	1
Y	1
θ	-2
$z = A \tan \gamma \ (\leq 0.125^{\circ})$	0.017
$w = A \tan \theta (\le 0.03125^{\circ})$	-0.034
$D_t (3/16 \text{ "} \le D_t \le +3/8 \text{"})$	0.375
A	0.961
$A/2 D_t (1.05 \le P_A / D_t \le 1.51)$	1.281

Certification

I hereby certify that type S pitot tube ID# P-5AC meets or exceeds all specifications, critera and applicable design features, and is hereby assigned a pitot tube calibration factor of 0.84.

Certified by: Date: 9/20/09

Guiding Light Cremations, LLC

DATE: 38 RUN: 1 UNIT: 2

3/3/2010 1 2 AVG. ADJUSTED CO ppmvd @ 7% 02 0.79
CORRECTED O2 % 13.43
CORRECTED CO2 % 5.14
CORRECTED CO ppmvd 0.42

ANALYZER RESPONSE, SYSTEM BIAS AND SYSTEM DRIFT DATA

				ANALTZER				t			
DANCE		CERTIFIED	ANALY250	DIFFERENCE	~	ANALYZER		ANALYZER		04	ANALYZED
RANGE SETTING	CAL GASES	GAS VALUE	VALUE	DIFFERENCE PPM	% SPAN	PRETEST VALUE	% SPAN	POSTTEST VALUE	% SPAN	% DRIFT	ANALYZER SERIAL #
02111110	0020	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,		,,,,,,	0.7	771202	•		U , 1111	211111	
25	% O2	0.00	0.00 12.00	0.00 -0.04	0.00 -0.18	0.00	0.00	0.00 12.00	0.00	0.00	01420B153
25	76 UZ	12.04 22.62	22.50	-0.12	-0.16	12.00	0.00	12.00	0.00	0.00	014205 153
		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0,00	
20	% CO2	9.62	9.60	-0.02	-0.12	9.60	0.00	9.60	0.00	0.00	01410/B139
		17.27 0.00	17.30 0.00	0.03	0.17 0.0	0.00	0.0	0.00	0.0	0.0	
100	PPM CO	48.5	48.4	-0.10	-0.1	46.30	-0.1	48.20	-0.2	-0.1	48C-68845-361
		102.00	102.90	0.90	0.9						
					^^^						
	DATE &			UN	CORRECTE	D RAW DATA		O2	CO2	co	
	TIME							%	%	PPM	
	7										
	16:20							12.78	6.17	0.70	
	16:21							12.53	5.92	0.60 0.60	
	16:22 16:23							13.07 13.48	5.18 5.00	0.65	
:	16:24							13.45	5.04	0.50	
	16:25							13.34	5.10	0.60	
	16:26							13.28	5.12	0.45	
	16:27							13.28	5.05	0.55	
	16:28 16:29							13.39 13.61	4.93 4.76	0.50 0.45	
	16:30							13.86	4.65	0.45	
	16:31							13.96	4.67	0.30	
	16:32							13.78	4.82	0.35	
	16:33							13.51	4.95	0.30	
	16:34 16:35							13.43 13.63	4.95 4.84	0.55 0.85	
	16:36							13.91	4.72	0.80	
	16;37							13.96	4.80	0.50	
	16:38							13.68	5.00	0.45	
	16:39							13.46	5.04	0.50	
	16:40 16:41							13.52 13.82	4.94 4.78	0.60 0.60	
	16:42							13.91	4.84	0.75	
	16:43							13.68	4.93	0.75	
	16:44							13.63	4.91	0.90	
	16:45 16:46							13.78 13.97	4.77 4.73	1.00 0.90	
	16:47							13.92	4.73	0.55	
	16:48							13.23	5.44	0.60	
	16:49							12.81	5.31	0.65	
	16:50							13.48	4.94	0.70	
	16:51 16:52							13.68 13.10	5.10 5.17	0.75 1.00	
	16:53							13.49	5.07	0.80	
	18:54							13.46	4.97	0.20	
	16:55							13.76	4.89	0.10	
	16:56							13.49	5.19	0.10	
	16:57 16:58							12.91 13.13	5.39 5.02	0.15 0.20	
	16:59							13.91	4.69	0.25	
	17:00							13.82	5.05	0.15	
	17:01							13.01	5.39	0.15	
	17:02							12.96	5.31	0.20	
	17:03 17:04							13.01 13.25	5.49 5.39	0.20 0.25	
	17:04							13.14	5.61	0.20	
	17:06							12.69	5.69	0.30	
	17:07							12.75	5.51	0.30	
	17:08 17:09							13.31 13.48	5.19 5.32	0.20 0.15	
	17:09							12.92	5.32	0.15	
	17:11							12.84	5.42	0.25	
	17:12							13.41	5.06	0.05	
	17:13							13.63	5.18	0.00	
								13.03	5.52	0.05	
	17:14										
	17:14 17:15							12.77	5.48	0.25	
	17:14 17:15 17:16 17:17										
	17:14 17:15 17:16							12.77 13.20	5.48 5.13	0.25 0.15	

MEAN ANALYZER VALUES

Guiding Light Cremations, LLC

DATE: 3/4/2010 RUN: 2 UNIT: 2 AVG. ADJUSTED CO ppmvd @ 7% O2 1.04
CORRECTED O2 % 13.79
CORRECTED CO2 % 4.46
CORRECTED CO ppmvd 0.53

ANALYZER RESPONSE, SYSTEM BIAS AND SYSTEM DRIFT DATA

RANGE SETTING	CAL GASES	CERTIFIED GAS VALUE		DIFFERENCE PPM	% SPAN	ANALYZER PRETEST VALUE	% SPAN	ANALYZER POSTTEST VALUE	% SPAN	% DRIFT	ANALYZER SERIAL#
_		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
25	% O2	12.04 22.62	12.00 22.50	-0.04 -0.12	-0.18 -0.53	12.00	0.00	11.90	-0.44	-0.44	01420B153
		0.00	0.00	0.00	0.00	0.10	0.58	0.00	0.00	-0.58	
20	% CO2	9.62 17.27	9.60 17.30	-0.02 0.03	-0.12 0.17	9.60	0.00	9.60	0.00	0.00	01410/B139
50	DDM 00	0.00	0.00	0.00	0,0	0.10	0.1	0.00	0.0	-0.1	400 600 45 204
50	PPM CO	48,50 102,00	48,40 102.90	-0.10 0.90	-0.1 0.9	48.60	0.2	48.10	-0.3	-0.5	48C-68845-361
					2000505	- D. DAIM DATA					
	DATE &			UN	CORRECTE	D RAW DATA		O2	CO2	co	
	TIME							%	%	PPM	
•	9:30							11.82	7.41	0.60	
	9:31							10.44	7.54	1.15	
	9:32							11.59	5.91	1.25	
	9:33 9:34							13.23 13.35	4.97 5.06	1.20 0.90	
	9:35							13.06	5.06	0.65	
	9:36							13.03	5.04	0.50	
	9:37							13.14	4.89	0.45	
	9:38							13.28	4.78	0.45	
	9:39							13.40	4.67	0.45	
	9:40 9:41							13.50 13.56	4.60 4.54	0.45 0.40	
	9:42					·		13.63	4.49	0.40	
	9:43							13.71	4.41	0.40	
	9:44							13.79	4.36	0.40	
	9:45							13.78	4.38	0.45	
	9:46							13.77	4.36	0.40	
	9:47 9:48							13.80 13.83	4.34 4.32	0.45 0.30	
	9:49							13.83	4.29	0.30	
	9:50							13,85	4.27	0.30	
	9:51							13.88	4.23	0.25	
	9:52							13.93	4.18	0.25	
	9:53							13.99	4.13 4.12	0.25 0.25	
	9:54 9:55							14.00 14.04	4.12	0.30	
	9:56							14.04	4.09	0.30	
	9:57							14.07	4.06	0.25	
	9:58							14.09	4.06	0.20	
	9:59							13.85	4.49	0.15	
	10:00 10:01							13.06 12.97	4.88 4.55	0.25 0.35	
	10:02							14.02	4.17	1.25	
	10:03							14.04	4.13	0.85	
	10:04							14.08	4.14	0.70	
	10:05							14.01	4.19	0.75	
	10:06 10:07							13.98 13.94	4.20 4.26	0.80 0.80	
	10:07 10:08							13.94	4.26	0.80	
	10:09							13.94	4.22	0.70	
	10:10							13.98	4.19	0.80	
	10:11							14.03	4.14	0.75	
	10:12							14.06	4.12	0.70	
	10:13							14.09 14.13	4.10 4.10	0.70 0.70	
	· 10:14 10:15							14.16	4.10	0.75	
	10:16							14.19	4.07	0.70	
	10:17							14.17	4.08	0.70	
	10:18							14.15	4.09	0.65	
	10:19							14.16	4,11	0.65	
	10:20 10:21							14.11 14.09	4.14 4.16	0.65 0.60	
	10:21							14.09	4.18	0.60	
	10:23							14.05	4.19	0.65	
	10:24							14.02	4.24	0.65	
	10:25							13.92	4.35	0.70	
	10:26							13.79	4.44	0.70	
	10:27							13.69	4.53	0.65	
	10:28 10:29							13.56 13.39	4.64 4.80	0.65 0.65	

MEAN ANALYZER VALUES

Guiding Light Cremations, LLC

DATE: 3/4/2010 RUN: 3 UNIT: 2 AVG. ADJUSTED CO ppmvd @ 7% O2 0.74
CORRECTED O2 % 13.23
CORRECTED CO2 % 5.03
CORRECTED CO ppmvd 0.41

ANALYZER RESPONSE, SYSTEM BIAS AND SYSTEM DRIFT DATA

RANGE SETTING	CAL GASES	CERTIFIED GAS VALUE		DIFFERENCE PPM	% SPAN	ANALYZER PRETEST VALUE	% SPAN	ANALYZER POSTTEST VALUE	% SPAN	% DRIFT	ANALYZER SERIAL #
	_	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	· ·
25	% O2	12.04	12.00	-0.04	-0.18	11.90	-0.44	11.90	-0.44	0.00	01420B153
	-	22.62 0.00	22,50 0.00	-0.12 0.00	-0.53 0.00	0.00	0.00	0.00	0.00	0.00	
20	% CO2	9.62	9.60	-0.02	-0.12	9.60	0.00	9.60	0.00	0.00	01410/B139
		17.27	17.30	0.03	0.17						
50	PPM CO	0.00 48.50	0.00 48.40	0.00 -0.10	0.0 -0.1	0.00 48.10	0.0 -0.3	0.00 47.80	0.0 -0.6	0.0 -0.3	48C-68845-361
	,, J	102.00	102.90	0.90	0.9		0.0		4.0	5.0	
	DATE 9			UNG	CORRECTE	ED RAW DATA			con	co	
	DATE & TIME							O2 %	CO2 %	PPM	
											_
	11:00 11:01			-				16.14 15.99	3.07 3.06	1.30 0.60	
	11:02							16.01	3.16	0.50	
	11:03							15.08	3.89	0.35	
	11:04							14.37	4.14	0.40	
	11:05				-			14.06	4.44	0,45 0.45	
•	11:06 11:07							13.64 13.22	4.76 5.12	0.45	
	11:08							12.91	5.26	0.65	
	11:09							12.80	5.34	0.75	
	11:10							12.73	5.37	0.80	
	11:11 11:12							12.68 12.64	5.41 5.40	0.75 0.85	
	11:13							12.64	5.41	0.85	
	11:14							12.59	5.44	0.95	
	11:15							12.58	5.44	0.95	
	11:16							12.68	5.33	1.00	
	11:17 11:18							12.91 13.41	5.13 4.83	0.90 0.75	
	11:19							13.66	4.86	0.65	
	11:20			:				13.33	5.10	0.75	_
	11:21							13.09	5.13	0.70	
	11:22							13.13	5.03	0.65	
	11:23 11:24							13.24 13.26	4.98 4.99	0.65 0.60	
	11:25							13.28	4.94	0.65	
	11:26							13.36	4.89	0.60	
	11:27							13.41	4.88	0.65	
	11:28							13.41	4.84	1.30 0.85	
	11:29 11:30							13.71 12.43	4.84 5.59	0.65	
	11:31							12.17	5.56	0.05	
	11:32							12.19	5.57	0.05	
	11:33							12.20	5.52	0.05	
	11:34							12.26	5.48	0.05 0.05	
	11:35 11:36							12.29 12.30	5.47 5.44	0.05	
	11:37							12.35	5.41	0.05	
	11:38							12.38	5.38	0.05	
	11:39							12.42	5.36	0.05	
	11:40 11:41							12.43 12.46	5.36 5.31	0.20 0.10	
	11:42							12.54	5.28	0.10	
	11:43							12.54	5.28	0.10	
	11:44							12.58	5.24	0.10	
	11:45							12.58	5.28	0.10	
	11:46 11:47							12.59 12.63	5.23 5.22	, 0.10 0.10	
	11:48							12.65	5.17	0.15	
	11:49							12.74	5.13	0.15	
	11:50							12.78	5.10	0.05	
	11:51							12.83	5.08	0.05	
	11:52 11:53							12.85 12.90	5.06 5.03	0.05 0.05	
	11:54							12.96	4.98	0.05	
	11:55							13.02	4.93	0.05	
	11:56							13.08	4.92	0.10	
	11:57							13.09	4.90	0.10	
	11:58 11:59							13.12 13.21	4.88 4.77	0.05 0.00	
	11.00							10.21	7.11	3.00	

MEAN	ANALYZER	VALUES	

Industry Leader in Specialty Gases, Equipment and Service

Certificate of Analysis

- EPA PROTOCOL GAS

Customer

Coastal Air Consulting (Deland, Florida)

Date

December 08, 2009

Delivery Receipt

DR-26962

Gas Standard

9.00-10.0% CO2, 11.5-12.5% Oxygen/Nitrogen-EPA PROTOCOL

Final Analysis Date

Expiration Date

December 08, 2009 December 08, 2012

Component

Carbon Dioxide, Oxygen

Balance Gas

Nitrogen .

Analytical Data:

DO NOT USE BELOW 150 psig

EPA Protocol, Section No. 2.2, Procedure G-1

Reported Concentrations

Carbon Dioxide: 9.62% +/- 0.09%

Oxygen: 12.04% +/- 0.12%

Nitrogen: Balance

Reference Standards:

SRM/GMIS:

GMIS/GMIS

GMIS/GMIS

Cylinder Number:

CC-159026/CC-165377

CC-231332/CC-85458

Concentration:

5.14% CO2/N2-10.05% CO2/Nitrogen

10.1% O2/N2 - 20.97% Oxygen/N2

Expiration Date:

93/31/11 - 04/06/11

03/04/11 - 04/15/11

Certification Instrumentation

Component:

Carbon Dioxide

Oxygen

Make/Model:

Agilent 7890A.

Servomex 244a

Serial Number:

CN10736166.

1847

Principal of Measurement:

GC-TCD.

Paramagnetic

Last Calibration:

December 05, 2009

November 20, 2009

Cylinder Data

Cylinder Serial Number:

EB-0020405

Cylinder Outlet:

CGA 590

Cylinder Volume:

140 Cubic Feet

Cylinder Pressure:

2000 psig, 70°F.

Analytical Uncertainty and NIST Traceability are in compliance with EPA-600/R-97/121.

Certified by:

Mike Duncan

Industry Leader in Specialty Gases, Equipment and Service

Certificate of Analysis

- EPA PROTOCOL GAS -

Customer

Coastal Air Consulting (Deland, Florida)

Date

November 14, 2008

Delivery Receipt

DR-23098

Gas Standard

17.0-18.0% CO2, 22.0-23.0% Oxygen/Nitrogen-EPA PROTOCOL

Final Analysis Date

November 14, 2008

Expiration Date

November 14, 2011

Component

Carbon Dioxide, Oxygen

Balance Gas

<u>Nitrogen</u>

Analytical Data:

DO NOT USE BELOW 150 psig

EPA Protocol, Section No. 2.2, Procedure G-1

Reported Concentrations

Carbon Dioxide: 17.27% +/- 0.17%

Oxygen: 22.62% +/- 0.22%

Nitrogen: Balance

Reference Standards:

SRM/GMIS:

GMIS

GMIS/GMIS

Cylinder Number:

CC-79616

CC-125554/CC-85469

Concentration:

17.4% CO2/Nitrogen

20.99% O2/N2 - 25.30% Oxygen/N2

Expiration Date:

12/01/12

04/02/11 - 08/09/10

Certification Instrumentation

Component:

Carbon Dioxide

Oxygen

Make/Model:

Hewlett Packard 5890 II

Servomex 244a

Serial Number:

3336A59393

1847

Principal of Measurement:

TCD

Paramagnetic

Last Calibration:

November 05, 2008

November 10, 2008

Cylinder Data

Cylinder Serial Number:

CC-231467

Cylinder Outlet:

CGA 590

Cylinder Volume:

140 Cubic Feet

Cylinder Pressure:

2000 psig, 70°F

Analytical Uncertainty and NIST Traceability are in compliance with EPA-600/R-97/121.

Certified by:

Date:

November 14, 2008

Industry Leader in Specialty Gases, Equipment and Service

Certificate of Analysis

- EPA PROTOCOL GAS -

Customer

Coastal Air Consulting (Deland, Florida)

<u>Date</u>

July 22, 2009

Delivery Receipt

DR-25422

Gas Standard

11-13 ppm Nitric Oxide, 23-27 ppm Carbon Monoxide/Nitrogen

Final Analysis Date

July 22, 2009

Expiration Date

July 22, 2011

DO NOT USE BELOW 150 psig

Analytical Data:

EPA Protocol, Section No. 2.2, Procedure G-1.

Reported Concentrations:

Nitric Oxide: 11.8 ppm +/- 0.11 ppm

Carbon Monoxide: 25.7 ppm +/- 0.25 ppm

Nitrogen: Balance Total NOx: 11.8 ppm

** Total NOx for Reference Use Only **

Reference Standards

SRM/GMIS**

-GMIS/GMIS ---

GMIS/GMIS

Cylinder Number:

CC-165557/CC-117924

CC-184197/CC-158976

Concentration:

5.22 ppm NO/19.48 ppm NO

10.07 ppm CO/25.1 ppm CO

Expiration Date:

12/03/10 - 12/11/10

06/15/10 - 08/04/10

Certification Instrumentation

Component:

Nitric Oxide

Carbon Monoxide

Make/Model:

Nicolet NEXUS 470

Nicolet-NEXUS 470

Serial Number:

AEP99000154

AEP99000154

Principal of Measurement:

FTIR

FTIR

Last Calibration:

July 04, 2009

July 02, 2009

Cylinder Data

Cylinder Number:

EB-0016054

Cylinder Volume:

140 Cubic Feet

Cylinder Outlet:

CGA 660

Cylinder Pressure:

2000 psig, 70°F

Expiration Date:

July 22, 2011

Analytical Uncertainty and NIST Traceability are in compliance with EPA-600/R-97/121.

Certified by:

Mike Duncan

Industry Leader in Specialty Gases, Equipment and Service Certificate of Analysis

- EPA PROTOCOL GAS -

Customer

Coastal Air Consulting (Deland, Florida)

Date

October 27, 2009

Delivery Receipt

DR-26491

Gas Standard

22-25 ppm NO, 45-50 ppm CO/Nitrogen - EPA PROTOCOL

Final Analysis Date

October 20, 2009

Expiration Date

October 20, 2011

Components

Nitric Oxide, Carbon Monoxide

Balance Gas

Nitrogen

Analytical Data:

DO NOT USE BELOW 150 psig

EPA Protocol, Section No. 2.2, Procedure G-1

Reported Concentrations

Nitric Oxide: 22.9 ppm +/- 0.22 ppm

Carbon Monoxide: 48.5 ppm +/- 0.48 ppm

Nitrogen: Balance

Total Oxides of Nitrogen: 23.5 ppm

** Total NOX for Reference Use Only **

Reference Standards:

SRM/GMIS:

GMIS

GMIS/GMIS

Cylinder Number:

CC-231538

CC-125604/CC-166617

Concentration:

24.41 ppm NO

25.5 ppm CO/51.0 ppm CO

Expiration Date:

06/24/11 ·

02/27/10 - 09/18/10

Certification Instrumentation

Component:

Nitric Oxide

Carbon Monoxide

Make/Model:

Nicolet-NEXUS 470

Nicolet-NEXUS 470

Serial Number:

AEP99000154

AEP99000154

Principal of Measurement:

FTIR

FTIR

Last Calibration:

October 05, 2009

October 06, 2009

Cylinder Data

Cylinder Serial Number:

CC-233289

Cylinder Outlet:

CGA 660

Cylinder Volume:

2000 psig; 70°F

140 Cubic Feet

Cylinder Pressure:

Analytical Uncertainty and NIST Traceability are in compliance with EPA-600/R-97/121.

Certified by:

Mike Duncan

More Duncon

Industry Leader in Specialty Gases, Equipment and Service

Certificate of Analysis

- EPA PROTOCOL GAS -

Customer

Coastal Air Consulting (Deland, Florida)

Date

July 22, 2009

Delivery Receipt

DR-25422

Gas Standard

100.0 ppm Carbon Monoxide/Nitrogen - EPA PROTOCOL

Final Analysis Date

July 22, 2009

Expiration Date

July 22, 2012

Component

Carbon Monoxide

Balance Gas

Nitrogen

Analytical Data:

DO NOT USE BELOW 150 psig

EPA Protocol, Section No. 2.2, Procedure G-1

Replicate Concentrations

Carbon Monoxide: 102.0 ppm +/- 1.0 ppm

Nitrogen: Balance

Reference Standards:

SRM/GMIS:

GMES

Cylinder Number:

CC-233156

Concentration:

104.91 ppm CO/Nitrogen

Expiration Date

April 16, 2011

Certification Instrumentation

Component:

Carbon Monoxide

Make/Model:

Nicolet - NEXUS 470

Serial Number:

AEP99000154

Principal of Measurement:

FTIR

Last Calibration:

July 02, 2009

Cylinder Data

Cylinder Serial Number:

CC-233184

Cylinder Outlet:

CGA 350

Cylinder Volume:

140 Cubic Feet

Cylinder Pressure:

2000 psig, 70°F

Analytical Uncertainty and NIST Traceability are in compliance with EPA-600/R-97/121.

Certified by:

Mike Duncan

Attachment F - Project Participants

Project Participants

Arlington Environmental Services, Inc.

William Arlington Project Director

Rufus Rhoden Field Technician

Kaye Arlington Laboratory Analyst

Debra Carter Computer Analysis

Coastal Air Consultants, Inc

Stephen Webb

Guiding Light Cremations, Unit 2

Geronimo Mena Facility Manager

Broward County Environmental Management


Courtney Pitters Inspector

Attachment 2 Equipment Drawings and Brochures

The "Classic" Cremator

PERFORMANCE BEYOND EXPECTATIONS

BUILT to exacting quality and safety standards and backed by a two-year limited warranty, the fuel efficient "Classic" outperforms every other cremator in its price range. Take a look at some of the performance benefits the "Classic" offers!

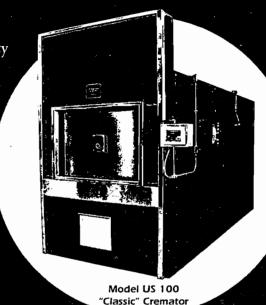

features combine with
professional expertise to
deliver the product and
service you demand.
Unsurpassed in customer
support, you can rely
on U. S. Cremation
Equipment's "Classic"
to provide years of
trouble-free operation.

CLASSIC PERFORMANCE


- · Cremate up to six bodies in a 10-hour work day
- · Complete cremation every 60 90 minutes
- · No cool down required between cremations
- Designed to cremate obese cases up to 800 lbs.
- Fully automatic PLC operating system

CLASSIC FEATURES

- · Power charging door/dual hydraulic cylinders
- Primary chamber viewport
- Secondary chamber temperature recorder
- Color touch screen control standard
- · Powder coat finish with stainless steel trim



370 S. North Lake Boulevard, Suite 1004 • Altamonte Springs, FL 32701 • Ph: 321.282.7357 • Fax: 321.282.7358 www.uscremationequipment.com • E-mail: info@uscremationequipment.com

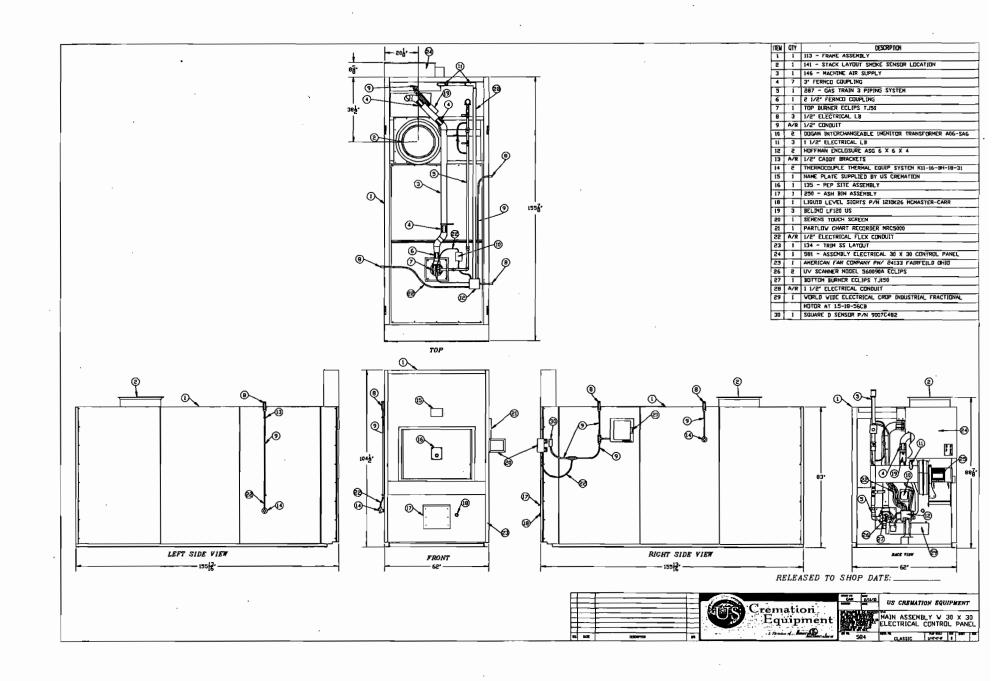



HUMAN CREMATION CHAMBER SPECIFICATION

EQUIPMENT:

US Cremation Equipment a division of American Incinerators Co. - Multiple Chambered human Crematory, Natural Gas, Propane (LP) or Oil fired.

MANUFACTURER:

US Cremation Equipment a division of American Incinerators Corp.

CONSTRUCTION STANDARDS:

The American Incinerators cremation chamber shall be constructed of U.L./CSA listed components and will meet or exceed nationally accepted incinerator construction standards per the <u>Incinerator Institute of America</u> (IIA) publication guidelines; i.e.:

- A. Primary chamber will not exceed 60% of total furnace volumes. Flue connection shall not be considered part of furnace volume.
- B. Flame supervision through continuous ultraviolet scanning flame detectors on all burners.
- C. High temperature refractory construction with air-cooled walls to prevent excessive heat radiation.
- D. Exhaust gas temperature reduction.

INCINERATION CHAMBER DIMENSIONS:

Chamber volumes:

Primary - 73 CF

Secondary - 71 CF

Structural footprint:

12'0" (L) x 5'0" (W)

Over-all dimensions:

12'7" (L) x 6'0" (W) x 9'2" (H) w/std. hyd. door



OPERATING TEMPERATURE:

Temperatures are determined as a result of federal, state or local permitting authority operating standards.

Typical primary chamber setting: 1,000°F-1,200°F Typical secondary chamber setting: 1,400°F-1,800°F

RETENTION TIME:

In excess of 1 second.

CAPACITY:

One body and associated container per cremation cycle. 200 pounds per hour or 750 pounds per batch.

DRAFT:

Induced via refractory lined draft inducer.

SHIPPING WEIGHT:


24,500 lbs.

EMISSIONS:

The American Incinerators cremation chamber shall meet or exceed federal, state and local environmental regulations.

EMISSION CONTROL:

Secondary chamber equipped with one, 1,500,000 BTU/HR burner. Also equipped with an electronic exhaust gas scanner system which temporarily suspends operation of the primary chamber burner.

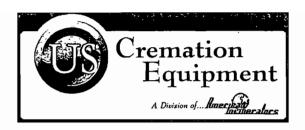

STEEL CONSTRUCTION SPECIFICATIONS:

- A. The structure to be heavy 3" steel angle, square tube; 3/8" steel plate, seal welded construction.
- B. Subfloors to be 3/16" steel plate, seal welded construction.
- C. The exterior shell to be 12 gauge steel removable panels.
- D. Interior shell to be 10 gauge steel, seal welded construction.

INSULATION & REFRACTORY SPECIFICATIONS:

A. Hot Hearth: 3000°F abrasion resistant castable refractory,

monolithic cast 7" - 13" thick, 1 -1/2" recessed top

and rounded, stressed arched bottom.

B. Chamber Floors: 3000°F abrasion resistant castable refractory, 5"

thick on top of 2" 2400°F light weight insulating

castable.

C. Chamber Ceilings: 3000°F castable refractory, monolithic cast,

rounded, stressed arched, 5"-9" thick, topped by 2"

2400°F light weight insulating castable.

D. Interior Walls: 2800°F. alumina-silicate firebrick, 21/2" x 41/2" x


9", all chambers are backed by 4" of 1900°F ceramic

fiber insulation

E. Stack: Lined with 2" of 2200°F insulating refractory.

SKIN TEMPERATURE CONTROL:

Integral dual casing, completely air-cooled design to prevent excessive heat radiation.

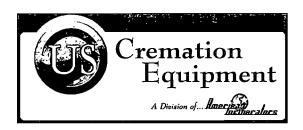

COMBUSTION EQUIPMENT:

- A. Combustion Air One, 3 phase, 208-230/460V, 17-15.5/7.6 amp 7 hp air-blower motor (1,400 CFM)
- B. Primary Chamber One 500,000 BTU/HR nozzle mix, gas-fired burner. Eclipse, North American, or equal.
- C. Secondary Chamber One, 1,500,000 BTU/HR modulating, nozzle mix, gas-fired burner. Eclipse, North American, or equal.
- D. Burner Flame Safeguard Control supervision on each burner via a flame safeguard relay and ultra-violet light detector.
- E. Low Air Pressure Safety Switch Interlocked to all burners.

EXHAUST GAS TEMPERATURE REDUCTION:

Hot air duct operating exit temperature: 900°F

HOT AIR DUCT:

10 gauge carbon steel, high temperature 2" refractory lining, pre-drilled flanges, 24" Outside Diameter, 28" at flanges.

UTILITY REQUIREMENTS:

A. GAS:

1. Pressure:

a) Natural Gas:

7" to 9" W.C.


b) Propane:

11" W.C.

2. Flow Rate: 2,000,000 BTU/HR

B. <u>ELECTRICAL</u>:

1. One, three phase, 208-230/460V, 17-15/8 amp connection for 5hp blower.

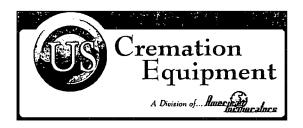

CREMATION CHAMBER LOADING/CLEAN-OUT DOOR:

Hydraulically operated, refractory lined, upward movement guillotine style door with gate view port.

CREMATION PROCESS CONTROL:

The cremation cycle is controlled by a programmable logic control (PLC) system. A visual confirmation of the system status is provided through control panel indicator lights and digital temperature display. Continuous fuel and air modulation is automatically controlled by a time/temperature actuated system. Operator interface is through two sets of simple push button controls and panel timer.

EXTERIOR FINISH:

The cremation chamber is finished with grey hi-resistance powder coating with stainless steel trim. Back of unit is coated with an epoxy type black coating.

Attachment 2 Emissions Calculations


US Cremation Equipment Model "Classic"

Pounds Incinerated	Hours Per	SO2	SO2	\$02	Nox	Nox	Nox	TOC	TOC	TOC
Per Hour (Average)	Year	lb/ton	lb/hr	TPY	lb/ton	lb/hr	TPY	lb/ton	lb/hr	TPY
200	8760	2.5	0.25	1.095	3	0.3	1.314	3	0.3	1.314

CO=100 PPM @ 7% O2 MAX, Actual CO Emissions Measured at 3.49 PPM CO = 100 PPM X 28 MW X 1700 DSCFM X 2.595E-09 X 60 min/hr = 0.74 lb/hr CO 0.74 lb/hr CO X 8760 hrs/yr X 1 ton/2000 lb = 3.24 TPY CO

Actual Emissions were measured at 0.04 gr/dscfm at 7% O2
PM = 0.08 gr/dscf X 1 pound/7000 gr X 1700 DSCFM X 60 min/hr = 1.17 lb/hr PM
1.17 lb/hr PM X 8760 hrs/yr X 1 ton/2000 lb = 5.12 TPY PM

Attachment 4 Process Flow Diagram

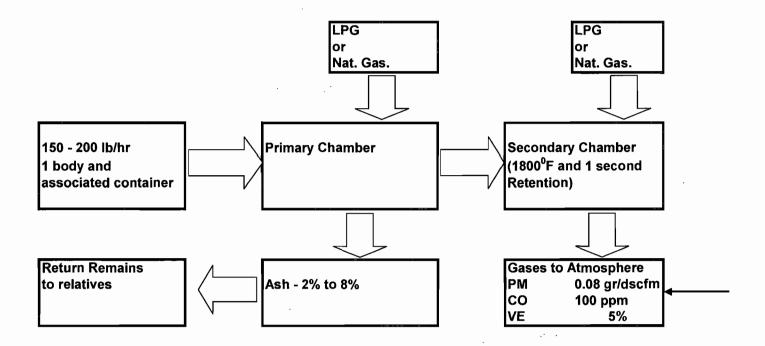



General Permit Application Human Crematory

Prepared for:
Atlas Crematory
2111 South U.S. Highway 1
Rockledge, FL 32955
Brevard County
AIRS ID# 0090054-005-AG

Prepared By:

AI Environmental Consulting Services, Inc. 598 Northlake Blvd, Ste. 1016 Altamonte Springs, Florida 32701

Date: March 2011

Application Contents

Form 62-210.920(2)(c) General Permit Application Attachment 1 - Compliance Test Report Attachment 2 - Equipment Drawings and Brochures

Attachment 3 - AP-42 Emissions Calculations

Attachment 4 - Process Flow Diagram



FDEP Receipts P.O Box 3070

Tallahassee, Florida 32315-3070

5400 Village Drive

Viera, Florida 32855





U.S. POSTAGE

UNITED STATES 1000

Florida Department of Environmental Protection

RETURN PECEIPT REQUESTED