


## HALOGENATED SOLVENT DEGREASERS



## **COMPLIANCE INSPECTION CHECKLIST**

| INSPECTION TYPE:  | ANNUAL (INS1, INS2)<br>RE-INSPECTION (FUI)  |  |  |  |  |  |
|---|---|--|--|--|--|--|
| AIRS ID#: 0990540 DA  | TE: <u>9/30/2009</u>  | ARRIVE: <u>2:55 PM</u>   | DEPART: <u>3:30 PM</u>   |  |  |  |
| FACILITY NAME: SO   | LITRON DEVICES  |  |  |  |  |  |
| FACILITY LOCATION   | N: 3301 ELECTRON  | ICS WAY  |  |  |  |  |
|   | WEST PALM BEA   | ACH 33407  |  |  |  |  |
| OWNER/AUTHORIZED REPRESENTATIVE: SHEVACH SARAF PHONE: (561)848-4311   |   |  |  |  |  |  |
| CONTACT NAME: S   | ame   | I  | PHONE: (   |  |  |  |
| ENTITLEMENT PERIO   | <b>OD:</b> 6/15/2008 / 6/15<br>(effective date) (end d  | 5/2013<br>date)  |  |  |  |  |
| PART I: INSPECTION COMPLIANCE STATUS (check I only one box)         IN COMPLIANCE       MINOR Non-COMPLIANCE         SIGNIFICANT Non-COMPLIANCE |   |  |  |  |  |  |
| (check ☑ appropriat<br>1. Halogenated s<br>perchloroet<br>methylene<br>trichloroett<br>1,1,1-trichl<br>carbon tetra                             | TION       – Rule 62-210.300 F.         tte box(es))       solvent used at facility:         thylene       –         thylene       –         hylene       –         loroethane       –         rachloride       –         n       – | 2. Indication on notifi<br>following machine<br>Batch Vap<br>Batch Vap<br>New In-lin<br>Existing I | ication form that facility has the<br>type(s).<br>por, $x \le 1.21 \text{ m}^2$<br>por, $x > 1.21 \text{ m}^2$<br>ne<br>n-line<br>d<br>d |  |  |  |
| PART III: CLASSIFIC   | <u> ATION</u> – Rule 62-213.300   | 0 FAC  |  |  |  |  |
| Indicate the machine  | e type(s) observed at the fa  | cility:  |  |  |  |  |
| Batch Vapor, x<br>Batch Vapor, x >  |   | New In-line  | Batch Cold (immersion)   |  |  |  |
| Daten vapor, x -  | > 1.21 III  | Existing m-me  |  |  |  |  |

| PART IV: <u>GENERAL CONTROL REQUIREMENTS</u> – Rule 62-213.300 FAC   |      |          |     |
|--|------|----------|-----|
| A. <u>Batch Vapor and In-Line Machines</u>   |      |          |     |
| 1. Does the facility maintain an idling and downtime mode cover that is readily opened and closed, that completely covers, has no cracks, holes, or defects; OR maintain a room designed with reduced draft according to Part II, Section (5)(c)6.b of the permit notification?        | ⊠Yes | No       |     |
| 2. Does the facility maintain a freeboard ratio of 0.75 or greater?  | Yes  | No       |     |
| 3. Does the facility utilize a parts basket or parts whose size is less than 50% of the  |      |          |     |
| solvent-air interface area; OR introduce parts or parts basket at 0.9 m/min (3 ft/min)<br>or less?   | ⊠Yes | No       |     |
| 4. Does the facility conduct all spraying operations within the vapor zone or an area not directly exposed to ambient air?   | Yes  | No       |     |
| 5. Does the facility install and maintain an automated parts handling system capable of moving the parts/parts basket at 3.4 m/min. (11ft/min) or less?  |      | No       |     |
| 6. Does the facility install and maintain a carbon adsorber on all machines using a lip exhaust? The exhaust concentration should not exceed 100 ppm halogenated solvent, the carbon adsorber should not be by-passed, the lip exhaust shall be located above the closed machine cover | Yes  | No       | N/A |
| <ul><li>7. Does the facility have each machine equipped with:</li><li>a. a device to shut off sump heat if the solvent level drops to the heater coils?</li></ul>  |      | No       |     |
| <ul><li>b. a device to shut off sump heat if the vapor level rises above the height of the vapor condenser?</li><li>c. a primary condenser?</li></ul>  |      | □N<br>□N |     |
| 8. Does the facility store all waste solvent, still bottoms, and sump bottoms in closed containers?  | ⊠Yes | No       |     |
| <ul> <li>B. <u>Batch Cold Cleaning Machines</u></li> <li>1. Does the facility collect and store all waste solvent in closed containers?</li> <li>2. Does the facility use a flexible hose or flushing device only within the</li> </ul>  | Yes  | No       |     |
| freeboard area?  | Yes  | No       |     |
| 3. Does the facility drain cleaned parts for 15 seconds or longer or until dripping ceases, whichever is longer?   | Yes  | No       |     |
| 4. Does the facility maintain the solvent level inside the machine at or below the fill line?  | Yes  | No       |     |
| 5. Does the facility immediately clean up spills during solvent transfer?<br>Store wipe rags in a covered container?   | Yes  | No       |     |
| 6. Does the facility operate the agitator to produce a rolling motion? ( <i>applicable only when air or pump agitated solvent bath used</i> )  | Yes  | No       | N/A |
| 7. Does the facility ensure that the machine is not exposed to drafts greater than 40 m/min (132 ft/min) when the cover is open?   | Yes  | No       |     |
| 8. Does the facility ensure that sponges, fabrics, wood and paper products are not   |      |          |     |
| placed in the machine?<br><u>Remote Reservoir Type Only</u>  | Yes  | No       |     |
| 9. Does the facility employ a tightly fitting cover over the solvent sump?<br>The cover must be closed at all times except during parts cleaning.  | Yes  | No       | N/A |
| <u>Immersion Type Only</u><br>10. Does the facility employ a tightly fitting cover and a water layer with a thickness of<br>at least 2.5 cm (1 in.); OR employ a tightly fitting cover and maintain a freeboard ratio  |      |          |     |
| of 0.75? Tightly fitting cover must be closed at all times except during parts entry and removal   | Yes  | No       | N/A |

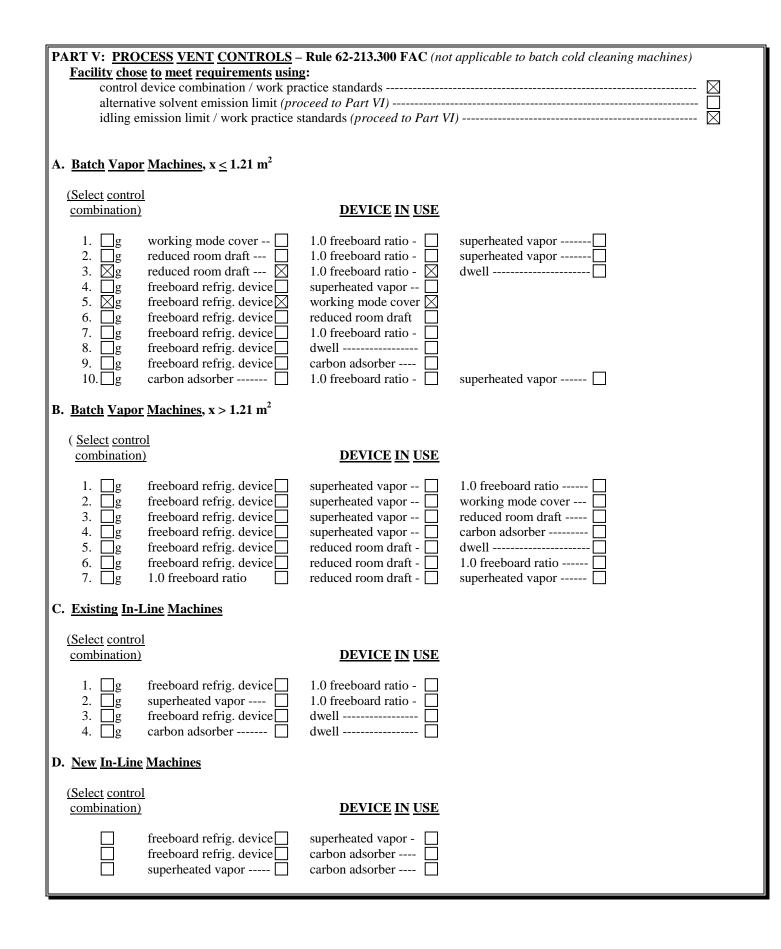

## PART VI: <u>RECORDKEEPING REQUIREMENTS</u> – Rule 62-213.300(3) FAC

## Has the responsible official maintained the following:

| 1. Owner's manuals, design specifications, and other instructional materials for cleaning machine and control equipment?   | Xes  | □No       |          |
|--|------|-----------|----------|
| 2. Date of installation for cleaning machine and all control devices? If the exact date is   |      |           |          |
| unknown, they must have a letter stating installation occurred before or after $11/29/93$  |      |           |          |
| 3. Halogenated solvent content for each solvent used? ( <i>exempt if &lt;5% by weight</i> )  | =    |           |          |
| <ul><li>4. Estimates of annual solvent consumption for each machine?</li><li>5. Dates of solvent additions and amounts added to each machine? (<i>applicable only to</i></li></ul>   |      | <u>No</u> |          |
| those using an alternative emission limit)   | Yes  | No        | N/A      |
| 6. Idling emissions limit tests, including values obtained during the initial performance  | _    | _         | <u></u>  |
| test? (applicable only to those using an idling emissions limit)   | LYes | <u>No</u> | ⊠N/A     |
| 7. All control device and parameter monitoring? (applicable only to batch vapor and  |      | <b>—</b>  | <b>—</b> |
| in-line machines)  | Yes  | <u>No</u> | ∐N/A     |
| 8. Information on remedial actions in the event of exceedances or other repairs and  |      |           |          |
| subsequent monitoring of affected parameters?  |      | <b>No</b> | ∐N/A     |
| 9. Monthly emissions calculations (applicable only to those using an alternative or idling   | _    |           |          |
| emission limit)  | UYes | ∐No       | ⊠N/A     |
| 10. 3-month rolling average emissions calculations? ( <i>applicable only to those using an</i>   |      |           |          |
| alternative emission limit)  | UYes | <b>No</b> | ⊠N/A     |
| 11. Cleaning capacity calculations? (applicable only to those using an alternative emission limitarity and provide the second se | _    |           |          |
| limit without a solvent-air interface)   | Yes  | <u>No</u> | N/A      |

Jeffrey Dizek

Inspector's Name (Please Print)

9/30/2009

Date of Inspection

9/2010

Inspector's Signature

Approximate Date of Next Inspection

**COMMENTS:**