



# Department of Environmental Protection

Jeb Bush  
Governor

Twin Towers Office Building  
2600 Blair Stone Road  
Tallahassee, Florida 32399-2400

Colleen M. Castille  
Secretary

## STATE OF FLORIDA DEPARTMENT OF ENVIRONMENTAL PROTECTION NOTICE OF FINAL PERMIT

In the Matter of an  
Application for Permit by:

Gene L. Ussery, Jr.  
Gulf Power Company  
One Energy Place  
Pensacola, Florida 32520-0100

DEP File No. 0050014-010-AV  
Lansing Smith Electric Generating Plant  
Bay County

Enclosed is Final Permit Number 0050014-010-AV. This Title V renewal permit authorizes Gulf Power Company to continue commercial operation of the Lansing Electric Generating Plant in accordance with Title IV and Title V of the Clean Air Act Amendments of 1990. This permit is issued pursuant to Chapter 403, Florida Statutes.

Any party to this order has the right to seek judicial review of it under section 120.68 of the Florida Statutes, by filing a notice of appeal under rule 9.110 of the Florida Rules of Appellate Procedure with the clerk of the Department of Environmental Protection in the Office of General Counsel, Mail Station #35, 3900 Commonwealth Boulevard, Tallahassee, Florida, 32399-3000, and by filing a copy of the notice of appeal accompanied by the applicable filing fees with the appropriate District Court of Appeal. The notice must be filed within thirty days after this order is filed with the clerk of the Department.

Executed in Tallahassee, Florida.

Trina L. Vielhauer, Chief  
Bureau of Air Regulation

### CERTIFICATE OF SERVICE

The undersigned duly designated deputy agency clerk hereby certifies that this Notice of Final Permit (including the Final permit) was sent by certified mail (\*) and copies were electronically mailed by Internet e-mail before the close of business on 12/27/04 to the person(s) listed:

- Mr. Gene L. Ussery, Jr., Gulf Power Company\*
- Mr. Kennard Kosky, P.E. ([kkosky@golder.com](mailto:kkosky@golder.com))
- Mr. Kevin White, P.E., DEP-NWD ([kevin.white@dep.state.fl.us](mailto:kevin.white@dep.state.fl.us))
- Mr. G. Dwain Waters, QEP, Gulf Power Company ([GDWATERS@southernco.com](mailto:GDWATERS@southernco.com))

12/27/04 cc: Jonathan Hopton  
Reading Hill

Clerk Stamp

**FILING AND ACKNOWLEDGMENT FILED**, on this date, pursuant to §120.52, Florida Statutes, with the designated Department Clerk, receipt of which is hereby acknowledged.

Balou J. Friday (Clerk) Friday 12/27/04 (Date)

"More Protection, Less Process"

Printed on recycled paper.

## **FINAL Determination**

Title V Air Operation Permit Renewal  
FINAL Title V Air Operation Permit No.: 0050014-010-AV  
Gulf Power Company  
Lansing Smith Electric Generating Plant  
Page 1 of 1

### **I. Comment(s).**

No comments were received from the USEPA during their 45 day review period of the PROPOSED Permit.

### **II. Conclusion.**

In conclusion, the permitting authority hereby issues the FINAL Permit.

**SENDER: COMPLETE THIS SECTION**

- Complete items 1, 2, and 3. Also complete item 4 if Restricted Delivery is desired.
- Print your name and address on the reverse so that we can return the card to you.
- Attach this card to the back of the mailpiece, or on the front if space permits.

1. Article Addressed to:

Gene L. Ussery, Jr.  
 Gulf Power Company  
 One Energy Place  
 Pensacola, Florida 32520-0100

2. Article Number  
 (Transfer from service label)

7004 1350 0000 1910 3017

PS Form 3811, February 2004

Domestic Return Receipt

102595-02-M-1540

**COMPLETE THIS SECTION ON DELIVERY**

A. Signature

X *B. Ussery*

Agent

Addressee

B. Received by (Printed Name)

*B. Ussery*

C. Date of Delivery

*12-30-04*

D. Is delivery address different from item 1?  Yes

If YES, enter delivery address below:  No

3. Service Type

Certified Mail

Express Mail

Registered

Return Receipt for Merchandise

Insured Mail

C.O.D.

4. Restricted Delivery? (Extra Fee)

Yes

7004 1350 0000 1910 3017

U.S. Postal Service™

**CERTIFIED MAIL™ RECEIPT**

(Domestic Mail Only; No Insurance Coverage Provided)

For delivery information visit our website at [www.usps.com](http://www.usps.com)

Gene L. Ussery, Jr. **OFFICIAL USE**

Postage	\$
Certified Fee	
Return Receipt Fee (Endorsement Required)	
Restricted Delivery Fee (Endorsement Required)	
Total Postage & Fees	\$

Postmark Here

Sent To

Gene L. Ussery, Jr.

Street, Apt. No.,  
 or PO Box No. One Energy Place

City, State, ZIP+4  
 Pensacola, Florida 32520-0100

PS Form 3800, June 2002

See Reverse for Instructions

# STATEMENT OF BASIS

Gulf Power Company  
Lansing Smith Electric Generating Plant  
**Facility ID No.:** 0050014  
Bay County

Title V Air Operation Permit Renewal  
**FINAL Permit No.:** 0050014-010-AV

This Title V air operation permit is issued under the provisions of Chapter 403, Florida Statutes (F.S.), and Florida Administrative Code (F.A.C.) Chapters 62-4, 62-210, 62-213 and 62-214. The above named permittee is hereby authorized to perform the work or operate the facility shown on the application and approved drawing(s), plans, and other documents, attached hereto or on file with the permitting authority, in accordance with the terms and conditions of this permit.

This facility consists of two coal fired steam generators (boilers), two combustion turbines (used to drive two separate peaking generators) driven by a single jet engine, and the two new gas-fired combined-cycle combustion turbine electrical generators with duct-fired heat recovery steam generators (HRSGs). The two boilers are Acid Rain Phase II Units. The two combined-cycle combustion turbines are also Acid Rain units. Pulverized coal is the primary fuel for the boilers. Distillate fuel oil is used to fire the jet engine and as a "back-up" fuel for the boilers. Natural gas is the only fuel allowed to be fired in the two new combined-cycle combustion turbines. Also included in this permit are miscellaneous unregulated/insignificant emissions units and/or activities.

Emissions unit number -001 is a tangentially fired, dry bottom boiler designated as "Boiler Number 1". It is rated at a maximum heat input of 1,944.8 million Btu per hour (MMBtu/hour) when firing pulverized coal and 153 MMBtu/hour when firing distillate fuel oil. Emissions unit number -002 is a tangentially fired, dry bottom boiler designated as "Boiler Number 2". It is rated at a maximum heat input of 2,246.2 million Btu per hour (MMBtu/hour) when firing pulverized coal and 76 MMBtu/hour when firing distillate fuel oil. Both units are Phase II Acid Rain Units. These emissions units pre-date PSD regulations, but are regulated under Rule 62-296.405, F.A.C., Fossil Fuel Fired Steam Generators with more than 250 million Btu per Hour Heat Input. PM emissions from unit -001 are controlled by a hot side (Buell Model # BAL 2X34N333-4-3P) and a cold side (General Electric Model # BE1.2X21(12)30-1.5-1.5-4.2P) electrostatic precipitator. PM emissions from unit -002 are controlled by a hot side (Buell Model # BAL 2X34N333-4-3P) and a cold side (GE-ESI Model # BE2.1X(2-12's)(12)-30-111-4.3P) electrostatic precipitator.

Units 1 and 2 are subject to CAM for controlled emissions of particulate matter.

Compliance with the heat input limitations on Units 1 and 2 is through the use of on-site composite fuel sampling and analysis.

Units 1 and 2 are utilizing CEMS for compliance purposes for NO<sub>x</sub>, SO<sub>2</sub> and opacity. Units 4 and 5 are utilizing CEMS for compliance purposes for NO<sub>x</sub> and SO<sub>2</sub>.

In order to eliminate violations of Florida's ambient air quality standards off of the plant property, the allowable sulfur dioxide emissions limits for these units have been reduced, through the use of the ISC dispersion model, to the following levels:

<b>Unit No.</b>	<b>Emissions Limit</b>
-001, alone	2.10 lbs/MMBtu
-002, alone	2.70 lbs/MMBtu
-001 & -002, combined	4.50 lbs/MMBtu

Emissions unit number -003 consists of a single engine used to drive two simple cycle combustion turbines (each with its own stack) manufactured by Pratt and Whitney, that are used as peaking units. They are designated as combustion turbine A & combustion turbine B. Each combustion turbine is connected to a separate generator. The engine is rated at a maximum heat input of 542 million Btu per hour (MMBtu/hour) while being fueled by No. 2 fuel oil with a maximum sulfur content of 0.5%, by weight. Emissions from these combustion turbines are uncontrolled. This emissions unit is regulated under Rule 62-210.300, F.A.C., Permits Required. These turbines are not subject to 40 CFR 60, Subpart GG, Standards of Performance for New Stationary Gas Turbines.

Periodic monitoring for the combustion turbines will consist of an EPA Method 9 opacity test. Upon exceeding 400 hours of operation on fuel oil, and every 150 hours of operation on fuel oil thereafter, in any given federal fiscal year (October 1 through September 30), the owner or operator shall conduct a visible emissions test on each of these combustion turbines while firing fuel oil. These tests shall be performed within 20 days of exceeding such operating hours.

Emission units -004 and -005 (collectively designated as Gulf Smith Unit 3) consist of a General Electric Model No. PG7241 (FA), combined-cycle combustion turbine with electrical generator set. The unit will achieve a nominal 566 megawatts, at annual average site conditions, with duct burners. These units are capable of a maximum of approximately 574 megawatts in combined cycle operation with power augmentation and evaporative cooling at 95 degrees F. The maximum heat input of the combustion turbines is a nominal 1,927 MMBtu/hr (LHV at 65 degrees F) each. The maximum heat input of the duct burners is a nominal 303 MMBtu/hr (LHV at 65 degrees F) each. The plant includes two 121 foot stacks; a small heater for the gas pipeline; and a 10-cell, mechanical draft salt water cooling tower. The cooling tower is not subject to a NESHAP because chromium-based chemical treatment is not used. Simple cycle operation is not a permitted activity. Support facilities for Unit 3 include water treatment and storage facilities. Emissions from Units -004 and -005 are controlled by Dry Low NO<sub>x</sub> (DLN) combustors firing exclusively natural gas. Inherently clean fuels and good combustion practices are employed to control all pollutants.

Based on the Title V permit renewal application received June 22, 2004, this facility is a major source of hazardous air pollutants (HAPs).

**Gulf Power Company**  
**Lansing Smith Electric Generating Plant**  
**Facility ID No.: 0050014**  
**Bay County**

**Title V Air Operation Permit Renewal**  
**FINAL Permit No.: 0050014-010-AV**

(Renewal of Initial Title V Air Operation Permit No.: 0050014-001-AV)

**Permitting Authority**

State of Florida  
Department of Environmental Protection  
Division of Air Resources Management  
Bureau of Air Regulation  
Title V Section

Mail Station #5505  
2600 Blair Stone Road  
Tallahassee, Florida 32399-2400

Telephone: 850/488-0114  
Fax: 850/921-9533

## Title V Air Operation Permit Revision

**FINAL Permit No.: 0050014-010-AV**

### Table of Contents

<u>Section</u>	<u>Page Number</u>
I. Facility Information. ....	2
A. Facility Description.	
B. Summary of Emissions Unit ID No(s). and Brief Description(s)	
C. Relevant Documents	
II. Facility-wide Conditions. ....	4
III. Emissions Units and Conditions.	
A. Boilers Number 1 and 2 - Phase II, Acid rain Units. ....	9
B. Combustion Turbine Peaking Units A & B. ....	26
C. Combustion Turbines 4 & 5. ....	31
IV. Acid Rain Part. ....	49
Appendix I-1, List of Insignificant Emissions Units and/or Activities. ....	52
Appendix U-1, List of Unregulated Emissions Units and/or Activities. . ....	54
Appendix H-1, Permit History/ID Number Changes. ....	55
Referenced Attachments .....	56
Phase II Acid Rain Application	
Phase II Acid Rain NO <sub>x</sub> Compliance Plan	
Revised Phase II Acid Rain NO <sub>x</sub> Averaging Plan	
Appendix A-1, Abbreviations, Definitions, Citations, and Identification Numbers	
Appendix CAM, Compliance Assurance Monitoring Plan	
Appendix PA-1, Patrol Area	
Appendix SO-1, Secretarial ORDER(s)	
Appendix SS-1, Stack Sampling Facilities (version dated 10/7/96)	
Appendix TV-4, Title V Conditions (version dated 2/12/02)	
Figure 1: Summary Report-Gaseous and Opacity Excess Emission and Monitoring System Performance (40 CFR 60, July, 1996)	
Table 1-1, Summary of Air Pollutant Standards and Terms	
Table 2-1, Compliance Requirements	



Jeb Bush  
Governor

# Department of Environmental Protection

Twin Towers Office Building  
2600 Blair Stone Road  
Tallahassee, Florida 32399-2400

Colleen M. Castille  
Secretary

**Permittee:**

Gulf Power Company  
500 Bay Front Parkway  
Pensacola, Florida 32520-0100

**FINAL Permit No.:** 0050014-010-AV

**Facility ID No.:** 0050014

**SIC Nos.:** 49, 4911

**Project:** Title V Air Operation Permit Renewal

This permit is for the operation of the Lansing Smith Electric Generating Plant. This facility is located at 4300 County Road, Bay County.

This Title V air operation permit is issued under the provisions of Chapter 403, Florida Statutes (F.S.), and Florida Administrative Code (F.A.C.) Chapters 62-4, 62-210, 62-213, and 62-214. The above named permittee is hereby authorized to perform the work or operate the facility shown on the application and approved drawing(s), plans, and other documents, attached hereto or on file with the permitting authority, in accordance with the terms and conditions of this permit.

**Referenced attachments made a part of this permit:**

Appendix I-1, List of Insignificant Emissions Units and/or Activities

Appendix U-1, List of Unregulated Emissions Units and/or Activities

Phase II Acid Rain Permit Application Signed 06/01/04

Phase II Acid Rain NO<sub>x</sub> Compliance Plan Signed 06/01/04

Revised Phase II Acid Rain NO<sub>x</sub> Averaging Plan Signed 11/18/03

Appendix PA-1, Patrol Area

Appendix SO-1, Secretarial ORDER(s)

Appendix SS-1, Stack Sampling Facilities (version dated 10/7/96)

Appendix TV-4, Title V Conditions (version dated 2/12/02)

Figure 1: Summary Report-Gaseous and Opacity Excess Emission and Monitoring  
System Performance (40 CFR 60, July, 1996)

Appendix CAM, Compliance Assurance Monitoring Plan

**Effective Date:** January 1, 2005

**Renewal Application Due Date:** July 5, 2009

**Expiration Date:** December 31, 2009

---

Michael G. Cooke, Director  
Division of Air Resource Management

MGC/jkp/jh

"More Protection, Less Process"

Printed on recycled paper.



## **Section I. Facility Information.**

### **Subsection A. Facility Description.**

This facility consists of two coal fired steam generators (boilers), two combustion turbines (used to drive two separate peaking generators) driven by a single jet engine, and two gas-fired combined-cycle combustion turbine electrical generators with duct-fired heat recovery steam generators (HRSGs). The two boilers are Acid Rain Phase II Units. The two combined-cycle combustion turbines are also Acid Rain units. Pulverized coal is the primary fuel for the boilers. Distillate fuel oil is used to fire the combustion turbine and as a "back-up" fuel for the boilers. Also included in this permit are miscellaneous unregulated/insignificant emissions units and/or activities.

Based on the Title V permit renewal application received June 22, 2004, this facility is a major source of hazardous air pollutants (HAPs).

The existing facility is a PSD-major source of air pollution in accordance with Rule 62-212.400, F.A.C.

The use of 'Permitting Notes' throughout this permit are for informational purposes, only, and are not permit conditions.

### **Subsection B. Summary of Emissions Unit ID Numbers and Brief Descriptions.**

<b><u>E.U. ID</u></b>	<b><u>Brief Description</u></b>
-001	Boiler Number 1 - 1,944.8 MMBtu/hour (Phase II Acid Rain Unit)
-002	Boiler Number 2 - 2,246.2 MMBtu/hour (Phase II Acid Rain Unit)
-003	Combustion Turbine - 542 MMBtu/hour Peaking Unit
-004	170 MW Gas Combustion Turbine with HRSG and Duct Burner (Acid Rain Unit)
-005	170 MW Gas Combustion Turbine with HRSG and Duct Burner (Acid Rain Unit)
-006	Cooling Tower
-007	Material Handling of Coal and Ash (See Appendix U-1)
-008	Fugitive PM Sources - On-site Vehicles (See Appendix U-1)
-009	General Purpose Internal Combustion Engines (See Appendix U-1)

*Please reference the Permit Number, the Facility Identification Number, and the appropriate Emissions Unit(s) ID Number(s) on all correspondence, test report submittals, applications, etc.*

### **Subsection C. Relevant Documents.**

The following documents are part of this permit:

Appendix I-1, List of Insignificant Emissions Units and/or Activities  
Appendix U-1, List of Unregulated Emissions Units and/or Activities  
Phase II Acid Rain Permit Application Signed 6/1/04  
Phase II Acid Rain NO<sub>x</sub> Compliance Plan Signed 6/1/04

Phase II Acid Rain NO<sub>x</sub> Averaging Plan Signed 11/18/03  
Appendix PA-1, Patrol Area  
Appendix SO-1, Secretarial ORDER(s)  
Appendix SS-1, Stack Sampling Facilities (version dated 10/7/96)  
Appendix TV-4, Title V Conditions (version dated 2/12/02)  
Figure 1: Summary Report-Gaseous and Opacity Excess Emission and Monitoring  
System Performance (40 CFR 60, July, 1996)  
Appendix CAM, Compliance Assurance Monitoring Plan

{Permitting Note: The documents listed below are not a part of this permit; however, they are specifically related to this permitting action.}

These documents are provided to the permittee for information purposes only:

Appendix H-1, Permit History / ID Number Transfers  
Appendix A-1, Abbreviations, Acronyms, Citations, and Identification Numbers (version dated 2/5/97)  
Table 1-1, Summary of Air Pollutant Standards and Terms  
Table 2-1, Summary of Compliance Requirements  
Statement of Basis

These documents are on file with the permitting authority:

Title V Air Operation Permit Renewal Application received Electronically on June 22, 2004

These documents are on file with USEPA:

The Responsible Official has certified that the Risk Management Plan was submitted to the RMP Reporting Center.

## **Section II. Facility-wide Conditions.**

### **The following conditions apply facility-wide:**

1. Appendix TV-4, Title V Conditions, is a part of this permit.

{Permitting note: Appendix TV-4, Title V Conditions is distributed to the permittee only. Other persons requesting copies of these conditions shall be provided one copy when requested or otherwise appropriate. If desired, a copy of Appendix TV-4, Title V Conditions can be downloaded from the Division of Air Resources Management's Internet Web site.

2. **Not federally enforceable.** General Pollutant Emission Limiting Standards. Objectionable Odor Prohibited. The permittee shall not cause, suffer, allow, or permit the discharge of air pollutants which cause or contribute to an objectionable odor.

[Rule 62-296.320(2), F.A.C.]

3. Prevention of Accidental Releases (Section 112(r) of CAA).

- a. As required by Section 112(r)(7)(B)(iii) of the CAA and 40 CFR 68, the owner or operator shall submit an updated Risk Management Plan (RMP) to the Chemical Emergency Preparedness and Prevention Office (CEPPO) RMP Reporting Center.
- b. As required under Section 252.941(1)(c), F.S., the owner or operator shall report to the appropriate representative of the Department of Community Affairs (DCA), as established by department rule, within one working day of discovery of an accidental release of a regulated substance from the stationary source, if the owner or operator is required to report the release to the United States Environmental Protection Agency under Section 112(r)(6) of the CAA.
- c. The owner or operator shall submit the required annual registration fee to the DCA on or before April 1, in accordance with Part IV, Chapter 252, F.S. and Rule 9G-21, F.A.C.

Any required written reports, notifications, certifications, and data required to be sent to the DCA, should be sent to:

Department of Community Affairs  
Division of Emergency Management  
2555 Shumard Oak Boulevard  
Tallahassee, FL 32399-2100  
Telephone: 850/413-9921, Fax: 850/488-1739

Any Risk Management Plans, original submittals, revisions or updates to submittals, should be sent to:

RMP Reporting Center  
Post Office Box 1515  
Lanham-Seabrook, MD 20703-1515  
Telephone: 301/429-5018

Any required reports to be sent to the National Response Center, should be sent to:

National Response Center  
EPA Office of Solid Waste and Emergency Response  
USEPA (5305 W)  
401 M Street, SW  
Washington, D.C. 20460  
Telephone: 1/800/424-8802

Send the required annual registration fee using approved forms made payable to:

Cashier  
Department of Community Affairs  
State Emergency Response Commission  
2555 Shumard Oak Boulevard  
Tallahassee, FL 32399-2149

[Part IV, Chapter 252, F.S. and Rule 9G-21, F.A.C.]

4. Statement of Compliance. The annual statement of compliance pursuant to Rule 62-213.440(3)(a)2., F.A.C., shall be submitted to the Department and EPA within 60 (sixty) days after the end of the calendar year using DEP Form No. 62-213.900(7), F.A.C.  
[Rules 62-213.440(3) and 62-213.900, F.A.C.]

{Permitting Note: This condition implements the requirements of Rules 62-213.440(3)(a)2. & 3., F.A.C. (see Condition 51. of APPENDIX TV-4, TITLE V CONDITIONS).}

5. Insignificant Emissions Units and/or Activities. Appendix I-1, List of Insignificant Emissions Units and/or Activities, is a part of this permit.  
[Rules 62-213.440(1), 62-213.430(6), and 62-4.040(1)(b), F.A.C.]

6. Unregulated Emissions Units and/or Activities. Appendix U-1, List of Unregulated Emissions Units and/or Activities, is a part of this permit.  
[Rule 62-213.440(1), F.A.C.]

7. General Pollutant Emission Limiting Standards. Volatile Organic Compounds Emissions or Organic Solvents Emissions. The permittee shall allow no person to store, pump, handle, process, load, unload or use in any process or installation, volatile organic compounds or organic solvents without applying known and existing vapor emission control devices or systems deemed necessary and ordered by the Department.  
[Rule 62-296.320(1)(a), F.A.C.]

{Permitting Note: No vapor emission control devices or systems are deemed necessary nor ordered by the Department as of the issuance date of this permit.}

8. General Particulate Emission Limiting Standards. General Visible Emissions Standard. Except for emissions units that are subject to a particulate matter or opacity limit set forth or established by rule and reflected by conditions in this permit, no person shall cause, let, permit, suffer or allow to be discharged

into the atmosphere the emissions of air pollutants from any activity, the density of which is equal to or greater than that designated as Number 1 on the Ringelmann Chart (20 percent opacity). EPA Method 9 is the method of compliance pursuant to Chapter 62-297, F.A.C.

[Rules 62-296.320(4)(b)1. & 4., F.A.C.]

9. Emissions of Unconfined Particulate Matter. Reasonable precautions to prevent emissions of unconfined particulate matter at this facility are listed below (see Condition No. 57. of Appendix TV-4).

The following requirements are “not federally enforceable”:

- a) Grassing over each section of the ash landfill as it reaches its capacity.
- b) Regular packing of the coal pile to reduce blowing dust and aid in the prevention of coal fires.
- c) Application of a dust suppressant to the coal on the conveyor belts as necessary.
- d) Chemical or water application to unpaved roads and/or unpaved yard areas.
- e) Paving and maintenance of roads, parking areas, and yards.
- f) Landscaping or planting of vegetation.
- g) Confining abrasive blasting where possible.
- h) Other techniques, as necessary.

[Rules 62-296.320(4)(c)2., F.A.C.; and, Proposed by applicant in the initial Title V application received June 14, 1996, and in the Title V permit renewal application received June 22, 2004.]

10. When appropriate, any recording, monitoring, or reporting requirements that are time-specific shall be in accordance with the effective date of the permit, which defines day one.

[Rule 62-213.440, F.A.C.]

11. The Department’s Northwest District Office (Pensacola) telephone number for reporting problems, malfunctions or exceedances under this permit is (850) 595-8364, extension 1220, day or night, and for emergencies involving a significant threat to human health or the environment is (800) 320-0519. For routine business, telephone (850) 595-8364, then press 7, during normal working hours.

[Rules 62-210.700 and 62-4.130, F.A.C.]

12. The permittee shall submit all compliance-related notifications and reports required of this permit (other than Acid Rain Program Information) to the Department’s Northwest District office:

Department of Environmental Protection  
Northwest District Office  
160 Governmental Center  
Pensacola, Florida 32501-5794  
Telephone: 850/595-8364, press 7  
Fax: 850/595-8096

Notification of compliance testing may be submitted by electronic mail to [NWDAIR@dep.state.fl.us](mailto:NWDAIR@dep.state.fl.us). A copy of all compliance related notifications shall be sent to the Northwest District Branch Office in Panama City at 2353 Jenks Ave, Panama City, Florida 32405.

Acid Rain Program Information shall be submitted, as necessary, to:

Department of Environmental Protection  
2600 Blair Stone Road  
Mail Station #5510  
Tallahassee, Florida 32399-2400  
Telephone: 850/488-0114  
Fax: 850/922-6979

13. Any reports, data, notifications, certifications, and requests (other than Acid Rain Program Information) required to be sent to the United States Environmental Protection Agency, Region 4, should be sent to:

United States Environmental Protection Agency, Region 4  
Air, Pesticides & Toxics Management Division  
Air and EPCRA Enforcement Branch, Air Enforcement Section  
61 Forsyth Street  
Atlanta, Georgia 30303-8960  
Telephone: 404/562-9155  
Fax: 404/562-9163

#### Miscellaneous Conditions

14. Patrolling Requirements. Computer modeling results indicate modeled violations of the State of Florida's, and of the National, 24-hour sulfur dioxide ambient air quality standards within the property boundaries of this plant. In order to protect the general public, "No Trespassing" notices, combined with a regular patrol to ensure that public access is precluded in the areas described below (see Appendix PA-1, Patrol Area):

Beginning from the point of origin<sup>1, 2</sup>, proceed due north for a distance of approximately 330 meters until reaching the old fence line (point 1). From point 1, turn 90° to the west and proceed along the old fence line for a distance of 580 meters (point 2). From point 2, proceed due south for a distance of 175 meters (point 3). From point 3, proceed back to the point of origin to define the area.

<sup>1</sup> Point of origin: center of the common stack for Units 1 and 2.

<sup>2</sup> Set due North from the center of the stack as 0°.

[Rules 62-204.220(1) & 62-204.240(1), F.A.C.]

15. Facility-wide NO<sub>x</sub> Emissions Cap. In addition to individual (point source) emission limits and NO<sub>x</sub> averaging plan requirements, the Lansing Smith facility shall be required to comply with a facility-wide NO<sub>x</sub> emissions cap of 6,666 TPY. CEMS shall be the method of compliance. See facility-wide Specific Condition 16. for reporting and record-keeping requirements.  
[0050014-002-AC.]

**16. CEMS for Reporting Facility-wide NO<sub>x</sub> Emissions:** The NO<sub>x</sub> CEMS shall be used for ensuring compliance with the facility-wide cap. For the oil-fired peaking turbine (Emissions Unit EU-003), emissions shall be determined using fuel sampling and AP-42 emission factors. Monthly records shall be maintained of the facility-wide NO<sub>x</sub> emissions and the owner/operator shall calculate the facility-wide cap on a monthly basis for each prior consecutive 12-month period. These records shall be made available to inspectors as necessary. Additionally, a summary shall be filed with each quarterly report as a means of demonstrating compliance with the facility-wide cap for each consecutive 12-month period. The monthly calculations for the coal-fired units shall consist of use of the monthly NO<sub>x</sub> emission rate per MMBtu (as determined by CEMS using the appropriate fuel F factor) multiplied by the monthly fuel (MMBtu) usage as specified in the Lansing Smith Title V permit and converted as appropriate to tons of NO<sub>x</sub> for each unit. The sum of the monthly NO<sub>x</sub> emissions from the coal units and the oil-fired peaking turbine shall then be added to the monthly NO<sub>x</sub> emissions from the combined cycle unit, which will be calculated based upon the monthly average NO<sub>x</sub> emission rate (lb/hr) multiplied by the number of valid operating hours for the same period. This annual emissions cap became effective on the first day of the month following completion of the initial performance testing of Unit 3, and compliance shall begin based upon the first twelve months of operation thereafter.

[Rule 62-4.070 and 62-204.800(7), F.A.C. to avoid PSD Review; and, 0050014-002-AC.]

**17. Certification by Responsible Official (RO).** In addition to the professional engineering certification required for applications by Rule 62-4.050(3), F.A.C., any application form, report, compliance statement, compliance plan and compliance schedule submitted pursuant to Chapter 62-213, F.A.C., shall contain a certification signed by a responsible official that, based on information and belief formed after reasonable inquiry, the statements and information in the document are true, accurate, and complete. Any responsible official who fails to submit any required information or who has submitted incorrect information shall, upon becoming aware of such failure or incorrect submittal, promptly submit such supplementary information or correct information.

[Rule 62-213.420(4), F.A.C.]

**Section III. Emissions Units and Conditions.**

**Subsection A. This section addresses the following emissions units.**

**E.U. ID**

<b><u>No.</u></b>	<b><u>Brief Description</u></b>
-001	Boiler Number 1 (Phase II Acid Rain Unit)
-002	Boiler Number 2 (Phase II Acid Rain Unit)

Emissions unit number -001 is a tangentially fired, dry bottom boiler designated as “Boiler Number 1”. Emissions unit number -002 is a tangentially fired, dry bottom boiler designated as “Boiler Number 2”. Pulverized coal is the primary fuel for both boilers. Distillate fuel oil can be fired for purposes of start-up and flame stabilization. Both units are Phase II Acid Rain Units.

{Permitting notes: These emissions units are regulated under Acid Rain, Phase II. These emissions units pre-date PSD regulations, but are regulated under Rule 62-296.405, F.A.C., Fossil Fuel Fired Steam Generators with more than 250 million Btu per Hour Heat Input. PM emissions from unit -001 are controlled by a hot side (Buell Model # BAL 2X34N333-4-3P) and a cold side (General Electric Model # BE1.2X21(12)30-1.5-1.5-4.2P) electrostatic precipitator. PM emissions from unit -002 are controlled by a hot side (Buell Model # BAL 2X34N333-4-3P) and a cold side (GE-ESI Model # BE2.1X(2-12's)(12)-30-111-4.3P) electrostatic precipitator. Unit -001 began commercial operation on May 12, 1965. Unit -002 began commercial operation on April 9, 1967. Units -001 and -002 share a common stack. Stack height = 199 feet, exit diameter = 18.0 feet, exit temperature = 260 °F, actual volumetric flow rate = 1,567,967 acfm.}

**The following specific conditions apply to the emissions units listed above:**

**Essential Potential to Emit (PTE) Parameters**

**A.1. Permitted Capacity.** The maximum operation heat input rate is as follows:

<u>Unit No.</u>	<u>MMBtu/hr Heat Input</u>	<u>Fuel Type</u>
-001	1,944.8	Coal
	153	No. 2 Fuel Oil
	153	On-Specification Used Oil
-002	2,246.2	Coal
	76	No. 2 Fuel Oil
	76	On-Specification Used Oil

[Rules 62-4.160(2), 62-210.200(PTE) & 62-296.405, F.A.C.; permits AC03-2023, AC03-2024 & 0050014-011-AC; and, Applicant’s request in Title V permit application received June 22, 2004.]

**A.2. Emissions Unit Operating Rate Limitation After Testing.** See Specific Condition **A.30**.  
[Rule 62-297.310(2), F.A.C.]



**A.3. Methods of Operation.**

- a. Fuels. The fuels that are allowed to be burned in these boilers are coal and/or new No. 2 fuel oil and/or on-specification used oil (see Specific Condition **A.38.**). Fuel oil is only used for periods of start-up and as needed for flame stabilization. Also, on-site generated “oil contaminated soil” is periodically combusted for energy recovery purposes.
- b. Other.
  1. Supplemental injection of “sodium carbonate” (at a rate of up to 420 pounds per hour) as necessary to maintain visible emissions below the applicable standards.
  2. Supplemental injection of “GAM 60” for purposes of maintaining boiler tube temperatures.

[Rule 62-213.410, F.A.C.; Applicant’s request in initial Title V permit application dated June 14, 1996, and in revised Title V permit application dated June 18, 1999; and, Gulf Power letter dated July 15, 2002.]

**A.4. Hours of Operation.** These emissions units may operate continuously, i.e. 8760 hours/year. For each emissions unit, the permittee shall maintain an operation log available for Department inspection that documents the total hours of annual operation, including a detailed account of the hours operated on each of the allowable fuels.

[Rules 62-213.440 & 62-210.200(PTE), F.A.C.; and, Applicant’s request in initial Title V application received June 14, 1996.]

**Emission Limitations and Standards**

{Permitting Note: The attached Table 1-1, Summary of Air Pollutant Standards and Terms, summarizes information for convenience purposes only. This table does not supersede any of the terms or conditions of this permit.}

{Permitting note: Unless otherwise specified, the averaging time for conditions **A.5. – A.9.** are based on the specified averaging time of the applicable test method.}

**A.5. Visible Emissions.** Visible emissions shall not exceed 40 percent opacity. Because units 1 and 2 share a common stack, visible emissions violations from the stack will be attributed to both units unless opacity meter results show the specific unit causing the violation.

[Rule 62-296.405(1)(a), F.A.C.; and, Secretarial ORDER(s) signed October 18, 1985, and December 1, 1982; and, AO03-211310, Specific Condition 10.]

**A.6. Visible Emissions - Soot Blowing and Load Change.** Visible emissions shall not exceed 60 percent opacity during the 3-hours in any 24-hour period of excess emissions allowed for boiler cleaning (soot blowing) and load change.

A load change occurs when the operational capacity of a unit is in the 10 percent to 100 percent capacity range, other than startup or shutdown, which exceeds 10 percent of the unit’s rated capacity and which occurs at a rate of 0.5 percent per minute or more.

Visible emissions above 60 percent opacity shall be allowed for not more than 4, six (6)-minute periods, during the 3-hour period of excess emissions allowed for boiler cleaning and load changes, at units which have installed continuous opacity monitors.

[Rule 62-210.700(3), F.A.C.]

{Permitting Note: Load changes may be demonstrated by monitoring megawatt output.}

**A.7. Particulate Matter.** Particulate matter emissions shall not exceed 0.1 pound per million Btu heat input, as measured by applicable compliance methods.  
[Rule 62-296.405(1)(b), F.A.C.]

{Permitting Note: The averaging time shall correspond to the cumulative sample time, as specified in the reference test method (see Specific Condition **A.20.**)}

**A.8. Particulate Matter - Soot Blowing and Load Change.** Particulate matter emissions shall not exceed an average of 0.3 pound per million Btu heat input during the 3-hours in any 24-hour period of excess emissions allowed for boiler cleaning (soot blowing) and load change.  
[Rule 62-210.700(3), F.A.C.]

**A.9. Sulfur Dioxide.** Sulfur dioxide emissions shall not exceed the following emissions limitations, as measured by applicable compliance methods:

<u>Unit No.</u>	<u>Emissions Limit</u>
-001, alone	2.10 lbs./MMBtu
-002, alone	2.70 lbs./MMBtu
-001 & -002, combined	4.50 lbs./MMBtu

[Rules 62-204.220(1) & 62-204.240(1), F.A.C.; and, applicant request.]

**A.10. Sulfur Dioxide - Sulfur Content.** The sulfur content of the No. 2 fuel oil and the "on-specification" used oil shall not exceed 0.5 percent, by weight, as measured by applicable test methods.  
[Applicant request in initial Title V permit application received June 14, 1996.]

### **Excess Emissions**

**A.11.** Excess emissions resulting from malfunction shall be permitted provided that best operational practices to minimize emissions are adhered to and the duration of excess emissions shall be minimized but in no case exceed two hours in any 24-hour period unless specifically authorized by the Department for longer duration.  
[Rule 62-210.700(1), F.A.C.]

**A.12.** Excess emissions resulting from startup or shutdown shall be permitted provided that best operational practices to minimize emissions are adhered to and the duration of excess emissions shall be minimized.  
[Rule 62-210.700(2), F.A.C.]

**A.13.** Excess emissions which are caused entirely or in part by poor maintenance, poor operation, or any other equipment or process failure which may reasonably be prevented during startup, shutdown or malfunction shall be prohibited.  
[Rule 62-210.700(4), F.A.C.]

### **Monitoring of Operations**

{Permitting Note: In accordance with the Acid Rain Phase II requirements, the following continuous monitors are installed on these units: SO<sub>2</sub>, NO<sub>x</sub>, CO<sub>2</sub> and stack gas flow.}

**A.14. Continuous Monitors.** These emissions units shall have installed, and shall maintain, continuous monitoring systems for monitoring opacity and CO<sub>2</sub>.

[Rule 62-296.405(1)(f)1., F.A.C.]

**A.15. Sulfur Dioxide.** Those emissions units not having an operating flue gas desulfurization device may monitor sulfur dioxide emissions by fuel sampling and analysis according to methods approved by the EPA. **The permittee elected to satisfy the monitoring requirements using SO<sub>2</sub> continuous emissions monitors.**

[Rule 62-296.405(1)(f)1.b., F.A.C.]

### **Required Tests, Test Methods and Procedures**

{Permitting Note: The attached Table 2-1, Summary of Compliance Requirements, summarizes information for convenience purposes only. This table does not supersede any of the terms or conditions of this permit.}

**A.16. Annual Tests Required.** Units -001 and -002 must be tested annually for SO<sub>2</sub> and PM emissions in accordance with the requirements listed below.

[Rule 62-297.320(7)(a)4., F.A.C.]

**A.17. Testing While Injecting Additives.** If supplemental additives are used greater than 50% of the time that the unit(s) are operated, the owner or operator shall conduct all emissions tests while injecting additives, consistent with normal operating practices approved by the Department.

[Rule 62-213.440, F.A.C.]

**A.18. Visible Emissions.** The test method for visible emissions shall be DEP Method 9 (see Specific Condition **A.19.**), incorporated in Chapter 62-297, F.A.C. A transmissometer may be used and calibrated according to Rule 62-297.520, F.A.C. **The Permittee has elected to utilize a transmissometer (opacity meter) for demonstrating compliance with the visible emissions limit.** As long as the transmissometer is calibrated, maintained, and operated in accordance with Performance Specification 1 of 40 CFR 60, Appendix B (see Specific Condition **A.23.**), the annual test for visible emissions is not required.

[Rules 62-213.440 and 62-296.405(1)(e)1., F.A.C.]

{Permitting Note: A transmissometer used to demonstrate compliance should record sufficient data so as to be equivalent to a Method 9 test. Method 9 requires determining an average based on 24 readings at 15-second intervals, thus, a six-minute average. The transmissometers in use at this facility make a permanent recording every six-minutes based on an average of readings taken every 15 seconds. After the 6-minute average is recorded, the individual readings are erased and a new 6-minute average is

determined based on the next set of 24 individual readings. This 6-minute block recording is consistent with the requirements of Method 9.}

**A.19. DEP Method 9.** The provisions of EPA Method 9 (40 CFR 60, Appendix A) are adopted by reference with the following exceptions:

1. EPA Method 9, Section 2.4, Recording Observations. Opacity observations shall be made and recorded by a certified observer at sequential fifteen-second intervals during the required period of observation.
2. EPA Method 9, Section 2.5, Data Reduction. For a set of observations to be acceptable, the observer shall have made and recorded, or verified the recording of, at least 90 percent of the possible individual observations during the required observation period. For single-valued opacity standards (e.g., 20 percent opacity), the test result shall be the highest valid six-minute average for the set of observations taken. For multiple-valued opacity standards (e.g., 20 percent opacity, except that an opacity of 40 percent is permissible for not more than two minutes per hour) opacity shall be computed as follows:
  - a. For the basic part of the standard (i.e., 20 percent opacity), the opacity shall be determined as specified above for a single-valued opacity standard.
  - b. For the short-term average part of the standard, opacity shall be the highest valid short-term average (i.e., two-minute, three-minute average) for the set of observations taken.

In order to be valid, any required average (i.e., a six-minute or two-minute average) shall be based on all of the valid observations in the sequential subset of observations selected, and the selected subset shall contain at least 90 percent of the observations possible for the required averaging time. Each required average shall be calculated by summing the opacity value of each of the valid observations in the appropriate subset, dividing this sum by the number of valid observations in the subset, and rounding the result to the nearest whole number. The number of missing observations in the subset shall be indicated in parenthesis after the subset average value.

[Rules 62-297.310, and 62-297.401, F.A.C.]

**A.20. Particulate Matter.** The test methods for particulate matter emissions shall be EPA Methods 17, 5, 5B, or 5F, incorporated by reference in Chapter 62-297, F.A.C. The minimum sample volume shall be 30 dry standard cubic feet. EPA Method 5 may be used with filter temperature no more than 320 degrees Fahrenheit. For EPA Method 17, stack temperature shall be less than 375 degrees Fahrenheit. The owner or operator may use EPA Method 5 to demonstrate compliance. EPA Method 3 or 3A with Orsat analysis shall be used when the oxygen based F-factor, computed according to EPA Method 19, is used in lieu of heat input. Acetone wash shall be used with EPA Method 5 or 17.

[Rules 62-213.440, 62-296.405(1)(e)2., 62-297.310, and 62-297.401, F.A.C.]

**A.21. Sulfur Dioxide.** The test methods for sulfur dioxide emissions shall be EPA Methods 6, 6A, 6B, or 6C, incorporated by reference in Chapter 62-297, F.A.C. Fuel sampling and analysis may be used as an alternate sampling procedure if such a procedure is incorporated into the operation permit for the emissions unit. If the emissions unit obtains an alternate procedure under the provisions of Rule 62-297.620, F.A.C., the procedure shall become a condition of the emissions unit's permit. The Department will retain the authority to require EPA Method 6 or 6C if it has reason to believe that exceedances of the sulfur dioxide emissions limiting standard are occurring. Results of an approved fuel sampling and

analysis program shall have the same effect as EPA Method 6 test results for purposes of demonstrating compliance or noncompliance with sulfur dioxide standards.

[Rules 62-213.440, 62-296.405(1)(e)3., & 62-297.310, 62-297.401, F.A.C.; and, AO03-211310]

{Permitting Note: The permittee has elected to demonstrate compliance with the SO<sub>2</sub> limits specified in condition A.9. by means of a continuous emissions monitoring system (CEMS). In addition to any other requirements associated with the operation and maintenance of these CEMS (i.e., Acid Rain requirements), operation of the CEMS shall be in accordance with the requirements listed below. The annual calibration RATA associated with these CEMS may be used in lieu of the required annual EPA Reference Method 6, as long as all of the requirements of Rule 62-297.310, F.A.C., are met (i.e., prior test notification, proper test result submittal, etc.).}

**A.22.** Continuous SO<sub>2</sub> emission monitoring 24-hour averages are required to demonstrate compliance with the standards of the Department (Specific Condition A.9.). A valid 24-hour average shall consist of no less than 18 hours of valid data capture per calendar day. In the event that valid data capture is interrupted, the permittee shall immediately initiate as-fired fuel sampling to demonstrate compliance with the SO<sub>2</sub> emissions standard. As-fired fuel sampling shall continue until such time as valid data capture is restored. In lieu of as-fired fuel sampling, the permittee may elect to demonstrate SO<sub>2</sub> emissions compliance by the temporary use of a spare SO<sub>2</sub> emissions monitor. The spare, previously calibrated, SO<sub>2</sub> emissions monitor must be installed and collecting data in the same time frame as required above for as-fired fuel sampling.

Maintain a quality control (QC) program. At a minimum, the QC program must include written procedures which shall describe in detail complete, step-by-step procedures and operations for each of the following activities:

1. Calibration of CEMS.
2. Calibration Drift (CD) determination and adjustment of CEMS.
3. Preventative maintenance of CEMS (including spare parts inventory).
4. Data recording, calculations and reporting.
5. Accuracy audit procedures including sampling-and analysis methods.
6. Program of corrective action for malfunctioning CEMS.

[Rules 62-213.440, 62-204.800(7)(e)5., and 62-296.405(1)(f)1.b., F.A.C.; and, AO03-211310.]

**A.23.** Continuous Monitor Performance Specifications. If continuous monitoring systems are required by rule or are elected by the permittee to be used for demonstrating compliance with the standards of the Department, they must be installed, maintained and calibrated, either:

(a) in accordance with the EPA performance specifications listed below. These Performance Specifications are contained in 40 CFR 60, Appendix B, and are adopted by reference in Rule 62-204.800, F.A.C.

- (1) Performance Specification 1--Specifications and Test Procedures for Opacity Continuous Emission Monitoring Systems in Stationary Sources.
- (2) Performance Specification 2--Specifications and Test Procedures for SO<sub>2</sub> Continuous Emission Monitoring Systems in Stationary Sources.
- (3) Performance Specification 3--Specifications and Test Procedures for CO<sub>2</sub> Continuous Emission Monitoring Systems in Stationary Sources. Or,

(b) in accordance with the applicable requirements of 40 CFR 75, Subparts B and C. Excess emissions pursuant to Rule 62-210.700, F.A.C., shall be determined using the 40 CFR part 75 CEMS. [Rule 62-297.520, F.A.C.; 40 CFR 75; and, Applicant request.]

**A.24. Fuel Sampling and Analysis.** The following fuel sampling and analysis protocol shall be used as an alternate sampling procedure authorized by permit to demonstrate compliance with the sulfur dioxide standard in the event that the SO<sub>2</sub> continuous emissions monitor is not able to capture valid data:

- a. Determine and record the as-fired fuel sulfur content, percent by weight, for liquid fuels using either ASTM D2622-92, ASTM D4294-90, both ASTM D4057-88 and ASTM D129-91, or the latest edition, to analyze a representative sample of the blended fuel following each fuel delivery.
- b. Determine and record the as-fired fuel sulfur content, percent by weight, for coal using ASTM D2013-72 and either ASTM D3177-75 or ASTM D4239-85, or the latest edition, to analyze a representative sample of the blended as-fired pulverized coal.
- c. Determine and record the density (using ASTM D 1298-80, or the latest edition) and the calorific heat value in Btu per pound (using ASTM D 240-76, or the latest edition) of the fuel oil combusted.
- d. Determine and record the calorific heat value in Btu per pound of the blended, as-fired pulverized coal using ASTM D2013-72 and either ASTM D2015-77 or D3286-(latest version), or the latest editions.
- e. Record daily the amount of each fuel fired, the density of the fuel oil, the heating value of each fuel fired, and the percent sulfur content, by weight, of each fuel fired.
- f. Utilize the information in a., b., c., d. and e., above, to calculate the SO<sub>2</sub> emission rate to ensure compliance at all times.

[Rules 62-213.440, 62-296.405(1)(e)3., 62-296.405(1)(f)1.b. and 62-297.440, F.A.C.]

**A.25. Heat Input.** Compliance with the heat input limitations specified in Specific Condition **A.1.** shall be demonstrated solely through the use of the composite fuel samples (see Specific Condition **A.24.c. & d.**) taken by on-site personnel (see Specific Condition **A.32.**). Records of the composite samples (typically taken daily as-fired for solid fuel and per shipment (after blending) for liquid fuel) shall be maintained on-site for a period of five years and shall be made available for Department inspection upon request.

{Permitting Note: The permittee and the Department agree that the CEMS used for the federal Acid Rain Program conservatively overestimates the heat input for this unit. The monitoring data for heat input is therefore not appropriate for purposes of compliance, including annual compliance certification.}

**A.26. Frequency of Compliance Tests.** The following provisions apply only to those emissions units that are subject to an emissions limiting standard for which compliance testing is required.

(a) General Compliance Testing.

2. For excess emission limitations for particulate matter specified in Rule 62-210.700, F.A.C., a compliance test shall be conducted annually while the emissions unit is operating under soot blowing conditions in each federal fiscal year during which soot blowing is part of normal emissions unit operation, except that such test shall not be required in any federal fiscal year in which a fossil fuel steam generator does not burn liquid and/or solid fuel for more than 400 hours other than during startup.

3. The owner or operator of an emissions unit that is subject to any emission limiting standard shall conduct a compliance test that demonstrates compliance with the applicable emission limiting standard prior to obtaining a renewed operation permit. Emissions units that are required to conduct an annual compliance test may submit the most recent annual compliance test to satisfy the requirements of this provision. In renewing an air operation permit pursuant to Rule 62-210.300(2)(a)3.b., c., or d., F.A.C., the Department shall not require submission of emission compliance test results for any emissions unit that, during the year prior to renewal:
    - a. Did not operate; or
    - b. In the case of a fuel burning emissions unit, burned liquid and/or solid fuel for a total of no more than 400 hours.
  4. During each federal fiscal year (October 1 - September 30), unless otherwise specified by rule, order, or permit, the owner or operator of each emissions unit shall have a formal compliance test conducted for:
    - a. Visible emissions, if there is an applicable standard;
    - b. Each of the following pollutants, if there is an applicable standard, and if the emissions unit emits or has the potential to emit: 5 tons per year or more of lead or lead compounds measured as elemental lead; 30 tons per year or more of acrylonitrile; or 100 tons per year or more of any other regulated air pollutant; and
    - c. Each NESHAP pollutant, if there is an applicable emission standard.
  5. An annual compliance test for particulate matter emissions shall not be required for any fuel burning emissions unit that, in a federal fiscal year, does not burn liquid and/or solid fuel, other than during startup, for a total of more than 400 hours.
  9. The owner or operator shall notify the Department, at least 15 days prior to the date on which each formal compliance test is to begin, of the date, time, and place of each such test, and the test contact person who will be responsible for coordinating and having such test conducted for the owner or operator.
- (b) Special Compliance Tests. When the Department, after investigation, has good reason (such as complaints, increased visible emissions or questionable maintenance of control equipment) to believe that any applicable emission standard contained in a Department rule or in a permit issued pursuant to those rules is being violated, it may require the owner or operator of the emissions unit to conduct compliance tests which identify the nature and quantity of pollutant emissions from the emissions unit and to provide a report on the results of said tests to the Department.
- (c) Waiver of Compliance Test Requirements. If the owner or operator of an emissions unit that is subject to a compliance test requirement demonstrates to the Department, pursuant to the procedure established in Rule 62-297.620, F.A.C., that the compliance of the emissions unit with an applicable weight emission limiting standard can be adequately determined by means other than the designated test procedure, such as specifying a surrogate standard of no visible emissions for particulate matter sources equipped with a bag house or specifying a fuel analysis for sulfur dioxide emissions, the Department shall waive the compliance test requirements for such emissions units and order that the alternate means of determining compliance be used, provided, however, the provisions of Rule 62-297.310(7)(b), F.A.C., shall apply.

[Rule 62-297.310(7), F.A.C.; and, SIP Approved.]

### **Compliance Test Requirements**

#### **A.27. Determination of Process Variables.**

- (a) **Required Equipment.** The owner or operator of an emissions unit for which compliance tests are required shall install, operate, and maintain equipment or instruments necessary to determine process variables, such as process weight input or heat input, when such data are needed in conjunction with emissions data to determine the compliance of the emissions unit with applicable emission limiting standards.
- (b) **Accuracy of Equipment.** Equipment or instruments used to directly or indirectly determine process variables, including devices such as belt scales, weight hoppers, flow meters, and tank scales, shall be calibrated and adjusted to indicate the true value of the parameter being measured with sufficient accuracy to allow the applicable process variable to be determined within 10% of its true value.

[Rule 62-297.310(5), F.A.C.]

**A.28. Required Stack Sampling Facilities.** When a mass emissions stack test is required, the permittee shall comply with the requirements contained in Appendix SS-1, Stack Sampling Facilities, attached to this permit.

[Rule 62-297.310(6), F.A.C.]

**A.29. Required Number of Test Runs.** For mass emission limitations, a compliance test shall consist of three complete and separate determinations of the total air pollutant emission rate through the test section of the stack or duct and three complete and separate determinations of any applicable process variables corresponding to the three distinct time periods during which the stack emission rate was measured provided, however, that three complete and separate determinations shall not be required if the process variables are not subject to variation during a compliance test, or if three determinations are not necessary in order to calculate the unit's emission rate. The three required test runs shall be completed within one consecutive five-day period. In the event that a sample is lost or one of the three runs must be discontinued because of circumstances beyond the control of the owner or operator, and a valid third run cannot be obtained within the five day period allowed for the test, the Secretary or his or her designee may accept the results of the two complete runs as proof of compliance, provided that the arithmetic mean of the results of the two complete runs is at least 20 percent below the allowable emission limiting standards.

[Rule 62-297.310(1), F.A.C.]

**A.30. Operating Rate During Testing.** Testing of emissions shall be conducted with the emissions unit operation at permitted capacity, which is defined as 90 to 100 percent of the maximum operation rate allowed by the permit. If it is impracticable to test at permitted capacity, an emissions unit may be tested at less than the minimum permitted capacity; in this case, subsequent emissions unit operation is limited to 110 percent of the test load until a new test is conducted. Once the emissions unit is so limited, operation at higher capacities is allowed for no more than 15 consecutive days for the purpose of additional compliance testing to regain the authority to operate at the permitted capacity.

[Rules 62-297.310(2) & (2)(b), F.A.C.]

#### **A.31. Applicable Test Procedures.**

- (a) **Required Sampling Time.**



1. Unless otherwise specified in the applicable rule, the required sampling time for each test run shall be no less than one hour and no greater than four hours, and the sampling time at each sampling point shall be of equal intervals of at least two minutes.
  2. Opacity Compliance Tests. When either EPA Method 9 or DEP Method 9 is specified as the applicable opacity test method, the required minimum period of observation for a compliance test shall be sixty (60) minutes for emissions units which emit or have the potential to emit 100 tons per year or more of particulate matter, and thirty (30) minutes for emissions units which have potential emissions less than 100 tons per year of particulate matter and are not subject to a multiple-valued opacity standard. The opacity test observation period shall include the period during which the highest opacity emissions can reasonably be expected to occur. Exceptions to these requirements are as follows:
    - a. For batch, cyclical processes, or other operations, which are normally completed within less than the minimum observation period and do not recur within that time, the period of observation shall be equal to the duration of the batch cycle or operation completion time.
    - b. The observation period for special opacity tests that are conducted to provide data to establish a surrogate standard pursuant to Rule 62-297.310(5)(k), F.A.C., Waiver of Compliance Test Requirements, shall be established as necessary to properly establish the relationship between a proposed surrogate standard and an existing mass emission limiting standard.
    - c. The minimum observation period for opacity tests conducted by employees or agents of the Department to verify the day-to-day continuing compliance of a unit or activity with an applicable opacity standard shall be twelve minutes.
- (b) Minimum Sample Volume. Unless otherwise specified in the applicable rule, the minimum sample volume per run shall be 25 dry standard cubic feet.  
{Permitting Note: Specific Condition A.20. specifies a minimum sample volume of 30 dry standard cubic feet.}
- (c) Required Flow Rate Range. For EPA Method 5 particulate sampling, acid mist/sulfur dioxide, and fluoride sampling which uses Greenburg Smith type impingers, the sampling nozzle and sampling time shall be selected such that the average sampling rate will be between 0.5 and 1.0 actual cubic feet per minute, and the required minimum sampling volume will be obtained.
- (d) Calibration of Sampling Equipment. Calibration of the sampling train equipment shall be conducted in accordance with the schedule shown in Table 297.310-1.
- (e) Allowed Modification to EPA Method 5. When EPA Method 5 is required, the following modification is allowed: the heated filter may be separated from the impingers by a flexible tube.  
[Rule 62-297.310(4), F.A.C.]

TABLE 297.310-1  
CALIBRATION SCHEDULE

ITEM	MINIMUM CALIBRATION FREQUENCY	REFERENCE INSTRUMENT	TOLERANCE
Liquid in glass thermometer	Annually	ASTM Hg in glass ref. thermometer or equivalent, or thermometric points	+/-2%
Bimetallic thermometer	Quarterly	Calib. liq. in glass thermometer	5 degrees F
Thermocouple	Annually	ASTM Hg in glass ref. thermometer, NBS calibrated reference and potentiometer	5 degrees F
Barometer	Monthly	Hg barometer or NOAA station	+/-1% scale
Pitot Tube	When required or when damaged	By construction or measurements in wind tunnel D greater than 16" and standard pitot tube	See EPA Method 2, Fig. 2-2 & 2-3
Probe Nozzles	Before each test or when nicked, dented, or corroded	Micrometer	+/-0.001" mean of at least three readings Max. deviation between readings .004"
Dry Gas Meter and Orifice Meter	1. Full Scale: When received, When 5% change observed, Annually 2. One Point: Semiannually 3. Check after each test series	Spirometer or calibrated wet test or dry gas test meter	2%
		Comparison check	5%

**Recordkeeping and Reporting Requirements**

**A.32.** The owner or operator shall maintain daily records of fuel consumption and each analysis that provides the heating value and sulfur content for all fuels fired. These records must be of sufficient detail to determine compliance with the allowable sulfur dioxide emission limitations.

[Rules 62-213.440 & 62-4.070(3), F.A.C.]

{Permitting Note: Daily records of fuel consumption are maintained on a 24-hour block (midnight to midnight) basis. Gulf Power will meet greater than a 95% daily sampling rate.}

**A.33.** In the case of excess emissions resulting from malfunctions, each owner or operator shall notify the Department in accordance with Rule 62-4.130, F.A.C. A full written report on the malfunctions shall be submitted in a quarterly report, if requested by the Department.

[Rule 62-210.700(6), F.A.C.]

**A.34.** Submit to the Department a written report of emissions in excess of emission limiting standards as set forth in Rule 62-296.405(1), F.A.C., for each calendar quarter. The nature and cause of the excess emissions shall be explained. This report does not relieve the owner or operator of the legal liability for violations. All recorded data shall be maintained on file by the Source for a period of five years.

[Rules 62-213.440 and 62-296.405(1)(g), F.A.C.]

**A.35.** A maintenance log of the continuous monitoring systems shall be kept showing:

- a. Time out of service.
- b. Calibration and adjustments.

[Rule 62-213.440, F.A.C.; and, AO03-211310, Specific Condition 8.]

**A.36. Test Reports.**

- (a) The owner or operator of an emissions unit for which a compliance test is required shall file a report with the Department on the results of each such test.
- (b) The required test report shall be filed with the Department as soon as practical but no later than 45 days after the last sampling run of each test is completed.
- (c) The test report shall provide sufficient detail on the emissions unit tested and the test procedures used to allow the Department to determine if the test was properly conducted and the test results properly computed. As a minimum, the test report, other than for an EPA or DEP Method 9 test, shall provide the following information:
  1. The type, location, and designation of the emissions unit tested.
  2. The facility at which the emissions unit is located.
  3. The owner or operator of the emissions unit.
  4. The normal type and amount of fuels used and materials processed, and the types and amounts of fuels used and material processed during each test run.
  5. The means, raw data and computations used to determine the amount of fuels used and materials processed, if necessary to determine compliance with an applicable emission-limiting standard.
  6. The type of air pollution control devices installed on the emissions unit, their general condition, their normal operating parameters (pressure drops, total operating current and GPM scrubber water), and their operating parameters during each test run.

7. A sketch of the duct within 8 stack diameters upstream and 2 stack diameters downstream of the sampling ports, including the distance to any upstream and downstream bends or other flow disturbances.
8. The date, starting time and duration of each sampling run.
9. The test procedures used, including any alternative procedures authorized pursuant to Rule 62-297.620, F.A.C. Where optional procedures are authorized in this chapter, indicate which option was used.
10. The number of points sampled and configuration and location of the sampling plane.
11. For each sampling point for each run, the dry gas meter reading, velocity head, pressure drop across the stack, temperatures, average meter temperatures and sample time per point.
12. The type, manufacturer and configuration of the sampling equipment used.
13. Data related to the required calibration of the test equipment.
14. Data on the identification, processing and weights of all filters used.
15. Data on the types and amounts of any chemical solutions used.
16. Data on the amount of pollutant collected from each sampling probe, the filters, and the impingers, are reported separately for the compliance test.
17. The names of individuals who furnished the process variable data, conducted the test, analyzed the samples and prepared the report.
18. All measured and calculated data required to be determined by each applicable test procedure for each run.
19. The detailed calculations for one run that relate the collected data to the calculated emission rate.
20. The applicable emission standard, and the resulting maximum allowable emission rate for the emissions unit, plus the test result in the same form and unit of measure.
21. A certification that, to the knowledge of the owner or his authorized agent, all data submitted are true and correct. When a compliance test is conducted for the Department or its agent, the person who conducts the test shall provide the certification with respect to the test procedures used. The owner or his authorized agent shall certify that all data required and provided to the person conducting the test are true and correct to his knowledge.

[Rules 62-213.440 and 62-297.310(8), F.A.C.]

**A.37. PSD Applicability Report.** The permittee shall maintain information demonstrating that the water wall replacement project on unit 2 did not result in any significant net emissions increase, which is defined in Rule 62-212.400(2)(e), F.A.C. as follows:

**Net Emissions Increase.** A modification to a facility results in a net emissions increase when, for a pollutant regulated under the Act, the sum of all of the contemporaneous creditable increases and decreases in the actual emissions of the facility, including the increase in emissions of the modification itself and any increases and decreases in quantifiable fugitive emissions, is greater than zero.

**Significant Net Emissions Increase.** A significant net emissions increase of a pollutant regulated under the Act is a net emissions increase equal to or greater than the applicable significant emission rate listed in Table 212.400-2, Regulated Air Pollutants – Significant Emission Rates.

The permittee shall submit an annual report to the Department of such information for a period of 5 years representative of normal post-change operations of the unit (within the period not longer than

10 years-following the change). For an existing electric utility steam-generating unit, actual emissions of the unit following a physical or operational change shall equal the representative actual annual emissions of the unit following the physical or operational change. The following definition of "representative actual annual emissions" found in 40 CFR 52.21(b)(33) is adopted and incorporated by reference in Rule 62-204.800, F.A.C.

Representative actual annual emissions means the average rate, in tons per year, at which the source is projected to emit a pollutant for the two-year period after a physical change or change in the method of operation of a unit, (or a different consecutive two-year period within 10 years after that change, where the Administrator determines that such period is more representative of normal source operations), considering the effect any such change will have on increasing or decreasing the hourly emissions rate and on projected capacity utilization. In projecting future emissions the Administrator shall:

- (i) Consider all relevant information, including but not limited to, historical operational data, the company's own representations, filings with the State or Federal regulatory authorities, and compliance plans under title IV of the Clean Air Act; and
- (ii) Exclude, in calculating any increase in emissions that results from the particular physical change or change in the method of operation at an electric utility steam generating unit, that portion of the unit's emissions following the change that could have been accommodated during the representative baseline period and is attributable to an increase in projected capacity utilization at the unit that is unrelated to the particular change, including any increased utilization due to the rate of electricity demand growth for the utility system as a whole."

Each required annual report shall be submitted to the Department prior to August 1<sup>st</sup> and shall quantify operations for the previous calendar year(s).

[Rules 62-204.800, 62-210.200(11) and 62-212.400(2), F.A.C.; and 40 CFR 52.21(b)(33)]

### **Miscellaneous Conditions**

**A.38. Used Oil.** Burning of on-specification used oil is allowed in this emissions unit in accordance with all other conditions of this permit and the following conditions:

- a. **On-specification Used Oil Emissions Limitations:** This emissions unit is permitted to burn on-specification used oil, which contains a PCB concentration of less than 50 ppm. On-specification used oil is defined as used oil that meets the specifications of 40 CFR 279 - Standards for the Management of Used Oil, listed below. "Off-specification" used oil shall not be burned. Used oil which fails to comply with any of these specification levels is considered "off-specification" used oil.

CONSTITUENT/PROPERTY	ALLOWABLE LEVEL
Arsenic	5 ppm maximum
Cadmium	2 ppm maximum
Chromium	10 ppm maximum
Lead	100 ppm maximum
Total Halogens	1000 ppm maximum
Flash point	100 degrees F minimum

- b. Quantity Limitation: This emissions unit is permitted to burn “on-specification” used oil that is generated by Gulf Power Company, not to exceed 50,000 gallons per calendar year in each boiler (-001 & -002).
- c. PCB Limitation: Used oil containing a PCB concentration of 50 or more ppm shall not be burned at this facility. Used oil shall not be blended to meet this requirement.
- d. Operational Requirements: On-specification used oil with a PCB concentration of 2 to less than 50 ppm shall be burned only at normal source operating temperatures. On-specification used oil with a PCB concentration of 2 to less than 50 ppm shall not be burned during periods of startup or shutdown.
- e. Testing Requirements: For each batch of used oil to be burned, the owner or operator must be able to demonstrate that the used oil qualifies as on-specification used oil and that the PCB content is less than 50 ppm.

The requirements of this demonstration are governed by the following federal regulations:

Analysis of used oil fuel. A generator, transporter, processor/re-refiner, or burner may determine that used oil that is to be burned for energy recovery meets the fuel specifications of Sec. 279.11 by performing analyses or obtaining copies of analyses or other information documenting that the used oil fuel meets the specifications.

[40 CFR 279.72(a)]

Testing of used oil fuel. Used oil to be burned for energy recovery is presumed to contain quantifiable levels (2 ppm) of PCB unless the marketer obtains analyses (testing) or other information that the used oil fuel does not contain quantifiable levels of PCBs.

- (i) The person who first claims that a used oil fuel does not contain quantifiable level (2 ppm) PCB must obtain analyses or other information to support that claim.
- (ii) Testing to determine the PCB concentration in used oil may be conducted on individual samples, or in accordance with the testing procedures described in Sec. 761.60(g)(2). However, for purposes of this part, if any PCBs at a concentration of 50 ppm or greater have been added to the container or equipment, then the total container contents must be considered as having a PCB concentration of 50 ppm or greater for purposes of complying with the disposal requirements of this part.

- (iii) Other information documenting that the used oil fuel does not contain quantifiable levels (2 ppm) of PCBs may consist of either personal, special knowledge of the source and composition of the used oil, or a certification from the person generating the used oil claiming that the oil contains no detectable PCBs.

[40 CFR 761.20(e)(2)]

When testing is required, the owner or operator shall sample and analyze each batch of used oil to be burned for the following parameters:

Arsenic, cadmium, chromium, lead, total halogens, flash point and PCBs.

Testing (sampling, extraction and analysis) shall be performed using approved methods specified in EPA Publication SW-846 (Test Methods for Evaluating Solid Waste, Physical/Chemical Methods).

Additionally, the owner or operator shall sample and analyze each batch of used oil to be burned for the sulfur content (by weight), density and heat content in accordance with applicable test methods (see Specific Condition **A.24.**).

- f. Record Keeping Requirements: The owner or operator shall obtain, make, and keep the following records related to the use of used oil in a form suitable for inspection at the facility by the Department:
- (1) The gallons of on-specification used oil placed into inventory to be burned and the gallons of on-specification used oil burned each month, and
  - (2) For each deposit of used oil, results of the analyses as required by the above conditions, or
  - (3) Other information, besides testing, used to make a claim that the used oil meets the requirements of on-specification used oil or that the used oil contains less than 50 ppm of PCBs.

[40 CFR 279.72(b), 40 CFR 279.74(b) and 40 CFR 761.20(e)]

- g. Reporting Requirements: The owner or operator shall submit, with the Annual Operation Report form, the analytical results required above and the total amount of on-specification used oil placed into inventory to be burned and the total amount of on-specification used oil burned during the previous calendar year.

[Rules 62-4.070(3) and 62-213.440, F.A.C.; and, 40 CFR 279 and 40 CFR 761, unless otherwise noted.]

**A.39. Ambient Monitoring Requirements.** Owners of fossil fuel steam generators shall monitor their emissions and the effects of the emissions on ambient concentrations of sulfur dioxide, in a manner, frequency, and locations approved, and deemed necessary and ordered by the Department.

[Rule 62-296.405(1)(c)3., F.A.C.]

{Permitting Note: No ambient monitoring stations are deemed necessary nor ordered by the Department at this time.}

**A.40. Facility-wide NO<sub>x</sub> Emissions Cap.** In addition to the above requirements, emissions units –001 and –002 are also subject to the facility-wide NO<sub>x</sub> emissions cap of 6,666 tons per year. See Facility-wide Conditions **15. & 16.**

[0050014-002-AC]

**A.41. Compliance Assurance Monitoring.** These emissions units are subject to the Compliance Assurance Monitoring (CAM) requirements contained in the attached Appendix CAM. Failure to adhere to the monitoring requirements specified does not necessarily indicate an exceedance of a specific emissions limitation; however, it may constitute good reason to require compliance testing pursuant to Rule 62-297.310(7)(b), F.A.C.

[40 CFR 64; Rules 62-204.800 and 62-213.440(1)(b)1.a., F.A.C.]



**Subsection B. This section addresses the following emissions unit(s).**

**E.U. ID**

<b><u>No.</u></b>	<b><u>Brief Description</u></b>
-003	Combustion Turbines A & B

Emissions unit number -003 consists of a single engine used to drive two simple cycle combustion turbines, manufactured by Pratt and Whitney, that are used as peaking units. They are designated as combustion turbine A & combustion turbine B. Each combustion turbine is connected to a separate generator. The engine is rated at a maximum heat input of 542 million Btu per hour (MMBtu/hour) while being fueled by No. 2 fuel oil with a maximum sulfur content of 0.5%, by weight. Emissions from these combustion turbines are uncontrolled.

{Permitting notes: This emissions unit is regulated under Rule 62-210.300, F.A.C., Permits Required. These turbines are not subject to 40 CFR 60, Subpart GG, Standards of Performance for New Stationary Gas Turbines. Each combustion turbine has its own stack. Stack heights = 33 feet, exit dimensions = 13'-7" x 10'-2", exit temperatures = 1,200 °F, actual volumetric flow rate (total for both stacks) = 1,069,740 acfm. They began commercial operation on May 18, 1971.}

**The following conditions apply to the emissions units listed above:**

**Essential Potential to Emit (PTE) Parameters**

**B.1. Permitted Capacity.** The maximum operation heat input rates are as follows:

<u>Unit No.</u>	<u>MMBtu/hr Heat Input</u>	<u>Fuel Type</u>
-003	542	No. 2 Fuel Oil

[Rules 62-4.160(2) and 62-210.200(PTE), F.A.C.]

**B.2. Emissions Unit Operating Rate Limitation After Testing.** See Specific Condition **B.13**.  
[Rule 62-297.310(2), F.A.C.]

**B.3. Methods of Operation - Fuels.** Only new No. 2 fuel oil shall be fired in this combustion turbine engine.  
[Rule 62-213.410, F.A.C.]

**B.4. Hours of Operation.** This emissions unit may operate continuously, i.e. 8,760 hours/year. The permittee shall maintain an operation log available for Department inspection that documents the total hours of annual operation.  
[Rules 62-213.440 & 62-210.200(PTE), F.A.C.; and, applicant request in initial Title V application received June 14, 1996.]

### **Emission Limitations and Standards**

{Permitting Note: The attached Table 1-1, Air Pollutant Standards and Terms, summarizes information for convenience purposes only. This table does not supersede any of the terms or conditions of this permit.}

{Permitting note: Unless otherwise specified, the averaging time for condition **B.5.** is based on the specified averaging time of the applicable test method.}

**B.5. Visible Emissions.** Visible emissions from each turbine shall not be equal to or greater than 20 percent opacity.  
[Rule 62-296.320(4)(b)1., F.A.C.; and, AO03-249657.]

**B.6. Sulfur Dioxide - Sulfur Content.** The sulfur content of the new No. 2 fuel oil shall not exceed 0.5 percent, by weight (see Specific Condition **B.12.**). The permittee shall maintain a log available for Department inspection of the fuel sulfur content.  
[Rule 62-213.440, F.A.C.; AO03-249657; and, applicant request in initial Title V application received June 14, 1996.]

### **Excess Emissions**

**B.7.** Excess emissions from these emissions units resulting from startup, shutdown or malfunction shall be permitted provided that best operational practices to minimize emissions are adhered to and the duration of excess emissions shall be minimized but in no case exceed two hours in any 24 hour period unless specifically authorized by the Department for longer duration.  
[Rule 62-210.700(1), F.A.C.]

**B.8.** Excess emissions which are caused entirely or in part by poor maintenance, poor operation, or any other equipment<sup>4</sup> or process failure which may reasonably be prevented during startup, shutdown or malfunction shall be prohibited.  
[Rule 62-210.700(4), F.A.C.]

### **Monitoring of Operations**

**B.9. Sulfur Dioxide.** The permittee shall demonstrate compliance with the liquid fuel sulfur limit by means of a fuel analysis provided by the vendor upon each fuel delivery. See Specific Conditions **B.6.** and **B.12.**  
[Rule 62-213.440, F.A.C.]

### **Test Methods and Procedures**

{Permitting Note: The attached Table 2-1, Summary of Compliance Requirements, summarizes information for convenience purposes only. This table does not supersede any of the terms or conditions of this permit.}

**B.10. Determination of Process Variables.**

- (a) **Required Equipment.** The owner or operator of an emissions unit for which compliance tests are required shall install, operate, and maintain equipment or instruments necessary to determine process variables, such as process weight input or heat input, when such data are needed in conjunction with emissions data to determine the compliance of the emissions unit with applicable emission limiting standards.
- (b) **Accuracy of Equipment.** Equipment or instruments used to directly or indirectly determine process variables, including devices such as belt scales, weight hoppers, flow meters, and tank scales, shall be calibrated and adjusted to indicate the true value of the parameter being measured with sufficient accuracy to allow the applicable process variable to be determined within 10% of its true value.

[Rule 62-297.310(5), F.A.C.]

**B.11. Visible emissions.** The test method for visible emissions shall be EPA Method 9, adopted and incorporated by reference in Rule 62-204.800, F.A.C., and referenced in Chapter 62-297, F.A.C.

[Rules 62-204.800, 62-296.320(4)(b)4.a. and 62-297.401, F.A.C.]

**B.12. Sulfur Content.** The fuel sulfur content, percent by weight, for liquid fuels shall be evaluated using either ASTM D2622-92, ASTM D4294-90, both ASTM D4057-88 and ASTM D129-91, or the latest edition.

[Rules 62-213.440 and 62-297.440, F.A.C.]

**B.13. Operating Rate During Testing.** Testing of emissions shall be conducted with the emissions unit operating at permitted capacity, which is defined as 90 to 100 percent of the maximum operation rate allowed by the permit. If it is impracticable to test at permitted capacity, an emissions unit may be tested at less than the minimum permitted capacity (i.e., at less than 90 percent of the maximum operation rate allowed by the permit); in this case, subsequent emissions unit operation is limited to 110 percent of the test load until a new test is conducted, provided however, operations do not exceed 100 percent of the maximum operation rate allowed by the permit. Once the emissions unit is so limited, operation at higher capacities is allowed for no more than 15 consecutive days for the purpose of additional compliance testing to regain the authority to operate at the permitted capacity.

[Rules 62-297.310(2) & (2)b., F.A.C.]

**B.14. Applicable Test Procedures.**

(a) **Required Sampling Time.**

- 2. **Opacity Compliance Tests.** When EPA Method 9 is specified as the applicable opacity test method, the required minimum period of observation for a compliance test shall be sixty (60) minutes for emissions units which emit or have the potential to emit 100 tons per year or more of particulate matter, and thirty (30) minutes for emissions units which have potential emissions less than 100 tons per year of particulate matter and are not subject to a multiple-valued opacity standard. The opacity test observation period shall include the period during which the highest opacity emissions can reasonably be expected to occur. Exceptions to these requirements are as follows:

- c. The minimum observation period for opacity tests conducted by employees or agents of the Department to verify the day-to-day continuing compliance of a unit or activity with an applicable opacity standard shall be twelve minutes.

[Rule 62-297.310(4)(a)2., F.A.C.]

**B.15. Frequency of Compliance Tests.** The following provisions apply only to those emissions units that are subject to an emissions limiting standard for which compliance testing is required.

(a) General Compliance Testing.

- 3. The owner or operator of an emissions unit that is subject to any emission limiting standard shall conduct a compliance test that demonstrates compliance with the applicable emission limiting standard prior to obtaining a renewed operation permit. Emissions units that are required to conduct an annual compliance test may submit the most recent annual compliance test to satisfy the requirements of this provision. In renewing an air operation permit pursuant to Rule 62-210.300(2)(a)3.b., c., or d., F.A.C., the Department shall not require submission of emission compliance test results for any emissions unit that, during the year prior to renewal:
  - a. Did not operate; or
  - b. In the case of a fuel burning emissions unit, burned liquid fuel for a total of no more than 400 hours.
- 4. During each federal fiscal year (October 1 - September 30), unless otherwise specified by rule, order, or permit, the owner or operator of each emissions unit shall have a formal compliance test conducted for:
  - a. Visible emissions, if there is an applicable standard;
- 8. Any combustion turbine that does not operate for more than 400 hours per year shall conduct a visible emissions compliance test once per each five-year period, coinciding with the term of its air operation permit.
- 9. The owner or operator shall notify the Department, at least 15 days prior to the date on which each formal compliance test is to begin, of the date, time, and place of each such test, and the test contact person who will be responsible for coordinating and having such test conducted for the owner or operator.

(b) Special Compliance Tests. When the Department, after investigation, has good reason (such as complaints, increased visible emissions or questionable maintenance of control equipment) to believe that any applicable emission standard contained in a Department rule or in a permit issued pursuant to those rules is being violated, it may require the owner or operator of the emissions unit to conduct compliance tests which identify the nature and quantity of pollutant emissions from the emissions unit and to provide a report on the results of said tests to the Department.

[Rule 62-297.310(7), F.A.C.; and, AO65-242827, Specific Condition #5 (frequency); and, SIP Approved.]

**Recordkeeping and Reporting Requirements**

**B.16. Malfunction Reporting.** In the case of excess emissions resulting from malfunctions, each owner or operator shall notify the Department in accordance with Rule 62-4.130, F.A.C. A full written report on the malfunctions shall be submitted in a quarterly report, if requested by the Department.

[Rule 62-210.700(6), F.A.C.]

**B.17. Test Reports.**

- (a) The owner or operator of an emissions unit for which a compliance test is required shall file a report with the Department on the results of each such test.
- (b) The required test report shall be filed with the Department as soon as practical but no later than 45 days after the last sampling run of each test is completed.

[Rule 62-297.310(8), F.A.C.]

**Miscellaneous Conditions**

**B.18. Periodic Monitoring Requirements.** The owner or operator shall conduct testing for visible emissions, using EPA Method 9, while the combustion turbine is operating at 90-100 percent of its capacity, according to the following schedule:

Upon exceeding 400 hours of operation on fuel oil, and every 150 hours of operation on fuel oil thereafter, in any given federal fiscal year (October 1 through September 30), the owner or operator shall conduct a visible emissions test on each of these combustion turbines while firing fuel oil. These tests shall be performed within 20 days of exceeding such operating hours.

Regardless of the number of hours of operation on fuel oil, at least one compliance test shall be conducted on each combustion turbine every five years, coinciding with the term of this operation permit. [Rules 62-213.440(4) and 62-297.310(7), F.A.C.]

**B.19. Facility-wide NO<sub>x</sub> Emissions Cap.** In addition to the above requirements, emissions unit -003 is also subject to the facility-wide NO<sub>x</sub> emissions cap of 6,666 tons per year. See Facility-wide Conditions 15. & 16.

**Subsection C. This section addresses the following emissions unit(s).**

**E.U. ID**

<b><u>No.</u></b>	<b><u>Brief Description</u></b>
-004	Combined Cycle Combustion Turbine Generator Unit No. 1 (CC-1)
-005	Combined Cycle Combustion Turbine Generator Unit No. 2.(CC-2)
-006	Salt Water Cooling Tower

Emission units –004 and –005 (collectively designated as Gulf Smith Unit 3) consist of a General Electric Model No. PG7241 (FA), combined-cycle combustion turbine with electrical generator set. The unit will achieve a nominal 566 megawatts, at annual average site conditions, with duct burners. These units are capable of a maximum of approximately 574 megawatts in combined cycle operation with power augmentation and evaporative cooling at 95 degrees F. The maximum heat input of the combustion turbines is a nominal 1,927 MMBtu/hr (LHV at 65 degrees F) each. The maximum heat input of the duct burners is a nominal 303 MMBtu/hr (LHV at 65 degrees F) each. The plant includes two 121 foot stacks; a small heater for the gas pipeline; and a 10-cell, mechanical draft salt water cooling tower. The cooling tower is not subject to a NESHAP because chromium-based chemical treatment is not used. Simple cycle operation is not a permitted activity. Support facilities for Unit 3 include water treatment and storage facilities. Emissions from Units –004 and -005 are controlled by Dry Low NO<sub>x</sub> (DLN) combustors firing exclusively natural gas. Inherently clean fuels and good combustion practices are employed to control all pollutants.

{Permitting notes: These units began commercial operation during January of 2002. Units -004 and -005 are regulated under Acid Rain, Phase II. In addition, these CT's are regulated under: NSPS – 40 CFR 60, Subpart GG (Standards of Performance for Stationary Gas Turbines), which is adopted and incorporated by reference in Rule 62-204.800(7)(b), F.A.C.; a BACT determination (PSD-FL-269), dated July 28, 2000; Air Construction Permit No. 0050014-002-AC, issued July 28, 2000; and, Air Construction Permit revision project No. 0050014-003-AC. The Subpart GG requirement to correct test data to ISO conditions applies. However, such correction is not required to demonstrate compliance with non-NSPS permit standard(s). Stack heights = 121 feet, exit diameters = 16.8 feet, exit temperatures = 186 °F, actual volumetric flow rates = 981,334 acfm.}

**General**

**C.1. Definitions.** For the purposes of Rule 62-204.800(7), F.A.C., the definitions contained in the various provisions of 40 CFR 60 shall apply except that the term “Administrator” when used in 40 CFR 60, shall mean the Secretary or the Secretary’s designee.

[40 CFR 60.2; Rule 62-204.800(7)(a), F.A.C.]

**C.2. Circumvention.**

(a) No owner or operator subject to the provisions of 40 CFR 60 shall build, erect, install, or use any article, machine, equipment or process, the use of which conceals an emission which would otherwise constitute a violation of an applicable standard. Such concealment includes, but is not limited to, the use of gaseous diluents to achieve compliance with an opacity standard or with a standard which is based on the concentration of a pollutant in the gases discharged to the atmosphere.

(b) The permittee shall not circumvent the air pollution control equipment or allow the emission of air pollutants without this equipment operating properly.  
[40 CFR 60.12; and, Rule 62-210.650, F.A.C.]

**C.3. Modifications.** Except as provided under 40 CFR 60.14(e) and (f), any physical or operational change to an existing facility which results in an increase in the emission rate to the atmosphere of any pollutant to which a standard applies shall be considered a modification within the meaning of section 111 of the Act. Upon modification, an existing facility shall become an affected facility for each pollutant to which a standard applies and for which there is an increase in the emission rate to the atmosphere.  
[40 CFR 60.14(a)]

**C.4. Operating Procedures.** Operating procedures shall include good operating practices and proper training of all operators and supervisors. The good operating practices shall meet the guidelines and procedures as established by the equipment manufacturers. All operators (including supervisors) of air pollution control devices shall be properly trained in plant specific equipment.  
[Rule 62-4.070(3), F.A.C.; and, 0050014-002-AC]

{Permitting Note: In addition to the requirements listed below, these emissions units are also subject to the standards and requirements contained in the Acid Rain Part of this permit (see Section IV).}

**Essential Potential to Emit (PTE) Parameters**

**C.5. Permitted Capacity.**

(a) Combustion Turbine Capacity. The maximum heat input rate, based on the lower heating value (LHV) of the fuel at ambient conditions of 65°F temperature, 100% load, and 14.7 psi pressure shall not exceed 1,927 million Btu per hour (MMBtu/hr) for each combustion turbine when firing natural gas. The maximum heat input rates will vary depending upon ambient conditions and the combustion turbine characteristics. Manufacturer's curves corrected for site conditions or equations for correction to other ambient conditions shall be provided to the Department of Environmental Protection (DEP) within 45 days of completing annual compliance testing.

(b) Heat Recovery Steam Generator equipped with Duct Burner. The maximum heat input rate of each natural gas fired duct burner shall not exceed 303 MMBtu/hour (LHV).

[Rules 62-4.160(2) & 62-210.200(PTE), F.A.C.; and, 0050014-002-AC & 0050014-003-AC].

{Permitting note: The heat input limitations have been placed in the permit to identify the capacity of each unit for the purposes of confirming that emissions testing is conducted within 90 to 100 percent of the unit's rated capacity (or to limit future operation to 110 percent of the test load), to establish appropriate emission limits and to aid in determining future rule applicability.}

**C.6. Emissions Unit Operating Rate Limitation After Testing.** See Specific Condition C.40.  
[Rule 62-297.310(2), F.A.C.]

**C.7. Methods of Operation – Allowable Fuels.** Only pipeline natural gas shall be fired in these units.  
[Applicant Request; Rule 62-210.200, F.A.C. (Definitions-Potential Emissions); and, 0050014-002-AC.]

{Permitting Note: For the purposes of Subsection C. of this permit, “pipeline natural gas” means natural gas with a sulfur content of less than 2.0 grains per dry standard cubic foot that is provided by the natural gas pipeline transmission company. (See Specific Condition C.13.)}

**C.8. Hours of Operation.** Maximum allowable hours of operation for the 566 MW Combined Cycle Plant are 8,760 hours per year while firing natural gas. Operation in steam power augmentation mode is limited to 1,000 hours per year.

[Applicant Request; Rule 62-210.200, F.A.C. (Definitions-Potential Emissions); and, 0050014-002-AC.]

**Emission Limitations and Standards**

{Permitting Note: The attached Table 1-1, Summary of Air Pollutant Standards and Terms, summarizes information for convenience purposes only. This table does not supersede any of the terms or conditions of this permit.}

{Permitting note: The averaging times for Specific Conditions C.9. – C.14. are based on the specified averaging time of the applicable test method.}

**C.9. Emissions Summary.**

(a) The following table is a summary of the BACT determination and is followed by the applicable specific conditions. Values are corrected to 15% O<sub>2</sub> on a dry basis. These limits, or their equivalent in terms of lb/hr or NSPS units, as well as the applicable averaging times, are followed by the applicable specific conditions.

Emission Unit	NO <sub>x</sub> <sup>(1)</sup>	CO BACT	SO <sub>2</sub> /SAM BACT	VOC BACT	PM/Visibility (% Opacity)	Technology and Comments
C.T.'s: With Duct Burners	82.9 lb/hr	16 ppm @ 15% O <sub>2</sub>	2 gr/100 scf natural gas <sup>(3)</sup>	4 ppm @ 15% O <sub>2</sub>	10 - gas	Dry Low NO <sub>x</sub> Combustors Natural Gas, Good Combustion
Steam power Augmen- tation	113.3 lb/hr	23 ppm @ 15% O <sub>2</sub>	2 gr/100 scf natural gas <sup>(3)</sup>	6 ppm @ 15% O <sub>2</sub>	10 - gas	Unit limited to 1000 hours per year of operation
Cooling Tower					18.2 lb/hr <sup>(2)</sup>	Drift Eliminators

(1) NO<sub>x</sub> limits not determined by BACT.

(2) Listed for informational purposes only.

(3) See Fuel Monitoring Schedule in Specific Condition C.21.

(b) In addition to the above conditions that were established by permit 0050014-002-AC, emissions units –004 and –005 are also independently subject to all of the emission standards and requirements of 40 CFR 60, Subpart GG, Standards of Performance for Stationary Gas Turbines. Particularly the NO<sub>x</sub> emission standard contained in 40 CFR 60.332(a)(1), which must be corrected to ISO conditions (see Specific Condition C.32.).



[Rules 62-212.400, 62-204.800(7)(b) (Subpart GG and Da), 62-210.200 (Definitions-Potential Emissions) F.A.C.; and, 40 CFR 60 Subpart GG.]

**C.10. Nitrogen Oxides (NO<sub>x</sub>) Emissions:**

- (a) Emissions of NO<sub>x</sub> in the stack exhaust gas, with the combustion turbine operating and the duct burner on shall not exceed 82.9 lb/hr (30 day rolling average). Emissions of NO<sub>x</sub> in the stack exhaust gas, with the combustion turbine operating with steam augmentation and the duct burner on shall not exceed 113.3 lb/hr (30 day rolling average). Compliance will be determined by the continuous emission monitor system (CEMS) and prorated daily as necessary based upon hours of operation per operating mode. Emissions of NO<sub>x</sub> in the stack exhaust gas with the combustion turbine operating with the duct burner on shall not exceed 82.9 lb/hr and 113.3 lb/hr with steam augmentation to be demonstrated by initial stack test.
- (b) Emissions of NO<sub>x</sub> from the duct burner shall not exceed 0.1 lb/MMBtu, which is more stringent than the NSPS (see Specific Condition C.49.).
- (c) When NO<sub>x</sub> monitoring data is not available, substitution for missing CEMS data shall be handled as required by Title IV (40 CFR 75) to calculate any specified average time. Heat input for these periods shall be determined by fuel sampling and measurement.
- (d) **Facility-wide NO<sub>x</sub> emissions cap:** In addition to individual (point source) emission limits and NO<sub>x</sub> averaging plan requirements, the Lansing Smith facility shall be required to comply with a facility-wide NO<sub>x</sub> emissions cap of 6,666 TPY. CEMS shall be the method of compliance. See Specific Condition C.46. & Facility-wide Condition 16. for reporting and record-keeping requirements.

[Rules 62-4.070 and 62-204.800(7), F.A.C. to avoid PSD Review; and, 0050014-002-AC.]

**C.11. Carbon Monoxide (CO) Emissions:** Emissions of CO in the stack exhaust gas with the combustion turbine operating and duct burner on shall exceed neither 16 ppm nor 23 ppm (@ 15%O<sub>2</sub>) with steam augmentation to be demonstrated annually by stack test using EPA Method 10. {For informational purposes, this equates to 78.7 lb/hr and 116.6 lb/hr respectively}

[Rule 62-212.400, F.A.C.; and, 0050014-002-AC.]

**C.12. Volatile Organic Compounds (VOC) Emissions:** Emissions of VOC in the stack exhaust gas with the combustion turbine operating and duct burner on shall exceed neither 4 ppm nor 6 ppm (@ 15%O<sub>2</sub>) with steam augmentation to be demonstrated by initial stack test using EPA Method 18, 25 or 25A. {For informational purposes, this equates to 10.2 lb/hr and 16.8 lb/hr respectively}

[Rule 62-212.400, F.A.C.; and, 0050014-002-AC.]

**C.13. Sulfur Dioxide (SO<sub>2</sub>) emissions:** SO<sub>2</sub> emissions shall be limited by firing natural gas with a total sulfur content less than 2 grains per 100 standard cubic foot as determined and provided by the natural gas pipeline transmission company. Compliance with this requirement in conjunction with implementation of the Custom Fuel Monitoring Schedule in Specific Condition C.21. will demonstrate compliance with the applicable NSPS SO<sub>2</sub> emissions limitations from the duct burner or the combustion turbine. {For informational purposes, annual SO<sub>2</sub> emissions will be up to 105 TPY}

[40CFR60 Subpart GG; Rules 62-4.070, 62-212.400, & 62-204.800(7), F.A.C.; and, 0050014-003-AC.]

**C.14. Visible emissions (VE):** VE emissions shall serve as a surrogate for PM/PM<sub>10</sub> emissions from the combustion turbine operating with or without steam augmentation and/or the duct burner and shall

not exceed 10 percent opacity from the stack in use. PM/PM<sub>10</sub> emissions (for information only) are up to 43 lb/hr.

[Rules 62-4.070, 62-212.400, & 62-204.800(7), F.A.C.; and, 0050014-002-AC.]

### **Excess Emissions**

{Permitting note: The Excess Emissions Rule at Rule 62-210.700, F.A.C., cannot vary any requirement of an NSPS or NESHAP provision.}

**C.15.** Excess emissions which are caused entirely or in part by poor maintenance, poor operation, or any other equipment or process failure which may reasonably be prevented during startup, shutdown or malfunction shall be prohibited. Such preventable emissions shall be included in the calculation of the 30-day rolling averages compiled by the continuous NO<sub>x</sub> emissions monitor.

[Rule 62-210.700(4), F.A.C.; and, 0050014-002-AC.]

### **Emissions Controls**

**C.16.** Dry Low NO<sub>x</sub> (DLN) combustors shall be maintained on the stationary combustion turbine and Low NO<sub>x</sub> burners shall be maintained in the duct burner arrangement to comply with the NO<sub>x</sub> emissions limits listed in Specific Conditions **C.9.** & **C.10.**

[Rules 62-4.070 and 62-204.800(7), F.A.C. to avoid PSD Review; and, 0050014-002-AC.]

**C.17.** DLN systems shall each be maintained as per manufacturer's recommendation.

[Rule 62-4.070 and 62-204.800(7), F.A.C. to avoid PSD Review; and, 0050014-002-AC.]

**C.18.** Drift eliminators shall be maintained on the cooling tower to reduce PM/PM<sub>10</sub> emissions.

[0050014-002-AC.]

### **Monitoring of Operations**

**C.19.** At all times, including periods of startup, shutdown and malfunction, owners and operators shall, to the extent practicable, maintain and operate any affected facility including associated pollution control equipment in a manner consistent with good air pollution control practice for minimizing emissions. Determination of whether acceptable operating and maintenance procedures are being used will be based on information available to the Administrator, which may include, but is not limited to, monitoring results, opacity observations, review of operating and maintenance procedures, and inspection of the source.

[40 CFR 60.11(d)]

**C.20.** The owner or operator of any stationary gas turbine subject to the provisions of 40 CFR 60, Subpart GG shall monitor sulfur content and nitrogen content of the fuel being fired in the turbine. The frequency of determination of these values shall be as follows:

(a) If the turbine is supplied its fuel from a bulk storage tank, the values shall be determined on each occasion that fuel is transferred to the storage tank from any other source.

- (b) If the turbine is supplied its fuel without intermediate bulk storage, the values shall be determined and recorded daily. Owners, operators or fuel vendors may develop custom schedules for determination of the values based on the design and operation of the affected facility and the characteristics of the fuel supply. These custom schedules shall be substantiated with data and must be approved by the Administrator before they can be used to comply with 40 CFR 60.334(b).

[40 CFR 60.334(b)(1) & (2)]

[Permitting Note: Compliance with Specific Condition C.22. is being met through the use of the Natural Gas Monitoring Schedule contained in Specific Condition C.23.]

**C.21. Natural Gas Monitoring Schedule:** A custom fuel monitoring schedule pursuant to 40 CFR 75 Appendix D for natural gas may be used in lieu of the daily sampling requirements of 40 CFR 60.334 (b)(2) provided the following requirements are met (monitoring of nitrogen content is not required):

- (a) The permittee shall apply for an Acid Rain permit within the deadlines specified in 40 CFR 72.30.  
(b) The permittee shall submit a monitoring plan, certified by signature of the Designated Representative, that commits to using a primary fuel of pipeline supplied natural gas pursuant to 40 CFR 75.11(d)(2).  
(c) Each unit shall be monitored for SO<sub>2</sub> emissions using methods consistent with the requirements of 40 CFR 75 and certified by the USEPA.  
(d) This custom fuel monitoring schedule will only be valid when pipeline natural gas is used as a primary fuel. If the primary fuel for these units is changed to a higher sulfur fuel, SO<sub>2</sub> emissions must be accounted for as required pursuant to 40 CFR 75.11(d).

Gulf shall notify DEP of any change in natural gas supply for reexamination of this monitoring schedule. A substantial change in natural gas quality (i.e., sulfur content variation of greater than 1 grain per 100 cubic foot of natural gas) shall be considered as a change in the natural gas supply. Sulfur content of the natural gas will be monitored weekly by the natural gas supplier during the interim period when this monitoring schedule is being reexamined.

[0050014-002-AC.]

**C.22. Determination of Process Variables.**

- (a) Required Equipment. The owner or operator of an emissions unit for which compliance tests are required shall install, operate, and maintain equipment or instruments necessary to determine process variables, such as process weight input or heat input, when such data are needed in conjunction with emissions data to determine the compliance of the emissions unit with applicable emission limiting standards.  
(b) Accuracy of Equipment. Equipment or instruments used to directly or indirectly determine process variables, including devices such as belt scales, weight hoppers, flow meters, and tank scales, shall be calibrated and adjusted to indicate the true value of the parameter being measured with sufficient accuracy to allow the applicable process variable to be determined within 10% of its true value.

[Rule 62-297.310(5), F.A.C.]

### **Continuous Monitoring Requirements**

**C.23. Continuous Monitoring System:** The permittee shall maintain and operate a continuous emission monitor in the stack to measure and record the nitrogen oxides emissions from these units. Periods when

NO<sub>x</sub> emissions are above the standards, listed in Specific Conditions C.9. & C.10., shall be reported to the DEP Northwest District Office within one working day (verbally) followed up by a written explanation postmarked not later than three (3) working days (alternatively by facsimile within one working day).

[Rules 62-204.800, 62-210.700, 62-4.130, 62-4.160(8), F.A.C.; 40 CFR 60.7 (1998 version); and, 0050014-002-AC.]

**C.24. NO<sub>x</sub> CEMS Requirements for continuous compliance with the NO<sub>x</sub> emission limits:** Continuous compliance with the NO<sub>x</sub> emission limits shall be demonstrated with the CEM system based on the applicable averaging time of 30 day rolling average. Based on CEMS data, a separate compliance determination is conducted at the end of each operating day and a new average emission rate is calculated from the arithmetic average of all valid hourly emission rates from the previous operating day. A valid hourly emission rate shall be calculated for each hour in which at least two NO<sub>x</sub> concentrations are obtained at least 15 minutes apart. A valid operating day shall consist of at least one valid operating hour. These excess emissions periods shall be reported as required in Specific Condition C.47. Continuous compliance with the 0.1 lb/MMBtu limit for the duct burners will be demonstrated through continuous compliance with the combined duct burner and CT emission limits (see Specific Condition C.49.).

[Rule 62-4.070 and 62-204.800(7), F.A.C. to avoid PSD Review; and 0050014-002-AC.]

**C.25.** For the purposes of 40 CFR 60.13, all continuous monitoring systems required under applicable subparts shall be subject to the provisions of 40 CFR 60.13 upon promulgation of performance specifications for continuous monitoring systems under Appendix B of 40 CFR 60 and, if the continuous monitoring system is used to demonstrate compliance with emission limits on a continuous basis, Appendix F of 40 CFR 60, unless otherwise specified in an applicable subpart or by the Administrator. Appendix F is applicable December 4, 1987.

[40 CFR 60.13(a)]

{Permitting Note: The requirements for the NO<sub>x</sub> CEMS which are installed and maintained in accordance with 40 CFR 75 are at least as stringent as the requirements of 40 CFR 60, and are an acceptable alternative to this condition.}

**C.26.** All continuous monitoring systems (CMS) or monitoring devices shall be installed such that representative measurements of emissions or process parameters from the affected facility are obtained. Additional procedures for location of continuous monitoring systems contained in the applicable Performance Specifications of Appendix B of 40 CFR 60 shall be used.

[40 CFR 60.13(f)]

#### **Required Tests, Test Methods and Procedures**

{Permitting Note: The attached Table 2-1, Summary of Compliance Requirements, summarizes information for convenience purposes only. This table does not supersede any of the terms or conditions of this permit.}

**C.27. Annual Tests Required.** Annual emissions performance tests for CO and visible emissions from each combustion turbine shall be conducted when firing natural gas. Annual compliance with the applicable NO<sub>x</sub> emissions standards shall also be demonstrated with valid data collected by the required CEM systems during the required annual RATA at permitted capacity. Continuous compliance shall be demonstrated as specified in Specific Condition **C.24.**

Tests required on an annual basis shall be conducted at least once during each federal fiscal year (October 1<sup>st</sup> to September 30<sup>th</sup>).

[Rule 62-297.310(7)(a)4, F.A.C.; and, 0050014-002-AC.]

**C.28. Test Notification:** The DEP's Northwest District office shall be notified, in writing, at least 15 days prior to conducting annual compliance test(s).

**C.29. Compliance with the SO<sub>2</sub> and PM/PM<sub>10</sub> emission limits:** Notwithstanding the requirements of Rule 62-297.340, F.A.C., the use of pipeline natural gas, is the method for determining compliance for SO<sub>2</sub> and PM<sub>10</sub>. For the purposes of demonstrating compliance with the 40 CFR 60.333 SO<sub>2</sub> standard, ASTM methods D4084-82 or D3246-81 (or equivalent) for sulfur content of gaseous fuel shall be utilized in accordance with the EPA-approved custom fuel monitoring schedule, or natural gas supplier data may be submitted, or the natural gas sulfur content referenced in 40 CFR 75 Appendix D may be utilized. However, the applicant is responsible for ensuring that the procedures in 40 CFR 60.335 or 40 CFR 75 are used when determination of fuel sulfur content is made. Analysis may be performed by the owner or operator, a service contractor retained by the owner or operator, the fuel vendor, or any other qualified agency pursuant to 40 CFR 60.335(e) (1998 version).

[BACT; and, 0050014-002-AC.]

**C.30. Compliance with CO emission limit:** An initial test for CO shall be conducted concurrently with the initial NO<sub>x</sub> test, as required. The initial NO<sub>x</sub> and CO test results shall be the average of three valid one-hour runs. Annual compliance testing for CO may be conducted at less than capacity when compliance testing is conducted concurrent with the annual RATA testing for the NO<sub>x</sub> CEMS required pursuant to 40 CFR 75. As an alternative to annual testing in a given year, periodic tuning data may be provided to demonstrate compliance in the year the tuning is conducted.

[0050014-002-AC.]

**C.31. Compliance with the VOC emission limit:** An initial test was required to demonstrate compliance with the VOC emission limit. Thereafter, the CO emission limit and periodic tuning data will be employed as surrogate and no annual testing is required.

[0050014-002-AC.]

**C.32. Compliance with the NSPS NO<sub>x</sub> emission limit:** If requested, the test method for emissions of nitrogen oxides shall be EPA Reference Method 20. During performance tests, to determine compliance with the NSPS NO<sub>x</sub> standard, measured NO<sub>x</sub> emissions at 15 percent oxygen will be adjusted to ISO ambient atmospheric conditions by the following correction factor:

$$NO_x = (NO_{xO}) (Pr/Po)^{0.5} e^{19(Ho-0.00633)} (288^{\circ}K/Ta)^{1.53}$$

where:

$NO_x$  = emission rate of  $NO_x$  at 15 percent  $O_2$  and ISO standard ambient conditions, volume percent.

$No_{xO}$  = observed  $NO_x$  concentration, ppm by volume.

$P_r$  = reference combustor inlet absolute pressure at 101.3 kilopascals ambient pressure, mm Hg.

$P_o$  = observed combustor inlet absolute pressure at test, mm Hg.

$H_o$  = observed humidity of ambient air, g  $H_2O$ /g air.

$E$  = transcendental constant, 2.718.

$T_a$  = ambient temperature, °K.

[40 CFR 60.335(c)(1); Rule 62-297.401, F.A.C.]

**C.33. Performance Test Methods:** When required, compliance tests shall be performed in accordance with the following reference methods as described in 40 CFR 60, Appendix A, and adopted by reference in Chapter 62-204.800, F.A.C.

(a) **EPA Method 9**, "Visual Determination of the Opacity of Emissions from Stationary Sources".

(b) **EPA Method 10**, "Determination of Carbon Monoxide Emissions from Stationary Sources". (See Specific Condition **C.30**.)

(c) **EPA Method 20**, "Determination of Oxides of Nitrogen Oxide, Sulfur Dioxide and Diluent Emissions from Stationary Gas Turbines" or **EPA Method 7E**, "Determination of Nitrogen Oxide Emissions from Stationary Sources".

Annual compliance with applicable  $NO_x$  emissions standards shall also be demonstrated with valid data collected by the required CEM systems during required annual RATA at permitted capacity.

Continuous compliance shall be demonstrated as specified in Specific Condition **C.24**.

(d) **EPA Methods 18, 25 and/or 25A**, "Determination of Volatile Organic Concentrations."

No other test methods may be used for compliance testing unless prior DEP approval is received, in writing, from the DEP Emissions Monitoring Section Administrator in accordance with an alternate sampling procedure pursuant to 62-297.620, F.A.C.

[Rule 62-297.401, F.A.C.; and, 0050014-002-AC.]

**C.34. Nitrogen Oxides.** To compute the emissions of nitrogen oxides, the owner or operator shall use analytical methods and procedures that are accurate to within 5 percent and are approved by the Department to determine the nitrogen content of the fuel being fired.

[40 CFR 60.335(a)]

**C.35.** Compliance with standards in 40 CFR 60, other than opacity standards, shall be determined by performance tests established by 40 CFR 60.8, unless otherwise specified in the applicable standard.

[40 CFR 60.11(a)]

**C.36.** Performance tests shall be conducted under such conditions as the Administrator shall specify to the plant operator based on representative performance of the affected facility. The owner or operator shall make available to the Administrator such records as may be necessary to determine the conditions of the performance tests. Operations during periods of startup, shutdown, and malfunction shall not constitute representative conditions for the purpose of a performance test nor shall emissions in excess of the level of the applicable emission limit during periods of startup, shutdown, and malfunction be

considered a violation of the applicable emission limit unless otherwise specified in the applicable standard.

[40 CFR 60.8(c)]

**C.37.** The owner or operator shall provide, or cause to be provided, stack sampling and performance testing facilities as follows:

- (a) Sampling ports adequate for test methods applicable to such facilities.
- (b) Safe sampling platform(s).
- (c) Safe access to sampling platform(s).
- (d) Utilities for sampling and testing equipment.

[40 CFR 60.8(e)(1), (2), (3) & (4)]

**C.38. Required Stack Sampling Facilities.** When a mass emissions stack test is required, the permittee shall comply with the requirements contained in Appendix SS-1, Stack Sampling Facilities, **attached to this permit**. Permanent stack sampling facilities shall have been installed and shall be maintained on the stacks for these units in accordance with Rule 62-297.310(6), F.A.C.

[Rules 62-4.070, 62-204.800 & 62-297.310(6), F.A.C.; and, 0050014-002-AC.]

**C.39. Required Number of Test Runs.** For mass emission limitations, a compliance test shall consist of three complete and separate determinations of the total air pollutant emission rate through the test section of the stack or duct and three complete and separate determinations of any applicable process variables corresponding to the three distinct time periods during which the stack emission rate was measured provided, however, that three complete and separate determinations shall not be required if the process variables are not subject to variation during a compliance test, or if three determinations are not necessary in order to calculate the unit's emission rate. The three required test runs shall be completed within one consecutive five-day period. In the event that a sample is lost or one of the three runs must be discontinued because of circumstances beyond the control of the owner or operator, and a valid third run cannot be obtained within the five day period allowed for the test, the Secretary or his or her designee may accept the results of the two complete runs as proof of compliance, provided that the arithmetic mean of the results of the two complete runs is at least 20 percent below the allowable emission limiting standards.

[Rule 62-297.310(1), F.A.C.]

**C.40. Operating Rate During Testing/Testing procedures.** Testing of emissions shall be conducted with the combustion turbine operating at permitted capacity. Permitted capacity is defined as 90-100 percent of the maximum heat input rate allowed by the permit, corrected for the average compressor inlet temperature during the test (with 100 percent represented by a curve depicting heat input vs. compressor inlet temperature). If it is impracticable to test at permitted capacity, the source may be tested at less than permitted capacity. In this case, subsequent operation is limited by adjusting the entire heat input vs. compressor inlet temperature curve downward by an increment equal to the difference between the maximum permitted heat input (corrected for compressor inlet temperature) and 110 percent of the value reached during the test until a new test is conducted. Once the unit is so limited, operation at higher capacities is allowed for no more than 15 consecutive days for the purposes of additional compliance testing to regain the permitted capacity. The turbine manufacturer's capacity vs. temperature (ambient) curve shall be included with the compliance test results. Test procedures shall meet all applicable

requirements.(i.e., testing time frequency, minimum compliance duration, etc.) of Chapter 62-204 and 62-297 F.A.C.

[Rules 62-297.310(2) & (2)(a), F.A.C.; and, 0970014-006-AC]

**C.41. Calculation of Emission Rate.** The indicated emission rate or concentration shall be the arithmetic average of the emission rate or concentration determined by each of the separate test runs unless otherwise specified in a particular test method or applicable rule.

[Rule 62-297.310(3), F.A.C.]

**C.42. Applicable Test Procedures.**

(a) Required Sampling Time.

1. Unless otherwise specified in the applicable rule, the required sampling time for each test run shall be no less than one hour and no greater than four hours, and the sampling time at each sampling point shall be of equal intervals of at least two minutes.
2. **Opacity Compliance Tests.** When EPA Method 9 is specified as the applicable opacity test method, the required minimum period of observation for a compliance test shall be sixty (60) minutes for emissions units which emit or have the potential to emit 100 tons per year or more of particulate matter, and thirty (30) minutes for emissions units which have potential emissions less than 100 tons per year of particulate matter and are not subject to a multiple-valued opacity standard. The opacity test observation period shall include the period during which the highest opacity emissions can reasonably be expected to occur. Exceptions to these requirements are as follows:
  - c. The minimum observation period for opacity tests conducted by employees or agents of the Department to verify the day-to-day continuing compliance of a unit or activity with an applicable opacity standard shall be twelve minutes.

(b) Minimum Sample Volume. Unless otherwise specified in the applicable rule, the minimum sample volume per run shall be 25 dry standard cubic feet.

(d) Calibration of Sampling Equipment. Calibration of the sampling train equipment shall be conducted in accordance with the schedule shown in Table 297.310-1.

[Rule 62-297.310(4), F.A.C.]



**TABLE 297.310-1  
CALIBRATION SCHEDULE**

<u>ITEM</u>	<u>MINIMUM CALIBRATION FREQUENCY</u>	<u>REFERENCE INSTRUMENT</u>	<u>TOLERANCE</u>
Liquid in glass thermometer	Annually	ASTM Hg in glass ref. thermometer or equivalent, or thermometric points	+/-2%
Bimetallic thermometer	Quarterly	Calib. liq. in glass thermometer	5 degrees F
Thermocouple	Annually	ASTM Hg in glass ref. thermometer, NBS calibrated reference and potentiometer	5 degrees F
Barometer	Monthly	Hg barometer or NOAA station	+/-1% scale
Pitot Tube	When required or when damaged	By construction or measurements in wind tunnel D greater than 16" and standard pitot tube	See EPA Method 2, Fig. 2-2 & 2-3
Probe Nozzles	Before each test or when nicked, dented, or corroded	Micrometer	+/-0.001" mean of at least three readings Max. deviation between readings .004" 2%
Dry Gas Meter and Orifice Meter	1. Full Scale: When received, When 5% change observed, Annually 2. One Point: Semiannually 3. Check after each test series	Spirometer or calibrated wet test or dry gas test meter	
		Comparison check	5%

**C.43. Frequency of Compliance Tests.** The following provisions apply only to those emissions units that are subject to an emissions limiting standard for which compliance testing is required.

(a) General Compliance Testing.

3. The owner or operator of an emissions unit that is subject to any emission limiting standard shall conduct a compliance test that demonstrates compliance with the applicable emission limiting standard prior to obtaining a renewed operation permit. Emissions units that are required to conduct an annual compliance test may submit the most recent annual compliance test to satisfy the requirements of this provision. In renewing an air operation permit pursuant to Rule 62-210.300(2)(a)3.b., c., or d., F.A.C., the Department shall not require submission of emission compliance test results for any emissions unit that, during the year prior to renewal:
  - a. Did not operate; or,
  - b. In the case of a fuel burning emissions unit, burned liquid fuel for a total of no more than 400 hours.
4. During each federal fiscal year (October 1 – September 30), unless otherwise specified by rule, order, or permit, the owner or operator of each emissions unit shall have a formal compliance test conducted for:
  - a. Visible emissions, if there is an applicable standard;
  - b. Each of the following pollutants, if there is an applicable standard, and if the emissions unit emits or has the potential to emit: 5 tons per year or more of lead or lead compounds measured as elemental lead; 30 tons per year or more of acrylonitrile; or 100 tons per year or more of any other regulated air pollutant; and,
  - c. Each NESHAP pollutant, if there is an applicable emission standard.
8. Any combustion turbine that does not operate for more than 400 hours per year shall conduct a visible emissions compliance test once per each five-year period, coinciding with the term of its air operation permit.
9. The owner or operator shall notify the Department, at least 15 days prior to the date on which each formal compliance test is to begin, of the date, time, and place of each such test, and the test contact person who will be responsible for coordinating and having such test conducted for the owner or operator.

(b) Special Compliance Tests. When the Department, after investigation, has good reason (such as complaints, increased visible emissions or questionable maintenance of control equipment) to believe that any applicable emission standard contained in a Department rule or in a permit issued pursuant to those rules is being violated, it may require the owner or operator of the emissions unit to conduct compliance tests which identify the nature and quantity of pollutant emissions from the emissions unit and to provide a report on the results of said tests to the Department.

(c) Waiver of Compliance Test Requirements. If the owner or operator of an emissions unit that is subject to a compliance test requirement demonstrates to the Department, pursuant to the procedure established in Rule 62-297.620, F.A.C., that the compliance of the emissions unit with an applicable weight emission limiting standard can be adequately determined by means other than the designated test procedure, such as specifying a surrogate standard of no visible emissions for particulate matter sources equipped with a bag house or specifying a fuel analysis for sulfur dioxide emissions, the Department shall waive the compliance test requirements for such emissions units and order that the alternate means of determining compliance be used, provided, however, the provisions of Rule 62-297.310(7)(b), F.A.C., shall apply.

[Rule 62-297.310(7), F.A.C.; and, SIP approved]

**C.44. Tests After Substantial Modifications:** All performance tests required for initial startup shall also be conducted after any substantial modification and appropriate shakedown period of air pollution control equipment including the replacement of dry low-NO<sub>x</sub> combustors. Shakedown periods shall not exceed 100 days after re-starting the combustion turbine.  
[Rule 62-297.310(7)(a)4, F.A.C.; and, 0050014-002-AC.]

**Recordkeeping and Reporting Requirements**

**C.45. Test Reports.**

- (a) The owner or operator of an emissions unit for which a compliance test is required shall file a report with the Department on the results of each such test.
- (b) The required test report shall be filed with the Department as soon as practical but no later than 45 days after the last sampling run of each test is completed.
- (c) The test report shall provide sufficient detail on the emissions unit tested and the test procedures used to allow the Department to determine if the test was properly conducted and the test results properly computed. As a minimum, the test report, other than for an EPA Method 9 test, shall provide the following information:
  1. The type, location, and designation of the emissions unit tested.
  2. The facility at which the emissions unit is located.
  3. The owner or operator of the emissions unit.
  4. The normal type and amount of fuels used and materials processed, and the types and amounts of fuels used and material processed during each test run.
  5. The means, raw data and computations used to determine the amount of fuels used and materials processed, if necessary to determine compliance with an applicable emission-limiting standard.
  6. The type of air pollution control devices installed on the emissions unit, their general condition, their normal operating parameters (pressure drops, total operating current and GPM scrubber water), and their operating parameters during each test run.
  7. A sketch of the duct within 8 stack diameters upstream and 2 stack diameters downstream of the sampling ports, including the distance to any upstream and downstream bends or other flow disturbances.
  8. The date, starting time and duration of each sampling run.
  9. The test procedures used, including any alternative procedures authorized pursuant to Rule 62-297.620, F.A.C. Where optional procedures are authorized in this chapter, indicate which option was used.
  10. The number of points sampled and configuration and location of the sampling plane.
  11. For each sampling point for each run, the dry gas meter reading, velocity head, pressure drop across the stack, temperatures, average meter temperatures and sample time per point.
  12. The type, manufacturer and configuration of the sampling equipment used.
  13. Data related to the required calibration of the test equipment.
  14. Data on the identification, processing and weights of all filters used.
  15. Data on the types and amounts of any chemical solutions used.
  16. Data on the amount of pollutant collected from each sampling probe, the filters, and the impingers, are reported separately for the compliance test.

17. The names of individuals who furnished the process variable data, conducted the test, analyzed the samples and prepared the report.
18. All measured and calculated data required to be determined by each applicable test procedure for each run.
19. The detailed calculations for one run that relate the collected data to the calculated emission rate.
20. The applicable emission standard, and the resulting maximum allowable emission rate for the emissions unit, plus the test result in the same form and unit of measure.
21. A certification that, to the knowledge of the owner or his authorized agent, all data submitted are true and correct. When a compliance test is conducted for the Department or its agent, the person who conducts the test shall provide the certification with respect to the test procedures used. The owner or his authorized agent shall certify that all data required and provided to the person conducting the test are true and correct to his knowledge.

[Rules 62-213.440 and 62-297.310(8), F.A.C.]

#### SIP Requirements

**C.46. CEMS for Reporting Facility-wide NO<sub>x</sub> Emissions:** The NO<sub>x</sub> CEMS shall be used for ensuring compliance with the facility-wide cap. (See Facility-wide Condition 16.)  
[0050014-002-AC.]

**C.47. CEMS for reporting excess emissions:** Subject to EPA approval, the NO<sub>x</sub> CEMS shall be used in lieu of the requirement for reporting excess emissions in accordance with 40 CFR 60.334(c)(1), Subpart GG (1998 version). Upon request from DEP, the CEMS emission rates for NO<sub>x</sub> on the CT's shall be corrected to ISO conditions to demonstrate compliance with the NO<sub>x</sub> standard established in 40 CFR 60.332.  
[0050014-002-AC.]

**C.48. Continuous Monitoring System Reports:** The monitoring devices shall comply with the certification and quality assurance, and any other applicable requirements of Rule 62-297.520, F.A.C., 40 CFR 60.13, including certification of each device in accordance with 40 CFR 60, Appendix B, Performance Specifications and 40 CFR 60.7(a)(5) or 40 CFR Part 75. Quality assurance procedures must conform to all applicable sections of 40 CFR 60, Appendix F or 40 CFR 75. The monitoring plan, consisting of data on CEM equipment specifications, manufacturer, type, calibration and maintenance needs, and its proposed location shall be provided to the DEP Emissions Monitoring Section Administrator and EPA for review no later than 45 days prior to the first scheduled certification test pursuant to 40 CFR 75.62.  
[0050014-002-AC.]

**C.49. Subpart Da Monitoring and Recordkeeping Requirements:** The permittee shall comply with all applicable requirements of this Subpart [40CFR60, Subpart Da]. The requirements under 40 CFR 60.46a, 60.47a, 60.48a, and 60.49a regarding continuous monitoring systems for emissions of nitrogen oxides and for electrical output are inapplicable (due to impracticability) and therefore waived.  
[0050014-002-AC.]

**C.50. Quarterly Reports:** Quarterly excess emission reports, in accordance with 40 CFR 60.7 (a)(7) (c) (1998 version), shall be submitted to the DEP's Northwest District Office.  
[0050014-002-AC.]

**C.51. Excess Emissions Report:** If excess emissions occur for more than two hours due to malfunction, the owner or operator shall notify DEP's Northwest District office within (1) working day of: the nature, extent, and duration of the excess emissions; the cause of the excess emissions; and the actions taken to correct the problem. In addition, the Department may request a written summary report of the incident. Pursuant to the New Source Performance Standards, all excess emissions shall also be reported in accordance with 40 CFR 60.7, Subpart A. Following this format, 40 CFR 60.7, periods of startup, shutdown, malfunction, shall be monitored, recorded, and reported as excess emissions when emission levels (in terms of applicable averaging periods) exceed the permitted standards listed in Specific Conditions **C.9. – C.14.**  
[Rules 62-4.130, 62-204.800, 62-210.700(6), F.A.C.; 40 CFR 60.7 (1998 version); and, 0050014-002-AC].

#### NSPS Requirements

**C.52.** The owner or operator subject to the provisions of 40 CFR 60 shall furnish the Administrator written notification as follows:

- (4) A notification of any physical or operational change to an existing facility which may increase the emission rate of any air pollutant to which a standard applies, unless that change is specifically exempted under an applicable subpart or in 40 CFR 60.14(e). This notice shall be postmarked 60 days or as soon as practicable before the change is commenced and shall include information describing the precise nature of the change, present and proposed emission control systems, productive capacity of the facility before and after the change, and the expected completion date of the change. The Administrator may request additional relevant information subsequent to this notice.

[40 CFR 60.7(a)(4)] †

**C.53.** The owner or operator subject to the provisions of 40 CFR 60 shall maintain records of the occurrence and duration of any startup, shutdown, or malfunction in the operation of an affected facility; any malfunction of the air pollution control equipment; or, any periods during which a continuous monitoring system or monitoring device is inoperative.

[40 CFR 60.7(b)]

**C.54.** The owner or operator required to install a continuous monitoring system (CMS) or monitoring device shall submit an excess emissions and monitoring systems performance report and/or a summary report form [see 40 CFR 60.7(d)] to the Administrator semiannually, except when: more frequent reporting is specifically required by an applicable subpart; or, the CMS data are to be used directly for compliance determination, in which case quarterly reports shall be submitted; or, the Administrator, on a case-by-case basis, determines that more frequent reporting is necessary to accurately assess the compliance status of the source. All reports shall be postmarked by the 30<sup>th</sup> day following the end of each calendar half (or quarter, as appropriate). Written reports of excess emissions shall include the following information:

- (1) The magnitude of excess emissions computed in accordance with 40 CFR 60.13(h), any conversion factor(s) used, and the date and time of commencement and completion of each time period of excess emissions. The process operating time during the reporting period.
- (2) Specific identification of each period of excess emissions that occurs during startups, shutdowns, and malfunctions of the affected facility. The nature and cause of any malfunction (if known), the corrective action taken or preventative measures adopted.
- (3) The date and time identifying each period during which the continuous monitoring system was inoperative except for zero and span checks and the nature of the system repairs or adjustments.
- (4) When no excess emissions have occurred or the continuous monitoring system(s) have not been inoperative, repaired, or adjusted, such information shall be stated in the report.

[40 CFR 60.7(c)(1), (2), (3), and (4)]

**C.55.** The summary report form shall contain the information and be in the format shown in Figure 1 (attached) unless otherwise specified by the Administrator. One summary report form shall be submitted for each pollutant monitored at each affected facility.

- (1) If the total duration of excess emissions for the reporting period is less than 1 percent of the total operating time for the reporting period and CMS downtime for the reporting period is less than 5 percent of the total operating time for the reporting period, only the summary report form shall be submitted and the excess emission report described in 40 CFR 60.7(c) need not be submitted unless requested by the Administrator.
- (2) If the total duration of excess emissions for the reporting period is 1 percent or greater of the total operating time for the reporting period or the total CMS downtime for the reporting period is 5 percent or greater of the total operating time for the reporting period, the summary report form and the excess emission report described in 40 CFR 60.7(c) shall both be submitted.

[40 CFR 60.7(d)(1) and (2)]

*{See attached Figure 1: Summary Report-Gaseous and Opacity Excess Emission and Monitoring System Performance}*

**C.56. Excess Emissions Reporting.**

(1) Notwithstanding the frequency of reporting requirements specified in 40 CFR 60.7(c), an owner or operator who is required by an applicable subpart to submit excess emissions and monitoring systems performance reports (and summary reports) on a quarterly (or more frequent) basis may reduce the frequency of reporting for that standard to semiannual if the following conditions are met:

- (i) For 1 full year (e.g., 4 quarterly or 12 monthly reporting periods) the affected facility's excess emissions and monitoring systems reports submitted to comply with a standard under this part continually demonstrate that the facility is in compliance with the applicable standard;
- (ii) The owner or operator continues to comply with all recordkeeping and monitoring requirements specified in 40 CFR 60, Subpart A, and the applicable standard; and,
- (iii) The Administrator does not object to a reduced frequency of reporting for the affected facility, as provided in 40 CFR 60.7(e)(2). The frequency of reporting of excess emissions and monitoring systems performance (and summary) reports may be reduced only after the owner or operator notifies the Administrator in writing of his or her intention to make such a change and the Administrator does not object to the intended change. In deciding whether to approve a reduced frequency of reporting, the Administrator may review information concerning the source's entire

previous performance history during the required recordkeeping period prior to the intended change, including performance test results, monitoring data, and evaluations of an owner or operator's conformance with operation and maintenance requirements. Such information may be used by the Administrator to make a judgment about the source's potential for noncompliance in the future. If the Administrator disapproves the owner or operator's request to reduce the frequency of reporting, the Administrator will notify the owner or operator in writing within 45 days after receiving notice of the owner or operator's intention. The notification from the Administrator to the owner or operator will specify the grounds on which the disapproval is based. In the absence of a notice of disapproval within 45 days, approval is automatically granted.

(3) As soon as monitoring data indicate that the affected facility is not in compliance with any emission limitation or operating parameter specified in the applicable standard, the frequency of reporting shall revert to the frequency specified in the applicable standard, and the owner or operator shall submit an excess emissions and monitoring systems performance report (and summary report, if required) at the next appropriate reporting period following the noncomplying event. After demonstrating compliance with the applicable standard for another full year, the owner or operator may again request approval from the Administrator to reduce the frequency of reporting for that standard as provided for in 40 CFR 60.7(e)(1) & (e)(2).

[40 CFR 60.7(e)(1)]

**C.57.** The owner or operator subject to the provisions of 40 CFR 60 shall maintain a file of all measurements, including continuous monitoring system, monitoring device, and performance testing measurements; all continuous monitoring system performance evaluations; all continuous monitoring system or monitoring device calibration checks; adjustments and maintenance performed on these systems or devices; and, all other information required by 40 CFR 60 recorded in a permanent form suitable for inspection. The file shall be retained for at least **5 (five)** years following the date of such measurements, maintenance, reports, and records. These records shall be made available to DEP representatives upon request.

[40 CFR 60.7(f); Rules 62-4.160(14) & 62-213.440(1)(b)2.b., F.A.C.; and, 0050014-002-AC.]

**C.58. Excess Emissions Reports:** If excess emissions occur due to malfunction, the owner or operator shall notify the Compliance Authority within (1) working day of: the nature, extent, and duration of the excess emissions; the cause of the excess emissions; and the actions taken to correct the problem. In addition, the Department may request a written summary report of the incident. Following the NSPS format (40 CFR 60.7, Subpart A), periods of startup, shutdown, malfunction, shall be monitored, recorded, and reported as excess emissions when emission levels exceed the standards specified in this permit. Within thirty (30) days following each calendar quarter, the permittee shall submit a report on any periods of excess emissions that occurred during the previous calendar quarter to the Compliance Authority. This quarterly report shall follow the format provided in Figure 1 (attached) and summarize periods of excluded NO<sub>x</sub> emissions data.

[Rules 62-4.130, 62-204.800 62-210.700(6) & 62-213.440, F.A.C.; and, 40 CFR 60.7.]

**Section IV. Acid Rain Part.**

**Operated by:** Gulf power Company  
**ORIS Code:** 643

**Subsection A. This subsection addresses Acid Rain, Phase II.**

The emissions units listed below are regulated under Acid Rain, Phase II.

**E.U. ID**

<b><u>No.</u></b>	<b><u>Description</u></b>
-001	Boiler Number 1 - 1,944.8 MMBtu/hour
-002	Boiler Number 2 - 2,246.2 MMBtu/hour
-004	Combined Cycle Combustion Turbine Generator Unit No. 1 (CC-1)
-005	Combined Cycle Combustion Turbine Generator Unit No. 2 (CC-2)

**A.1.** The Phase II permit applications, the Phase II NO<sub>x</sub> compliance plans and the Phase II NO<sub>x</sub> averaging plans submitted for this facility, as approved by the Department, are a part of this permit (included as Attachments). The owners and operators of these Phase II acid rain units must comply with the standard requirements and special provisions set forth in the applications listed below:

- a. DEP Form No. 62-210.900(1)(a), F.A.C., Signed 6/1/04.
- b. DEP Form No. 62-210.900(1)(a)4., F.A.C., Signed 6/1/04.
- c. DEP Form No. 62-210.900(1)(a)5., F.A.C., Signed 11/18/03.

[Chapter 62-213 and Rule 62-214.320, F.A.C.]

**A.2.** Sulfur dioxide (SO<sub>2</sub>) allowance allocations and nitrogen oxide (NO<sub>x</sub>) requirements for each Acid Rain unit are as follows:

<b>E.U. ID #</b>	<b>EPA ID</b>	<b>Year</b>	<b>2004</b>	<b>2005</b>	<b>2006</b>	<b>2007</b>	<b>2008</b>	
-001	ID No. 01 Boiler 1	SO <sub>2</sub> allowances, under Table 2 or 3 of 40 CFR 73	6,476*	6,476*	6,476*	6,476*	6,476*	
		NO <sub>x</sub> limit	Pursuant to 40 CFR 76.11, the Florida Department of Environmental Protection approves five (5) NO <sub>x</sub> emissions averaging plans for this unit. Each plan is effective for one calendar year for the 2004, 2005, 2006, 2007 and 2008. Under each plan, this unit's NO <sub>x</sub> emissions shall not exceed the annual average alternative contemporaneous emission limitation of <b>0.62 lb/MMBtu</b> . In addition, this unit shall not have an annual heat input <b>greater than 11,275,531 MMBtu</b> .					
Also, see Additional Requirements 1, 2 and 3, below.								



E.U. ID #	EPA ID	Year	2004	2005	2006	2007	2008	
-002	ID No. 02 Boiler 2	SO <sub>2</sub> allowances, under Table 2 or 3 of 40 CFR 73	7,601*	7,601*	7,601*	7,601*	7,601*	
		NO <sub>x</sub> limit	Pursuant to 40 CFR 76.11, the Florida Department of Environmental Protection approves five (5) NO <sub>x</sub> emissions averaging plans for this unit. Each plan is effective for one calendar year for the 2004, 2005, 2006, 2007 and 2008. Under each plan, this unit's NO <sub>x</sub> emissions shall not exceed the annual average alternative contemporaneous emission limitation of <b>0.44 lb/MMBtu</b> . In addition, this unit shall not have an annual heat input <b>greater than 9,250,882 MMBtu</b> .					
			Also, see Additional Requirements 1, 2 and 3, below.					
-004	4	SO <sub>2</sub> allowances, under Table 2 or 3 of 40 CFR 73	0	0	0	0	0	
-005	5	SO <sub>2</sub> allowances, under Table 2 or 3 of 40 CFR 73	0	0	0	0	0	

\*The number of allowances held by an Acid Rain source in a unit account may differ from the number allocated by the USEPA under Table 2, 3, or 4 of 40 CFR 73.

Additional Requirements

- Under the plan (NO<sub>x</sub> Phase II averaging plan), the actual Btu-weighted annual average NO<sub>x</sub> emission rate for the units in the plan shall be less than or equal to the Btu-weighted annual average NO<sub>x</sub> emission rate for the same units had they each been operated, during the same period of time, in compliance with the applicable emission limitations under 40 CFR 76.5, 76.6, or 76.7, except that for any early election units, the applicable emission limitations shall be under 40 CFR 76.7. If the designated representative demonstrates that the requirement of the prior sentence (as set forth in 40 CFR 76.11(d)(1)(ii)(A)) is met for a year under the plan, then this unit shall be deemed to be in compliance for that year with its alternative contemporaneous annual emission limitation and annual heat input limit.

2. In accordance with 40 CFR 72.40(b)(2), approval of the averaging plan shall be final only after the Alabama Department of Environmental Management, the Jefferson County (Alabama) Department of Health, the Georgia Department of Natural Resources and the Mississippi Department of Environmental Quality, have also approved this averaging plan.
3. In addition to the described NO<sub>x</sub> compliance plan, this unit shall comply with all other applicable requirements of 40 CFR part 76, including the duty to reapply for a NO<sub>x</sub> compliance plan and requirements covering excess emissions.

**A.3. Emission Allowances.** Emissions from sources subject to the Federal Acid Rain Program (Title IV) shall not exceed any allowances that the source lawfully holds under the Federal Acid Rain Program. Allowances shall not be used to demonstrate compliance with a non-Title IV applicable requirement of the Act.

1. No permit revision shall be required for increases in emissions that are authorized by allowances acquired pursuant to the Federal Acid Rain Program, provided that such increases do not require a permit revision pursuant to Rule 62-213.400(3), F.A.C.
2. No limit shall be placed on the number of allowances held by the source under the Federal Acid Rain Program.
3. Allowances shall be accounted for under the Federal Acid Rain Program.

[Rule 62-213.440(1)(c)1., 2. & 3., F.A.C.]

**A.4. Fast-Track Revisions of Acid Rain Parts.** Those Acid Rain sources making a change described at Rule 62-214.370(4), F.A.C., may request such change as provided in Rule 62-213.413, F.A.C.

[Rules 62-213.413 and 62-214.370(4), F.A.C.]

**A.5.** Where an applicable requirement of the Act is more stringent than applicable regulations promulgated under Title IV of the Act, both provisions shall be incorporated into the permit and shall be enforceable by the Administrator.

[40 CFR 70.6(a)(1)(ii); and, Rule 62-210.200, F.A.C., Definitions – Applicable Requirements.]

**A.6. Comments, notes, and justifications:** The Designated Representative has changed from Frederick Kuester to G. Edison Holland, Jr. to Robert G. Moore to Bill M. Guthrie to Charles D. McCrary to W. Paul Bowers.

The alternative designated representatives have been changed to include James O. Vick and Gene L. Ussery, Jr..

#### Reporting Requirements

**A.7. Statement of Compliance.** The annual statement of compliance pursuant to Rule 62-213.440(3), F.A.C., shall be submitted within 60 (sixty) days after the end of the calendar year. {See condition 51., APPENDIX TV-4 TITLE V CONDITIONS}

[Rule 62-214.420(11), F.A.C.]

**A.8. Demonstration of Compliance With the Phase II NO<sub>x</sub> Averaging Plan.** The Designated Representative shall provide a copy of the demonstration of compliance, prepared in accordance with 40 CFR 76.11(d), to the Department within 60 (sixty) days after the end of the calendar year.

[Rule 62-213.440, F.A.C.]

## Appendix I-1, List of Insignificant Emissions Units and/or Activities.

Gulf Power Company  
Lansing Smith Electric Generating Plant

FINAL Permit No.: 0050014-010-AV  
Facility ID No.: 0050014

The facilities, emissions units, or pollutant-emitting activities listed in Rule 62-210.300(3)(a), F.A.C., Categorical Exemptions, are exempt from the permitting requirements of Chapters 62-210 and 62-4, F.A.C.; provided, however, that exempt emissions units shall be subject to any applicable emission limiting standards and the emissions from exempt emissions units or activities shall be considered in determining the potential emissions of the facility containing such emissions units. Emissions units and pollutant-emitting activities exempt from permitting under Rule 62-210.300(3)(a), F.A.C., shall not be exempt from the permitting requirements of Chapter 62-213, F.A.C., if they are contained within a Title V source; however, such emissions units and activities shall be considered insignificant for Title V purposes provided they also meet the criteria of Rule 62-213.430(6)(b), F.A.C. No emissions unit shall be entitled to an exemption from permitting under Rule 62.210.300(3)(a), F.A.C., if its emissions, in combination with the emissions of other units and activities at the facility, would cause the facility to emit or have the potential to emit any pollutant in such amount as to make the facility a Title V source.

The below listed emissions units and/or activities are considered insignificant pursuant to Rule 62-213.430(6), F.A.C.

	<u>State Registration Number</u>	<u>Contents</u>	<u>Size (Gallons)</u>
1.	Tank #1	#2 Diesel - Lighter Oil	25,000
2.	Tank #3	#2 Diesel - CT Fuel Oil	200,000
3.	Tank #4	#2 Diesel - CT Fuel Oil	200,000
4.	Tank #5	#2 Diesel - CT Fuel Oil	200,000
5.	--	Lube Oil	1,000
6.	Tank #7	Used Oil	2,100
7.	--	Lube Oil	581
8.	--	Lube Oil	560
9.	--	Lube Oil	560
10.	--	Lube Oil	560
11.	--	Lube Oil	560
12.	Tank #13	Lube Oil	6,000
13.	Tank #14	Lube Oil	6,000
14.	Tank #15	Lube Oil	6,000
15.	Tank #16	Sulfuric Acid	4,000
16.	--	Maintenance Area, Used Oil	500
17.	--	Maintenance Area, Used Oil	500
18.	--	Tractor Shed Area Used Oil	300
19.	--	Fire Pump Diesel Fuel (2)	500
20.	--	Chlorine (13)	1 ton
21.	Tank #18	Diesel Sludge Tank	570
22.	--	Gas Condensate Tank U-3	500
23.	--	Emergency Generator Diesel	500

Gulf Power Company  
Lansing Smith Electric Generating Plant

FINAL Permit No.: 0050014-010-AV

Miscellaneous

24. Fire Safety Equipment - Exempted by Rule 62-210.300(3)(a)22., F.A.C.
25. Vacuum Pumps - Exempted by Rule 62-210.300(3)(a)9., F.A.C.
26. Laboratory Equipment - Exempted by Rule 62-210.300(3)(a)15., F.A.C.
27. Welding Equipment - Exempted by Rule 62-210.300(3)(a)16., F.A.C.
28. Gulf Power Company Generated Non-hazardous Boiler Chemical Cleaning Wastes  
(Not to exceed 50 gallons per minute)

## **Appendix U-1, List of Unregulated Emissions Units and/or Activities.**

Gulf Power Company  
Lansing Smith Electric Generating Plant

FINAL Permit No.: 0050014-010-AV  
Facility ID No.: 0050014

Unregulated Emissions Units and/or Activities. An emissions unit which emits no “emissions-limited pollutant” and which is subject to no unit-specific work practice standard, though it may be subject to regulations applied on a facility-wide basis (e.g., unconfined emissions, odor, general opacity) or to regulations that require only that it be able to prove exemption from unit-specific emissions or work practice standards.

The below listed emissions units and/or activities are neither ‘regulated emissions units’ nor ‘Insignificant emissions units’.

### **E.U. ID**

#### **No.            Brief Description of Emissions Units and/or Activity**

- 007      Material Handling of Coal and Ash
- 008      Fugitive PM Sources - On-site Vehicles
- 009      General Purpose Internal Combustion Engines
  
- 007      Material Handling of Coal and Ash. Fugitive PM emissions generated from the transfer and handling of coal and ash. SCC: 3-05-101-03.
  
- 008      Fugitive PM Sources. Fugitive PM emissions generated by haul trucks and other on-site vehicles. SCC: 3-05-101-50.
  
- 009      General Purpose Internal Combustion Engines. Located for use at this source are miscellaneous internal combustion engines used to operate the following: welders, compressors, generators, water pumps, sweepers, and other auxiliary equipment.

## Appendix H-1, Permit History/ID Number Changes

(For Tracking Purposes Only)

Gulf Power Company  
Lansing Smith Electric Generating Plant

Permit No.: 0050014-010-AV  
Facility ID No.: 0050014

<u>E.U. ID No</u>	<u>Description</u>	<u>Permit No.</u>	<u>Issue / Effective Date</u>	<u>Expiration Date</u>	<u>Extended Date</u>	<u>Revised Date(s)</u>
-001	Lansing Smith #1 - Stack	AO03-211310 Secretarial ORDER <sup>1</sup> Secretarial ORDER <sup>2</sup> AC03-2023	04/17/92 10/18/85 12/07/82 02/10/75	04/01/97	05/15/77	
-002	Lansing Smith #2 - Stack	AO03-211310 Secretarial ORDER <sup>1</sup> Secretarial ORDER <sup>2</sup> AC03-2024	04/17/92 10/18/85 12/07/82 02/10/75	04/01/97	05/15/77	
-003	Peaking Turbines A & B	AO03-249657	05/19/94	01/15/96		
-001 - - 003	Initial Title V Permit	0050014-001-AV	01/01/00	12/31/04		
-004 - - 006	2 Combined cycle CTs and cooling tower	0050014-002-AC	07/28/00	12/31/02	06/30/03	
-004 - - 006	Heat input revision	0050014-003-AC	06/14/02	06/14/02		
All	Authorization for CAM testing	0050014-004-AC	08/01/02	11/30/02		
-002	Water wall replacement on Boiler No. 2	0050014-005-AC	10/18/02	07/01/03		
-004 - - 006	Title V revision to include new CTs	0050014-006-AV	06/11/03	12/31/04		
All	Title V Renewal	0050014-010-AV	01/05/04	12/31/09		
-001 & -002	Heat input compliance AC	0050014-011-AC	11/10/04	----		

<sup>1</sup> Secretarial ORDER issued to relax semi-annual PM testing requirement to annual.

<sup>2</sup> Secretarial ORDER issued to relax quarterly PM testing requirement to semi-annual.

**Referenced Attachments**

**Phase II Acid Rain Application/Compliance Plan**

**Phase II Acid Rain NO<sub>x</sub> Compliance Plan**

**Phase II Acid Rain NO<sub>x</sub> Averaging Plan**

**Appendix A-1, Abbreviations, Definitions, Citations, and Identification Numbers**

**Appendix CAM, Compliance Assurance Monitoring Plan**

**Appendix PA-1, Patrol Area**

**Appendix SO-1, Secretarial ORDER(s)**

**Appendix SS-1, Stack Sampling Facilities (version dated 10/7/96)**

**Appendix TV-4, Title V Conditions (version dated 2/12/02)**

**Figure 1: Summary Report-  
Gaseous and Opacity Excess Emission and Monitoring System Performance**

**Table 1-1, Summary of Air Pollutant Standards and Terms**

**Table 2-1, Compliance Requirements**

**Phase II Acid Rain Permit Application/Compliance Plan**



# Acid Rain Part Application

For more information, see instructions and refer to 40 CFR 72.30 and 72.31 and Chapter 62-214, F.A.C.

This submission is:  New  Revised

**STEP 1**

Identify the source by plant name, State, and ORIS code

Plant Name <b>LANSING SMITH ELECTRIC GENERATING PLANT</b>	State <b>FL</b>	ORIS Code <b>643</b>
---	-----------------	----------------------

**STEP 2**

Enter the unit ID# for every Acid Rain unit at the Acid Rain source in column "a." For new units, enter the requested information in columns "c" and "d."

a Unit ID#	b Unit will hold allowances in accordance with 40 CFR 72.9(c)(1)	c New Units  Commence Operation Date	d New Units  Monitor Certification Deadline
001	Yes		
002	Yes		
004	Yes		
005	Yes		
	Yes		
	Yes		
	Yes		
	Yes		
1	Yes		
	Yes		
	Yes		
	Yes		
	Yes		

<b>LANSING SMITH ELECTRIC GENERATING PLANT</b> Plant Name (from Step 1)
--

**STEP 3**  
**Read the standard requirements**

Acid Rain Part Requirements

- (1) The designated representative of each Acid Rain source and each Acid Rain unit at the source shall:
  - (i) Submit a complete Acid Rain part application (including a compliance plan) under 40 CFR part 72 and Rules 62-214.320 and 330, F.A.C., in accordance with the deadlines specified in Rule 62-214.320, F.A.C.; and
  - (ii) Submit in a timely manner any supplemental information that the Department determines is necessary in order to review an Acid Rain part application and issue or deny an Acid Rain part;
- (2) The owners and operators of each Acid Rain source and each Acid Rain unit at the source shall:
  - (i) Operate the unit in compliance with a complete Acid Rain part application or a superseding Acid Rain part issued by the Department; and
  - (ii) Have an Acid Rain Part.

Monitoring Requirements

- (1) The owners and operators and, to the extent applicable, designated representative of each Acid Rain source and each Acid Rain unit at the source shall comply with the monitoring requirements as provided in 40 CFR part 75, and Rule 62-214.420, F.A.C.
- (2) The emissions measurements recorded and reported in accordance with 40 CFR part 75 shall be used to determine compliance by the unit with the Acid Rain emissions limitations and emissions reduction requirements for sulfur dioxide and nitrogen oxides under the Acid Rain Program.
- (3) The requirements of 40 CFR part 75 shall not affect the responsibility of the owners and operators to monitor emissions of other pollutants or other emissions characteristics at the unit under other applicable requirements of the Act and other provisions of the operating permit for the source.

Sulfur Dioxide Requirements

- (1) The owners and operators of each source and each Acid Rain unit at the source shall:
  - (i) Hold allowances, as of the allowance transfer deadline, in the unit's compliance subaccount (after deductions under 40 CFR 73.34(c)), or in the compliance subaccount of another Acid Rain unit at the same source to the extent provided in 40 CFR 73.35(b)(3), not less than the total annual emissions of sulfur dioxide for the previous calendar year from the unit; and
  - (ii) Comply with the applicable Acid Rain emissions limitations for sulfur dioxide.
- (2) Each ton of sulfur dioxide emitted in excess of the Acid Rain emissions limitations for sulfur dioxide shall constitute a separate violation of the Act.
- (3) An Acid Rain unit shall be subject to the requirements under paragraph (1) of the sulfur dioxide requirements as follows:
  - (i) Starting January 1, 2000, an Acid Rain unit under 40 CFR 72.6(a)(2); or
  - (ii) Starting on the later of January 1, 2000 or the deadline for monitor certification under 40 CFR part 75, an Acid Rain unit under 40 CFR 72.6(a)(3).
- (4) Allowances shall be held in, deducted from, or transferred among Allowance Tracking System accounts in accordance with the Acid Rain Program.
- (5) An allowance shall not be deducted in order to comply with the requirements under paragraph (1) of the sulfur dioxide requirements prior to the calendar year for which the allowance was allocated.
- (6) An allowance allocated by the Administrator under the Acid Rain Program is a limited authorization to emit sulfur dioxide in accordance with the Acid Rain Program. No provision of the Acid Rain Program, the Acid Rain part application, the Acid Rain part, or an exemption under 40 CFR 72.7 or 72.8 and no provision of law shall be construed to limit the authority of the United States to terminate or limit such authorization.
- (7) An allowance allocated by the Administrator under the Acid Rain Program does not constitute a property right.

Nitrogen Oxide Requirements The owners and operators of the source and each Acid Rain unit at the source shall comply with the applicable Acid Rain emissions limitation for nitrogen oxides.

Excess Emissions Requirements

- (1) The designated representative of an Acid Rain unit that has excess emissions in any calendar year shall submit a proposed offset plan, as required under 40 CFR part 77.
- (2) The owners and operators of an Acid Rain unit that has excess emissions in any calendar year shall:
  - (i) Pay without demand the penalty required, and pay upon demand the interest on that penalty, as required by 40 CFR part 77; and
  - (ii) Comply with the terms of an approved offset plan, as required by 40 CFR part 77.

Recordkeeping and Reporting Requirements

- (1) Unless otherwise provided, the owners and operators of the source and each Acid Rain unit at the source shall keep on site at the source each of the following documents for a period of 5 years from the date the document is created. This period may be extended for cause, at any time prior to the end of 5 years, in writing by the EPA or the Department:
  - (i) The certificate of representation for the designated representative for the source and each Acid Rain unit at the source and all documents that demonstrate the truth of the statements in the certificate of representation, in accordance with Rule 62-214.350, F.A.C.; provided that the certificate and documents shall be retained on site at the source beyond such 5-year period until such documents are superseded because of the submission of a new certificate of representation changing the designated representative;
  - (ii) All emissions monitoring information, in accordance with 40 CFR part 75, provided that to the extent that 40 CFR part 75 provides for a 3-year period for recordkeeping, the 3-year period shall apply;
  - (iii) Copies of all reports, compliance certifications, and other submissions and all records made or required under the Acid Rain Program; and,

**LANSING SMITH ELECTRIC GENERATING PLANT**  
Plant Name (from Step 1)

STEP 3,  
Cont'd.

Recordkeeping and Reporting Requirements (cont)

(iv) Copies of all documents used to complete an Acid Rain part application and any other submission under the Acid Rain Program or to demonstrate compliance with the requirements of the Acid Rain Program.

(2) The designated representative of an Acid Rain source and each Acid Rain unit at the source shall submit the reports and compliance certifications required under the Acid Rain Program, including those under 40 CFR part 72 subpart I and 40 CFR part 75.

Liability.

- (1) Any person who knowingly violates any requirement or prohibition of the Acid Rain Program, a complete Acid Rain part application, an Acid Rain part, or an exemption under 40 CFR 72.7 or 72.8, including any requirement for the payment of any penalty owed to the United States, shall be subject to enforcement pursuant to section 113(c) of the Act.
- (2) Any person who knowingly makes a false, material statement in any record, submission, or report under the Acid Rain Program shall be subject to criminal enforcement pursuant to section 113(c) of the Act and 18 U.S.C. 1001.
- (3) No permit revision shall excuse any violation of the requirements of the Acid Rain Program that occurs prior to the date that the revision takes effect.
- (4) Each Acid Rain source and each Acid Rain unit shall meet the requirements of the Acid Rain Program.
- (5) Any provision of the Acid Rain Program that applies to an Acid Rain source (including a provision applicable to the designated representative of an Acid Rain source) shall also apply to the owners and operators of such source and of the Acid Rain units at the source.
- (6) Any provision of the Acid Rain Program that applies to an Acid Rain unit (including a provision applicable to the designated representative of an Acid Rain unit) shall also apply to the owners and operators of such unit. Except as provided under 40 CFR 72.44 (Phase II repowering extension plans) and 40 CFR 76.11 (NO<sub>x</sub> averaging plans), and except with regard to the requirements applicable to units with a common stack under 40 CFR part 75 (including 40 CFR 75.16, 75.17, and 75.18), the owners and operators and the designated representative of one Acid Rain unit shall not be liable for any violation by any other Acid Rain unit of which they are not owners or operators or the designated representative and that is located at a source of which they are not owners or operators or the designated representative.
- (7) Each violation of a provision of 40 CFR parts 72, 73, 75, 76, 77, and 78 by an Acid Rain source or Acid Rain unit, or by an owner or operator or designated representative of such source or unit, shall be a separate violation of the Act.

Effect on Other Authorities.

No provision of the Acid Rain Program, an Acid Rain part application, an Acid Rain part, or an exemption under 40 CFR 72.7 or 72.8 shall be construed as:


- (1) Except as expressly provided in title IV of the Act, exempting or excluding the owners and operators and, to the extent applicable, the designated representative of an Acid Rain source or Acid Rain unit from compliance with any other provision of the Act, including the provisions of title I of the Act relating to applicable National Ambient Air Quality Standards or State Implementation Plans;
- (2) Limiting the number of allowances a unit can hold; provided, that the number of allowances held by the unit shall not affect the source's obligation to comply with any other provisions of the Act;
- (3) Requiring a change of any kind in any State law regulating electric utility rates and charges, affecting any State law regarding such State regulation, or limiting such State regulation, including any prudence review requirements under such State law;
- (4) Modifying the Federal Power Act or affecting the authority of the Federal Energy Regulatory Commission under the Federal Power Act; or
- (5) Interfering with or impairing any program for competitive bidding for power supply in a State in which such program is established.

STEP 4

Certification

Read the certification statement, sign, and date

I am authorized to make this submission on behalf of the owners and operators of the Acid Rain source or Acid Rain units for which the submission is made. I certify under penalty of law that I have personally examined, and am familiar with, the statements and information submitted in this document and all its attachments. Based on my inquiry of those individuals with primary responsibility for obtaining the information, I certify that the statements and information are to the best of my knowledge and belief true, accurate, and complete. I am aware that there are significant penalties for submitting false statements and information or omitting required statements and information, including the possibility of fine or imprisonment.

Name	JAMES O. VICK	
Signature		Date 6/1/04

# Florida Department of Environmental Protection

## Phase II NO<sub>x</sub> Compliance Plan

For more information, see instructions and refer to 40 CFR 76.9

This submission is:  New  Revised

Page 1 of 1

<b>STEP 1</b> Indicate plant name, state, and ORIS code from NADB, if applicable.	<b>LANSING SMITH ELECTRIC GENERATING PLANT</b> Plant Name	FL State	643 ORIS Code
<b>STEP 2</b>	Identify each affected Group 1 and Group 2 boiler using the boiler ID# from NADB, if applicable. Indicate boiler type: "CB" for cell burner, "CY" for cyclone, "DBW" for dry bottom wall-fired, "T" for tangentially fired, "V" for vertically fired, and "WB" for wet bottom. Indicate the compliance option selected for each unit.		

ID# 001	ID# 002	ID#	ID#	ID#	ID#
Type T	Type T	Type	Type	Type	Type

- |   |                                     |                                     |                          |                          |                          |                          |
|---|-------------------------------------|-------------------------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| (a) Standard annual average emission limitation of 0.50 lb/mmBtu (for <u>Phase I</u> dry bottom wall-fired boilers)   | <input type="checkbox"/>            | <input type="checkbox"/>            | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| (b) Standard annual average emission limitation of 0.45 lb/mmBtu (for <u>Phase I</u> tangentially fired boilers)  | <input type="checkbox"/>            | <input type="checkbox"/>            | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| (c) EPA-approved early election plan under 40 CFR 76.8 through 12/31/07 (also indicate above emission limit specified in plan)  | <input type="checkbox"/>            | <input type="checkbox"/>            | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| (d) Standard annual average emission limitation of 0.46 lb/mmBtu (for <u>Phase II</u> dry bottom wall-fired boilers)  | <input type="checkbox"/>            | <input type="checkbox"/>            | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| (e) Standard annual average emission limitation of 0.40 lb/mmBtu (for <u>Phase II</u> tangentially fired boilers)   | <input type="checkbox"/>            | <input type="checkbox"/>            | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| (f) Standard annual average emission limitation of 0.68 lb/mmBtu (for cell burner boilers)  | <input type="checkbox"/>            | <input type="checkbox"/>            | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| (g) Standard annual average emission limitation of 0.86 lb/mmBtu (for cyclone boilers)  | <input type="checkbox"/>            | <input type="checkbox"/>            | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| (h) Standard annual average emission limitation of 0.80 lb/mmBtu (for vertically fired boilers)   | <input type="checkbox"/>            | <input type="checkbox"/>            | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| (i) Standard annual average emission limitation of 0.84 lb/mmBtu (for wet bottom boilers)   | <input type="checkbox"/>            | <input type="checkbox"/>            | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| (j) NO <sub>x</sub> Averaging Plan (include NO <sub>x</sub> Averaging form)   | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| (k) Common stack pursuant to 40 CFR 75.17(a)(2)(i)(A) (check the standard emission limitation box above for most stringent limitation applicable to any unit utilizing stack) | <input type="checkbox"/>            | <input type="checkbox"/>            | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |

**LANSING SMITH ELECTRIC GENERATING PLANT**  
Plant Name (from Step 1)

**STEP 2, cont'd.**

ID#	ID#	ID#	ID#	ID#	ID#
Type	Type	Type	Type	Type	Type

(l) Common stack pursuant to 40 CFR 75.17(a)(2)(i)(B) with NO<sub>x</sub> Averaging (check the NO<sub>x</sub> Averaging Plan box and include NO<sub>x</sub> Averaging Form)

<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
--------------------------	--------------------------	--------------------------	--------------------------	--------------------------	--------------------------

(m) EPA-approved common stack apportionment method pursuant to 40 CFR 75.17 (a)(2)(i)(C), (a)(2)(iii)(B), or (b)(2)

<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
--------------------------	--------------------------	--------------------------	--------------------------	--------------------------	--------------------------

(n) AEL (include Phase II AEL Demonstration Period, Final AEL Petition, or AEL Renewal form as appropriate)

<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
--------------------------	--------------------------	--------------------------	--------------------------	--------------------------	--------------------------

(o) Petition for AEL demonstration period or final AEL under review by U.S. EPA or demonstration period ongoing

<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
--------------------------	--------------------------	--------------------------	--------------------------	--------------------------	--------------------------

(p) Repowering extension plan approved or under review

<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
--------------------------	--------------------------	--------------------------	--------------------------	--------------------------	--------------------------

**STEP 3**

Read the standard requirements and certification, enter the name of the designated representative, sign and date.

**Standard Requirements**

General. This source is subject to the standard requirements in 40 CFR 72.9 (consistent with 40 CFR 76.8(e)(1)(i)). These requirements are listed in this source's Acid Rain Part of its Title V permit.

**Special Provisions for Early Election Units**

Nitrogen Oxides. A unit that is governed by an approved early election plan shall be subject to an emissions limitation for NO<sub>x</sub> as provided under 40 CFR 76.8(a)(2) except as provided under 40 CFR 76.8(e)(3)(iii).


Liability. The owners and operators of a unit governed by an approved early election plan shall be liable for any violation of the plan or 40 CFR 76.8 at that unit. The owners and operators shall be liable, beginning January 1, 2000, for fulfilling the obligations specified in 40 CFR Part 77.

Termination. An approved early election plan shall be in effect only until the earlier of January 1, 2008 or January 1 of the calendar year for which a termination of the plan takes effect. If the designated representative of the unit under an approved early election plan fails to demonstrate compliance with the applicable emissions limitation under 40 CFR 76.5 for any year during the period beginning January 1 of the first year the early election takes effect and ending December 31, 2007, the permitting authority will terminate the plan. The termination will take effect beginning January 1 of the year after the year for which there is a failure to demonstrate compliance, and the designated representative may not submit a new early election plan. The designated representative of the unit under an approved early election plan may terminate the plan any year prior to 2008 but may not submit a new early election plan. In order to terminate the plan, the designated representative must submit a notice under 40 CFR 72.40(d) by January 1 of the year for which the termination is to take effect. If an early election plan is terminated any year prior to 2000, the unit shall meet, beginning January 1, 2000, the applicable emissions limitation for NO<sub>x</sub> for Phase II units with Group 1 boilers under 40 CFR 76.7. If an early election plan is terminated on or after 2000, the unit shall meet, beginning on the effective date of the termination, the applicable emissions limitation for NO<sub>x</sub> for Phase II units with Group 1 boilers under 40 CFR 76.7.

STEP 3, cont'd.

Certification

I am authorized to make this submission on behalf of the owners and operators of the affected source or affected units for which the submission is made. I certify under penalty of law that I have personally examined, and am familiar with, the statements and information submitted in this document and all its attachments. Based on my inquiry of those individuals with primary responsibility for obtaining the information, I certify that the statements and information are to the best of my knowledge and belief true, accurate, and complete. I am aware that there are significant penalties for submitting false statements and information or omitting required statements and information, including the possibility of fine or imprisonment.

Name James O. Vick	
Signature 	Date 6/1/04

# Florida Department of Environmental Protection

## Phase II NO<sub>x</sub> Averaging Plan

For more information, see instructions for DEP Form No. 62-210.900(1)(a)4, and refer to 40 CFR 76.11

This submission is:  New  Revised

**STEP 1**

Identify the units participating in this averaging plan by plant name, state, and boiler ID# from NADB. In column (a), fill in each unit's applicable emission limitation from 40 CFR 76.5, 76.6, or 76.7. In column (b), assign an alternative contemporaneous annual emissions limitation in lb/mmBtu to each unit. In column (c), assign an annual heat input limitation in mmBtu to each unit. Continue to page 3 if necessary.

Plant Name	State	ID#	(a) Emission Limitation	(b) Alt. Contemp. Emission Limitation	(c) Annual Heat Input Limit
See Page 3.					

**STEP 2**

Use the formula to enter the Btu-weighted annual emission rate averaged over the units if they are operated in accordance with the proposed averaging plan and the Btu-weighted annual average emission rate for the same units if they are operated in compliance with 40 CFR 76.5, 76.6, or 76.7. The former must be less than or equal to the latter.

Btu-weighted annual emission rate averaged over the units if they are operated in accordance with the proposed averaging plan

Btu-weighted annual average emission rate for same units operated in compliance with 40 CFR 76.5, 76.6 or 76.7

0.47

≤

0.47

$$\frac{\sum_{i=1}^n (R_{Li} \times HI_i)}{\sum_{i=1}^n HI_i}$$

≤

$$\frac{\sum_{i=1}^n [R_{ii} \times HI_i]}{\sum_{i=1}^n HI_i}$$

Where,

- R<sub>U</sub> = Alternative contemporaneous annual emission limitation for unit i, in lb/mmBtu, as specified in column (b) of Step 1;
- R<sub>ii</sub> = Applicable emission limitation for unit i, in lb/mmBtu, as specified in column (a) of Step 1;
- HI<sub>i</sub> = Annual heat input for unit i, in mmBtu, as specified in column (c) of Step 1;
- n = Number of units in the averaging plan

Southern Company Averaging Plan  
Participating Plants

This plan is effective for calendar year \_\_\_\_\_ through calendar year \_\_\_\_\_ unless notification to terminate the plan is given.

**STEP 3**

Mark one of the two options and enter dates.

Treat this plan as  identical plans, each effective for one calendar year for the following calendar years: 2004, 2005, 2006, 2007 and 2008 unless notification to terminate one or more of these plans is given.

**STEP 4**

Read the special provisions and certification, enter the name of the designated representative, and sign and date.

**Special Provisions**

Emission Limitations

Each affected unit in an approved averaging plan is in compliance with the Acid Rain emission limitation for NO<sub>x</sub> under the plan only if the following requirements are met:

- (i) For each unit, the unit's actual annual average emission rate for the calendar year, in lb/mmBtu, is less than or equal to its alternative contemporaneous annual emission limitation in the averaging plan, and
  - (a) For each unit with an alternative contemporaneous emission limitation less stringent than the applicable emission limitation in 40 CFR 76.5, 76.6, or 76.7, the actual annual heat input for the calendar year does not exceed the annual heat input limit in the averaging plan,
  - (b) For each unit with an alternative contemporaneous emission limitation more stringent than the applicable emission limitation in 40 CFR 76.5, 76.6, or 76.7, the actual annual heat input for the calendar year is not less than the annual heat input limit in the averaging plan, or
- (ii) If one or more of the units does not meet the requirements of (i), the designated representative shall demonstrate, in accordance with 40 CFR 76.11(d)(1)(ii)(A) and (B), that the actual Btu-weighted annual average emission rate for the units in the plan is less than or equal to the Btu-weighted annual average rate for the same units had they each been operated, during the same period of time, in compliance with the applicable emission limitations in 40 CFR 76.5, 76.6, or 76.7.
- (iii) If there is a successful group showing of compliance under 40 CFR 76.11(d)(1)(ii)(A) and (B) for a calendar year, then all units in the averaging plan shall be deemed to be in compliance for that year with their alternative contemporaneous emission limitations and annual heat input limits under (i).

Liability


The owners and operators of a unit governed by an approved averaging plan shall be liable for any violation of the plan or this section at that unit or any other unit in the plan, including liability for fulfilling the obligations specified in part 77 of this chapter and sections 113 and 411 of the Act.

Termination

The designated representative may submit a notification to terminate an approved averaging plan, in accordance with 40 CFR 72.40(d), no later than October 1 of the calendar year for which the plan is to be terminated.

Certification

I am authorized to make this submission on behalf of the owners and operators of the affected source or affected units for which the submission is made. I certify under penalty of law that I have personally examined, and am familiar with, the statements and information submitted in this document and all its attachments. Based on my inquiry of those individuals with primary responsibility for obtaining the information, I certify that the statements and information are to the best of my knowledge and belief true, accurate, and complete. I am aware that there are significant penalties for submitting false statements and information or omitting required statements and information, including the possibility of fine or imprisonment.

Name	W. Paul Bowers	
Signature		Date 18 Nov 03'



Southern Company Averaging Plan Participating Plants  
 as Listed in Step 1.

**STEP 1**  
 Continue the  
 identification of  
 units from Step 1,  
 page 1, here.

Plant Name	State	ID #	(a)	(b)	(c)
			Emission Limitation	Alt. Contemp. Emission Limitation	Annual Heat Input Limit
Barry	AL	1	0.40	0.57	9,899,353
Barry	AL	2	0.40	0.57	8,827,877
Barry	AL	3	0.40	0.57	16,115,170
Barry	AL	4	0.40	0.45	26,192,590
Barry	AL	5	0.40	0.45	51,553,955
Bowen	GA	1	0.45	0.42	45,308,998
Bowen	GA	2	0.45	0.43	44,124,507
Bowen	GA	3	0.45	0.43	59,801,873
Bowen	GA	4	0.45	0.43	60,182,168
Branch	GA	1	0.68	0.99	13,188,369
Branch	GA	2	0.50	0.72	18,342,165
Branch	GA	3	0.68	0.84	26,905,201
Branch	GA	4	0.68	0.84	30,127,590
Crist	FL	4	0.45	0.52	5,591,320
Crist	FL	5	0.45	0.60	5,479,586
Crist	FL	6	0.50	0.45	21,086,630
Crist	FL	7	0.50	0.45	34,569,955
Daniel	MS	1	0.45	0.33	30,626,415
Daniel	MS	2	0.45	0.33	40,588,498
Gadsden	AL	1	0.45	0.70	2,711,382
Gadsden	AL	2	0.45	0.70	3,120,871
Gaston	AL	1	0.50	0.52	18,858,472
Gaston	AL	2	0.50	0.52	16,624,702
Gaston	AL	3	0.50	0.52	18,430,084
Gaston	AL	4	0.50	0.52	18,740,418
Gaston	AL	5	0.45	0.48	47,511,274
Gorgas	AL	6	0.46	0.55	4,410,470
Gorgas	AL	7	0.46	0.55	4,567,585
Gorgas	AL	8	0.40	0.50	9,965,627
Gorgas	AL	9	0.40	0.50	9,120,885
Gorgas	AL	10	0.40	0.35	45,358,619

**Southern Company Averaging Plan Participating Plants  
as Listed in Step 1.**

**NO<sub>x</sub> Averaging - Page 4**

Plant Name	State	ID #	(a) Emission Limitation	(b) Alt. Contemp. Emission Limitation	(c) Annual Heat Input Limit
Greene Co	AL	1	0.68	0.82	17,363,013
Greene Co	AL	2	0.46	0.50	19,145,604
Hammond	GA	1	0.50	0.83	6,007,234
Hammond	GA	2	0.50	0.83	5,605,352
Hammond	GA	3	0.50	0.83	6,386,989
Hammond	GA	4	0.50	0.45	26,721,145
Kraft	GA	1	0.45	0.58	3,578,077
Kraft	GA	2	0.45	0.58	3,745,253
Kraft	GA	3	0.45	0.58	7,231,649
L. Smith	FL	1	0.40	0.62	11,275,531
L. Smith	FL	2	0.40	0.44	9,250,882
McDonough	GA	1	0.45	0.42	18,180,480
McDonough	GA	2	0.45	0.42	17,346,682
McIntosh	GA	1	0.50	0.86	11,087,042
Miller	AL	1	0.46	0.37	47,413,738
Miller	AL	2	0.46	0.37	52,747,691
Miller	AL	3	0.46	0.28	44,422,395
Miller	AL	4	0.46	0.28	47,115,364
Mitchell	GA	3	0.45	0.62	6,652,246
Scherer	GA	1	0.40	0.50	52,573,864
Scherer	GA	2	0.40	0.50	55,563,600
Scherer	GA	3	0.45	0.29	53,365,333
Scherer	GA	4	0.40	0.30	70,093,731
Scholz	FL	1	0.50	0.68	2,365,039
Scholz	FL	2	0.50	0.77	2,429,511
Wansley	GA	1	0.45	0.41	53,141,279
Wansley	GA	2	0.45	0.42	49,741,786
Watson	MS	4	0.50	0.50	16,243,776
Watson	MS	5	0.50	0.65	35,347,433
Yates	GA	1	0.45	0.48	4,977,822
Yates	GA	2	0.45	0.48	4,976,029
Yates	GA	3	0.45	0.48	4,080,042
Yates	GA	4	0.45	0.40	6,554,969
Yates	GA	5	0.45	0.40	6,415,254
Yates	GA	6	0.45	0.33	19,199,860
Yates	GA	7	0.45	0.30	15,577,083

**STEP 1**  
Continue the  
identification of  
units from Step 1,  
page 1, here.

**Appendix A-1,**  
**Abbreviations, Definitions, Citations, and Identification Numbers**  
**(Version Dated 2/5/97)**

## Appendix A-1, Abbreviations, Acronyms, Citations, and Identification Numbers (version dated 02/05/97)

---

### Abbreviations and Acronyms:

°F: Degrees Fahrenheit  
BACT: Best Available Control Technology  
CFR: Code of Federal Regulations  
DEP: State of Florida, Department of Environmental Protection  
DARM: Division of Air Resource Management  
EPA: United States Environmental Protection Agency  
F.A.C.: Florida Administrative Code  
F.S.: Florida Statute  
ISO: International Standards Organization  
LAT: Latitude  
LONG: Longitude  
MMBtu: million British thermal units  
MW: Megawatt  
ORIS: Office of Regulatory Information Systems  
SOA: Specific Operating Agreement  
UTM: Universal Transverse Mercator

---

### Citations:

*The following examples illustrate the methods used in this permit to abbreviate and cite the references of rules, regulations, guidance memorandums, permit numbers, and ID numbers.*

#### Code of Federal Regulations:

*Example:* [40 CFR 60.334]

Where:	40	reference to	Title 40
	CFR	reference to	Code of Federal Regulations
	60	reference to	Part 60
	60.334	reference to	Regulation 60.334

#### Florida Administrative Code (F.A.C.) Rules:

*Example:* [Rule 62-213, F.A.C.]

Where:	62	reference to	Title 62
	62-213	reference to	Chapter 62-213
	62-213.205	reference to	Rule 62-213.205, F.A.C.

**ISO:** International Standards Organization refers to those conditions at 288 degrees K, 60 percent relative humidity, and 101.3 kilopascals pressure.

**Appendix A-1, Abbreviations, Acronyms, Citations, and Identification Numbers  
(version dated 02/05/97) (continued)**

---

**Identification Numbers:**

Facility Identification (ID) Number:

*Example:* Facility ID No.: 1050221

*Where:*

105 = 3-digit number code identifying the facility is located in Polk County  
0221 = 4-digit number assigned by state database.

Permit Numbers:

*Example:* 1050221-002-AV, or  
1050221-001-AC

*Where:*

AC = Air Construction Permit  
AV = Air Operation Permit (Title V Source)  
105 = 3-digit number code identifying the facility is located in Polk County  
0221 = 4-digit number assigned by permit tracking database  
001 or 002 = 3-digit sequential project number assigned by permit tracking database

*Example:* PSD-FL-185  
PA95-01  
AC53-208321

*Where:*

PSD = Prevention of Significant Deterioration Permit  
PA = Power Plant Siting Act Permit  
AC = old Air Construction Permit numbering

**APPENDIX CAM**

**Compliance Assurance Monitoring Requirements**

## **Compliance Assurance Monitoring Requirements**

Pursuant to Rule 62-213.440(1)(b)1.a., F.A.C., the CAM plans that are included in this appendix contain the monitoring requirements necessary to satisfy 40 CFR 64. Conditions 1. – 17. are generic conditions applicable to all emissions units that are subject to the CAM requirements. Specific requirements related to each emissions unit are contained in the attached tables, as submitted by the applicant and approved by the Department.

### **40 CFR 64.6 Approval of Monitoring.**

1. The attached CAM plan(s), as submitted by the applicant, is/are approved for the purposes of satisfying the requirements of 40 CFR 64.3.  
[40 CFR 64.6(a)]
2. The attached CAM plan(s) include the following information:
  - (i) The indicator(s) to be monitored (such as temperature, pressure drop, emissions, or similar parameter);
  - (ii) The means or device to be used to measure the indicator(s) (such as temperature measurement device, visual observation, or CEMS); and
  - (iii) The performance requirements established to satisfy 40 CFR 64.3(b) or (d), as applicable.[40 CFR 64.6(c)(1)]
3. The attached CAM plan(s) describe the means by which the owner or operator will define an exceedance of the permitted limits or an excursion from the stated indicator ranges and averaging periods for purposes of responding to (see **CAM Conditions 5. - 9.**) and reporting exceedances or excursions (see **CAM Conditions 10. - 14.**).  
[40 CFR 64.6(c)(2)]
4. The permittee is required to conduct the monitoring specified in the attached CAM plan(s) and shall fulfill the obligations specified in the conditions below (see **CAM Conditions 5. - 17.**).  
[40 CFR 64.6(c)(3)]

### **40 CFR 64.7 Operation of Approved Monitoring.**

5. Commencement of operation. The owner or operator shall conduct the monitoring required under this appendix upon the effective date of this Title V permit.  
[40 CFR 64.7(a)]
6. Proper maintenance. At all times, the owner or operator shall maintain the monitoring, including but not limited to, maintaining necessary parts for routine repairs of the monitoring equipment.  
[40 CFR 64.7(b)]
7. Continued operation. Except for, as applicable, monitoring malfunctions, associated repairs, and required quality assurance or control activities (including, as applicable, calibration checks and required zero and span adjustments), the owner or operator shall conduct all monitoring in continuous operation (or shall collect data at all required intervals) at all times that the pollutant-specific emissions unit is operating. Data recorded during monitoring malfunctions, associated repairs, and required quality assurance or control activities shall not be used for purposes of this part, including data averages and calculations, or fulfilling a minimum data availability requirement, if applicable. The owner or operator shall use all the data collected during all other periods in assessing the

operation of the control device and associated control system. A monitoring malfunction is any sudden, infrequent, not reasonably preventable failure of the monitoring to provide valid data. Monitoring failures that are caused in part by poor maintenance or careless operation are not malfunctions.

[40 CFR 64.7(c)]

**8. Response to excursions or exceedances.**

- a. Upon detecting an excursion or exceedance, the owner or operator shall restore operation of the pollutant-specific emissions unit (including the control device and associated capture system) to its normal or usual manner of operation as expeditiously as practicable in accordance with good air pollution control practices for minimizing emissions. The response shall include minimizing the period of any startup, shutdown or malfunction and taking any necessary corrective actions to restore normal operation and prevent the likely recurrence of the cause of an excursion or exceedance (other than those caused by excused startup or shutdown conditions, if allowed by this permit). Such actions may include initial inspection and evaluation, recording that operations returned to normal without operator action (such as through response by a computerized distribution control system), or any necessary follow-up actions to return operation to within the indicator range, designated condition, or below the applicable emission limitation or standard, as applicable.
- b. Determination of whether the owner or operator has used acceptable procedures in response to an excursion or exceedance will be based on information available, which may include but is not limited to, monitoring results, review of operation and maintenance procedures and records, and inspection of the control device, associated capture system, and the process.

[40 CFR 64.7(d)(1) & (2)]

**9. Documentation of need for improved monitoring.** If the owner or operator identifies a failure to achieve compliance with an emission limitation or standard for which the approved monitoring did not provide an indication of an excursion or exceedance while providing valid data, or the results of compliance or performance testing document a need to modify the existing indicator ranges or designated conditions, the owner or operator shall promptly notify the permitting authority and, if necessary, submit a proposed modification to the Title V permit to address the necessary monitoring changes. Such a modification may include, but is not limited to, reestablishing indicator ranges or designated conditions, modifying the frequency of conducting monitoring and collecting data, or the monitoring of additional parameters.

[40 CFR 64.7(e)]

**40 CFR 64.8 Quality Improvement Plan (QIP) Requirements.**

**10.** Based on the results of a determination made under **CAM Condition 8.a.**, above, the permitting authority may require the owner or operator to develop and implement a QIP. Consistent with **CAM Condition 4.**, an accumulation of exceedances or excursions exceeding 5 percent duration of a pollutant-specific emissions unit's operating time for a reporting period, may require the implementation of a QIP. The threshold may be set at a higher or lower percent or may rely on other criteria for purposes of indicating whether a pollutant-specific emissions unit is being maintained and operated in a manner consistent with good air pollution control practices.

[40 CFR 64.8(a)]

**11. Elements of a QIP:**

- a. The owner or operator shall maintain a written QIP, if required, and have it available for inspection.
- b. The plan initially shall include procedures for evaluating the control performance problems and, based on the results of the evaluation procedures, the owner or operator shall modify the plan to include procedures for conducting one or more of the following actions, as appropriate:



- (i) Improved preventive maintenance practices.
- (ii) Process operation changes.
- (iii) Appropriate improvements to control methods.
- (iv) Other steps appropriate to correct control performance.
- (v) More frequent or improved monitoring (only in conjunction with one or more steps under **CAM Condition 11.b(i)** through **(iv)**, above).

[40 CFR 64.8(b)]

12. If a QIP is required, the owner or operator shall develop and implement a QIP as expeditiously as practicable and shall notify the permitting authority if the period for completing the improvements contained in the QIP exceeds 180 days from the date on which the need to implement the QIP was determined.

[40 CFR 64.8(c)]

13. Following implementation of a QIP, upon any subsequent determination pursuant to **CAM Condition 8.b.**, the permitting authority may require that an owner or operator make reasonable changes to the QIP if the QIP is found to have:

- a. Failed to address the cause of the control device performance problems; or
- b. Failed to provide adequate procedures for correcting control device performance problems as expeditiously as practicable in accordance with good air pollution control practices for minimizing emissions.

[40 CFR 64.8(d)]

14. Implementation of a QIP shall not excuse the owner or operator of a source from compliance with any existing emission limitation or standard, or any existing monitoring, testing, reporting or recordkeeping requirement that may apply under federal, state, or local law, or any other applicable requirements under the Act.

[40 CFR 64.8(e)]

#### **40 CFR 64.9 Reporting And Recordkeeping Requirements.**

##### **15. General reporting requirements.**

- a. On and after the date specified in **CAM Condition 5.** by which the owner or operator must use monitoring that meets the requirements of this appendix, the owner or operator shall submit monitoring reports semi-annually to the permitting authority in accordance with Rule 62-213.440(1)(b)3.a., F.A.C.
- b. A report for monitoring under this part shall include, at a minimum, the information required under Rule 62-213.440(1)(b)3.a., F.A.C., and the following information, as applicable:
  - (i) Summary information on the number, duration and cause (including unknown cause, if applicable) of excursions or exceedances, as applicable, and the corrective actions taken;
  - (ii) Summary information on the number, duration and cause (including unknown cause, if applicable) for monitor downtime incidents (other than downtime associated with zero and span or other daily calibration checks, if applicable); and
  - (iii) A description of the actions taken to implement a QIP during the reporting period as specified in **CAM Conditions 10.** through **14.** Upon completion of a QIP, the owner or operator shall include in the next summary report documentation that the implementation of the plan has been completed and reduced the likelihood of similar levels of excursions or exceedances occurring.

[40 CFR 64.9(a)]

##### **16. General recordkeeping requirements.**

- a. The owner or operator shall comply with the recordkeeping requirements specified in Rule 62-213.440(1)(b)2., F.A.C. The owner or operator shall maintain records of monitoring data,

monitor performance data, corrective actions taken, any written quality improvement plan required pursuant to **CAM Conditions 10.** through **14.**, and any activities undertaken to implement a quality improvement plan, and other supporting information required to be maintained under this part (such as data used to document the adequacy of monitoring, or records of monitoring maintenance or corrective actions).

- b. Instead of paper records, the owner or operator may maintain records on alternative media, such as microfilm, computer files, magnetic tape disks, or microfiche, provided that the use of such alternative media allows for expeditious inspection and review, and does not conflict with other applicable recordkeeping requirements.

[40 CFR 64.9(b)]

**40 CFR 64.10 Savings Provisions.**

17. It should be noted that nothing in this appendix shall:

- a. Excuse the owner or operator of a source from compliance with any existing emission limitation or standard, or any existing monitoring, testing, reporting or recordkeeping requirement that may apply under federal, state, or local law, or any other applicable requirements under the Act. The requirements of this appendix shall not be used to justify the approval of monitoring less stringent than the monitoring which is required under separate legal authority and are not intended to establish minimum requirements for the purpose of determining the monitoring to be imposed under separate authority under the Act, including monitoring in permits issued pursuant to title I of the Act. The purpose of this part is to require, as part of the issuance of a permit under Title V of the Act, improved or new monitoring at those emissions units where monitoring requirements do not exist or are inadequate to meet the requirements of this part.
- b. Restrict or abrogate the authority of the Administrator or the permitting authority to impose additional or more stringent monitoring, recordkeeping, testing, or reporting requirements on any owner or operator of a source under any provision of the Act, including but not limited to sections 114(a)(1) and 504(b), or state law, as applicable.
- c. Restrict or abrogate the authority of the Administrator or permitting authority to take any enforcement action under the Act for any violation of an applicable requirement or of any person to take action under section 304 of the Act.

[40 CFR 64.10]

## **Emissions Unit -001**

**1,944.8 MMBtu/Hr Coal, Gas and Oil-Fired Boiler  
Particulate Matter Emissions Controlled By An ESP**

## **Monitoring Approach**

**TABLE 1. MONITORING APPROACH FOR UNIT -001**

		<b><u>Compliance Indicator</u></b>
I.	Indicator	Opacity of ESP exhaust.
	Measurement Approach	COMS in the ESP outlet duct.
II.	Indicator Range	An excursion is defined as any 1-hour opacity average greater than 30% (other than periods of start up, shut down or malfunction). Excursions trigger an inspection, any corrective action necessary to lower the opacity, and a documentation of the event.  Note: Based on data submitted by the applicant, an exceedance of the PM limit will likely occur if the opacity is greater than 34% for 3 hours.
III.	Performance Criteria	
	A. Data Representativeness	The COMS were installed at representative locations in the ESP exhaust per 40 CFR 60, Appendix B, PS-1.
	B. Verification of Operational Status	Results of initial COMS performance evaluation conducted per PS-1.
	C. QA/QC Practices and Criteria	The COMS were initially installed and evaluated per PS-1. Zero and span drift are checked daily and a quarterly filter audit is performed.
	D. Monitoring Frequency	The opacity of the cold-side ESP outlet duct is monitored continuously.
	E. Data Collection Procedures	The DAS retains all 6-minute and hourly average opacity data.
	F. Averaging Period	The 6-minute opacity data is used to calculate 1-hour averages.

## **Emissions Unit -002**

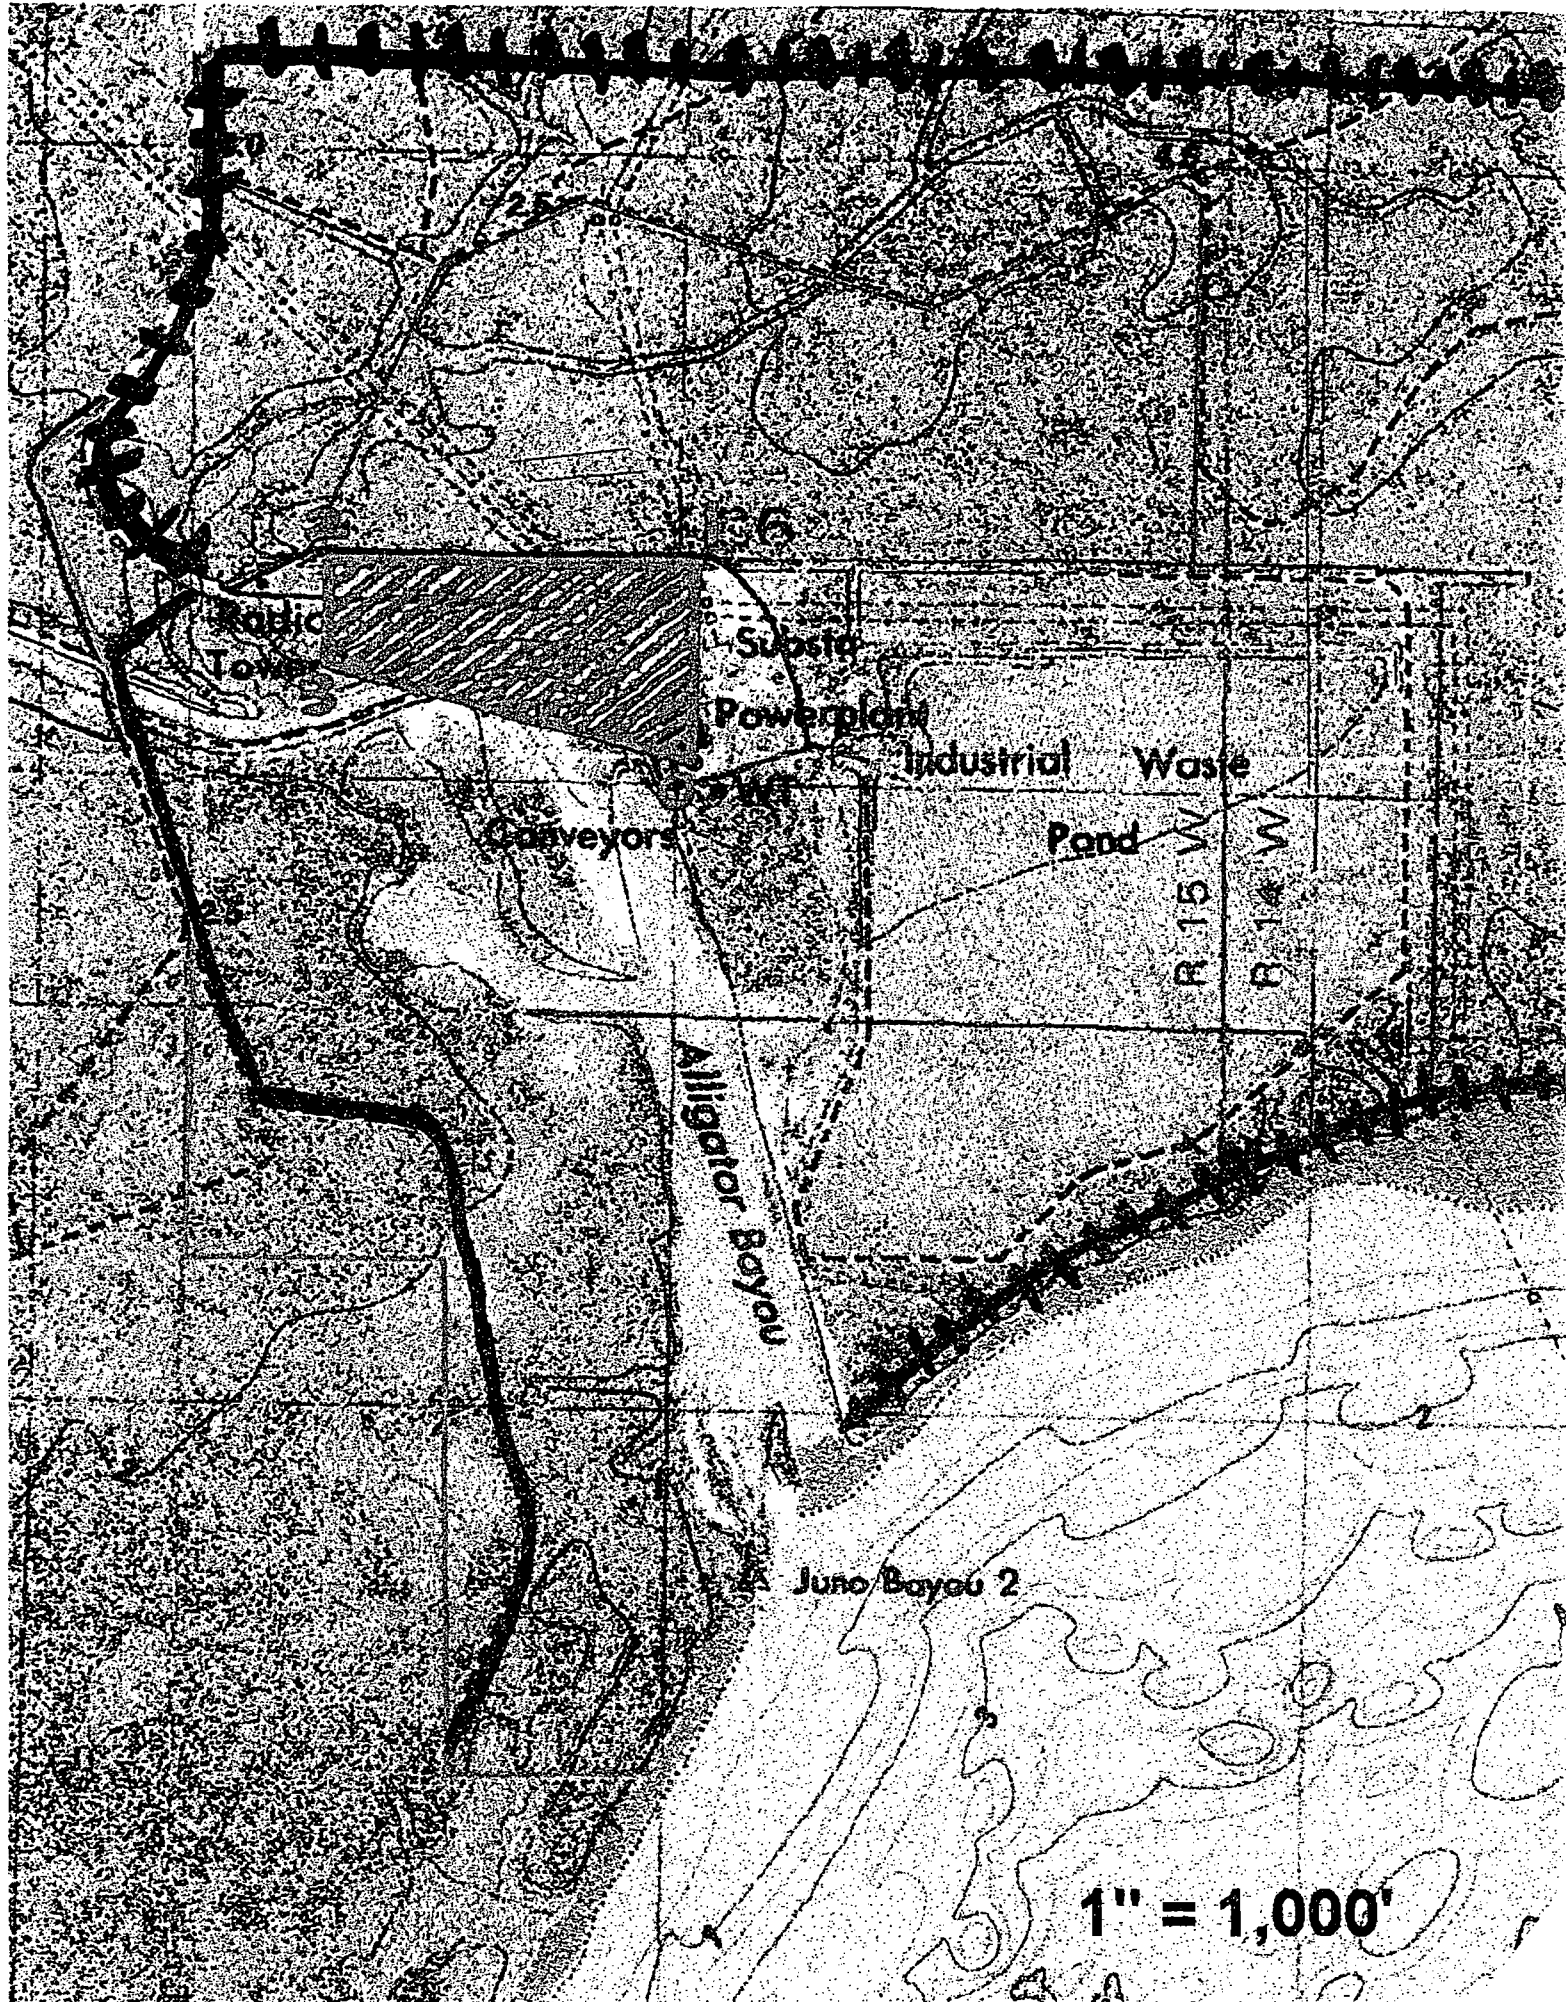
**1,246.2 MMBtu/Hr Coal, Gas and Oil-Fired Boiler  
Particulate Matter Emissions Controlled By An ESP**

## **Monitoring Approach**

**TABLE 2. MONITORING APPROACH FOR UNIT -002**

		<b>Compliance Indicator</b>
I.	Indicator	Opacity of ESP exhaust.
	Measurement Approach	COMS in the ESP outlet duct.
II.	Indicator Range	An excursion is defined as any 1-hour opacity average greater than 24% (other than periods of start up, shut down or malfunction). Excursions trigger an inspection, any corrective action necessary to lower the opacity, and a documentation of the event.  Note: Based on data submitted by the applicant, an exceedance of the PM limit will likely occur if the opacity is greater than 27% for 3 hours.
III.	Performance Criteria	
	A. Data Representativeness	The COMS were installed at representative locations in the ESP exhaust per 40 CFR 60, Appendix B, PS-1.
	B. Verification of Operational Status	Results of initial COMS performance evaluation conducted per PS-1.
	C. QA/QC Practices and Criteria	The COMS were initially installed and evaluated per PS-1. Zero and span drift are checked daily and a quarterly filter audit is performed.
	D. Monitoring Frequency	The opacity of the cold-side ESP outlet duct is monitored continuously.
	F. Data Collection Procedures	The DAS retains all 6-minute and hourly average opacity data.
	F. Averaging Period	The 6-minute opacity data is used to calculate 1-hour averages.

**Appendix PA-1, Patrol Area**



Radio  
Tower

Subsite

Powerplant

Industrial Waste

Conveyors

Pond

R 15 W

R 14 W

Alligator Bayou

Juno Bayou 2

1" = 1,000'



**Appendix SO-1, Secretarial ORDER(s)**

**Issued in Accordance With to Rule 62-296.405(1)(a), F.A.C.  
Reduces the Frequency of Particulate Matter Testing To No Less Than Once Annually  
(While Maintaining an Allowable Visible Emissions of 40 Percent Opacity)**

<u>Unit</u>	<u>Issue Date</u>
-001	10/18/85
-002	10/18/85

BEFORE THE STATE OF FLORIDA  
DEPARTMENT OF ENVIRONMENTAL REGULATION

In the Matter of: )  
 )  
Petition for Reduction in )  
Semi-Annual Particulate )  
Emissions Compliance Testing, )  
Smith Unit 1; )  
GULF POWER COMPANY, )  
 )  
Petitioner. )  
\_\_\_\_\_ )

ORDER

On May 11, 1984, the Petitioner, GULF POWER COMPANY, filed a Petition for Reduction in Semi-Annual Particulate Emissions Compliance Testing pursuant to Florida Administrative Code Rule 17-2.600(5)(b)1. for the following fossil fuel steam generating unit:

Smith Unit 1

Pursuant to Florida Administrative Code Rule 17-2.600(5)(b)1., Petitioner initially elected to conduct quarterly particulate emission compliance tests on March 6, 1980. On March 30, 1982, Petitioner filed a petition for reduction from quarterly to annual particulate emissions compliance testing for Smith Unit 1. By order of the Department on November 7, 1982, Petitioner was granted approval to reduce the frequency of particulate compliance testing, but only to semi-annual. Semi-annual particulate emission testing was initiated on February 15, 1983 and has continued to the present.

Florida Administrative Code Rule 17-2.600(5)(b)1. provides that the Department may reduce the frequency of particulate testing upon a demonstration that the particulate standard of 0.1 pounds per million Btu heat input has been regularly met. The petition and supporting documentation submitted by Petitioner indicate that, since March 19, 1980, Petitioner has regularly met the particulate standard. It is therefore,

ORDERED that the Petition for Reduction in Semi-Annual Particulate Emissions Compliance Testing is GRANTED. Petitioner

may commence testing on an annual basis upon submission of the test results from its next regularly scheduled semi-annual test, provided the results of that test meet the particulate standard. Failure of Smith Unit 1 to meet either the particulate standard or the 40% opacity standard in the future shall constitute grounds for revocation of this authorization.

Persons whose substantial interests are affected by the above proposed agency action has a right, pursuant to Section 120.57, Florida Statutes, to petition for an administrative determination (hearing) on the proposed action. The Petition must conform to the requirements of Chapters 17-103 and 28-5, Florida Administrative Code, and must be filed (received) with the Department's Office of General Counsel, 2600 Elair Stone Road, Tallahassee, Florida 32301, within fourteen (14) days of publication of this notice. Failure to file a petition within the fourteen (14) days constitutes a waiver of any right such person has to an administrative determination (hearing) pursuant to Section 120.57, Florida Statutes.

If a petition is filed, the administrative hearing process is designed to formulate agency action. Accordingly, the Department's final action may be different from the proposed agency action. Persons whose substantial interests will be affected by any decision of the Department have the right to intervene in the proceeding. A petition for intervention must be filed pursuant to Model Rule 28-5.207, Florida Administrative Code, at least five (5) days before the final hearing and be filed with the Hearing Officer if one has been assigned at the Division of Administrative Hearings, Department of Administration, 2009 Apalachee Parkway, Tallahassee, Florida 32301. If no Hearing Officer has been assigned, the petition is to be filed with the Department's Office of General Counsel, 2600 Blair Stone Road, Tallahassee, Florida 32301. Failure to petition to intervene within the allowed time frame constitutes a waiver of any right such person has to an administrative determination (hearing) under Section 120.57, Florida Statutes.

**BEST AVAILABLE COPY**


DONE AND ORDERED this 18 day of October, 1985, in  
Tallahassee, Florida.

STATE OF FLORIDA DEPARTMENT  
OF ENVIRONMENTAL REGULATION

  
\_\_\_\_\_  
VICTORIA J. TSCHINKEL  
Secretary


FILING AND ACKNOWLEDGEMENT  
FILED, on this date, pursuant to §120.32 (9),  
Florida Statutes, with the designated Depart-  
ment Clerk, receipt of which is hereby acknow-  
ledged.

Twin Towers Office Building  
2600 Blair Stone Road  
Tallahassee, Florida 32301  
Telephone: (904) 488-4805

  
\_\_\_\_\_  
Clerk                      10/18/85  
Date

CERTIFICATE OF SERVICE

I HEREBY CERTIFY that a true copy of the foregoing Order has been furnished by U.S. Mail to George O. Layman, Gulf Power Company, Post Office Box 1151, Pensacola, Florida 32520, this 21 day of October, 1985.

  
E. GARY EARLY  
Assistant General Counsel

STATE OF FLORIDA DEPARTMENT  
OF ENVIRONMENTAL REGULATION  
Twin Towers Office Building  
2600 Blair Stone Road  
Tallahassee, Florida 32301  
Telephone: (904) 488-9730

BEFORE THE STATE OF FLORIDA  
DEPARTMENT OF ENVIRONMENTAL REGULATION

In the Matter of: )  
 )  
Petition for Reduction in )  
Semi-Annual Particulate )  
Emissions Compliance Testing, )  
Smith Unit 2; )  
GULF POWER COMPANY, )  
 )  
Petitioner. )  
\_\_\_\_\_ )

ORDER

On May 11, 1984, the Petitioner, GULF POWER COMPANY, filed a Petition for Reduction in Semi-Annual Particulate Emissions Compliance Testing pursuant to Florida Administrative Code Rule 17-2.600(5)(b)1. for the following fossil fuel steam generating unit:

Smith Unit 2

Pursuant to Florida Administrative Code Rule 17-2.600(5)(b)1., Petitioner initially elected to conduct quarterly particulate emission compliance tests on March 6, 1980. On March 30, 1982, Petitioner filed a petition for reduction from quarterly to annual particulate emissions compliance testing for Smith Unit 2. By order of the Department on November 7, 1982, Petitioner was granted approval to reduce the frequency of particulate compliance testing, but only to semi-annual. Semi-annual particulate emission testing was initiated on March 21, 1983 and has continued to the present.

Florida Administrative Code Rule 17-2.600(5)(b)1. provides that the Department may reduce the frequency of particulate testing upon a demonstration that the particulate standard of 0.1 pounds per million Btu heat input has been regularly met. The petition and supporting documentation submitted by Petitioner indicate that, since March 18, 1980, Petitioner has regularly met the particulate standard with the exception of one test conducted on November 17, 1982. The single failed test does not appear to be representative of normal conditions at Smith Unit 2. A retest on December 17, 1982, showed compliance and a satisfactory explanation for the failure was provided by Petitioner. It is therefore,

ORDERED that the Petition for Reduction in Semi-Annual Particulate Emissions Compliance Testing is GRANTED. Petitioner may commence testing on an annual basis upon submission of the test results from its next regularly scheduled semi-annual test, provided the results of that test meet the particulate standard. Failure of Smith Unit 2 to meet either the particulate standard or the 40% opacity standard in the future shall constitute grounds for revocation of this authorization.

Persons whose substantial interests are affected by the above proposed agency action has a right, pursuant to Section 120.57, Florida Statutes, to petition for an administrative determination (hearing) on the proposed action. The Petition must conform to the requirements of Chapters 17-103 and 28-5, Florida Administrative Code, and must be filed (received) with the Department's Office of General Counsel, 2600 Blair Stone Road, Tallahassee, Florida 32301, within fourteen (14) days of publication of this notice. Failure to file a petition within the fourteen (14) days constitutes a waiver of any right such person has to an administrative determination (hearing) pursuant to Section 120.57, Florida Statutes.

If a petition is filed, the administrative hearing process is designed to formulate agency action. Accordingly, the Department's final action may be different from the proposed agency action. Persons whose substantial interests will be affected by any decision of the Department have the right to intervene in the proceeding. A petition for intervention must be filed pursuant to Model Rule 28-5.207, Florida Administrative Code, at least five (5) days before the final hearing and be filed with the Hearing Officer if one has been assigned at the Division of Administrative Hearings, Department of Administration, 2009 Apalachee Parkway, Tallahassee, Florida 32301. If no Hearing Officer has been assigned, the petition is to be filed with the Department's Office of General Counsel, 2600 Blair Stone Road, Tallahassee, Florida 32301. Failure to petition to intervene within the allowed time frame constitutes a waiver of any right

**BEST AVAILABLE COPY**

such person has to an administrative determination (hearing) under  
Section 120.57, Florida Statutes.


DONE AND ORDERED this 18 day of October, 1985, in  
Tallahassee, Florida.

STATE OF FLORIDA DEPARTMENT  
OF ENVIRONMENTAL REGULATION

  
VICTORIA J. TECHINKEL  
Secretary

FILING AND ACKNOWLEDGEMENT

FILED, on this date, pursuant to §120.52 (9),  
Florida Statutes, with the designated Depart-  
ment Clerk, receipt of which is hereby acknow-  
ledged.

  
Clerk


10-13-85  
Date

Twin Towers Office Building  
2600 Blair Stone Road  
Tallahassee, Florida 32301  
Telephone: (904) 488-4805



CERTIFICATE OF SERVICE

I HEREBY CERTIFY that a true copy of the foregoing Order has been furnished by U.S. Mail to George O. Layman, Gulf Power Company, Post Office Box 1151, Pensacola, Florida 32520, this 21 day of October, 1985.

  
E. GARY EARLY  
Assistant General Counsel

STATE OF FLORIDA DEPARTMENT  
OF ENVIRONMENTAL REGULATION  
Twin Towers Office Building  
2600 Blair Stone Road  
Tallahassee, Florida 32301  
Telephone: (904) 488-9730

Gulf Power Company  
Lansing Smith Electric Generating Plant

FINAL Permit No.: 0050014-010-AV  
Facility ID No.: 0050014

**Appendix SS-1,**  
**Stack Sampling Facilities (version dated 10/7/96)**

## APPENDIX SS-1, STACK SAMPLING FACILITIES (version dated 10/07/96)

---

Stack Sampling Facilities Provided by the Owner of an Emissions Unit. This section describes the minimum requirements for stack sampling facilities that are necessary to sample point emissions units. Sampling facilities include sampling ports, work platforms, access to work platforms, electrical power, and sampling equipment support. Emissions units must provide these facilities at their expense. All stack sampling facilities must meet any Occupational Safety and Health Administration (OSHA) Safety and Health Standards described in 29 CFR Part 1910, Subparts D and E.

(a) Permanent Test Facilities. The owner or operator of an emissions unit for which a compliance test, other than a visible emissions test, is required on at least an annual basis, shall install and maintain permanent stack sampling facilities.

(b) Temporary Test Facilities. The owner or operator of an emissions unit that is not required to conduct a compliance test on at least an annual basis may use permanent or temporary stack sampling facilities. If the owner chooses to use temporary sampling facilities on an emissions unit, and the Department elects to test the unit, such temporary facilities shall be installed on the emissions unit within 5 days of a request by the Department and remain on the emissions unit until the test is completed.

(c) Sampling Ports.

1. All sampling ports shall have a minimum inside diameter of 3 inches.
2. The ports shall be capable of being sealed when not in use.
3. The sampling ports shall be located in the stack at least 2 stack diameters or equivalent diameters downstream and at least 0.5 stack diameter or equivalent diameter upstream from any fan, bend, constriction or other flow disturbance.
4. For emissions units for which a complete application to construct has been filed prior to December 1, 1980, at least two sampling ports, 90 degrees apart, shall be installed at each sampling location on all circular stacks that have an outside diameter of 15 feet or less. For stacks with a larger diameter, four sampling ports, each 90 degrees apart, shall be installed. For emissions units for which a complete application to construct is filed on or after December 1, 1980, at least two sampling ports, 90 degrees apart, shall be installed at each sampling location on all circular stacks that have an outside diameter of 10 feet or less. For stacks with larger diameters, four sampling ports, each 90 degrees apart, shall be installed. On horizontal circular ducts, the ports shall be located so that the probe can enter the stack vertically, horizontally or at a 45 degree angle.

5. On rectangular ducts, the cross sectional area shall be divided into the number of equal areas in accordance with EPA Method 1. Sampling ports shall be provided which allow access to each sampling point. The ports shall be located so that the probe can be inserted perpendicular to the gas flow.

(d) Work Platforms.

1. Minimum size of the working platform shall be 24 square feet in area. Platforms shall be at least 3 feet wide.

2. On circular stacks with 2 sampling ports, the platform shall extend at least 110 degrees around the stack.

3. On circular stacks with more than two sampling ports, the work platform shall extend 360 degrees around the stack.

4. All platforms shall be equipped with an adequate safety rail (ropes are not acceptable), toeboard, and hinged floor-opening cover if ladder access is used to reach the platform. The safety rail directly in line with the sampling ports shall be removable so that no obstruction exists in an area 14 inches below each sample port and 6 inches on either side of the sampling port.

(e) Access to Work Platform.

**APPENDIX SS-1, STACK SAMPLING FACILITIES (version dated 10/07/96)**  
**(continued)**

---

1. Ladders to the work platform exceeding 15 feet in length shall have safety cages or fall arresters with a minimum of 3 compatible safety belts available for use by sampling personnel.

2. Walkways over free-fall areas shall be equipped with safety rails and toeboards.

**(f) Electrical Power.**

1. A minimum of two 120-volt AC, 20-amp outlets shall be provided at the sampling platform within 20 feet of each sampling port.

2. If extension cords are used to provide the electrical power, they shall be kept on the plant's property and be available immediately upon request by sampling personnel.

**(g) Sampling Equipment Support.**

1. A three-quarter inch eyebolt and an angle bracket shall be attached directly above each port on vertical stacks and above each row of sampling ports on the sides of horizontal ducts.

a. The bracket shall be a standard 3 inch x 3 inch x one-quarter inch equal-legs bracket which is 1 and one-half inches wide. A hole that is one-half inch in diameter shall be drilled through the exact center of the horizontal portion of the bracket. The horizontal portion of the bracket shall be located 14 inches above the centerline of the sampling port.

b. A three-eighth inch bolt which protrudes 2 inches from the stack may be substituted for the required bracket. The bolt shall be located 15 and one-half inches above the centerline of the sampling port.

c. The three-quarter inch eyebolt shall be capable of supporting a 500 pound working load. For stacks that are less than 12 feet in diameter, the eyebolt shall be located 48 inches above the horizontal portion of the angle bracket. For stacks that are greater than or equal to 12 feet in diameter, the eyebolt shall be located 60 inches above the horizontal portion of the angle bracket. If the eyebolt is more than 120 inches above the platform, a length of chain shall be attached to it to bring the free end of the chain to within safe reach from the platform.

2. A complete monorail or dualrail arrangement may be substituted for the eyebolt and bracket.

3. When the sample ports are located in the top of a horizontal duct, a frame shall be provided above the port to allow the sample probe to be secured during the test.

[Rule 62-297.310(6), F.A.C.]

**Appendix TV-4,**  
**Title V Conditions (version dated 2/12/02)**

## APPENDIX TV-4, TITLE V CONDITIONS (version dated 02/12/02)

[Note: This attachment includes "canned conditions" developed from the "Title V Core List."]

{Permitting note: APPENDIX TV-4, TITLE V CONDITIONS, is distributed to the permittee only. Other persons requesting copies of these conditions shall be provided one copy when requested or otherwise appropriate.}

### Chapter 62-4, F.A.C.

1. **Not federally enforceable. General Prohibition.** Any stationary installation which will reasonably be expected to be a source of pollution shall not be operated, maintained, constructed, expanded, or modified without the appropriate and valid permits issued by the Department, unless the source is exempted by Department rule. The Department may issue a permit only after it receives reasonable assurance that the installation will not cause pollution in violation of any of the provisions of Chapter 403, F.S., or the rules promulgated thereunder. A permitted installation may only be operated, maintained, constructed, expanded or modified in a manner that is consistent with the terms of the permit.

[Rule 62-4.030, Florida Administrative Code (F.A.C.); Section 403.087, Florida Statute (F.S.)]

2. **Not federally enforceable. Procedures to Obtain Permits and Other Authorizations: Applications.**

(1) Any person desiring to obtain a permit from the Department shall apply on forms prescribed by the Department and shall submit such additional information as the Department by law may require.

(2) All applications and supporting documents shall be filed in quadruplicate with the Department.

(3) To ensure protection of public health, safety, and welfare, any construction, modification, or operation of an installation which may be a source of pollution, shall be in accordance with sound professional engineering practices pursuant to Chapter 471, F.S. All applications for a Department permit shall be certified by a professional engineer registered in the State of Florida except, when the application is for renewal of an air pollution operation permit at a non-Title V source as defined in Rule 62-210.200, F.A.C., or where professional engineering is not required by Chapter 471, F.S. Where required by Chapter 471 or 492, F.S., applicable portions of permit applications and supporting documents which are submitted to the Department for public record shall be signed and sealed by the professional(s) who prepared or approved them.

(4) Processing fees for air construction permits shall be in accordance with Rule 62-4.050(4), F.A.C.

(5)(a) To be considered by the Department, each application must be accompanied by the proper processing fee. The fee shall be paid by check, payable to the Department of Environmental Protection. The fee is non-refundable except as provided in Section 120.60, F.S., and in this section.

(c) Upon receipt of the proper application fee, the permit processing time requirements of Sections 120.60(2) and 403.0876, F.S., shall begin.

(d) If the applicant does not submit the required fee within ten days of receipt of written notification, the Department shall either return the unprocessed application or arrange with the applicant for the pick up of the application.

(e) If an applicant submits an application fee in excess of the required fee, the permit processing time requirements of Sections 120.60(2) and 403.0876, F.S., shall begin upon receipt, and the Department shall refund to the applicant the amount received in excess of the required fee.

(6) Any substantial modification to a complete application shall require an additional processing fee determined pursuant to the schedule set forth in Rule 62-4.050, F.A.C., and shall restart the time requirements of Sections 120.60 and 403.0876, F.S. For purposes of this Subsection, the term "substantial modification" shall mean a modification which is reasonably expected to lead to substantially different environmental impacts which require a detailed review.

(7) Modifications to existing permits proposed by the permittee which require substantial changes in the existing permit or require substantial evaluation by the Department of potential impacts of the proposed modifications shall require the same fee as a new application for the same time duration except for modification under Chapter 62-45, F.A.C.

[Rule 62-4.050, F.A.C.]

3. **Standards for Issuing or Denying Permits.** Except as provided at Rule 62-213.460, F.A.C., the issuance of a permit does not relieve any person from complying with the requirements of Chapter 403, F.S., or Department rules.

[Rule 62-4.070(7), F.A.C.]

## APPENDIX TV-4, TITLE V CONDITIONS (version dated 02/12/02) (continued)

---

### 4. Modification of Permit Conditions.

(1) For good cause and after notice and an administrative hearing, if requested, the Department may require the permittee to conform to new or additional conditions. The Department shall allow the permittee a reasonable time to conform to the new or additional conditions and on application of the permittee the Department may grant additional time. For the purpose of this section, good cause shall include, but not be limited to, any of the following: (also, see Condition No. 38.)

(a) A showing that an improvement in effluent or emission quality or quantity can be accomplished because of technological advances without unreasonable hardship.

(b) A showing that a higher degree of treatment is necessary to effect the intent and purpose of Chapter 403, F.S.

(c) A showing of any change in the environment or surrounding conditions that requires a modification to conform to applicable air or water quality standards.

(e) Adoption or revision of Florida Statutes, rules, or standards which require the modification of a permit condition for compliance.

(2) A permittee may request a modification of a permit by applying to the Department.

(3) A permittee may request that a permit be extended as a modification of the permit. Such a request must be submitted to the Department in writing before the expiration of the permit. Upon timely submittal of a request for extension, unless the permit automatically expires by statute or rule, the permit will remain in effect until final agency action is taken on the request. For construction permits, an extension shall be granted if the applicant can demonstrate reasonable assurances that, upon completion, the extended permit will comply with the standards and conditions required by applicable regulation. For all other permits, an extension shall be granted if the applicant can demonstrate reasonable assurances that the extended permit will comply with the standards and conditions applicable to the original permit. A permit for which the permit application fee was prorated in accordance with Rule 62-4.050(4)(1), F.A.C., shall not be extended. In no event shall a permit be extended or remain in effect longer than the time limits established by statute or rule.

[Rule 62-4.080, F.A.C.]

5. Renewals. Prior to 180 days before the expiration of a permit issued pursuant to Chapter 62-213, F.A.C., the permittee shall apply for a renewal of a permit using forms incorporated by reference in the specific rule chapter for that kind of permit. A renewal application shall be timely and sufficient. If the application is submitted prior to 180 days before expiration of the permit, it will be considered timely and sufficient. If the renewal application is submitted at a later date, it will not be considered timely and sufficient unless it is submitted and made complete prior to the expiration of the operation permit. When the application for renewal is timely and sufficient, the existing permit shall remain in effect until the renewal application has been finally acted upon by the Department or, if there is court review of the Department's final agency action, until a later date is required by Section 120.60, F.S., provided that, for renewal of a permit issued pursuant to Chapter 62-213, F.A.C., the applicant complies with the requirements of Rules 62-213.420(1)(b)3. and 4., F.A.C.

[Rule 62-4.090, F.A.C.]

### 6. Suspension and Revocation.

(1) Permits shall be effective until suspended, revoked, surrendered, or expired and shall be subject to the provisions of Chapter 403, F.S., and rules of the Department.

(2) Failure to comply with pollution control laws and rules shall be grounds for suspension or revocation.

(3) A permit issued pursuant to Chapter 62-4, F.A.C., shall not become a vested property right in the permittee. The Department may revoke any permit issued by it if it finds that the permit holder or the his agent:

(a) Submitted false or inaccurate information in his application or operational reports.

(b) Has violated law, Department orders, rules or permit conditions.

(c) Has failed to submit operational reports or other information required by Department rules.

(d) Has refused lawful inspection under Section 403.091, F.S.

(4) No revocation shall become effective except after notice is served by personal services, certified mail, or newspaper notice pursuant to Section 120.60(7), F.S., upon the person or persons named therein and a hearing held if requested within the time specified in the notice. The notice shall specify the provision of the law, or rule alleged to be violated, or the permit condition or Department order alleged to be violated, and the facts alleged to constitute a violation thereof.

[Rule 62-4.100, F.A.C.]

**APPENDIX TV-4, TITLE V CONDITIONS (version dated 02/12/02) (continued)**

---

7. **Not federally enforceable.** Financial Responsibility. The Department may require an applicant to submit proof of financial responsibility and may require the applicant to post an appropriate bond to guarantee compliance with the law and Department rules. [Rule 62-4.110, F.A.C.]

8. Transfer of Permits.

(1) Within 30 days after the sale or legal transfer of a permitted facility, an "Application for Transfer of Permit" (DEP Form 62-1.201(1)) must be submitted to the Department. This form must be completed with the notarized signatures of both the permittee and the proposed new permittee. For air permits, an "Application for Transfer of Air Permit" (DEP Form 62-210.900(7)) shall be submitted.

(2) The Department shall approve the transfer of a permit unless it determines that the proposed new permittee cannot provide reasonable assurances that conditions of the permit will be met. The determination shall be limited solely to the ability of the new permittee to comply with the conditions of the existing permit, and it shall not concern the adequacy of these permit conditions. If the Department proposes to deny the transfer, it shall provide both the permittee and the proposed new permittee a written objection to such transfer together with notice of a right to request a Chapter 120, F.S., proceeding on such determination.

(3) Within 30 days of receiving a properly completed Application for Transfer of Permit form, the Department shall issue a final determination. The Department may toll the time for making a determination on the transfer by notifying both the permittee and the proposed new permittee that additional information is required to adequately review the transfer request. Such notification shall be served within 30 days of receipt of an Application for Transfer of Permit form, completed pursuant to Rule 62-4.120(1), F.A.C. If the Department fails to take action to approve or deny the transfer within 30 days of receipt of the completed Application for Transfer of Permit form, or within 30 days of receipt of the last item of timely requested additional information, the transfer shall be deemed approved.

(4) The permittee is encouraged to apply for a permit transfer prior to the sale or legal transfer of a permitted facility. However, the transfer shall not be effective prior to the sale or legal transfer.

(5) Until this transfer is approved by the Department, the permittee and any other person constructing, operating, or maintaining the permitted facility shall be liable for compliance with the terms of the permit. The permittee transferring the permit shall remain liable for corrective actions that may be required as a result of any violations occurring prior to the sale or legal transfer of the facility.

[Rule 62-4.120, F.A.C.]

9. Plant Operation-Problems. If the permittee is temporarily unable to comply with any of the conditions of the permit due to breakdown of equipment or destruction by hazard of fire, wind or by other cause, the permittee shall immediately notify the Department. Notification shall include pertinent information as to the cause of the problem, and what steps are being taken to correct the problem and to prevent its recurrence, and where applicable, the owner's intent toward reconstruction of destroyed facilities. Such notification does not release the permittee from any liability for failure to comply with Department rules. (also, see Condition No. 10.).

[Rule 62-4.130, F.A.C.]

10. For purposes of notification to the Department pursuant to Condition No. 9., Condition No. 12.(8), and Rule 62-4.130, F.A.C., Plant Operation-Problems, "immediately" shall mean the same day, if during a workday (i.e., 8:00 a.m. - 5:00 p.m.), or the first business day after the incident, excluding weekends and holidays; and, for purposes of 40 CFR 70.6(a)(3)(ii)(B), "prompt" shall have the same meaning as "immediately". [also, see Conditions Nos. 9. and 12.(8).]

[40 CFR 70.6(a)(3)(iii)(B)]

11. **Not federally enforceable.** Review. Failure to request a hearing within 14 days of receipt of notice of proposed or final agency action on a permit application or as otherwise required in Chapter 62-103, F.A.C., shall be deemed a waiver of the right to an administrative hearing.

[Rule 62-4.150, F.A.C.]



APPENDIX TV-4, TITLE V CONDITIONS (version dated 02/12/02) (continued)

---

12. Permit Conditions. All permits issued by the Department shall include the following general conditions:

- (1) The terms, conditions, requirements, limitations and restrictions set forth in this permit, are "permit conditions" and are binding and enforceable pursuant to Sections 403.141, 403.727, or 403.859 through 403.861, F.S. The permittee is placed on notice that the Department will review this permit periodically and may initiate enforcement action for any violation of these conditions.
- (2) This permit is valid only for the specific processes and operations applied for and indicated in the approved drawings or exhibits. Any unauthorized deviation from the approved drawings, exhibits, specifications, or conditions of this permit may constitute grounds for revocation and enforcement action by the Department.
- (3) As provided in Subsections 403.087(7) and 403.722(5), F.S., the issuance of this permit does not convey any vested rights or any exclusive privileges. Neither does it authorize any injury to public or private property or any invasion of personal rights, nor any infringement of federal, state, or local laws or regulations. This permit is not a waiver of or approval of any other Department permit that may be required for other aspects of the total project which are not addressed in this permit.
- (4) This permit conveys no title to land or water, does not constitute State recognition or acknowledgment of title, and does not constitute authority for the use of submerged lands unless herein provided and the necessary title or leasehold interests have been obtained from the State. Only the Trustees of the Internal Improvement Trust Fund may express State opinion as to title.
- (5) This permit does not relieve the permittee from liability for harm or injury to human health or welfare, animal, or plant life, or property caused by the construction or operation of this permitted source, or from penalties therefore; nor does it allow the permittee to cause pollution in contravention of F.S. and Department rules, unless specifically authorized by an order from the Department.
- (6) The permittee shall properly operate and maintain the facility and systems of treatment and control (and related appurtenances) that are installed and used by the permittee to achieve compliance with the conditions of this permit, as required by Department rules. This provision includes the operation of backup or auxiliary facilities or similar systems when necessary to achieve compliance with the conditions of the permit and when required by Department rules.
- (7) The permittee, by accepting this permit, specifically agrees to allow authorized Department personnel, upon presentation of credentials or other documents as may be required by law and at reasonable times, access to the premises where the permitted activity is located or conducted to:
  - (a) Have access to and copy any records that must be kept under conditions of the permit;
  - (b) Inspect the facility, equipment, practices, or operations regulated or required under this permit; and,
  - (c) Sample or monitor any substances or parameters at any location reasonably necessary to assure compliance with this permit or Department rules. Reasonable time may depend on the nature of the concern being investigated.
- (8) If, for any reason, the permittee does not comply with or will be unable to comply with any condition or limitation specified in this permit, the permittee shall immediately provide the Department with the following information: **(also, see Condition No. 10.)**
  - (a) A description of and cause of noncompliance; and,
  - (b) The period of noncompliance, including dates and times; or, if not corrected, the anticipated time the noncompliance is expected to continue, and steps being taken to reduce, eliminate, and prevent recurrence of the noncompliance. The permittee shall be responsible for any and all damages which may result and may be subject to enforcement action by the Department for penalties or for revocation of this permit.
- (9) In accepting this permit, the permittee understands and agrees that all records, notes, monitoring data and other information relating to the construction or operation of this permitted source which are submitted to the Department may be used by the Department as evidence in any enforcement case involving the permitted source arising under the F.S. or Department rules, except where such use is prescribed by Sections 403.111 and 403.73, F.S. Such evidence shall only be used to the extent it is consistent with the Florida Rules of Civil Procedure and appropriate evidentiary rules.
- (10) The permittee agrees to comply with changes in Department rules and F.S. after a reasonable time for compliance; provided, however, the permittee does not waive any other rights granted by F.S. or Department rules.
- (11) This permit is transferable only upon Department approval in accordance with Rule 62-4.120, F.A.C., as applicable. The permittee shall be liable for any non-compliance of the permitted activity until the transfer is approved by the Department.
- (12) This permit or a copy thereof shall be kept at the work site of the permitted activity.
- (14) The permittee shall comply with the following:
  - (a) Upon request, the permittee shall furnish all records and plans required under Department rules. During enforcement actions, the retention period for all records will be extended automatically unless otherwise stipulated by the Department.
  - (b) The permittee shall hold at the facility or other location designated by this permit records of all monitoring information (including all calibration and maintenance records and all original strip chart recordings for continuous monitoring instrumentation) required by the permit, copies of all reports required by this permit, and records of all data used to complete the application for this permit. These materials shall be retained at least five (5) years from the date of the sample, measurement, report, or application unless otherwise specified by Department rule.

APPENDIX TV-4, TITLE V CONDITIONS (version dated 02/12/02) (continued)

(c) Records of monitoring information shall include:

1. the date, exact place, and time of sampling or measurements;
2. the person responsible for performing the sampling or measurements;
3. the dates analyses were performed;
4. the person responsible for performing the analyses;
5. the analytical techniques or methods used;
6. the results of such analyses.

(15) When requested by the Department, the permittee shall within a reasonable time furnish any information required by law which is needed to determine compliance with the permit. If the permittee becomes aware the relevant facts were not submitted or were incorrect in the permit application or in any report to the Department, such facts or information shall be corrected promptly.

[Rules 62-4.160 and 62-213.440(1)(b), F.A.C.]

13. Construction Permits.

(1) No person shall construct any installation or facility which will reasonably be expected to be a source of air or water pollution without first applying for and receiving a construction permit from the Department unless exempted by statute or Department rule. In addition to the requirements of Chapter 62-4, F.A.C., applicants for a Department Construction Permit shall submit the following as applicable:

(a) A completed application on forms furnished by the Department.

(b) An engineering report covering:

1. plant description and operations,
2. types and quantities of all waste material to be generated whether liquid, gaseous or solid,
3. proposed waste control facilities,
4. the treatment objectives,
5. the design criteria on which the control facilities are based, and,
6. other information deemed relevant.

Design criteria submitted pursuant to Rule 62-4.210(1)(b)5., F.A.C., shall be based on the results of laboratory and pilot-plant scale studies whenever such studies are warranted. The design efficiencies of the proposed waste treatment facilities and the quantities and types of pollutants in the treated effluents or emissions shall be indicated. Work of this nature shall be subject to the requirements of Chapter 471, F.S. Where confidential records are involved, certain information may be kept confidential pursuant to Section 403.111, F.S.

(c) The owners' written guarantee to meet the design criteria as accepted by the Department and to abide by Chapter 403, F.S. and the rules of the Department as to the quantities and types of materials to be discharged from the installation. The owner may be required to post an appropriate bond or other equivalent evidence of financial responsibility to guarantee compliance with such conditions in instances where the owner's financial resources are inadequate or proposed control facilities are experimental in nature.

(2) The construction permit may contain conditions and an expiration date as determined by the Secretary or the Secretary's designee.

(3) When the Department issues a permit to construct, the permittee shall be allowed a period of time, specified in the permit, to construct, and to operate and test to determine compliance with Chapter 403, F.S., and the rules of the Department and, where applicable, to apply for and receive an operation permit. The Department may require tests and evaluations of the treatment facilities by the permittee at his/her expense.

[Rule 62-4.210, F.A.C.]

14. Not federally enforceable. Operation Permit for New Sources. To properly apply for an operation permit for new sources, the applicant shall submit the appropriate fee and certification that construction was completed noting any deviations from the conditions in the construction permit and test results where appropriate.

[Rule 62-4.220, F.A.C.]

Chapters 28-106 and 62-110, F.A.C.

15. Public Notice, Public Participation, and Proposed Agency Action. The permittee shall comply with all of the requirements for public notice, public participation, and proposed agency action pursuant to Rules 62-110.106 and 62-210.350, F.A.C.

[Rules 62-110.106, 62-210.350 and 62-213.430(1)(b), F.A.C.]

**APPENDIX TV-4, TITLE V CONDITIONS (version dated 02/12/02) (continued)**

---

16. Administrative Hearing. The permittee shall comply with all of the requirements for a petition for administrative hearing or waiver of right to administrative proceeding pursuant to Rules 28-106.201, 28-106.301 and 62-110.106, F.A.C. [Rules 28-106.201, 28-106.301 and 62-110.106, F.A.C.]

Chapter 62-204, F.A.C.

17. Asbestos. This permit does not authorize any demolition or renovation of the facility or its parts or components which involves asbestos removal. This permit does not constitute a waiver of any of the requirements of Chapter 62-257, F.A.C., and 40 CFR 61, Subpart M, National Emission Standard for Asbestos, adopted and incorporated by reference in Rule 62-204.800, F.A.C. Compliance with Chapter 62-257, F.A.C., and 40 CFR 61, Subpart M, Section 61.145, is required for any asbestos demolition or renovation at the source. [40 CFR 61; Rule 62-204.800, F.A.C.; and, Chapter 62-257, F.A.C.]

Chapter 62-210, F.A.C.

18. Permits Required. The owner or operator of any emissions unit which emits or can reasonably be expected to emit any air pollutant shall obtain an appropriate permit from the Department prior to beginning construction, modification, or initial or continued operation of the emissions unit unless exempted pursuant to Department rule or statute. All emissions limitations, controls, and other requirements imposed by such permits shall be at least as stringent as any applicable limitations and requirements contained in or enforceable under the State Implementation Plan (SIP) or that are otherwise federally enforceable. Except as provided at Rule 62-213.460, F.A.C., issuance of a permit does not relieve the owner or operator of an emissions unit from complying with any applicable requirements, any emission limiting standards or other requirements of the air pollution rules of the Department or any other such requirements under federal, state, or local law.

(1) Air Construction Permits.

(a) Unless exempt from permitting pursuant to Rule 62-210.300(3)(a) or (b), F.A.C., or Rule 62-4.040, F.A.C., an air construction permit shall be obtained by the owner or operator of any proposed new or modified facility or emissions unit prior to the beginning of construction or modification, in accordance with all applicable provisions of Chapter 62-210, F.A.C., Chapter 62-212, F.A.C., and Chapter 62-4, F.A.C. Except as provided under Rule 62-213.415, F.A.C., the owner or operator of any facility seeking to create or change an air emissions bubble shall obtain an air construction permit in accordance with all the applicable provisions of Chapter 62-210, F.A.C., Chapter 62-212, F.A.C., and Chapter 62-4, F.A.C. The construction permit shall be issued for a period of time sufficient to allow construction or modification of the facility or emissions unit and operation while the new or modified facility or emissions unit is conducting tests or otherwise demonstrating initial compliance with the conditions of the construction permit.

(b) Notwithstanding the expiration of an air construction permit, all limitations and requirements of such permit that are applicable to the design and operation of the permitted facility or emissions unit shall remain in effect until the facility or emissions unit is permanently shut down, except for any such limitation or requirement that is obsolete by its nature (such as a requirement for initial compliance testing) or any such limitation or requirement that is changed in accordance with the provisions of Rule 62-210.300(1)(b)1., F.A.C. Either the applicant or the Department can propose that certain conditions be considered obsolete. Any conditions or language in an air construction permit that are included for informational purposes only, if they are transferred to the air operation permit, shall be transferred for informational purposes only and shall not become enforceable conditions unless voluntarily agreed to by the permittee or otherwise required under Department rules.

1. Except for those limitations or requirements that are obsolete, all limitations and requirements of an air construction permit shall be included and identified in any air operation permit for the facility or emissions unit. The limitations and requirements included in the air operation permit can be changed, and thereby superseded, through the issuance of an air construction permit, federally enforceable state air operation permit, federally enforceable air general permit, or Title V air operation permit; provided, however, that:

- a. Any change that would constitute an administrative correction may be made pursuant to Rule 62-210.360, F.A.C.;
- b. Any change that would constitute a modification, as defined at Rule 62-210.200, F.A.C., shall be accomplished only through the issuance of an air construction permit; and
- c. Any change in a permit limitation or requirement that originates from a permit issued pursuant to 40 CFR 52.21, Rule 62-204.800(10)(d)2., F.A.C., Rule 62-212.400, F.A.C., Rule 62-212.500, F.A.C., or any former codification of Rule 62-212.400 or Rule 62-212.500, F.A.C., shall be accomplished only through the issuance of a new or revised air construction permit under Rule 62-204.800(10)(d)2., Rule 62-212.400, or Rule 62-212.500, F.A.C., as appropriate.

2. The force and effect of any change in a permit limitation or requirement made in accordance with the provisions of Rule 62-210.300(1)(b)1., F.A.C., shall be the same as if such change were made to the original air construction permit.
3. Nothing in Rule 62-210.300(1)(b), F.A.C., shall be construed as to allow operation of a facility or emissions unit without a valid air operation permit.

**APPENDIX TV-4, TITLE V CONDITIONS (version dated 02/12/02) (continued)**

---

(2) Air Operation Permits. Upon expiration of the air operation permit for any existing facility or emissions unit, subsequent to construction or modification, or subsequent to the creation of or change to a bubble, and demonstration of compliance with the conditions of the construction permit for any new or modified facility or emissions unit, any air emissions bubble, or as otherwise provided in Chapter 62-210, F.A.C., or Chapter 62-213, F.A.C., the owner or operator of such facility or emissions unit shall obtain a renewal air operation permit, an initial air operation permit or general permit, or an administrative correction or revision of an existing air operation permit, whichever is appropriate, in accordance with all applicable provisions of Chapter 62-210, F.A.C., Chapter 62-213, F.A.C., and Chapter 62-4, F.A.C.

(a) Minimum Requirements for All Air Operation Permits. At a minimum, a permit issued pursuant to this subsection shall:

1. Specify the manner, nature, volume and frequency of the emissions permitted, and the applicable emission limiting standards or performance standards, if any;
2. Require proper operation and maintenance of any pollution control equipment by qualified personnel, where applicable in accordance with the provisions of any operation and maintenance plan required by the air pollution rules of the Department.
3. Contain an effective date stated in the permit which shall not be earlier than the date final action is taken on the application and be issued for a period, beginning on the effective date, as provided below.

a. The operation permit for an emissions unit which is in compliance with all applicable rules and in operational condition, and which the owner or operator intends to continue operating, shall be issued or renewed for a five-year period, except that, for Title V sources subject to Rule 62-213.420(1)(a)1., F.A.C., operation permits shall be extended until 60 days after the due date for submittal of the facility's Title V permit application as specified in Rule 62-213.420(1)(a)1., F.A.C.

b. Except as provided in Rule 62-210.300(2)(a)3.d., F.A.C., the operation permit for an emissions unit which has been shut down for six months or more prior to the expiration date of the current operation permit, shall be renewed for a period not to exceed five years from the date of shutdown, even if the emissions unit is not maintained in operational condition, provided:

(i) the owner or operator of the emissions unit demonstrates to the Department that the emissions unit may need to be reactivated and used, or that it is the owner's or operator's intent to apply to the Department for a permit to construct a new emissions unit at the facility before the end of the extension period; and,

(ii) the owner or operator of the emissions unit agrees to and is legally prohibited from providing the allowable emission permitted by the renewed permit as an emissions offset to any other person under Rule 62-212.500, F.A.C.; and,

(iii) the emissions unit was operating in compliance with all applicable rules as of the time the source was shut down.

c. Except as provided in Rule 62-210.300(2)(a)3.d., F.A.C., the operation permit for an emissions unit which has been shut down for five years or more prior to the expiration date of the current operation permit shall be renewed for a maximum period not to exceed ten years from the date of shutdown, even if the emissions unit is not maintained in operational condition, provided the conditions given in Rule 62-210.300(2)(a)3.b., F.A.C., are met and the owner or operator demonstrates to the Department that failure to renew the permit would constitute a hardship, which may include economic hardship.

d. The operation permit for an electric utility generating unit on cold standby or long-term reserve shutdown shall be renewed for a five-year period, and additional five-year periods, even if the unit is not maintained in operational condition, provided the conditions given in Rules 62-210.300(2)(a)3.b.(i) through (iii), F.A.C., are met.

4. In the case of an emissions unit permitted pursuant to Rules 62-210.300(2)(a)3.b., c., and d., F.A.C., include reasonable notification and compliance testing requirements for reactivation of such emissions unit and provide that the owner or operator demonstrate to the Department prior to reactivation that such reactivation would not constitute reconstruction pursuant to Rule 62-204.800(7), F.A.C.

[Rules 62-210.300(1) & (2), F.A.C.]

19. **Not federally enforceable.** Notification of Startup. The owner or operator of any emissions unit or facility which has a valid air operation permit which has been shut down more than one year, shall notify the Department in writing of the intent to start up such emissions unit or facility, a minimum of 60 days prior to the intended startup date.

(a) The notification shall include information as to the startup date, anticipated emission rates or pollutants released, changes to processes or control devices which will result in changes to emission rates, and any other conditions which may differ from the valid outstanding operation permit.

**APPENDIX TV-4, TITLE V CONDITIONS (version dated 02/12/02) (continued)**

---

(b) If, due to an emergency, a startup date is not known 60 days prior thereto, the owner shall notify the Department as soon as possible after the date of such startup is ascertained.

[Rule 62-210.300(5), F.A.C.]

**20. Emissions Unit Reclassification.**

(a) Any emissions unit whose operation permit has been revoked as provided for in Chapter 62-4, F.A.C., shall be deemed permanently shut down for purposes of Rule 62-212.500, F.A.C. Any emissions unit whose permit to operate has expired without timely renewal or transfer may be deemed permanently shut down, provided, however, that no such emissions unit shall be deemed permanently shut down if, within 20 days after receipt of written notice from the Department, the emissions unit owner or operator demonstrates that the permit expiration resulted from inadvertent failure to comply with the requirements of Rule 62-4.090, F.A.C., and that the owner or operator intends to continue the emissions unit in operation, and either submits an application for an air operation permit or complies with permit transfer requirements, if applicable.

(b) If the owner or operator of an emissions unit which is so permanently shut down, applies to the Department for a permit to reactivate or operate such emissions unit, the emissions unit will be reviewed and permitted as a new emissions unit.

[Rule 62-210.300(6), F.A.C.]

**21. Transfer of Air Permits.**

(a) An air permit is transferable only after submission of an Application for Transfer of Air Permit (DEP Form 62-210.900(7)) and Department approval in accordance with Rule 62-4.120, F.A.C. For Title V permit transfers only, a complete application for transfer of air permit shall include the requirements of 40 CFR 70.7(d)(1)(iv), adopted and incorporated by reference at Rule 62-204.800, F.A.C. Within 30 days after approval of the transfer of permit, the Department shall update the permit by an administrative permit correction pursuant to Rule 62-210.360, F.A.C.

(b) For an air general permit, the provision of Rules 62-210.300(7)(a) and 62-4.120, F.A.C., do not apply. Thirty (30) days before using an air general permit, the new owner must submit an air general permit notification to the Department in accordance with Rule 62-210.300(4), F.A.C., or Rule 62-213.300(2)(b), F.A.C.

[Rule 62-210.300(7), F.A.C.]

**22. Public Notice and Comment.**

**(1) Public Notice of Proposed Agency Action.**

(a) A notice of proposed agency action on permit application, where the proposed agency action is to issue the permit, shall be published by any applicant for:

1. An air construction permit;
2. An air operation permit, permit renewal or permit revision subject to Rule 62-210.300(2)(b), F.A.C., (i.e., a FESOP), except as provided in Rule 62-210.300(2)(b)1.b., F.A.C.; or
3. An air operation permit, permit renewal, or permit revision subject to Chapter 62-213, F.A.C., except Title V air general permits or those permit revisions meeting the requirements of Rule 62-213.412(1), F.A.C.

(b) The notice required by Rule 62-210.350(1)(a), F.A.C., shall be published in accordance with all otherwise applicable provisions of Rule 62-110.106, F.A.C. A public notice under Rule 62-210.350(1)(a)1., F.A.C., for an air construction permit may be combined with any required public notice under Rule 62-210.350(1)(a)2. or 3., F.A.C., for air operation permits. If such notices are combined, the public notice must comply with the requirements for both notices.

(c) Except as otherwise provided at Rules 62-210.350(2) and (5), F.A.C., each notice of intent to issue an air construction permit shall provide a 14-day period for submittal of public comments.

**(2) Additional Public Notice Requirements for Emissions Units Subject to Prevention of Significant Deterioration or Nonattainment - Area Preconstruction Review.**

(a) Before taking final agency action on a construction permit application for any proposed new or modified facility or emissions unit subject to the preconstruction review requirements of Rule 62-212.400 or 62-212.500, F.A.C., the Department shall comply with all applicable provisions of Rule 62-110.106, F.A.C., and provide an opportunity for public comment which shall include as a minimum the following:

1. A complete file available for public inspection in at least one location in the district affected which includes the information submitted by the owner or operator, exclusive of confidential records under Section 403.111, F.S., and the Department's analysis of the effect of the proposed construction or modification on ambient air quality, including the Department's preliminary determination of whether the permit should be approved or disapproved;
2. A 30-day period for submittal of public comments; and

**APPENDIX TV-4, TITLE V CONDITIONS (version dated 02/12/02) (continued)**

3. A notice, by advertisement in a newspaper of general circulation in the county affected, specifying the nature and location of the proposed facility or emissions unit, whether BACT or LAER has been determined, the degree of PSD increment consumption expected, if applicable, and the location of the information specified in paragraph 1. above; and, notifying the public of the opportunity for submitting comments and requesting a public hearing.
- (b) The notice provided for in Rule 62-210.350(2)(a)3., F.A.C., shall be prepared by the Department and published by the applicant in accordance with all applicable provisions of Rule 62-110.106, F.A.C., except that the applicant shall cause the notice to be published no later than thirty (30) days prior to final agency action.
  - (c) A copy of the notice provided for in Rule 62-210.350(2)(a)3., F.A.C., shall also be sent by the Department to the Regional Office of the U. S. Environmental Protection Agency and to all other state and local officials or agencies having cognizance over the location of such new or modified facility or emissions unit, including local air pollution control agencies, chief executives of city or county government, regional land use planning agencies, and any other state, Federal Land Manager, or Indian Governing Body whose lands may be affected by emissions from the new or modified facility or emissions unit.
  - (d) A copy of the notice provided for in Rule 62-210.350(2)(a)3., F.A.C., shall be displayed in the appropriate district, branch and local program offices.
  - (e) An opportunity for public hearing shall be provided in accordance with Chapter 120, F.S., and Rule 62-110.106, F.A.C.
  - (f) Any public comments received shall be made available for public inspection in the location where the information specified in Rule 62-210.350(2)(a)1., F.A.C., is available and shall be considered by the Department in making a final determination to approve or deny the permit.
  - (g) The final determination shall be made available for public inspection at the same location where the information specified in Rule 62-210.350(2)(a)1., F.A.C., was made available.
  - (h) For a proposed new or modified emissions unit which would be located within 100 kilometers of any Federal Class I area or whose emissions may affect any Federal Class I area, and which would be subject to the preconstruction review requirements of Rule 62-212.400, F.A.C., or Rule 62-212.500, F.A.C.:
    - 1. The Department shall mail or transmit to the Administrator a copy of the initial application for an air construction permit and notice of every action related to the consideration of the permit application.
    - 2. The Department shall mail or transmit to the Federal Land Manager of each affected Class I area a copy of any written notice of intent to apply for an air construction permit; the initial application for an air construction permit, including all required analyses and demonstrations; any subsequently submitted information related to the application; the preliminary determination and notice of proposed agency action on the permit application; and any petition for an administrative hearing regarding the application or the Department's proposed action. Each such document shall be mailed or transmitted to the Federal Land Manager within fourteen (14) days after its receipt by the Department.
- (3) Additional Public Notice Requirements for Facilities Subject to Operation Permits for Title V Sources.
- (a) Before taking final agency action to issue a new, renewed, or revised air operation permit subject to Chapter 62-213, F.A.C., the Department shall comply with all applicable provisions of Rule 62-110.106, F.A.C., and provide an opportunity for public comment which shall include as a minimum the following:
    - 1. A complete file available for public inspection in at least one location in the district affected which includes the information submitted by the owner or operator, exclusive of confidential records under Section 403.111, F.S.; and,
    - 2. A 30-day period for submittal of public comments.
  - (b) The notice provided for in Rule 62-210.350(3)(a), F.A.C., shall be prepared by the Department and published by the applicant in accordance with all applicable provisions of Rule 62-110.106, F.A.C., except that the applicant shall cause the notice to be published no later than thirty (30) days prior to final agency action. If written comments received during the 30-day comment period on a draft permit result in the Department's issuance of a revised draft permit in accordance with Rule 62-213.430(1), F.A.C., the Department shall require the applicant to publish another public notice in accordance with Rule 62-210.350(1)(a), F.A.C.
  - (c) The notice shall identify:
    - 1. The facility;
    - 2. The name and address of the office at which processing of the permit occurs;
    - 3. The activity or activities involved in the permit action;
    - 4. The emissions change involved in any permit revision;
    - 5. The name, address, and telephone number of a Department representative from whom interested persons may obtain additional information, including copies of the permit draft, the application, and all relevant supporting materials, including any permit application, compliance plan, permit, monitoring report, and compliance statement required pursuant to Chapter 62-213, F.A.C. (except for information entitled to confidential treatment pursuant to Section 403.111, F.S.), and all other materials available to the Department that are relevant to the permit decision;

APPENDIX TV-4, TITLE V CONDITIONS (version dated 02/12/02) (continued)

---

6. A brief description of the comment procedures required by Rule 62-210.350(3), F.A.C.;
7. The time and place of any hearing that may be held, including a statement of procedure to request a hearing (unless a hearing has already been scheduled); and,
8. The procedures by which persons may petition the Administrator to object to the issuance of the proposed permit after expiration of the Administrator's 45-day review period.

[Rule 62-210.350, F.A.C.]

23. Administrative Permit Corrections.

(1) A facility owner shall notify the Department by letter of minor corrections to information contained in a permit. Such notifications shall include:

- (a) Typographical errors noted in the permit;
- (b) Name, address or phone number change from that in the permit;
- (c) A change requiring more frequent monitoring or reporting by the permittee;
- (d) A change in ownership or operational control of a facility, subject to the following provisions:
  1. The Department determines that no other change in the permit is necessary;
  2. The permittee and proposed new permittee have submitted an Application for Transfer of Air Permit, and the Department has approved the transfer pursuant to Rule 62-210.300(7), F.A.C.; and
  3. The new permittee has notified the Department of the effective date of sale or legal transfer.
- (e) Changes listed at 40 CFR 72.83(a)(1), (2), (6), (9) and (10), adopted and incorporated by reference at Rule 62-204.800, F.A.C., and changes made pursuant to Rules 62-214.340(1) and (2), F.A.C., to Title V sources subject to emissions limitations or reductions pursuant to 42 USC ss. 7651-7651o;
- (f) Changes listed at 40 CFR 72.83(a)(11) and (12), adopted and incorporated by reference at Rule 62-204.800, F.A.C., to Title V sources subject to emissions limitations or reductions pursuant to 42 USC ss. 7651-7651o, provided the notification is accompanied by a copy of any EPA determination concerning the similarity of the change to those listed at Rule 62-210.360(1)(e), F.A.C.; and,
- (g) Any other similar minor administrative change at the source.

(2) Upon receipt of any such notification the Department shall within 60 days correct the permit and provide a corrected copy to the owner.

(3) After first notifying the owner, the Department shall correct any permit in which it discovers errors of the types listed at Rules 62-210.360(1)(a) and (b), F.A.C., and provide a corrected copy to the owner.

(4) For Title V source permits, other than general permits, a copy of the corrected permit shall be provided to EPA and any approved local air program in the county where the facility or any part of the facility is located.

(5) The Department shall incorporate requirements resulting from issuance of a new or revised construction permit into an existing Title V source permit, if the construction permit or permit revision incorporates requirements of federally enforceable preconstruction review, and if the applicant requests at the time of application that all of the requirements of Rule 62-213.430(1), F.A.C., be complied with in conjunction with the processing of the construction permit application.

[Rule 62-210.360, F.A.C.]

24. Reports.

(3) Annual Operating Report for Air Pollutant Emitting Facility.

(a) The Annual Operating Report for Air Pollutant Emitting Facility (DEP Form No. 62-210.900(5)) shall be completed each year.

(c) The annual operating report shall be submitted to the appropriate Department District or Department approved local air pollution control program office by March 1 of the following year unless otherwise indicated by permit condition or Department request.

[Rule 62-210.370(3), F.A.C.]

25. Circumvention. No person shall circumvent any air pollution control device, or allow the emission of air pollutants without the applicable air pollution control device operating properly.

[Rule 62-210.650, F.A.C.]



**APPENDIX TV-4, TITLE V CONDITIONS (version dated 02/12/02) (continued)**

---

26. Forms and Instructions. The forms used by the Department in the stationary source control program are adopted and incorporated by reference in this section. The forms are listed by rule number, which is also the form number, with the subject, title and effective date. Forms 62-210.900(1),(3),(4) and (5), F.A.C., including instructions, are available from the Department as hard-copy documents or executable files on computer diskettes. Copies of forms (hard-copy or diskette) may be obtained by writing to the Department of Environmental Protection, Division of Air Resource Management, 2600 Blair Stone Road, Tallahassee, Florida 32399-2400. Notwithstanding the requirement of Rule 62-4.050(2), F.A.C., to file application forms in quadruplicate, if an air permit application is submitted using the Department's electronic application form, only one copy of the diskette and signature pages is required to be submitted.

(1) Application for Air Permit - Title V Source, Form and Instructions (Effective 02/11/1999).

(a) Acid Rain Part (Phase II), Form and Instructions (Effective 04/16/2001).

1. Repowering Extension Plan, Form and Instructions (Effective 07/01/1995).
2. New Unit Exemption, Form and Instructions (Effective 04/16/2001).
3. Retired Unit Exemption, Form and Instructions (Effective 04/16/2001).
4. Phase II NOx Compliance Plan, Form and Instructions (Effective 01/06/1998).
5. Phase II NOx Averaging Plan, Form (Effective 01/06/1998).

(b) Reserved.

(5) Annual Operating Report for Air Pollutant Emitting Facility, Form and Instructions (Effective 02/11/1999).

(7) Application for Transfer of Air Permit – Title V and Non-Title V Source, (Effective 04/16/2001).

[Rule 62-210.900, F.A.C.]

Chapter 62-213, F.A.C.

27. Annual Emissions Fee. Each Title V source permitted to operate in Florida must pay between January 15 and March 1 of each year, upon written notice from the Department, an annual emissions fee in an amount determined as set forth in Rule 62-213.205(1), F.A.C.

[Rules 62-213.205 and 62-213.900(1), F.A.C.]

28. Annual Emissions Fee. Failure to pay timely any required annual emissions fee, penalty, or interest constitutes grounds for permit revocation pursuant to Rule 62-4.100, F.A.C.

[Rule 62-213.205(1)(g), F.A.C.]

29. Annual Emissions Fee. Any documentation of actual hours of operation, actual material or heat input, actual production amount, or actual emissions used to calculate the annual emissions fee shall be retained by the owner for a minimum of five (5) years and shall be made available to the Department upon request.

[Rule 62-213.205(1)(i), F.A.C.]

30. Annual Emissions Fee. A completed DEP Form 62-213.900(1), F.A.C., "Major Air Pollution Source Annual Emissions Fee Form", must be submitted by the responsible official with the annual emissions fee.

[Rule 62-213.205(1)(j), F.A.C.]

31. Air Operation Permit Fees. No permit application processing fee, renewal fee, modification fee or amendment fee is required for an operation permit for a Title V source.

[Rule 62-213.205(4), F.A.C.]

32. Permits and Permit Revisions Required. All Title V sources are subject to the permit requirements of Chapter 62-213, F.A.C.

(1) No Title V source may operate except in compliance with Chapter 62-213, F.A.C.

(2) Except as provided in Rule 62-213.410, F.A.C., no source with a permit issued under the provisions of this chapter shall make any changes in its operation without first applying for and receiving a permit revision if the change meets any of the following:

- (a) Constitutes a modification;
- (b) Violates any applicable requirement;
- (c) Exceeds the allowable emissions of any air pollutant from any unit within the source;
- (d) Contravenes any permit term or condition for monitoring, testing, recordkeeping, reporting or of a compliance certification requirement;

**APPENDIX TV-4, TITLE V CONDITIONS (version dated 02/12/02) (continued)**

- (e) Requires a case-by-case determination of an emission limitation or other standard or a source specific determination of ambient impacts, or a visibility or increment analysis under the provisions of Chapters 62-212 or 62-296, F.A.C.;
- (f) Violates a permit term or condition which the source has assumed for which there is no corresponding underlying applicable requirement to which the source would otherwise be subject;
- (g) Results in the trading of emissions among units within a source except as specifically authorized pursuant to Rule 62-213.415, F.A.C.;
- (h) Results in the change of location of any relocatable facility identified as a Title V source pursuant to paragraph (a)-(e), (g) or (h) of the definition of "major source of air pollution" at Rule 62-210.200, F.A.C.;
- (i) Constitutes a change at an Acid Rain Source under the provisions of 40 CFR 72.81(a)(1),(2),or (3),(b)(1) or (b)(3), hereby incorporated by reference;
- (j) Constitutes a change in a repowering plan, nitrogen oxides averaging plan, or nitrogen oxides compliance deadline extension at an Acid Rain Source;
- (k) Is a request for industrial-utility unit exemption pursuant to Rule 62-214.340, F.A.C.

[Rules 62-213.400(1) & (2), F.A.C.]

33. Changes Without Permit Revision. Title V sources having a valid permit issued pursuant to Chapter 62-213, F.A.C., may make the following changes without permit revision, provided that sources shall maintain source logs or records to verify periods of operation in each alternative method of operation:

- (1) Permitted sources may change among those alternative methods of operation allowed by the source's permit as provided by the terms of the permit;
  - (2) Permitted sources may implement the terms or conditions of a new or revised construction permit if:
    - (a) The application for construction permit complied with the requirements of Rule 62-213.420(3) and (4), F.A.C.;
    - (b) The terms or conditions were subject to federally enforceable preconstruction review pursuant to Chapter 62-212, F.A.C.;
    - and,
    - (c) The new or revised construction permit was issued after the Department and the applicant complied with all the requirements of Rule 62-213.430(i), F.A.C.;
  - (3) A permitted source may implement operating changes, as defined in Rule 62-210.200, F.A.C., after the source submits any forms required by any applicable requirement and provides the Department and EPA with at least 7 days written notice prior to implementation. The source and the Department shall attach each notice to the relevant permit;
    - (a) The written notice shall include the date on which the change will occur, and a description of the change within the permitted source, the pollutants emitted and any change in emissions, and any term or condition becoming applicable or no longer applicable as a result of the change;
    - (b) The permit shield described in Rule 62-213.460, F.A.C., shall not apply to such changes;
  - (4) Permitted sources may implement changes involving modes of operation only in accordance with Rule 62-213.415, F.A.C.
- [Rule 62-213.410, F.A.C.]

34. Immediate Implementation Pending Revision Process.

- (1) Those permitted Title V sources making any change that constitutes a modification pursuant to the definition of modification at Rule 62-210.200, F.A.C., but which would not constitute a modification pursuant to 42 USC 7412(a) or to 40 CFR 52.01, 60.2, or 61.15, adopted and incorporated by reference at Rule 62-204.800, F.A.C., may implement such change prior to final issuance of a permit revision in accordance with this section, provided the change:
  - (a) Does not violate any applicable requirement;
  - (b) Does not contravene any permit term or condition for monitoring, testing, recordkeeping or reporting, or any compliance certification requirement;
  - (c) Does not require or change a case-by-case determination of an emission limitation or other standard, or a source-specific determination of ambient impacts, or a visibility or increment analysis under the provisions of Chapter 62-212 or 62-296, F.A.C.;
  - (d) Does not seek to establish or change a permit term or condition for which there is no corresponding underlying applicable requirement and which the source has assumed to avoid an applicable requirement to which the source would otherwise be subject including any federally enforceable emissions cap or federally enforceable alternative emissions limit.
- (2) A Title V source may immediately implement such changes after they have been incorporated into the terms and conditions of a new or revised construction permit issued pursuant to Chapter 62-212, F.A.C., and after the source provides to EPA, the Department, each affected state and any approved local air program having geographic jurisdiction over the source, a copy of the source's

**APPENDIX TV-4, TITLE V CONDITIONS (version dated 02/12/02) (continued)**

---

application for operation permit revision. The Title V source may conform its application for construction permit to include all information required by Rule 62-213.420, F.A.C., in lieu of submitting separate application forms.

**APPENDIX TV-4, TITLE V CONDITIONS (version dated 02/12/02) (continued)**

---

(3) The Department shall process the application for operation permit revision in accordance with the provisions of Chapter 62-213, F.A.C., except that the Department shall issue a draft permit revision or a determination to deny the revision within 60 days of receipt of a complete application for operation permit revision or, if the Title V source has submitted a construction permit application conforming to the requirements of Rule 62-213.420, F.A.C., the Department shall issue a draft permit or a determination to deny the revision at the same time the Department issues its determination on issuance or denial of the construction permit application. The Department shall not take final action until all the requirements of Rules 62-213.430(1)(a), (c), (d), and (e), F.A.C., have been complied with.

(4) Pending final action on the operation permit revision application, the source shall implement the changes in accordance with the terms and conditions of the source's new or revised construction permit.

(5) The permit shield described in Rule 62-213.460, F.A.C., shall not apply to such changes until after the Department takes final action to issue the operation permit revision.

(6) If the Department denies the source's application for operation permit revision, the source shall cease implementation of the proposed changes.

[Rule 62-213.412, F.A.C.]

**35. Permit Applications.**

(1) **Duty to Apply.** For each Title V source, the owner or operator shall submit a timely and complete permit application in compliance with the requirements of Rules 62-213.420, F.A.C., and Rules 62-4.050(1) through (3), F.A.C.

(a) **Timely Application.**

3. For purposes of permit renewal, a timely application is one that is submitted in accordance with Rule 62-4.090, F.A.C.

(b) **Complete Application.**

1. Any applicant for a Title V permit, permit revision or permit renewal must submit an application on DEP Form No. 62-210.900(1), which must include all the information specified by Rule 62-213.420(3), F.A.C., except that an application for permit revision must contain only that information related to the proposed change. The applicant shall include information concerning fugitive emissions and stack emissions in the application. Each application for permit, permit revision or permit renewal shall be certified by a responsible official in accordance with Rule 62-213.420(4), F.A.C.

2. For those applicants submitting initial permit applications pursuant to Rule 62-213.420(1)(a)1., F.A.C., a complete application shall be an application that substantially addresses all the information required by the application form number 62-210.900(1), and such applications shall be deemed complete within sixty days of receipt of a signed and certified application unless the Department notifies the applicant of incompleteness within that time. For all other applicants, the applications shall be deemed complete sixty days after receipt, unless the Department, within sixty days after receipt of a signed application for permit, permit revision or permit renewal, requests additional documentation or information needed to process the application. An applicant making timely and complete application for permit, or timely application for permit renewal as described by Rule 62-4.090(1), F.A.C., shall continue to operate the source under the authority and provisions of any existing valid permit or Florida Electrical Power Plant Siting Certification, and in accordance with applicable requirements of the Acid Rain Program, until the conclusion of proceedings associated with its permit application or until the new permit becomes effective, whichever is later, provided the applicant complies with all the provisions of Rules 62-213.420(1)(b)3. and 4., F.A.C. Failure of the Department to request additional information within sixty days of receipt of a properly signed application shall not impair the Department's ability to request additional information pursuant to Rules 62-213.420(1)(b)3. and 4., F.A.C.

3. For those permit applications submitted pursuant to the provisions of Rule 62-213.420(1)(a)1., F.A.C., the Department shall notify the applicant if the Department becomes aware at any time during processing of the application that the application contains incorrect or incomplete information. The applicant shall submit the corrected or supplementary information to the Department within ninety days unless the applicant has requested and been granted additional time to submit the information. Failure of an applicant to submit corrected or supplementary information requested by the Department within ninety days or such additional time as requested and granted shall render the application incomplete.

4. For all applications other than those addressed at Rule 62-213.420(1)(b)3., F.A.C., should the Department become aware, during processing of any application that the application contains incorrect information, or should the Department become aware, as a result of comment from an affected State, an approved local air program, EPA, or the public that additional information is needed to evaluate the application, the Department shall notify the applicant within 30 days. When an applicant becomes aware that an application contains incorrect or incomplete information, the applicant shall submit the corrected or supplementary information to the Department. If the Department notifies an applicant that corrected or supplementary information is necessary to process the permit, and requests a response, the applicant shall provide the information to the Department within ninety days of the Department request unless the applicant has requested

APPENDIX TV-4, TITLE V CONDITIONS (version dated 02/12/02) (continued)

and been granted additional time to submit the information or, the applicant shall, within ninety days, submit a written request that the Department process the application without the information. Failure of an applicant to submit corrected or supplementary information requested by the Department within ninety days, or such additional time as requested and granted, or to demand in writing within ninety days that the application be processed without the information shall render the application incomplete. Nothing in this section shall limit any other remedies available to the Department.

[Rules 62-213.420(1)(a)3. and 62-213.420(1)(b)1., 2., 3. & 4., F.A.C.]

36. Confidential Information. Whenever an applicant submits information under a claim of confidentiality pursuant to Section 403.111, F.S., the applicant shall also submit a copy of all such information and claim directly to EPA. (also, see Condition No. 50.) [Rule 62-213.420(2), F.A.C.]

37. Standard Application Form and Required Information. Applications shall be submitted under Chapter 62-213, F.A.C., on forms provided by the Department and adopted by reference in Rule 62-210.900(1), F.A.C. The information as described in Rule 62-210.900(1), F.A.C., shall be included for the Title V source and each emissions unit. An application must include information sufficient to determine all applicable requirements for the Title V source and each emissions unit and to evaluate a fee amount pursuant to Rule 62-213.205, F.A.C. [Rule 62-213.420(3), F.A.C.]

38. a. Permit Renewal and Expiration. Permits being renewed are subject to the same requirements that apply to permit issuance at the time of application for renewal. Permit renewal applications shall contain that information identified in Rules 62-210.900(1) and 62-213.420(3), F.A.C. Unless a Title V source submits a timely application for permit renewal in accordance with the requirements of Rule 62-4.090(1), F.A.C., the existing permit shall expire and the source's right to operate shall terminate. No Title V permit will be issued for a new term except through the renewal process.

b. Permit Revision Procedures. Permit revisions shall meet all requirements of Chapter 62-213, F.A.C., including those for content of applications, public participation, review by approved local programs and affected states, and review by EPA, as they apply to permit issuance and permit renewal, except that permit revisions for those activities implemented pursuant to Rule 62-213.412, F.A.C., need not meet the requirements of Rule 62-213.430(1)(b), F.A.C. The Department shall require permit revision in accordance with the provisions of Rule 62-4.080, F.A.C., and 40 CFR 70.7(f), whenever any source becomes subject to any condition listed at 40 CFR 70.7(f)(1), hereby adopted and incorporated by reference. The below requirements from 40 CFR 70.7(f) are adopted and incorporated by reference in Rule 62-213.430(4), F.A.C.:

o 40 CFR 70.7(f): Reopening for Cause. (also, see Condition No. 4.)

(1) This section contains provisions from 40 CFR 70.7(f) that specify the conditions under which a Title V permit shall be reopened prior to the expiration of the permit. A Title V permit shall be reopened and revised under any of the following circumstances:

(i) Additional applicable requirements under the Act become applicable to a major Part 70 source with a remaining permit term of 3 or more years. Such a reopening shall be completed not later than 18 months after promulgation of the applicable requirement. No such reopening is required if the effective date of the requirement is later than the date on which the permit is due to expire, unless the original permit or any of its terms and conditions has been extended pursuant to 40 CFR 70.4(b)(10)(i) or (ii).

(ii) Additional requirements (including excess emissions requirements) become applicable to an affected source under the acid rain program. Upon approved by the Administrator, excess emissions offset plans shall be deemed to be incorporated into the permit.

(iii) The permitting authority or EPA determines that the permit contains a material mistake or that inaccurate statements were made in establishing the emissions standards or other terms or conditions of the permit.

(iv) The Administrator or the permitting authority determines that the permit must be revised or revoked to assure compliance with the applicable requirements.

(2) Proceedings to reopen and issue a permit shall follow the same procedures as apply to initial permit issuance and shall affect only those parts of the permit for which cause to reopen exists. Such reopening shall be made as expeditiously as practicable.

(3) Reopenings under 40 CFR 70.7(f)(1) shall not be initiated before a notice of such intent is provided to the Part 70 source by the permitting authority at least 30 days in advance of the date that the permit is to be reopened, except that the permitting authority may provide a shorter time period in the case of an emergency.

[Rules 62-213.430(3) & (4), F.A.C.; and, 40 CFR 70.7(f)]

39. Insignificant Emissions Units or Pollutant-Emitting Activities.

APPENDIX TV-4, TITLE V CONDITIONS (version dated 02/12/02) (continued)

(a) All requests for determination of insignificant emissions units or activities made pursuant to Rule 62-213.420(3)(m), F.A.C., shall be processed in conjunction with the permit, permit renewal or permit revision application submitted pursuant to Chapter 62-213, F.A.C. Insignificant emissions units or activities shall be approved by the Department consistent with the provisions of Rule 62-4.040(1)(b), F.A.C. Emissions units or activities which are added to a Title V source after issuance of a permit under Chapter 62-213, F.A.C., shall be incorporated into the permit at its next renewal, provided such emissions units or activities have been exempted from the requirement to obtain an air construction permit and also qualify as insignificant pursuant to Rule 62-213.430(6), F.A.C.

(b) An emissions unit or activity shall be considered insignificant if all of the following criteria are met:

1. Such unit or activity would be subject to no unit-specific applicable requirement;
2. Such unit or activity, in combination with other units or activities proposed as insignificant, would not cause the facility to exceed any major source threshold(s) as defined in Rule 62-213.420(3)(c)1., F.A.C., unless it is acknowledged in the permit application that such units or activities would cause the facility to exceed such threshold(s);
3. Such unit or activity would not emit or have the potential to emit:
  - a. 500 pounds per year or more of lead and lead compounds expressed as lead;
  - b. 1,000 pounds per year or more of any hazardous air pollutant;
  - c. 2,500 pounds per year or more of total hazardous air pollutants; or
  - d. 5.0 tons per year or more of any other regulated pollutant.

[Rule 62-213.430(6), F.A.C.]

40. Permit Duration. Permits for sources subject to the Federal Acid Rain Program shall be issued for terms of five years, provided that the initial Acid Rain Part may be issued for a term less than five years where necessary to coordinate the term of such part with the term of a Title V permit to be issued to the source. Operation permits for Title V sources may not be extended as provided in Rule 62-4.080(3), F.A.C., if such extension will result in a permit term greater than five years.

[Rule 62-213.440(1)(a), F.A.C.]

41. Monitoring Information. All records of monitoring information shall specify the date, place, and time of sampling or measurement and the operating conditions at the time of sampling or measurement, the date(s) analyses were performed, the company or entity that performed the analyses, the analytical techniques or methods used, and the results of such analyses.

[Rule 62-213.440(1)(b)2.a., F.A.C.]

42. Retention of Records. Retention of records of all monitoring data and support information shall be for a period of at least 5 years from the date of the monitoring sample, measurement, report, or application. Support information includes all calibration and maintenance records and all original strip-chart recordings for continuous monitoring instrumentation, and copies of all reports required by the permit.

[Rule 62-213.440(1)(b)2.b., F.A.C.]

43. Monitoring Reports. The permittee shall submit reports of any required monitoring at least every six (6) months. All instances of deviations from permit requirements must be clearly identified in such reports.

[Rule 62-213.440(1)(b)3.a., F.A.C.]

44. Deviation from Permit Requirements Reports. The permittee shall report in accordance with the requirements of Rules 62-210.700(6) and 62-4.130, F.A.C., deviations from permit requirements, including those attributable to upset conditions as defined in the permit. Reports shall include the probable cause of such deviations, and any corrective actions or preventive measures taken.

[Rule 62-213.440(1)(b)3.b., F.A.C.]

45. Reports. All reports shall be accompanied by a certification by a responsible official, pursuant to Rule 62-213.420(4), F.A.C.

[Rule 62-213.440(1)(b)3.c., F.A.C.]

APPENDIX TV-4, TITLE V CONDITIONS (version dated 02/12/02) (continued)

46. If any portion of the final permit is invalidated, the remainder of the permit shall remain in effect.  
[Rule 62-213.440(1)(d)1., F.A.C.]
47. It shall not be a defense for a permittee in an enforcement action that maintaining compliance with any permit condition would necessitate halting of or reduction of the source activity.  
[Rule 62-213.440(1)(d)3., F.A.C.]
48. Any Title V source shall comply with all the terms and conditions of the existing permit until the Department has taken final action on any permit renewal or any requested permit revision, except as provided at Rule 62-213.412(2), F.A.C.  
[Rule 62-213.440(1)(d)4., F.A.C.]
49. A situation arising from sudden and unforeseeable events beyond the control of the source which causes an exceedance of a technology-based emissions limitation because of unavoidable increases in emissions attributable to the situation and which requires immediate corrective action to restore normal operation, shall be an affirmative defense to an enforcement action in accordance with the provisions and requirements of 40 CFR 70.6(g)(2) and (3), hereby adopted and incorporated by reference.  
[Rule 62-213.440(1)(d)5., F.A.C.]
50. Confidentiality Claims. Any permittee may claim confidentiality of any data or other information by complying with Rule 62-213.420(2), F.A.C. (also, see Condition No. 36.).  
[Rule 62-213.440(1)(d)6., F.A.C.]
51. Statement of Compliance. (a)2. The permittee shall submit a Statement of Compliance with all terms and conditions of the permit using DEP Form No. 62-213.900(7). Such statement shall be accompanied by a certification in accordance with Rule 62-213.420(4), F.A.C. Such statements shall be submitted (postmarked) to the Department and EPA:
- a. Annually, within 60 days after the end of each calendar year during which the Title V permit was effective, or more frequently if specified by Rule 62-213.440(2), F.A.C., or by any other applicable requirement; and
  - b. Within 60 days after submittal of a written agreement for transfer of responsibility as required pursuant to 40 CFR 70.7(d)(1)(iv), adopted and incorporated by reference at Rule 62-204.800, F.A.C., or within 60 days after permanent shutdown of a facility permitted under Chapter 62-213, F.A.C.; provided that, in either such case, the reporting period shall be the portion of the calendar year the permit was effective up to the date of transfer of responsibility or permanent facility shutdown, as applicable.
3. The statement of compliance status shall include all the provisions of 40 CFR 70.6(c)(5)(iii), incorporated by reference at Rule 62-204.800, F.A.C.
- (b) The responsible official may treat compliance with all other applicable requirements as a surrogate for compliance with Rule 62-296.320(2), Objectionable Odor Prohibited.  
[Rules 62-213.440(3)(a)2. & 3. and (b), F.A.C.]
52. Permit Shield. Except as provided in Chapter 62-213, F.A.C., compliance with the terms and conditions of a permit issued pursuant to Chapter 62-213, F.A.C., shall, as of the effective date of the permit, be deemed compliance with any applicable requirements in effect, provided that the source included such applicable requirements in the permit application. Nothing in Rule 62-213.460, F.A.C., or in any permit shall alter or affect the ability of EPA or the Department to deal with an emergency, the liability of an owner or operator of a source for any violation of applicable requirements prior to or at the time of permit issuance, or the requirements of the Federal Acid Rain Program.  
[Rule 62-213.460, F.A.C.]
53. Forms and Instructions. The forms used by the Department in the Title V source operation program are adopted and incorporated by reference in Rule 62-213.900, F.A.C. The form is listed by rule number, which is also the form number, and with the subject, title, and effective date. Copies of forms may be obtained by writing to the Department of Environmental Protection, Division of Air Resources Management, 2600 Blair Stone Road, Tallahassee, Florida 32399-2400, or by contacting the appropriate permitting authority.
- (1) Major Air Pollution Source Annual Emissions Fee Form. (Effective 01/03/2001)
  - (7) Statement of Compliance Form. (Effective 01/03/2001)
- [Rule 62-213.900, F.A.C.: Forms (1) and (7)]

APPENDIX TV-4, TITLE V CONDITIONS (version dated 02/12/02) (continued)

Chapter 62-256, F.A.C.

54. **Not federally enforceable. Open Burning.** This permit does not authorize any open burning nor does it constitute any waiver of the requirements of Chapter 62-256, F.A.C. Source shall comply with Chapter 62-256, F.A.C., for any open burning at the source. [Chapter 62-256, F.A.C.]

Chapter 62-281, F.A.C.

55. **Refrigerant Requirements.** Any facility having refrigeration equipment, including air conditioning equipment, which uses a Class I or II substance (listed at 40 CFR 82, Subpart A, Appendices A and B), and any facility which maintains, services, or repairs motor vehicles using a Class I or Class II substance as refrigerant must comply with all requirements of 40 CFR 82, Subparts B and F, and with Rule 62-281.100, F.A.C. Those requirements include the following restrictions:

- (1) Any facility having any refrigeration equipment normally containing 50 (fifty) pounds of refrigerant, or more, must keep servicing records documenting the date and type of all service and the quantity of any refrigerant added pursuant to 40 CFR 82.166;
- (2) No person repairing or servicing a motor vehicle may perform any service on a motor vehicle air conditioner (MVAC) involving the refrigerant for such air conditioner unless the person has been properly trained and certified as provided at 40 CFR 82.34 and 40 CFR 82.40, and properly uses equipment approved pursuant to 40 CFR 82.36 and 40 CFR 82.38, and complies with 40 CFR 82.42;
- (3) No person may sell or distribute, or offer for sale or distribution, any substance listed as a Class I or Class II substance at 40 CFR 82, Subpart A, Appendices A and B, except in compliance with Rule 62-281.100, F.A.C., and 40 CFR 82.34(b), 40 CFR 82.42, and/or 40 CFR 82.166;
- (4) No person maintaining, servicing, repairing, or disposing of appliances may knowingly vent or otherwise release into the atmosphere any Class I or Class II substance used as a refrigerant in such equipment and no other person may open appliances (except MVACs as defined at 40 CFR 82.152) for service, maintenance or repair unless the person has been properly trained and certified pursuant to 40 CFR 82.161 and unless the person uses equipment certified for that type of appliance pursuant to 40 CFR 82.158 and unless the person observes the practices set forth at 40 CFR 82.156 and 40 CFR 82.166;
- (5) No person may dispose of appliances (except small appliances, as defined at 40 CFR 82.152) without using equipment certified for that type of appliance pursuant to 40 CFR 82.158 and without observing the practices set forth at 40 CFR 82.156 and 40 CFR 82.166;
- (6) No person may recover refrigerant from small appliances, MVACs and MVAC-like appliances (as defined at 40 CFR 82.152), except in compliance with the requirements of 40 CFR 82, Subpart F. [40 CFR 82; and, Chapter 62-281, F.A.C. (Chapter 62-281, F.A.C., is not federally enforceable)]

Chapter 62-296, F.A.C.

56. **Industrial, Commercial, and Municipal Open Burning Prohibited.** Open burning in connection with industrial, commercial, or municipal operations is prohibited, except when:

- (a) Open burning is determined by the Department to be the only feasible method of operation and is authorized by an air permit issued pursuant to Chapter 62-210 or 62-213, F.A.C.; or,
- (b) An emergency exists which requires immediate action to protect human health and safety; or,
- (c) A county or municipality would use a portable air curtain incinerator to burn yard trash generated by a hurricane, tornado, fire or other disaster and the air curtain incinerator would otherwise be operated in accordance with the permitting exemption criteria of Rule 62-210.300(3), F.A.C.

[Rule 62-296.320(3), F.A.C.]

57. **Unconfined Emissions of Particulate Matter.**

(4)(c)1. No person shall cause, let, permit, suffer or allow the emissions of unconfined particulate matter from any activity, including vehicular movement; transportation of materials; construction; alteration; demolition or wrecking; or industrially related activities such as loading, unloading, storing or handling; without taking reasonable precautions to prevent such emissions.

3. Reasonable precautions include the following:

- a. Paving and maintenance of roads, parking areas and yards.
- b. Application of water or chemicals to control emissions from such activities as demolition of buildings, grading roads, construction, and land clearing.
- c. Application of asphalt, water, oil, chemicals or other dust suppressants to unpaved roads, yards, open stock piles and similar activities.



- d. Removal of particulate matter from roads and other paved areas under the control of the owner or operator of the facility to prevent reentrainment, and from buildings or work areas to prevent particulate from becoming airborne.
- e. Landscaping or planting of vegetation.
- f. Use of hoods, fans, filters, and similar equipment to contain, capture and/or vent particulate matter.
- g. Confining abrasive blasting where possible.
- h. Enclosure or covering of conveyor systems.

4. In determining what constitutes reasonable precautions for a particular facility, the Department shall consider the cost of the control technique or work practice, the environmental impacts of the technique or practice, and the degree of reduction of emissions expected from a particular technique or practice.

[Rules 62-296.320(4)(c)1., 3., & 4. F.A.C.]

[electronic file name: tv-4.doc]

**Figure 1: Summary Report-**  
**Gaseous and Opacity Excess Emission and Monitoring System**  
**Performance**

# FIGURE 1--SUMMARY REPORT--GASEOUS AND OPACITY EXCESS EMISSION AND MONITORING SYSTEM PERFORMANCE

[Note: This form is referenced in 40 CFR 60.7, Subpart A-General Provisions]

Pollutant (*Circle One*):    SO<sub>2</sub>    NO<sub>x</sub>    TRS    H<sub>2</sub>S    CO    Opacity

Reporting period dates: From \_\_\_\_\_ to \_\_\_\_\_

Company: \_\_\_\_\_

Emission Limitation: \_\_\_\_\_

Address: \_\_\_\_\_

Monitor Manufacturer: \_\_\_\_\_

Model No.: \_\_\_\_\_

Date of Latest CMS Certification or Audit: \_\_\_\_\_

Process Unit(s) Description: \_\_\_\_\_

Total source operating time in reporting period <sup>1</sup>: \_\_\_\_\_

Emission data summary <sup>1</sup>	CMS performance summary <sup>1</sup>
1. Duration of excess emissions in reporting period due to: a. Startup/shutdown ..... _____ b. Control equipment problems ..... _____ c. Process problems ..... _____ d. Other known causes ..... _____ e. Unknown causes ..... _____ 2. Total duration of excess emissions ..... _____ 3. Total duration of excess emissions x (100) / [Total source operating time] ..... % <sup>2</sup>	1. CMS downtime in reporting period due to: a. Monitor equipment malfunctions ..... _____ b. Non-Monitor equipment malfunctions ..... _____ c. Quality assurance calibration ..... _____ d. Other known causes ..... _____ e. Unknown causes ..... _____ 2. Total CMS Downtime ..... _____ 3. [Total CMS Downtime] x (100) / [Total source operating time] ..... % <sup>2</sup>

<sup>1</sup> For opacity, record all times in minutes. For gases, record all times in hours.

<sup>2</sup> For the reporting period: If the total duration of excess emissions is 1 percent or greater of the total operating time or the total CMS downtime is 5 percent or greater of the total operating time, both the summary report form and the excess emission report described in 40 CFR 60.7(c) shall be submitted.

*Note: On a separate page, describe any changes since last quarter in CMS, process or controls.*

I certify that the information contained in this report is true, accurate, and complete.

Name: \_\_\_\_\_

Signature: \_\_\_\_\_ Date: \_\_\_\_\_

Title: \_\_\_\_\_

**Table 1-1, Summary of Air Pollutant Standards and Terms**

**Table 1-1, Summary of Air Pollutant Standards and Terms**

Gulf Power Company  
Lansing Smith Generating Plant

**FINAL Permit No.:** 0050014-010-AV  
**Facility ID No.:** 0050014

This table summarizes information for convenience purposes only. This table does not supersede any of the terms or conditions of the permit.

E. U. ID No.	Brief Description	Pollutant Name	Fuel(s)	Hours/Year	Allowable Emissions			Equivalent Emissions*		Regulatory Citation(s)	See Permit Condition(s)
					Standard(s)	lbs./hour	TPY	lbs./hour	TPY		
-001	Boiler #1 (1,944.8 MMBtu/hour - Coal) (153 MMBtu/hour - Oil)	VE	Coal	8760	40%			N/A	N/A	62-296.405(1)(a)	A.5.
			No. 2 Fuel Oil**	8760	40%			N/A	N/A	62-296.405(1)(a)	A.5.
	-Acid Rain Phase II Unit	PM	Coal	8760	0.1 lb/MMBtu	N/A	N/A	194.5	851.8	62-296.405(1)(b)	A.7.
			No. 2 Fuel Oil	8760	0.1 lb/MMBtu	N/A	N/A	15.3	67.0	62-296.405(1)(b)	A.7.
		PM - SB**	Coal	3 hr/day	0.3 lb/MMBtu	N/A	N/A	583.4	1,064.8	62-210.700(3)	A.8.
			No. 2 Fuel Oil	3 hr/day	0.3 lb/MMBtu	N/A	N/A	45.9	83.8	62-210.700(3)	A.8.
SO <sub>2</sub>	Coal	8760	4.40 lb/MMBtu	N/A	N/A	8,557.1	37,480.2	62-296.405(1)(c)	A.9.		
	No. 2 Fuel Oil	8760	0.5% Sulfur	N/A	N/A	75.8	330.6	Applicant Request	A.10.		
NO <sub>x</sub>	All Fuels					6,666.0		0050014-002-AC	A.39.		
-002	Boiler #2 (2,246.2 MMBtu/hour - Coal) (75.9 MMBtu/hour - Oil)	VE	Coal	8760	40%			N/A	N/A	62-296.405(1)(a)	A.5.
			No. 2 Fuel Oil	8760	40%			N/A	N/A	62-296.405(1)(a)	A.5.
	-Acid Rain Phase II Unit	PM	Coal	8760	0.1 lb/MMBtu	N/A	N/A	224.6	983.8	62-296.405(1)(b)	A.7.
			No. 2 Fuel Oil	8760	0.1 lb/MMBtu	N/A	N/A	7.6	33.2	62-296.405(1)(b)	A.7.
		PM - SB**	Coal	3 hr/day	0.3 lb/MMBtu	N/A	N/A	673.9	1,229.8	62-210.700(3)	A.8.
			No. 2 Fuel Oil	3 hr/day	0.3 lb/MMBtu	N/A	N/A	22.8	41.6	62-210.700(3)	A.8.
SO <sub>2</sub>	Coal	8760	4.40 lb/MMBtu	N/A	N/A	9,883.3	43,288.8	62-296.405(1)(c)	A.9.		
	No. 2 Fuel Oil	8760	0.5% Sulfur	N/A	N/A	37.6	164.5	Applicant Request	A.10.		
NO <sub>x</sub>	All Fuels					6,666.0		0050014-002-AC	B.19.		
-003	Combustion Turbine (542 MMBtu/hour)	VE	No. 2 F.O.	8760	Less than 20%			N/A	N/A	62-296.320(4)(b)	B.5.
		SO <sub>2</sub>	No. 2 F.O.	8760	0.5% sulfur	N/A	N/A	263.6	1,154.7	AO37-242824	B.6.
-004 & -005	Combined-cycle CT (1,927 MMBtu/hour-Ea. CT) (303 MMBtu/hour-Ea. HRSG)	VE	Natural Gas	8760	10%			N/A	N/A	0050014-002-AC	C.9., C.14.
		NO <sub>x</sub>	Natural Gas	8760		82.9	6,666.0			0050014-002-AC	C.9., C.10.
		CO	Natural Gas	8760	16 ppm			78.7	344.7	0050014-002-AC	C.9., C.11.
		VOC	Natural Gas	8760	4 ppm			10.2	44.7	0050014-002-AC	C.9., C.12.
		SO <sub>2</sub> /SAM	Natural Gas	8760	2 gr/scf				105.0	0050014-002-AC	C.9., C.13.
	Steam Augmentation Mode (with duct burner on)	VE	Natural Gas	1000	10%					0050014-002-AC	C.9., C.14.
		NO <sub>x</sub>	Natural Gas	1000		113.3	6,666.0			0050014-002-AC	C.9., C.10.
		CO	Natural Gas	1000	23 ppm			116.6	58.3	0050014-002-AC	C.9., C.11.
		VOC	Natural Gas	1000	6 ppm			16.8	8.4	0050014-002-AC	C.9., C.12.
		SO <sub>2</sub> /SAM	Natural Gas	1000	2 gr/scf				105.0	0050014-002-AC	C.9., C.12.

**Notes:**

\* The "Equivalent Emissions" listed are for informational purposes.

\*\* PM - SB refers to "soot blowing" and "load change".

**Table 2-1, Summary of Compliance Requirements**

**Table 2-1, Summary of Compliance Requirements**

Gulf Power Company  
Lansing Smith Generating Plant

**FINAL Permit No.:** 0050014-010-AV  
**Facility ID No.:** 0050014

This table summarizes information for convenience purposes only. This table does not supersede any of the terms or conditions of this permit.

E. U. ID No.	Brief Description	Pollutant Name or Parameter	Fuel(s)	Compliance Method	Testing Time	Frequency	Min. Compliance Test Duration	CMS <sup>1</sup>	See Permit Condition(s)
					Frequency	Base Date <sup>2</sup>	Test Duration		
-001	Boiler #1 (1,944.8 MMBtu/hour - Coal) (153 MMBtu/hour -Oil)  -Acid Rain Phase II Unit	VE	Coal	DEP method 9	Annually <sup>3</sup>	Sept., 30	60 Minutes	Yes	A.14., 17., 18. - 20., 23, 25., 28. - 35.
			No. 2 Fuel Oil	DEP method 9	Annually <sup>3</sup>	Sept., 30	60 Minutes	Yes	
		PM	Coal	17, 5, 5B or 5F	Annually <sup>3</sup>	Sept., 30	1 Hour	No	A.17., 18., 21., 25. - 35.
			No. 2 Fuel Oil	17, 5, 5B or 5F	Annually <sup>3</sup>	Sept., 30	1 Hour	No	
		SO <sub>2</sub>	Coal	6, 6A, 6B or 6C	Annually <sup>3</sup>	Sept., 30	1 Hour	Yes	A.14. - 18., 22. - 35.
No. 2 Fuel Oil	Fuel Sampling & Analysis Provided by Vendor				Yes				
-002	Boiler #2 (2,246.2 MMBtu/hour - Coal) (75.9 MMBtu/hr - Oil)  -Acid Rain Phase II Unit	VE	Coal	DEP method 9	Annually <sup>3</sup>	Sept., 30	60 Minutes	Yes	A.14., 17., 18. - 20., 23, 25., 28. - 35.
			No. 2 Fuel Oil	DEP method 9	Annually <sup>3</sup>	Sept., 30	60 Minutes	Yes	
		PM	Coal	17, 5, 5B or 5F	Annually <sup>3</sup>	Sept., 30	1 Hour	No	A.17., 18., 21., 25. - 35.
			No. 2 Fuel Oil	17, 5, 5B or 5F	Annually <sup>3</sup>	Sept., 30	1 Hour	No	
		SO <sub>2</sub>	Coal	6, 6A, 6B or 6C	Annually <sup>3</sup>	Sept., 30	1 Hour	Yes	A.14. - 18., 22. - 35.
No. 2 Fuel Oil	Fuel Sampling & Analysis Provided by Vendor				Yes				
-003	Combustion Turbine A. Combustion Turbine B.	VE	No. 2 F.O.	EPA Method 9	Annually <sup>4</sup>	10/1 - 11/30	60 Minutes	No	B.10., 11., 13.-17.
			Natural Gas	EPA Method 9	Annually <sup>4</sup>	10/1 - 11/30	60 Minutes	No	
		SO <sub>2</sub>	No. 2 F.O.	Fuel Sampling & Analysis Provided by Vendor				No	B.9., B.12. & B.16.
-004 & -005	Combined-cycle CT (1,927 MMBtu/hour-Ea. CT) (303 MMBtu/hour-Ea. HRSG)	VE	Natural Gas	EPA Method 9	Annually <sup>4</sup>	10/1 - 11/30	60 Minutes	No	C.29., C.30., C.35.,C.38.-46.
		NO <sub>x</sub>	Natural Gas	EPA Method 7E	RATA	10/1 - 11/30	1 Hour	Yes	C.29., C.30., C.34. - C.46.
		CO	Natural Gas	EPA Method 10	Annually	10/1 - 11/30	1 Hour	No	C.29., C.30., C.32., C.35., C.37. - C.46.
		VOC	Natural Gas	EPA Method18,25,25A	CO Test as Surrogate	10/1 - 11/30	1 Hour	No	C.29., C.30., C.33., C.35., C.37. - C.46.
		SO <sub>2</sub> /SAM	Natural Gas	EPA Method 20	Upon Request	10/1 - 11/30	1 Hour	No	C.29. - C.31., C.35., C.37. - C.46.

**Notes:**

<sup>1</sup> CMS [=] continuous monitoring system used for compliance in lieu of stack test if marked 'yes'. (Acceptable as long as CMS is maintained and calibrated as required.)

<sup>2</sup> Frequency base date established for planning purposes only; see Rule 62-297.310, F.A.C.

<sup>3</sup> Test not required in years that liquid and/or solid fuel fired less than 400 hours.

<sup>4</sup> If a combustion turbine is operated less than 400 hours per year, test is only required once every 5 years, during the year prior to permit renewal.

**Friday, Barbara**

---

**To:** 'Kosky, Ken'; White, Kevin M.; GDWATERS@southernco.com  
**Cc:** Holtom, Jonathan  
**Subject:** FINAL Title V Permit Renewal No.: 0050014-010-AV - Gulf Power Company - Lansing Smith Electric Generating Plant

Attached for your records is a zip file which contains the FINAL Title V Permit Renewal and associated documents.

If I may be of further assistance, please feel free to contact me.

Barbara J. Friday  
Planner II  
Bureau of Air Regulation  
(850)921-9524  
[Barbara.Friday@dep.state.fl.us](mailto:Barbara.Friday@dep.state.fl.us)





Florida Department of  
Environmental Protection

---

**Memorandum**

TO: Michael G. Cooke

THRU: Trina Vielhauer  
Jim Pennington 

FROM: Jonathan Holtom 

DATE: December 15, 2004

SUBJECT: Final Title V Permit for Gulf Power Lansing Smith Electric Generating Plant

Attached for approval and signature is a Final Title V Air Operation permit renewal for Gulf Power Company's Lansing Smith Electric Generating plant.

No comments are expected to be received from the USEPA in response to the Proposed Title V permit.

I recommend your approval and signature.

Attachments

/jh