



Titan Florida
11000 NW 121 Way
Medley, FL 33178
Telephone (305) 200-1655
Fax (305) 364-2288

RECEIVED

FEB 04 2011

BUREAU OF
AIR REGULATION

January 27, 2011

Ms. Mallika Muthiah
Air Section Chief
DERM
701 NW 1st Ct., Fourth Floor
Miami, FL 33136

Ms. Trina Vielhauer
Chief, Bureau of Air Regulation
FDEP
2600 Blair Stone Rd.
M.S. #5505
Tallahassee, FL 32399

United States Environmental Protection Agency, Region 4
Air, Pesticides, and Toxic Management Division
Sam Nunn Atlanta Federal Center
61 Forsyth Street, SW
Atlanta, GA 30303-8960
(404) 562-9077

Re: *Submittal of §63.10(e) (3) (vi) Summary Report and §63.10(e) (3) (i) Excess Emissions and CMS Performance Report*
Tarmac America LLC – Pennsuco Complex - Medley, Florida

In accordance with the provisions of 40 CFR Part 63.10(e)(3), Tarmac America, LLC. is submitting this summary report for the Pennsuco facility. This report covers the period July 1st through December 31st, 2010. Certain affected facilities were subject to NSPS Subpart F through June 13, 2002 after which they were no longer applicable to NSPS Subpart F. On an after June 14, 2002, these affected sources became subject to the reporting requirements under NESHAP Subpart LLL, which requires submission of a semi-annual summary report.

SUMMARY REPORT – GASEOUS AND OPACITY EXCESS EMISSIONS AND CONTINUOUS MONITORING SYSTEM PERFORMANCE

Name and address (physical location) of the source:

Tarmac America, LLC
11000 NW 121st Way
Medley, Florida 33178

Hazardous Air Pollutants monitored at the source:

- Opacity, as a surrogate for metal HAPs
- Temperature, as a surrogate for dioxin/furan emissions

Description of the process units:

The primary affected source at the facility is the kiln, which is used to produce clinker by heating limestone and other materials for subsequent production of Portland Cement. Emissions from the kiln are controlled by a baghouse and exhausted through the main stack. Clinker from the kiln is sent through a clinker cooler, which is controlled by the main baghouse before exhausting to the atmosphere. There are also several material handling points within the plant that are potential sources of emissions.

Emission and operating parameter limitations specified in standard:

Per the list of relevant standards in Table 1 of 40 CFR 63.1342,

- Main stack exhaust is limited to 0.40 ng TEQ/dscm for dioxin/furan emissions
- Main stack exhaust is limited to 10% opacity on a six-minute block average basis
- All other exhausts are limited to 5% opacity on a six-minute block average basis

Other Required Information:

The Continuous Opacity Monitor System (COMs) manufacturer and model information are:

<u>Location</u>	<u>Emission Unit Number</u>	<u>Model Number</u>	<u>Serial Number</u>
Main Stack	EU 028	Durag DR-290AW	410705

The Continuous Opacity Monitor System (COMS) certifications for the main stack were performed October 10, 2006.

ADDITIONAL INFORMATION REQUIRED BY NESHAP SUBPART LLL

Per 40 CFR 63.1354(b)(9), TARMAC AMERICA, LLC is submitting the following information.


- Exceedances of maximum control device inlet temperature sensors – None
- Failures to calibrate thermocouples – None
- Results of any combustion system components inspections conducted: None

- Failure to comply with any provision of the operations and maintenance plan:
Two (2) incidents discussed in Table 2 of the Periodic Start-up, Shutdown, and Malfunction Report.


Tarmac America, LLC is submitting the startup, shutdown, and malfunction report with this report under separate cover. As noted in §63.10(d) (5) (i), the startup, shutdown, and malfunction report can be submitted simultaneously with the summary report.

By signing this letter, I certify that I am a responsible official as that term is defined in 40 CFR 63.2. I further certify, based on reasonable inquiry that the enclosed report is to the best of my knowledge and belief true, accurate, and complete.

Sincerely,



Muhammad Khan, E.I.
Environmental Engineer

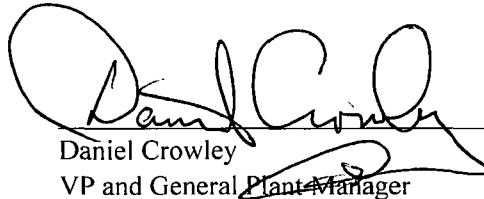

Daniel Crowley
VP and General Plant Manager

cc: Cindy Burns

JULY 1 – DECEMBER 31, 2010 NESHAP SUBPART LLL OPACITY AND CMS REPORTS

Continuous Emission Monitor Report Summary Opacity Excess Emission and Monitoring System Performance

Pollutant: Particulate Matter
Emission Limitation: 10 %
Reporting Period: July 1 through Dec 31, 2010
Company Name: Tarmac America LLC
Address: Medley, FL
Process Unit Description: Main Stack (EU 028)
Instrument Manufacturer: Durag
Instrument Model: DR-290AW
Serial Number: 410705
Last Performance Evaluation: 12/14/2010
Total Source Operating Time: 102,150 Minutes
Total Minutes in Reporting Period: 264,960 Minutes

COMS Performance Summary

	Duration (1)	% Unavailable (2)
1. COMS downtime in reporting period due to:		
a. Monitor Equipment Malfunction	0	0
b. Non-Monitor COM Malfunction	0	0
c. Calibration/QA	426	0.417
d. Other Known Causes	0	0
e. Other Unknown Causes	0	0
2. Total COMS downtime:	0	0

Emission Summary Data

	Duration (1)	% Excess Emissions (3)
1. Excess emissions in reporting period due to:		
a. Startup/shutdown	0	0
b. Control Equipment Malfunction	366	0.358
c. Process Problems	0	0
d. Other Known	0	0
e. Other Unknown	0	0
2. Total duration of excess emissions:	366	0.358

(1) All duration reported in 1-minute periods

(2) % Unavailable is calculated by the following formula:

$$\% \text{ Unavailable} = \text{CEMS downtime during source operating time} / \text{source operating time} * 100$$

(3) % Excess Emissions is calculated by the following formula:

$$\% \text{ Excess Emissions} = \text{Total duration of excess emissions} / \text{source operating time} * 100$$

**Continuous Emission Monitor Report Summary
Thermocouple Excess Emission and Monitoring System Performance**

Pollutant: APCD Temperature
Temperature Limitation: 241.2^oF & 421.1^oF
Reporting Period: July 1, 2010 through Dec 31, 2010
Company Name: Tarmac America LLC
Address: Medley, FL
Process Unit Description: Main Baghouse (EU 028)
1) Instrument Manufacturer: Pyco
Instrument Model / ID: Type K Probe / SO# 20463
Certificate No:
Performance Evaluation: 02/24/2010
Install Date: 05/28/2010

Total Source Operating Time: 102,150 Minutes
Total Minutes in Reporting Period: 264,960 Minutes

CEMS (RFD) Performance Summary

	Duration (1)	% Unavailable (2)
1. TC downtime in reporting period due to:		
a. Monitor Equipment Malfunction	0	0
b. Non-Monitor CMS Malfunction	0	0
c. Calibration/QA	0	0
d. Other Known Causes	0	0
e. Other Unknown Causes	0	0
2. Total COMS downtime:	0	0

Emission Summary Data

	Duration (1)	% Excess Emissions (3)
1. Excess emissions in reporting period due to:		
a. Startup/shutdown	0	0
b. Control Equipment Malfunction	0	0
c. Process Problems	0	0
d. Other Known	0	0
e. Other Unknown	0	0
2. Total duration of excess emissions	0	0.0

(1) All duration reported in 1-minute periods

(2) % Unavailable is calculated by the following formula:

$$\% \text{ Unavailable} = \text{CEMS downtime during source operating time} / \text{source operating time} * 100$$

(3) % Excess Emissions is calculated by the following formula:

$$\% \text{ Excess Emissions} = \text{Total duration of excess emissions} / \text{source operating time} * 100$$