Memorandum

Florida Department of Environmental Protection

To: Al Linero, P.E.
New Source Review Section

From: Joseph Kahn, P.E.
New Source Review Section

Date: November 22, 1999

Re: Miami-Dade RRF, PSD Applicability

Per your request, I have reviewed the records available for the Miami-Dade RRF to determine if the reconstruction of the boilers triggered PSD.

Miami-Dade County Department of Solid Waste Management owns the Miami-Dade County Resources Recovery Facility, and Montenay International Corp. operates the facility. The facility combusts refuse derived fuel in four combustor units. The facility has been operational since 1982, and received its original PSD permit authorizing construction in 1978 (PSD-FL-006). The facility is a major source of air pollution as defined by Department rules.

In 1986, the wet process garbage processing operation was shut down and the plant was converted to processing garbage and trash in a dry process. From 1987 to 1990 the boilers were upgraded through a capital improvement construction program. As part of this project, the owner and operator rebuilt the four combustion units and among other changes increased the physical size of the four combustion units, replaced boiler tubes and bull noses affected by corrosion from firing the wet-processed waste, and replaced the sides of the units. The internals of the boilers were changed from B&W components to Zurn components. These changes increased the combustion weight capacity from 19.55 TPH (39,100 lb/hr) to 27 TPH each, an increase of 38%. Although available records suggest that the permitted steam generating capacity was increased (perhaps from 175,000 to 180,000 pounds per hour) we do not have sufficient information to determine the actual extent of such an increase. It is obvious that there would have been an actual increase in steam generating capacity given the deteriorated condition of the units prior to reconstruction and modification. These physical changes extended the useful life of the facility, regained lost generating capacity, and increased the capacity of this plant. Miami-Dade County and Montenay performed these physical changes without obtaining New Source Review ("NSR") permits authorizing the construction and operation of physical modifications of its boiler units as required by Department rules and the Clean Air Act.

In January 1989 EPA sent Miami-Dade County a Section 114(a) request for information regarding construction activities at the Resources Recovery Facility, to which the county responded on March 9, 1989. As part of the response, the county characterized the physical changes to the boilers as maintenance, repair or replacement as defined under 40 CFR 60.14(e)(1). This rule provides for maintenance, repair or replacement activities to be exempted from the definition of modification provided that such activities are determined by the EPA Administrator to be routine. The county's implication is that the reconstruction of the boilers was routine, which it was not as further described below. Miami-Dade County's letter to EPA on June 8, 1989 describes a verbal understanding between the county and EPA that that PSD did not apply to the modifications, but there is no record in Department files that EPA ever responded in writing about this issue.

It seems clear that the physical changes did constitute a modification pursuant to Department rules, and it seems likely these changes would result in a significant increase in emissions using EPA's netting calculus. Department rules require that no construction or operation of a major modification of a major source occur unless authorized by an air construction permit. Florida has a fully delegated PSD program with respect to power plants subject to the Power Plant Siting Act. Florida implements this delegation

under 40 CFR 52.21, whose provisions are incorporated by reference into the Florida SIP pursuant to 40 CFR 52.530. For the modifications described above, neither the owner nor operator of the facility obtained a PSD permit, nonattainment NSR permit or a minor source permit. Nor was this project exempt from permitting.

None of the modifications fall within the "routine maintenance, repair and replacement" exemption found at 40 CFR 52.21(b)(2)(iii)(a) and Department Rule 62- 210.200(183)(a)1.a., F.A.C. Each of these changes was an expensive capital expenditure performed infrequently at the plant that constituted the replacement and/or redesign of a boiler component with a long useful life. In each instance, the change was performed to increase capacity, regain lost capacity, and/or extend the life of the unit. In many instances, the original component was replaced with a component that was substantially redesigned in a manner that increased emissions. That the "routine maintenance, repair and replacement" exemption does not apply where construction activity is at issue was known to the utility industry since at least 1988 when EPA issued a widely publicized applicability determination regarding utility modifications at a Wisconsin Electric Power Co. ("WEPCO") facility. EPA's interpretation of this exemption was upheld by the court of appeals in 1990. Wisconsin Electric Power Co. v. Reilly, 893 F.2d 901 (7th Cir. 1990).

None of these modifications fall within the "increase in hours of operation or in the production rate" exemption found at 40 CFR 52.21(b)(2)(iii)(f), or Florida Rule 62-210.200(183)(a)2., F.A.C. This exemption is limited to stand-alone increases in operating hours or production rates, not where such increases follow or are otherwise linked to construction activity. That the hours of operation/rates of production exemption does not apply where construction activity is at issue was known to the utility industry since at least 1988 when EPA issued a widely publicized applicability determination regarding utility modifications at a Wisconsin Electric Power Co. ("WEPCO") facility. EPA's interpretation of this exemption was upheld twice by the court of appeals, in 1989 and in 1990. Puerto Rican Cement Co. v. EPA, 889 F.2D 292 (1st Cir. 1989); Wisconsin Electric Power Co. v. Reilly, 893 F.2d 901 (7th Cir. 1990).

It seems clear that the reconstruction of the boilers constituted a modification. The reconstruction was a physical change that would have resulted in increases in emissions exceeding the PSD significance criteria. EPA's current actions against coal-fired boilers for failure to obtain PSD permits for less extensive changes demonstrate that the physical changes at Dade RRF required a PSD permit. Particularly in light of EPA's current nationwide emphasis on detecting and remedying failures of owners and operators to obtain PSD permits, the Department should require an after-the-fact PSD permit for the reconstruction of the boilers at the Miami-Dade Resources Recovery Facility.

Montcray / Dade County Meeting 3/16/00

David Buff	Golder Associates	352-336-5600
Ben Gilbert	Montenay	305-593-7000
Pat Comer	DEP/OGC	(850) 921-9621
Jim Pennington	DEP/BAR	(850) 921-9515
AL LINERO	DEP/BAR	850/921-9523
Scott Sheplak	DEP/BAR	850/921-9532
Clair Fancy	DEP/BAR	850 921 9503
Tom Tittle	DEP/WPB	
David Dee	Landers + Parsons	850-681-034
Anetha Lee	Montenay	305/718-3933, ext. 205
JESS McCARTY	DADE COUNTY ATTY'S OFFICE	305-375-5480
Joseph Kahn	DEP - BAR	850-921-9519
Lee Casey	DC DSWM	305-594-1670
Vicente Castro	DCSWM	305 594-1677
Steve Passage	Montenay	212-826-7054
Bruce Mitchell	FDEP	850-921-9506

Golder Associates Inc.

6241 NW 23rd Street, Suite 500
Gainesville, FL 32653-1500
Telephone (352) 336-5600
Fax (352) 336-6603

May 30, 2001

0037532

Florida Department of Environmental Protection
Bureau of Air Regulation
2600 Blair Stone Road
Tallahassee, FL 32399-2400

RECEIVED
MAY 31 2001
BUREAU OF AIR REGULATION

Attention: Mr. Scott M. Sheplak, P.E.

RE: MIAMI-DADE COUNTY RESOURCES RECOVERY FACILITY
DRAFT TITLE V PERMIT NO. 0250348-004-AV

Dear Mr. Sheplak:

Miami-Dade County Department of Solid Waste (DCDSW), Montenay International, and Golder Associates Inc. (Golder) has received the Intent to Issue and draft Title V permit revision for the Miami-Dade County Resources Recovery Facility, dated April 12, 2001. The draft permit has been reviewed by all parties, and the comments have been incorporated into the attached marked-up copy of the draft permit. The majority of changes are minor in nature, and have been made for clarification purposes or reflect minor corrections.

Attached is a flow diagram which clarifies the ash handling system equipment. The Title V permit has been revised to correctly describe the system.

Also, some general rule language has been deleted regarding testing requirements to eliminate redundancy and shorten an otherwise lengthy permit.

It is requested that a "lime silo w/baghouse be located in the water treatment area" be added to Appendix I-1, List of Insignificant Emissions Units and/or Activities

Please note that changes should also be made to the Statement of Basis to be consistent with the attached revisions.

Please consider these comments in issuing the final revised Title V permit. Please call Anetha Lue (305-854-2229) or myself (352-336-5600) directly if you have any questions concerning this submittal, or would like to discuss any of the proposed changes.

Sincerely,

GOLDER ASSOCIATES INC.

David A. Buff, P.E., Q.E.P.
Principal Engineer
Florida P.E.#19011

SEAL

DB/jkw

Enclosure

cc: Anetha Lue, P.E., Montenay
Vicente Castro, Miami-Dade SWM
Lee Casey, Miami-Dade SWM
David Dee, Landers and Parsons

P:\Projects\2000\0037\0037532A Dade County\02\L030701.doc

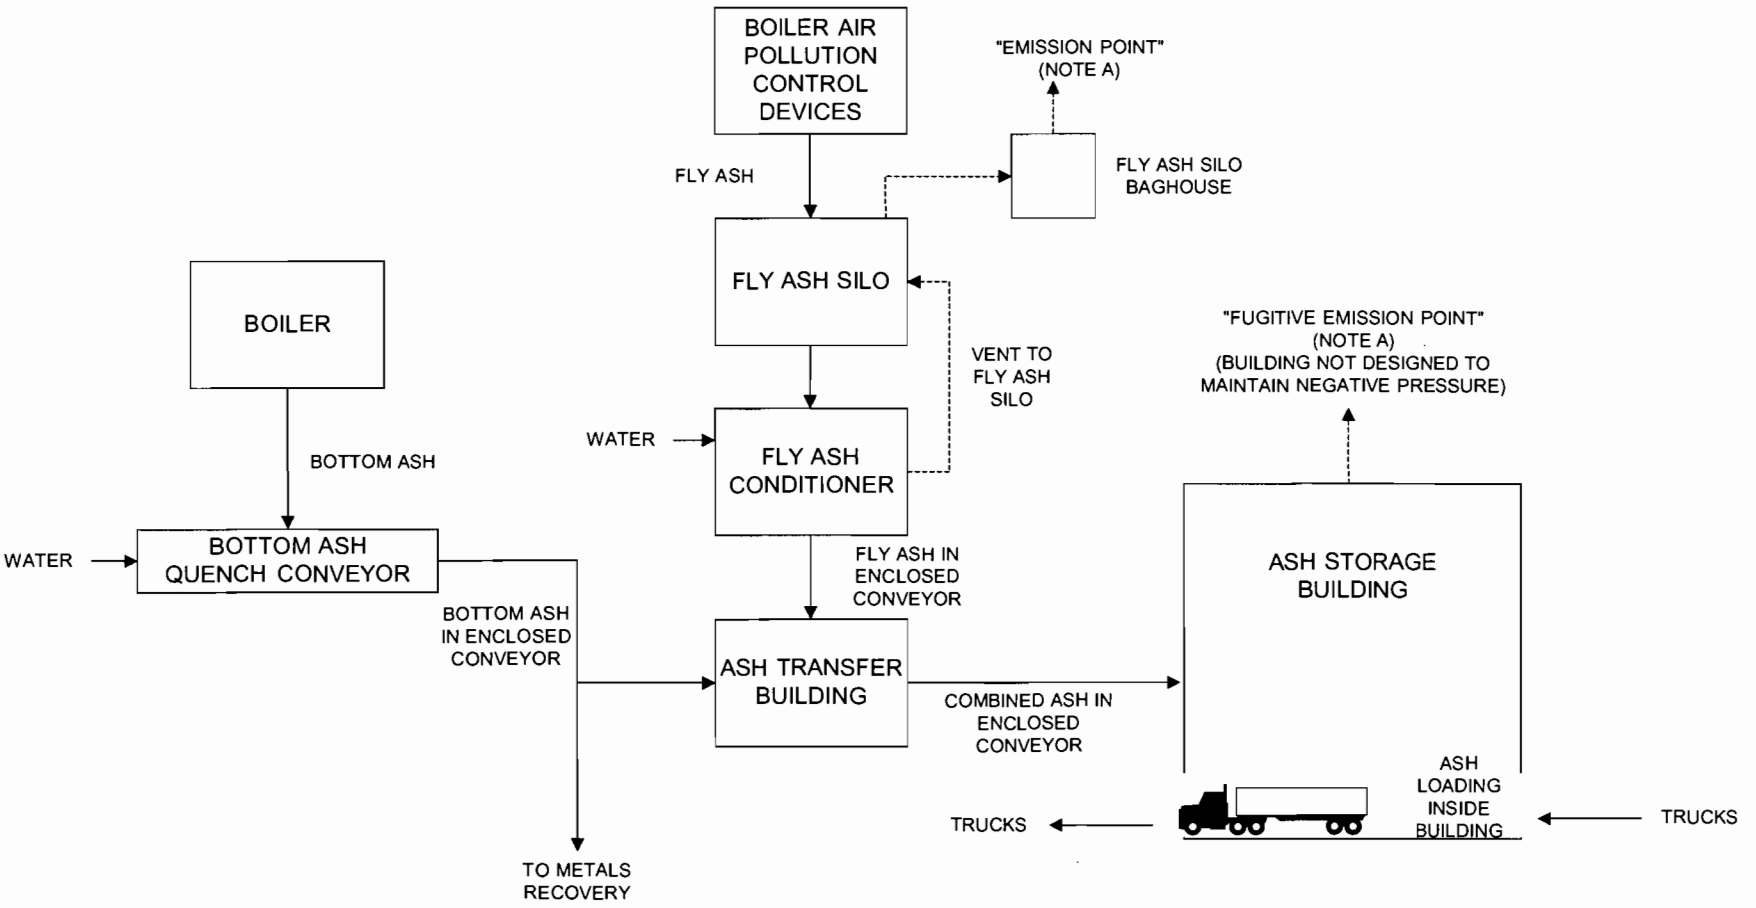

NOTE: Visible emissions testing required at these emission points in the air permit (Subpart Cb also requires Method 22 for all transfer points in ash system).

Flow Diagram of Ash Handling System

Miami-Dade Resources Recovery Facility

Process Flow Legend

Solid/Liquid ——→

Gas - - - - - →

Steam ..... →

Filename: 0037532A\03\FLOW.VSD

Date: 5/30/01

Golder Associates

Miami-Dade County Department of Solid Waste Management
Miami-Dade County Resource Recovery Facility
Facility ID No.: 0250348
Miami-Dade County

Title V Air Operation Permit Revision
DRAFT Title V Permit Revision No.: 0250348-004-AV

Permitting Authority
State of Florida
Department of Environmental Protection
Division of Air Resources Management
Bureau of Air Regulation
Title V Section

Mail Station #5505
2600 Blair Stone Road
Tallahassee, Florida 32399-2400
Telephone: 850/488-0114
Fax: 850/922-6979

RECEIVED
MAY 31 2001
BUREAU OF AIR REGULATION

Compliance Authority
Department of Environmental Protection
Southeast District
400 North Congress Avenue
West Palm Beach, Florida 33401
Telephone: 561/681-6600
Fax: 561/681-6755

Title V Air Operation Permit Revision

DRAFT Title V Operation Permit Revision No.: 0250348-004-AV

Table of Contents

Section

Title V Air Operation Permit Placard Page **1**
Section I. Facility Information. **2**
Subsection A. Facility Description. 2
Subsection B. Summary of Emissions Unit ID Numbers and Brief Descriptions. 3
Subsection C. Relevant Documents. 3
Section II. Facility-wide Conditions. **4**
Section III. Emissions Units and Conditions. **7**
Subsection A. Reserved.. 7
Subsection B. Units 1 thru 4 RDF Combustors and Auxiliary Burners 8
Subsection C. MSW to RDF Processing and Bulky Waste to Biomass Processing Facilities. 52
Subsection D. Ash Building and Handling System. 58
Subsection E. Lime Storage Silo. 68
Subsection F. Activated Carbon or Comparable Reactant Storage Silo 73

Permittee:
Miami-Dade County Dept. of Solid Waste Management
8675 NW 53rd Street, Suite 201
Miami, Florida 33166-4598

DRAFT Permit Revision No.: 0250348-004-AV
Facility ID No.: 0250348
SIC Nos.: 49, 4953
Project: Title V Air Operation Permit Revision

The purpose for this permit revision is to incorporate the terms and conditions established in air construction permit, No. 0250348-003-AC/PSD-FL-006(D), issued July 21, 2000. The existing facility is located at 6990 Northwest 97th Avenue, Miami, Florida 33178-6430, better described as approximately 0.5 mile north of Northwest 58th Street immediately west of Northwest 97th Avenue, Miami, Dade County. UTM Coordinates: Zone 17, 564.30 km East and 2857.40 km North; Latitude: 25° 50' 06" North and Longitude: 80° 21' 30" West.

STATEMENT OF BASIS: This Title V air operation permit revision is issued under the provisions of Chapter 403, Florida Statutes (F.S.), and Florida Administrative Code (F.A.C.) Chapters 62-4, 62-210, and 62-213. The above named permittee is hereby authorized to perform the work or operate the facility shown on the application and approved drawing(s), plans, and other documents, attached hereto or on file with the permitting authority, in accordance with the terms and conditions of this permit.

Referenced attachments made a part of this permit revision:
Appendix I-1, List of Insignificant Emissions Units and/or Activities
Appendix SS-1, Stack Sampling Facilities (version dated 10/7/96)
Appendix TV-3, Title V Conditions (version dated 04/30/99)
Figure 1: Summary Report-Gaseous and Opacity Excess Emission and Monitoring System Performance (40 CFR 60)
Table 297.310-1, Calibration Schedule
Statement of Basis
Appendix H-1, Permit History/ID Number Transfers

Initial Effective Date: October 2, 2000
Revision Effective Date: (issue date)
Renewal Application Due Date: April 2, 2005
Expiration Date: October 2, 2005

Howard L. Rhodes, Director,
Division of Air Resources Management

HLR/sms/bm

Section I. Facility Information.

Subsection A. Facility Description.

This existing facility consists of four identical Zurn Refuse Derived Fuel (RDF) Spreader Stoker Combustion Units 1 thru 4, with auxiliary burners, and a cooling tower. The facility's primary activities are garbage and trash receiving and processing (including a metals recovery system); fuel handling and storage; biomass production and export; RDF, natural gas, and propane combustion; ash storage and processing, including a monofill ash landfill; and, maintaining ancillary support equipment. These emissions units recently underwent a permit modification activity (PSD-FL-006(D)) that was completed on July 21, 2000. The purpose of the permit modification was to upgrade the air pollution control system pursuant to the requirements of 40 CFR 60, Subpart Cb - Emissions Guidelines and Compliance Schedules for Municipal Waste Combustors That Are Constructed on or Before December 19, 1995, for the existing four RDF boilers built in 1987-1989. The modifications included changes to the overfire air system, fuel feed system, and associated fuel distribution system. The electrostatic precipitators will be replaced with fabric filters, spray dryer absorbers and activated carbon injection units; and, a selective non-catalytic reduction system will be installed, if it is necessary to comply with 40 CFR 60, Subpart Cb.

The facility is designed to process 3,000 tons/day, 18,000 tons/wk, and 936,000 tons/yr of municipal solid waste (MSW: trash and garbage) into RDF and saleable extractables, such as metals. The biomass fuel preparation system will process up to 400,000 tons per year of the bulky solid waste into biomass, which will be either transported off-site for use in biomass-fired cogeneration units or combusted on-site.

Each combustor has a design rated (nominal) capacity of 27 tons/hr (TPH) of RDF [648 tons/day (TPD): as determined by a rolling 12-month average]. RDF is the primary fuel; and, propane and natural gas are auxiliary fuels used for startup, shutdown, and malfunctions, and to support good combustion. The auxiliary burners have a maximum heat input of 80 MMBtu/hr. The facility is allowed to burn the facility's processed biomass fuel (5%, by weight) not transported off-site, natural gas, non-MSW materials as segregated waste (5%, by weight), used tires (3%, by weight), and on-specification used oil, oily water, oily sludge, spent greases and oily solid waste (such as rags) generated on-site. The maximum continuous rating (MCR) for each combustor is 180,000 lbs/hr steam per unit at 625 psig and 730 ^{0}F, when firing RDF. Units 1 and 2 provide steam to a turbine-generator with a nameplate rating of 38.5 megawatts (MW; gross); and, Units 3 and 4 provide steam to a turbine-generator with a nameplate rating of 38.5 MW (gross); and, the electricity is used for in-plant electrical load and the excess is sold.

To comply with 40 CFR 60, Subpart Cb, combustion control systems will be installed for carbon monoxide and nitrogen oxides, as necessary, to meet the emissions limits. Continuous monitoring ~~devices~~ systems for combustion, process parameters, SO_2, NOx, and CO will be installed to improve combustion efficiency and control. The air pollution control equipment will consist of ~~a~~ spray dryer absorbers (for acid gases), ~~an~~ activated carbon or comparable reactant injection systems (for mercury and dioxin), and ~~a~~ fabric filter baghouses (for particulate matter and heavy metals). The facility will also have an ash building and handling system, ~~a~~ new lime storage silos, and ~~an~~ activated carbon storage silos. In addition, the existing stacks and flue gas handling systems will be replaced with new stacks and flue gas handling systems: Units 1 and 2 will share a common stack, each with its own flue; and, Units 3 and 4 will share a common stack, each with its own flue. Odors will be minimized by keeping the truck access doors closed during non-use; and, a negative pressure will be maintained on the garbage tipping floor and the air collected will be used as combustion air.

Also included in this permit are miscellaneous insignificant emissions units and/or activities.

This facility is a major source of hazardous air pollutants (HAPs).

The use of 'Permitting Notes' throughout this permit are for informational purposes, only, and are not permit conditions.

Subsection B. Summary of Emissions Unit ID Numbers and Brief Descriptions.

The facility consists of the following emissions units/activities:

E.U./Facility ID No.	Brief Description
-001/Unit 1	Refuse Derived Fuel (RDF) Spreader Stoker Combustor & Auxiliary Burners
-002/Unit 2	RDF Spreader Stoker Combustor & Auxiliary Burners
-003/Unit 3	RDF Spreader Stoker Combustor & Auxiliary Burners
-004/Unit 4	RDF Spreader Stoker Combustor & Auxiliary Burners
-rrr	MSW to RDF Processing Facility with Baghouses
-sss	Bulky Waste to Biomass Processing Facility with Baghouses
-ttt	Ash Building and Handling System Ash Storage Silo with Baghouse
-uuu	Lime Storage Silos each with a Baghouse
-vvv	Activated Carbon or Comparable Reactant Storage Silos each with a Baghouse

Please reference the Permit Number, the Facility Identification Number, and the appropriate Emissions Unit(s) ID Number(s) on all correspondence, test report submittals, applications, etc.

Subsection C. Relevant Documents.

{Permitting Note: The documents listed below are not a part of this permit; however, they are specifically related to this permitting action.}

These documents are provided to the permittee for informational purposes:
Appendix A-1, Abbreviations, Acronyms, Citations, and Identification Numbers (version dated 2/5/97)

These documents are on file with the permitting authority:
Construction permit No. 0250348-003-AC/PSD-FL-006(D) issued July 21, 2000.
Application for a Title V Permit Revision received October 10, 2000.
Initial Title V Permit issued October 12, 2000.

Section II. Facility-wide Conditions.

The following conditions apply facility-wide:

1. Appendix TV-3, Title V Conditions, is a part of this permit.
{Permitting note: Appendix TV-3, Title V Conditions is distributed to the permittee only. Other persons requesting copies of these conditions shall be provided one copy when requested or otherwise appropriate. If desired, a copy of Appendix TV-3, Title V Conditions can be downloaded from the Division of Air Resources Management's Internet Web site located at the following address:
"http://www.dep.state.fl.us/air/permitting/TitleVperm.htm".}

2. General Pollutant Emission Limiting Standards. Objectionable Odor Prohibited. The permittee shall not cause, suffer, allow, or permit the discharge of air pollutants which cause or contribute to an objectionable odor. The truck access doors to the facility shall remain closed except during normal working shifts when garbage is being received near the garbage storage pit area to allow vehicle passage. Also, a negative pressure shall be maintained on the garbage tipping floor and air from within the garbage building will be used as combustion air.
[Rule 62-296.320(2), F.A.C.; Rule 62-296.401(2)(b), F.A.C.; PA 77-08; and, PSD-FL-006(A) & (D)]

3. Prevention of Accidental Releases (Section 112(r) of CAA).
a. The permittee shall submit its Risk Management Plan (RMP) to the Chemical Emergency Preparedness and Prevention Office (CEPPO) RMP Reporting Center when, and if, such requirement becomes applicable ; and
b. The permittee shall submit to the permitting authority Title V certification forms or a compliance schedule in accordance with Rule 62-213.440(2), F.A.C.
[40 CFR 68]

4. Insignificant Emissions Units and/or Activities. Appendix I-1, List of Insignificant Emissions Units and/or Activities, is a part of this permit.
[Rules 62-213.440(1), 62-213.430(6), and 62-4.040(1)(b), F.A.C.]

5. Unregulated Emissions Units and/or Activities. Appendix U-1, List of Unregulated Emissions Units and/or Activities, is a part of this permit. **There are none deemed so at this time.**
[Rule 62-213.440(1), F.A.C.]

6. General Pollutant Emission Limiting Standards. Volatile Organic Compounds Emissions or Organic Solvents Emissions. The permittee shall allow no person to store, pump, handle, process, load, unload or use in any process or installation, volatile organic compounds or organic solvents without applying known and existing vapor emission control devices or systems deemed necessary and ordered by the Department.

{Permitting Note: No vapor emission control devices or systems are deemed necessary nor ordered by the Department as of the issuance date of this permit.}
[Rule 62-296.320(1)(a), F.A.C.]

7. General Particulate Emission Limiting Standards. General Visible Emissions Standard. Except for emissions units that are subject to a particulate matter or opacity limit set forth or established by rule and reflected by conditions in this permit, no person shall cause, let, permit, suffer or allow to be discharged into the atmosphere the emissions of air pollutants from any activity, the density of which is equal to or greater than that designated as Number 1 on the Ringelmann Chart (20 percent opacity). EPA Method 9 is the method of compliance pursuant to Chapter 62-297, F.A.C.
[Rules 62-296.320(4)(b)1. & 4., F.A.C.]

8. Reasonable precautions to prevent emissions of unconfined particulate matter at this facility include:

A. Facility's Processing of Biomass
(1) Windows and doors of the enclosed space shall be kept closed except when needed to minimize fugitive dust.
(2) Conveyor systems, screens, handling shredded wood fines and dust will be covered or enclosed.
(3) Shredded wood conveyor systems have baghouse pickup points at the transfer points.
(4) Wind breaks will be installed around the shredded wood load-out area.
(5) Floors in the enclosed area will be cleaned periodically.
(6) Loading areas for shredded wood will be cleaned or wetted as needed to minimize fugitive dust.
(7) Trucks transporting shredded wood will be covered.
(8) Landscaping or planting of vegetation.

B. Other Precautions to be taken at the Dade County Complex
(1) Employment of proper dust-control techniques to prevent fugitive dust emissions during construction activities such as demolition of buildings, grading roads, construction, and land clearing (including construction to be experienced during facility improvements to air pollution control equipment to meet the Emission Guideline requirements of 40 CFR 60, Subpart Cb).
(2) Application of asphalt, water, oil, chemicals, or other dust suppressants to roads, yards, open stock piles, and similar emissions units/activities as necessary to minimize fugitive dust (except for within the ash landfill).
(3) Confining abrasive blasting where possible.
(4) Operation of the landfill in accordance with all applicable portions of Chapter 62-7, F.A.C.
(5) Landscaping or planting of vegetation.
(6) All roads, except for roads within the ash landfill, shall be adequately paved to control visible emissions.
(7) Maximum 15 MPH speed limit signs shall be posted to minimize dust generation.
(8) Residue from grates, grate siftings, and ash from the combustor/boiler and fabric filter hoppers during normal operations shall be discharged into the ash handling and silo system to minimize fugitive dust.
(9) The ash/residue in the bottom ash building shall be kept sufficiently moist to minimize fugitive dust during storage and handling operations.
(10) Covering transport vehicles for ash.
(11) Wetting of bottom ash and fly ash as necessary to minimize fugitive dust prior to the use of conveyor systems.

[Rule 62-296.320(4)(c)2., F.A.C.; PSD-FL-006(A) & (D); PA 77-08C; and, 0250348-001-AV]

{Permitting Note: This condition presents the reasonable precautions to be implemented in accordance with Rule 62-296.320(4)(c), F.A.C., in lieu of the requirements of Condition No. 58 of Appendix TV-3.}

9. When appropriate, any recording, monitoring, or reporting requirements that are time-specific shall be in accordance with the effective date of the permit, which defines day one.
[Rule 62-213.440, F.A.C.]

10. The permittee shall submit all compliance related notifications and reports required of this permit to the Department's Southeast District office and the Miami-Dade County Department of Environmental Resources Management (DERM; also, known as the "designee") office at the following address:

Department of Environmental Protection
Southeast District
400 North Congress Avenue
West Palm Beach, Florida 33401
Telephone: 561/681-6600
Fax: 561/681-6755

Miami-Dade County Dept. of Environmental Resources Management
Air Section
33 Southwest Second Avenue, Suite 900
Miami, Florida 33130-1540
Telephone: 305/372-6925
Fax: 305/372-6954

[PSD-FL-006(D)]

11. Any reports, data, notifications, certifications, required to be sent to the United States Environmental Protection Agency, Region 4, should be sent to:

United States Environmental Protection Agency, Region 4
Air, Pesticides & Toxics Management Division
Air & EPCRA Enforcement Branch
Air Enforcement Section
61 Forsyth Street
Atlanta, Georgia 30303
Telephone: 404/562-9155
Fax: 404/562-9163

12. Statement of Compliance. The annual statement of compliance pursuant to Rule 62-213.440(3)(a)2., F.A.C., shall be submitted within 60 (sixty) days after the end of the calendar year.
[Rule 62-213.440(3)(a)2., F.A.C.]

Section III. Emissions Units and Conditions.

Subsection A. This section addresses the following emissions unit(s).

Reserved.

Subsection B. This section addresses the following emissions unit(s).

E.U./Facility ID Nos.	Brief Description
-001/Unit 1	Refuse Derived Fuel (RDF) Spreader Stoker Combustor & Auxiliary Burners
-002/Unit 2	RDF Spreader Stoker Combustor & Auxiliary Burners
-003/Unit 3	RDF Spreader Stoker Combustor & Auxiliary Burners
-004/Unit 4	RDF Spreader Stoker Combustor & Auxiliary Burners

{Permitting Note: These emissions units are allowed to burn refuse derived fuel as the main fuel. ***Refuse Derived Fuel*** means a type of municipal solid waste produced by processing municipal solid waste through shredding and size classification. This includes all classes of refuse derived fuel including low-density fluff refuse-derived fuel through densified refuse-derived fuel and pelletized refuse-derived fuel. ***Refuse-derived fuel stoker*** means a steam generating unit that combusts refuse-derived fuel in a semisuspension firing mode using air fed distributors. Each of the four refuse derived ~~waste~~ fuel combustors (RDFs) produce at the manufacturer's maximum continuous rating (MCR) steam flow of 180,000 lbs/hr (at 625 psig and 730 ^{0}F). Short term capacity is limited by limiting steam production, which effectively limits heat input.}.
[PSD-FL-006(D); and, 40 CFR 60.51b]

ARMS emissions units Nos. -001, -002, -003 and -004 are identical rebuilt refuse derived fuel (RDF) spreader stoker combustors with Zurn attributes designated as Units 1, 2, 3 and 4, respectively. RDF is burned in suspension and on a grate with a primary and secondary air system to provide air in varying proportions to promote the proper combustion. Units 1 thru 4 began commercial operation January 1, 1982. Particulate matter emissions from Units 1, 2, 3 and 4 will be controlled fabric filters, while CO and NO_X emissions are controlled by good combustion practices. Following retrofitting to comply with the NSPS, 40 CFR 60, Subparts Cb and Eb, each boiler will have a maximum capacity of 648 tons of RDF per day, as determined by a rolling 12-month average. The design rated (nominal) capacity for each emissions unit is 27 tons/hour of RDF. Auxiliary burners associated with each RDF combustor will be permitted to fire propane and natural gas at a maximum heat input of 80 MMBtu/hr for startup, shutdown and malfunction, and at other times when necessary and consistent with good combustion practices. No. 2 fuel oil (with a maximum sulfur content of 0.08%, by weight) was allowed to be used for startup only in PA 77-08, but the facility has chosen not to use fuel oil in the auxiliary burners to date. Each unit will be allowed to produce at the manufacturer's maximum continuous rating (MCR) steam flow of 180,000 lbs/hr per unit, at 625 psig and 730 ^{0}F, when firing RDF. Combustion control systems will be installed for carbon monoxide and nitrogen oxides, as necessary, to meet the emissions limits. Continuous monitoring devices for combustion and process parameters and SO_2, NOx and CO will be installed to improve combustion efficiency and control. The air pollution control equipment will consist of a spray dryer absorber (for acid gases), an activated carbon or comparable reactant injection system (for mercury and dioxin), and a fabric filter baghouse (for particulate matter and heavy metals). CO and NO_X emissions are currently controlled by good combustion practices; but, for NO_X, a selective non-catalytic reduction system will be installed, if it is necessary to comply with 40 CFR 60, Subpart Cb. In addition, new stacks and flue gas handling systems will replace the existing stacks and flue gas handling systems (By design, Units 1 and 2 will each have a separate flue and share a common stack: Stack height = 250 feet, flue exit diameter = 8.5 feet, flue gas exit temperature = ~~270~~ 300 °F, actual volumetric flow rate = ~~177,200~~ 227,000 acfm, and maximum dry standard volumetric flow rate = ~~109,054~~ 88,250 dscfm @ 7% O2; and, Units 3 and 4 will each have a separate flue and share a common stack: Stack height = 250 feet, flue exit diameter = 8.5 feet, exit temperature = 300 °F, actual volumetric flow rate = 227,000 acfm, and maximum dry standard volumetric flow rate = 88,250 dscfm @ 7% O2). Two 38.5 MW (gross) turbine-generators (using the steam from the four boilers) will supply the in-plant electrical load and the balance of the electricity generated will be sold. Odors will be minimized by keeping the truck access doors closed during non-use; and, a negative pressure will be maintained on the garbage tipping floor and the air collected will be used as combustion air.

{Permitting notes. These emissions units are regulated under NSPS - 40 CFR 60, Subpart Cb, Emissions Guidelines and Compliance Times for Large Municipal Waste Combustors That Are Constructed on or Before September 20, 1994, adopted and incorporated by reference, subject to provisions, in Rule 62-204.800(8)(b), F.A.C.; NSPS - 40 CFR 60, Subpart E, Standards of Performance for Incinerators, adopted and incorporated by reference in Rule 62-204.800(7), F.A.C.; NSPS - 40 CFR 60, Subpart Eb, Standards of Performance for Large Municipal Waste Combustors That Are Constructed, Modified or Reconstructed on or Before September 20, 1994, adopted and incorporated by reference in Rule 62-204.800(7), F.A.C.; Rule 62-212.400(5), F.A.C., Prevention of Significant Deterioration (PSD) (PSD-FL-006 and PSD-FL-006(A thru D); Rule 62-212.400(6), F.A.C., Best Available Control Technology (BACT); Rule 62-296.401(2), F.A.C., Incinerators; Rule 62-296.416, F.A.C., Waste-to-Energy Facilities; and, PA 77-08 & 77-08(A, B, & C). Also, please note that conditions in 40 CFR 60, Subpart Cb, reference requirements that are contained in 40 CFR 60, Subpart Eb.}

The following specific conditions, unless revised, apply to the emissions unit(s) listed above:

General

B.1. The Standards of Performance for New Stationary Sources adopted by reference in Rule 62-204.800(7), F.A.C., the Emission Guidelines for Existing Sources adopted by reference in Rule 62-204.800(8), F.A.C., and the National Emissions Standards for Hazardous Air Pollutants adopted by reference in Rule 62-204.800(9), F.A.C. shall be controlling over other standards in the air pollution rules of the Department except that any emissions limiting standard contained in or determined pursuant to the air pollution rules of the Department which is more stringent than one contained in a Standard of Performance, an Emission Guideline, or a National Emission Standard, or which regulates emissions of pollutants or emissions units not regulated by an applicable Standard of Performance, Emission Guideline, or National Emission Standard, shall apply.
[Rules 62-204.800(7)(c), (8)(a)1., and (9)(c), F.A.C.]

B.2. Definitions. For the purposes of Rules 62-204.800(7), (8), and (9), F.A.C., the definitions contained in the various provisions of 40 CFR Parts 60 and 61, adopted herein shall apply except that the term "Administrator" when used in 40 CFR Parts 60 and 61, shall mean the Secretary or the Secretary's designee except as noted in 40 CFR 61.157.
[40 CFR 60.2; and, Rules 62-204.800(7)(a), (8)(a)2., and, (9)(a), F.A.C.]

B.3. Definitions - Subpart Cb. For purposes of Rule 62-204.800(8)(b), F.A.C., the definitions in 40 CFR 60.51b shall apply except for the term "municipal waste combustor plant", which shall have the same meaning as defined in 40 CFR 60.31b.
[Rule 62-204.800(8)(b)2., F.A.C.]

B.4. Circumvention. No owner or operator subject to the provisions of 40 CFR 60 shall build, erect, install, or use any article, machine, equipment or process, the use of which conceals an emission which would otherwise constitute a violation of an applicable standard. Such concealment includes, but is not limited to, the use of gaseous diluents to achieve compliance with an opacity standard or with a standard which is based on the concentration of a pollutant in the gases discharged to the atmosphere.
[40 CFR 60.12]

B.5. Each emissions unit shall have a metal name plate affixed in a conspicuous place on the shell showing manufacturer, model number, type waste, rated capacity, and certification number.
[PA 77-08; and, PSD-FL-006(D)]

B.6. The height of the boiler stacks (2) shall not be less than 250 feet above the ground level at the base of the stack.
[PSD-FL-006(A) & (D)]

B.7. Units 1 thru 4 are subject to the requirements of 40 CFR 60, Subpart E, except that where requirements within this permit are more restrictive, the requirements of this permit shall apply.
[Rule 62-4.070(3), F.A.C.]

Essential Potential to Emit (PTE) Parameters

B.8. Capacity.
(1) RDF Charging Rate and Heat Input. The design rated (nominal) capacity of each emissions unit is 27 tons/hour of RDF. The maximum charging rate of each emissions unit is 648 tons/day of RDF and other permitted fuels, as determined by a rolling 12-month average (see specific conditions **B.12.** and **B.107.**).
(2) Facility's Municipal Solid Waste Processing Rates. The facility is permitted to process a maximum of 3,000 tons/day, 18,000 tons/wk, and 936,000 tons/yr of RDF.
(3) Biomass Fuel Preparation System. The biomass fuel preparation system is allowed to process up to 400,000 tons/yr of the bulky solid waste into biomass, which will be either transported off-site for use in biomass-fired cogeneration units or combusted on-site.
(4) Steam Flow. Each boiler pair shall not exceed an average of 180,000 pounds of steam produced per hour per unit, based on a 24-hr block averaged measurement.
(5) Load Level. Unit load means the steam load of the municipal waste combustor (MWC) measured as specified in 40 CFR 60.58b(i)(6). Compliance with load level requirements shall be determined by a steam meter using ASME Power Test Code for Steam Generating Units, Power Test Code 4.1, section 4 (see 40 CFR 60.58b(i)(6)(ii) & (iii). Each MWC unit shall not operate at a load level greater than 110 percent of the unit's "maximum demonstrated unit load", based on a 4-hour block averaged measurements of steam flow. The "maximum demonstrated unit load" is defined by specific condition B.10. (see specific condition **B.10.**).
(6) The procedures specified in paragraphs (a) and (b) shall be used for calculating municipal waste combustor unit capacity as defined under 40 CFR 60.51b.

(a) For municipal waste combustor units capable of combusting municipal solid waste continuously for a 24-hour period, municipal waste combustor unit capacity shall be calculated based on 24 hours of operation at the maximum charging rate. The maximum charging rate shall be determined as specified in paragraphs (i) and (ii) as applicable.

(i) For combustors that are designed based on heat capacity, the maximum charging rate shall be calculated based on the maximum design heat input capacity of the unit and a heating value of 12,800 kilojoules per kilogram for combustors firing refuse-derived fuel and a heating value of 10,500 kilojoules per kilogram for combustors firing municipal solid waste that is not refuse-derived fuel.

(ii) For combustors that are not designed based on heat capacity, the maximum charging rate shall be the maximum design charging rate.

~~(b) For batch feed municipal waste combustor units, municipal waste combustor unit capacity shall be calculated as the maximum design amount of municipal solid waste that can be charged per batch multiplied by the maximum number of batches that could be processed in a 24-hour period. The maximum number of batches that could be processed in a 24-hour period is calculated as 24 hours~~

~~divided by the design number of hours required to process one batch of municipal solid waste, and may include fractional batches (e.g., if one batch requires 16 hours, then 24/16, or 1.5 batches, could be combusted in a 24 hour period). For batch combustors that are designed based on heat capacity, the design heating value of 12,800 kilojoules per kilogram for combustors firing refuse-derived fuel and a heating value of 10,500 kilojoules per kilogram for combustors firing municipal solid waste that is not refuse-derived fuel shall be used in calculating the municipal waste combustor unit capacity.~~
[40 CFR 60.31b and 40 CFR 60.58b(j); Rules 62-4.160(2) and 62-210.200(PTE), F.A.C.; and, PSD-FL-006(D)]

B.9. Emissions Unit Operating Rate Limitation After Testing. See specific condition **B.70.**
[Rule 62-297.310(2), F.A.C.]

B.10. Maximum Demonstrated Municipal Waste Combustor Unit Load. Maximum demonstrated municipal waste combustor unit load means the highest 4-hour arithmetic average municipal waste combustor unit load achieved during four consecutive hours during the most recent dioxin/furan performance test demonstrating compliance with the applicable limit for municipal waste combustor organics specified in specific condition **B.34.**
[40 CFR 60.34b(b) and 40 CFR 60.51b]

B.11. Maximum Demonstrated Particulate Matter Control Device Temperature. Maximum demonstrated particulate matter control device temperature means the highest 4-hour arithmetic average flue gas temperature measured at the particulate matter control device inlet during four consecutive hours during the most recent dioxin/furan performance test demonstrating compliance with the applicable limit for municipal waste combustor organics specified in specific condition **B.34.**
[40 CFR 60.34b(b) and 40 CFR 60.51b]

B.12. Methods of Operation - Fuels.
(1) Refuse Derived Fuel. The primary fuel for Units 1 thru 4 is RDF, including the items and materials that fit within the definition of MSW contained in either 40 CFR 60.51b or Section 403.706(5), F.S.
(2) Unauthorized Fuel. Subject to the limitations contained in this permit, the authorized fuels for the facility also include the other solid wastes that are not MSW, which are described in (4) thru (7), below. However, the facility

(a) shall not burn:
1. those materials that are prohibited by state or federal law;
2. those materials that are prohibited by this permit;
3. lead acid batteries;
4. hazardous waste;
5. nuclear waste;
6. radioactive waste;
7. sewage sludge;
8. used oil, **except for what is generated on-site**;
9. explosives; or,
10. beryllium-containing waste, as defined in 40 CFR 61, Subpart C; and,

(b) shall not knowingly burn:
1. untreated biomedical waste from biomedical waste generators regulated pursuant to Chapter 64E-16, F.A.C., and from other similar generators (or sources); or,
2. segregated loads of biological waste.

(3) The fuel may be received either as a mixture or as a single-item stream (segregated load) of discarded materials. If the facility intends to use an authorized fuel that is segregated non-MSW material, the fuel shall be either:

(a) well mixed with MSW in the refuse pit; or
(b) alternately charged with MSW in the hopper.

The facility operator shall prepare and maintain records concerning the description and quantities of all segregated loads of non-MSW material which are received and used as fuel at the facility, and subject to a percentage weight limitation, below (see 5, 6 and 7). For the purposes of this permit, a segregated load is defined to mean a container or truck that is almost completely or exclusively filled with a single item or homogeneous composition of waste material, as determined by visual observation.
(4) Other Solid Waste. Subject to the conditions and limitations contained in this permit, the following other solid waste may be used as fuel at the facility:

SOLID WASTE FROM ON-SITE OPERATIONS

Used Oil from on-site operations

(a) The constituents and properties of the *on-spec used oil* generate from on-site operations shall comply with the following allowable concentration levels, as stipulated and defined in 40 CFR 279.10 (July 1, 1998 version), which is adopted by reference in Rule 62-730.181, F.A.C.

Constituent/Property	Allowable Concentration
Cadmium	2 ppm maximum
Arsenic	5 ppm maximum
Chromium	10 ppm maximum
Lead	100 ppm maximum
Total Halogens	1000 ppm maximum
Flash Point	100 ° F minimum
Polychlorinated Byphenyls (PCBs)	Less than 2 ppm

(b) The heating value of the waste oil shall also be determined during quarterly testing. No more than 0.5 percent of the maximum design heat input rate to the units, on a monthly average, of oily wastes shall be disposed of in the units.
(c) On site generated *on-specification used oil, oily water, oily sludge, spent greases and oily solid waste (such as rags)* burned at this facility shall not be a hazardous waste as defined by Rule 62-730.030, F.A.C., or 40 CFR Part 261 (July 1, 1999 version). These materials shall conform to the standards of 40 CFR 279.11 and 40 CFR 761.20(e). It shall not include fuels or blended fuels consisting in whole or in part of hazardous waste or which include mixture of any solid waste generated from the treatment, storage, or disposal of hazardous waste. The on-spec used oil shall be burned in compliance with Section 403.769(3), F.S.

(d) The on-site generated *on-specification* used oil samples (representative of the material disposed of) shall be analyzed by EPA Recommended Analytical Procedures for Used Oil for the following constituent/property, associated unit, and using the test methods indicated:

Constituent/Property	Unit	Test Method
Cadmium	ppm	EPA SW-846(6010)
Arsenic	ppm	EPA SW-846(6010)
Chromium	ppm	EPA SW-846(6010)
Lead	ppm	EPA SW-846(6010)
Total Halogens	ppm	EPA SW-846(9252)
Sulfur	percent	ASTM D129 or ASTM D1552
Flash Point	degree F	EPA SW-846(1010)
Heat of Combustion	Btu/gal	ASTM D240
Density	lbs/gal	
Polychlorinated Byphenyls (PCB's)	ppm	EPA SW-846(0010) and EPA 680
Ash		

NOTE: Other test methods may be used only after receiving written prior approval from the Department.

SOLID WASTE FROM OFF-SITE OPERATIONS

(a) Confidential, proprietary or special documents (including but not limited to business records, lottery tickets, event tickets, coupons and microfilm);
(b) Contraband which is being destroyed at the request of appropriately authorized local, state or federal governmental agencies, provided that such material is not an explosive, a propellant, a hazardous waste, or otherwise prohibited at the facility. For the purposes of this section, contraband includes but is not limited to drugs, narcotics, fruits, vegetables, plants, counterfeit money, and counterfeit consumer goods;
(c) Wood pallets, clean wood, and land clearing debris;
(d) Packaging materials and containers;
(e) Clothing, natural and synthetic fibers, fabric remnants, and similar debris, including but not limited to aprons and gloves; or
(f) Rugs, carpets, and floor coverings, but not asbestos-containing materials or polyethylene or polyurethane vinyl floor coverings.

(5) Waste Tires. Subject to the conditions and limitations contained in this permit, waste tires may be used as fuel at the facility. The total quantity of waste tires received as segregated loads and burned at the facility shall not exceed 3%, by weight, of the facility's total fuel. Compliance with this limitation shall be determined on a calendar monthly basis in accordance with specific condition **B.108.**, below.
(6) Biomass Fuel. Subject to the conditions and limitations contained in this permit, biomass fuel may be burned at this facility (authorized fuel that is not MSW material). The total quantity of biomass material received as segregated load and burned in the combustion units shall not exceed 5%, by weight, of the facility's total fuel. Compliance with this limitation shall be determined on a calendar monthly basis in accordance with specific condition **B.108.**, below.

(7) Other Solid Waste/Segregated Loads. Subject to the conditions and limitations contained in this permit, the following other solid waste materials may be used as fuel at the facility (i.e. the following are authorized fuels that are non-MSW material). The total quantity of the following non-MSW material received as segregated loads and burned at the facility shall not exceed 5%, by weight, of the facility's total fuel. Compliance with this limitation shall be determined by using a calendar monthly basis in accordance with specific condition **B.108.**, below.

(a) Construction and demolition debris.
(b) Oil spill debris from aquatic, coastal, estuarine or river environments. Such items or materials include but are not limited to rags, wipes, and absorbents.
(c) Items suitable for human, plant or domesticated animal use, consumption or application where the item's shelf-life has expired or the generator wishes to remove the items from the market. Such items or materials include but are not limited to off-specification or expired consumer products, pharmaceuticals, medications, health and personal care products, cosmetics, foodstuffs, nutritional supplements, returned goods, and controlled substances.
(d) Consumer-packaged products intended for human or domesticated animal use or application but not consumption. Such items or materials include but are not limited to carpet cleaners, household or bathroom cleaners, polishes, waxes and detergents.
(e) Waste materials that:
  (i) are generated in the manufacture of items in categories (c) or (d), above and are functionally or commercially useless (expired, rejected or spent); or
  (ii) are not yet formed or packaged for commercial distribution. Such items or materials must be substantially similar to other items or materials routinely found in MSW.
(f) Waste materials that contain oil from:
  (i) the routine cleanup of industrial or commercial establishments and machinery; or
  (ii) spills of virgin or used petroleum products. Such items or materials include but are not limited to rags, wipes, and absorbents.
(g) Used oil and used oil filters. Used oil containing a PCB concentration equal or greater than 50 ppm shall not be burned, pursuant to the limitations of 40 CFR 761.20(e).
(h) Waste materials generated by manufacturing, industrial or agricultural activities, provided that these items or materials are substantially similar to items or materials that are found routinely in MSW, subject to prior approval of the Department.

(8) Other fuels or wastes shall not be burned in the emissions units without prior specific written approval of the Secretary of the Department of Environmental Protection.
[Rules 62-4.160(2), 62-210.200, and 62-213.440(1), F.A.C.; PSD-FL-006(D); and, PA 77-08]

B.13. Auxiliary Burners. Auxiliary burners for each emissions unit shall be fired only with propane or natural gas fuel during startups, shutdowns and malfunctions, and at other times when necessary and consistent with good combustion practices. The maximum heat input shall not exceed 80 MMBtu/hr per burner.
[PSD-FL-006(D)]

B.14. Hours of Operation. Each emissions unit is allowed to operate continuously, i.e., 8,760 hrs/yr.
[Rule 62-210.200(PTE), F.A.C.; and, PSD-FL-006(D)]

Operating Practices and Requirements

B.15. No owner or operator of an affected facility shall cause such facility to operate at a load level greater than 110 percent of the maximum demonstrated municipal waste combustor unit load as defined in specific condition **B.10.**, except as specified below. The averaging time is specified in specific condition **B.18.**
(1) During the annual dioxin/furan performance test and the two weeks preceding the annual dioxin/furan performance test, no municipal waste combustor unit load limit is applicable.
(2) The municipal waste combustor unit load limit may be waived in accordance with permission granted by the Administrator or delegated State regulatory authority for the purpose of evaluating system performance, testing new technology or control technologies, diagnostic testing, or related activities for the purpose of improving facility performance or advancing the state-of-the-art for controlling facility emissions.
[40 CFR 60.34b(b) and 40 CFR 60.53b(b)]

B.16. Control Device Inlet Temperature. No owner or operator of an affected facility shall cause such facility to operate at a temperature, measured at the particulate matter control device inlet, exceeding 17° C above the maximum demonstrated particulate matter control device temperature as defined in specific condition **B.11.**, except as specified below. The averaging time is specified in specific condition **B.18.** These requirements apply to each particulate matter control device utilized at the affected facility.
(1) During the annual dioxin/furan performance test and the two weeks preceding the annual dioxin/furan performance test, no particulate matter control device temperature limitations are applicable.
(2) The particulate matter control device temperature limits may be waived in accordance with permission granted by the Administrator or delegated State regulatory authority for the purpose of evaluating system performance, testing new technology or control technologies, diagnostic testing, or related activities for the purpose of improving facility performance or advancing the state-of-the-art for controlling facility emissions.
[40 CFR 60.34b(b) and 40 CFR 60.53b(c)]

B.17. Control Device Inlet Temperature. Except during a malfunction, the maximum flue gas temperature at the final particulate matter control device inlet, during the combustion of RDF, shall not exceed 30 °F above the maximum temperature measured at the particulate matter control device inlet during the most recent mercury compliance test under which the facility was found to be in compliance with the mercury emission limit specified in specific condition **B.27.**, based on a 4-hour block arithmetic average. If the maximum flue gas temperature standard is exceeded during a malfunction, then up to 3 hours of that malfunction may be excluded from the 4-hour block arithmetic average.
[PSD-FL-006(A) & (D)]

B.18. Operating Requirements. The procedures specified in paragraphs (1) through (12) shall be used for determining compliance with the operating requirements under 40 CFR 60.53b.
(1) Compliance with the carbon monoxide emission limits in 40 CFR 60.53b(a) shall be determined using a 4-hour block arithmetic average for all types of affected facilities except mass burn rotary waterwall municipal waste combustors and refuse-derived fuel stokers.
(2) For affected mass burn rotary waterwall municipal waste combustors and refuse-derived fuel stokers, compliance with the carbon monoxide emission limits in 40 CFR 60.53b(a) shall be determined using a 24-hour daily arithmetic average.

(3) The owner or operator of an affected facility shall install, calibrate, maintain, and operate a continuous emission monitoring system for measuring carbon monoxide at the combustor outlet and record the output of the system and shall follow the procedures and methods specified in paragraphs (i) through (iii).

(i) The continuous emission monitoring system shall be operated according to Performance Specification 4A in Appendix B of 40 CFR 60.

(ii) During each relative accuracy test run of the continuous emission monitoring system required by Performance Specification 4A in Appendix B of 40 CFR 60, carbon monoxide and oxygen (or carbon dioxide) data shall be collected concurrently (or within a 30- to 60-minute period) by both the continuous emission monitors and the test methods specified in paragraphs (A) and (B).

(A) For carbon monoxide, EPA Reference Method 10, 10A, or 10B shall be used.

(B) For oxygen (or carbon dioxide), EPA Reference Method 3, 3A, or 3B, as applicable shall be used.

(iii) The span value of the continuous emission monitoring system shall be 125 percent of the maximum estimated hourly potential carbon monoxide emissions of the municipal waste combustor unit.

(4) The 4-hour block and 24-hour daily arithmetic averages specified in paragraphs (1) and (2) shall be calculated from 1-hour arithmetic averages expressed in parts per million by volume corrected to 7 percent oxygen (dry basis). The 1-hour arithmetic averages shall be calculated using the data points generated by the continuous emission monitoring system. At least two data points shall be used to calculate each 1-hour arithmetic average.

(5) The owner or operator of an affected facility may request that compliance with the carbon monoxide emission limit be determined using carbon dioxide measurements corrected to an equivalent of 7 percent oxygen. The relationship between oxygen and carbon dioxide levels for the affected facility shall be established as specified in 40 CFR 60.58b(b)(6).

(6) The procedures specified in paragraphs (i) through (iv) shall be used to determine compliance with load level requirements under 40 CFR 60.53b(b).

(i) The owner or operator of an affected facility with steam generation capability shall install, calibrate, maintain, and operate a steam flow meter or a feedwater flow meter; measure steam (or feedwater) flow in kilograms per hour (or pounds per hour) on a continuous basis; and record the output of the monitor. Steam (or feedwater) flow shall be calculated in 4-hour block arithmetic averages.

(ii) The method included in the ``American Society of Mechanical Engineers Power Test Codes: Test Code for Steam Generating Units, Power Test Code 4.1-1964 (R1991)" section 4 (incorporated by reference, see 40 CFR 60.17) shall be used for calculating the steam (or feedwater) flow required under paragraph (6)(i). The recommendations in ``American Society of Mechanical Engineers Interim Supplement 19.5 on Instruments and Apparatus: Application, Part II of Fluid Meters, 6th edition (1971)," chapter 4 (incorporated by reference-see 40 CFR 60.17) shall be followed for design, construction, installation, calibration, and use of nozzles and orifices except as specified in (iii).

(iii) Measurement devices such as flow nozzles and orifices are not required to be recalibrated after they are installed.

(iv) All signal conversion elements associated with steam (or feedwater flow) measurements must be calibrated according to the manufacturer's instructions before each dioxin/furan performance test, and at least once per year.

(7) To determine compliance with the maximum particulate matter control device temperature requirements under 40 CFR 60.53b(c), the owner or operator of an affected facility shall install, calibrate, maintain, and operate a device for measuring on a continuous basis the temperature of the flue gas stream at the inlet to each particulate matter control device utilized by the affected facility. Temperature shall be calculated in 4-hour block arithmetic averages.

(8) The maximum demonstrated municipal waste combustor unit load shall be determined during the initial performance test for dioxins/furans and each subsequent performance test during which compliance with the dioxin/furan emission limit specified in 40 CFR 60.52b(c) is achieved. The maximum demonstrated municipal waste combustor unit load shall be the highest 4-hour arithmetic average load achieved during four consecutive hours during the most recent test during which compliance with the dioxin/furan emission limit was achieved.
(9) For each particulate matter control device employed at the affected facility, the maximum demonstrated particulate matter control device temperature shall be determined during the initial performance test for dioxins/furans and each subsequent performance test during which compliance with the dioxin/furan emission limit specified in 40 CFR 60.52b(c) is achieved. The maximum demonstrated particulate matter control device temperature shall be the highest 4-hour arithmetic average temperature achieved at the particulate matter control device inlet during four consecutive hours during the most recent test during which compliance with the dioxin/furan limit was achieved.
(10) At a minimum, valid continuous emission monitoring system hourly averages shall be obtained as specified in paragraphs (i) and (ii) for 75 percent of the operating hours per day for 90 percent of the operating days per calendar quarter that the affected facility is combusting municipal solid waste.

(i) At least two data points per hour shall be used to calculate each 1-hour arithmetic average.

(ii) At a minimum, each carbon monoxide 1-hour arithmetic average shall be corrected to 7 percent oxygen on an hourly basis using the 1-hour arithmetic average of the oxygen (or carbon dioxide) continuous emission monitoring system data.

(11) All valid continuous emission monitoring system data must be used in calculating the parameters specified under 40 CFR 60.58b(i) even if the minimum data requirements of paragraph (10) are not met. When carbon monoxide continuous emission data are not obtained because of continuous emission monitoring system breakdowns, repairs, calibration checks, and zero and span adjustments, emissions data shall be obtained using other monitoring systems as approved by the Administrator or EPA Reference Method 10 to provide, as necessary, the minimum valid emission data.
(12) Quarterly accuracy determinations and daily calibration drift tests for the carbon monoxide continuous emission monitoring system shall be performed in accordance with Procedure 1 in Appendix F of 40 CFR 60.
[40 CFR 60.38b and 40 CFR 60.58b(i); and, PSD-FL-006(D)]

Operator Training and Certification

B.19. Standards for municipal waste combustor operator training and certification.
(a) No later than the date 6 months after the date of startup of an affected facility or 12 months after State plan approval [40 CFR 60.39b(c)(4)(ii)], whichever is later, each chief facility operator and shift supervisor shall obtain and maintain a current provisional operator certification from either the American Society of Mechanical Engineers [QRO-1-1994 (incorporated by reference - see 40 CFR 60.17 of Subpart A)] or a State certification program.
(b) No later than the date 6 months after the date of startup of an affected facility or 12 months after State plan approval [40 CFR 60.39b(c)(4)(ii)], whichever is later, each chief facility operator and shift supervisor shall have completed full certification or shall have scheduled a full certification exam with either the American Society of Mechanical Engineers [QRO-1-1994 (incorporated by reference - see 40 CFR 60.17 of Subpart A)] or a State certification program.

(c) No owner or operator of an affected facility shall allow the facility to be operated at any time unless one of the following persons is on duty and at the affected facility: A fully certified chief facility operator, a provisionally certified chief facility operator who is scheduled to take the full certification exam according to the schedule specified in paragraph (b), a fully certified shift supervisor, a provisionally certified shift supervisor who is scheduled to take the full certification exam according to the schedule specified in paragraph (b).

(1) The requirement specified in paragraph (c) shall take effect 6 month after the date of startup of the affected facility or 12 months after State plan approval [40 CFR 60.39b(c)(4)(ii)], whichever is later.

(2) If one of the persons listed in paragraph (c) must leave the affected facility during their operating shift, a provisionally certified control room operator who is onsite at the affected facility may fulfill the requirement in paragraph (c).

(d) All chief facility operators, shift supervisors, and control room operators at affected facilities must complete the EPA or State municipal waste combustor operator training course no later than the date 6 months after the date of startup of the affected facility, or by 12 months after State plan approval [40 CFR 60.39b(c)(4)(iii)], whichever is later.

(e) The owner or operator of an affected facility shall develop and update on a yearly basis a site-specific operating manual that shall, at a minimum, address the elements of municipal waste combustor unit operation specified in paragraph (e)(1) through (e)(11).

(1) A summary of the applicable standards;
(2) A description of basic combustion theory applicable to a municipal waste combustor unit;
(3) Procedures for receiving, handling, and feeding municipal solid waste;
(4) Municipal waste combustor unit startup, shutdown, and malfunction procedures;
(5) Procedures for maintaining proper combustion air supply levels;
(6) Procedures for operating the municipal waste combustor unit within the standards established;
(7) Procedures for responding to periodic upset or off-specification conditions;
(8) Procedures for minimizing particulate matter carryover;
(9) Procedures for handling ash;
(10) Procedures for monitoring municipal waste combustor unit emissions; and
(11) Reporting and recordkeeping procedures.

(f) The owner or operator of an affected facility shall establish a training program to review the operating manual according to the schedule specified in paragraphs (f)(1) and (f)(2) with each person who has responsibilities affecting the operation of an affected facility including, but not limited to, chief facility operators, shift supervisors, control room operators, ash handlers, maintenance personnel, and crane/load handlers.

(1) Each person specified in paragraph (f) shall undergo initial training no later than the date specified in paragraph (f)(1)(i), (f)(1)(ii), or (f)(1)(iii), whichever is later.

(i) The date 6 months after the date of startup of the affected facility;

(ii) The date prior to the day the person assumes responsibilities affecting municipal waste combustor unit operation; or

(iii) 12 months after State plan approval [40 CFR 60.39b(c)(4)(iii)].

(2) Annually, following the initial review required by paragraph (f)(1).

(g) The operating manual required by paragraph (e) shall be kept in a readily accessible location for all persons required to undergo training under paragraph (f). The operating manual and records of training shall be available for inspection by the EPA or its delegated enforcement agency upon request.

(h) A list of all certified personnel shall be submitted to the Department's Southeast District office and the Dade County's DERM office.

[40 CFR 60.35b, 40 CFR 60.39b(c)(4)(ii) & (iii), and 40 CFR 60.54b; and, PSD-FL-006(D)]

B.20. The requirement specified in 40 CFR 60.54b(d) does not apply to chief operators, shift supervisors, and control room operators who have obtained full certification from the American Society of Mechanical Engineers on or before the date of State plan approval.
[40 CFR 60.39b(c)(4)(iii)(A)]

B.21. The owner or operator of a designated facility may request that the EPA Administrator waive the requirement specified in 40 CFR 60.54b(d) for chief operators, shift supervisors, and control room operators who have obtained provisional certification from the American Society of Mechanical Engineers on or before the date of State plan approval.
[40 CFR 60.39b(c)(4)(iii)(B)]

B.22. The initial training requirements specified in 40 CFR 60.54b(f)(1) shall be completed no later than the date specified in (1), (2), or (3), whichever is later.
(1) The date six (6) months after the date of startup of the affected facility;
(2) Twelve (12) months after State plan approval; or
(3) The date prior to the day when the person assumes responsibilities affecting municipal waste combustor unit operation.
[40 CFR 60.39b(c)(4)(iii)(C)]

Emission Limitations and Standards

Particulate Matter

B.23. Particulate matter (PM) emissions from the baghouse shall not exceed 0.011 grains/dry standard ft^3 (gr/dscf), corrected to 7 percent O_2, dry basis, and 29.0 tons/yr per emissions unit.
[PSD-FL-006(D)]

PM_{10}

B.24. PM emissions less than 10 micron diameter from the baghouse shall not exceed 0.011 gr/dscf, corrected to 7 percent O_2, dry basis, and 29.0 tons/yr per emissions unit.
[PSD-FL-006(D)]

Visible Emissions

B.25. The emission limit for opacity exhibited by the gases discharged to the atmosphere is 10 percent (6-minute block average).
[40 CFR 60.33b(a)(1)(iii); and, PSD-FL-006(D)]

Cadmium

B.26. Cadmium emissions shall not exceed 15 ug/m^3, corrected to 7 percent O_2, dry basis, and 0.027 ton/yr per emissions unit.
[PSD-FL-006(D)]

Mercury

B.27. The maximum emission limits for mercury contained in the gases discharged to the atmosphere per emissions unit are:
(1) 0.070 milligrams per dry standard cubic meter, corrected to 7 percent O_2, dry basis; or,
(2) 15 percent, by weight, of the mercury in the flue gas upstream of the mercury control device (85-percent reduction by weight), whichever is less stringent; and,
(3) 0.080 ton/yr.
[40 CFR 60.33b(a)(3); Rule 62-296.416(3)(a)1., F.A.C.; and, PSD-FL-006(D)]

B.28. Facilities with sulfur dioxide and hydrogen chloride control equipment in place or under construction as of July 1, 1993, and which choose to control mercury emissions through the use of mercury control equipment, shall comply with the mercury emissions limiting standard of Rule 62-296.416(3)(a)1., F.A.C., by July 1, 1995. All other facilities choosing to control mercury emissions through the use of mercury control equipment shall comply with the mercury emissions limiting standard of Rule 62-296.416(3)(a)1., F.A.C., by the date that the facility is required to demonstrate compliance with sulfur dioxide and hydrogen chloride emission limits, which limits are established at Rule 62-204.800(8)(b), F.A.C.
[Rule 62-296.416(3)(a)2., F.A.C.]

B.29. Facilities subject to the mercury emissions limiting standard of Rule 62-296.416(3)(a)1., F.A.C., shall demonstrate individual emissions unit compliance by the compliance date specified in Rule 62-296.416(3)(a)2., F.A.C., and annually thereafter.
[Rule 62-296.416(3)(a)3., F.A.C.]

B.30. Mercury Emissions Inventory. For emissions inventory purposes, all waste-to-energy facilities with charging rates of 40 tons or more per day shall perform annual individual emissions unit mercury emissions tests and report the results to the Department. This testing shall begin during calendar year 1993 and end upon initiation of mercury testing pursuant to Rule 62-296.416(3)(a) or (b), F.A.C.
[Rule 62-296.416(3)(c), F.A.C.]

Lead

B.31. Lead emissions, per emissions unit, shall not exceed 380 ug/m^3, corrected to 7 percent O_2, dry basis; and, 0.44 ton/yr.
[PSD-FL-006(D)]

Sulfur Dioxide

B.32. The emission limits for sulfur dioxide contained in the gases discharged to the atmosphere per emissions unit are:
(1) 29 parts per million by volume, corrected to 7 percent O_2, dry basis; or,
(2) 25 percent of the potential sulfur dioxide emission concentration (75-percent reduction by weight or volume); and,
(3) 214.2 tons/yr.
(4) Compliance with the limits of (1) and (2), above, is based on a 24-hour daily period (i.e., block; midnight to midnight) geometric mean, whichever is less stringent.
[40 CFR 60.33b(b)(3)(i); and, PSD-FL-006(D)]

Hydrogen Chloride

B.33. The emission limits for hydrogen chloride contained in the gases discharged to the atmosphere per emissions unit are:
(1) 25 parts per million by volume, corrected to 7 percent O_2, dry basis; or
(2) 5 percent of the potential hydrogen chloride emission concentration (95-percent reduction by weight or volume), whichever is less stringent; and,
(3) 57.1 tons/yr.
[40 CFR 60.33b(b)(3)(ii); and, PSD-FL-006(D)]

Dioxins/Furans

B.34. The emission limits for dioxins/furans contained in the gases discharged to the atmosphere per emissions unit that do not employ an electrostatic precipitator-based emission control system are 30 nanograms per dry standard cubic meter (total mass of tetra- through octa- chlorinated dibenzo-p-dioxins and dibenzofurans), corrected to 7 percent oxygen; and, 0.000038 ton/yr.
[40 CFR 60.33b(c)(1)(ii); and, PSD-FL-006(D)]

Nitrogen Oxides

B.35. The emission limits for nitrogen oxides contained in the gases discharged to the atmosphere per emissions unit are 250 parts per million by volume, corrected to 7 percent O_2, dry basis, 24-hour daily arithmetic average; and, 614.9 tons/yr. As specified in 40 CFR 60.33b(d)(1), a facility-wide average emissions limit of 230 ppmvd, corrected to 7 percent O_2, 24-hour average, shall be applied in lieu of the per emissions unit limit provided that the conditions of 40 CFR 60.33b(d)(1) are met.
[40 CFR 60.33b(d); and, PSD-FL-006(D)]

Carbon Monoxide

B.36. The emission limits for carbon monoxide contained in the gases discharged to the atmosphere per emissions unit are 200 parts per million by volume, measured at the combustor outlet in conjunction with a measurement of oxygen concentration, corrected to 7 percent O_2, dry basis, 24-hour daily arithmetic average; and, 267.7 tons/yr.
[40 CFR 60.34b(a); and, PSD-FL-006(D)]

Arsenic

B.37. Arsenic emissions, per emissions unit, shall not exceed 9.3 ug/m^3, corrected to 7 percent O_2, dry basis; and, 0.011 ton/yr.
[PSD-FL-006(D)]

Beryllium

B.38. Beryllium emissions, per emissions unit, shall not exceed 0.46 ug/m^3, corrected to 7 percent O_2, dry basis; and, 0.0005 ton/yr.
[PSD-FL-006(D)]

Total Fluorides

B.39. Fluoride emissions, per emissions unit, shall not exceed 840 ug/m^3, corrected to 7 percent O_2, dry basis; and, 0.97 ton/yr.
[PSD-FL-006(D)]

Sulfuric Acid Mist

B.40. Sulfuric acid mist emissions, per emissions unit, shall not exceed 2.1 ppmv, corrected to 7 percent O_2, dry basis; and, 9.8 tons/yr.
[PSD-FL-006(D)]

Volatile Organic Compounds (VOC)

B.41. VOC (hydrocarbons) emissions, per emissions unit, shall not exceed 25 ppmv, corrected to 7 percent O_2, dry basis; and, 19.1 tons/yr. The permittee must furnish to the Department evidence (i.e., test results) that this facility emits less than 100 tons per year of hydrocarbons, or must obtain legally enforceable limits for the hydrocarbon emissions from this facility.
[PSD-FL-006(D)]

Excess Emissions

{Permitting Note: The Excess Emissions Rule at Rule 62-210.700, F.A.C., cannot vary any requirement of a NSPS or NESHAP provision.}

B.42. The opacity standards set forth in 40 CFR 60 shall apply at all times except during periods of startup, shutdown, malfunction, and as otherwise provided in the applicable standard.
[40 CFR 60.11(c)]

B.43. At all times, including periods of startup, shutdown, and malfunction, owners and operators shall, to the extent practicable, maintain and operate any affected facility including associated air pollution control equipment in a manner consistent with good air pollution control practice for minimizing emissions. Determination of whether acceptable operating and maintenance procedures are being used will be based on information available to the Administrator which may include, but is not limited to, monitoring results, opacity observations, review of operating and maintenance procedures, and inspection of the source.
[40 CFR 60.11(d)]

B.44. Startup, Shutdown and Malfunction. The provisions for startup, shutdown, and malfunction are provided in paragraph (1).
(1) The standards under 40 CFR 60, Subpart Cb, as incorporated in Rule 62-204.800, F.A.C., and this permit shall apply at all times except during periods of startup, shutdown, or malfunction. Duration of startup, shutdown, or malfunction periods are limited to two hours in any 24-hour period.

(i) The startup period commences when the affected facility begins the continuous burning of RDF and does not include any warm-up period when the affected facility is combusting natural gas or propane gas and no RDF is being fed to the combustor(s).

(ii) Continuous burning is the continuous, semi-continuous, or batch feeding of RDF for purposes of waste disposal, energy production, or providing heat to the combustion system in preparation for waste disposal or energy production. The use of RDF solely to provide thermal protection of the grate or hearth during the startup period when RDF is not being fed to the grate is not considered to be continuous burning.

(2) A malfunction means:

(a) any unavoidable mechanical and/or electrical failure of air pollution control equipment or process equipment or of a process resulting in operation in an abnormal or unusual manner. [Rule 62-210.200, F.A.C., Definitions]

(b) any sudden, infrequent, and not reasonably preventable failure of air pollution control equipment, process equipment, or a process to operate in a normal or usual manner. Failures that are caused in part by poor maintenance or careless operation are not malfunctions. [40 CFR 60.2, Definitions]

[40 CFR 60.38b and 40 CFR 60.58b(a); Rule 62-210.200, F.A.C., Definitions; 40 CFR 60.2, Definitions; and, PSD-FL-006(D)]

B.45. Excess emissions resulting from startup, shutdown, or malfunction shall be permitted provided that best operational practices to minimize emissions are adhered to and the duration of excess emissions shall be minimized but in no case exceed two hours in a 24-hour period unless specifically authorized by the Department for longer duration.
[Rule 62-210.700(1), F.A.C.; and, PSD-FL-006(D)]

B.46. Excess emissions which are caused entirely or in part by poor maintenance, poor operation, or any other equipment or process failure which may reasonably be prevented during startup, shutdown, or malfunction shall be prohibited.
[Rule 62-210.700(4), F.A.C.; and, PSD-FL-006(D)]

Test Methods and Procedures

{Permitting note: The permittee may stagger its pollutant performance tests throughout the year with prior Department approval.}

B.47. Within 60 days after achieving the maximum production rate at which the affected facility will be operated, but not later than 180 days after initial startup of such facility and at such other times as may be required by the Administrator under section 114 of the Act, the owner or operator of such facility shall conduct performance test(s) and furnish the Administrator a written report of the results of such performance test(s).
[40 CFR 60.8(a)]

B.48. Performance tests shall be conducted and data reduced in accordance with the test methods and procedures contained in each applicable subpart unless the Administrator (1) specifies or approves, in specific cases, the use of a reference method with minor changes in methodology, (2) approves the use of an equivalent method, (3) approves the use of an alternative method the results of which he has determined to be adequate for indicating whether a specific source is in compliance, (4) waives the

requirement for performance tests because the owner or operator of a source has demonstrated by other means to the Administrator's satisfaction that the affected facility is in compliance with the standard, or (5) approves shorter sampling times and smaller sample volumes when necessitated by process variables or other factors. Nothing in this paragraph shall be construed to abrogate the Administrator's authority to require testing under section 114 of the Act.
[40 CFR 60.8(b)]

B.49. Performance tests shall be conducted under such conditions as the Administrator shall specify to the plant operator based on representative performance of the affected facility. The owner or operator shall make available to the Administrator such records as may be necessary to determine the conditions of the performance tests. Operations during periods of startup, shutdown, and malfunction shall not constitute representative conditions for the purpose of a performance test nor shall emissions in excess of the level of the applicable emission limit during periods of startup, shutdown, and malfunction be considered a violation of the applicable emission limit unless otherwise specified in the applicable standard.
[40 CFR 60.8(c)]

B.50. The owner or operator of an affected facility shall provide the Administrator (Department or its designee) at least 30 days prior notice of any performance test, except as specified under other subparts, to afford the Administrator the opportunity to have an observer present.
[40 CFR 60.8(d)]

B.51. The owner or operator of an affected facility shall provide, or cause to be provided, performance testing facilities as follows:
(1) Sampling ports adequate for test methods applicable to such facility. This includes (i) constructing the air pollution control system such that volumetric flow rates and pollutant emission rates can be accurately determined by applicable test methods and procedures and (ii) providing a stack or duct free of cyclonic flow during performance tests, as demonstrated by applicable test methods and procedures.
(2) Safe sampling platform(s).
(3) Safe access to sampling platform(s).
(4) Utilities for sampling and testing equipment.

{Permitting note: See specific condition **B.73.** and Appendix SS-1, Stack Sampling Facilities (version dated 10/7/96) for State of Florida Stack Sampling Requirements.}

[40 CFR 60.8(e)]

B.52. Unless otherwise specified in the applicable subpart, each performance test shall consist of three separate runs using the applicable test method. Each run shall be conducted for the time and under the conditions specified in the applicable standard. For the purpose of determining compliance with an applicable standard, the arithmetic means of results of the three runs shall apply. In the event that a sample is accidentally lost or conditions occur in which one of the three runs must be discontinued because of forced shutdown, failure of an irreplaceable portion of the sample train, extreme meteorological conditions, or other circumstances, beyond the owner or operator's control, compliance may, upon the Administrator's approval, be determined using the arithmetic mean of the results of the two other runs.
[40 CFR 60.8(f)]

B.53. Compliance with the emission limiting standards shall be demonstrated using EPA Reference Methods, as specified in 40 CFR Part 60, Appendix A, or 40 CFR 61, Appendix B. No other test method shall be used unless approval from the Department has been received in writing. Any alternate sampling procedure shall be approved in accordance with Rule 62-279.620, F.A.C. A test protocol shall be submitted to the Department's Bureau of Air Regulation and Southeast District offices and Dade County's DERM office at least 90 days prior to testing.
[PSD-FL-006(A), (B) & (D)]

Particulate Matter and Opacity

B.54. The procedures and test methods specified in paragraphs (1) through (123) shall be used to determine compliance with the emission limits for particulate matter and opacity.

(1) The EPA Reference Method 1 shall be used to select sampling site and number of traverse points.

(2) The EPA Reference Method 3, 3A, or 3B, as applicable shall be used for gas analysis.

(3) The EPA Reference Method 4 shall be used for the moisture content in the stack gases.

(4) The EPA Reference Method 5 shall be used for determining compliance with the particulate matter emission limit. The minimum sample volume shall be 1.7 cubic meters. The probe and filter holder heating systems in the sample train shall be set to provide a gas temperature no greater than 160 $\pm$14 °C. An oxygen or carbon dioxide measurement shall be obtained simultaneously with each Method 5 run.

(5) The owner or operator of an affected facility may request that compliance with the particulate matter emission limit be determined using carbon dioxide measurements corrected to an equivalent of 7 percent oxygen. The relationship between oxygen and carbon dioxide levels for the affected facility shall be established as specified in paragraph 40 CFR 60.58b(b)(6).

(6) As specified under 40 CFR 60.8, all performance tests shall consist of three test runs. The average of the particulate matter emission concentrations from the three test runs is used to determine compliance.

(7) In accordance with paragraphs (8) and (12), EPA Reference Method 9 shall be used for determining compliance with the opacity limit except as provided under 40 CFR 60.11(e)

(8) The owner or operator of an affected facility shall conduct an initial performance test for particulate matter emissions and opacity as required under 40 CFR 60.8.

(9) The owner or operator of an affected facility shall install, calibrate, maintain, and operate a continuous opacity monitoring system for measuring opacity and shall follow the methods and procedures specified in paragraphs (9)(i) through (9)(iv).

(i) The output of the continuous opacity monitoring system shall be recorded on a 6-minute average basis.

(ii) The continuous opacity monitoring system shall be installed, evaluated, and operated in accordance with 40 CFR 60.13.

(iii) The continuous opacity monitoring system shall conform to Performance Specification 1 in Appendix B of 40 CFR 60.

(iv) The initial performance evaluation shall be completed no later than 180 days after the date of the initial startup of the municipal waste combustor unit, as specified under 40 CFR 60.8.

(10) Following the date that the initial performance test for particulate matter is completed or is required to be completed under 40 CFR 60.8 for an affected facility, the owner or operator shall conduct a performance test for particulate matter on an annual basis (no more than 12 calendar months following the previous performance test).

(11) [reserved]

(12) Following the date that the initial performance test for opacity is completed or is required to be completed under 40 CFR 60.8 for an affected facility, the owner or operator shall conduct a performance test for opacity on an annual basis (no more than 12 calendar months following the previous performance test) using the test method specified in paragraph (7).
(13) EPA Reference Method 2 shall be used for determining stack gas velocity and volumetric flow rate.
[40 CFR 60.38b and 40 CFR 60.58b(c); and, PSD-FL-006(B) & (D)]

PM_{10}

B.55. Compliance with the PM_{10} limits shall be demonstrated using EPA Method 201 or 201A during the initial compliance test and annually thereafter. However, if compliance with the PM emission limit in specific condition **B.24.** is met, these tests are not required.
[PSD-FL-006(B) & (D)]

Cadmium, Lead and Mercury

B.56. The procedures and test methods specified in paragraphs (1) and (2) shall be used to determine compliance with the emission limits for cadmium, lead, and mercury.
(1) The procedures and test methods specified in paragraphs (1)(i) through (1)(ix) shall be used to determine compliance with the emission limits for cadmium and lead.

(i) The EPA Reference Method 1 shall be used for determining the location and number of sampling points.
(ii) The EPA Reference Method 3, 3A, or 3B, as applicable, shall be used for flue gas analysis.
(iii) The EPA Reference Method 29 shall be used for determining compliance with the cadmium and lead emission limits.
(iv) An oxygen or carbon dioxide measurement shall be obtained simultaneously with each Method 29 test run for cadmium and lead required under paragraph (1)(iii).
(v) The owner or operator of an affected facility may request that compliance with the cadmium or lead emission limit be determined using carbon dioxide measurements corrected to an equivalent of 7 percent oxygen. The relationship between oxygen and carbon dioxide levels for the affected facility shall be established as specified in paragraph 40 CFR 60.58b(b)(6).
(vi) All performance tests shall consist of a minimum of three test runs conducted under representative full load operating conditions. The average of the cadmium or lead emission concentrations from three test runs or more shall be used to determine compliance.
(vii) Following the date of the initial performance test or the date on which the initial performance test is required to be completed under 40 CFR 60.8, the owner or operator of an affected facility shall conduct a performance test for compliance with the emission limits for cadmium and lead on an annual basis (no more than 12 calendar months following the previous performance test).
(viii)[reserved]
(ix) [reserved]
(x) EPA Reference Method 2 shall be used for determining stack gas velocity and volumetric flow rate.

(2) The procedures and test methods specified in paragraphs (2)(i) through (2)(xi) shall be used to determine compliance with the mercury emission limit.

(i) The EPA Reference Method 1 shall be used for determining the location and number of sampling points.
(ii) The EPA Reference Method 3, 3A, or 3B, as applicable, shall be used for flue gas analysis.
(iii) The EPA Reference Method 29 shall be used to determine the mercury emission concentration. The minimum sample volume when using Method 29 for mercury shall be 1.7 cubic meters.

(iv) An oxygen (or carbon dioxide) measurement shall be obtained simultaneously with each Method 29 test run for mercury required under paragraph (2)(iii).
(v) The percent reduction in the potential mercury emissions (% P_{Hg}) is computed using equation 1:

$$[\% P_{Hg}] = [(E_i - E_o)/E_i] \times 100 \qquad \textbf{(Equation 1)}$$

where:

% P_{Hg} = percent reduction of the potential mercury emissions achieved.
E_i = potential mercury emission concentration measured at the control device inlet, corrected to 7 percent oxygen (dry basis).
E_o = controlled mercury emission concentration measured at the mercury control device outlet, corrected to 7 percent oxygen (dry basis).

(vi) All performance tests shall consist of a minimum of three test runs conducted under representative full load operating conditions. The average of the mercury emission concentrations or percent reductions from three test runs or more is used to determine compliance.
(vii) The owner or operator of an affected facility may request that compliance with the mercury emission limit be determined using carbon dioxide measurements corrected to an equivalent of 7 percent oxygen. The relationship between oxygen and carbon dioxide levels for the affected facility shall be established as specified in paragraph 40 CFR 60.58b(b)(6).
(viii)The owner or operator of an affected facility shall conduct an initial performance test for mercury emissions as required under 40 CFR 60.8.
(ix) Following the date that the initial performance test for mercury is completed or is required to be completed under 40 CFR 60.8, the owner or operator of an affected facility shall conduct a performance test for mercury emissions on a annual basis (no more than 12 calendar months from the previous performance test).
(x) [reserved]
(xi) The owner or operator of an affected facility where activated carbon injection is used to comply with the mercury emission limit shall follow the procedures specified in 40 CFR 60.58b(m) (see specific condition **B.111.**) for measuring and calculating carbon usage.
(xii) EPA Reference Method 2 shall be used for determining stack gas velocity and volumetric flow rate.
[40 CFR 60.38b and 40 CFR 60.58b(d); and, PSD-FL-006(B) & (D)]

B.57. Control of Mercury Emissions: Flue Gas Temperature Standard and Carbon Usage Rate.
(14) Flue Gas Temperature Standard. Waste-to-energy facilities choosing to control mercury emissions through the use of post-combustion control equipment designed to remove mercury from flue gases shall comply with the flue gas temperature standard of Rule 62-296.416(4)(a), F.A.C.
(a) Temperature Standard. The flue gas temperature standard set forth in 40 CFR 60.53b(c) (see specific condition **B.16.**), incorporated by reference in Rule 62-204.800, F.A.C., shall apply.
(b) Temperature Monitoring. The temperature monitoring requirements set forth in 40 CFR 60.58b(i) (see specific condition **B.18.**), incorporated by reference in Rule 62-204.800, F.A.C., shall apply.
(25) Carbon Usage Rate. The carbon injection rate operating standard, based on an 8-hour block average, and monitoring requirements set forth in 40 CFR 60.58b(m) (see specific condition **B.111.**), incorporated by reference in Rule 62-204.800, F.A.C., shall apply.
[Rules 62-296.416(3)(d),(4), and (5), F.A.C.; and, PSD-FL-006(D)]

Sulfur Dioxide

B.58. The procedures and test methods specified in paragraphs (1) through (14) shall be used for determining compliance with the sulfur dioxide emissions limits.
(1) The EPA Reference Method 19, section 4.3, shall be used to calculate the daily geometric average sulfur dioxide emission concentration.
(2) The EPA Reference Method 19, section 5.4, shall be used to determine the daily geometric average percent reduction in the potential sulfur dioxide emission concentration.
(3) The owner or operator of an affected facility may request that compliance with the sulfur dioxide emission limit be determined using carbon dioxide measurements corrected to an equivalent of 7 percent oxygen. The relationship between oxygen and carbon dioxide levels for the affected facility shall be established as specified in 40 CFR 60.58b(b)(6).
(4) The owner or operator of an affected facility shall conduct an initial performance test for sulfur dioxide emissions as required under 40 CFR 60.8. Compliance with the sulfur dioxide emission limit (concentration or percent reduction) shall be determined by using the continuous emission monitoring system specified in paragraph (5) to measure sulfur dioxide and calculating a 24-hour daily geometric average emission concentration or a 24-hour daily geometric average percent reduction using EPA Reference Method 19, sections 4.3 and 5.4, as applicable.
(5) The owner or operator of an affected facility shall install, calibrate, maintain, and operate a continuous emission monitoring system for measuring sulfur dioxide emissions discharged to the atmosphere and record the output of the system.
(6) Following the date that the initial performance test for sulfur dioxide is completed or is required to be completed under 40 CFR 60.8, compliance with the sulfur dioxide emission limit shall be determined based on the 24-hour (measured between 12:00 midnight and the following midnight) daily geometric average of the hourly arithmetic average emission concentrations using continuous emission monitoring system outlet data if compliance is based on an emission concentration, or continuous emission monitoring system inlet and outlet data if compliance is based on a percent reduction.
(7) At a minimum, valid continuous monitoring system hourly averages shall be obtained as specified in paragraphs (7)(i) and (7)(ii) for 75 percent of the operating hours per day for 90 percent of the operating days per calendar quarter that the affected facility is combusting municipal solid waste.
(i) At least two data points per hour shall be used to calculate each 1-hour arithmetic average.
(ii) Each sulfur dioxide 1-hour arithmetic average shall be corrected to 7 percent oxygen on an hourly basis using the 1-hour arithmetic average of the oxygen (or carbon dioxide) continuous emission monitoring system data.
(8) The 1-hour arithmetic averages required under paragraph (6) shall be expressed in parts per million corrected to 7 percent oxygen (dry basis) and used to calculate the 24-hour daily geometric average emission concentrations and daily geometric average emission percent reductions. The 1-hour arithmetic averages shall be calculated using the data points required under 40 CFR 60.13(e)(2).
(9) All valid continuous emission monitoring system data shall be used in calculating average emission concentrations and percent reductions even if the minimum continuous emission monitoring system data requirements of paragraph (7) are not met.
(10) The procedures under 40 CFR 60.13 shall be followed for installation, evaluation, and operation of the continuous emission monitoring system.
(11) The initial performance evaluation shall be completed no later than 180 days after the date of initial startup of the municipal waste combustor as specified under 40 CFR 60.8.

(12) The continuous emission monitoring system shall be operated according to Performance Specification 2 in 40 CFR 60 Appendix B.

(i) During each relative accuracy test run of the continuous emission monitoring system required by Performance Specification 2 in 40 CFR 60 Appendix B, sulfur dioxide and oxygen (or carbon dioxide) data shall be collected concurrently (or within a 30- to 60-minute period) by both the continuous emission monitors and the test methods specified in paragraphs (A) and (B).

(A) For sulfur dioxide, EPA Reference Method 6, 6A, or 6C shall be used.

(B) For oxygen (or carbon dioxide), EPA Reference Method 3, 3A, or 3B, as applicable shall be used.

(ii) The span value of the continuous emissions monitoring system at the inlet to the sulfur dioxide control device shall be 125 percent of the maximum estimated hourly potential sulfur dioxide emissions of the municipal waste combustor unit. The span value of the continuous emission monitoring system at the outlet of the sulfur dioxide control device shall be 50 percent of the maximum estimated hourly potential sulfur dioxide emissions of the municipal waste combustor unit.

(13) Quarterly accuracy determinations and daily calibration drift tests shall be performed in accordance with procedure 1 in Appendix F of 40 CFR 60.

(14) When sulfur dioxide emissions data are not obtained because of continuous emission monitoring system breakdowns, repairs, calibration checks, and zero and span adjustments, emissions data shall be obtained by using other monitoring systems as approved by the Administrator or EPA Reference Method 19 to provide, as necessary, valid emissions data for a minimum of 75 percent of the hours per day that the affected facility is operated and combusting municipal solid waste for 90 percent of the days per calendar quarter that the affected facility is operated and combusting municipal solid waste.

[40 CFR 60.38b and 40 CFR 60.58b(e); and, PSD-FL-006(B) & (D)]

Hydrogen Chloride

B.59. The procedures and test methods specified in paragraphs (1) through (8) shall be used for determining compliance with the hydrogen chloride emission limit.

(1) The EPA Reference Method 26 or 26A, as applicable, shall be used to determine the hydrogen chloride emission concentration. The minimum sampling time for Method 26 shall be 1 hour.

(2) An oxygen (or carbon dioxide) measurement shall be obtained simultaneously with each Method 26 test run for hydrogen chloride required by paragraph (1).

(3) The percent reduction in potential hydrogen chloride emissions (% P_{HCl}) is computed using equation 2:

$$[\% P_{HCl}] = [(E_i - E_o)/E_i] \times 100 \qquad \textbf{(Equation 2)}$$

where:

% P_{HCl} = percent reduction of the potential hydrogen chloride emissions achieved.
E_i = potential hydrogen chloride emission concentration measured at the control device inlet, corrected to 7 percent oxygen (dry basis).
E_o = controlled hydrogen chloride emission concentration measured at the control device outlet, corrected to 7 percent oxygen (dry basis).

(4) The owner or operator of an affected facility may request that compliance with the hydrogen chloride emission limit be determined using carbon dioxide measurements corrected to an equivalent of 7 percent oxygen. The relationship between oxygen and carbon dioxide levels for the affected facility shall be established as specified in 40 CFR 60.58b(b)(6).

(5) As specified under 40 CFR 60.8, all performance tests shall consist of three test runs. The average of the hydrogen chloride emission concentrations or percent reductions from the three test runs is used to determine compliance.
(6) The owner or operator of an affected facility shall conduct an initial performance test for hydrogen chloride as required under 40 CFR 60.8.
(7) Following the date that the initial performance test for hydrogen chloride is completed or is required to be completed under 40 CFR 60.8, the owner or operator of an affected facility shall conduct a performance test for hydrogen chloride emissions on an annual basis (no more than 12 calendar months following the previous performance test).
(8) [reserved]
[40 CFR 60.38b and 40 CFR 60.58b(f); and, PSD-FL-006(B) & (D)]

Mercury, Sulfur Dioxide and Hydrogen Chloride

B.60. Testing shall be conducted upstream (removal efficiency for SO_2 and HCl) and downstream (mass emissions) of the applicable control device for the following pollutants, Hg, SO_2 and HCl, if compliance demonstration is based on percent removal efficiency. Soot blowers shall be operated in a mode consistent with normal cleaning requirements of the system during the compliance testing.
[PSD-FL-006(A) & (D)]

Dioxin/Furan

B.61. The procedures and test methods specified in paragraphs (1) through (~~9~~10) shall be used to determine compliance with the limits for dioxin/furan emissions.
(1) The EPA Reference Method 1 shall be used for determining the location and number of sampling points.
(2) The EPA Reference Method 3, 3A, or 3B, as applicable, shall be used for flue gas analysis.
(3) The EPA Reference Method 23 shall be used for determining the dioxin/furan emission concentration.
(i) The minimum sample time shall be 4 hours per test run.
(ii) An oxygen (or carbon dioxide) measurement shall be obtained simultaneously with each Method 23 test run for dioxins/furans.
(4) The owner or operator of an affected facility shall conduct an initial performance test for dioxin/furan emissions in accordance with paragraph (3), as required under 40 CFR 60.8.
(5) Following the date that the initial performance test for dioxins/furans is completed or is required to be completed under 40 CFR 60.8, the owner or operator of an affected facility shall conduct performance tests for dioxin/furan emissions in accordance with paragraph (3), according to one of the schedules specified in paragraphs (i) through (iii).
(i) For affected facilities, performance tests shall be conducted on an annual basis (no more than 12 calendar months following the previous performance test.)
(ii) [reserved]
(iii) Where all performance tests over a 2-year period indicate that dioxin/furan emissions are less than or equal to 15 nanograms per dry standard cubic meter (total mass) for all affected facilities located within a municipal waste combustor plant, the owner or operator of the municipal waste combustor plant may elect to conduct annual performance tests for one affected facility (i.e., unit) per year at the municipal waste combustor plant. At a minimum, a performance test for dioxin/furan emissions shall be conducted annually (no more than 12 months following the previous performance test) for one affected facility at the municipal waste combustor plant. Each year a different affected facility at the municipal waste combustor plant shall be tested, and the affected facilities at the plant

shall be tested in sequence (e.g., Unit 1, Unit 2, Unit 3, as applicable). If each annual performance test continues to indicate a dioxin/furan emission level less than or equal to 15 nanograms per dry standard cubic meter (total mass), the owner or operator may continue conducting a performance test on only one affected facility per year. If any annual performance test indicates a dioxin/furan emission level greater than 15 nanograms per dry standard cubic meter (total mass), performance tests thereafter shall be conducted annually on all affected facilities at the plant until and unless all annual performance tests for all affected facilities at the plant over a 2-year period indicate a dioxin/furan emission level less than or equal to 15 nanograms per dry standard cubic meter (total mass).

(6) The owner or operator of an affected facility that selects to follow the performance testing schedule specified in paragraph (5)(iii) shall follow the procedures specified in 40 CFR 60 60.59b(g)(4) for reporting the selection of this schedule.

(7) The owner or operator of an affected facility where activated carbon is used to comply with the dioxin/furan emission limits specified in 40 CFR 60.52b(c) or the dioxin/furan emission level specified in paragraph (5)(iii) shall follow the procedures specified in 40 CFR 60.58b(m) for measuring and calculating the carbon usage rate.

(8) The owner or operator of an affected facility may request that compliance with the dioxin/furan emission limit be determined using carbon dioxide measurements corrected to an equivalent of 7 percent oxygen. The relationship between oxygen and carbon dioxide levels for the affected facility shall be established as specified in 40 CFR 60.58b(b)(6).

~~(9)~~ As specified under 40 CFR 60.8, all performance tests shall consist of three test runs. The average of the dioxin/furan emission concentrations from the three test runs is used to determine compliance.

(10) EPA Reference Method 2 shall be used for determining stack gas velocity and volumetric flow rate.

[40 CFR 60.38b and 40 CFR 60.58b(g); and, PSD-FL-006(B)]

Nitrogen Oxides

B.62. The procedures and test methods specified in paragraphs (1) through (12) shall be used to determine compliance with the nitrogen oxides emission limit for affected facilities under 40 CFR 60.52b(d).

(1) The EPA Reference Method 19, section 4.1, shall be used for determining the daily arithmetic average nitrogen oxides emission concentration.

(2) The owner or operator of an affected facility may request that compliance with the nitrogen oxides emission limit be determined using carbon dioxide measurements corrected to an equivalent of 7 percent oxygen. The relationship between oxygen and carbon dioxide levels for the affected facility shall be established as specified in 40 CFR 60.58b(b)(6).

(3) The owner or operator of an affected facility subject to the nitrogen oxides limit shall conduct an initial performance test for nitrogen oxides as required under 40 CFR 60.8. Compliance with the nitrogen oxides emission limit shall be determined by using the continuous emission monitoring system specified in paragraph (4) for measuring nitrogen oxides and calculating a 24-hour daily arithmetic average emission concentration using EPA Reference Method 19, section 4.1.

(4) The owner or operator of an affected facility subject to the nitrogen oxides emission shall install, calibrate, maintain, and operate a continuous emission monitoring system for measuring nitrogen oxides discharged to the atmosphere, and record the output of the system.

(5) Following the date that the initial performance test for nitrogen oxides is completed or is required to be completed under 40 CFR 60.8, compliance with the emission limit for nitrogen oxides shall be determined based on the 24-hour (measured between 12:00 midnight and the following midnight) daily arithmetic average of the hourly emission concentrations using continuous emission monitoring system outlet data.

(6) At a minimum, valid continuous emission monitoring system hourly averages shall be obtained as specified in paragraphs (i) and (ii) for 75 percent of the operating hours per day for 90 percent of the operating days per calendar quarter that the affected facility is combusting municipal solid waste.

(i) At least 2 data points per hour shall be used to calculate each 1-hour arithmetic average.

(ii) Each nitrogen oxides 1-hour arithmetic average shall be corrected to 7 percent oxygen on an hourly basis using the 1-hour arithmetic average of the oxygen (or carbon dioxide) continuous emission monitoring system data.

(7) The 1-hour arithmetic averages required by paragraph (5) shall be expressed in parts per million by volume (dry basis) and used to calculate the 24-hour daily arithmetic average concentrations. The 1-hour arithmetic averages shall be calculated using the data points required under 40 CFR 60.13(e)(2).

(8) All valid continuous emission monitoring system data must be used in calculating emission averages even if the minimum continuous emission monitoring system data requirements of paragraph (6) are not met.

(9) The procedures under 40 CFR 60.13 shall be followed for installation, evaluation, and operation of the continuous emission monitoring system. The initial performance evaluation shall be completed no later than 180 days after the date of initial startup of the municipal waste combustor unit, as specified under 40 CFR 60.8.

(10) The owner or operator of an affected facility shall operate the continuous emission monitoring system according to Performance Specification 2 in Appendix B of 40 CFR 60 and shall follow the procedures and methods specified in paragraphs(i) and (ii).

(i) During each relative accuracy test run of the continuous emission monitoring system required by Performance Specification 2 of Appendix B of 40 CFR 60, nitrogen oxides and oxygen (or carbon dioxide) data shall be collected concurrently (or within a 30- to 60-minute period) by both the continuous emission monitors and the test methods specified in paragraphs (A) and (B).

(A) For nitrogen oxides, EPA Reference Method 7, 7A, 7C, 7D, or 7E shall be used.

(B) For oxygen (or carbon dioxide), EPA Reference Method 3, 3A, or 3B, as applicable shall be used.

(ii) The span value of the continuous emission monitoring system shall be 125 percent of the maximum estimated hourly potential nitrogen oxide emissions of the municipal waste combustor unit.

(11) Quarterly accuracy determinations and daily calibration drift tests shall be performed in accordance with procedure 1 in Appendix F of 40 CFR 60.

(12) When nitrogen oxides continuous emissions data are not obtained because of continuous emission monitoring system breakdowns, repairs, calibration checks, and zero and span adjustments, emissions data shall be obtained using other monitoring systems as approved by the Administrator or EPA Reference Method 19 to provide, as necessary, valid emissions data for a minimum of 75 percent of the hours per day for 90 percent of the days per calendar quarter the unit is operated and combusting municipal solid waste.

[40 CFR 60.38b and 40 CFR 60.58b(h); and, PSD-FL-006(B) & (D)]

Beryllium

B.63. (a) Unless a waiver of emission testing is obtained under 40 CFR 61.13, each owner or operator required to comply with 40 CFR 61.32(a) shall test emissions from the source according to Method 104 or 29 of Appendix B to 40 CFR 61. EPA Method 104 of Appendix B to 40 CFR 61 is approved by the Administrator as an alternative method for sources subject to 40 CFR 61.32(a). The emission test shall be performed according to the following:

(1) Within 90 days of the effective date in the case of an existing source or a new source which has an initial startup date preceding the effective date; or

(2) Within 90 days of startup in the case of a new source which did not have an initial startup date preceding the effective date.

(b) The Administrator shall be notified at least 30 days prior to an emission test so that he may at his option observe the test.

(c) Samples shall be taken over such a period or periods as are necessary to accurately determine the maximum emissions which will occur in any 24-hour period. Where emissions depend upon the relative frequency of operation of different types of processes, operating hours, operating capacities, or other factors, the calculation of maximum 24-hour-period emissions will be based on that combination of factors which is likely to occur during the subject period and which result in the maximum emissions. No changes in the operation shall be made, which would potentially increase emissions above that determined by the most recent source test, until a new emission level has been estimated by calculation and the results reported to the Administrator.

(d) All samples shall be analyzed and beryllium emissions shall be determined within 30 days after the source test. All determinations shall be reported to the Administrator by a registered letter dispatched before the close of the next business day following such determination.

(e) Records of emission test results and other data needed to determine total emissions shall be retained at the source and made available, for inspection by the Administrator, for a minimum of **5** years.

(f) An initial compliance test is required; and, a compliance test prior to permit renewal is required.

[40 CFR 61.33; Rule 62-213.440(b), F.A.C.; and, PSD-FL-006(B) & (D)]

Total Fluoride

B.64. Compliance with the total fluoride emissions shall be demonstrated using EPA Method 13A or 13B. An initial compliance test is required; and, a compliance test prior to permit renewal is required.
[PSD-FL-006(B) & (D)]

Carbon Monoxide

B.65. See specific condition **B.18.**
[PSD-FL-006(A) & (D)]

Volatile Organic Compounds

B.66. Compliance with the volatile organic compounds limits shall be demonstrated using EPA Method 25; or, EPA Method 25A in conjunction with EPA Method 18.
[PSD-FL-006(D)]

Sulfuric Acid Mist

B.67. Compliance with the sulfuric acid mist emissions limits shall be demonstrated using EPA Method 8. Only an initial compliance test is required.
[PSD-FL-006(B) & (D)]

Arsenic

B.68. Compliance with the arsenic emissions limits shall be demonstrated using EPA Method 108 or 29. Only an initial compliance test is required.
[PSD-FL-006(B) & (D)]

B.69. Required Number of Test Runs. For mass emission limitations, a compliance test shall consist of three complete and separate determinations of the total air pollutant emission rate through the test section of the stack or duct and three complete and separate determinations of any applicable process variables corresponding to the three distinct time periods during which the stack emission rate was measured provided, however, that three complete and separate determinations shall not be required if the process variables are not subject to variation during a compliance test, or if three determinations are not necessary in order to calculate the unit's emission rate. The three required test runs shall be completed within one consecutive five day period. In the event that a sample is lost or one of the three runs must be discontinued because of circumstances beyond the control of the owner or operator, and a valid third run cannot be obtained within the five day period allowed for the test, the Secretary or his or her designee may accept the results of the two complete runs as proof of compliance, provided that the arithmetic mean of the results of the two complete runs is at least 20 percent below the allowable emission limiting standards.
[Rule 62-297.310(1), F.A.C.]

B.70. Operating Rate During Testing. Testing of emissions shall be conducted with the emissions unit operation at permitted capacity, which is defined as 90 to 100 percent of the maximum operation rate allowed by the permit. If it is impracticable to test at permitted capacity, an emissions unit may be tested at less than the minimum permitted capacity; in this case, subsequent emissions unit operation is limited to 110 percent of the test load until a new test is conducted. Once the emissions unit is so limited, operation at higher capacities is allowed for no more than 15 consecutive days for the purpose of additional compliance testing to regain the authority to operate at the permitted capacity.
[Rules 62-297.310(2) & (2)(b), F.A.C.]

B.71. Calculation of Emission Rate. The indicated emission rate or concentration shall be the arithmetic average of the emission rate or concentration determined by each of the three separate test runs unless otherwise specified in a particular test method or applicable rule.
[Rule 62-297.310(3), F.A.C.]

B.72. Applicable Test Procedures.

(a) Required Sampling Time.

1. Unless otherwise specified in the applicable rule, the required sampling time for each test run shall be no less than one hour and no greater than four hours, and the sampling time at each sampling point shall be of equal intervals of at least two minutes.

2. Opacity Compliance Tests. When either EPA Method 9 or DEP Method 9 is specified as the applicable opacity test method, the required minimum period of observation for a compliance test shall be sixty (60) minutes for emissions units which emit or have the potential to emit 100 tons per year or more of particulate matter, and thirty (30) minutes for emissions units which have potential emissions less than 100 tons per year of particulate matter and are not subject to a multiple-valued opacity standard. The opacity test observation period shall include the period during which the highest opacity emissions can reasonably be expected to occur. Exceptions to these requirements are as follows:

a. For batch, cyclical processes, or other operations which are normally completed within less than the minimum observation period and do not recur within that time, the period of observation shall be equal to the duration of the batch cycle or operation completion time.

b. The observation period for special opacity tests that are conducted to provide data to establish a surrogate standard pursuant to Rule 62-297.310(5)(k), F.A.C., Waiver of Compliance Test Requirements, shall be established as necessary to properly establish the relationship between a proposed surrogate standard and an existing mass emission limiting standard.

c. The minimum observation period for opacity tests conducted by employees or agents of the Department to verify the day-to-day continuing compliance of a unit or activity with an applicable opacity standard shall be twelve minutes.

(b) Minimum Sample Volume. Unless otherwise specified in the applicable rule, the minimum sample volume per run shall be 25 dry standard cubic feet.

(c) Required Flow Rate Range. For EPA Method 5 particulate sampling, acid mist/sulfur dioxide, and fluoride sampling which uses Greenburg Smith type impingers, the sampling nozzle and sampling time shall be selected such that the average sampling rate will be between 0.5 and 1.0 actual cubic feet per minute, and the required minimum sampling volume will be obtained.

(d) Calibration of Sampling Equipment. Calibration of the sampling train equipment shall be conducted in accordance with the schedule shown in Table 297.310-1, attached as part of this permit.

(e) Allowed Modification to EPA Method 5. When EPA Method 5 is required, the following modification is allowed: the heated filter may be separated from the impingers by a flexible tube.

[Rule 62-297.310(4), F.A.C.]

B.73. Required Stack Sampling Facilities. When a mass emissions stack test is required, the permittee shall comply with the requirements contained in Appendix SS-1, Stack Sampling Facilities, attached to this permit.

[Rule 62-297.310(6), F.A.C.]

B.74. Frequency of Compliance Tests. The following provisions apply only to those emissions units that are subject to an emissions limiting standard for which compliance testing is required.

(a) General Compliance Testing.

~~3~~1. The owner or operator of an emissions unit that is subject to any emission limiting standard shall conduct a compliance test that demonstrates compliance with the applicable emission limiting standard prior to obtaining a renewed operation permit. Emissions units that are required to conduct an annual compliance test may submit the most recent annual compliance test to satisfy the requirements of this provision. In renewing an air operation permit pursuant to Rule 62-210.300(2)(a)3.b., c., or d., F.A.C., the Department shall not require submission of emission compliance test results for any emissions unit that, during the year prior to renewal:

a. Did not operate; or

b. In the case of a fuel burning emissions unit, burned liquid and/or solid fuel for a total of no more than 400 hours.

~~4~~2. ~~During each federal fiscal year (October 1 - September 30), unless otherwise specified by rule, order, or permit, t~~ The owner or operator of each emissions unit shall have a formal compliance test conducted for each pollutant specified in conditions B.54 through B.68, with a frequency as specified in these conditions.~~:~~

~~a. Visible emissions, if there is an applicable standard;~~

~~b. Each of the following pollutants, if there is an applicable standard, and if the emissions unit emits or has the potential to emit: 5 tons per year or more of lead or lead compounds measured as elemental lead; 30 tons per year or more of acrylonitrile; or 100 tons per year or more of any other regulated air pollutant; and~~

~~c. Each NESHAP pollutant, if there is an applicable emission standard.~~

~~5~~3. An annual compliance test for particulate matter emissions shall not be required for any fuel burning emissions unit that, in a federal fiscal year, does not burn liquid and/or solid fuel, other than during startup, for a total of more than 400 hours.

~~9~~4. The owner or operator shall notify the Department's Southeast District office and the Dade County's DERM office at least 15 days prior to the date on which each formal compliance test is to

begin, of the date, time, and place of each such test, and the test contact person who will be responsible for coordinating and having such test conducted for the owner or operator.

(b) Special Compliance Tests. When the Department's Southeast District office or the Dade County's DERM office, after investigation, has good reason (such as complaints, increased visible emissions or questionable maintenance of control equipment) to believe that any applicable emission standard contained in a Department rule or in a permit issued pursuant to those rules is being violated, it may require the owner or operator of the emissions unit to conduct compliance tests which identify the nature and quantity of pollutant emissions from the emissions unit and to provide a report on the results of said tests to the Department's Southeast District office and the Dade County's DERM office.

(c) Waiver of Compliance Test Requirements. If the owner or operator of an emissions unit that is subject to a compliance test requirement demonstrates to the Department, pursuant to the procedure established in Rule 62-297.620, F.A.C., that the compliance of the emissions unit with an applicable weight emission limiting standard can be adequately determined by means other than the designated test procedure, such as specifying a surrogate standard of no visible emissions for particulate matter sources equipped with a bag house or specifying a fuel analysis for sulfur dioxide emissions, the Department shall waive the compliance test requirements for such emissions units and order that the alternate means of determining compliance be used, provided, however, the provisions of Rule 62-297.310(7)(b), F.A.C., shall apply.

[Rule 62-297.310(7), F.A.C.; PSD-FL-006(D); and, SIP approved]

Compliance With Standards and Maintenance Requirements

B.75. Compliance with standards in 40 CFR 60, other than opacity standards, shall be determined by performance tests established by 40 CFR 60.8, unless otherwise specified in the applicable standard.
[40 CFR 60.11(a)]

B.76. Compliance with opacity standards in 40 CFR 60 shall be determined by conducting observations in accordance with Reference Method 9 in Appendix A, 40 CFR 60, any alternative method that is approved by the Administrator, or as provided in 40 CFR 60.11(e)(5).
[40 CFR 60.11(b)]

B.77. The owner or operator of an affected facility subject to an opacity standard may submit, for compliance purposes, continuous opacity monitoring system (COMS) data results produced during any performance test required under 40 CFR 60.8 in lieu of EPA Method 9 observation data. If an owner or operator elects to submit COMS data for compliance with the opacity standard, he or she shall notify the Administrator of that decision, in writing, at least 30 days before any performance test required under 40 CFR 60.8 is conducted. Once the owner or operator of an affected facility has notified the Administrator to that effect, the COMS data results will be used to determine opacity compliance during subsequent tests required under 40 CFR 60.8 until the owner or operator notifies the Administrator, in writing, to the contrary. For the purpose of determining compliance with the opacity standard during a performance test required under 40 CFR 60.8 using COMS data, the minimum total time of COMS data collection shall be averages of all 6-minute continuous periods within the duration of the mass emission performance test. Results of the COMS opacity determinations shall be submitted along with the results of the performance test required under 60.8. The owner or operator of an affected facility using a COMS for compliance purposes is responsible for demonstrating that the COMS meets the requirements specified in 40 CFR 60.13(c), that the COMS has been properly maintained and operated, and that the resulting data have not been altered in any way. If COMS data results are submitted for compliance with the opacity standard for a period of time during which EPA Method 9 data indicates noncompliance, the EPA Method 9 data will be used to determine opacity compliance.

[40 CFR 60.11(e)(5)]

Monitoring Requirements

B.78. For the purposes of 40 CFR 60.13, all continuous monitoring systems (CMS) required under applicable subparts shall be subject to the provisions of 40 CFR 60.13 upon promulgation of performance specifications for continuous monitoring systems under Appendix B of 40 CFR 60 and, if the continuous monitoring system is used to demonstrate compliance with emission limits on a continuous basis, Appendix F of 40 CFR 60, unless otherwise specified in an applicable subpart or by the Administrator. Appendix F is applicable December 4, 1987.
[40 CFR 60.13(a)]

B.79. Continuous Monitoring Systems. Continuous monitoring systems (CMS) with recorders for the output shall be installed, calibrated, maintained and operated for each emissions unit, subject to approval by the Department, for the following:

a. Flue Gas Temperature (to be located at the inlet to the final particulate matter control device; the monitors shall be calibrated, operated and maintained in accordance with the manufacturers' instructions; and, the monitoring is to be certified by the manufacturer to be accurate within +1 percent of the temperature being measured);
b. Opacity;
c. Oxygen;
d. Carbon Monoxide;
e. Nitrogen Oxides;
f. Sulfur Dioxide (for SO_2, one monitor shall be located upstream of the scrubber and one shall be located downstream of the baghouse, when using percent removal to determine compliance with the SO_2 limits), as specified in 40 CFR 60, Appendix B.
g. Total Steam Production (lbs/hr, pressure, and temperature);
h. Power Generation;
i. Slaked Lime Production/Utilization;
j. Activated Carbon or Mercury Reactant Injection or Usage Rate;
k. Combustion Zone Temperature (as determined by surrogate temperature monitoring at the boiler roof); and,
l. Baghouse Pressure Drop (to be located downstream of the dry lime scrubbers).

The monitoring equipment shall meet the applicable requirements of Chapter 62-297, F.A.C., 40 CFR 60, Appendix F, 40 CFR 60.58b, and 40 CFR 60.13, including certification of each device in accordance with 40 CFR 60, Appendix B, Performance Specifications, and 40 CFR 60.7(a)(5), Notification Requirements. Data on monitoring equipment specifications, manufacturer, type calibration and maintenance requirements, and the proposed location of each monitor shall be provided to the Department's Southeast District office and the Dade County's DERM office for review at least 90 days prior to installation.
[PSD-FL-006(A) & (D)]

B.80. Opacity. If the owner or operator of an affected facility elects to submit continuous opacity monitoring system (COMS) data for compliance with the opacity standard as provided under 40 CFR 60.11(e)(5), he shall conduct a performance evaluation of the COMS as specified in Performance Specification 1, Appendix B, of 40 CFR 60 before the performance test required under 40 CFR 60.8 is conducted. Otherwise, the owner or operator of an affected facility shall conduct a performance evaluation of the COMS or continuous emission monitoring system (CEMS) during any performance test

required under 40 CFR 60.8 or within 30 days thereafter in accordance with the applicable performance specification in Appendix B of 40 CFR 60. The owner or operator of an affected facility shall conduct COMS or CEMS performance evaluations at such other times as may be required by the Administrator under section 114 of the Act.
(1) The owner or operator of an affected facility using a COMS to determine opacity compliance during any performance test required under 60.8 and as described in 40 CFR 60.11(e)(5) shall furnish the Administrator two or, upon request, more copies of a written report of the results of the COMS performance evaluation described in 40 CFR 60.13(c) at least 10 days before the performance test required under 60.8 is conducted.
[40 CFR 60.13(c)(1)]

B.81. (1) CEMS Zero and Span Values. Owners and operators of all continuous emission monitoring systems (CEMS) installed in accordance with the provisions of this 40 CFR Part 60 shall check the zero (or low-level value between 0 and 20 percent of span value) and span (50 to 100 percent of span value) calibration drifts at least once daily in accordance with a written procedure. The zero and span shall, as a minimum, be adjusted whenever the 24-hour zero drift or 24-hour span drift exceeds two times the limits of the applicable performance specifications in Appendix B. The system must allow the amount of excess zero and span drift measured at the 24-hour interval checks to be recorded and quantified, whenever specified. For continuous monitoring systems measuring opacity of emissions, the optical surfaces exposed to the effluent gases shall be cleaned prior to performing the zero and span drift adjustments except that for systems using automatic zero adjustments. The optical surfaces shall be cleaned when the cumulative automatic zero compensation exceeds 4 percent opacity.
(2) Opacity. Unless otherwise approved by the Administrator, the following procedures shall be followed for continuous monitoring systems measuring opacity of emissions. Minimum procedures shall include a method for producing a simulated zero opacity condition and an upscale (span) opacity condition using a certified neutral density filter or other related technique to produce a known obscuration of the light beam. Such procedures shall provide a system check of the analyzer internal optical surfaces and all electronic circuitry including the lamp and photo detector assembly.
[40 CFR 60.13(d)(1) and (2)]

B.82. Except for system breakdowns, repairs, calibration checks, and zero and span adjustments required under 40 CFR 60.13(d), all continuous monitoring systems (CMS) shall be in continuous operation and shall meet minimum frequency of operation requirements as follows:
(1) Opacity. All continuous monitoring systems referenced by 40 CFR 60.13(c) for measuring opacity of emissions shall complete a minimum of one cycle of sampling and analyzing for each successive 10-second period and one cycle of data recording for each successive 6-minute period.
(2) All continuous monitoring systems referenced by 40 CFR 60.13(c) for measuring emissions, except opacity, shall complete a minimum of one cycle of operation (sampling, analyzing, and data recording) for each successive 15-minute period.
[40 CFR 60.13(e)(1) and (2)]

B.83. All continuous monitoring systems (CMS) or monitoring devices shall be installed such that representative measurements of emissions or process parameters from the affected facility are obtained. Additional procedures for location of continuous monitoring systems contained in the applicable Performance Specifications of Appendix B of 40 CFR 60 shall be used.
[40 CFR 60.13(f)]

B.84. When the effluents from a single affected facility or two or more affected facilities subject to the same emission standards are combined before being released to the atmosphere, the owner or operator

may install applicable continuous monitoring systems (CMS) on each effluent or on the combined effluent. When the affected facilities are not subject to the same emission standards, separate continuous monitoring systems shall be installed on each effluent. When the effluent from one affected facility is released to the atmosphere through more than one point, the owner or operator shall install an applicable continuous monitoring system on each separate effluent unless the installation of fewer systems is approved by the Administrator. When more than one continuous monitoring system is used to measure the emissions from one affected facility (e.g., multiple breachings, multiple outlets), the owner or operator shall report the results as required from each continuous monitoring system.
[40 CFR 60.13(g)]

B.85. Opacity. Owners or operators of all continuous monitoring systems for measurement of opacity shall reduce all data to 6-minute averages and for continuous monitoring systems other than opacity to 1-hour averages for time periods as defined in 40 CFR 60.2. Six-minute opacity averages shall be calculated from 36 or more data points equally spaced over each 6-minute period. For continuous monitoring systems other than opacity, 1-hour averages shall be computed from four or more data points equally spaced over each 1-hour period. Data recorded during periods of continuous monitoring system breakdowns, repairs, calibration checks, and zero and span adjustments shall not be included in the data averages computed under this paragraph. An arithmetic or integrated average of all data may be used. The data may be recorded in reduced or non reduced form (e.g., ppm pollutant and percent O_2 or ng/J of pollutant). All excess emissions shall be converted into units of the standard using the applicable conversion procedures specified in subparts. After conversion into units of the standard, the data may be rounded to the same number of significant digits as used in the applicable subparts to specify the emission limit (e.g., rounded to the nearest 1 percent opacity).
[40 CFR 60.13(h)]

B.86. Determination of Process Variables.
(a) Required Equipment. The owner or operator of an emissions unit for which compliance tests are required shall install, operate, and maintain equipment or instruments necessary to determine process variables, such as process weight input or heat input, when such data are needed in conjunction with emissions data to determine the compliance of the emissions unit with applicable emission limiting standards.
(b) Accuracy of Equipment. Equipment or instruments used to directly or indirectly determine process variables, including devices such as belt scales, weight hoppers, flow meters, and tank scales, shall be calibrated and adjusted to indicate the true value of the parameter being measured with sufficient accuracy to allow the applicable process variable to be determined within 10% of its true value.
[Rule 62-297.310(5), F.A.C.]

B.87. CMS for Oxygen or Carbon Dioxide. The owner or operator of an affected facility shall install, calibrate, maintain, and operate a continuous monitoring system and record the output of the system for measuring the oxygen or carbon dioxide content of the flue gas at each location where carbon monoxide, sulfur dioxide, or nitrogen oxides emissions are monitored and shall comply with the test procedures and test methods specified in paragraphs (1) through (7).
(1) The span value of the oxygen (or carbon dioxide) monitor shall be 25 percent oxygen (or carbon dioxide).
(2) The monitor shall be installed, evaluated, and operated in accordance with 40 CFR 60.13.
(3) The initial performance evaluation shall be completed no later than 180 days after the date of initial startup of the affected facility, as specified under 40 CFR 60.8.
(4) The monitor shall conform to Performance Specification 3 in Appendix B of 40 CFR 60 except for section 2.3 (relative accuracy requirement).

(5) The quality assurance procedures of Appendix F of 40 CFR 60 except for section 5.1.1 (relative accuracy test audit) shall apply to the monitor.
(6) If carbon dioxide is selected for use in diluent corrections, the relationship between oxygen and carbon dioxide levels shall be established during the initial performance test according to the procedures and methods specified in paragraphs(i) through(iv). This relationship may be reestablished during performance compliance tests.

(i) The fuel factor equation in Method 3B shall be used to determine the relationship between oxygen and carbon dioxide at a sampling location. Method 3, 3A, or 3B, as applicable, shall be used to determine the oxygen concentration at the same location as the carbon dioxide monitor.
(ii) Samples shall be taken for at least 30 minutes in each hour.
(iii) Each sample shall represent a 1-hour average.
(iv) A minimum of three runs shall be performed.

(7) The relationship between carbon dioxide and oxygen concentrations that is established in accordance with paragraph (6) shall be submitted to the EPA Administrator as part of the initial performance test report and, if applicable, as part of the annual test report if the relationship is reestablished during the annual performance test.
[40 CFR 60.38b and 40 CFR 60.58b(b)]

Recordkeeping and Reporting Requirements

B.88. The owner or operator subject to the provisions of 40 CFR 60 shall furnish the Administrator written notification as follows:
(4) A notification of any physical or operational change to an existing facility which may increase the emission rate of any air pollutant to which a standard applies, unless that change is specifically exempted under an applicable subpart or in 40 CFR 60.14(e). This notice shall be postmarked 60 days or as soon as practicable before the change is commenced and shall include information describing the precise nature of the change, present and proposed emission control systems, productive capacity of the facility before and after the change, and the expected completion date of the change. The Administrator may request additional relevant information subsequent to this notice.
[40 CFR 60.7(a)(4)]

B.89. The owner or operator subject to the provisions of 40 CFR 60 shall maintain records of the occurrence and duration of any startup, shutdown, or malfunction in the operation of an affected facility; any malfunction of the air pollution control equipment; or, any periods during which a continuous monitoring system or monitoring device is inoperative.
[40 CFR 60.7(b)]

B.90. Each owner or operator required to install a continuous monitoring system (CMS) or monitoring device shall submit an excess emissions and monitoring systems performance report (excess emissions are defined in applicable subparts) and/or a summary report form [see 40 CFR 60.7(d)] to the Administrator semiannually, except when: more frequent reporting is specifically required by an applicable subpart; or, the CMS data are to be used directly for compliance determination, in which case quarterly reports shall be submitted; or, the Administrator, on a case-by-case basis, determines that more frequent reporting is necessary to accurately assess the compliance status of the source. All reports shall be postmarked by the 30th day following the end of each calendar half (or quarter, as appropriate). Written reports of excess emissions shall include the following information:
(1) The magnitude of excess emissions computed in accordance with 40 CFR 60.13(h), any conversion factor(s) used, and the date and time of commencement and completion of each time period of excess emissions. The process operating time during the reporting period.

(2) Specific identification of each period of excess emissions that occurs during startups, shutdowns, and malfunctions of the affected facility. The nature and cause of any malfunction (if known), the corrective action taken or preventative measures adopted.
(3) The date and time identifying each period during which the continuous monitoring system was inoperative except for zero and span checks and the nature of the system repairs or adjustments.
(4) When no excess emissions have occurred or the continuous monitoring system(s) have not been inoperative, repaired, or adjusted, such information shall be stated in the report.
[40 CFR 60.7(c)(1), (2), (3), and (4)]

B.91. The summary report form shall contain the information and be in the format shown in Figure 1 (attached) unless otherwise specified by the Administrator. One summary report form shall be submitted for each pollutant monitored at each affected facility.
(1) If the total duration of excess emissions for the reporting period is less than 1 percent of the total operating time for the reporting period and CMS downtime for the reporting period is less than 5 percent of the total operating time for the reporting period, only the summary report form shall be submitted and the excess emission report described in 40 CFR 60.7(c) need not be submitted unless requested by the Administrator.
(2) If the total duration of excess emissions for the reporting period is 1 percent or greater of the total operating time for the reporting period or the total CMS downtime for the reporting period is 5 percent or greater of the total operating time for the reporting period, the summary report form and the excess emission report described in 40 CFR 60.7(c) shall both be submitted.

{See attached Figure 1: Summary Report-Gaseous and Opacity Excess Emission and Monitoring System Performance}
[40 CFR 60.7(d)(1) and (2)]

B.92. (1) Notwithstanding the frequency of reporting requirements specified in 40 CFR 60.7(c), an owner or operator who is required by an applicable subpart to submit excess emissions and monitoring systems performance reports (and summary reports) on a quarterly (or more frequent) basis may reduce the frequency of reporting for that standard to semiannual if the following conditions are met:
(i) For 1 full year (e.g., 4 quarterly or 12 monthly reporting periods) the affected facility's excess emissions and monitoring systems reports submitted to comply with a standard under this part continually demonstrate that the facility is in compliance with the applicable standard;
(ii) The owner or operator continues to comply with all recordkeeping and monitoring requirements specified in 40 CFR 60, Subpart A, and the applicable standard; and
(iii) The Administrator does not object to a reduced frequency of reporting for the affected facility, as provided in 40 CFR 60.7(e)(2).
(2) The frequency of reporting of excess emissions and monitoring systems performance (and summary) reports may be reduced only after the owner or operator notifies the Administrator in writing of his or her intention to make such a change and the Administrator does not object to the intended change. In deciding whether to approve a reduced frequency of reporting, the Administrator may review information concerning the source's entire previous performance history during the required recordkeeping period prior to the intended change, including performance test results, monitoring data, and evaluations of an owner or operator's conformance with operation and maintenance requirements. Such information may be used by the Administrator to make a judgment about the source's potential for noncompliance in the future. If the Administrator disapproves the owner or operator's request to reduce the frequency of reporting, the Administrator will notify the owner or operator in writing within 45 days after receiving notice of the owner or operator's intention. The notification from the Administrator to the owner or operator will specify the grounds on which the disapproval is based. In the absence of a notice of disapproval within 45 days, approval is automatically granted.

(3) As soon as monitoring data indicate that the affected facility is not in compliance with any emission limitation or operating parameter specified in the applicable standard, the frequency of reporting shall revert to the frequency specified in the applicable standard, and the owner or operator shall submit an excess emissions and monitoring systems performance report (and summary report, if required) at the next appropriate reporting period following the noncomplying event. After demonstrating compliance with the applicable standard for another full year, the owner or operator may again request approval from the Administrator to reduce the frequency of reporting for that standard as provided for in 40 CFR 60.7(e)(1) and (e)(2).
[40 CFR 60.7(e)(1), (2), and (3)]

B.93. Any owner or operator subject to the provisions of 40 CFR 60 shall maintain a file of: all measurements, including continuous monitoring system, monitoring device, and performance testing measurements; all continuous monitoring system performance evaluations; all continuous monitoring system or monitoring device calibration checks; adjustments and maintenance performed on these systems or devices; calibration logs for all instruments; and, all other information required by 40 CFR 60 recorded in a permanent form suitable for inspection. The file shall be retained for at least **5 (five)** years following the date of such measurements, maintenance, reports, and records.
[40 CFR 60.7(f); PSD-FL-006(A) & (D); and, Rule 62-213.440(1)(b)2.b., F.A.C.]

B.94. Notification of Construction or Reconstruction. The owner or operator of an affected facility with a capacity to combust greater than 250 tons per day shall submit a notification of construction, which includes the information specified in paragraphs (1) through (4).
(1) Intent to construct.
(2) Planned initial startup date.
(3) The types of fuels that the owner or operator plans to combust in the affected facility.
(4) The municipal waste combustor unit capacity and supporting capacity calculations prepared in accordance with 40 CFR 60.58b(j).
[40 CFR 60.39b and 40 CFR 60.59b(b)]

B.95. The owner or operator of an affected facility subject to the standards under 40 CFR 60.53b, 60.54b, and 60.55b shall maintain records of the information specified in paragraphs (1) through (15), as applicable, for each affected facility for a period of at least 5 years.
(1) The calendar date of each record.
(2) The emission concentrations and parameters measured using continuous monitoring systems as specified under paragraphs (i) and (ii).

(i) The measurements specified in paragraphs (A) through (D) shall be recorded and be available for submittal to the Administrator or review onsite by an inspector.

(A) All 6-minute average opacity levels as specified under 40 CFR 60.58b(c).

(B) All 1-hour average sulfur dioxide emission concentrations as specified under 40 CFR 60.58b(e).

(C) All 1-hour average nitrogen oxides emission concentrations as specified under 40 CFR 60.58b(h).

(D) All 1-hour average carbon monoxide emission concentrations, municipal waste combustor unit load measurements, and particulate matter control device inlet temperatures as specified under 40 CFR 60.58b(i).

(ii) The average concentrations and percent reductions, as applicable, specified in paragraphs (2)(ii)(A) through (2)(ii)(D) shall be computed and recorded, and shall be available for submittal to the Administrator or review on-site by an inspector.

(A) All 24-hour daily geometric average sulfur dioxide emission concentrations and all 24-hour daily geometric average percent reductions in sulfur dioxide emissions as specified under 40 CFR 60.58b(e).

(B) All 24-hour daily arithmetic average nitrogen oxides emission concentrations as specified under 40 CFR 60.58b(h).

(C) All 4-hour block or 24-hour daily arithmetic average carbon monoxide emission concentrations, as applicable, as specified under 40 CFR 60.58b(i).

(D) All 4-hour block arithmetic average municipal waste combustor unit load levels and particulate matter control device inlet temperatures as specified under 40 CFR 60.58b(i).

(3) Identification of the calendar dates when any of the average emission concentrations, percent reductions, or operating parameters recorded under paragraphs (2)(ii)(A) through (2)(ii)(D), or the opacity levels recorded under paragraph (2)(i)(A) are above the applicable limits, with reasons for such exceedances and a description of corrective actions taken.

(4) For affected facilities that apply activated carbon for mercury or dioxin/furan control, the records specified in paragraphs (i) through (v).

(i) The average carbon mass feed rate (in kilograms per hour or pounds per hour) estimated as required under 40 CFR 60.58b(m)(1)(i) during the initial mercury performance test and all subsequent annual performance tests, with supporting calculations.

(ii) The average carbon mass feed rate (in kilograms per hour or pounds per hour) estimated as required under 40 CFR 60.58b(m)(1)(ii) during the initial dioxin/furan performance test and all subsequent annual performance tests, with supporting calculations.

(iii) The average carbon mass feed rate (in kilograms per hour or pounds per hour) estimated for each hour of operation as required under 40 CFR 60.58b(m)(3)(ii), with supporting calculations.

(iv) The total carbon usage for each calendar quarter estimated as specified by 40 CFR 60.58b(m)(3), with supporting calculations.

(v) Carbon injection system operating parameter data for the parameter(s) that are the primary indicator(s) of carbon feed rate (e.g., screw feeder speed).

(5) [Reserved]

(6) Identification of the calendar dates for which the minimum number of hours of any of the data specified in paragraphs (i) through (v) have not been obtained including reasons for not obtaining sufficient data and a description of corrective actions taken.

(i) Sulfur dioxide emissions data;

(ii) Nitrogen oxides emissions data;

(iii) Carbon monoxide emissions data;

(iv) Municipal waste combustor unit load data; and

(v) Particulate matter control device temperature data.

(7) Identification of each occurrence that sulfur dioxide emissions data, nitrogen oxides emissions data (large municipal waste combustors only), or operational data (i.e., carbon monoxide emissions, unit load, and particulate matter control device temperature) have been excluded from the calculation of average emission concentrations or parameters, and the reasons for excluding the data.

(8) The results of daily drift tests and quarterly accuracy determinations for sulfur dioxide, nitrogen oxides, and carbon monoxide continuous emission monitoring systems, as required under Appendix F of this part, procedure 1.

(9) The test reports documenting the results of the initial performance test and all annual performance tests listed in paragraphs (i) and (ii) shall be recorded along with supporting calculations.

(i) The results of the initial performance test and all annual performance tests conducted to determine compliance with the particulate matter, opacity, cadmium, lead, mercury, dioxins/furans, hydrogen chloride, and fugitive ash emission limits.

(ii) For the initial dioxin/furan performance test and all subsequent dioxin/furan performance tests recorded under paragraph (9)(i), the maximum demonstrated municipal waste combustor unit load and maximum demonstrated particulate matter control device temperature (for each particulate matter control device).

(10) [Reserved]

(12) The records specified in paragraphs (i) through (iii).

(i) Records showing the names of the municipal waste combustor chief facility operator, shift supervisors, and control room operators who have been provisionally certified by the American Society of Mechanical Engineers or an equivalent State-approved certification program as required by 40 CFR 60.54b(a) including the dates of initial and renewal certifications and documentation of current certification.

(ii) Records showing the names of the municipal waste combustor chief facility operator, shift supervisors, and control room operators who have been fully certified by the American Society of Mechanical Engineers or an equivalent State-approved certification program as required by 40 CFR 60.54b(b) including the dates of initial and renewal certifications and documentation of current certification.

(iii) Records showing the names of the municipal waste combustor chief facility operator, shift supervisors, and control room operators who have completed the EPA municipal waste combustor operator training course or a State-approved equivalent course as required by 40 CFR 60.54b(d) including documentation of training completion.

(13) Records showing the names of persons who have completed a review of the operating manual as required by 40 CFR 60.54b(f) including the date of the initial review and subsequent annual reviews.

(14) For affected facilities that apply activated carbon for mercury or dioxin/furan control, identification of the calendar dates when the average carbon mass feed rates recorded under (4)(iii) were less than either of the hourly carbon feed rates estimated during performance tests for mercury or dioxin/furan emissions and recorded under paragraphs (4)(i) and (4)(ii), respectively, with reasons for such feed rates and a description of corrective actions taken.

(15) For affected facilities that apply activated carbon for mercury or dioxin/furan control, identification of the calendar dates when the carbon injection system operating parameter(s) that are the primary indicator(s) of carbon mass feed rate (e.g., screw feeder speed) recorded under paragraph (4)(v) are below the level(s) estimated during the performance tests as specified in 40 CFR 60.58b(m)(1)(i) and 40 CFR 60.58b(m)(1)(ii), with reasons for such occurrences and a description of corrective actions taken.

[40 CFR 60.39b and 40 CFR 60.59b(d)]

B.96. The owner or operator of an affected facility shall submit the information specified in paragraphs (1) through (6) in the initial performance test report.

(1) The initial performance test data as recorded under 40 CFR 60.59b(d)(2)(ii)(A) through (d)(2)(ii)(D) for the initial performance test for sulfur dioxide, nitrogen oxides, carbon monoxide, municipal waste combustor unit load level, and particulate matter control device inlet temperature.

(2) The test report documenting the initial performance test recorded under 40 CFR 60.59b(d)(9) for particulate matter, opacity, cadmium, lead, mercury, dioxins/furans, hydrogen chloride, and fugitive ash emissions.

(3) The performance evaluation of the continuous emission monitoring system using the applicable performance specifications in Appendix B of this part.

(4) The maximum demonstrated municipal waste combustor unit load and maximum demonstrated particulate matter control device inlet temperature(s) established during the initial dioxin/furan performance test as recorded under 40 CFR 60.59b(d)(9).

(5) For affected facilities that apply activated carbon injection for mercury control, the owner or operator shall submit the average carbon mass feed rate recorded under 40 CFR 60.59b(d)(4)(i).

(6) For those affected facilities that apply activated carbon injection for dioxin/furan control, the owner or operator shall submit the average carbon mass feed rate recorded under 40 CFR 60.59b(d)(4)(ii). [40 CFR 60.39b and 40 CFR 60.59b(f)]

B.97. Following the first year of municipal combustor operation, the owner or operator of an affected facility shall submit an annual report including the information specified in paragraphs (1) through (4), as applicable, no later than February 1 of each year following the calendar year in which the data were collected (once the unit is subject to permitting requirements under Title V of the Act, the owner or operator of an affected facility must submit these reports semiannually).
(1) A summary of data collected for all pollutants and parameters regulated under this subpart, which includes the information specified in paragraphs (i) through (v).
(i) A list of the particulate matter, opacity, cadmium, lead, mercury, dioxins/furans, hydrogen chloride, and fugitive ash emission levels achieved during the performance tests recorded under 40 CFR 60.59b (d)(9).
(ii) A list of the highest emission level recorded for sulfur dioxide, nitrogen oxides, carbon monoxide, municipal waste combustor unit load level, and particulate matter control device inlet temperature based on the data recorded under 40 CFR 60.59b(d)(2)(ii)(A) through (d)(2)(ii)(D).
(iii) List the highest opacity level measured, based on the data recorded under 40 CFR 60.59b(d)(2)(i)(A).
(iv) The total number of days that the minimum number of hours of data for sulfur dioxide, nitrogen oxides, carbon monoxide, municipal waste combustor unit load, and particulate matter control device temperature data were not obtained based on the data recorded under 40 CFR 60.59b(d)(6).
(v) The total number of hours that data for sulfur dioxide, nitrogen oxides, carbon monoxide, municipal waste combustor unit load, and particulate matter control device temperature were excluded from the calculation of average emission concentrations or parameters based on the data recorded under 40 CFR 60.59b(d)(7).
(2) The summary of data reported under paragraph (1) shall also provide the types of data specified in paragraphs (1)(i) through (1)(vi) for the calendar year preceding the year being reported, in order to provide the Administrator with a summary of the performance of the affected facility over a 2-year period.
(3) The summary of data including the information specified in paragraphs (1) and (2) shall highlight any emission or parameter levels that did not achieve the emission or parameter limits specified under this subpart.
(4) A notification of intent to begin the reduced dioxin/furan performance testing schedule specified in 40 CFR 60.58b(g)(5)(iii) during the following calendar year.
[40 CFR 60.39b and 40 CFR 60.59b(g)]

B.98. The owner or operator of an affected facility shall submit a semiannual report that includes the information specified in paragraphs (1) through (5) for any recorded pollutant or parameter that does not comply with the pollutant or parameter limit specified under this subpart, according to the schedule specified under paragraph (6).
(1) The semiannual report shall include information recorded under 40 CFR 60.59b(d)(3) for sulfur dioxide, nitrogen oxides, carbon monoxide, municipal waste combustor unit load level, particulate matter control device inlet temperature, and opacity.
(2) For each date recorded as required by 40 CFR 60.59b(d)(3) and reported as required by paragraph (1), the semiannual report shall include the sulfur dioxide, nitrogen oxides, carbon monoxide, municipal waste combustor unit load level, particulate matter control device inlet temperature, or opacity data, as applicable, recorded under 40 CFR 60.59b(d)(2)(ii)(A) through (d)(2)(ii)(D) and (d)(2)(i)(A), as applicable.

(3) If the test reports recorded under 40 CFR 56.59b(d)(9) document any particulate matter, opacity, cadmium, lead, mercury, dioxins/furans, hydrogen chloride, and fugitive ash emission levels that were above the applicable pollutant limits, the semiannual report shall include a copy of the test report documenting the emission levels and the corrective actions taken.
(4) The semiannual report shall include the information recorded under 40 CFR 60.59b(d)(15) for the carbon injection system operating parameter(s) that are the primary indicator(s) of carbon mass feed rate.
(5) For each operating date reported as required by paragraph (4), the semiannual report shall include the carbon feed rate data recorded under 40 CFR 60.59b(d)(4)(iii).
(6) Semiannual reports required by this condition shall be submitted according to the schedule specified in paragraphs (i) and (ii).

(i) If the data reported in accordance with paragraphs (1) through (5) were collected during the first calendar half, then the report shall be submitted by August 1 following the first calendar half.
(ii) If the data reported in accordance with paragraphs (1) through (5) were collected during the second calendar half, then the report shall be submitted by February 1 following the second calendar half.

[40 CFR 60.39b and 40 CFR 60.59b(h)]

B.99. All reports specified under 40 CFR 60.59b(a), (b), (c), (f), (g), (h), and (i) shall be submitted as a paper copy, postmarked on or before the submittal dates specified under these paragraphs, and maintained on-site as a paper copy for a period of **5** years.
[40 CFR 60.39b and 40 CFR 60.59b(j); PSD-FL-006(A) & (D); and, Rule 62-213.440, F.A.C.]

B.100. All records specified under 40 CFR 60.59b(d) and (e) shall be maintained onsite in either paper copy or computer-readable format, unless an alternative format is approved by the Administrator.
[40 CFR 60.39b and 40 CFR 60.59b(k)]

B.101. If the owner or operator of an affected facility would prefer a different annual or semiannual date for submitting the periodic reports required by 40 CFR 60.59b(g), (h) and (i), then the dates may be changed by mutual agreement between the owner or operator and the Administrator according to the procedures specified in 40 CFR 60.19(c) of Subpart A of 40 CFR 60.
[40 CFR 60.39b and 40 CFR 60.59b(l)]

B.102. In the case of excess emissions resulting from malfunctions, each owner or operator shall notify the Department's Southeast District office and the Dade County's DERM office in accordance with Rule 62-4.130, F.A.C. A full written report on the malfunctions shall be submitted in a quarterly report, if requested by the Department or its agent.
Rule 62-210.700(6), F.A.C.]

B.103. Submit to the Department's Southeast District office and the Dade County's DERM office a written report of emissions in excess of emission limiting standards for each calendar quarter. The nature and cause of the excess emissions shall be explained. This report does not relieve the owner or operator of the legal liability for violations. All recorded data shall be maintained on file by the Source for a period of **five** years.
[Rule 62-213.440, F.A.C.]

B.104. The owner or operator shall submit excess emission reports to the Department's Southeast District office and the Dade County's DERM office for any calendar quarter during which there are excess emissions from the facility. If there are no excess emissions during the calendar quarter, the owner or operator shall submit a report quarterly stating that no excess emissions occurred during the quarterly reporting period. The report shall include the following:
(a) The magnitude of excess emissions computed in accordance with 40 CFR 60.13(h), any conversion factors used, and the date and time of commencement and completion of each period of excess emissions [40 CFR 60.7(c)(1)].
(b) Specific identification of each period of excess emissions that occurs during startups, shutdowns, and malfunctions of the furnace boiler system. The nature and cause of any malfunction (if known) and the corrective action taken or preventive measured adopted [40 CFR 60.7(c)(2)].
(c) The date and time identifying each period during which the continuous monitoring system was inoperative except for zero and span checks, and the nature of the system repairs of adjustments [40 CFR 60.7(c)(2)].
(d) When no excess emissions have occurred or the continuous monitoring system has not been inoperative, repaired, or adjusted, such information shall be stated in the report [40 CFR 60.7(c)(4)].
(e) The owner or operator shall maintain a file of all measurements, including continuous monitoring systems performance evaluations; monitoring systems or monitoring device calibration; checks; adjustments and maintenance performed on these systems or devices; and all other information required by this permit recorded in a permanent form suitable for inspection [40 CFR 60.7(d)].
[PSD-FL-006(A)]

B.105. Test Reports.
(a) The owner or operator of an emissions unit for which a compliance test is required shall file a report with the Department's Southeast District office and the Dade County's DERM office on the results of each such test.
(b) The required test report shall be filed with the Department's Southeast District office and the Dade County's DERM office as soon as practical but no later than 45 days after the last sampling run of each test is completed.
(c) The test report shall provide sufficient detail on the emissions unit tested and the test procedures used to allow the Department's Southeast District office and the Dade County's DERM office to determine if the test was properly conducted and the test results properly computed. As a minimum, the test report, other than for an EPA or DEP Method 9 test, shall provide the following information:

1. The type, location, and designation of the emissions unit tested.
2. The facility at which the emissions unit is located.
3. The owner or operator of the emissions unit.
4. The normal type and amount of fuels used and materials processed, and the types and amounts of fuels used and material processed during each test run.
5. The means, raw data and computations used to determine the amount of fuels used and materials processed, if necessary to determine compliance with an applicable emission limiting standard.
6. The type of air pollution control devices installed on the emissions unit, their general condition, their normal operating parameters (pressure drops, total operating current and GPM scrubber water), and their operating parameters during each test run.
7. A sketch of the duct within 8 stack diameters upstream and 2 stack diameters downstream of the sampling ports, including the distance to any upstream and downstream bends or other flow disturbances.
8. The date, starting time and duration of each sampling run.

9. The test procedures used, including any alternative procedures authorized pursuant to Rule 62-297.620, F.A.C. Where optional procedures are authorized in this chapter, indicate which option was used.
10. The number of points sampled and configuration and location of the sampling plane.
11. For each sampling point for each run, the dry gas meter reading, velocity head, pressure drop across the stack, temperatures, average meter temperatures and sample time per point.
12. The type, manufacturer and configuration of the sampling equipment used.
13. Data related to the required calibration of the test equipment.
14. Data on the identification, processing and weights of all filters used.
15. Data on the types and amounts of any chemical solutions used.
16. Data on the amount of pollutant collected from each sampling probe, the filters, and the impingers, are reported separately for the compliance test.
17. The names of individuals who furnished the process variable data, conducted the test, analyzed the samples and prepared the report.
18. All measured and calculated data required to be determined by each applicable test procedure for each run.
19. The detailed calculations for one run that relate the collected data to the calculated emission rate.
20. The applicable emission standard, and the resulting maximum allowable emission rate for the emissions unit, plus the test result in the same form and unit of measure.
21. A certification that, to the knowledge of the owner or his authorized agent, all data submitted are true and correct. When a compliance test is conducted for the Department's Southeast District or its agent, the person who conducts the test shall provide the certification with respect to the test procedures used. The owner or his authorized agent shall certify that all data required and provided to the person conducting the test are true and correct to his knowledge.

[Rule 62-297.310(8), F.A.C.]

B.106. Monthly records shall be maintained of the amount of propane and natural gas used by the auxiliary burners of each emissions unit and the equivalent heat input from the propane and natural gas (calculated using the heat value for the propane and natural gases provided by the gas supplier).
[Rule 62-213.440, F.A.C.; and, PSD-FL-006(D)]

B.107. Charging Rate Monitoring. The average daily RDF charging rate shall be determined on a monthly basis and recorded for each combustor unit. The daily charging rate shall be determined each month on an average daily basis for each combustor unit using the facility's truck scale weight data, refuse pit inventory data and RDF operating data for the preceding calendar month. Monthly truck scale weight records of the weight of solid waste received and processed at the facility, and refuse pit inventory data, shall be used to determine the amount of RDF charged during the preceding calendar month on an average daily basis. The RDF load level measurements or other operating data shall be used to determined the number of operating hours per combustor unit for each day during the preceding calendar month.
[Rule 62-213.440, F.A.C.; PSD-FL-006(D); and, 40 CFR 60.53(a)]

B.108. Segregated Solid Waste Recordkeeping. The following records shall be made and kept to demonstrate compliance with the segregated non-MSW percentage limitations of specific condition **B.12.**: (1) Each segregated load of non-MSW materials, that is subject to the percentage weight limitations of specific condition **B.12.**, which is received for processing shall be documented as to waste description and weight. The weight of all waste materials received for processing shall be measured using the facility truck scales and recorded.

(2) Each day the total weight of segregated tires received shall be computed, and the daily total shall be added to the sum of the daily totals from the current calendar month. At the end of each calendar month, the resultant monthly total weight of tires shall be divided by the total weight of all waste materials received in the same calendar month, and the resulting number shall be multiplied by 100 to express the ratio in percentage terms. The percentage computed shall be compared to the 3% limitation.
(3) Each day the total weight of segregated non-MSW materials received that are subject to the 5% restriction shall be computed, and the daily total shall be added to the sum of the daily totals from the previous days in the current calendar month. At the end of each calendar month, the resultant monthly total weight of segregated non-MSW materials shall be divided by the total weight of all waste materials received in the same calendar month, and the resulting number shall be multiplied by 100 to express the ratio in percentage terms. The percentage computed shall be compared to the 5% limitation.
[Rule 62-213.440, F.A.C.; and, PSD-FL-006(D)]

B.109. The owner or operator shall maintain a central file containing all measurements, records, and other data that are required to be collected pursuant to the various specific conditions of this permit. This file shall include but not be limited to:
1) the data collected from in-stack monitoring instruments;
2) the records on RDF input rates per emissions unit;
3) the amount of propane gas burned per emissions unit;
4) the results of all source tests or performance tests;
5) the amount of activated carbon or other reactant chemicals used for mercury control;
6) calibration logs for all instruments;
7) maintenance/repair logs for any work performed on equipment or instrument which is subject to this permit; and,
8) fuel analyses data.

All measurements, records, and other data required to be maintained by owner or operator shall be retained for at least **five** (5) years following the date on which such measurements, records, or data are recorded. These data shall be made available to the Department upon request. The Department's Southeast District office and the Dade County's DERM office shall be notified in writing at least 15 days prior to the testing of any instrument required to be operated by these conditions of certification in order to allow witnessing by authorized personnel.
[PSD-FL-006(A) & (D); and, Rule 62-213.440, F.A.C.]

B.110. Reports.
a) A copy of the results of any formal emission shall be submitted within forty-five days of the last sampling run to the Department's Southeast District office and the Dade County's DERM office. Reports shall be in a format consistent with and shall include the information in accordance with Rule 62-297.570, F.A.C.
b) Emissions monitoring shall be reported to the Department's Southeast District office and the Dade County's DERM office on a quarterly basis in accordance with Chapter 62-297, F.A.C., and 40 CFR Part 60.7, as appropriate.
c) Notice of anticipated and actual start-up dates of control devices under this permit shall be submitted to Department's Southeast District office and the Dade County's DERM office.
[PSD-FL-006(A) & (D)]

Miscellaneous Requirements.

B.111. Activated Carbon Injection. The owner or operator of an affected facility where activated carbon injection is used to comply with the mercury emission limit (see specific condition **B.27.**), or the dioxin/furan emission limits (see specific condition **B.34.**), or the dioxin/furan emission level specified in 40 CFR 60.58b(g)(5)(iii), shall follow the procedures specified in paragraphs (1) through (3).
(1) During the performance tests for dioxins/furans and mercury, as applicable, the owner or operator shall estimate an average carbon mass feed rate based on carbon injection system operating parameters such as the screw feeder speed, hopper volume, hopper refill frequency, or other parameters appropriate to the feed system being employed, as specified in paragraphs (i) and(ii).

(i) An average carbon mass feed rate in kilograms per hour or pounds per hour shall be estimated during the initial performance test for mercury emissions and each subsequent performance test for mercury emissions.

(ii) An average carbon mass feed rate in kilograms per hour or pounds per hour shall be estimated during the initial performance test for dioxin/furan emissions and each subsequent performance test for dioxin/furan emissions.

(2) During operation of the affected facility, the carbon injection system operating parameter(s) that are the primary indicator(s) of the carbon mass feed rate (e.g., screw feeder setting) must equal or exceed the level(s) documented during the performance tests specified under paragraphs (1)(i) and (1)(ii).
(3) The owner or operator of an affected facility shall estimate the total carbon usage of the plant (kilograms or pounds) for each calendar quarter by two independent methods, according to the procedures in paragraphs (i) and (ii).

(i) The weight of carbon delivered to the plant.

(ii) Estimate the average carbon mass feed rate in kilograms per hour or pounds per hour for each hour of operation for each affected facility based on the parameters specified under paragraph (1), and sum the results for all affected facilities at the plant for the total number of hours of operation during the calendar quarter.

[40 CFR 60.38b and 40 CFR 60.58b(m); and, PSD-FL-006(D)]

B.112. Acid Rain Part Application. For any unit which was a solid waste incinerator, burning less than 20 percent fossil fuel as described in 40 CFR 72.6(b)(7), adopted and incorporated by reference at Rule 62-204.800, F.A.C., the designated representative of the source containing the unit shall submit a complete Acid Rain Part application governing such unit to the Department before the later of January 1, 1998, or March 1 of the year following the three calendar year period in which the incinerator consumed 20 percent or more fossil fuel on a British thermal unit (BTU) basis.
[Rule 62-214.320(1)(h), F.A.C.]

B.113. Baghouse Operations: Air-to-Cloth Ratio. The baghouses shall have a minimum air-to-cloth ratio of 4:1.
[PSD-FL-006(A) & (D)]

B.114. The permittee is authorized to install and operate permanently mounted gas burners, selective noncatalytic reduction (SNCR) systems, and other controls to achieve the nitrogen oxides and carbon monoxide emissions limits.
[PSD-FL-006(D)]

B.115. Credible Evidence. For the purpose of submitting compliance certifications or establishing whether or not a person has violated or is in violation of any standard in 40 CFR 60, nothing in 40 CFR 60 shall preclude the use, including the exclusive use, of any credible evidence or information, relevant to whether a source would have been in compliance with applicable requirements if the appropriate performance or compliance test or procedure had been performed.
[40 CFR 60.11(g)]

Subsection C. This section addresses the following emissions units.

E.U. ID No.	Brief Description
-rrr	MSW to RDF Processing Facility: 3,000 TPD; 18,000 tons/wk; and, 936,000 TPY
-sss	Bulky Waste to Biomass Processing Facility: 400,000 TPY

Emissions Unit **-rrr** is a processing activity of receiving, handling and converting of MSW into RDF and saleable extractables, such as metals and glass. The facility is designed to process 3,000 tons/day, 18,000 tons/wk, and 936,000 tons/yr of RDF.

Emissions Unit **-sss** is an existing bulky waste processing system that will be modified into a biomass fuel preparation system and is designed to process up to 400,000 tons/yr of the bulky waste into biomass, which will be transported off-site for use in biomass-fired cogeneration units or combusted on-site.

{Permitting note(s): Emissions units **-rrr** and **-sss** are each minor emissions units regulated under Rule 62-210.300, F.A.C., Permits Required; Rule 62-212.400, F.A.C., Prevention of Significant Deterioration [PSD; and, PSD-FL-006(A), (B) & (D)]}

The following specific conditions apply to the emissions unit(s) listed above:

General

Essential Potential to Emit (PTE) Parameters

C.1. Hours of Operation. Each emissions unit may operate continuously, i.e., 8,760 hrs/yr.
[Rules 62-213.440, 62-210.200(PTE), and 62-296.700(4)(a)7., F.A.C.; and, PSD-FL-006(D)]

Emission Limitations and Standards

C.2. Particulate Matter Emissions.
(1) Bulky Waste to Biomass Processing Facility. Particulate matter emissions from any baghouse shall not exceed 0.01 gr/dscf.
[PSD-FL-006(A) & (D)]

C.3. Visible Emissions.
a. MSW to RDF Processing Facility. Visible emissions from each baghouse exhaust shall not exceed 10 percent opacity, six-minute average.
b. Bulky Waste to Biomass Processing Facility. Visible emissions from each baghouse exhaust shall not exceed 5 percent opacity, since each emissions unit's potential particulate matter emissions are less than 100 TPY and is equipped with a baghouse control system. As long as the visible emissions do not exceed 5 percent opacity, compliance is assumed for the particulate matter limitations established in specific condition **C.2.**, above.

If the Department's Southeast District office and the Dade County's DERM office has reason to believe that the particulate matter weight emissions standard in specific condition **C.2.** is not being met, it shall require that compliance be demonstrated by the test method specified in specific condition **C.9.**
[PSD-FL-006(A) & (D); and, Rule 62-297.620(4), F.A.C.]

Excess Emissions

C.4. Excess emissions resulting from startup, shutdown or malfunction shall be permitted provided that best operational practices to minimize emissions are adhered to and the duration of excess emissions shall be minimized but in no case exceed two hours in any 24 hour period unless specifically authorized by the Department for longer duration.
[Rule 62-210.700(1), F.A.C.]

C.5. Excess emissions which are caused entirely or in part by poor maintenance, poor operation, or any other equipment or process failure which may reasonably be prevented during startup, shutdown or malfunction shall be prohibited.
[Rule 62-210.700(4), F.A.C.]

Monitoring of Operations

C.6. Determination of Process Variables.
(a) Required Equipment. The owner or operator of an emissions unit for which compliance tests are required shall install, operate, and maintain equipment or instruments necessary to determine process variables, such as process weight input or heat input, when such data are needed in conjunction with emissions data to determine the compliance of the emissions unit with applicable emission limiting standards.
(b) Accuracy of Equipment. Equipment or instruments used to directly or indirectly determine process variables, including devices such as belt scales, weight hoppers, flow meters, and tank scales, shall be calibrated and adjusted to indicate the true value of the parameter being measured with sufficient accuracy to allow the applicable process variable to be determined within 10% of its true value.
[Rule 62-297.310(5), F.A.C.]

Test Methods and Procedures

C.7. Annual Tests Required. Annual visible emissions compliance tests shall be performed for each emissions unit.
[Rule 62-297.310(7), F.A.C.]

C.8. Visible Emissions. The test method for visible emissions for all emissions units shall be EPA Method 9, in accordance with Rule 62-297.401, F.A.C., and 40 CFR 60, Appendix A.
[Rule 62-297.401, F.A.C.; and, PSD-FL-006(A), (B) & (D)]

C.9. Particulate Matter Emissions. The test method for particulate matter emissions for all units shall be EPA Method 5, in accordance with Rule 62-297.401, F.A.C., and 40 CFR 60, Appendix A.
[Rule 62-297.401, F.A.C.; and, PSD-FL-006(A), (B) & (D)]

C.10. Required Number of Test Runs. For mass emission limitations, a compliance test shall consist of three complete and separate determinations of the total air pollutant emission rate through the test section of the stack or duct and three complete and separate determinations of any applicable process variables corresponding to the three distinct time periods during which the stack emission rate was measured provided, however, that three complete and separate determinations shall not be required if the process variables are not subject to variation during a compliance test, or if three determinations are not necessary in order to calculate the unit's emission rate. The three required test runs shall be completed within one consecutive five day period. In the event that a sample is lost or one of the three runs must be

discontinued because of circumstances beyond the control of the owner or operator, and a valid third run cannot be obtained within the five day period allowed for the test, the Secretary or his or her designee may accept the results of the two complete runs as proof of compliance, provided that the arithmetic mean of the results of the two complete runs is at least 20 percent below the allowable emission limiting standards.
[Rule 62-297.310(1), F.A.C.]

C.11. Operating Rate During Testing. Testing of emissions shall be conducted with each emissions unit operation at permitted capacity, which is defined as 90 to 100 percent of the maximum operation rate allowed by the permit. If it is impracticable to test at permitted capacity, an emissions unit may be tested at less than the minimum permitted capacity; in this case, subsequent emissions unit operation is limited to 110 percent of the test load until a new test is conducted. Once the emissions unit is so limited, operation at higher capacities is allowed for no more than 15 consecutive days for the purpose of additional compliance testing to regain the authority to operate at the permitted capacity.
[Rules 62-297.310(2) & (2)(b), F.A.C.]

C.12. Calculation of Emission Rate. The indicated emission rate or concentration shall be the arithmetic average of the emission rate or concentration determined by each of the separate test runs unless otherwise specified in a particular test method or applicable rule.
[Rule 62-297.310(3), F.A.C.]

C.13. Applicable Test Procedures.
(a) Required Sampling Time.
1. Unless otherwise specified in the applicable rule, the required sampling time for each test run shall be no less than one hour and no greater than four hours, and the sampling time at each sampling point shall be of equal intervals of at least two minutes.
2. Opacity Compliance Tests. When either EPA Method 9 or DEP Method 9 is specified as the applicable opacity test method, the required minimum period of observation for a compliance test shall be sixty (60) minutes for emissions units which emit or have the potential to emit 100 tons per year or more of particulate matter, and thirty (30) minutes for emissions units which have potential emissions less than 100 tons per year of particulate matter and are not subject to a multiple-valued opacity standard. The opacity test observation period shall include the period during which the highest opacity emissions can reasonably be expected to occur. Exceptions to these requirements are as follows:
a. For batch, cyclical processes, or other operations which are normally completed within less than the minimum observation period and do not recur within that time, the period of observation shall be equal to the duration of the batch cycle or operation completion time.
b. The observation period for special opacity tests that are conducted to provide data to establish a surrogate standard pursuant to Rule 62-297.310(5)(k), F.A.C., Waiver of Compliance Test Requirements, shall be established as necessary to properly establish the relationship between a proposed surrogate standard and an existing mass emission limiting standard.
c. The minimum observation period for opacity tests conducted by employees or agents of the Department to verify the day-to-day continuing compliance of a unit or activity with an applicable opacity standard shall be twelve minutes.
(b) Minimum Sample Volume. Unless otherwise specified in the applicable rule, the minimum sample volume per run shall be 25 dry standard cubic feet.

(c) Required Flow Rate Range. For EPA Method 5 particulate sampling, acid mist/sulfur dioxide, and fluoride sampling which uses Greenburg Smith type impingers, the sampling nozzle and sampling time shall be selected such that the average sampling rate will be between 0.5 and 1.0 actual cubic feet per minute, and the required minimum sampling volume will be obtained.
(d) Calibration of Sampling Equipment. Calibration of the sampling train equipment shall be conducted in accordance with the schedule shown in Table 297.310-1, attached to this permit.
(e) Allowed Modification to EPA Method 5. When EPA Method 5 is required, the following modification is allowed: the heated filter may be separated from the impingers by a flexible tube.
[Rule 62-297.310(4), F.A.C.]

C.14. Required Stack Sampling Facilities. When a mass emissions stack test is required, the permittee shall comply with the requirements contained in Appendix SS-1, Stack Sampling Facilities, attached to this permit.
[Rule 62-297.310(6), F.A.C.]

C.15. Frequency of Compliance Tests. ~~The following provisions apply only to those emissions units that are subject to an emissions limiting standard for which compliance testing is required.~~
(a) General Compliance Testing.
~~3~~1. The owner or operator ~~of an emissions unit that is subject to any emission limiting standard~~ shall conduct a compliance test that demonstrates compliance with the applicable emission limiting standard prior to obtaining a renewed operation permit. ~~Emissions units that are required to conduct an annual compliance test may submit t~~The most recent annual compliance test may be submitted to satisfy the requirements of this provision. In renewing an air operation permit pursuant to Rule 62-210.300(2)(a)3.b., c., or d., F.A.C., the Department shall not require submission of emission compliance test results for any emissions unit that, during the year prior to renewal:
a. Did not operate; ~~or~~
~~b. In the case of a fuel burning emissions unit, burned liquid and/or solid fuel for a total of no more than 400 hours.~~
~~4~~2. ~~During each federal fiscal year (October 1 - September 30), unless otherwise specified by rule, order, or permit, t~~The owner or operator ~~of each emissions unit~~ shall have a formal compliance test conducted for each pollutant specified in condition C.7, with a frequency as specified in condition C.7 ~~for:~~
~~a. Visible emissions, if there is an applicable standard;~~
~~b. Each of the following pollutants, if there is an applicable standard, and if the emissions unit emits or has the potential to emit: 5 tons per year or more of lead or lead compounds measured as elemental lead; 30 tons per year or more of acrylonitrile; or 100 tons per year or more of any other regulated air pollutant; and~~
~~c. Each NESHAP pollutant, if there is an applicable emission standard.~~
~~9~~3. The owner or operator shall notify the Department's Southeast District office and the Dade County's DERM office at least 15 days prior to the date on which each formal compliance test is to begin, of the date, time, and place of each such test, and the test contact person who will be responsible for coordinating and having such test conducted for the owner or operator.
(b) Special Compliance Tests. When the Department's Southeast District office or the Dade County's DERM office, after investigation, has good reason (such as complaints, increased visible emissions or questionable maintenance of control equipment) to believe that any applicable emission standard contained in a Department rule or in a permit issued pursuant to those rules is being violated, it shall require the owner or operator of the emissions unit to conduct compliance tests which identify the nature and quantity of pollutant emissions from the emissions unit and to provide a report on the results of said tests to the Department's Southeast District office and the Dade County's DERM office.

(c) Waiver of Compliance Test Requirements. If the owner or operator of an emissions unit that is subject to a compliance test requirement demonstrates to the Department, pursuant to the procedure established in Rule 62-297.620, F.A.C., that the compliance of the emissions unit with an applicable weight emission limiting standard can be adequately determined by means other than the designated test procedure, such as specifying a surrogate standard of no visible emissions for particulate matter sources equipped with a bag house or specifying a fuel analysis for sulfur dioxide emissions, the Department shall waive the compliance test requirements for such emissions units and order that the alternate means of determining compliance be used, provided, however, the provisions of Rule 62-297.310(7)(b), F.A.C., shall apply.
[Rule 62-297.310(7), F.A.C.; PSD-FL-006(D); and, SIP approved]

Recordkeeping and Reporting

C.16. In the case of excess emissions resulting from malfunctions, each owner or operator shall notify the Department's Southeast District office and then Dade County's DERM office in accordance with Rule 62-4.130, F.A.C. A full written report on the malfunctions shall be submitted in a quarterly report, if requested by the Department or its agent.
[Rule 62-210.700(6), F.A.C.]

C.17. Test Reports.
(a) The owner or operator of an emissions unit for which a compliance test is required shall file a report with the Department's Southeast District office and the Dade County's DERM office on the results of each such test.
(b) The required test report shall be filed with the Department's Southeast District office and the Dade County's DERM office as soon as practical but no later than 45 days after the last sampling run of each test is completed.
(c) The test report shall provide sufficient detail on the emissions unit tested and the test procedures used to allow the Department's Southeast District office and the Dade County's DERM office to determine if the test was properly conducted and the test results properly computed. As a minimum, the test report, other than for an EPA or DEP Method 9 test, shall provide the following information:

1. The type, location, and designation of the emissions unit tested.
2. The facility at which the emissions unit is located.
3. The owner or operator of the emissions unit.
4. The normal type and amount of fuels used and materials processed, and the types and amounts of fuels used and material processed during each test run.
5. The means, raw data and computations used to determine the amount of fuels used and materials processed, if necessary to determine compliance with an applicable emission limiting standard.
6. The type of air pollution control devices installed on the emissions unit, their general condition, their normal operating parameters (pressure drops, total operating current and GPM scrubber water), and their operating parameters during each test run.
7. A sketch of the duct within 8 stack diameters upstream and 2 stack diameters downstream of the sampling ports, including the distance to any upstream and downstream bends or other flow disturbances.
8. The date, starting time and duration of each sampling run.
9. The test procedures used, including any alternative procedures authorized pursuant to Rule 62-297.620, F.A.C. Where optional procedures are authorized in this chapter, indicate which option was used.
10. The number of points sampled and configuration and location of the sampling plane.

11. For each sampling point for each run, the dry gas meter reading, velocity head, pressure drop across the stack, temperatures, average meter temperatures and sample time per point.
12. The type, manufacturer and configuration of the sampling equipment used.
13. Data related to the required calibration of the test equipment.
14. Data on the identification, processing and weights of all filters used.
15. Data on the types and amounts of any chemical solutions used.
16. Data on the amount of pollutant collected from each sampling probe, the filters, and the impingers, are reported separately for the compliance test.
17. The names of individuals who furnished the process variable data, conducted the test, analyzed the samples and prepared the report.
18. All measured and calculated data required to be determined by each applicable test procedure for each run.
19. The detailed calculations for one run that relate the collected data to the calculated emission rate.
20. The applicable emission standard, and the resulting maximum allowable emission rate for the emissions unit, plus the test result in the same form and unit of measure.
21. A certification that, to the knowledge of the owner or his authorized agent, all data submitted are true and correct. When a compliance test is conducted for the Department's Southeast District or its agent, the person who conducts the test shall provide the certification with respect to the test procedures used. The owner or his authorized agent shall certify that all data required and provided to the person conducting the test are true and correct to his knowledge.

[Rules 62-213.440 and 62-297.310(8), F.A.C.]

Subsection D. This section addresses the following emissions unit.

E.U. ID No.	Brief Description
-ttt	Ash Building and Handling System Ash Storage Silo with Baghouse

Fly ash collected by the ~~existing ESPs (future:~~ fabric filters~~)~~ is conveyed to the fly ash silo, fly ash conditioner and to the ash transfer ~~handling~~ building, where it is combined with bottom ash from the boiler. The combined ash is then conveyed to the ash storage building. The ash handling system is ~~completely~~ enclosed to decrease the potential for fugitive emissions. The bottom ash is quenched and wetted before being ~~temporarily stored in~~ conveyed to the ash transfer building ~~handling facility and loaded onto a truck~~. The fly ash is wetted in the fly ash conditioner prior to being conveyed to the ash transfer building. ~~A baghouse is located on the ash handling building as an added precaution for fugitive emissions. The baghouse keeps the building under negative pressure.~~

{Permitting note(s). This emissions unit is regulated under NSPS - 40 CFR 60, Subpart Cb, Emissions Guidelines and Compliance Times for Large Municipal Waste Combustors That Are Constructed on or Before September 20, 1994, adopted and incorporated by reference, subject to provisions, in Rule 62-204.800(8)(b), F.A.C.; and, Rule 62-212.400(5), F.A.C., Prevention of Significant Deterioration [PSD; PSD-FL-006, -006(A), (B) & (D)]. Note: This project is subject to the requirements of 40 CFR 60, Subpart Cb. This permit may refer to the requirements of 40 CFR 60, Subpart Eb, where these requirements are referenced by 40 CFR 60, Subpart Cb. The fugitive particulate matter control requirements for the ash handling activities are specified in 40 CFR 60.55b.}

The following specific Conditions apply to the emissions unit(s) listed above:

General

D.1. Definitions. For the purposes of Rule 62-204.800(8), F.A.C., the definitions contained in the various provisions of 40 CFR Part 60, adopted herein shall apply except that the term "Administrator" when used in 40 CFR Part 60, shall mean the Secretary or the Secretary's designee.
[Rule 62-204.800(8)(a)2., F.A.C.; and, 40 CFR 60.2]

Essential Potential to Emit (PTE) Parameters

D.2. Hours of Operation. This emissions unit is allowed to operate continuously, i.e., 8,760 hours/year.
[Rule 62-210.200(PTE), F.A.C.; and, PSD-FL-006(D)]

Emission Limitations and Standards

D.3. PM and VE: Ash Silo ~~and Ash Conditioning Agent Silo Baghouses~~.
(a) PM emissions from the ~~any~~ ash silo ~~or ash conditioning agent silo~~ baghouse shall not exceed 0.01 gr/dscf; or,
(b) Visible emissions shall not exceed 5 percent opacity, since each emissions unit's potential particulate matter emissions are less than 100 TPY and is equipped with a baghouse control system. As long as the visible emissions do not exceed 5 percent opacity, compliance is assumed for the particulate matter limitations established in paragraph (a) above.

If the Department's Southeast District office or the Dade County's DERM office has reason to believe that the particulate matter weight emissions standard in paragraph (a) above is not being met, it shall require that compliance be demonstrated by the test method specified in specific condition **D.11.**

(c) Compliance testing of the ash silos (baghouse) shall be conducted within 90 days of completion of construction and initial operation; and, annually thereafter.
[PSD-FL-006(A) & (D); and, Rule 62-297.620(4), F.A.C.]

D.4. Fugitive Ash Emissions. (a) On and after the date on which the initial performance test is completed or is required to be completed under 40 CFR 60.8 of Subpart A (see specific condition **D.10.**), no owner or operator of an affected facility shall cause to be discharged to the atmosphere visible emissions of combustion ash from an ash conveying system (including conveyor transfer points) in excess of 5 percent of the observation period (i.e., 9 minutes per 3-hour period), as determined by EPA Reference Method 22 observations as specified in 40 CFR 60.58b(k), except as provided in paragraphs (b) and (c). See specific condition **D.7.**
(b) The emission limit specified in paragraph (a) does not cover visible emissions discharged inside buildings or enclosures of ash conveying systems; however, the emission limit specified in paragraph (a) does cover visible emissions discharged to the atmosphere from buildings or enclosures of ash conveying systems.
(c) The provisions of paragraph (a) do not apply during maintenance and repair of ash conveying systems.
[40 CFR 60.36b and 40 CFR 60.55b; and, PSD-FL-006(D)]

D.5. The potential for dust generation by ash handling activities will be mitigated by quenching the ash prior to loading in ash transport trucks. The ash handling facilities shall be enclosed. ~~Unprocessed refuse storage areas which must be open for operational purposes (e.g., tipping floor of the refuse bunker while trucks are entering and leaving) will be under negative air pressure.~~ Residue from the grates, grate siftings, and ash from the combustor/boiler and fabric filter hoppers during normal operations shall be discharged into the ash ~~quenching~~ handling and silo system, or otherwise handled in a manner to minimize visible dust. The ash/residue in the ash handling building shall remain sufficiently moist to prevent dust during storage and handling operations.
[PSD-FL-006(A) & (D); and, Rule 62-4.070(3), F.A.C.]

Excess Emissions

{Permitting note: The Excess Emissions Rule at Rule 62-210.700, F.A.C., cannot vary any requirement of a NSPS, NESHAP, or Acid Rain program provision.}

D.6. At all times, including periods of startup, shutdown, and malfunction, owners and operators shall, to the extent practicable, maintain and operate any affected facility including associated air pollution control equipment in a manner consistent with good air pollution control practice for minimizing emissions. Determination of whether acceptable operating and maintenance procedures are being used will be based on information available to the Administrator which may include, but is not limited to, monitoring results, opacity observations, review of operating and maintenance procedures, and inspection of the source.
[40 CFR 60.11(d)]

D.7. Excess emissions from these emissions units resulting from startup, shutdown or malfunction shall be permitted provided that best operational practices to minimize emissions are adhered to and the duration of excess emissions shall be minimized but in no case exceed two hours in any 24 hour period unless specifically authorized by the Department for longer duration.
[Rule 62-210.700(1), F.A.C.]

D.8. Excess emissions which are caused entirely or in part by poor maintenance, poor operation, or any other equipment or process failure which may reasonably be prevented during startup, shutdown or malfunction shall be prohibited.
[Rule 62-210.700(4), F.A.C.]

Test Methods and Procedures

D.9. The procedures specified in paragraphs (1) through (4) shall be used for determining compliance with the fugitive ash emission limit under 40 CFR 60.55b. (See specific conditions ~~D.3. and~~ **D.4.**)
(1) The EPA Reference Method 22 shall be used for determining compliance with the fugitive ash emission limit under 40 CFR 60.55b. The minimum observation time shall be a series of three 1-hour observations. The observation period shall include times when the facility is transferring ash from the municipal waste combustor unit to the area where ash is stored or loaded into containers or trucks.
(2) The average duration of visible emissions per hour shall be calculated from the three 1-hour observations. The average shall be used to determine compliance with 40 CFR 60.55b.
(3) The owner or operator of an affected facility shall conduct an initial performance test for fugitive ash emissions as required under 40 CFR 60.8.
(4) Following the date that the initial performance test for fugitive ash emissions is completed or is required to be completed under 40 CFR 60.8 for an affected facility, the owner or operator shall conduct a performance test for fugitive ash emissions on an annual basis (no more than 12 calendar months following the previous performance test).
[40 CFR 60.38b and 40 CFR 60.58b(k)]

D.10. Performance tests shall be conducted under such conditions as the Administrator shall specify to the plant operator based on representative performance of the affected facility. The owner or operator shall make available to the Administrator such records as may be necessary to determine the conditions of the performance tests. Operations during periods of startup, shutdown, and malfunction shall not constitute representative conditions for the purpose of a performance test nor shall emissions in excess of the level of the applicable emission limit during periods of startup, shutdown, and malfunction be considered a violation of the applicable emission limit unless otherwise specified in the applicable standard.
[40 CFR 60.8(c)]

D.11. Particulate Matter. The test methods for particulate emissions shall be EPA Method 5 incorporated by reference in Chapter 62-297, F.A.C., and 40 CFR 60, Appendix A.
[Rules 62-213.440 and 62-297.401, F.A.C.]

D.12. Visible Emissions. EPA Method 9 shall be used to determine opacity compliance pursuant to Chapter 62-297, F.A.C., and 40 CFR 60, Appendix A.
[Rule 62-297.401, F.A.C.]

D.13. Operating Rate During Testing. Testing of emissions shall be conducted with the emissions unit operation at permitted capacity, which is defined as 90 to 100 percent of the maximum operation rate allowed by the permit. If it is impracticable to test at permitted capacity, an emissions unit may be tested at less than the minimum permitted capacity; in this case, subsequent emissions unit operation is limited to 110 percent of the test load until a new test is conducted. Once the emissions unit is so limited, operation at higher capacities is allowed for no more than 15 consecutive days for the purpose of additional compliance testing to regain the authority to operate at the permitted capacity.
[Rules 62-297.310(2) & (2)(b), F.A.C.]

D.14. Applicable Test Procedures.

(a) Required Sampling Time.

1. Unless otherwise specified in the applicable rule, the required sampling time for each test run shall be no less than one hour and no greater than four hours, and the sampling time at each sampling point shall be of equal intervals of at least two minutes.

2. Opacity Compliance Tests. When either EPA Method 9 or DEP Method 9 is specified as the applicable opacity test method, the required minimum period of observation for a compliance test shall be sixty (60) minutes for emissions units which emit or have the potential to emit 100 tons per year or more of particulate matter, and thirty (30) minutes for emissions units which have potential emissions less than 100 tons per year of particulate matter and are not subject to a multiple-valued opacity standard. The opacity test observation period shall include the period during which the highest opacity emissions can reasonably be expected to occur. Exceptions to these requirements are as follows:

a. For batch, cyclical processes, or other operations which are normally completed within less than the minimum observation period and do not recur within that time, the period of observation shall be equal to the duration of the batch cycle or operation completion time.

b. The observation period for special opacity tests that are conducted to provide data to establish a surrogate standard pursuant to Rule 62-297.310(5)(k), F.A.C., Waiver of Compliance Test Requirements, shall be established as necessary to properly establish the relationship between a proposed surrogate standard and an existing mass emission limiting standard.

c. The minimum observation period for opacity tests conducted by employees or agents of the Department to verify the day-to-day continuing compliance of a unit or activity with an applicable opacity standard shall be twelve minutes.

[Rule 62-297.310(4), F.A.C.]

D.15. Frequency of Compliance Tests. ~~The following provisions apply only to those emissions units that are subject to an emissions limiting standard for which compliance testing is required.~~

(a) General Compliance Testing.

~~2. For excess emission limitations for particulate matter specified in Rule 62-210.700, F.A.C., a compliance test shall be conducted annually while the emissions unit is operating under soot blowing conditions in each federal fiscal year during which soot blowing is part of normal emissions unit operation, except that such test shall not be required in any federal fiscal year in which a fossil fuel steam generator does not burn liquid and/or solid fuel for more than 400 hours other than during startup.~~

~~3~~1. The owner or operator ~~of an emissions unit that is subject to any emission limiting standard~~ shall conduct a compliance test that demonstrates compliance with the applicable emission limiting standard prior to obtaining a renewed operation permit. ~~Emissions units that are required to conduct an annual compliance test may submit t~~The most recent annual compliance test may be submitted to satisfy the requirements of this provision. In renewing an air operation permit pursuant to Rule 62-210.300(2)(a)3.b., c., or d., F.A.C., the Department shall not require submission of emission compliance test results for any emissions unit that, during the year prior to renewal:

a Did not operate.~~; or~~

42. ~~During each federal fiscal year (October 1 - September 30), unless otherwise specified by rule, order, or permit,~~ ~~t~~The owner or operator of each emissions unit shall have a formal compliance test conducted for the pollutants specified in conditions D.3 and D.4, at the frequency specified in conditions D.3. and D.4. ~~for:~~

~~a. Visible emissions, if there is an applicable standard;~~

~~b. Each of the following pollutants, if there is an applicable standard, and if the emissions unit emits or has the potential to emit: 5 tons per year or more of lead or lead compounds measured as elemental lead; 30 tons per year or more of acrylonitrile; or 100 tons per year or more of any other regulated air pollutant; and~~

~~c. Each NESHAP pollutant, if there is an applicable emission standard.~~

~~9~~3. The owner or operator shall notify the Department's Southeast District office and the Dade County's DERM office at least 15 days prior to the date on which each formal compliance test is to begin, of the date, time, and place of each such test, and the test contact person who will be responsible for coordinating and having such test conducted for the owner or operator.

(b) Special Compliance Tests. When the Department's Southeast District office or the Dade County's DERM office, after investigation, has good reason (such as complaints, increased visible emissions or questionable maintenance of control equipment) to believe that any applicable emission standard contained in a Department rule or in a permit issued pursuant to those rules is being violated, it may require the owner or operator of the emissions unit to conduct compliance tests which identify the nature and quantity of pollutant emissions from the emissions unit and to provide a report on the results of said tests to the Department's Southeast District office and the Dade County's DERM office.

(c) Waiver of Compliance Test Requirements. If the owner or operator of an emissions unit that is subject to a compliance test requirement demonstrates to the Department, pursuant to the procedure established in Rule 62-297.620, F.A.C., that the compliance of the emissions unit with an applicable weight emission limiting standard can be adequately determined by means other than the designated test procedure, such as specifying a surrogate standard of no visible emissions for particulate matter sources equipped with a bag house or specifying a fuel analysis for sulfur dioxide emissions, the Department shall waive the compliance test requirements for such emissions units and order that the alternate means of determining compliance be used, provided, however, the provisions of Rule 62-297.310(7)(b), F.A.C., shall apply.

[Rule 62-297.310(7), F.A.C.; PSD-FL-006(D); and, SIP approved]

D.16. Compliance with standards in 40 CFR 60, other than opacity standards, shall be determined only by performance tests established by 40 CFR 60.8, unless otherwise specified in the applicable standard. [40 CFR 60.11(a)]

Monitoring of Operations

D.17. Determination of Process Variables.

(a) Required Equipment. The owner or operator of an emissions unit for which compliance tests are required shall install, operate, and maintain equipment or instruments necessary to determine process variables, such as process weight input or heat input, when such data are needed in conjunction with emissions data to determine the compliance of the emissions unit with applicable emission limiting standards.

(b) Accuracy of Equipment. Equipment or instruments used to directly or indirectly determine process variables, including devices such as belt scales, weight hoppers, flow meters, and tank scales, shall be calibrated and adjusted to indicate the true value of the parameter being measured with sufficient accuracy to allow the applicable process variable to be determined within 10% of its true value.

[Rule 62-297.310(5), F.A.C.]

Recordkeeping and Reporting Requirements

D.18. In the case of excess emissions resulting from malfunctions, each owner or operator shall notify the Department's Southeast District office in accordance with Rule 62-4.130, F.A.C. A full written report on the malfunctions shall be submitted in a quarterly report, if requested by the Department or its agent. [Rule 62-210.700(6), F.A.C.]

D.19. The owner or operator subject to the provisions of 40 CFR 60 shall furnish the Administrator written notification as follows:
(4) A notification of any physical or operational change to an existing facility which may increase the emission rate of any air pollutant to which a standard applies, unless that change is specifically exempted under an applicable subpart or in 40 CFR 60.14(e). This notice shall be postmarked 60 days or as soon as practicable before the change is commenced and shall include information describing the precise nature of the change, present and proposed emission control systems, productive capacity of the facility before and after the change, and the expected completion date of the change. The Administrator may request additional relevant information subsequent to this notice.
[40 CFR 60.7(a)(4)]

D.20. The owner or operator subject to the provisions of 40 CFR 60 shall maintain records of the occurrence and duration of any startup, shutdown, or malfunction in the operation of an affected facility; any malfunction of the air pollution control equipment; or, any periods during which a continuous monitoring system or monitoring device is inoperative.
[40 CFR 60.7(b)]

D.21. (1) Notwithstanding the frequency of reporting requirements specified in 40 CFR 60.7(c), an owner or operator who is required by an applicable subpart to submit excess emissions and monitoring systems performance reports (and summary reports) on a quarterly (or more frequent) basis may reduce the frequency of reporting for that standard to semiannual if the following conditions are met: (i) For 1 full year (e.g., 4 quarterly or 12 monthly reporting periods) the affected facility's excess emissions and monitoring systems reports submitted to comply with a standard under this part continually demonstrate that the facility is in compliance with the applicable standard;

(i) The owner or operator continues to comply with all recordkeeping and monitoring requirements specified in 40 CFR 60, Subpart A, and the applicable standard; and

(ii) The Administrator does not object to a reduced frequency of reporting for the affected facility, as provided in 40 CFR 60.7(e)(2).

(2) The frequency of reporting of excess emissions and monitoring systems performance (and summary) reports may be reduced only after the owner or operator notifies the Administrator in writing of his or her intention to make such a change and the Administrator does not object to the intended change. In deciding whether to approve a reduced frequency of reporting, the Administrator may review information concerning the source's entire previous performance history during the required recordkeeping period prior to the intended change, including performance test results, monitoring data, and evaluations of an owner or operator's conformance with operation and maintenance requirements. Such information may be used by the Administrator to make a judgment about the source's potential for noncompliance in the future. If the Administrator disapproves the owner or operator's request to reduce the frequency of reporting, the Administrator will notify the owner or operator in writing within 45 days after receiving notice of the owner or operator's intention. The notification from the Administrator to the owner or operator will specify the grounds on which the disapproval is based. In the absence of a notice of disapproval within 45 days, approval is automatically granted.

(3) As soon as monitoring data indicate that the affected facility is not in compliance with any emission limitation or operating parameter specified in the applicable standard, the frequency of reporting shall revert to the frequency specified in the applicable standard, and the owner or operator shall submit an excess emissions and monitoring systems performance report (and summary report, if required) at the next appropriate reporting period following the noncomplying event. After demonstrating compliance with the applicable standard for another full year, the owner or operator may again request approval from the Administrator to reduce the frequency of reporting for that standard as provided for in 40 CFR 60.7(e)(1) and (e)(2).
[40 CFR 60.7(e)(1)]

{See attached Figure 1: Summary Report-Gaseous and Opacity Excess Emission and Monitoring System Performance}

D.22. Any owner or operator subject to the provisions of 40 CFR 60 shall maintain a file of all measurements, including continuous monitoring system, monitoring device, and performance testing measurements; all continuous monitoring system performance evaluations; all continuous monitoring system or monitoring device calibration checks; adjustments and maintenance performed on these systems or devices; and, all other information required by 40 CFR 60 recorded in a permanent form suitable for inspection. The file shall be retained for at least **5 (five)** years following the date of such measurements, maintenance, reports, and records.
[40 CFR 60.7(f); and, Rule 62-213.440(1)(b)2.b., F.A.C.]

D.23. Test Reports.
(a) The owner or operator of an emissions unit for which a compliance test is required shall file a report with the Department's Southeast District office and the Dade County's DERM office on the results of each such test.
(b) The required test report shall be filed with the Department's Southeast District office and the Dade County's DERM office as soon as practical but no later than 45 days after the last sampling run of each test is completed.
(c) The test report shall provide sufficient detail on the emissions unit tested and the test procedures used to allow the Department's Southeast District office and the Dade County's DERM office to determine if the test was properly conducted and the test results properly computed. As a minimum, the test report, other than for an EPA or DEP Method 9 test, shall provide the following information:

1. The type, location, and designation of the emissions unit tested.
2. The facility at which the emissions unit is located.
3. The owner or operator of the emissions unit.
4. The normal type and amount of fuels used and materials processed, and the types and amounts of fuels used and material processed during each test run.
5. The means, raw data and computations used to determine the amount of fuels used and materials processed, if necessary to determine compliance with an applicable emission limiting standard.
6. The type of air pollution control devices installed on the emissions unit, their general condition, their normal operating parameters (pressure drops, total operating current and GPM scrubber water), and their operating parameters during each test run.
7. A sketch of the duct within 8 stack diameters upstream and 2 stack diameters downstream of the sampling ports, including the distance to any upstream and downstream bends or other flow disturbances.
8. The date, starting time and duration of each sampling run.

9. The test procedures used, including any alternative procedures authorized pursuant to Rule 62-297.620, F.A.C. Where optional procedures are authorized in this chapter, indicate which option was used.
10. The number of points sampled and configuration and location of the sampling plane.
11. For each sampling point for each run, the dry gas meter reading, velocity head, pressure drop across the stack, temperatures, average meter temperatures and sample time per point.
12. The type, manufacturer and configuration of the sampling equipment used.
13. Data related to the required calibration of the test equipment.
14. Data on the identification, processing and weights of all filters used.
15. Data on the types and amounts of any chemical solutions used.
16. Data on the amount of pollutant collected from each sampling probe, the filters, and the impingers, are reported separately for the compliance test.
17. The names of individuals who furnished the process variable data, conducted the test, analyzed the samples and prepared the report.
18. All measured and calculated data required to be determined by each applicable test procedure for each run.
19. The detailed calculations for one run that relate the collected data to the calculated emission rate.
20. The applicable emission standard, and the resulting maximum allowable emission rate for the emissions unit, plus the test result in the same form and unit of measure.
21. A certification that, to the knowledge of the owner or his authorized agent, all data submitted are true and correct. When a compliance test is conducted for the Department's Southeast District or its agent, the person who conducts the test shall provide the certification with respect to the test procedures used. The owner or his authorized agent shall certify that all data required and provided to the person conducting the test are true and correct to his knowledge.

[Rules 62-213.440 and 62-297.310(8), F.A.C.]

Miscellaneous Requirements

D.24. Definitions. For the purposes of Rules 62-204.800(7), (8), and (9), F.A.C., the definitions contained in the various provisions of 40 CFR Parts 60 and 61, adopted herein shall apply except that the term "Administrator" when used in 40 CFR Parts 60 and 61, shall mean the Secretary or the Secretary's designee except as noted in 40 CFR 61.157.
[40 CFR 60.2; and, Rules 62-204.800(7)(a), (8)(a)2., and, (9)(a), F.A.C.]

D.25. Circumvention. No owner or operator subject to the provisions of 40 CFR 60 shall build, erect, install, or use any article, machine, equipment or process, the use of which conceals an emission which would otherwise constitute a violation of an applicable standard. Such concealment includes, but is not limited to, the use of gaseous diluents to achieve compliance with an opacity standard or with a standard which is based on the concentration of a pollutant in the gases discharged to the atmosphere.
[40 CFR 60.12]

D.26. General Applicability and Definitions. The Standards of Performance for New Stationary Sources adopted by reference in Rule 62-204.800(7), F.A.C., the Emission Guidelines for Existing Sources adopted by reference in Rule 62-204.800(8), F.A.C., and the National Emissions Standards for Hazardous Air Pollutants adopted by reference in Rule 62-204.800(9), F.A.C., shall be controlling over other standards in the air pollution rules of the Department except that any emissions limiting standard contained in or determined pursuant to the air pollution rules of the Department which is more stringent than one contained in a Standard of Performance, an Emission Guideline, or a National Emission Standard, or which regulates emissions of pollutants or emissions units not regulated by an applicable Standard of Performance, Emission Guideline, or National Emission Standard, shall apply.
[Rules 62-204.800(7)(c), (8)(a)1., and (9)(c), F.A.C.]

Subsection E. This section addresses the following emissions unit(s).

E.U. ID No.	Brief Description
-uuu	Lime Storage Silos each with a Baghouse

Lime used in the spray dryer absorbers for ~~each~~ the municipal waste combustors is stored in ~~a~~ two silos. Emissions from ~~the~~ each silo are controlled by a baghouse.

{Permitting note(s): Emissions unit **-uuu** is a minor emissions unit regulated under Rule 62-210.300, F.A.C., Permits Required; and, Rule 62-212.400, F.A.C., Prevention of Significant Deterioration [PSD; and, PSD-FL-006(A), (B) & (D)]}

The following specific conditions apply to the emissions unit listed above:

Essential Potential to Emit (PTE) Parameters

E.1. Hours of Operation. This emissions unit is allowed to operate continuously, i.e., 8,760 hours/year. [Rule 62-210.200(PTE), F.A.C.; and, PSD-FL-006(D)]

Emission Limitations and Standards

E.2. Visible Emissions. Visible emissions shall not exceed five (5) percent opacity. [PSD-FL-006(A), (B) & (D)]

Excess Emissions

E.3. Excess emissions from these emissions units resulting from startup, shutdown or malfunction shall be permitted provided that best operational practices to minimize emissions are adhered to and the duration of excess emissions shall be minimized but in no case exceed two hours in any 24 hour period unless specifically authorized by the Department for longer duration.
[Rule 62-210.700(1), F.A.C.]

E.4. Excess emissions which are caused entirely or in part by poor maintenance, poor operation, or any other equipment or process failure which may reasonably be prevented during startup, shutdown or malfunction shall be prohibited.
[Rule 62-210.700(4), F.A.C.]

Test Methods and Procedures

E.5. Visible Emissions.
a. EPA Method 9 shall be used to determine opacity compliance pursuant to Rule 62-297.401, F.A.C., and 40 CFR 60, Appendix A. The emissions unit is to be operating (i.e., receiving or discharging) during any compliance test.
b. Compliance testing of the lime silo loading operation shall be conducted within 90 days of completion of construction and initial operation; and, annually thereafter.
[Rules 62-4.070(3), 62-213.440, and 62-297.401, F.A.C.; and, PSD-FL-006(D)]

E.6. Operating Rate During Testing. Testing of emissions shall be conducted with the emissions unit operation at permitted capacity, which is defined as 90 to 100 percent of the maximum operation rate allowed by the permit. If it is impracticable to test at permitted capacity, an emissions unit may be tested at less than the minimum permitted capacity; in this case, subsequent emissions unit operation is limited to 110 percent of the test load until a new test is conducted. Once the emissions unit is so limited, operation at higher capacities is allowed for no more than 15 consecutive days for the purpose of additional compliance testing to regain the authority to operate at the permitted capacity.
[Rules 62-297.310(2) & (2)(b), F.A.C.]

E.7. Applicable Test Procedures.

(a) Required Sampling Time.

1. Unless otherwise specified in the applicable rule, the required sampling time for each test run shall be no less than one hour and no greater than four hours, and the sampling time at each sampling point shall be of equal intervals of at least two minutes.

2. Opacity Compliance Tests. When either EPA Method 9 or DEP Method 9 is specified as the applicable opacity test method, the required minimum period of observation for a compliance test shall be sixty (60) minutes for emissions units which emit or have the potential to emit 100 tons per year or more of particulate matter, and thirty (30) minutes for emissions units which have potential emissions less than 100 tons per year of particulate matter and are not subject to a multiple-valued opacity standard. The opacity test observation period shall include the period during which the highest opacity emissions can reasonably be expected to occur. Exceptions to these requirements are as follows:

a. For batch, cyclical processes, or other operations which are normally completed within less than the minimum observation period and do not recur within that time, the period of observation shall be equal to the duration of the batch cycle or operation completion time.

b. The observation period for special opacity tests that are conducted to provide data to establish a surrogate standard pursuant to Rule 62-297.310(5)(k), F.A.C., Waiver of Compliance Test Requirements, shall be established as necessary to properly establish the relationship between a proposed surrogate standard and an existing mass emission limiting standard.

c. The minimum observation period for opacity tests conducted by employees or agents of the Department to verify the day-to-day continuing compliance of a unit or activity with an applicable opacity standard shall be twelve minutes.

[Rule 62-297.310(4), F.A.C.]

E.8. Frequency of Compliance Tests. ~~The following provisions apply only to those emissions units that are subject to an emissions limiting standard for which compliance testing is required.~~

(a) General Compliance Testing.

~~3~~1. The owner or operator ~~of an emissions unit that is subject to any emission limiting standard~~ shall conduct a compliance test that demonstrates compliance with the applicable emission limiting standard prior to obtaining a renewed operation permit. ~~Emissions units that are required to conduct an annual compliance test may submit t~~The most recent annual compliance test may be submitted to satisfy the requirements of this provision. In renewing an air operation permit pursuant to Rule 62-210.300(2)(a)3.b., c., or d., F.A.C., the Department shall not require submission of emission compliance test results for any emissions unit that, during the year prior to renewal:

a Did not operate; ~~or~~

~~4~~2. ~~During each federal fiscal year (October 1 - September 30), unless otherwise specified by rule, order, or permit, t~~The owner or operator ~~of each emissions unit~~ shall have a formal compliance test conducted for the pollutants specified in condition E.5. at the frequency specified in condition E.5.~~:~~

~~a. Visible emissions, if there is an applicable standard;~~

~~b. Each of the following pollutants, if there is an applicable standard, and if the emissions unit emits or has the potential to emit: 5 tons per year or more of lead or lead compounds measured as elemental lead; 30 tons per year or more of acrylonitrile; or 100 tons per year or more of any other regulated air pollutant; and~~

~~c. Each NESHAP pollutant, if there is an applicable emission standard.~~

~~9~~3. The owner or operator shall notify the Department's Southeast District office and the Dade County's DERM office at least 15 days prior to the date on which each formal compliance test is to begin, of the date, time, and place of each such test, and the test contact person who will be responsible for coordinating and having such test conducted for the owner or operator.

(b) Special Compliance Tests. When the Department's Southeast District office or the Dade County's DERM office, after investigation, has good reason (such as complaints, increased visible emissions or questionable maintenance of control equipment) to believe that any applicable emission standard contained in a Department rule or in a permit issued pursuant to those rules is being violated, it may require the owner or operator of the emissions unit to conduct compliance tests which identify the nature and quantity of pollutant emissions from the emissions unit and to provide a report on the results of said tests to the Department's Southeast District office and the Dade County's DERM office.

(c) Waiver of Compliance Test Requirements. If the owner or operator of an emissions unit that is subject to a compliance test requirement demonstrates to the Department, pursuant to the procedure established in Rule 62-297.620, F.A.C., that the compliance of the emissions unit with an applicable weight emission limiting standard can be adequately determined by means other than the designated test procedure, such as specifying a surrogate standard of no visible emissions for particulate matter sources equipped with a bag house or specifying a fuel analysis for sulfur dioxide emissions, the Department shall waive the compliance test requirements for such emissions units and order that the alternate means of determining compliance be used, provided, however, the provisions of Rule 62-297.310(7)(b), F.A.C., shall apply.

[Rule 62-297.310(7), F.A.C.; PSD-FL-006(D); and, SIP approved]

Monitoring of Operations

E.9. Determination of Process Variables.

(a) Required Equipment. The owner or operator of an emissions unit for which compliance tests are required shall install, operate, and maintain equipment or instruments necessary to determine process variables, such as process weight input or heat input, when such data are needed in conjunction with emissions data to determine the compliance of the emissions unit with applicable emission limiting standards.

(b) Accuracy of Equipment. Equipment or instruments used to directly or indirectly determine process variables, including devices such as belt scales, weight hoppers, flow meters, and tank scales, shall be calibrated and adjusted to indicate the true value of the parameter being measured with sufficient accuracy to allow the applicable process variable to be determined within 10% of its true value.

[Rule 62-297.310(5), F.A.C.]

Recordkeeping and Reporting Requirements

E.10. In the case of excess emissions resulting from malfunctions, each owner or operator shall notify the Department's Southeast District office in accordance with Rule 62-4.130, F.A.C. A full written report on the malfunctions shall be submitted in a quarterly report, if requested by the Department or its agent. [Rule 62-210.700(6), F.A.C.]

E.11. Any measurements, maintenance, reports, and records shall be retained for at least **5** (**five**) years following the date of such measurements, maintenance, reports, and records.
[Rule 62-213.440(1)(b)2.b., F.A.C.]

E.12. Test Reports.
(a) The owner or operator of an emissions unit for which a compliance test is required shall file a report with the Department's Southeast District office and the Dade County's DERM office on the results of each such test.
(b) The required test report shall be filed with the Department's Southeast District office and the Dade County's DERM office as soon as practical but no later than 45 days after the last sampling run of each test is completed.
(c) The test report shall provide sufficient detail on the emissions unit tested and the test procedures used to allow the Department's Southeast District office and the Dade County's DERM office to determine if the test was properly conducted and the test results properly computed. As a minimum, the test report, other than for an EPA or DEP Method 9 test, shall provide the following information:

1. The type, location, and designation of the emissions unit tested.
2. The facility at which the emissions unit is located.
3. The owner or operator of the emissions unit.
4. The normal type and amount of fuels used and materials processed, and the types and amounts of fuels used and material processed during each test run.
5. The means, raw data and computations used to determine the amount of fuels used and materials processed, if necessary to determine compliance with an applicable emission limiting standard.
6. The type of air pollution control devices installed on the emissions unit, their general condition, their normal operating parameters (pressure drops, total operating current and GPM scrubber water), and their operating parameters during each test run.
7. A sketch of the duct within 8 stack diameters upstream and 2 stack diameters downstream of the sampling ports, including the distance to any upstream and downstream bends or other flow disturbances.
8. The date, starting time and duration of each sampling run.
9. The test procedures used, including any alternative procedures authorized pursuant to Rule 62-297.620, F.A.C. Where optional procedures are authorized in this chapter, indicate which option was used.
10. The number of points sampled and configuration and location of the sampling plane.
11. For each sampling point for each run, the dry gas meter reading, velocity head, pressure drop across the stack, temperatures, average meter temperatures and sample time per point.
12. The type, manufacturer and configuration of the sampling equipment used.
13. Data related to the required calibration of the test equipment.
14. Data on the identification, processing and weights of all filters used.
15. Data on the types and amounts of any chemical solutions used.
16. Data on the amount of pollutant collected from each sampling probe, the filters, and the impingers, are reported separately for the compliance test.

17. The names of individuals who furnished the process variable data, conducted the test, analyzed the samples and prepared the report.
18. All measured and calculated data required to be determined by each applicable test procedure for each run.
19. The detailed calculations for one run that relate the collected data to the calculated emission rate.
20. The applicable emission standard, and the resulting maximum allowable emission rate for the emissions unit, plus the test result in the same form and unit of measure.
21. A certification that, to the knowledge of the owner or his authorized agent, all data submitted are true and correct. When a compliance test is conducted for the Department's Southeast District or its agent, the person who conducts the test shall provide the certification with respect to the test procedures used. The owner or his authorized agent shall certify that all data required and provided to the person conducting the test are true and correct to his knowledge.

[Rules 62-213.440 and 62-297.310(8), F.A.C.]

Section III. Emissions Unit(s) and Conditions.

Subsection F. This section addresses the following emissions unit(s).

E.U. ID No.	Brief Description
-vvv	Activated Carbon (or Comparable Reactant) Storage Silos

Activated carbon (or comparable reactant) used in the injection system for ~~each~~ the municipal waste combustors is stored in ~~a~~ two silos. The activated carbon (or comparable reactant) will be utilized for the control of mercury and dioxin/furans. Emissions from ~~the~~ each silo are controlled by a baghouse.

{Permitting note(s): Emissions unit **-vvv** is a minor emissions unit regulated under Rule 62-210.300, F.A.C., Permits Required; and, Rule 62-212.400, F.A.C., Prevention of Significant Deterioration [PSD; and, PSD-FL-006(A), (B) & (D)]}

The following specific conditions apply to the emissions unit listed above:

Essential Potential to Emit (PTE) Parameters

F.1. Hours of Operation. This emissions unit is allowed to operate continuously, i.e., 8,760 hours/year. [Rule 62-210.200(PTE), F.A.C.; and, PSD-FL-006(D)]

Emission Limitations and Standards

F.2. Particulate Matter and Visible Emissions.
a. Particulate matter emissions shall not exceed 0.01 grains per dry standard cubic foot, front-half catch; or,
b. Visible emissions shall not exceed 5 percent opacity, since each emissions unit's potential particulate matter emissions are less than 100 TPY and is equipped with a baghouse control system. As long as the visible emissions do not exceed 5 percent opacity, compliance is assumed for the particulate matter limitations established in paragraph (a) above.

If the Department's Southeast District office or the Dade County's DERM office has reason to believe that the particulate matter weight emissions standard in paragraph (a) above is not being met, it shall require that compliance be demonstrated by the test method specified in specific condition **F.6.** [PSD-FL-006(A), (B) & (D); and, Rule 62-297.620(4), F.A.C.]

Excess Emissions

F.3. Excess emissions from these emissions units resulting from startup, shutdown or malfunction shall be permitted provided that best operational practices to minimize emissions are adhered to and the duration of excess emissions shall be minimized but in no case exceed two hours in any 24 hour period unless specifically authorized by the Department for longer duration.
[Rule 62-210.700(1), F.A.C.]

F.4. Excess emissions which are caused entirely or in part by poor maintenance, poor operation, or any other equipment or process failure which may reasonably be prevented during startup, shutdown or malfunction shall be prohibited.
[Rule 62-210.700(4), F.A.C.]

Monitoring of Operations

F.5. Determination of Process Variables.
(a) Required Equipment. The owner or operator of an emissions unit for which compliance tests are required shall install, operate, and maintain equipment or instruments necessary to determine process variables, such as process weight input or heat input, when such data are needed in conjunction with emissions data to determine the compliance of the emissions unit with applicable emission limiting standards.
(b) Accuracy of Equipment. Equipment or instruments used to directly or indirectly determine process variables, including devices such as belt scales, weight hoppers, flow meters, and tank scales, shall be calibrated and adjusted to indicate the true value of the parameter being measured with sufficient accuracy to allow the applicable process variable to be determined within 10% of its true value.
[Rule 62-297.310(5), F.A.C.]

Test Methods and Procedures

F.6. Particulate Matter. The test methods for particulate emissions shall be EPA Method 5 pursuant to Rule 62-297.401, F.A.C., and 40 CFR 60, Appendix A
[Rule 62-297.401, F.A.C.]

F.7. Visible Emissions. EPA Method 9 shall be used to determine opacity compliance pursuant to Rule 62-297.401, F.A.C., and 40 CFR 60, Appendix A. Compliance testing of the carbon silo loading operation shall be conducted within 90 days of completion of construction and initial operation; and, annually thereafter.
[Rule 62-297.401, F.A.C.]

F.8. Required Number of Test Runs. For mass emission limitations, a compliance test shall consist of three complete and separate determinations of the total air pollutant emission rate through the test section of the stack or duct and three complete and separate determinations of any applicable process variables corresponding to the three distinct time periods during which the stack emission rate was measured provided, however, that three complete and separate determinations shall not be required if the process variables are not subject to variation during a compliance test, or if three determinations are not necessary in order to calculate the unit's emission rate. The three required test runs shall be completed within one consecutive five day period. In the event that a sample is lost or one of the three runs must be discontinued because of circumstances beyond the control of the owner or operator, and a valid third run cannot be obtained within the five day period allowed for the test, the Secretary or his or her designee may accept the results of the two complete runs as proof of compliance, provided that the arithmetic mean of the results of the two complete runs is at least 20 percent below the allowable emission limiting standards.
[Rule 62-297.310(1), F.A.C.]

F.9. Operating Rate During Testing. Testing of emissions shall be conducted with the emissions unit operation at permitted capacity, which is defined as 90 to 100 percent of the maximum operation rate allowed by the permit. If it is impracticable to test at permitted capacity, an emissions unit may be tested at less than the minimum permitted capacity; in this case, subsequent emissions unit operation is limited to 110 percent of the test load until a new test is conducted. Once the emissions unit is so limited, operation at higher capacities is allowed for no more than 15 consecutive days for the purpose of additional compliance testing to regain the authority to operate at the permitted capacity.
[Rules 62-297.310(2) & (2)(b), F.A.C.]

F.10. Calculation of Emission Rate. The indicated emission rate or concentration shall be the arithmetic average of the emission rate or concentration determined by each of the separate test runs unless otherwise specified in a particular test method or applicable rule.
[Rule 62-297.310(3), F.A.C.]

F.11. Applicable Test Procedures.
(a) Required Sampling Time.
1. Unless otherwise specified in the applicable rule, the required sampling time for each test run shall be no less than one hour and no greater than four hours, and the sampling time at each sampling point shall be of equal intervals of at least two minutes.
2. Opacity Compliance Tests. When either EPA Method 9 or DEP Method 9 is specified as the applicable opacity test method, the required minimum period of observation for a compliance test shall be sixty (60) minutes for emissions units which emit or have the potential to emit 100 tons per year or more of particulate matter, and thirty (30) minutes for emissions units which have potential emissions less than 100 tons per year of particulate matter and are not subject to a multiple-valued opacity standard. The opacity test observation period shall include the period during which the highest opacity emissions can reasonably be expected to occur. Exceptions to these requirements are as follows:
a. For batch, cyclical processes, or other operations which are normally completed within less than the minimum observation period and do not recur within that time, the period of observation shall be equal to the duration of the batch cycle or operation completion time.
b. The observation period for special opacity tests that are conducted to provide data to establish a surrogate standard pursuant to Rule 62-297.310(5)(k), F.A.C., Waiver of Compliance Test Requirements, shall be established as necessary to properly establish the relationship between a proposed surrogate standard and an existing mass emission limiting standard.
c. The minimum observation period for opacity tests conducted by employees or agents of the Department to verify the day-to-day continuing compliance of a unit or activity with an applicable opacity standard shall be twelve minutes.
[Rule 62-297.310(4), F.A.C.]

F.12. Required Stack Sampling Facilities. When a mass emissions stack test is required, the permittee shall comply with the requirements contained in Appendix SS-1, Stack Sampling Facilities, attached to this permit.
[Rule 62-297.310(6), F.A.C.]

F.13. Frequency of Compliance Tests. ~~The following provisions apply only to those emissions units that are subject to an emissions limiting standard for which compliance testing is required.~~
(a) General Compliance Testing.
~~3~~1. The owner or operator ~~of an emissions unit that is subject to any emission limiting standard~~ shall conduct a compliance test that demonstrates compliance with the applicable emission limiting standard prior to obtaining a renewed operation permit. ~~Emissions units that are required to conduct an annual compliance test may submit t~~The most recent annual compliance test may be submitted to satisfy the requirements of this provision. In renewing an air operation permit pursuant to Rule 62-210.300(2)(a)3.b., c., or d., F.A.C., the Department shall not require submission of emission compliance test results for any emissions unit that, during the year prior to renewal:
a Did not operate.~~; or~~

42. ~~During each federal fiscal year (October 1 - September 30), unless otherwise specified by rule, order, or permit,~~ tThe owner or operator ~~of each emissions unit~~ shall have a formal compliance test conducted as specified in condition F.7, at the frequency specified in condition F.7.~~for:~~

~~a. Visible emissions, if there is an applicable standard;~~

~~b. Each of the following pollutants, if there is an applicable standard, and if the emissions unit emits or has the potential to emit: 5 tons per year or more of lead or lead compounds measured as elemental lead; 30 tons per year or more of acrylonitrile; or 100 tons per year or more of any other regulated air pollutant; and~~

~~c. Each NESHAP pollutant, if there is an applicable emission standard.~~

9. The owner or operator shall notify the Department's Southeast District office and the Dade County's DERM office at least 15 days prior to the date on which each formal compliance test is to begin, of the date, time, and place of each such test, and the test contact person who will be responsible for coordinating and having such test conducted for the owner or operator.

(b) Special Compliance Tests. When the Department's Southeast District office or the Dade County's DERM office, after investigation, has good reason (such as complaints, increased visible emissions or questionable maintenance of control equipment) to believe that any applicable emission standard contained in a Department rule or in a permit issued pursuant to those rules is being violated, it may require the owner or operator of the emissions unit to conduct compliance tests which identify the nature and quantity of pollutant emissions from the emissions unit and to provide a report on the results of said tests to the Department's Southeast District office and the Dade County's DERM office.

(c) Waiver of Compliance Test Requirements. If the owner or operator of an emissions unit that is subject to a compliance test requirement demonstrates to the Department, pursuant to the procedure established in Rule 62-297.620, F.A.C., that the compliance of the emissions unit with an applicable weight emission limiting standard can be adequately determined by means other than the designated test procedure, such as specifying a surrogate standard of no visible emissions for particulate matter sources equipped with a bag house or specifying a fuel analysis for sulfur dioxide emissions, the Department shall waive the compliance test requirements for such emissions units and order that the alternate means of determining compliance be used, provided, however, the provisions of Rule 62-297.310(7)(b), F.A.C., shall apply.

[Rule 62-297.310(7), F.A.C.; PSD-FL-006(D); and, SIP approved]

Monitoring of Operations

F.14. Determination of Process Variables.

(a) Required Equipment. The owner or operator of an emissions unit for which compliance tests are required shall install, operate, and maintain equipment or instruments necessary to determine process variables, such as process weight input or heat input, when such data are needed in conjunction with emissions data to determine the compliance of the emissions unit with applicable emission limiting standards.

(b) Accuracy of Equipment. Equipment or instruments used to directly or indirectly determine process variables, including devices such as belt scales, weight hoppers, flow meters, and tank scales, shall be calibrated and adjusted to indicate the true value of the parameter being measured with sufficient accuracy to allow the applicable process variable to be determined within 10% of its true value.

[Rule 62-297.310(5), F.A.C.]

Recordkeeping and Reporting Requirements

F.15. In the case of excess emissions resulting from malfunctions, each owner or operator shall notify the Department's Southeast District office in accordance with Rule 62-4.130, F.A.C. A full written report on the malfunctions shall be submitted in a quarterly report, if requested by the Department or its agent. [Rule 62-210.700(6), F.A.C.]

F.16. Any measurements, maintenance, reports, and records shall be retained for at least **5 (five)** years following the date of such measurements, maintenance, reports, and records.
[Rule 62-213.440(1)(b)2.b., F.A.C.]

F.17. Test Reports.
(a) The owner or operator of an emissions unit for which a compliance test is required shall file a report with the Department's Southeast District office and the Dade County's DERM office on the results of each such test.
(b) The required test report shall be filed with the Department's Southeast District office and the Dade County's DERM office as soon as practical but no later than 45 days after the last sampling run of each test is completed.
(c) The test report shall provide sufficient detail on the emissions unit tested and the test procedures used to allow the Department's Southeast District office and the Dade County's DERM office to determine if the test was properly conducted and the test results properly computed. As a minimum, the test report, other than for an EPA or DEP Method 9 test, shall provide the following information:

1. The type, location, and designation of the emissions unit tested.
2. The facility at which the emissions unit is located.
3. The owner or operator of the emissions unit.
4. The normal type and amount of fuels used and materials processed, and the types and amounts of fuels used and material processed during each test run.
5. The means, raw data and computations used to determine the amount of fuels used and materials processed, if necessary to determine compliance with an applicable emission limiting standard.
6. The type of air pollution control devices installed on the emissions unit, their general condition, their normal operating parameters (pressure drops, total operating current and GPM scrubber water), and their operating parameters during each test run.
7. A sketch of the duct within 8 stack diameters upstream and 2 stack diameters downstream of the sampling ports, including the distance to any upstream and downstream bends or other flow disturbances.
8. The date, starting time and duration of each sampling run.
9. The test procedures used, including any alternative procedures authorized pursuant to Rule 62-297.620, F.A.C. Where optional procedures are authorized in this chapter, indicate which option was used.
10. The number of points sampled and configuration and location of the sampling plane.
11. For each sampling point for each run, the dry gas meter reading, velocity head, pressure drop across the stack, temperatures, average meter temperatures and sample time per point.
12. The type, manufacturer and configuration of the sampling equipment used.
13. Data related to the required calibration of the test equipment.
14. Data on the identification, processing and weights of all filters used.
15. Data on the types and amounts of any chemical solutions used.
16. Data on the amount of pollutant collected from each sampling probe, the filters, and the impingers, are reported separately for the compliance test.

17. The names of individuals who furnished the process variable data, conducted the test, analyzed the samples and prepared the report.
18. All measured and calculated data required to be determined by each applicable test procedure for each run.
19. The detailed calculations for one run that relate the collected data to the calculated emission rate.
20. The applicable emission standard, and the resulting maximum allowable emission rate for the emissions unit, plus the test result in the same form and unit of measure.
21. A certification that, to the knowledge of the owner or his authorized agent, all data submitted are true and correct. When a compliance test is conducted for the Department's Southeast District or its agent, the person who conducts the test shall provide the certification with respect to the test procedures used. The owner or his authorized agent shall certify that all data required and provided to the person conducting the test are true and correct to his knowledge.

[Rules 62-213.440 and 62-297.310(8), F.A.C.]

Bruce Mitchell

MIAMI DADE
SOLID WASTE MANAGEMENT

RECEIVED
MAY 08 2001
BUREAU OF AIR REGULATION

May 7, 2001

Via Federal Express
Tracking No. **8256 7841 5595**

Mr. Scott M. Sheplak, P. E.
Department of Environmental Protection
Twin Towers Office Building
2600 Blair Stone Road
Tallahassee, FL 32399-2400

Re: Miami-Dade County
Resources Recovery Facility
Title V Air Operating Permit Revision

Dear Mr. Sheplak:

Enclosed is proof of publication for the referenced permit.

Contact me if you have any questions.

Sincerely,

Lee S. Casey
Environmental Compliance

Attachment

CC: V. Castro – DSWM
W. Uchdorf – DSWM
R. Johns – DERM
P. Wong - DERM
J. Lurix – FDEP/WPB
II. A104
II. A120
A. Lue – MPC
H. Green – MPC
D. Dee – Landers & Parsons
D. Buff – Golder & Associates

MIAMI DAILY BUSINESS REVIEW

Published Daily except Saturday, Sunday and Legal Holidays
Miami, Miami-Dade County, Florida.

STATE OF FLORIDA
COUNTY OF MIAMI-DADE:

Before the undersigned authority personally appeared Octelma V. Ferbeyre, who on oath says that she is the Supervisor, Legal Notices of the Miami Daily Business Review f/k/a Miami Review, a daily (except Saturday, Sunday and Legal Holidays) newspaper, published at Miami in Miami-Dade County, Florida; that the attached copy of advertisement, being a Legal Advertisement of Notice in the matter of

PUBLIC NOTICE OF INTENT TO ISSUE TITLE V AIR OPERATION PERMIT REVISION DRAFT TITLE V PERMIT REVISION NO: 0250348-004-AV DADE COUNTY DEPT. OF SOLID WASTE MANAGEMENT

in the .....XXXXX..... Court,

was published in said newspaper in the issues of
May 1, 2001

Affiant further says that the said Miami Daily Business Review is a newspaper published at Miami in said Miami-Dade County, Florida, and that the said newspaper has heretofore been continuously published in said Miami-Dade County, Florida, each day (except Saturday, Sunday and Legal Holidays) and has been entered as second class mail matter at the post office in Miami in said Miami-Dade County, Florida, for a period of one year next preceding the first publication of the attached copy of advertisement; and affiant further says that she has neither paid nor promised any person, firm or corporation any discount, rebate, commission or refund for the purpose of securing this advertisement for publication in the said newspaper.

.....

Sworn to and subscribed before me this

1 day of May, 2001, A.D.

.....

(SEAL)

Octelma V. Ferbeyre personally known to me.

MARIA I. MESA
MY COMMISSION # CC 885640
EXPIRES: March 4, 2004
Bonded Thru Notary Public Underwriters

PUBLIC NOTICE OF INTENT TO ISSUE TITLE V AIR OPERATION PERMIT REVISION
STATE OF FLORIDA
DEPARTMENT OF ENVIRONMENTAL PROTECTION
DRAFT TITLE V PERMIT REVISION NO.: 0250348-004-AV
DADE COUNTY DEPARTMENT OF SOLID WASTE MANAGEMENT
DADE COUNTY RESOURCE RECOVERY FACILITY
DADE COUNTY

The Department of Environmental Protection (permitting authority) gives notice of its intent to issue a Title V Air Operation Permit Revision to the Dade County Department of Solid Waste Management for the Dade County Resource Recovery Facility located at 6990 NW 97th Avenue, Miami, Dade County. The applicant's name and address are: Miami-Dade County Department of Solid Waste Management, 8675 NW 53rd Street, Suite 201, Miami, FL 33166-4598.

The purpose of this revision is to incorporate a recent air construction permitting action regarding the four (4) combustor units (Units 1 thru 4) established under permit 0250348-003-AC/PSD-FL-006(D).

The permitting authority will issue the PROPOSED Title V Permit Revision, and subsequent FINAL Title V Permit revision, in accordance with the conditions of the DRAFT Title V Permit Revision unless a response received in accordance with the following procedures results in a different decision or significant change of terms or conditions.

The permitting authority will accept written comments concerning the proposed DRAFT Title V Permit Revision issuance action for a period of 30 (thirty) days from the date of publication of this Notice. Written comments should be provided to the Department's Bureau of Air Regulation, 2600 Blair Stone Road, Mail Station #5505, Tallahassee, Florida 32399-2400. Any written comments filed shall be made available for public inspection. If written comments received result in a significant change in this DRAFT Title V Permit Revision, the permitting authority shall issue a Revised DRAFT Title V Permit Revision and require, if applicable, another Public Notice.

A person whose substantial interests are affected by the proposed permitting decision may petition for an administrative hearing in accordance with Sections 120.569 and 120.57 of the Florida Statutes (F.S.). The petition must contain the information set forth below and must be filed (received) in Office of General Counsel of the Department of Environmental Protection, 3900 Commonwealth Boulevard, Mail Station #35, Tallahassee, Florida 32399-3000 (Telephone: 850/488-9730; Fax: 850/487-4938). Petitions filed by any persons other than those entitled to written notice under Section 120.60(3), F.S., must be filed within fourteen days of publication of the public notice or within fourteen days of receipt of the notice of intent, whichever occurs first. Under Section 120.60(3), F.S., however, any person who asked the permitting authority for notice of agency action may file a petition within fourteen days of receipt of that notice, regardless of the date of publication. A petitioner shall mail a copy of the petition to the applicant at the address indicated above, at the time of filing. The failure of any person to file a petition within the applicable time period shall constitute a waiver of that person's right to request an administrative determination (hearing) under Sections 120.569 and 120.57, F.S., or to intervene in this proceeding and participate as a party to it. Any subsequent intervention will be only at the approval of the presiding officer upon the filing of a motion in compliance with Rule 28-106.205, Florida Administrative Code (F.A.C.).

A petition that disputes the material facts on which the permitting authority's action is based must contain the following information:

(a) The name and address of each agency affected and each agency's file(s) or identification number(s), if known;

(b) The name, address and telephone number of the petitioner, name address and telephone number of the petitioner's representative, if any, which shall be the address for service purposes during the course of the proceeding; and an explanation of how petitioner's substantial rights will be affected by the agency determination;

(c) A statement of how and when the petitioner received notice of the agency action or proposed action;

(d) A statement of all disputed issues of material fact. If there are none, the petition must so state;

(e) A concise statement of the ultimate facts alleged, as well as the rules and statutes which entitle petitioner to relief; and

(f) A demand for relief.

A petition that does not dispute the material facts upon which the permitting authority's action is based shall state that no such facts are in dispute and otherwise shall contain the same information as set forth above, as required by Rule 28-106.301, F.A.C.

Because the administrative hearing process is designed to formulate final agency action, the filing of a petition means that the permitting authority's final action may be different from the position taken by it in this notice of intent.

Persons whose substantial interests will be affected by any such final decision of the permitting authority on the application have the right to petition to become a party to the proceeding, in accordance with the requirements set forth above.

Mediation is not available for this proceeding.

In addition to the above, pursuant to 42 United States Code (U.S.C.) Section 7661d(b)(2), any person may petition the Administrator of the EPA within 60 (sixty) days of the expiration of the Administrator's 45 (forty-five) day review period as established at 42 U.S.C. Section 7661d(b)(1), to object to issuance of any permit. Any petition shall be based only on objections to the permit that were raised with reasonable specificity during the 30 (thirty) day public comment period provided in this notice, unless the petitioner demonstrates to the Administrator of the EPA that it was impracticable to raise such objections within the comment period or unless the grounds for such objection arose after the comment period. Filing of a petition with the Administrator of the EPA does not stay the effective date of any permit revision properly issued pursuant to the provisions of Chapter 62-213, F.A.C. Petitions filed with the Administrator of EPA must meet the requirements of 42 U.S.C. Section 7661d(b)(2) and must be filed with the Administrator of the EPA at: U.S. EPA, 401 M Street, S.W., Washington, D.C. 20460.

A complete project file is available for public inspection during normal business hours, 8:00 a.m. to 5:00 p.m., Monday through Friday, except legal holidays, at:

Permitting Authority:	**Affected District Authority:**
Department of Environmental Protection	Department of Environmental Protection
Bureau of Air Regulation	Southeast District
111 South Magnolia Drive, Suite 4	400 North Congress Avenue
Tallahassee, Florida 32301	West Palm Beach, Florida 33416-5425
Telephone: 850/488-1344	Telephone: 561/681-6600
Fax: 850/922-6979	Fax: 561/681-6790

The complete project file includes the DRAFT Title V Operation Permit Revision, the application, and the information submitted by the responsible official, exclusive of confidential records under Section 403.111, F.S. Interested persons may contact Scott M. Sheplak, P.E., at the above address, or call 850/921-9532, for additional information.

5/1 01-4-72/158908M

INTEROFFICE MEMORANDUM

Sensitivity: COMPANY CONFIDENTIAL

Date: 04-Dec-1998 10:26am
From: Alvaro Linero TAL
LINERO_A
Dept: Air Resources Management
Tel No: 850/921-9532

To: See Below
Subject: FWD: Montenay-FDEP Agenda

Clair, Mike, Teresa, and Buck. Attached is the agenda from Dade-Montenay for the Monday meeting at 11:00. They have 4 people making this trip so I think they really want to accomplish some things and get some clear direction. Clair, I see you helping to start the meeting so you can make a decision as to which Division Engineer should coordinate Montenay issues. Buck and I can handle it afterwards.

Dotty and Scott. Please look this over and decide who should represent you. Scott, I had given you the heads up before, but I had not alerted Dottie (sorry about that!). There are monitoring issues, Title V issues, MACT issues, etc. That is apart from the PSD and Certification issues.

I foresee the possibility of breaking up into smaller groups and using other conference rooms in the afternoon. While every group needs to participate to some degree, we also don't need to swamp these guys with too many people.

Today I will distribute additional materials they faxed me regarding their compliance schedules, etc.

Thanks. Al Linero.

T-V Rpt #
0250346-001-AV

Distribution:

To:	Michael Hewett TAL	(HEWETT_M)
To:	Teresa Heron TAL	(HERON_T)
To:	Hamilton Buck Oven TAL	(OVEN_H)
To:	Clair Fancy TAL	(FANCY_C)
CC:	Dotty Diltz TAL	(DILTZ_D)
CC:	Larry George TAL	(GEORGE_L)
CC:	Scott Sheplak TAL	(SHEPLAK_S)

Revision.
Vol 1 of 2

INTEROFFICE MEMORANDUM

Date: 04-Dec-1998 02:34am
From: Martin Elsasser
elsasser@montenay.com@PMDF@EPIC66
Dept:
Tel No:

Subject: Montenay-FDEP Agenda

Hello Al,

I am e-mailing the agenda to your attention. If possible, please forward it to the other persons at FDEP as I am not in my office and do not have their addresses.

I am also having faxed to you, additional details for the meeting.

Looking forward to meet with you on Monday.

Anetha Lue
Montenay

{‡±
¾ Ì 8
Dade County Resource Recovery 12/7/98
11:00 a.m.
FDEP, Talahassee

Facilitator: Mr. Al Linero – FDEP

Attendees: FDEP Representatives
Vicente Castro – Dade County, permittee
Emil Johnson – Montenay, operator representative
Ben Gilbert – Montenay, operator representative
Anetha Lue – Montenay, operator representative

Agenda

Status of retrofit construction – update

Changes needed to meet MACT – permit changes and construction

Performance test dates following retrofit

Review MACT deadlines and expected submittals

Compliance deadlines

Process for revising Title V, COC and PSD for these changes

Additional Information

Special notes:

Please contact Anetha Lue at 305-854-2229 if changes to the schedule or agenda are needed

, % ' (4 R [‰ ½
ÊÊ N ýýýýýýý 5

Monterey / Dade County Meeting 3/16/00

David Buff	Golder Associates	352-336-5600
Ben Gilbert	Monterey	305-593-7000
Pat Comer	DEP/OGC	(850) 921-9621
Jim Pennington	DEP/BAR	(850) 921-9515
AL LINERO	DEP/BAR	850/921-9523
Scott Sheplak	DEP/BAR	850/921-9532
Clair Fancy	DEP/BAR	850 921 9503
Tom Tittle	DEP/WPB	
David Dee	Landers + Parsons	850-681-0311
Anetha Lue	Monterey	
JESS McCARTY	DADE COUNTY ATTY'S OFFICE	305-375-5480
Joseph Kahn	DEP - BAR	850-921-9519
Lee Casey	DC DSWM	305-594-1670
Vicente Castro	DCSWM	305 594-1677
Steve Passage	Monterey	212-826-7054
Bruce Mitchell	FDEP	850-921-9506

Memorandum

Florida Department of
Environmental Protection

To: Al Linero, P.E.
New Source Review Section

Bruce FYI

From: Joseph Kahn, P.E.
New Source Review Section

Scott

Date: November 22, 1999

Re: Miami-Dade RRF, PSD Applicability

Per your request, I have reviewed the records available for the Miami-Dade RRF to determine if the reconstruction of the boilers triggered PSD.

Miami-Dade County Department of Solid Waste Management owns the Miami-Dade County Resources Recovery Facility, and Montenay International Corp. operates the facility. The facility combusts refuse derived fuel in four combustor units. The facility has been operational since 1982, and received its original PSD permit authorizing construction in 1978 (PSD-FL-006). The facility is a major source of air pollution as defined by Department rules.

In 1986, the wet process garbage processing operation was shut down and the plant was converted to processing garbage and trash in a dry process. From 1987 to 1990 the boilers were upgraded through a capital improvement construction program. As part of this project, the owner and operator rebuilt the four combustion units and among other changes increased the physical size of the four combustion units, replaced boiler tubes and bull noses affected by corrosion from firing the wet-processed waste, and replaced the sides of the units. The internals of the boilers were changed from B&W components to Zurn components. These changes increased the combustion weight capacity from 19.55 TPH (39,100 lb/hr) to 27 TPH each, an increase of 38%. Although available records suggest that the permitted steam generating capacity was increased (perhaps from 175,000 to 180,000 pounds per hour) we do not have sufficient information to determine the actual extent of such an increase. It is obvious that there would have been an actual increase in steam generating capacity given the deteriorated condition of the units prior to reconstruction and modification. These physical changes extended the useful life of the facility, regained lost generating capacity, and increased the capacity of this plant. Miami-Dade County and Montenay performed these physical changes without obtaining New Source Review ("NSR") permits authorizing the construction and operation of physical modifications of its boiler units as required by Department rules and the Clean Air Act.

In January 1989 EPA sent Miami-Dade County a Section 114(a) request for information regarding construction activities at the Resources Recovery Facility, to which the county responded on March 9, 1989. As part of the response, the county characterized the physical changes to the boilers as maintenance, repair or replacement as defined under 40 CFR 60.14(e)(1). This rule provides for maintenance, repair or replacement activities to be exempted from the definition of modification provided that such activities are determined by the EPA Administrator to be routine. The county's implication is that the reconstruction of the boilers was routine, which it was not as further described below. Miami-Dade County's letter to EPA on June 8, 1989 describes a verbal understanding between the county and EPA that that PSD did not apply to the modifications, but there is no record in Department files that EPA ever responded in writing about this issue.

It seems clear that the physical changes did constitute a modification pursuant to Department rules, and it seems likely these changes would result in a significant increase in emissions using EPA's netting calculus. Department rules require that no construction or operation of a major modification of a major source occur unless authorized by an air construction permit. Florida has a fully delegated PSD program with respect to power plants subject to the Power Plant Siting Act. Florida implements this delegation

BEST AVAILABLE COPY

under 40 CFR 52.21, whose provisions are incorporated by reference into the Florida SIP pursuant to 40 CFR 52.530. For the modifications described above, neither the owner nor operator of the facility obtained a PSD permit, nonattainment NSR permit or a minor source permit. Nor was this project exempt from permitting.

None of the modifications fall within the "routine maintenance, repair and replacement" exemption found at 40 CFR 52.21(b)(2)(iii)(a) and Department Rule 62- 210.200(183)(a)1.a., F.A.C. Each of these changes was an expensive capital expenditure performed infrequently at the plant that constituted the replacement and/or redesign of a boiler component with a long useful life. In each instance, the change was performed to increase capacity, regain lost capacity, and/or extend the life of the unit. In many instances, the original component was replaced with a component that was substantially redesigned in a manner that increased emissions. That the "routine maintenance, repair and replacement" exemption does not apply where construction activity is at issue was known to the utility industry since at least 1988 when EPA issued a widely publicized applicability determination regarding utility modifications at a Wisconsin Electric Power Co. ("WEPCO") facility. EPA's interpretation of this exemption was upheld by the court of appeals in 1990. Wisconsin Electric Power Co. v. Reilly, 893 F.2d 901 (7th Cir. 1990).

None of these modifications fall within the "increase in hours of operation or in the production rate" exemption found at 40 CFR 52.21(b)(2)(iii)(f), or Florida Rule 62-210.200(183)(a)2., F.A.C. This exemption is limited to stand-alone increases in operating hours or production rates, not where such increases follow or are otherwise linked to construction activity. That the hours of operation/rates of production exemption does not apply where construction activity is at issue was known to the utility industry since at least 1988 when EPA issued a widely publicized applicability determination regarding utility modifications at a Wisconsin Electric Power Co. ("WEPCO") facility. EPA's interpretation of this exemption was upheld twice by the court of appeals, in 1989 and in 1990. Puerto Rican Cement Co. v. EPA, 889 F.2D 292 (1st Cir. 1989); Wisconsin Electric Power Co. v. Reilly, 893 F.2d 901 (7th Cir. 1990).

It seems clear that the reconstruction of the boilers constituted a modification. The reconstruction was a physical change that would have resulted in increases in emissions exceeding the PSD significance criteria. EPA's current actions against coal-fired boilers for failure to obtain PSD permits for less extensive changes demonstrate that the physical changes at Dade RRF required a PSD permit. Particularly in light of EPA's current nationwide emphasis on detecting and remedying failures of owners and operators to obtain PSD permits, the Department should require an after-the-fact PSD permit for the reconstruction of the boilers at the Miami-Dade Resources Recovery Facility.

Florida Department of

Memorandum Environmental Protection

TO: Howard Rhodes

THRU: ~~Clair Fancy~~ for BMS

FROM: A.A. Linero 11/30

Vol 1 of 2

DATE: November 30, 1999

SUBJECT: Dade County (Montenay) Resource Recovery Facility
Permit Modification PSD-FL-006C

Attached is a modification of the PSD Permit for the Dade County Resource Recovery Facility. The changes actually made by this modification are small, do not increase emissions, and do not require a public notice in our opinion.

In reviewing the requests from Montenay and Dade, we noticed that references to the four boilers are to a "Zurn" design rather than the original Babcock & Wilcox boilers. The boilers were very significantly modified between 1987 and 1990. This was about the time the Department started to require dry scrubbers and baghouses on these kinds of facilities.

So far, Dade County and Montenay have not been able to show that EPA or the Department exempted the project from PSD. The Title V Section included a requirement in the Draft Title V Permit to obtain an after-the-fact PSD permit. Also, the District has initiated discussions with Dade and Montenay about this matter.

We can still act on parts of the present permit modification application. We had to mention the possible after-the-fact PSD permit so that they do not initiate projects that may not be consistent with a modern BACT determination. Right now, they are the only ones trying to achieve the Cb limits without SNCR. It is possible that a BACT would specifically require SNCR.

I recommend your approval of the attached Modification.

AAL/al

Attachment

(FOR INTERNAL USE ONLY)

State of Florida summary checklist for initial Title V permit applications for 'existing' Title V Sources

Facility Owner/Operator Name: Metro-Dade County / Montenay Power Corporation
Facility ID No.: 0250348 Site Name: Dade County Resource Recovery Facility
County: Dade
application receipt date 6/17/96

I. Preliminary scanning of application submitted.

a. Was application submitted to correct permitting authority? Y ✓ N____
b. Was an application filed? Y* ✓ N____
c. Was the application filed timely? Y* ✓ N____ 6/17/96

d. Application format filed [check one].
Hard copy of official version of form? ✓ ELSA? ~~N~~ yes
A facsimile of official version of form? ____ Some combination? ____

e. 4 copies (paper/electronic) submitted? Y ✓ N____

f. Electronic diskettes protected/virus scanned/marked? Y ✓ N____ N/A____
by YKZ date 6/17/96

g. Entire hard copy of Section I. provided (Pages 1-8 of form)? Y ✓ N____
Facility identified (Page 1)? [if not complete a Page 1] Y* ✓ [Attached____]
R.O. certification signed and dated (Page 2)? Y* ✓ N____
P.E. certification signed and dated (Page 7)? Y* ✓ N____

h. Any confidential information submitted? Y____ N ✓
If yes, R.O. provided hard copy to us and EPA? Y*____ N____
If yes, hard copy locked up and note filed with application? Y*____ N____

i. Type of application filed.
TV application for 'existing' Title V Source only? Y ✓ N____
Any units subject to acid rain? Y____ N ✓

Note(s): [*] = mandatory.

Comment(s): Compliance Plan submitted due to modifications occurring.

Reviewer's initials RAA date __/__/__ Concurrence initials [illegible] date 7/10/96

(FOR INTERNAL USE ONLY)

State of Florida summary checklist for initial Title V permit applications for 'existing' Title V Sources (cont'd)

II. Application logging.

ARMS Permit Number assigned 025 0348 - 001 - AV

logged into ARMS by initials [illegible] date __/__/__

III. Initial distribution of application.

a. Disposition of 4 paper/electronic copies submitted:

1- Clean originals to file? Y____ N____

1- ____ District Y____ N____

1- _____ County [affected local program]? Y____ N____

1- Permit engineer(s) _____, _____

b. Disposition of electronic files submitted:

copy placed onto PC? Y____ N____

c. Disposition of ELSA submitted:

version used [circle]: 1.0 1.1 1.2.1 1.3 1.3a 1.3b

Uploaded to EARS? Y____ N____

by _____ date __/__/__

d. Electronic information submitted previewed? Y____ N____ N/A____

Comment(s):_____

{this checklist was developed from Rule 62-213.420(1)(b)2., F.A.C. and DARM policy}

6/11/96

:\t5opgen\0_check\iapcheck.doc

Monterey / Dade County Meeting 3/16/00

David Buff	Golder Associates	352-336-5600
Ben Gilbert	Monterey	305-593-7000
Pat Comer	DEP/OGC	(850) 921-9621
Jim Pennington	DEP/BAR	(850) 921-9515
AL LINERO	DEP/BAR	850/921-9523
Scott Sheplak	DEP/BAR	850/921-9532
Clair Fancy	DEP/BAR	850 921 9503
Tom Tittle	DEP/WPB	
David Dee	Landers + Parsons	850-681-0311
Anetha Lee	Monterey	
JESS McCARTY	DADE COUNTY ATTY'S OFFICE	305-375-5980
Joseph Kahn	DEP - BAR	850-921-9519
Lee Casey	DC DSWM	305-594-1670
Vicente Castro	DCSWM	305 594-1677
Steve Passage	Monterey	212-826-7054
Bruce Mitchell	FDEP	850-921-9506

INTEROFFICE MEMORANDUM

Sensitivity: COMPANY CONFIDENTIAL

Date: 11-Oct-2000 09:33am
From: Barbara Boutwell TAL BOUTWELL_B
Dept: Air Resources Management
Tel No: 850/488-1344

To: See Below
Subject: New Posting #0250348

There is a new posting on Florida's website.

0250348001AV
MIAMI DADE RRF/MONTENAY

Final

The notification letter is encoded and attached. If you have any questions, feel free to contact me.

Thanks,
Barbara

Distribution:

To:	worley.gregg@epa.gov@in	
To:	Elizabeth Walker TAL	(WALKER_E)
To:	huey.joel@epa.gov@in	
To:	BARTLETT.ELIZABETH@EPA.GOV@IN	
To:	Mary Fillingim TAL	(FILLINGIM_M)
To:	danois.gracy@epa.gov@in	
CC:	Bruce Mitchell TAL	(MITCHELL_B)

Mitchell, Bruce

From: Mitchell, Bruce
Sent: Wednesday, April 18, 2001 12:41 PM
To: Boutwell, Barbara
Cc: Fancy, Clair; Sheplak, Scott
Subject: Posting for EPA: DRAFT Title V Permit Revision: Dade County RRF: 0250348-004-AV.

4/18/2001

Dear Barbara,

Please post the above referenced permit package, which is located at:
o:Bar/Title V/Bruce/Permits/0250348.004

Many thanks.

Bruce 0250348D.004.fednot.doc

Bruce Mitchell

Department of Environmental Protection

Jeb Bush
Governor

Twin Towers Office Building
2600 Blair Stone Road
Tallahassee, Florida 32399-2400

David B. Struhs
Secretary

P.E. Certification Statement

Permittee:
Miami-Dade Dept. of Solid Waste Management
Miami-Dade County Resource Recovery Facility

DRAFT Permit Revision No.: 0250348-004-AV
Facility ID No.: 0250348

Project type: Title V Air Operation Permit Revision

I HEREBY CERTIFY *that the engineering features described in the above referenced application and subject to the proposed permit conditions provide reasonable assurance of compliance with applicable provisions of Chapter 403, Florida Statutes, and Florida Administrative Code Chapters 62-4 and 62-204 through 62-297. However, I have not evaluated and I do not certify aspects of the proposal outside of my area of expertise (including but not limited to the electrical, mechanical, structural, hydrological, and geological features).*

Scott M. Sheplak 04/11/01

Scott M. Sheplak, P.E. date
Registration Number: 0048866

Permitting Authority:
Department of Environmental Protection
Bureau of Air Regulation
111 South Magnolia Drive, Suite 4
Tallahassee, Florida 32301
Telephone: 850/921-9532
Fax: 850/922-6979

Department of Environmental Protection

Jeb Bush
Governor

Twin Towers Office Building
2600 Blair Stone Road
Tallahassee, Florida 32399-2400

David B. Struhs
Secretary

April 12, 2001

Vincente Castro
Assistant Director
Dade County Department of Solid Waste Management
8675 NW 53rd Street, Suite 201
Miami, FL 33166-4598

Re: DRAFT Title V Permit Revision No.: 0250348-004-AV
Dade County Resource Recovery Facility

Dear Mr. Castro:

One copy of the DRAFT Title V Air Operation Permit Revision for the Dade County Resource Recovery Facility located at 6990 NW 97th Avenue, Miami, Dade County, is enclosed. The DRAFT Title V Air Operation Permit Revision package clerked to you on December 22, 2000, is withdrawn. The purpose of this revision is to incorporate a recent air construction permitting action regarding the four (4) combustor units (Units 1 thru 4) established under permit 0250348-003-AC/PSD-FL-006(D). The permitting authority's "INTENT TO ISSUE TITLE V AIR OPERATION PERMIT REVISION" and the "PUBLIC NOTICE OF INTENT TO ISSUE TITLE V AIR OPERATION PERMIT REVISION" are also included.

The "PUBLIC NOTICE OF INTENT TO ISSUE TITLE V AIR OPERATION PERMIT REVISION" must be published as soon as possible. Proof of publication, i.e., newspaper affidavit, must be provided to the permitting authority's office within 7 (seven) days of publication. Failure to publish the notice and provide proof of publication within the allotted time may result in the denial of the permit.

Please submit any written comments you wish to have considered concerning the permitting authority's proposed action to Scott M. Sheplak, P.E., at the above letterhead address. If you have any other questions, please contact Bruce Mitchell at 850/921-9506.

Sincerely,

C. H. Fancy, P.E.
Chief
Bureau of Air Regulation

CHF/BM/m

Enclosures

cc: U.S. EPA, Region 4 (INTERNET E-mail Memorandum)

In the Matter of an
Application for Permit Revision by:

Dade County Dept. of Solid Waste Management
8675 NW 53rd Street, Suite 201
Miami, Florida 33166-4598

DRAFT Permit Revision No.: 0250348-004-AV
Dade County Resource Recovery Facility
Dade County

/

INTENT TO ISSUE TITLE V AIR OPERATION PERMIT REVISION

The Department of Environmental Protection (permitting authority) gives notice of its intent to issue a Title V Air Operation Permit Revision (copy of DRAFT Permit Revision enclosed) for the Title V source detailed in the application specified above, for the reasons stated below.

The permittee, Dade County Department of Solid Waste Management, applied on October 10, 2000, to the permitting authority for a Title V Air Operation Permit Revision for the Dade County Resource Recovery Facility located at 6990 NW 97th Avenue, Miami, Dade County.

The purpose of this revision is to incorporate a recent air construction permitting action regarding the four (4) combustor units (Units 1 thru 4) established under permit 0250348-003-AC/PSD-FL-006(D).

The permitting authority has permitting jurisdiction under the provisions of Chapter 403, Florida Statutes (F.S.), and Chapters 62-4, 62-210 and 62-213, F.A.C. This source is not exempt from Title V permitting procedures. The permitting authority has determined that a Title V Air Operation Permit Revision is required to commence or continue operations at the described facility.

The permitting authority intends to issue this Title V Air Operation Permit Revision based on the belief that reasonable assurances have been provided to indicate that operation of the source will not adversely impact air quality, and the source will comply with all appropriate provisions of Chapters 62-4, 62-204, 62-210, 62-212, 62-213, 62-256, 62-257, 62-281, 62-296, and 62-297, F.A.C.

Pursuant to Sections 403.815 and 403.0872, F.S., and Rules 62-103.150 and 62-210.350(3), F.A.C., you (the applicant) are required to publish at your own expense the enclosed "PUBLIC NOTICE OF INTENT TO ISSUE TITLE V AIR OPERATION PERMIT REVISION." The notice shall be published one time only as soon as possible in the legal advertisement section of a newspaper of general circulation in the area affected. For the purpose of these rules, "publication in a newspaper of general circulation in the area affected" means publication in a newspaper meeting the requirements of Sections 50.011 and 50.031, F.S., in the county where the activity is to take place. Where there is more than one newspaper of general circulation in the county, the newspaper used must be one with significant circulation in the area that may be affected by the permit. If you are uncertain that a newspaper meets these requirements, please contact the permitting authority at the address or telephone number listed below. The applicant shall provide proof of publication to the Department's Bureau of Air Regulation, 2600 Blair Stone Road, Mail Station #5505, Tallahassee, Florida 32399-2400 (Telephone: 850/488-1344; Fax: 850/922-6979), within 7 (seven) days of publication. Failure to publish the notice and provide proof of publication within the allotted time may result in the denial of the permit revision pursuant to Rule 62-103.150(6), F.A.C.

The permitting authority will issue the PROPOSED Title V Permit Revision, and subsequent FINAL Title V Permit Revision, in accordance with the conditions of the enclosed DRAFT Title V Permit Revision unless a response received in accordance with the following procedures results in a different decision or significant change of terms or conditions.

The permitting authority will accept written comments concerning the proposed permit issuance action for a period of 30 (thirty) days from the date of publication of "PUBLIC NOTICE OF INTENT TO ISSUE TITLE V AIR OPERATION PERMIT REVISION." Written comments should be provided to the permitting authority office. Any written comments filed shall be made available for public inspection. If written comments received result in a significant change in this DRAFT Title V Permit Revision, the permitting authority shall issue a Revised DRAFT Title V Permit Revision and require, if applicable, another Public Notice.

The permitting authority will issue the permit with the attached conditions unless a timely petition for an administrative hearing is filed pursuant to Sections 120.569 and 120.57, F.S. Mediation under Section 120.573, F.S., will not be available for this proposed action.

A person whose substantial interests are affected by the proposed permitting decision may petition for an administrative hearing in accordance with Sections 120.569 and 120.57, F.S. The petition must contain the information set forth below and must be filed (received) in the Office of General Counsel of the Department of Environmental Protection, 3900 Commonwealth Boulevard, Mail Station #35, Tallahassee, Florida 32399-3000 (Telephone: 850/488-9730; Fax: 850/487-4938). Petitions filed by the permit applicant or any of the parties listed below must be filed within 14 (fourteen) days of receipt of this notice of intent. Petitions filed by any other person must be filed within 14 (fourteen) days of publication of the public notice or within 14 (fourteen) days of receipt of this notice of intent, whichever occurs first. A petitioner must mail a copy of the petition to the applicant at the address indicated above, at the time of filing. The failure of any person to file a petition within the appropriate time period shall constitute a waiver of that person's right to request an administrative determination (hearing) under Sections 120.569 and 120.57, F.S., or to intervene in this proceeding and participate as a party to it. Any subsequent intervention will be only at the approval of the presiding officer upon the filing of a motion in compliance with Rule 28-5.207, F.A.C.

A petition must contain the following information:

(a) The name, address, and telephone number of each petitioner, the applicant's name and address, the Permit File Number, and the county in which the project is proposed;

(b) A statement of how and when each petitioner received notice of the permitting authority's action or proposed action;

(c) A statement of how each petitioner's substantial interests are affected by the permitting authority's action or proposed action;

(d) A statement of the material facts disputed by the petitioner, if any;

(e) A statement of the facts that the petitioner contends warrant reversal or modification of the permitting authority's action or proposed action;

(f) A statement identifying the rules or statutes that the petitioner contends require reversal or modification of the permitting authority's action or proposed action; and,

(g) A statement of the relief sought by the petitioner, stating precisely the action that the petitioner wants the permitting authority to take with respect to the action or proposed action addressed in this notice of intent.

Because the administrative hearing process is designed to formulate final agency action, the filing of a petition means that the permitting authority's final action may be different from the position taken by it in this notice of intent. Persons whose substantial interests will be affected by any such final decision of the permitting authority on the application have the right to petition to become a party to the proceeding, in accordance with the requirements set forth above.

In addition to the above, a person subject to regulation has a right to apply to the Department of Environmental Protection for a variance from or waiver of the requirements of particular rules, on certain conditions, under Section 120.542, F.S. The relief provided by this state statute applies only to state rules, not statutes, and not to any federal regulatory requirements. Applying for a variance or waiver does not substitute or extend the time for filing a petition for an administrative hearing or exercising any other right that a person may have in relation to the action proposed in this notice of intent.

The application for a variance or waiver is made by filing a petition with the Office of General Counsel of the Department of Environmental Protection, 3900 Commonwealth Boulevard, Mail Station #35, Tallahassee, Florida 32399-3000. The petition must specify the following information:

(a) The name, address, and telephone number of the petitioner;

(b) The name, address, and telephone number of the attorney or qualified representative of the petitioner, if any;

(c) Each rule or portion of a rule from which a variance or waiver is requested;

(d) The citation to the statute underlying (implemented by) the rule identified in (c) above;

(e) The type of action requested;

(f) The specific facts that would justify a variance or waiver for the petitioner;

(g) The reason why the variance or waiver would serve the purposes of the underlying statute (implemented by the rule); and,

(h) A statement whether the variance or waiver is permanent or temporary and, if temporary, a statement of the dates showing the duration of the variance or waiver requested.

The Department will grant a variance or waiver when the petition demonstrates both that the application of the rule would create a substantial hardship or violate principles of fairness, as each of those terms is defined in Section 120.542(2), F.S., and that the purpose of the underlying statute will be or has been achieved by other means by the petitioner.

Persons subject to regulation pursuant to any federally delegated or approved air program should be aware that Florida is specifically not authorized to issue variances or waivers from any requirements of any such federally delegated or approved program. The requirements of the program remain fully enforceable by the Administrator of the United States Environmental Protection Agency and by any person under the Clean Air Act unless and until the Administrator separately approves any variance or waiver in accordance with the procedures of the federal program.

Finally, pursuant to 42 United States Code (U.S.C.) Section 7661d(b)(2), any person may petition the Administrator of the EPA within 60 (sixty) days of the expiration of the Administrator's 45 (forty-five) day review period as established at 42 U.S.C. Section 7661d(b)(1), to object to issuance of any permit. Any petition shall be based only on objections to the permit that were raised with reasonable specificity during the 30 (thirty) day public comment period provided in this notice, unless the petitioner demonstrates to the Administrator of the EPA that it was impracticable to raise such objections within the comment period or unless the grounds for such objection arose after the comment period. Filing of a petition with the Administrator of the EPA does not stay the effective date of any permit properly issued

pursuant to the provisions of Chapter 62-213, F.A.C. Petitions filed with the Administrator of EPA must meet the requirements of 42 U.S.C. Section 7661d(b)(2) and must be filed with the Administrator of the EPA at 401 M. Street, SW, Washington, D.C. 20460.

Executed in Tallahassee, Florida.

STATE OF FLORIDA DEPARTMENT OF ENVIRONMENTAL PROTECTION

C. H. Fancy, P.E.
Chief
Bureau of Air Regulation

CERTIFICATE OF SERVICE

The undersigned duly designated deputy agency clerk hereby certifies that this INTENT TO ISSUE TITLE V AIR OPERATION PERMIT REVISION (including the PUBLIC NOTICE and the DRAFT Permit Revision) and all copies were sent by certified mail before the close of business on 4/18/01 to the person(s) listed:

Mr. Vincente Castro, Assistant Director, Dade County Department of Solid Waste Management

In addition, the undersigned duly designated deputy agency clerk hereby certifies that copies of this INTENT TO ISSUE TITLE V AIR OPERATION PERMIT REVISION (including the PUBLIC NOTICE) were sent by U.S. mail on the same date to the person(s) listed:

Mr. David Buff, P.E., GA
Ms. Anetha Lue, P.E., Montenay
Mr. H. Patrick Wong, DERM
Mr. Isidore Goldman, SED
U.S. EPA, Region 4 (INTERNET E-mail Memorandum)

Clerk Stamp

FILING AND ACKNOWLEDGMENT FILED, on this date, pursuant to Section 120.52(7), Florida Statutes, with the designated agency Clerk, receipt of which is hereby acknowledged.

Barbara J. Friday (Clerk) 4/18/01 (Date)

PUBLIC NOTICE OF INTENT TO ISSUE TITLE V AIR OPERATION PERMIT REVISION

STATE OF FLORIDA
DEPARTMENT OF ENVIRONMENTAL PROTECTION

DRAFT Title V Permit Revision No.: 0250348-004-AV
Dade County Department of Solid Waste Management
Dade County Resource Recovery Facility
Dade County

The Department of Environmental Protection (permitting authority) gives notice of its intent to issue a Title V Air Operation Permit Revision to the Dade County Department of Solid Waste Management for the Dade County Resource Recovery Facility located at 6990 NW 97th Avenue, Miami, Dade County. The applicant's name and address are: Miami-Dade County Department of Solid Waste Management, 8675 NW 53rd Street, Suite 201, Miami, FL 33166-4598.

The purpose of this revision is to incorporate a recent air construction permitting action regarding the four (4) combustor units (Units 1 thru 4) established under permit 0250348-003-AC/PSD-FL-006(D).

The permitting authority will issue the PROPOSED Title V Permit Revision, and subsequent FINAL Title V Permit revision, in accordance with the conditions of the DRAFT Title V Permit Revision unless a response received in accordance with the following procedures results in a different decision or significant change of terms or conditions.

The permitting authority will accept written comments concerning the proposed DRAFT Title V Permit Revision issuance action for a period of 30 (thirty) days from the date of publication of this Notice. Written comments should be provided to the Department's Bureau of Air Regulation, 2600 Blair Stone Road, Mail Station #5505, Tallahassee, Florida 32399-2400. Any written comments filed shall be made available for public inspection. If written comments received result in a significant change in this DRAFT Title V Permit Revision, the permitting authority shall issue a Revised DRAFT Title V Permit Revision and require, if applicable, another Public Notice.

A person whose substantial interests are affected by the proposed permitting decision may petition for an administrative hearing in accordance with Sections 120.569 and 120.57 of the Florida Statutes (F.S.). The petition must contain the information set forth below and must be filed (received) in Office of General Counsel of the Department of Environmental Protection, 3900 Commonwealth Boulevard, Mail Station #35, Tallahassee, Florida 32399-3000 (Telephone: 850/488-9730; Fax: 850/487-4938). Petitions filed by any persons other than those entitled to written notice under Section 120.60(3), F.S., must be filed within fourteen days of publication of the public notice or within fourteen days of receipt of the notice of intent, whichever occurs first. Under Section 120.60(3), F.S., however, any person who asked the permitting authority for notice of agency action may file a petition within fourteen days of receipt of that notice, regardless of the date of publication. A petitioner shall mail a copy of the petition to the applicant at the address indicated above, at the time of filing. The failure of any person to file a petition within the applicable time period shall constitute a waiver of that person's right to request an administrative determination (hearing) under Sections 120.569 and 120.57, F.S., or to intervene in this proceeding and participate as a party to it. Any subsequent intervention will be only at the approval of the presiding officer upon the filing of a motion in compliance with Rule 28-106.205, Florida Administrative Code (F.A.C.).

A petition that disputes the material facts on which the permitting authority's action is based must contain the following information:

(a) The name and address of each agency affected and each agency's file(s) or identification number(s), if known;

(b) The name, address and telephone number of the petitioner; name address and telephone number of the petitioner's representative, if any, which shall be the address for service purposes during the course of the proceeding; and an explanation of how petitioner's substantial rights will be affected by the agency determination;

(c) A statement of how and when the petitioner received notice of the agency action or proposed action;

(d) A statement of all disputed issues of material fact. If there are none, the petition must so state;

(e) A concise statement of the ultimate facts alleged, as well as the rules and statutes which entitle petitioner to relief; and

(f) A demand for relief.

A petition that does not dispute the material facts upon which the permitting authority's action is based shall state that no such facts are in dispute and otherwise shall contain the same information as set forth above, as required by Rule 28-106.301, F.A.C.

Because the administrative hearing process is designed to formulate final agency action, the filing of a petition means that the permitting authority's final action may be different from the position taken by it in this notice of intent. Persons whose substantial interests will be affected by any such final decision of the permitting authority on the application have the right to petition to become a party to the proceeding, in accordance with the requirements set forth above.

Mediation is not available for this proceeding.

In addition to the above, pursuant to 42 United States Code (U.S.C.) Section 7661d(b)(2), any person may petition the Administrator of the EPA within 60 (sixty) days of the expiration of the Administrator's 45 (forty-five) day review period as established at 42 U.S.C. Section 7661d(b)(1), to object to issuance of any permit. Any petition shall be based only on objections to the permit that were raised with reasonable specificity during the 30 (thirty) day public comment period provided in this notice, unless the petitioner demonstrates to the Administrator of the EPA that it was impracticable to raise such objections within the comment period or unless the grounds for such objection arose after the comment period. Filing of a petition with the Administrator of the EPA does not stay the effective date of any permit revision properly issued pursuant to the provisions of Chapter 62-213, F.A.C. Petitions filed with the Administrator of EPA must meet the requirements of 42 U.S.C. Section 7661d(b)(2) and must be filed with the Administrator of the EPA at: U.S. EPA, 401 M Street, S.W., Washington, D.C. 20460.

A complete project file is available for public inspection during normal business hours, 8:00 a.m. to 5:00 p.m., Monday through Friday, except legal holidays, at:

Permitting Authority:
Department of Environmental Protection
Bureau of Air Regulation
111 South Magnolia Drive, Suite 4
Tallahassee, Florida 32301
Telephone: 850/488-1344
Fax: 850/922-6979

Affected District Authority:
Department of Environmental Protection
Southeast District
400 North Congress Avenue
West Palm Beach, Florida 33416-5425
Telephone: 561/681-6600
Fax: 561/681-6790

The complete project file includes the DRAFT Title V Operation Permit Revision, the application, and the information submitted by the responsible official, exclusive of confidential records under Section 403.111, F.S. Interested persons may contact Scott M. Sheplak, P.E., at the above address, or call 850/921-9532, for additional information.

STATEMENT OF BASIS

Dade Dept. of Solid Waste Management
Dade County Resource Recovery Facility
Facility ID No.: 0250348
Dade County

Title V Air Operation Permit Revision
DRAFT Title V Permit Revision No.: 0250348-004-AV

The initial Title V Operation permit was issued on October 12, 2000. This Title V air operation permit revision is issued under the provisions of Chapter 403, Florida Statutes (F.S.), and Florida Administrative Code (F.A.C.) Chapters 62-4, 62-210, 62-213, and 62-214. The above named permittee is hereby authorized to perform the work or operate the facility shown on the application and approved drawing(s), plans, and other documents, attached hereto or on file with the permitting authority, in accordance with the terms and conditions of this permit. The permit reflects the federally enforceable applicable conditions from a SIP air construction permitting action (0240348-003-AC/PSD-FL-006(D)), which recognized the modifications made to the RDF combustors, Units 1 thru 4, and was issued on July 21, 2000.

The following "Compliance Schedule" dates shall have been met to satisfy measurable progress milestones to come into compliance with 40 CFR 60, Subpart Cb:

E.U. ID. Nos.	Milestone	Milestone Date
-001 thru -004	Submittal of a final control plan to the Department.	June 14, 1996
-001 thru -004	Awarding of contracts for emission control systems or process modifications, or issuance of orders for the purchase of component parts to accomplish emission control or process modification.	January 31, 1996
-001 thru -004	Initiation of on-site construction or installation of emission control equipment or process change.	February 28, 1997
-001 thru -004	Completion of on-site construction or installation of emission control equipment or process change.	September 12, 2000
-001 thru -004	Final Compliance.	December 19, 2000

[40 CFR 60.21(h); 40 CFR 60.39b; and, State Plan approved 11/13/97 and effective 01/12/98]

Following retrofitting to comply with NSPS - 40 CFR 60, Subparts Cb and Eb, each boiler will have a maximum capacity of 27 tons of RDF per hour and 314 MMBtu/hr heat input, based on a maximum heat content value of 5,818 British thermal units (BTU) per pound of RDF. Auxiliary burners associated with each RDF combustor will be permitted to fire propane and natural gas at a maximum heat input of 80 MMBtu/hr for startup, shutdown and malfunction, and at other times when necessary and consistent with good combustion practices. No. 2 fuel oil (with a maximum sulfur content of 0.08%, by weight) was allowed to be used for startup only in PA 77-08, but the facility has chosen not to use fuel oil in the auxiliary burners to date. The maximum steam production rate of each unit will be 180,000 lbs/hr @ 625 psig and 730 °F, 4-hour block average, when firing RDF. Combustion control systems will be installed for carbon monoxide and nitrogen oxides, as necessary, to meet the emissions limits. Continuous monitoring devices for combustion and process parameters and SO_2, NOx and CO will be installed to improve combustion efficiency and control. The air pollution control equipment will consist of a spray dryer absorber (for acid gases), an activated carbon or comparable reactant injection system (for mercury and dioxin), and a fabric filter baghouse (for particulate matter and heavy metals). In addition, the existing stacks and flue gas handling systems will replace the existing stacks and flue gas handling systems (Units 1 and 2 will each have a separate flue and share a common stack: Stack height = 250 feet, exit diameter = 8.5 feet, exit temperature = 270 °F, actual volumetric flow rate = 177,200 acfm, and maximum dry standard volumetric flow rate = 109,054 dscfm; and,

Units 3 and 4 will each have a separate flue and share a common stack: Stack height = 250 feet, exit diameter = 8.5 feet, exit temperature = 270 °F, actual volumetric flow rate = 177,200 acfm, and maximum dry standard volumetric flow rate = 109,054 dscfm). Two 38-MW (gross) turbine-generators (using the steam from the four boilers) will supply the in-plant electrical load and the balance of the electricity generated will be sold to Florida Power Corporation. Odors will be minimized by keeping the truck access doors closed during non-use; and, a negative pressure will be maintained on the garbage tipping floor and the air collected will be used as combustion air.

These emissions units are regulated under NSPS - 40 CFR 60, Subpart Cb, Emissions Guidelines and Compliance Times for Large Municipal Waste Combustors That Are Constructed on or Before September 20, 1994, adopted and incorporated by reference, subject to provisions, in Rule 62-204.800(8)(b), F.A.C.; NSPS - 40 CFR 60, Subpart E, Standards of Performance for Incinerators, adopted and incorporated by reference in Rule 62-204.800(7), F.A.C.; NSPS - 40 CFR 60, Subpart Eb, Standards of Performance for Large Municipal Waste Combustors That Are Constructed, Modified or Reconstructed on or Before September 20, 1994, adopted and incorporated by reference in Rule 62-204.800(7), F.A.C.; Rule 62-212.400(5), F.A.C., Prevention of Significant Deterioration (PSD) (PSD-FL-006(A), (B) & (D); Rule 62-212.400(6), F.A.C., Best Available Control Technology (BACT); Rule 62-296.401(2), F.A.C., Incinerators; Rule 62-296.416, F.A.C., Waste-to-Energy Facilities; and, PA 77-08 & 77-08(A, B, & C). Also, please note that conditions in 40 CFR 60, Subpart Cb, reference requirements that are contained in 40 CFR 60, Subpart Eb.

Emissions unit **-rrr** is a processing activity of receiving, handling and converting of MSW into RDF and saleable extractables, such as metals and glass. The facility is designed to process 3,000 tons/day, 18,000 tons/wk, and 936,000 tons/yr of municipal solid waste (MSW; trash and garbage) into RDF and saleable extractables, such as metals.

Emissions unit **-sss** is a existing bulky waste processing system that will be modified into a biomass fuel preparation system and is designed to process up to 400,000 tons/yr of the bulky waste into biomass, which will be transported off-site for use in biomass-fired cogeneration units or combusted on-site.

Emissions units **-rrr** and **-sss** are each minor emissions units regulated under Rule 62-210.300, F.A.C., Permits Required; Rule 62-212.400, Prevention of Significant Deterioration [PSD; and, PSD-FL-006(A), (B) & (D)].

Emissions unit **-ttt**: Ash Building and Handling System (Ash Storage Silo with Baghouse and Ash Conditioning Agent Storage Silo with Baghouse). Fly ash collected by the existing ESPs (future: fabric filters) is conveyed to the fly ash handling building. The ash handling system is completely enclosed to decrease the potential for fugitive emissions. The ash is quenched and wetted before being temporarily stored in the ash handling facility and loaded onto a truck. A baghouse is located on the ash handling building as an added precaution for fugitive emissions. The baghouse keeps the building under negative pressure.

Emissions unit **-ttt** is regulated under NSPS - 40 CFR 60, Subpart Cb, Emissions Guidelines and Compliance Times for Large Municipal Waste Combustors That Are Constructed on or Before September 20, 1994, adopted and incorporated by reference, subject to provisions, in Rule 62-204.800(8)(b), F.A.C.; and, Rule 62-212.400(5), F.A.C., Prevention of Significant Deterioration [PSD; PSD-FL-006, -006(A), (B) & (D)]. Note: This project is subject to the requirements of 40 CFR 60, Subpart Cb. This permit may refer to the requirements of 40 CFR 60,

Subpart Eb, where these requirements are referenced by 40 CFR 60, Subpart Cb. The fugitive particulate matter control requirements for the ash handling activities are specified in 40 CFR 60.55b.

Emissions unit **-uuu**: Lime Storage Silo with Baghouse. Lime used in the spray dryer absorbers for each municipal waste combustor is stored in a silo. Emissions from the silo are controlled by a baghouse.

Emissions unit **-uuu** is a minor emissions unit regulated under Rule 62-210.300, F.A.C., Permits Required; Rule 62-212.400, Prevention of Significant Deterioration [PSD; and, PSD-FL-006(A), (B) & (D)].

Emissions unit **-vvv**: Activated Carbon (or Comparable Reactant) Storage Silo. Activated carbon (or comparable reactant) used in the injection system for each municipal waste combustor is stored in a silo. The activated carbon (or comparable reactant) will be utilized for the control of mercury and dioxin/furans. Emissions from the silo are controlled by a baghouse.

Emissions unit **-vvv** is a minor emissions unit regulated under Rule 62-210.300, F.A.C., Permits Required; and, Rule 62-212.400, Prevention of Significant Deterioration [PSD; and, PSD-FL-006(A), (B) & (D)]}

Also included in this permit are miscellaneous insignificant emissions units and/or activities.

This facility is a major source of hazardous air pollutants (HAPs).

Dade County Department of Solid Waste Management
Dade County Resource Recovery Facility
Facility ID No.: 0250348
Dade County

Title V Air Operation Permit Revision
DRAFT Title V Permit Revision No.: 0250348-004-AV

Permitting Authority
State of Florida
Department of Environmental Protection
Division of Air Resources Management
Bureau of Air Regulation
Title V Section

Mail Station #5505
2600 Blair Stone Road
Tallahassee, Florida 32399-2400
Telephone: 850/488-0114
Fax: 850/922-6979

Compliance Authority
Department of Environmental Protection
Southeast District
400 North Congress Avenue
West Palm Beach, Florida 33401
Telephone: 561/681-6600
Fax: 561/681-6755

Title V Air Operation Permit Revision

DRAFT Title V Operation Permit Revision No.: 0250348-004-AV

Table of Contents

Section

Title V Air Operation Permit Placard Page **1**
Section I. Facility Information. **2**
Subsection A. Facility Description. 2
Subsection B. Summary of Emissions Unit ID Numbers and Brief Descriptions. 3
Subsection C. Relevant Documents 3
Section II. Facility-wide Conditions. **4**
Section III. Emissions Units and Conditions. **7**
Subsection A. Reserved. 7
Subsection B. Units 1 thru 4 RDF Combustors and Auxiliary Burners 8
Subsection C. MSW to RDF Processing and Bulky Waste to Biomass Processing Facilities. 52
Subsection D. Ash Building and Handling System. 58
Subsection E. Lime Storage Silo. 67
Subsection F. Activated Carbon or Comparable Reactant Storage Silo 72

Department of Environmental Protection

Jeb Bush
Governor

Twin Towers Office Building
2600 Blair Stone Road
Tallahassee, Florida 32399-2400

David B. Struhs
Secretary

Permittee:
Dade County Dept. of Solid Waste Management
8675 NW 53rd Street, Suite 201
Miami, Florida 33166-4598

DRAFT Permit Revision No.: 0250348-004-AV
Facility ID No.: 0250348
SIC Nos.: 49, 4953
Project: Title V Air Operation Permit Revision

The purpose for this permit revision is to incorporate the terms and conditions established in air construction permit, No. 0250348-003-AC/PSD-FL-006(D), issued July 21, 2000. The existing facility is located at 6990 Northwest 97th Avenue, Miami, Florida 33178-6430, better described as approximately 0.5 mile north of Northwest 58th Street immediately west of Northwest 97th Avenue, Miami, Dade County. UTM Coordinates: Zone 17, 564.30 km East and 2857.40 km North; Latitude: 25° 50' 06" North and Longitude: 80° 21' 30" West.

STATEMENT OF BASIS: This Title V air operation permit revision is issued under the provisions of Chapter 403, Florida Statutes (F.S.), and Florida Administrative Code (F.A.C.) Chapters 62-4, 62-210, and 62-213. The above named permittee is hereby authorized to perform the work or operate the facility shown on the application and approved drawing(s), plans, and other documents, attached hereto or on file with the permitting authority, in accordance with the terms and conditions of this permit.

Referenced attachments made a part of this permit revision:
Appendix I-1, List of Insignificant Emissions Units and/or Activities
Appendix SS-1, Stack Sampling Facilities (version dated 10/7/96)
Appendix TV-3, Title V Conditions (version dated 04/30/99)
Figure 1: Summary Report-Gaseous and Opacity Excess Emission and Monitoring System Performance (40 CFR 60)
Table 297.310-1, Calibration Schedule
Statement of Basis
Appendix H-1, Permit History/ID Number Transfers

Initial Effective Date: October 2, 2000
Revision Effective Date: (issue date)
Renewal Application Due Date: April 2, 2005
Expiration Date: October 2, 2005

Howard L. Rhodes, Director,
Division of Air Resources Management

HLR/sms/bm

Section I. Facility Information.

Subsection A. Facility Description.

This existing facility consists of four identical Zurn Refuse Derived Fuel (RDF) Spreader Stoker Combustion Units 1 thru 4, with auxiliary burners, and a cooling tower. The facility's primary activities are garbage and trash receiving and processing (including a metals recovery system); fuel handling and storage; biomass production and export; RDF, natural gas, and propane combustion; ash storage and processing, including a monofill ash landfill; and, maintaining ancillary support equipment. These emissions units recently underwent a permit modification activity (PSD-FL-006(D)) that was completed on July 21, 2000. The purpose of the permit modification was to upgrade the air pollution control system pursuant to the requirements of 40 CFR 60, Subpart Cb - Emissions Guidelines and Compliance Schedules for Municipal Waste Combustors That Are Constructed on or Before December 19, 1995, for the existing four RDF boilers built in 1987-1989. The modifications included changes to the overfire air system, fuel feed system, and associated fuel distribution system. The electrostatic precipitators will be replaced with fabric filters, spray dryer absorbers and activated carbon injection units; and, a selective non-catalytic reduction system will be installed, if it is necessary to comply with 40 CFR 60, Subpart Cb.

The facility is designed to process 3,000 tons/day, 18,000 tons/wk, and 936,000 tons/yr of municipal solid waste (MSW: trash and garbage) into RDF and saleable extractables, such as metals. The biomass fuel preparation system will process up to 400,000 tons per year of the bulky solid waste into biomass, which will be either transported off-site for use in biomass-fired cogeneration units or combusted on-site.

Each combustor has a design rated (nominal) capacity of 27 tons/hr (TPH) of RDF [648 tons/day (TPD): as determined by a rolling 12-month average]. RDF is the primary fuel; and, propane and natural gas are auxiliary fuels used for startup, shutdown, and malfunctions, and to support good combustion. The auxiliary burners have a maximum heat input of 80 MMBtu/hr. The facility is allowed to burn the facility's processed biomass fuel (5%, by weight) not transported off-site, natural gas, non-MSW materials as segregated waste (5%, by weight), used tires (3%, by weight), and on-specification used oil, oily water, oily sludge, spent greases and oily solid waste (such as rags) generated on-site. The maximum continuous rating (MCR) for each combustor is 180,000 lbs/hr steam at 625 psig and 730 ^{0}F, when firing RDF. Units 1 and 2 provide steam to a turbine-generator with a nameplate rating of 38.5 megawatts (MW; gross); and, Units 3 and 4 provide steam to a turbine-generator with a nameplate rating of 38.5 MW (gross); and, the electricity is used for in-plant electrical load and the excess is sold.

To comply with 40 CFR 60, Subpart Cb, combustion control systems will be installed for carbon monoxide and nitrogen oxides, as necessary, to meet the emissions limits. Continuous monitoring devices for combustion, process parameters, SO_2, NOx, and CO will be installed to improve combustion efficiency and control. The air pollution control equipment will consist of a spray dryer absorber (for acid gases), an activated carbon or comparable reactant injection system (for mercury and dioxin), and a fabric filter baghouse (for particulate matter and heavy metals). The facility will also have an ash building and handling system, a new lime storage silo, and an activated carbon storage silo. In addition, the existing stacks and flue gas handling systems will be replaced with new stacks and flue gas handling systems: Units 1 and 2 will share a common stack, each with its own flue; and, Units 3 and 4 will share a common stack, each with its own flue. Odors will be minimized by keeping the truck access doors closed during non-use; and, a negative pressure will be maintained on the garbage tipping floor and the air collected will be used as combustion air.

Also included in this permit are miscellaneous insignificant emissions units and/or activities.

This facility is a major source of hazardous air pollutants (HAPs).

The use of 'Permitting Notes' throughout this permit are for informational purposes, only, and are not permit conditions.

Subsection B. Summary of Emissions Unit ID Numbers and Brief Descriptions.

The facility consists of the following emissions units/activities:

E.U./Facility ID No.	Brief Description
-001/Unit 1	Refuse Derived Fuel (RDF) Spreader Stoker Combustor & Auxiliary Burners
-002/Unit 2	RDF Spreader Stoker Combustor & Auxiliary Burners
-003/Unit 3	RDF Spreader Stoker Combustor & Auxiliary Burners
-004/Unit 4	RDF Spreader Stoker Combustor & Auxiliary Burners
-rrr	MSW to RDF Processing Facility with Baghouses
-sss	Bulky Waste to Biomass Processing Facility with Baghouses
-ttt	Ash Building and Handling System Ash Storage Silo with Baghouse
-uuu	Lime Storage Silo with Baghouse
-vvv	Activated Carbon or Comparable Reactant Storage Silo with Baghouse

Please reference the Permit Number, the Facility Identification Number, and the appropriate Emissions Unit(s) ID Number(s) on all correspondence, test report submittals, applications, etc.

Subsection C. Relevant Documents.

{Permitting Note: The documents listed below are not a part of this permit; however, they are specifically related to this permitting action.}

These documents are provided to the permittee for informational purposes:
Appendix A-1, Abbreviations, Acronyms, Citations, and Identification Numbers (version dated 2/5/97)

These documents are on file with the permitting authority:
Construction permit No. 0250348-003-AC/PSD-FL-006(D) issued July 21, 2000.
Application for a Title V Permit Revision received October 10, 2000.
Initial Title V Permit issued October 12, 2000.

Section II. Facility-wide Conditions.

The following conditions apply facility-wide:

1. Appendix TV-3, Title V Conditions, is a part of this permit.
{Permitting note: Appendix TV-3, Title V Conditions is distributed to the permittee only. Other persons requesting copies of these conditions shall be provided one copy when requested or otherwise appropriate. If desired, a copy of Appendix TV-3, Title V Conditions can be downloaded from the Division of Air Resources Management's Internet Web site located at the following address:
"http://www.dep.state.fl.us/air/permitting/TitleVperm.htm".}

2. General Pollutant Emission Limiting Standards. Objectionable Odor Prohibited. The permittee shall not cause, suffer, allow, or permit the discharge of air pollutants which cause or contribute to an objectionable odor. The truck access doors to the facility shall remain closed except during normal working shifts when garbage is being received near the garbage storage pit area to allow vehicle passage. Also, a negative pressure shall be maintained on the garbage tipping floor and air from within the garbage building will be used as combustion air.
[Rule 62-296.320(2), F.A.C.; Rule 62-296.401(2)(b), F.A.C.; PA 77-08; and, PSD-FL-006(A) & (D)]

3. Prevention of Accidental Releases (Section 112(r) of CAA).
a. The permittee shall submit its Risk Management Plan (RMP) to the Chemical Emergency Preparedness and Prevention Office (CEPPO) RMP Reporting Center when, and if, such requirement becomes applicable ; and
b. The permittee shall submit to the permitting authority Title V certification forms or a compliance schedule in accordance with Rule 62-213.440(2), F.A.C.
[40 CFR 68]

4. Insignificant Emissions Units and/or Activities. Appendix I-1, List of Insignificant Emissions Units and/or Activities, is a part of this permit.
[Rules 62-213.440(1), 62-213.430(6), and 62-4.040(1)(b), F.A.C.]

5. Unregulated Emissions Units and/or Activities. Appendix U-1, List of Unregulated Emissions Units and/or Activities, is a part of this permit. **There are none deemed so at this time.**
[Rule 62-213.440(1), F.A.C.]

6. General Pollutant Emission Limiting Standards. Volatile Organic Compounds Emissions or Organic Solvents Emissions. The permittee shall allow no person to store, pump, handle, process, load, unload or use in any process or installation, volatile organic compounds or organic solvents without applying known and existing vapor emission control devices or systems deemed necessary and ordered by the Department.

{Permitting Note: No vapor emission control devices or systems are deemed necessary nor ordered by the Department as of the issuance date of this permit.}
[Rule 62-296.320(1)(a), F.A.C.]

7. General Particulate Emission Limiting Standards. General Visible Emissions Standard. Except for emissions units that are subject to a particulate matter or opacity limit set forth or established by rule and reflected by conditions in this permit, no person shall cause, let, permit, suffer or allow to be discharged into the atmosphere the emissions of air pollutants from any activity, the density of which is equal to or greater than that designated as Number 1 on the Ringelmann Chart (20 percent opacity). EPA Method 9 is the method of compliance pursuant to Chapter 62-297, F.A.C.
[Rules 62-296.320(4)(b)1. & 4., F.A.C.]

8. Reasonable precautions to prevent emissions of unconfined particulate matter at this facility include:

A. Facility's Processing of Biomass
(1) Windows and doors of the enclosed space shall be kept closed except when needed to minimize fugitive dust.
(2) Conveyor systems, screens, handling shredded wood fines and dust will be covered or enclosed.
(3) Shredded wood conveyor systems have baghouse pickup points at the transfer points.
(4) Wind breaks will be installed around the shredded wood load-out area.
(5) Floors in the enclosed area will be cleaned periodically.
(6) Loading areas for shredded wood will be cleaned or wetted as needed to minimize fugitive dust.
(7) Trucks transporting shredded wood will be covered.
(8) Landscaping or planting of vegetation.

B. Other Precautions to be taken at the Dade County Complex
(1) Employment of proper dust-control techniques to prevent fugitive dust emissions during construction activities such as demolition of buildings, grading roads, construction, and land clearing (including construction to be experienced during facility improvements to air pollution control equipment to meet the Emission Guideline requirements of 40 CFR 60, Subpart Cb).
(2) Application of asphalt, water, oil, chemicals, or other dust suppressants to roads, yards, open stock piles, and similar emissions units/activities as necessary to minimize fugitive dust (except for within the ash landfill).
(3) Confining abrasive blasting where possible.
(4) Operation of the landfill in accordance with all applicable portions of Chapter 62-7, F.A.C.
(5) Landscaping or planting of vegetation.
(6) All roads, except for roads within the ash landfill, shall be adequately paved to control visible emissions.
(7) Maximum 15 MPH speed limit signs shall be posted to minimize dust generation.
(8) Residue from grates, grate siftings, and ash from the combustor/boiler and fabric filter hoppers during normal operations shall be discharged into the ash handling and silo system to minimize fugitive dust.
(9) The ash/residue in the bottom ash building shall be kept sufficiently moist to minimize fugitive dust during storage and handling operations.
(10) Covering transport vehicles for ash.
(11) Wetting of bottom ash and fly ash as necessary to minimize fugitive dust prior to the use of conveyor systems.

[Rule 62-296.320(4)(c)2., F.A.C.; PSD-FL-006(A) & (D); PA 77-08C; and, 0250348-001-AV]

{Permitting Note: This condition presents the reasonable precautions to be implemented in accordance with Rule 62-296.320(4)(c), F.A.C., in lieu of the requirements of Condition No. 58 of Appendix TV-3.}

9. When appropriate, any recording, monitoring, or reporting requirements that are time-specific shall be in accordance with the effective date of the permit, which defines day one.
[Rule 62-213.440, F.A.C.]

10. The permittee shall submit all compliance related notifications and reports required of this permit to the Department's Southeast District office and the Dade County Department of Environmental Resources Management (DERM; also, known as the "designee") office at the following address:

Department of Environmental Protection
Southeast District
400 North Congress Avenue
West Palm Beach, Florida 33401
Telephone: 561/681-6600
Fax: 561/681-6755

Dade County Dept. of Environmental Resources Management
Air Section
33 Southwest Second Avenue, Suite 900
Miami, Florida 33130-1540
Telephone: 305/372-6925
Fax: 305/372-6954

[PSD-FL-006(D)]

11. Any reports, data, notifications, certifications, required to be sent to the United States Environmental Protection Agency, Region 4, should be sent to:

United States Environmental Protection Agency, Region 4
Air, Pesticides & Toxics Management Division
Air & EPCRA Enforcement Branch
Air Enforcement Section
61 Forsyth Street
Atlanta, Georgia 30303
Telephone: 404/562-9155
Fax: 404/562-9163

12. Statement of Compliance. The annual statement of compliance pursuant to Rule 62-213.440(3)(a)2., F.A.C., shall be submitted within 60 (sixty) days after the end of the calendar year.
[Rule 62-213.440(3)(a)2., F.A.C.]

Section III. Emissions Units and Conditions.

Subsection A. This section addresses the following emissions unit(s).

Reserved.

Subsection B. This section addresses the following emissions unit(s).

E.U./Facility ID Nos.	Brief Description
-001/Unit 1	Refuse Derived Fuel (RDF) Spreader Stoker Combustor & Auxiliary Burners
-002/Unit 2	RDF Spreader Stoker Combustor & Auxiliary Burners
-003/Unit 3	RDF Spreader Stoker Combustor & Auxiliary Burners
-004/Unit 4	RDF Spreader Stoker Combustor & Auxiliary Burners

{Permitting Note: These emissions units are allowed to burn refuse derived fuel as the main fuel. ***Refuse Derived Fuel*** means a type of municipal solid waste produced by processing municipal solid waste through shredding and size classification. This includes all classes of refuse derived fuel including low-density fluff refuse-derived fuel through densified refuse-derived fuel and pelletized refuse-derived fuel. ***Refuse-derived fuel stoker*** means a steam generating unit that combusts refuse-derived fuel in a semisuspension firing mode using air fed distributors. Each of the four refuse derive waste combustors (RDFs) produce at the manufacturer's maximum continuous rating (MCR) steam flow of 180,000 lbs/hr (at 625 psig and 730 ^{0}F). Short term capacity is limited by limiting steam production, which effectively limits heat input.}.
[PSD-FL-006(D); and, 40 CFR 60.51b]

ARMS emissions units Nos. -001, -002, -003 and -004 are identical rebuilt refuse derived fuel (RDF) spreader stoker combustors with Zurn attributes designated as Units 1, 2, 3 and 4, respectively. RDF is burned in suspension and on a grate with a primary and secondary air system to provide air in varying proportions to promote the proper combustion. Units 1 thru 4 began commercial operation January 1, 1982. Particulate matter emissions from Units 1, 2, 3 and 4 will be controlled fabric filters, while CO and NO_X emissions are controlled by good combustion practices. Following retrofitting to comply with the NSPS, 40 CFR 60, Subparts Cb and Eb, each boiler will have a maximum capacity of 648 tons of RDF per day, as determined by a rolling 12-month average. The design rated (nominal) capacity for each emissions unit is 27 tons/hour of RDF. Auxiliary burners associated with each RDF combustor will be permitted to fire propane and natural gas at a maximum heat input of 80 MMBtu/hr for startup, shutdown and malfunction, and at other times when necessary and consistent with good combustion practices. No. 2 fuel oil (with a maximum sulfur content of 0.08%, by weight) was allowed to be used for startup only in PA 77-08, but the facility has chosen not to use fuel oil in the auxiliary burners to date. Each unit will be allowed to produce at the manufacturer's maximum continuous rating (MCR) of 180,000 lbs/hr, at 625 psig and 730 ^{0}F, when firing RDF. Combustion control systems will be installed for carbon monoxide and nitrogen oxides, as necessary, to meet the emissions limits. Continuous monitoring devices for combustion and process parameters and SO_2, NOx and CO will be installed to improve combustion efficiency and control. The air pollution control equipment will consist of a spray dryer absorber (for acid gases), an activated carbon or comparable reactant injection system (for mercury and dioxin), and a fabric filter baghouse (for particulate matter and heavy metals). CO and NO_X emissions are currently controlled by good combustion practices; but, for NO_X, a selective non-catalytic reduction system will be installed, if it is necessary to comply with 40 CFR 60, Subpart Cb. In addition, new stacks and flue gas handling systems will replace the existing stacks and flue gas handling systems (Units 1 and 2 will each have a separate flue and share a common stack: Stack height = 250 feet, exit diameter = 8.5 feet, exit temperature = 270 °F, actual volumetric flow rate = 177,200 acfm, and maximum dry standard volumetric flow rate = 109,054 dscfm; and, Units 3 and 4 will each have a separate flue and share a common stack: Stack height = 250 feet, exit diameter = 8.5 feet, exit temperature = 300 °F, actual volumetric flow rate = 227,000 acfm, and maximum dry standard volumetric flow rate = 88,250 dscfm). Two 38.5 MW (gross) turbine-generators (using the steam from the four boilers) will supply the in-plant electrical load and the balance of the electricity generated will be sold. Odors will be minimized by keeping the truck access doors closed during non-use; and, a negative pressure will be maintained on the garbage tipping floor and the air collected will be used as combustion air.

{Permitting notes. These emissions units are regulated under NSPS - 40 CFR 60, Subpart Cb, Emissions Guidelines and Compliance Times for Large Municipal Waste Combustors That Are Constructed on or Before September 20, 1994, adopted and incorporated by reference, subject to provisions, in Rule 62-204.800(8)(b), F.A.C.; NSPS - 40 CFR 60, Subpart E, Standards of Performance for Incinerators, adopted and incorporated by reference in Rule 62-204.800(7), F.A.C.; NSPS - 40 CFR 60, Subpart Eb, Standards of Performance for Large Municipal Waste Combustors That Are Constructed, Modified or Reconstructed on or Before September 20, 1994, adopted and incorporated by reference in Rule 62-204.800(7), F.A.C.; Rule 62-212.400(5), F.A.C., Prevention of Significant Deterioration (PSD) (PSD-FL-006 and PSD-FL-006(A thru D); Rule 62-212.400(6), F.A.C., Best Available Control Technology (BACT); Rule 62-296.401(2), F.A.C., Incinerators; Rule 62-296.416, F.A.C., Waste-to-Energy Facilities; and, PA 77-08 & 77-08(A, B, & C). Also, please note that conditions in 40 CFR 60, Subpart Cb, reference requirements that are contained in 40 CFR 60, Subpart Eb.}

The following specific conditions, unless revised, apply to the emissions unit(s) listed above:

General

B.1. The Standards of Performance for New Stationary Sources adopted by reference in Rule 62-204.800(7), F.A.C., the Emission Guidelines for Existing Sources adopted by reference in Rule 62-204.800(8), F.A.C., and the National Emissions Standards for Hazardous Air Pollutants adopted by reference in Rule 62-204.800(9), F.A.C. shall be controlling over other standards in the air pollution rules of the Department except that any emissions limiting standard contained in or determined pursuant to the air pollution rules of the Department which is more stringent than one contained in a Standard of Performance, an Emission Guideline, or a National Emission Standard, or which regulates emissions of pollutants or emissions units not regulated by an applicable Standard of Performance, Emission Guideline, or National Emission Standard, shall apply.
[Rules 62-204.800(7)(c), (8)(a)1., and (9)(c), F.A.C.]

B.2. Definitions. For the purposes of Rules 62-204.800(7), (8), and (9), F.A.C., the definitions contained in the various provisions of 40 CFR Parts 60 and 61, adopted herein shall apply except that the term "Administrator" when used in 40 CFR Parts 60 and 61, shall mean the Secretary or the Secretary's designee except as noted in 40 CFR 61.157.
[40 CFR 60.2; and, Rules 62-204.800(7)(a), (8)(a)2., and, (9)(a), F.A.C.]

B.3. Definitions - Subpart Cb. For purposes of Rule 62-204.800(8)(b), F.A.C., the definitions in 40 CFR 60.51b shall apply except for the term "municipal waste combustor plant", which shall have the same meaning as defined in 40 CFR 60.31b.
[Rule 62-204.800(8)(b)2., F.A.C.]

B.4. Circumvention. No owner or operator subject to the provisions of 40 CFR 60 shall build, erect, install, or use any article, machine, equipment or process, the use of which conceals an emission which would otherwise constitute a violation of an applicable standard. Such concealment includes, but is not limited to, the use of gaseous diluents to achieve compliance with an opacity standard or with a standard which is based on the concentration of a pollutant in the gases discharged to the atmosphere.
[40 CFR 60.12]

B.5. Each emissions unit shall have a metal name plate affixed in a conspicuous place on the shell showing manufacturer, model number, type waste, rated capacity, and certification number.
[PA 77-08; and, PSD-FL-006(D)]

B.6. The height of the boiler stacks (2) shall not be less than 250 feet above the ground level at the base of the stack.
[PSD-FL-006(A) & (D)]

B.7. Units 1 thru 4 are subject to the requirements of 40 CFR 60, Subpart E, except that where requirements within this permit are more restrictive, the requirements of this permit shall apply.
[Rule 62-4.070(3), F.A.C.]

Essential Potential to Emit (PTE) Parameters

B.8. Capacity.
(1) RDF Charging Rate and Heat Input. The design rated (nominal) capacity of each emissions unit is 27 tons/hour of RDF. The maximum charging rate of each emissions unit is 648 tons/day of RDF and other permitted fuels, as determined by a rolling 12-month average (see specific conditions **B.12.** and **B.107.**).
(2) Facility's Municipal Solid Waste Processing Rates. The facility is permitted to process a maximum of 3,000 tons/day, 18,000 tons/wk, and 936,000 tons/yr of RDF.
(3) Biomass Fuel Preparation System. The biomass fuel preparation system is allowed to process up to 400,000 tons/yr of the bulky solid waste into biomass, which will be either transported off-site for use in biomass-fired cogeneration units or combusted on-site.
(4) Steam Flow. Each boiler pair shall not exceed an average of 180,000 pounds of steam produced per hour per unit, based on a 24-hr block averaged measurement.
(5) Load Level. Unit load means the steam load of the municipal waste combustor (MWC) measured as specified in 40 CFR 60.58(i)(6). Compliance with load level requirements shall be determined by a steam meter using ASME Power Test Code for Steam Generating Units, Power Test Code 4.1, section 4 (see 40 CFR 60.58b(i)(6)(ii) & (iii). Each MWC unit shall not operate at a load level greater than 110 percent of the unit's "maximum demonstrated unit load", based on a 4-hour block averaged measurements of steam flow. The "maximum demonstrated unit load" is defined by specific condition B.10. (see specific condition **B.10.**).
(6) The procedures specified in paragraphs (a) and (b) shall be used for calculating municipal waste combustor unit capacity as defined under 40 CFR 60.51b.

(a) For municipal waste combustor units capable of combusting municipal solid waste continuously for a 24-hour period, municipal waste combustor unit capacity shall be calculated based on 24 hours of operation at the maximum charging rate. The maximum charging rate shall be determined as specified in paragraphs (i) and (ii) as applicable.

(i) For combustors that are designed based on heat capacity, the maximum charging rate shall be calculated based on the maximum design heat input capacity of the unit and a heating value of 12,800 kilojoules per kilogram for combustors firing refuse-derived fuel and a heating value of 10,500 kilojoules per kilogram for combustors firing municipal solid waste that is not refuse-derived fuel.

(ii) For combustors that are not designed based on heat capacity, the maximum charging rate shall be the maximum design charging rate.

(b) For batch feed municipal waste combustor units, municipal waste combustor unit capacity shall be calculated as the maximum design amount of municipal solid waste that can be charged per batch multiplied by the maximum number of batches that could be processed in a 24-hour period. The maximum number of batches that could be processed in a 24-hour period is calculated as 24 hours

divided by the design number of hours required to process one batch of municipal solid waste, and may include fractional batches (e.g., if one batch requires 16 hours, then 24/16, or 1.5 batches, could be combusted in a 24-hour period). For batch combustors that are designed based on heat capacity, the design heating value of 12,800 kilojoules per kilogram for combustors firing refuse-derived fuel and a heating value of 10,500 kilojoules per kilogram for combustors firing municipal solid waste that is not refuse-derived fuel shall be used in calculating the municipal waste combustor unit capacity.
[40 CFR 60.31b and 40 CFR 60.58b(j); Rules 62-4.160(2) and 62-210.200(PTE), F.A.C.; and, PSD-FL-006(D)]

B.9. Emissions Unit Operating Rate Limitation After Testing. See specific condition **B.70.**
[Rule 62-297.310(2), F.A.C.]

B.10. Maximum Demonstrated Municipal Waste Combustor Unit Load. Maximum demonstrated municipal waste combustor unit load means the highest 4-hour arithmetic average municipal waste combustor unit load achieved during four consecutive hours during the most recent dioxin/furan performance test demonstrating compliance with the applicable limit for municipal waste combustor organics specified in specific condition **B.34.**
[40 CFR 60.34b(b) and 40 CFR 60.51b]

B.11. Maximum Demonstrated Particulate Matter Control Device Temperature. Maximum demonstrated particulate matter control device temperature means the highest 4-hour arithmetic average flue gas temperature measured at the particulate matter control device inlet during four consecutive hours during the most recent dioxin/furan performance test demonstrating compliance with the applicable limit for municipal waste combustor organics specified in specific condition **B.34.**
[40 CFR 60.34b(b) and 40 CFR 60.51b]

B.12. Methods of Operation - Fuels.
(1) Refuse Derived Fuel. The primary fuel for Units 1 thru 4 is RDF, including the items and materials that fit within the definition of MSW contained in either 40 CFR 60.51b or Section 403.706(5), F.S.
(2) Unauthorized Fuel. Subject to the limitations contained in this permit, the authorized fuels for the facility also include the other solid wastes that are not MSW, which are described in (4) thru (7), below. However, the facility

(a) shall not burn:
1. those materials that are prohibited by state or federal law;
2. those materials that are prohibited by this permit;
3. lead acid batteries;
4. hazardous waste;
5. nuclear waste;
6. radioactive waste;
7. sewage sludge;
8. used oil, **except for what is generated on-site**;
9. explosives; or,
10. beryllium-containing waste, as defined in 40 CFR 61, Subpart C; and,

(b) shall not knowingly burn:
1. untreated biomedical waste from biomedical waste generators regulated pursuant to Chapter 64E-16, F.A.C., and from other similar generators (or sources); or,
2. segregated loads of biological waste.

(3) The fuel may be received either as a mixture or as a single-item stream (segregated load) of discarded materials. If the facility intends to use an authorized fuel that is segregated non-MSW material, the fuel shall be either:

(a) well mixed with MSW in the refuse pit; or
(b) alternately charged with MSW in the hopper.

The facility operator shall prepare and maintain records concerning the description and quantities of all segregated loads of non-MSW material which are received and used as fuel at the facility, and subject to a percentage weight limitation, below (see 5, 6 and 7). For the purposes of this permit, a segregated load is defined to mean a container or truck that is almost completely or exclusively filled with a single item or homogeneous composition of waste material, as determined by visual observation.

(4) Other Solid Waste. Subject to the conditions and limitations contained in this permit, the following other solid waste may be used as fuel at the facility:

SOLID WASTE FROM ON-SITE OPERATIONS

Used Oil from on-site operations

(a) The constituents and properties of the *on-spec used oil* generate from on-site operations shall comply with the following allowable concentration levels, as stipulated and defined in 40 CFR 279.10 (July 1, 1998 version), which is adopted by reference in Rule 62-730.181, F.A.C.

Constituent/Property	Allowable Concentration
Cadmium	2 ppm maximum
Arsenic	5 ppm maximum
Chromium	10 ppm maximum
Lead	100 ppm maximum
Total Halogens	1000 ppm maximum
Flash Point	100 °F minimum
Polychlorinated Byphenyls (PCBs)	Less than 2 ppm

(b) The heating value of the waste oil shall also be determined during quarterly testing. No more than 0.5 percent of the maximum design heat input rate to the units, on a monthly average, of oily wastes shall be disposed of in the units.

(c) On site generated *on-specification used oil, oily water, oily sludge, spent greases and oily solid waste (such as rags)* burned at this facility shall not be a hazardous waste as defined by Rule 62-730.030, F.A.C., or 40 CFR Part 261 (July 1, 1999 version). These materials shall conform to the standards of 40 CFR 279.11 and 40 CFR 761.20(e). It shall not include fuels or blended fuels consisting in whole or in part of hazardous waste or which include mixture of any solid waste generated from the treatment, storage, or disposal of hazardous waste. The on-spec used oil shall be burned in compliance with Section 403.769(3), F.S.

(d) The on-site generated *on-specification* used oil samples (representative of the material disposed of) shall be analyzed by EPA Recommended Analytical Procedures for Used Oil for the following constituent/property, associated unit, and using the test methods indicated:

Constituent/Property	Unit	Test Method
Cadmium	ppm	EPA SW-846(6010)
Arsenic	ppm	EPA SW-846(6010)
Chromium	ppm	EPA SW-846(6010)
Lead	ppm	EPA SW-846(6010)
Total Halogens	ppm	EPA SW-846(9252)
Sulfur	percent	ASTM D129 or ASTM D1552
Flash Point	degree F	EPA SW-846(1010)
Heat of Combustion	Btu/gal	ASTM D240
Density	lbs/gal	
Polychlorinated Byphenyls (PCB's)	ppm	EPA SW-846(0010) and EPA 680
Ash		

NOTE: Other test methods may be used only after receiving written prior approval from the Department.

SOLID WASTE FROM OFF-SITE OPERATIONS

(a) Confidential, proprietary or special documents (including but not limited to business records, lottery tickets, event tickets, coupons and microfilm);
(b) Contraband which is being destroyed at the request of appropriately authorized local, state or federal governmental agencies, provided that such material is not an explosive, a propellant, a hazardous waste, or otherwise prohibited at the facility. For the purposes of this section, contraband includes but is not limited to drugs, narcotics, fruits, vegetables, plants, counterfeit money, and counterfeit consumer goods;
(c) Wood pallets, clean wood, and land clearing debris;
(d) Packaging materials and containers;
(e) Clothing, natural and synthetic fibers, fabric remnants, and similar debris, including but not limited to aprons and gloves; or
(f) Rugs, carpets, and floor coverings, but not asbestos-containing materials or polyethylene or polyurethane vinyl floor coverings.

(5) Waste Tires. Subject to the conditions and limitations contained in this permit, waste tires may be used as fuel at the facility. The total quantity of waste tires received as segregated loads and burned at the facility shall not exceed 3%, by weight, of the facility's total fuel. Compliance with this limitation shall be determined on a calendar monthly basis in accordance with specific condition **B.108.**, below.
(6) Biomass Fuel. Subject to the conditions and limitations contained in this permit, biomass fuel may be burned at this facility (authorized fuel that is not MSW material). The total quantity of biomass material received as segregated load and burned in the combustion units shall not exceed 5%, by weight, of the facility's total fuel. Compliance with this limitation shall be determined on a calendar monthly basis in accordance with specific condition **B.108.**, below.

(7) Other Solid Waste/Segregated Loads. Subject to the conditions and limitations contained in this permit, the following other solid waste materials may be used as fuel at the facility (i.e. the following are authorized fuels that are non-MSW material). The total quantity of the following non-MSW material received as segregated loads and burned at the facility shall not exceed 5%, by weight, of the facility's total fuel. Compliance with this limitation shall be determined by using a calendar monthly basis in accordance with specific condition **B.108.**, below.

(a) Construction and demolition debris.
(b) Oil spill debris from aquatic, coastal, estuarine or river environments. Such items or materials include but are not limited to rags, wipes, and absorbents.
(c) Items suitable for human, plant or domesticated animal use, consumption or application where the item's shelf-life has expired or the generator wishes to remove the items from the market. Such items or materials include but are not limited to off-specification or expired consumer products, pharmaceuticals, medications, health and personal care products, cosmetics, foodstuffs, nutritional supplements, returned goods, and controlled substances.
(d) Consumer-packaged products intended for human or domesticated animal use or application but not consumption. Such items or materials include but are not limited to carpet cleaners, household or bathroom cleaners, polishes, waxes and detergents.
(e) Waste materials that:
  (i) are generated in the manufacture of items in categories (c) or (d), above and are functionally or commercially useless (expired, rejected or spent); or
  (ii) are not yet formed or packaged for commercial distribution. Such items or materials must be substantially similar to other items or materials routinely found in MSW.
(f) Waste materials that contain oil from:
  (i) the routine cleanup of industrial or commercial establishments and machinery; or
  (ii) spills of virgin or used petroleum products. Such items or materials include but are not limited to rags, wipes, and absorbents.
(g) Used oil and used oil filters. Used oil containing a PCB concentration equal or greater than 50 ppm shall not be burned, pursuant to the limitations of 40 CFR 761.20(e).
(h) Waste materials generated by manufacturing, industrial or agricultural activities, provided that these items or materials are substantially similar to items or materials that are found routinely in MSW, subject to prior approval of the Department.

(8) Other fuels or wastes shall not be burned in the emissions units without prior specific written approval of the Secretary of the Department of Environmental Protection.
[Rules 62-4.160(2), 62-210.200, and 62-213.440(1), F.A.C.; PSD-FL-006(D); and, PA 77-08]

B.13. Auxiliary Burners. Auxiliary burners for each emissions unit shall be fired only with propane or natural gas fuel during startups, shutdowns and malfunctions, and at other times when necessary and consistent with good combustion practices. The maximum heat input shall not exceed 80 MMBtu/hr per burner.
[PSD-FL-006(D)]

B.14. Hours of Operation. Each emissions unit is allowed to operate continuously, i.e., 8,760 hrs/yr.
[Rule 62-210.200(PTE), F.A.C.; and, PSD-FL-006(D)]

Operating Practices and Requirements

B.15. No owner or operator of an affected facility shall cause such facility to operate at a load level greater than 110 percent of the maximum demonstrated municipal waste combustor unit load as defined in specific condition **B.10.**, except as specified below. The averaging time is specified in specific condition **B.18.**
(1) During the annual dioxin/furan performance test and the two weeks preceding the annual dioxin/furan performance test, no municipal waste combustor unit load limit is applicable.
(2) The municipal waste combustor unit load limit may be waived in accordance with permission granted by the Administrator or delegated State regulatory authority for the purpose of evaluating system performance, testing new technology or control technologies, diagnostic testing, or related activities for the purpose of improving facility performance or advancing the state-of-the-art for controlling facility emissions.
[40 CFR 60.34b(b) and 40 CFR 60.53b(b)]

B.16. Control Device Inlet Temperature. No owner or operator of an affected facility shall cause such facility to operate at a temperature, measured at the particulate matter control device inlet, exceeding 17° C above the maximum demonstrated particulate matter control device temperature as defined in specific condition **B.11.**, except as specified below. The averaging time is specified in specific condition **B.18.** These requirements apply to each particulate matter control device utilized at the affected facility.
(1) During the annual dioxin/furan performance test and the two weeks preceding the annual dioxin/furan performance test, no particulate matter control device temperature limitations are applicable.
(2) The particulate matter control device temperature limits may be waived in accordance with permission granted by the Administrator or delegated State regulatory authority for the purpose of evaluating system performance, testing new technology or control technologies, diagnostic testing, or related activities for the purpose of improving facility performance or advancing the state-of-the-art for controlling facility emissions.
[40 CFR 60.34b(b) and 40 CFR 60.53b(c)]

B.17. Control Device Inlet Temperature. Except during a malfunction, the maximum flue gas temperature at the final particulate matter control device inlet, during the combustion of RDF, shall not exceed 30 °F above the maximum temperature measured at the particulate matter control device inlet during the most recent mercury compliance test under which the facility was found to be in compliance with the mercury emission limit specified in specific condition **B.27.**, based on a 4-hour block arithmetic average. If the maximum flue gas temperature standard is exceeded during a malfunction, then up to 3 hours of that malfunction may be excluded from the 4-hour block arithmetic average.
[PSD-FL-006(A) & (D)]

B.18. Operating Requirements. The procedures specified in paragraphs (1) through (12) shall be used for determining compliance with the operating requirements under 40 CFR 60.53b.
(1) Compliance with the carbon monoxide emission limits in 40 CFR 60.53b(a) shall be determined using a 4-hour block arithmetic average for all types of affected facilities except mass burn rotary waterwall municipal waste combustors and refuse-derived fuel stokers.
(2) For affected mass burn rotary waterwall municipal waste combustors and refuse-derived fuel stokers, compliance with the carbon monoxide emission limits in 40 CFR 60.53b(a) shall be determined using a 24-hour daily arithmetic average.

(3) The owner or operator of an affected facility shall install, calibrate, maintain, and operate a continuous emission monitoring system for measuring carbon monoxide at the combustor outlet and record the output of the system and shall follow the procedures and methods specified in paragraphs (i) through (iii).

(i) The continuous emission monitoring system shall be operated according to Performance Specification 4A in Appendix B of 40 CFR 60.

(ii) During each relative accuracy test run of the continuous emission monitoring system required by Performance Specification 4A in Appendix B of 40 CFR 60, carbon monoxide and oxygen (or carbon dioxide) data shall be collected concurrently (or within a 30- to 60-minute period) by both the continuous emission monitors and the test methods specified in paragraphs (A) and (B).

(A) For carbon monoxide, EPA Reference Method 10, 10A, or 10B shall be used.

(B) For oxygen (or carbon dioxide), EPA Reference Method 3, 3A, or 3B, as applicable shall be used.

(iii) The span value of the continuous emission monitoring system shall be 125 percent of the maximum estimated hourly potential carbon monoxide emissions of the municipal waste combustor unit.

(4) The 4-hour block and 24-hour daily arithmetic averages specified in paragraphs (1) and (2) shall be calculated from 1-hour arithmetic averages expressed in parts per million by volume corrected to 7 percent oxygen (dry basis). The 1-hour arithmetic averages shall be calculated using the data points generated by the continuous emission monitoring system. At least two data points shall be used to calculate each 1-hour arithmetic average.

(5) The owner or operator of an affected facility may request that compliance with the carbon monoxide emission limit be determined using carbon dioxide measurements corrected to an equivalent of 7 percent oxygen. The relationship between oxygen and carbon dioxide levels for the affected facility shall be established as specified in 40 CFR 60.58b(b)(6).

(6) The procedures specified in paragraphs (i) through (v) shall be used to determine compliance with load level requirements under 40 CFR 60.53b(b).

(i) The owner or operator of an affected facility with steam generation capability shall install, calibrate, maintain, and operate a steam flow meter or a feedwater flow meter; measure steam (or feedwater) flow in kilograms per hour (or pounds per hour) on a continuous basis; and record the output of the monitor. Steam (or feedwater) flow shall be calculated in 4-hour block arithmetic averages.

(ii) The method included in the ``American Society of Mechanical Engineers Power Test Codes: Test Code for Steam Generating Units, Power Test Code 4.1-1964 (R1991)" section 4 (incorporated by reference, see 40 CFR 60.17) shall be used for calculating the steam (or feedwater) flow required under paragraph (6)(i). The recommendations in ``American Society of Mechanical Engineers Interim Supplement 19.5 on Instruments and Apparatus: Application, Part II of Fluid Meters, 6th edition (1971)," chapter 4 (incorporated by reference-see 40 CFR 60.17) shall be followed for design, construction, installation, calibration, and use of nozzles and orifices except as specified in (iii).

(iii) Measurement devices such as flow nozzles and orifices are not required to be recalibrated after they are installed.

(iv) All signal conversion elements associated with steam (or feedwater flow) measurements must be calibrated according to the manufacturer's instructions before each dioxin/furan performance test, and at least once per year.

(7) To determine compliance with the maximum particulate matter control device temperature requirements under 40 CFR 60.53b(c), the owner or operator of an affected facility shall install, calibrate, maintain, and operate a device for measuring on a continuous basis the temperature of the flue gas stream at the inlet to each particulate matter control device utilized by the affected facility. Temperature shall be calculated in 4-hour block arithmetic averages.

(8) The maximum demonstrated municipal waste combustor unit load shall be determined during the initial performance test for dioxins/furans and each subsequent performance test during which compliance with the dioxin/furan emission limit specified in 40 CFR 60.52b(c) is achieved. The maximum demonstrated municipal waste combustor unit load shall be the highest 4-hour arithmetic average load achieved during four consecutive hours during the most recent test during which compliance with the dioxin/furan emission limit was achieved.
(9) For each particulate matter control device employed at the affected facility, the maximum demonstrated particulate matter control device temperature shall be determined during the initial performance test for dioxins/furans and each subsequent performance test during which compliance with the dioxin/furan emission limit specified in 40 CFR 60.52b(c) is achieved. The maximum demonstrated particulate matter control device temperature shall be the highest 4-hour arithmetic average temperature achieved at the particulate matter control device inlet during four consecutive hours during the most recent test during which compliance with the dioxin/furan limit was achieved.
(10) At a minimum, valid continuous emission monitoring system hourly averages shall be obtained as specified in paragraphs (i) and (ii) for 75 percent of the operating hours per day for 90 percent of the operating days per calendar quarter that the affected facility is combusting municipal solid waste.

(i) At least two data points per hour shall be used to calculate each 1-hour arithmetic average.
(ii) At a minimum, each carbon monoxide 1-hour arithmetic average shall be corrected to 7 percent oxygen on an hourly basis using the 1-hour arithmetic average of the oxygen (or carbon dioxide) continuous emission monitoring system data.

(11) All valid continuous emission monitoring system data must be used in calculating the parameters specified under 40 CFR 60.58b(i) even if the minimum data requirements of paragraph (10) are not met. When carbon monoxide continuous emission data are not obtained because of continuous emission monitoring system breakdowns, repairs, calibration checks, and zero and span adjustments, emissions data shall be obtained using other monitoring systems as approved by the Administrator or EPA Reference Method 10 to provide, as necessary, the minimum valid emission data.
(12) Quarterly accuracy determinations and daily calibration drift tests for the carbon monoxide continuous emission monitoring system shall be performed in accordance with Procedure 1 in Appendix F of 40 CFR 60.
[40 CFR 60.38b and 40 CFR 60.58b(i); and, PSD-FL-006(D)]

Operator Training and Certification

B.19. Standards for municipal waste combustor operator training and certification.
(a) No later than the date 6 months after the date of startup of an affected facility or 12 months after State plan approval [40 CFR 60.39b(c)(4)(ii)], whichever is later, each chief facility operator and shift supervisor shall obtain and maintain a current provisional operator certification from either the American Society of Mechanical Engineers [QRO-1-1994 (incorporated by reference - see 40 CFR 60.17 of Subpart A)] or a State certification program.
(b) No later than the date 6 months after the date of startup of an affected facility or 12 months after State plan approval [40 CFR 60.39b(c)(4)(ii)], whichever is later, each chief facility operator and shift supervisor shall have completed full certification or shall have scheduled a full certification exam with either the American Society of Mechanical Engineers [QRO-1-1994 (incorporated by reference - see 40 CFR 60.17 of Subpart A)] or a State certification program.

(c) No owner or operator of an affected facility shall allow the facility to be operated at any time unless one of the following persons is on duty and at the affected facility: A fully certified chief facility operator, a provisionally certified chief facility operator who is scheduled to take the full certification exam according to the schedule specified in paragraph (b), a fully certified shift supervisor, a provisionally certified shift supervisor who is scheduled to take the full certification exam according to the schedule specified in paragraph (b).

(1) The requirement specified in paragraph (c) shall take effect 6 month after the date of startup of the affected facility or 12 months after State plan approval [40 CFR 60.39b(c)(4)(ii)], whichever is later.

(2) If one of the persons listed in paragraph (c) must leave the affected facility during their operating shift, a provisionally certified control room operator who is onsite at the affected facility may fulfill the requirement in paragraph (c).

(d) All chief facility operators, shift supervisors, and control room operators at affected facilities must complete the EPA or State municipal waste combustor operator training course no later than the date 6 months after the date of startup of the affected facility, or by 12 months after State plan approval [40 CFR 60.39b(c)(4)(iii)], whichever is later.

(e) The owner or operator of an affected facility shall develop and update on a yearly basis a site-specific operating manual that shall, at a minimum, address the elements of municipal waste combustor unit operation specified in paragraph (e)(1) through (e)(11).

(1) A summary of the applicable standards;
(2) A description of basic combustion theory applicable to a municipal waste combustor unit;
(3) Procedures for receiving, handling, and feeding municipal solid waste;
(4) Municipal waste combustor unit startup, shutdown, and malfunction procedures;
(5) Procedures for maintaining proper combustion air supply levels;
(6) Procedures for operating the municipal waste combustor unit within the standards established;
(7) Procedures for responding to periodic upset or off-specification conditions;
(8) Procedures for minimizing particulate matter carryover;
(9) Procedures for handling ash;
(10) Procedures for monitoring municipal waste combustor unit emissions; and
(11) Reporting and recordkeeping procedures.

(f) The owner or operator of an affected facility shall establish a training program to review the operating manual according to the schedule specified in paragraphs (f)(1) and (f)(2) with each person who has responsibilities affecting the operation of an affected facility including, but not limited to, chief facility operators, shift supervisors, control room operators, ash handlers, maintenance personnel, and crane/load handlers.

(1) Each person specified in paragraph (f) shall undergo initial training no later than the date specified in paragraph (f)(1)(i), (f)(1)(ii), or (f)(1)(iii), whichever is later.
   (i) The date 6 months after the date of startup of the affected facility;
   (ii) The date prior to the day the person assumes responsibilities affecting municipal waste combustor unit operation; or
   (iii) 12 months after State plan approval [40 CFR 60.39b(c)(4)(iii)].
(2) Annually, following the initial review required by paragraph (f)(1).

(g) The operating manual required by paragraph (e) shall be kept in a readily accessible location for all persons required to undergo training under paragraph (f). The operating manual and records of training shall be available for inspection by the EPA or its delegated enforcement agency upon request.

(h) A list of all certified personnel shall be submitted to the Department's Southeast District office and the Dade County's DERM office.

[40 CFR 60.35b, 40 CFR 60.39b(c)(4)(ii) & (iii), and 40 CFR 60.54b; and, PSD-FL-006(D)]

B.20. The requirement specified in 40 CFR 60.54b(d) does not apply to chief operators, shift supervisors, and control room operators who have obtained full certification from the American Society of Mechanical Engineers on or before the date of State plan approval.
[40 CFR 60.39b(c)(4)(iii)(A)]

B.21. The owner or operator of a designated facility may request that the EPA Administrator waive the requirement specified in 40 CFR 60.54b(d) for chief operators, shift supervisors, and control room operators who have obtained provisional certification from the American Society of Mechanical Engineers on or before the date of State plan approval.
[40 CFR 60.39b(c)(4)(iii)(B)]

B.22. The initial training requirements specified in 40 CFR 60.54b(f)(1) shall be completed no later than the date specified in (1), (2), or (3), whichever is later.
(1) The date six (6) months after the date of startup of the affected facility;
(2) Twelve (12) months after State plan approval; or
(3) The date prior to the day when the person assumes responsibilities affecting municipal waste combustor unit operation.
[40 CFR 60.39b(c)(4)(iii)(C)]

Emission Limitations and Standards

Particulate Matter

B.23. Particulate matter (PM) emissions from the baghouse shall not exceed 0.011 grains/dry standard ft^3 (gr/dscf), corrected to 7 percent O_2, dry basis, and 29.0 tons/yr per emissions unit.
[PSD-FL-006(D)]

PM_{10}

B.24. PM emissions less than 10 micron diameter from the baghouse shall not exceed 0.011 gr/dscf, corrected to 7 percent O_2, dry basis, and 29.0 tons/yr per emissions unit.
[PSD-FL-006(D)]

Visible Emissions

B.25. The emission limit for opacity exhibited by the gases discharged to the atmosphere is 10 percent (6-minute block average).
[40 CFR 60.33b(a)(1)(iii); and, PSD-FL-006(D)]

Cadmium

B.26. Cadmium emissions shall not exceed 15 ug/m^3, corrected to 7 percent O_2, dry basis, and 0.027 ton/yr per emissions unit.
[PSD-FL-006(D)]

Mercury

B.27. The maximum emission limits for mercury contained in the gases discharged to the atmosphere per emissions unit are:
(1) 0.070 milligrams per dry standard cubic meter, corrected to 7 percent O_2, dry basis; or,
(2) 15 percent, by weight, of the mercury in the flue gas upstream of the mercury control device (85-percent reduction by weight), whichever is less stringent; and,
(3) 0.080 ton/yr.
[40 CFR 60.33b(a)(3); Rule 62-296.416(3)(a)1., F.A.C.; and, PSD-FL-006(D)]

B.28. Facilities with sulfur dioxide and hydrogen chloride control equipment in place or under construction as of July 1, 1993, and which choose to control mercury emissions through the use of mercury control equipment, shall comply with the mercury emissions limiting standard of Rule 62-296.416(3)(a)1., F.A.C., by July 1, 1995. All other facilities choosing to control mercury emissions through the use of mercury control equipment shall comply with the mercury emissions limiting standard of Rule 62-296.416(3)(a)1., F.A.C., by the date that the facility is required to demonstrate compliance with sulfur dioxide and hydrogen chloride emission limits, which limits are established at Rule 62-204.800(8)(b), F.A.C.
[Rule 62-296.416(3)(a)2., F.A.C.]

B.29. Facilities subject to the mercury emissions limiting standard of Rule 62-296.416(3)(a)1., F.A.C., shall demonstrate individual emissions unit compliance by the compliance date specified in Rule 62-296.416(3)(a)2., F.A.C., and annually thereafter.
[Rule 62-296.416(3)(a)3., F.A.C.]

B.30. Mercury Emissions Inventory. For emissions inventory purposes, all waste-to-energy facilities with charging rates of 40 tons or more per day shall perform annual individual emissions unit mercury emissions tests and report the results to the Department. This testing shall begin during calendar year 1993 and end upon initiation of mercury testing pursuant to Rule 62-296.416(3)(a) or (b), F.A.C.
[Rule 62-296.416(3)(c), F.A.C.]

Lead

B.31. Lead emissions, per emissions unit, shall not exceed 380 ug/m^3, corrected to 7 percent O_2, dry basis; and, 0.44 ton/yr.
[PSD-FL-006(D)]

Sulfur Dioxide

B.32. The emission limits for sulfur dioxide contained in the gases discharged to the atmosphere per emissions unit are:
(1) 29 parts per million by volume, corrected to 7 percent O_2, dry basis; or,
(2) 25 percent of the potential sulfur dioxide emission concentration (75-percent reduction by weight or volume); and,
(3) 214.2 tons/yr.
(4) Compliance with the limits of (1) and (2), above, is based on a 24-hour daily period (i.e., block; midnight to midnight) geometric mean, whichever is less stringent.
[40 CFR 60.33b(b)(3)(i); and, PSD-FL-006(D)]

Hydrogen Chloride

B.33. The emission limits for hydrogen chloride contained in the gases discharged to the atmosphere per emissions unit are:
(1) 25 parts per million by volume, corrected to 7 percent O_2, dry basis; or
(2) 5 percent of the potential hydrogen chloride emission concentration (95-percent reduction by weight or volume), whichever is less stringent; and,
(3) 57.1 tons/yr.
[40 CFR 60.33b(b)(3)(ii); and, PSD-FL-006(D)]

Dioxins/Furans

B.34. The emission limits for dioxins/furans contained in the gases discharged to the atmosphere per emissions unit that do not employ an electrostatic precipitator-based emission control system are 30 nanograms per dry standard cubic meter (total mass of tetra- through octa- chlorinated dibenzo-p-dioxins and dibenzofurans), corrected to 7 percent oxygen; and, 0.000038 ton/yr.
[40 CFR 60.33b(c)(1)(ii); and, PSD-FL-006(D)]

Nitrogen Oxides

B.35. The emission limits for nitrogen oxides contained in the gases discharged to the atmosphere per emissions unit are 250 parts per million by volume, corrected to 7 percent O_2, dry basis, 24-hour daily arithmetic average; and, 614.9 tons/yr. As specified in 40 CFR 60.33b(d)(1), a facility-wide average emissions limit of 230 ppmvd, corrected to 7 percent O_2, 24-hour average, shall be applied in lieu of the per emissions unit limit provided that the conditions of 40 CFR 60.33b(d)(1) are met.
[40 CFR 60.33b(d); and, PSD-FL-006(D)]

Carbon Monoxide

B.36. The emission limits for carbon monoxide contained in the gases discharged to the atmosphere per emissions unit are 200 parts per million by volume, measured at the combustor outlet in conjunction with a measurement of oxygen concentration, corrected to 7 percent O_2, dry basis, 24-hour daily arithmetic average; and, 267.7 tons/yr.
[40 CFR 60.34b(a); and, PSD-FL-006(D)]

Arsenic

B.37. Arsenic emissions, per emissions unit, shall not exceed 9.3 ug/m^3, corrected to 7 percent O_2, dry basis; and, 0.011 ton/yr.
[PSD-FL-006(D)]

Beryllium

B.38. Beryllium emissions, per emissions unit, shall not exceed 0.46 ug/m^3, corrected to 7 percent O_2, dry basis; and, 0.0005 ton/yr.
[PSD-FL-006(D)]

Total Fluorides

B.39. Fluoride emissions, per emissions unit, shall not exceed 840 ug/m^3, corrected to 7 percent O_2, dry basis; and, 0.97 ton/yr.
[PSD-FL-006(D)]

Sulfuric Acid Mist

B.40. Sulfuric acid mist emissions, per emissions unit, shall not exceed 2.1 ppmv, corrected to 7 percent O_2, dry basis; and, 9.8 tons/yr.
[PSD-FL-006(D)]

Volatile Organic Compounds (VOC)

B.41. VOC (hydrocarbons) emissions, per emissions unit, shall not exceed 25 ppmv, corrected to 7 percent O_2, dry basis; and, 19.1 tons/yr. The permittee must furnish to the Department evidence (i.e., test results) that this facility emits less than 100 tons per year of hydrocarbons, or must obtain legally enforceable limits for the hydrocarbon emissions from this facility.
[PSD-FL-006(D)]

Excess Emissions

{Permitting Note: The Excess Emissions Rule at Rule 62-210.700, F.A.C., cannot vary any requirement of a NSPS or NESHAP provision.}

B.42. The opacity standards set forth in 40 CFR 60 shall apply at all times except during periods of startup, shutdown, malfunction, and as otherwise provided in the applicable standard.
[40 CFR 60.11(c)]

B.43. At all times, including periods of startup, shutdown, and malfunction, owners and operators shall, to the extent practicable, maintain and operate any affected facility including associated air pollution control equipment in a manner consistent with good air pollution control practice for minimizing emissions. Determination of whether acceptable operating and maintenance procedures are being used will be based on information available to the Administrator which may include, but is not limited to, monitoring results, opacity observations, review of operating and maintenance procedures, and inspection of the source.
[40 CFR 60.11(d)]

B.44. Startup, Shutdown and Malfunction. The provisions for startup, shutdown, and malfunction are provided in paragraph (1).
(1) The standards under 40 CFR 60, Subpart Cb, as incorporated in Rule 62-204.800, F.A.C., and this permit shall apply at all times except during periods of startup, shutdown, or malfunction. Duration of startup, shutdown, or malfunction periods are limited to two hours in any 24-hour period.
(i) The startup period commences when the affected facility begins the continuous burning of RDF and does not include any warm-up period when the affected facility is combusting natural gas or propane gas and no RDF is being fed to the combustor(s).

(ii) Continuous burning is the continuous, semi-continuous, or batch feeding of RDF for purposes of waste disposal, energy production, or providing heat to the combustion system in preparation for waste disposal or energy production. The use of RDF solely to provide thermal protection of the grate or hearth during the startup period when RDF is not being fed to the grate is not considered to be continuous burning.

(2) A malfunction means:

(a) any unavoidable mechanical and/or electrical failure of air pollution control equipment or process equipment or of a process resulting in operation in an abnormal or unusual manner. [Rule 62-210.200, F.A.C., Definitions]

(b) any sudden, infrequent, and not reasonably preventable failure of air pollution control equipment, process equipment, or a process to operate in a normal or usual manner. Failures that are caused in part by poor maintenance or careless operation are not malfunctions. [40 CFR 60.2, Definitions]

[40 CFR 60.38b and 40 CFR 60.58b(a); Rule 62-210.200, F.A.C., Definitions; 40 CFR 60.2, Definitions; and, PSD-FL-006(D)]

B.45. Excess emissions resulting from startup, shutdown, or malfunction shall be permitted provided that best operational practices to minimize emissions are adhered to and the duration of excess emissions shall be minimized but in no case exceed two hours in a 24-hour period unless specifically authorized by the Department for longer duration.
[Rule 62-210.700(1), F.A.C.; and, PSD-FL-006(D)]

B.46. Excess emissions which are caused entirely or in part by poor maintenance, poor operation, or any other equipment or process failure which may reasonably be prevented during startup, shutdown, or malfunction shall be prohibited.
[Rule 62-210.700(4), F.A.C.; and, PSD-FL-006(D)]

Test Methods and Procedures

{Permitting note: The permittee may stagger its pollutant performance tests throughout the year with prior Department approval.}

B.47. Within 60 days after achieving the maximum production rate at which the affected facility will be operated, but not later than 180 days after initial startup of such facility and at such other times as may be required by the Administrator under section 114 of the Act, the owner or operator of such facility shall conduct performance test(s) and furnish the Administrator a written report of the results of such performance test(s).
[40 CFR 60.8(a)]

B.48. Performance tests shall be conducted and data reduced in accordance with the test methods and procedures contained in each applicable subpart unless the Administrator (1) specifies or approves, in specific cases, the use of a reference method with minor changes in methodology, (2) approves the use of an equivalent method, (3) approves the use of an alternative method the results of which he has determined to be adequate for indicating whether a specific source is in compliance, (4) waives the

requirement for performance tests because the owner or operator of a source has demonstrated by other means to the Administrator's satisfaction that the affected facility is in compliance with the standard, or (5) approves shorter sampling times and smaller sample volumes when necessitated by process variables or other factors. Nothing in this paragraph shall be construed to abrogate the Administrator's authority to require testing under section 114 of the Act.
[40 CFR 60.8(b)]

B.49. Performance tests shall be conducted under such conditions as the Administrator shall specify to the plant operator based on representative performance of the affected facility. The owner or operator shall make available to the Administrator such records as may be necessary to determine the conditions of the performance tests. Operations during periods of startup, shutdown, and malfunction shall not constitute representative conditions for the purpose of a performance test nor shall emissions in excess of the level of the applicable emission limit during periods of startup, shutdown, and malfunction be considered a violation of the applicable emission limit unless otherwise specified in the applicable standard.
[40 CFR 60.8(c)]

B.50. The owner or operator of an affected facility shall provide the Administrator (Department or its designee) at least 30 days prior notice of any performance test, except as specified under other subparts, to afford the Administrator the opportunity to have an observer present.
[40 CFR 60.8(d)]

B.51. The owner or operator of an affected facility shall provide, or cause to be provided, performance testing facilities as follows:
(1) Sampling ports adequate for test methods applicable to such facility. This includes (i) constructing the air pollution control system such that volumetric flow rates and pollutant emission rates can be accurately determined by applicable test methods and procedures and (ii) providing a stack or duct free of cyclonic flow during performance tests, as demonstrated by applicable test methods and procedures.
(2) Safe sampling platform(s).
(3) Safe access to sampling platform(s).
(4) Utilities for sampling and testing equipment.

{Permitting note: See specific condition **B.73.** and Appendix SS-1, Stack Sampling Facilities (version dated 10/7/96) for State of Florida Stack Sampling Requirements.}

[40 CFR 60.8(e)]

B.52. Unless otherwise specified in the applicable subpart, each performance test shall consist of three separate runs using the applicable test method. Each run shall be conducted for the time and under the conditions specified in the applicable standard. For the purpose of determining compliance with an applicable standard, the arithmetic means of results of the three runs shall apply. In the event that a sample is accidentally lost or conditions occur in which one of the three runs must be discontinued because of forced shutdown, failure of an irreplaceable portion of the sample train, extreme meteorological conditions, or other circumstances, beyond the owner or operator's control, compliance may, upon the Administrator's approval, be determined using the arithmetic mean of the results of the two other runs.
[40 CFR 60.8(f)]

B.53. Compliance with the emission limiting standards shall be demonstrated using EPA Reference Methods, as specified in 40 CFR Part 60, Appendix A, or 40 CFR 61, Appendix B. No other test method shall be used unless approval from the Department has been received in writing. Any alternate sampling procedure shall be approved in accordance with Rule 62-279.620, F.A.C. A test protocol shall be submitted to the Department's Bureau of Air Regulation and Southeast District offices and Dade County's DERM office at least 90 days prior to testing.
[PSD-FL-006(A), (B) & (D)]

Particulate Matter and Opacity

B.54. The procedures and test methods specified in paragraphs (1) through (12) shall be used to determine compliance with the emission limits for particulate matter and opacity.
(1) The EPA Reference Method 1 shall be used to select sampling site and number of traverse points.
(2) The EPA Reference Method 3, 3A, or 3B, as applicable shall be used for gas analysis.
(3) The EPA Reference Method 4 shall be used for the moisture content in the stack gases.
(4) The EPA Reference Method 5 shall be used for determining compliance with the particulate matter emission limit. The minimum sample volume shall be 1.7 cubic meters. The probe and filter holder heating systems in the sample train shall be set to provide a gas temperature no greater than 160 $\pm$14 °C. An oxygen or carbon dioxide measurement shall be obtained simultaneously with each Method 5 run.
(5) The owner or operator of an affected facility may request that compliance with the particulate matter emission limit be determined using carbon dioxide measurements corrected to an equivalent of 7 percent oxygen. The relationship between oxygen and carbon dioxide levels for the affected facility shall be established as specified in paragraph 40 CFR 60.58b(b)(6).
(6) As specified under 40 CFR 60.8, all performance tests shall consist of three test runs. The average of the particulate matter emission concentrations from the three test runs is used to determine compliance.
(7) In accordance with paragraphs (8) and (12), EPA Reference Method 9 shall be used for determining compliance with the opacity limit except as provided under 40 CFR 60.11(e)
(8) The owner or operator of an affected facility shall conduct an initial performance test for particulate matter emissions and opacity as required under 40 CFR 60.8.
(9) The owner or operator of an affected facility shall install, calibrate, maintain, and operate a continuous opacity monitoring system for measuring opacity and shall follow the methods and procedures specified in paragraphs (9)(i) through (9)(iv).
(i) The output of the continuous opacity monitoring system shall be recorded on a 6-minute average basis.
(ii) The continuous opacity monitoring system shall be installed, evaluated, and operated in accordance with 40 CFR 60.13.
(iii) The continuous opacity monitoring system shall conform to Performance Specification 1 in Appendix B of 40 CFR 60.
(iv) The initial performance evaluation shall be completed no later than 180 days after the date of the initial startup of the municipal waste combustor unit, as specified under 40 CFR 60.8.
(10) Following the date that the initial performance test for particulate matter is completed or is required to be completed under 40 CFR 60.8 for an affected facility, the owner or operator shall conduct a performance test for particulate matter on an annual basis (no more than 12 calendar months following the previous performance test).
(11) [reserved]

(12) Following the date that the initial performance test for opacity is completed or is required to be completed under 40 CFR 60.8 for an affected facility, the owner or operator shall conduct a performance test for opacity on an annual basis (no more than 12 calendar months following the previous performance test) using the test method specified in paragraph (7).
(13) EPA Reference Method 2 shall be used for determining stack gas velocity and volumetric flow rate.
[40 CFR 60.38b and 40 CFR 60.58b(c); and, PSD-FL-006(B) & (D)]

PM_{10}

B.55. Compliance with the PM_{10} limits shall be demonstrated using EPA Method 201 or 201A during the initial compliance test and annually thereafter. However, if compliance with the PM emission limit in specific condition **B.24.** is met, these tests are not required.
[PSD-FL-006(B) & (D)]

Cadmium, Lead and Mercury

B.56. The procedures and test methods specified in paragraphs (1) and (2) shall be used to determine compliance with the emission limits for cadmium, lead, and mercury.
(1) The procedures and test methods specified in paragraphs (1)(i) through (1)(ix) shall be used to determine compliance with the emission limits for cadmium and lead.

(i) The EPA Reference Method 1 shall be used for determining the location and number of sampling points.
(ii) The EPA Reference Method 3, 3A, or 3B, as applicable, shall be used for flue gas analysis.
(iii) The EPA Reference Method 29 shall be used for determining compliance with the cadmium and lead emission limits.
(iv) An oxygen or carbon dioxide measurement shall be obtained simultaneously with each Method 29 test run for cadmium and lead required under paragraph (1)(iii).
(v) The owner or operator of an affected facility may request that compliance with the cadmium or lead emission limit be determined using carbon dioxide measurements corrected to an equivalent of 7 percent oxygen. The relationship between oxygen and carbon dioxide levels for the affected facility shall be established as specified in paragraph 40 CFR 60.58b(b)(6).
(vi) All performance tests shall consist of a minimum of three test runs conducted under representative full load operating conditions. The average of the cadmium or lead emission concentrations from three test runs or more shall be used to determine compliance.
(vii) Following the date of the initial performance test or the date on which the initial performance test is required to be completed under 40 CFR 60.8, the owner or operator of an affected facility shall conduct a performance test for compliance with the emission limits for cadmium and lead on an annual basis (no more than 12 calendar months following the previous performance test).
(viii)[reserved]
(ix) [reserved]
(x) EPA Reference Method 2 shall be used for determining stack gas velocity and volumetric flow rate.

(2) The procedures and test methods specified in paragraphs (2)(i) through (2)(xi) shall be used to determine compliance with the mercury emission limit.

(i) The EPA Reference Method 1 shall be used for determining the location and number of sampling points.
(ii) The EPA Reference Method 3, 3A, or 3B, as applicable, shall be used for flue gas analysis.
(iii) The EPA Reference Method 29 shall be used to determine the mercury emission concentration. The minimum sample volume when using Method 29 for mercury shall be 1.7 cubic meters.

(iv) An oxygen (or carbon dioxide) measurement shall be obtained simultaneously with each Method 29 test run for mercury required under paragraph (2)(iii).
(v) The percent reduction in the potential mercury emissions (% P_{Hg}) is computed using equation 1:

$[\% P_{Hg}] = [(E_i - E_o)/E_i] \times 100$ **(Equation 1)**

where:

% P_{Hg} = percent reduction of the potential mercury emissions achieved.
E_i = potential mercury emission concentration measured at the control device inlet, corrected to 7 percent oxygen (dry basis).
E_o = controlled mercury emission concentration measured at the mercury control device outlet, corrected to 7 percent oxygen (dry basis).

(vi) All performance tests shall consist of a minimum of three test runs conducted under representative full load operating conditions. The average of the mercury emission concentrations or percent reductions from three test runs or more is used to determine compliance.
(vii) The owner or operator of an affected facility may request that compliance with the mercury emission limit be determined using carbon dioxide measurements corrected to an equivalent of 7 percent oxygen. The relationship between oxygen and carbon dioxide levels for the affected facility shall be established as specified in paragraph 40 CFR 60.58b(b)(6).
(viii)The owner or operator of an affected facility shall conduct an initial performance test for mercury emissions as required under 40 CFR 60.8.
(ix) Following the date that the initial performance test for mercury is completed or is required to be completed under 40 CFR 60.8, the owner or operator of an affected facility shall conduct a performance test for mercury emissions on a annual basis (no more than 12 calendar months from the previous performance test).
(x) [reserved]
(xi) The owner or operator of an affected facility where activated carbon injection is used to comply with the mercury emission limit shall follow the procedures specified in 40 CFR 60.58b(m) (see specific condition **B.111.**) for measuring and calculating carbon usage.
(xii) EPA Reference Method 2 shall be used for determining stack gas velocity and volumetric flow rate.
[40 CFR 60.38b and 40 CFR 60.58b(d); and, PSD-FL-006(B) & (D)]

B.57. Control of Mercury Emissions: Flue Gas Temperature Standard and Carbon Usage Rate.
(4) Flue Gas Temperature Standard. Waste-to-energy facilities choosing to control mercury emissions through the use of post-combustion control equipment designed to remove mercury from flue gases shall comply with the flue gas temperature standard of Rule 62-296.416(4)(a), F.A.C.
(a) Temperature Standard. The flue gas temperature standard set forth in 40 CFR 60.53b(c) (see specific condition **B.16.**), incorporated by reference in Rule 62-204.800, F.A.C., shall apply.
(b) Temperature Monitoring. The temperature monitoring requirements set forth in 40 CFR 60.58b(i) (see specific condition **B.18.**), incorporated by reference in Rule 62-204.800, F.A.C., shall apply.
(5) Carbon Usage Rate. The carbon injection rate operating standard, based on an 8-hour block average, and monitoring requirements set forth in 40 CFR 60.58b(m) (see specific condition **B.111.**), incorporated by reference in Rule 62-204.800, F.A.C., shall apply.
[Rules 62-296.416(3)(d),(4), and (5), F.A.C.; and, PSD-FL-006(D)]

Sulfur Dioxide

B.58. The procedures and test methods specified in paragraphs (1) through (14) shall be used for determining compliance with the sulfur dioxide emission.
(1) The EPA Reference Method 19, section 4.3, shall be used to calculate the daily geometric average sulfur dioxide emission concentration.
(2) The EPA Reference Method 19, section 5.4, shall be used to determine the daily geometric average percent reduction in the potential sulfur dioxide emission concentration.
(3) The owner or operator of an affected facility may request that compliance with the sulfur dioxide emission limit be determined using carbon dioxide measurements corrected to an equivalent of 7 percent oxygen. The relationship between oxygen and carbon dioxide levels for the affected facility shall be established as specified in 40 CFR 60.58b(b)(6).
(4) The owner or operator of an affected facility shall conduct an initial performance test for sulfur dioxide emissions as required under 40 CFR 60.8. Compliance with the sulfur dioxide emission limit (concentration or percent reduction) shall be determined by using the continuous emission monitoring system specified in paragraph (5) to measure sulfur dioxide and calculating a 24-hour daily geometric average emission concentration or a 24-hour daily geometric average percent reduction using EPA Reference Method 19, sections 4.3 and 5.4, as applicable.
(5) The owner or operator of an affected facility shall install, calibrate, maintain, and operate a continuous emission monitoring system for measuring sulfur dioxide emissions discharged to the atmosphere and record the output of the system.
(6) Following the date that the initial performance test for sulfur dioxide is completed or is required to be completed under 40 CFR 60.8, compliance with the sulfur dioxide emission limit shall be determined based on the 24-hour (measured between 12:00 midnight and the following midnight) daily geometric average of the hourly arithmetic average emission concentrations using continuous emission monitoring system outlet data if compliance is based on an emission concentration, or continuous emission monitoring system inlet and outlet data if compliance is based on a percent reduction.
(7) At a minimum, valid continuous monitoring system hourly averages shall be obtained as specified in paragraphs (7)(i) and (7)(ii) for 75 percent of the operating hours per day for 90 percent of the operating days per calendar quarter that the affected facility is combusting municipal solid waste.
(i) At least two data points per hour shall be used to calculate each 1-hour arithmetic average.
(ii) Each sulfur dioxide 1-hour arithmetic average shall be corrected to 7 percent oxygen on an hourly basis using the 1-hour arithmetic average of the oxygen (or carbon dioxide) continuous emission monitoring system data.
(8) The 1-hour arithmetic averages required under paragraph (6) shall be expressed in parts per million corrected to 7 percent oxygen (dry basis) and used to calculate the 24-hour daily geometric average emission concentrations and daily geometric average emission percent reductions. The 1-hour arithmetic averages shall be calculated using the data points required under 40 CFR 60.13(e)(2).
(9) All valid continuous emission monitoring system data shall be used in calculating average emission concentrations and percent reductions even if the minimum continuous emission monitoring system data requirements of paragraph (7) are not met.
(10) The procedures under 40 CFR 60.13 shall be followed for installation, evaluation, and operation of the continuous emission monitoring system.
(11) The initial performance evaluation shall be completed no later than 180 days after the date of initial startup of the municipal waste combustor as specified under 40 CFR 60.8.

(12) The continuous emission monitoring system shall be operated according to Performance Specification 2 in 40 CFR 60 Appendix B.

(i) During each relative accuracy test run of the continuous emission monitoring system required by Performance Specification 2 in 40 CFR 60 Appendix B, sulfur dioxide and oxygen (or carbon dioxide) data shall be collected concurrently (or within a 30- to 60-minute period) by both the continuous emission monitors and the test methods specified in paragraphs (A) and (B).

(A) For sulfur dioxide, EPA Reference Method 6, 6A, or 6C shall be used.

(B) For oxygen (or carbon dioxide), EPA Reference Method 3, 3A, or 3B, as applicable shall be used.

(ii) The span value of the continuous emissions monitoring system at the inlet to the sulfur dioxide control device shall be 125 percent of the maximum estimated hourly potential sulfur dioxide emissions of the municipal waste combustor unit. The span value of the continuous emission monitoring system at the outlet of the sulfur dioxide control device shall be 50 percent of the maximum estimated hourly potential sulfur dioxide emissions of the municipal waste combustor unit.

(13) Quarterly accuracy determinations and daily calibration drift tests shall be performed in accordance with procedure 1 in Appendix F of 40 CFR 60.

(14) When sulfur dioxide emissions data are not obtained because of continuous emission monitoring system breakdowns, repairs, calibration checks, and zero and span adjustments, emissions data shall be obtained by using other monitoring systems as approved by the Administrator or EPA Reference Method 19 to provide, as necessary, valid emissions data for a minimum of 75 percent of the hours per day that the affected facility is operated and combusting municipal solid waste for 90 percent of the days per calendar quarter that the affected facility is operated and combusting municipal solid waste.

[40 CFR 60.38b and 40 CFR 60.58b(e); and, PSD-FL-006(B) & (D)]

Hydrogen Chloride

B.59. The procedures and test methods specified in paragraphs (1) through (8) shall be used for determining compliance with the hydrogen chloride emission limit.

(1) The EPA Reference Method 26 or 26A, as applicable, shall be used to determine the hydrogen chloride emission concentration. The minimum sampling time for Method 26 shall be 1 hour.

(2) An oxygen (or carbon dioxide) measurement shall be obtained simultaneously with each Method 26 test run for hydrogen chloride required by paragraph (1).

(3) The percent reduction in potential hydrogen chloride emissions (% P_{HCl}) is computed using equation 2:

$$[\% P_{HCl}] = [(E_i - E_o)/E_i] \times 100 \qquad \textbf{(Equation 2)}$$

where:

% P_{HCl} = percent reduction of the potential hydrogen chloride emissions achieved.
E_i = potential hydrogen chloride emission concentration measured at the control device inlet, corrected to 7 percent oxygen (dry basis).
E_o = controlled hydrogen chloride emission concentration measured at the control device outlet, corrected to 7 percent oxygen (dry basis).

(4) The owner or operator of an affected facility may request that compliance with the hydrogen chloride emission limit be determined using carbon dioxide measurements corrected to an equivalent of 7 percent oxygen. The relationship between oxygen and carbon dioxide levels for the affected facility shall be established as specified in 40 CFR 60.58b(b)(6).

(5) As specified under 40 CFR 60.8, all performance tests shall consist of three test runs. The average of the hydrogen chloride emission concentrations or percent reductions from the three test runs is used to determine compliance.
(6) The owner or operator of an affected facility shall conduct an initial performance test for hydrogen chloride as required under 40 CFR 60.8.
(7) Following the date that the initial performance test for hydrogen chloride is completed or is required to be completed under 40 CFR 60.8, the owner or operator of an affected facility shall conduct a performance test for hydrogen chloride emissions on an annual basis (no more than 12 calendar months following the previous performance test).
(8) [reserved]
[40 CFR 60.38b and 40 CFR 60.58b(f); and, PSD-FL-006(B) & (D)]

Mercury, Sulfur Dioxide and Hydrogen Chloride

B.60. Testing shall be conducted upstream (removal efficiency for SO_2 and HCl) and downstream (mass emissions) of the applicable control device for the following pollutants, Hg, SO_2 and HCl, if compliance demonstration is based on percent removal efficiency. Soot blowers shall be operated in a mode consistent with normal cleaning requirements of the system during the compliance testing.
[PSD-FL-006(A) & (D)]

Dioxin/Furan

B.61. The procedures and test methods specified in paragraphs (1) through (9) shall be used to determine compliance with the limits for dioxin/furan emissions.
(1) The EPA Reference Method 1 shall be used for determining the location and number of sampling points.
(2) The EPA Reference Method 3, 3A, or 3B, as applicable, shall be used for flue gas analysis.
(3) The EPA Reference Method 23 shall be used for determining the dioxin/furan emission concentration.
(i) The minimum sample time shall be 4 hours per test run.
(ii) An oxygen (or carbon dioxide) measurement shall be obtained simultaneously with each Method 23 test run for dioxins/furans.
(4) The owner or operator of an affected facility shall conduct an initial performance test for dioxin/furan emissions in accordance with paragraph (3), as required under 40 CFR 60.8.
(5) Following the date that the initial performance test for dioxins/furans is completed or is required to be completed under 40 CFR 60.8, the owner or operator of an affected facility shall conduct performance tests for dioxin/furan emissions in accordance with paragraph (3), according to one of the schedules specified in paragraphs (i) through (iii).
(i) For affected facilities, performance tests shall be conducted on an annual basis (no more than 12 calendar months following the previous performance test.)
(ii) [reserved]
(iii) Where all performance tests over a 2-year period indicate that dioxin/furan emissions are less than or equal to 15 nanograms per dry standard cubic meter (total mass) for all affected facilities located within a municipal waste combustor plant, the owner or operator of the municipal waste combustor plant may elect to conduct annual performance tests for one affected facility (i.e., unit) per year at the municipal waste combustor plant. At a minimum, a performance test for dioxin/furan emissions shall be conducted annually (no more than 12 months following the previous performance test) for one affected facility at the municipal waste combustor plant. Each year a different affected facility at the municipal waste combustor plant shall be tested, and the affected facilities at the plant

shall be tested in sequence (e.g., Unit 1, Unit 2, Unit 3, as applicable). If each annual performance test continues to indicate a dioxin/furan emission level less than or equal to 15 nanograms per dry standard cubic meter (total mass), the owner or operator may continue conducting a performance test on only one affected facility per year. If any annual performance test indicates a dioxin/furan emission level greater than 15 nanograms per dry standard cubic meter (total mass), performance tests thereafter shall be conducted annually on all affected facilities at the plant until and unless all annual performance tests for all affected facilities at the plant over a 2-year period indicate a dioxin/furan emission level less than or equal to 15 nanograms per dry standard cubic meter (total mass).

(6) The owner or operator of an affected facility that selects to follow the performance testing schedule specified in paragraph (5)(iii) shall follow the procedures specified in 40 CFR 60 60.59b(g)(4) for reporting the selection of this schedule.

(7) The owner or operator of an affected facility where activated carbon is used to comply with the dioxin/furan emission limits specified in 40 CFR 60.52b(c) or the dioxin/furan emission level specified in paragraph (5)(iii) shall follow the procedures specified in 40 CFR 60.58b(m) for measuring and calculating the carbon usage rate.

(8) The owner or operator of an affected facility may request that compliance with the dioxin/furan emission limit be determined using carbon dioxide measurements corrected to an equivalent of 7 percent oxygen. The relationship between oxygen and carbon dioxide levels for the affected facility shall be established as specified in 40 CFR 60.58b(b)(6).

(9) As specified under 40 CFR 60.8, all performance tests shall consist of three test runs. The average of the dioxin/furan emission concentrations from the three test runs is used to determine compliance.

[40 CFR 60.38b and 40 CFR 60.58b(g); and, PSD-FL-006(B)]

Nitrogen Oxides

B.62. The procedures and test methods specified in paragraphs (1) through (12) shall be used to determine compliance with the nitrogen oxides emission limit for affected facilities under 40 CFR 60.52b(d).

(1) The EPA Reference Method 19, section 4.1, shall be used for determining the daily arithmetic average nitrogen oxides emission concentration.

(2) The owner or operator of an affected facility may request that compliance with the nitrogen oxides emission limit be determined using carbon dioxide measurements corrected to an equivalent of 7 percent oxygen. The relationship between oxygen and carbon dioxide levels for the affected facility shall be established as specified in 40 CFR 60.58b(b)(6).

(3) The owner or operator of an affected facility subject to the nitrogen oxides limit shall conduct an initial performance test for nitrogen oxides as required under 40 CFR 60.8. Compliance with the nitrogen oxides emission limit shall be determined by using the continuous emission monitoring system specified in paragraph (4) for measuring nitrogen oxides and calculating a 24-hour daily arithmetic average emission concentration using EPA Reference Method 19, section 4.1.

(4) The owner or operator of an affected facility subject to the nitrogen oxides emission shall install, calibrate, maintain, and operate a continuous emission monitoring system for measuring nitrogen oxides discharged to the atmosphere, and record the output of the system.

(5) Following the date that the initial performance test for nitrogen oxides is completed or is required to be completed under 40 CFR 60.8, compliance with the emission limit for nitrogen oxides shall be determined based on the 24-hour (measured between 12:00 midnight and the following midnight) daily arithmetic average of the hourly emission concentrations using continuous emission monitoring system outlet data.

(6) At a minimum, valid continuous emission monitoring system hourly averages shall be obtained as specified in paragraphs (i) and (ii) for 75 percent of the operating hours per day for 90 percent of the operating days per calendar quarter that the affected facility is combusting municipal solid waste.

(i) At least 2 data points per hour shall be used to calculate each 1-hour arithmetic average.

(ii) Each nitrogen oxides 1-hour arithmetic average shall be corrected to 7 percent oxygen on an hourly basis using the 1-hour arithmetic average of the oxygen (or carbon dioxide) continuous emission monitoring system data.

(7) The 1-hour arithmetic averages required by paragraph (5) shall be expressed in parts per million by volume (dry basis) and used to calculate the 24-hour daily arithmetic average concentrations. The 1-hour arithmetic averages shall be calculated using the data points required under 40 CFR 60.13(e)(2).

(8) All valid continuous emission monitoring system data must be used in calculating emission averages even if the minimum continuous emission monitoring system data requirements of paragraph (6) are not met.

(9) The procedures under 40 CFR 60.13 shall be followed for installation, evaluation, and operation of the continuous emission monitoring system. The initial performance evaluation shall be completed no later than 180 days after the date of initial startup of the municipal waste combustor unit, as specified under 40 CFR 60.8.

(10) The owner or operator of an affected facility shall operate the continuous emission monitoring system according to Performance Specification 2 in Appendix B of 40 CFR 60 and shall follow the procedures and methods specified in paragraphs(i) and (ii).

(i) During each relative accuracy test run of the continuous emission monitoring system required by Performance Specification 2 of Appendix B of 40 CFR 60, nitrogen oxides and oxygen (or carbon dioxide) data shall be collected concurrently (or within a 30- to 60-minute period) by both the continuous emission monitors and the test methods specified in paragraphs (A) and (B).

(A) For nitrogen oxides, EPA Reference Method 7, 7A, 7C, 7D, or 7E shall be used.

(B) For oxygen (or carbon dioxide), EPA Reference Method 3, 3A, or 3B, as applicable shall be used.

(ii) The span value of the continuous emission monitoring system shall be 125 percent of the maximum estimated hourly potential nitrogen oxide emissions of the municipal waste combustor unit.

(11) Quarterly accuracy determinations and daily calibration drift tests shall be performed in accordance with procedure 1 in Appendix F of 40 CFR 60.

(12) When nitrogen oxides continuous emissions data are not obtained because of continuous emission monitoring system breakdowns, repairs, calibration checks, and zero and span adjustments, emissions data shall be obtained using other monitoring systems as approved by the Administrator or EPA Reference Method 19 to provide, as necessary, valid emissions data for a minimum of 75 percent of the hours per day for 90 percent of the days per calendar quarter the unit is operated and combusting municipal solid waste.

[40 CFR 60.38b and 40 CFR 60.58b(h); and, PSD-FL-006(B) & (D)]

Beryllium

B.63. (a) Unless a waiver of emission testing is obtained under 40 CFR 61.13, each owner or operator required to comply with 40 CFR 61.32(a) shall test emissions from the source according to Method 104 or 29 of Appendix B to 40 CFR 61. EPA Method 104 of Appendix B to 40 CFR 61 is approved by the Administrator as an alternative method for sources subject to 40 CFR 61.32(a). The emission test shall be performed according to the following:

(1) Within 90 days of the effective date in the case of an existing source or a new source which has an initial startup date preceding the effective date; or

(2) Within 90 days of startup in the case of a new source which did not have an initial startup date preceding the effective date.

(b) The Administrator shall be notified at least 30 days prior to an emission test so that he may at his option observe the test.

(c) Samples shall be taken over such a period or periods as are necessary to accurately determine the maximum emissions which will occur in any 24-hour period. Where emissions depend upon the relative frequency of operation of different types of processes, operating hours, operating capacities, or other factors, the calculation of maximum 24-hour-period emissions will be based on that combination of factors which is likely to occur during the subject period and which result in the maximum emissions. No changes in the operation shall be made, which would potentially increase emissions above that determined by the most recent source test, until a new emission level has been estimated by calculation and the results reported to the Administrator.

(d) All samples shall be analyzed and beryllium emissions shall be determined within 30 days after the source test. All determinations shall be reported to the Administrator by a registered letter dispatched before the close of the next business day following such determination.

(e) Records of emission test results and other data needed to determine total emissions shall be retained at the source and made available, for inspection by the Administrator, for a minimum of **5** years.

(f) An initial compliance test is required; and, a compliance test prior to permit renewal is required.

[40 CFR 61.33; Rule 62-213.440(b), F.A.C.; and, PSD-FL-006(B) & (D)]

Total Fluoride

B.64. Compliance with the total fluoride emissions shall be demonstrated using EPA Method 13A or 13B. An initial compliance test is required; and, a compliance test prior to permit renewal is required.
[PSD-FL-006(B) & (D)]

Carbon Monoxide

B.65. See specific condition **B.18.**
[PSD-FL-006(A) & (D)]

Volatile Organic Compounds

B.66. Compliance with the volatile organic compounds limits shall be demonstrated using EPA Method 25; or, EPA Method 25A in conjunction with EPA Method 18.
[PSD-FL-006(D)]

Sulfuric Acid Mist

B.67. Compliance with the sulfuric acid mist emissions limits shall be demonstrated using EPA Method 8. Only an initial compliance test is required.
[PSD-FL-006(B) & (D)]

Arsenic

B.68. Compliance with the arsenic emissions limits shall be demonstrated using EPA Method 108 or 29. Only an initial compliance test is required.
[PSD-FL-006(B) & (D)]

B.69. Required Number of Test Runs. For mass emission limitations, a compliance test shall consist of three complete and separate determinations of the total air pollutant emission rate through the test section of the stack or duct and three complete and separate determinations of any applicable process variables corresponding to the three distinct time periods during which the stack emission rate was measured provided, however, that three complete and separate determinations shall not be required if the process variables are not subject to variation during a compliance test, or if three determinations are not necessary in order to calculate the unit's emission rate. The three required test runs shall be completed within one consecutive five day period. In the event that a sample is lost or one of the three runs must be discontinued because of circumstances beyond the control of the owner or operator, and a valid third run cannot be obtained within the five day period allowed for the test, the Secretary or his or her designee may accept the results of the two complete runs as proof of compliance, provided that the arithmetic mean of the results of the two complete runs is at least 20 percent below the allowable emission limiting standards.
[Rule 62-297.310(1), F.A.C.]

B.70. Operating Rate During Testing. Testing of emissions shall be conducted with the emissions unit operation at permitted capacity, which is defined as 90 to 100 percent of the maximum operation rate allowed by the permit. If it is impracticable to test at permitted capacity, an emissions unit may be tested at less than the minimum permitted capacity; in this case, subsequent emissions unit operation is limited to 110 percent of the test load until a new test is conducted. Once the emissions unit is so limited, operation at higher capacities is allowed for no more than 15 consecutive days for the purpose of additional compliance testing to regain the authority to operate at the permitted capacity.
[Rules 62-297.310(2) & (2)(b), F.A.C.]

B.71. Calculation of Emission Rate. The indicated emission rate or concentration shall be the arithmetic average of the emission rate or concentration determined by each of the three separate test runs unless otherwise specified in a particular test method or applicable rule.
[Rule 62-297.310(3), F.A.C.]

B.72. Applicable Test Procedures.

(a) Required Sampling Time.

1. Unless otherwise specified in the applicable rule, the required sampling time for each test run shall be no less than one hour and no greater than four hours, and the sampling time at each sampling point shall be of equal intervals of at least two minutes.

2. Opacity Compliance Tests. When either EPA Method 9 or DEP Method 9 is specified as the applicable opacity test method, the required minimum period of observation for a compliance test shall be sixty (60) minutes for emissions units which emit or have the potential to emit 100 tons per year or more of particulate matter, and thirty (30) minutes for emissions units which have potential emissions less than 100 tons per year of particulate matter and are not subject to a multiple-valued opacity standard. The opacity test observation period shall include the period during which the highest opacity emissions can reasonably be expected to occur. Exceptions to these requirements are as follows:

a. For batch, cyclical processes, or other operations which are normally completed within less than the minimum observation period and do not recur within that time, the period of observation shall be equal to the duration of the batch cycle or operation completion time.

b. The observation period for special opacity tests that are conducted to provide data to establish a surrogate standard pursuant to Rule 62-297.310(5)(k), F.A.C., Waiver of Compliance Test Requirements, shall be established as necessary to properly establish the relationship between a proposed surrogate standard and an existing mass emission limiting standard.

c. The minimum observation period for opacity tests conducted by employees or agents of the Department to verify the day-to-day continuing compliance of a unit or activity with an applicable opacity standard shall be twelve minutes.

(b) Minimum Sample Volume. Unless otherwise specified in the applicable rule, the minimum sample volume per run shall be 25 dry standard cubic feet.

(c) Required Flow Rate Range. For EPA Method 5 particulate sampling, acid mist/sulfur dioxide, and fluoride sampling which uses Greenburg Smith type impingers, the sampling nozzle and sampling time shall be selected such that the average sampling rate will be between 0.5 and 1.0 actual cubic feet per minute, and the required minimum sampling volume will be obtained.

(d) Calibration of Sampling Equipment. Calibration of the sampling train equipment shall be conducted in accordance with the schedule shown in Table 297.310-1, attached as part of this permit.

(e) Allowed Modification to EPA Method 5. When EPA Method 5 is required, the following modification is allowed: the heated filter may be separated from the impingers by a flexible tube.

[Rule 62-297.310(4), F.A.C.]

B.73. Required Stack Sampling Facilities. When a mass emissions stack test is required, the permittee shall comply with the requirements contained in Appendix SS-1, Stack Sampling Facilities, attached to this permit.

[Rule 62-297.310(6), F.A.C.]

B.74. Frequency of Compliance Tests. The following provisions apply only to those emissions units that are subject to an emissions limiting standard for which compliance testing is required.

(a) General Compliance Testing.

3. The owner or operator of an emissions unit that is subject to any emission limiting standard shall conduct a compliance test that demonstrates compliance with the applicable emission limiting standard prior to obtaining a renewed operation permit. Emissions units that are required to conduct an annual compliance test may submit the most recent annual compliance test to satisfy the requirements of this provision. In renewing an air operation permit pursuant to Rule 62-210.300(2)(a)3.b., c., or d., F.A.C., the Department shall not require submission of emission compliance test results for any emissions unit that, during the year prior to renewal:

a. Did not operate; or

b. In the case of a fuel burning emissions unit, burned liquid and/or solid fuel for a total of no more than 400 hours.

4. During each federal fiscal year (October 1 - September 30), unless otherwise specified by rule, order, or permit, the owner or operator of each emissions unit shall have a formal compliance test conducted for:

a. Visible emissions, if there is an applicable standard;

b. Each of the following pollutants, if there is an applicable standard, and if the emissions unit emits or has the potential to emit: 5 tons per year or more of lead or lead compounds measured as elemental lead; 30 tons per year or more of acrylonitrile; or 100 tons per year or more of any other regulated air pollutant; and

c. Each NESHAP pollutant, if there is an applicable emission standard.

5. An annual compliance test for particulate matter emissions shall not be required for any fuel burning emissions unit that, in a federal fiscal year, does not burn liquid and/or solid fuel, other than during startup, for a total of more than 400 hours.

9. The owner or operator shall notify the Department's Southeast District office and the Dade County's DERM office at least 15 days prior to the date on which each formal compliance test is to begin, of the date, time, and place of each such test, and the test contact person who will be responsible for coordinating and having such test conducted for the owner or operator.

(b) Special Compliance Tests. When the Department's Southeast District office or the Dade County's DERM office, after investigation, has good reason (such as complaints, increased visible emissions or questionable maintenance of control equipment) to believe that any applicable emission standard contained in a Department rule or in a permit issued pursuant to those rules is being violated, it may require the owner or operator of the emissions unit to conduct compliance tests which identify the nature and quantity of pollutant emissions from the emissions unit and to provide a report on the results of said tests to the Department's Southeast District office and the Dade County's DERM office.
(c) Waiver of Compliance Test Requirements. If the owner or operator of an emissions unit that is subject to a compliance test requirement demonstrates to the Department, pursuant to the procedure established in Rule 62-297.620, F.A.C., that the compliance of the emissions unit with an applicable weight emission limiting standard can be adequately determined by means other than the designated test procedure, such as specifying a surrogate standard of no visible emissions for particulate matter sources equipped with a bag house or specifying a fuel analysis for sulfur dioxide emissions, the Department shall waive the compliance test requirements for such emissions units and order that the alternate means of determining compliance be used, provided, however, the provisions of Rule 62-297.310(7)(b), F.A.C., shall apply.
[Rule 62-297.310(7), F.A.C.; PSD-FL-006(D); and, SIP approved]

Compliance With Standards and Maintenance Requirements

B.75. Compliance with standards in 40 CFR 60, other than opacity standards, shall be determined by performance tests established by 40 CFR 60.8, unless otherwise specified in the applicable standard.
[40 CFR 60.11(a)]

B.76. Compliance with opacity standards in 40 CFR 60 shall be determined by conducting observations in accordance with Reference Method 9 in Appendix A, 40 CFR 60, any alternative method that is approved by the Administrator, or as provided in 40 CFR 60.11(e)(5).
[40 CFR 60.11(b)]

B.77. The owner or operator of an affected facility subject to an opacity standard may submit, for compliance purposes, continuous opacity monitoring system (COMS) data results produced during any performance test required under 40 CFR 60.8 in lieu of EPA Method 9 observation data. If an owner or operator elects to submit COMS data for compliance with the opacity standard, he or she shall notify the Administrator of that decision, in writing, at least 30 days before any performance test required under 40 CFR 60.8 is conducted. Once the owner or operator of an affected facility has notified the Administrator to that effect, the COMS data results will be used to determine opacity compliance during subsequent tests required under 40 CFR 60.8 until the owner or operator notifies the Administrator, in writing, to the contrary. For the purpose of determining compliance with the opacity standard during a performance test required under 40 CFR 60.8 using COMS data, the minimum total time of COMS data collection shall be averages of all 6-minute continuous periods within the duration of the mass emission performance test. Results of the COMS opacity determinations shall be submitted along with the results of the performance test required under 60.8. The owner or operator of an affected facility using a COMS for compliance purposes is responsible for demonstrating that the COMS meets the requirements specified in 40 CFR 60.13(c), that the COMS has been properly maintained and operated, and that the resulting data have not been altered in any way. If COMS data results are submitted for compliance with the opacity standard for a period of time during which EPA Method 9 data indicates noncompliance, the EPA Method 9 data will be used to determine opacity compliance.
[40 CFR 60.11(e)(5)]

Monitoring Requirements

B.78. For the purposes of 40 CFR 60.13, all continuous monitoring systems (CMS) required under applicable subparts shall be subject to the provisions of 40 CFR 60.13 upon promulgation of performance specifications for continuous monitoring systems under Appendix B of 40 CFR 60 and, if the continuous monitoring system is used to demonstrate compliance with emission limits on a continuous basis, Appendix F of 40 CFR 60, unless otherwise specified in an applicable subpart or by the Administrator. Appendix F is applicable December 4, 1987.
[40 CFR 60.13(a)]

B.79. Continuous Monitoring Systems. Continuous monitoring systems (CMS) with recorders for the output shall be installed, calibrated, maintained and operated for each emissions unit, subject to approval by the Department, for the following:

a. Flue Gas Temperature (to be located at the inlet to the final particulate matter control device; the monitors shall be calibrated, operated and maintained in accordance with the manufacturers' instructions; and, the monitoring is to be certified by the manufacturer to be accurate within +1 percent of the temperature being measured);
b. Opacity;
c. Oxygen;
d. Carbon Monoxide;
e. Nitrogen Oxides;
f. Sulfur Dioxide (for SO_2, one monitor shall be located upstream of the scrubber and one shall be located downstream of the baghouse, when using percent removal to determine compliance with the SO_2 limits), as specified in 40 CFR 60, Appendix B.
g. Total Steam Production (lbs/hr, pressure, and temperature);
h. Power Generation;
i. Slaked Lime Production/Utilization;
j. Activated Carbon or Mercury Reactant Injection or Usage Rate;
k. Combustion Zone Temperature (as determined by surrogate temperature monitoring at the boiler roof); and,
l. Baghouse Pressure Drop (to be located downstream of the dry lime scrubbers).

The monitoring equipment shall meet the applicable requirements of Chapter 62-297, F.A.C., 40 CFR 60, Appendix F, 40 CFR 60.58b, and 40 CFR 60.13, including certification of each device in accordance with 40 CFR 60, Appendix B, Performance Specifications, and 40 CFR 60.7(a)(5), Notification Requirements. Data on monitoring equipment specifications, manufacturer, type calibration and maintenance requirements, and the proposed location of each monitor shall be provided to the Department's Southeast District office and the Dade County's DERM office for review at least 90 days prior to installation.
[PSD-FL-006(A) & (D)]

B.80. Opacity. If the owner or operator of an affected facility elects to submit continuous opacity monitoring system (COMS) data for compliance with the opacity standard as provided under 40 CFR 60.11(e)(5), he shall conduct a performance evaluation of the COMS as specified in Performance Specification 1, Appendix B, of 40 CFR 60 before the performance test required under 40 CFR 60.8 is conducted. Otherwise, the owner or operator of an affected facility shall conduct a performance evaluation of the COMS or continuous emission monitoring system (CEMS) during any performance test required under 40 CFR 60.8 or within 30 days thereafter in accordance with the applicable performance specification in Appendix B of 40 CFR 60. The owner or operator of an affected facility shall conduct

COMS or CEMS performance evaluations at such other times as may be required by the Administrator under section 114 of the Act.
(1) The owner or operator of an affected facility using a COMS to determine opacity compliance during any performance test required under 60.8 and as described in 40 CFR 60.11(e)(5) shall furnish the Administrator two or, upon request, more copies of a written report of the results of the COMS performance evaluation described in 40 CFR 60.13(c) at least 10 days before the performance test required under 60.8 is conducted.
[40 CFR 60.13(c)(1)]

B.81. (1) CEMS Zero and Span Values. Owners and operators of all continuous emission monitoring systems (CEMS) installed in accordance with the provisions of this 40 CFR Part 60 shall check the zero (or low-level value between 0 and 20 percent of span value) and span (50 to 100 percent of span value) calibration drifts at least once daily in accordance with a written procedure. The zero and span shall, as a minimum, be adjusted whenever the 24-hour zero drift or 24-hour span drift exceeds two times the limits of the applicable performance specifications in Appendix B. The system must allow the amount of excess zero and span drift measured at the 24-hour interval checks to be recorded and quantified, whenever specified. For continuous monitoring systems measuring opacity of emissions, the optical surfaces exposed to the effluent gases shall be cleaned prior to performing the zero and span drift adjustments except that for systems using automatic zero adjustments. The optical surfaces shall be cleaned when the cumulative automatic zero compensation exceeds 4 percent opacity.
(2) Opacity. Unless otherwise approved by the Administrator, the following procedures shall be followed for continuous monitoring systems measuring opacity of emissions. Minimum procedures shall include a method for producing a simulated zero opacity condition and an upscale (span) opacity condition using a certified neutral density filter or other related technique to produce a known obscuration of the light beam. Such procedures shall provide a system check of the analyzer internal optical surfaces and all electronic circuitry including the lamp and photo detector assembly.
[40 CFR 60.13(d)(1) and (2)]

B.82. Except for system breakdowns, repairs, calibration checks, and zero and span adjustments required under 40 CFR 60.13(d), all continuous monitoring systems (CMS) shall be in continuous operation and shall meet minimum frequency of operation requirements as follows:
(1) Opacity. All continuous monitoring systems referenced by 40 CFR 60.13(c) for measuring opacity of emissions shall complete a minimum of one cycle of sampling and analyzing for each successive 10-second period and one cycle of data recording for each successive 6-minute period.
(2) All continuous monitoring systems referenced by 40 CFR 60.13(c) for measuring emissions, except opacity, shall complete a minimum of one cycle of operation (sampling, analyzing, and data recording) for each successive 15-minute period.
[40 CFR 60.13(e)(1) and (2)]

B.83. All continuous monitoring systems (CMS) or monitoring devices shall be installed such that representative measurements of emissions or process parameters from the affected facility are obtained. Additional procedures for location of continuous monitoring systems contained in the applicable Performance Specifications of Appendix B of 40 CFR 60 shall be used.
[40 CFR 60.13(f)]

B.84. When the effluents from a single affected facility or two or more affected facilities subject to the same emission standards are combined before being released to the atmosphere, the owner or operator may install applicable continuous monitoring systems (CMS) on each effluent or on the combined effluent. When the affected facilities are not subject to the same emission standards, separate continuous

monitoring systems shall be installed on each effluent. When the effluent from one affected facility is released to the atmosphere through more than one point, the owner or operator shall install an applicable continuous monitoring system on each separate effluent unless the installation of fewer systems is approved by the Administrator. When more than one continuous monitoring system is used to measure the emissions from one affected facility (e.g., multiple breachings, multiple outlets), the owner or operator shall report the results as required from each continuous monitoring system.
[40 CFR 60.13(g)]

B.85. Opacity. Owners or operators of all continuous monitoring systems for measurement of opacity shall reduce all data to 6-minute averages and for continuous monitoring systems other than opacity to 1-hour averages for time periods as defined in 40 CFR 60.2. Six-minute opacity averages shall be calculated from 36 or more data points equally spaced over each 6-minute period. For continuous monitoring systems other than opacity, 1-hour averages shall be computed from four or more data points equally spaced over each 1-hour period. Data recorded during periods of continuous monitoring system breakdowns, repairs, calibration checks, and zero and span adjustments shall not be included in the data averages computed under this paragraph. An arithmetic or integrated average of all data may be used. The data may be recorded in reduced or non reduced form (e.g., ppm pollutant and percent O_2 or ng/J of pollutant). All excess emissions shall be converted into units of the standard using the applicable conversion procedures specified in subparts. After conversion into units of the standard, the data may be rounded to the same number of significant digits as used in the applicable subparts to specify the emission limit (e.g., rounded to the nearest 1 percent opacity).
[40 CFR 60.13(h)]

B.86. Determination of Process Variables.
(a) Required Equipment. The owner or operator of an emissions unit for which compliance tests are required shall install, operate, and maintain equipment or instruments necessary to determine process variables, such as process weight input or heat input, when such data are needed in conjunction with emissions data to determine the compliance of the emissions unit with applicable emission limiting standards.
(b) Accuracy of Equipment. Equipment or instruments used to directly or indirectly determine process variables, including devices such as belt scales, weight hoppers, flow meters, and tank scales, shall be calibrated and adjusted to indicate the true value of the parameter being measured with sufficient accuracy to allow the applicable process variable to be determined within 10% of its true value.
[Rule 62-297.310(5), F.A.C.]

B.87. CMS for Oxygen or Carbon Dioxide. The owner or operator of an affected facility shall install, calibrate, maintain, and operate a continuous monitoring system and record the output of the system for measuring the oxygen or carbon dioxide content of the flue gas at each location where carbon monoxide, sulfur dioxide, or nitrogen oxides emissions are monitored and shall comply with the test procedures and test methods specified in paragraphs (1) through (7).
(1) The span value of the oxygen (or carbon dioxide) monitor shall be 25 percent oxygen (or carbon dioxide).
(2) The monitor shall be installed, evaluated, and operated in accordance with 40 CFR 60.13.
(3) The initial performance evaluation shall be completed no later than 180 days after the date of initial startup of the affected facility, as specified under 40 CFR 60.8.
(4) The monitor shall conform to Performance Specification 3 in Appendix B of 40 CFR 60 except for section 2.3 (relative accuracy requirement).
(5) The quality assurance procedures of Appendix F of 40 CFR 60 except for section 5.1.1 (relative accuracy test audit) shall apply to the monitor.

(6) If carbon dioxide is selected for use in diluent corrections, the relationship between oxygen and carbon dioxide levels shall be established during the initial performance test according to the procedures and methods specified in paragraphs(i) through(iv). This relationship may be reestablished during performance compliance tests.

(i) The fuel factor equation in Method 3B shall be used to determine the relationship between oxygen and carbon dioxide at a sampling location. Method 3, 3A, or 3B, as applicable, shall be used to determine the oxygen concentration at the same location as the carbon dioxide monitor.

(ii) Samples shall be taken for at least 30 minutes in each hour.

(iii) Each sample shall represent a 1-hour average.

(iv) A minimum of three runs shall be performed.

(7) The relationship between carbon dioxide and oxygen concentrations that is established in accordance with paragraph (6) shall be submitted to the EPA Administrator as part of the initial performance test report and, if applicable, as part of the annual test report if the relationship is reestablished during the annual performance test.

[40 CFR 60.38b and 40 CFR 60.58b(b)]

Recordkeeping and Reporting Requirements

B.88. The owner or operator subject to the provisions of 40 CFR 60 shall furnish the Administrator written notification as follows:

(4) A notification of any physical or operational change to an existing facility which may increase the emission rate of any air pollutant to which a standard applies, unless that change is specifically exempted under an applicable subpart or in 40 CFR 60.14(e). This notice shall be postmarked 60 days or as soon as practicable before the change is commenced and shall include information describing the precise nature of the change, present and proposed emission control systems, productive capacity of the facility before and after the change, and the expected completion date of the change. The Administrator may request additional relevant information subsequent to this notice.

[40 CFR 60.7(a)(4)]

B.89. The owner or operator subject to the provisions of 40 CFR 60 shall maintain records of the occurrence and duration of any startup, shutdown, or malfunction in the operation of an affected facility; any malfunction of the air pollution control equipment; or, any periods during which a continuous monitoring system or monitoring device is inoperative.

[40 CFR 60.7(b)]

B.90. Each owner or operator required to install a continuous monitoring system (CMS) or monitoring device shall submit an excess emissions and monitoring systems performance report (excess emissions are defined in applicable subparts) and/or a summary report form [see 40 CFR 60.7(d)] to the Administrator semiannually, except when: more frequent reporting is specifically required by an applicable subpart; or, the CMS data are to be used directly for compliance determination, in which case quarterly reports shall be submitted; or, the Administrator, on a case-by-case basis, determines that more frequent reporting is necessary to accurately assess the compliance status of the source. All reports shall be postmarked by the 30th day following the end of each calendar half (or quarter, as appropriate). Written reports of excess emissions shall include the following information:

(1) The magnitude of excess emissions computed in accordance with 40 CFR 60.13(h), any conversion factor(s) used, and the date and time of commencement and completion of each time period of excess emissions. The process operating time during the reporting period.

(2) Specific identification of each period of excess emissions that occurs during startups, shutdowns, and malfunctions of the affected facility. The nature and cause of any malfunction (if known), the corrective action taken or preventative measures adopted.
(3) The date and time identifying each period during which the continuous monitoring system was inoperative except for zero and span checks and the nature of the system repairs or adjustments.
(4) When no excess emissions have occurred or the continuous monitoring system(s) have not been inoperative, repaired, or adjusted, such information shall be stated in the report.
[40 CFR 60.7(c)(1), (2), (3), and (4)]

B.91. The summary report form shall contain the information and be in the format shown in Figure 1 (attached) unless otherwise specified by the Administrator. One summary report form shall be submitted for each pollutant monitored at each affected facility.
(1) If the total duration of excess emissions for the reporting period is less than 1 percent of the total operating time for the reporting period and CMS downtime for the reporting period is less than 5 percent of the total operating time for the reporting period, only the summary report form shall be submitted and the excess emission report described in 40 CFR 60.7(c) need not be submitted unless requested by the Administrator.
(2) If the total duration of excess emissions for the reporting period is 1 percent or greater of the total operating time for the reporting period or the total CMS downtime for the reporting period is 5 percent or greater of the total operating time for the reporting period, the summary report form and the excess emission report described in 40 CFR 60.7(c) shall both be submitted.

{See attached Figure 1: Summary Report-Gaseous and Opacity Excess Emission and Monitoring System Performance}
[40 CFR 60.7(d)(1) and (2)]

B.92. (1) Notwithstanding the frequency of reporting requirements specified in 40 CFR 60.7(c), an owner or operator who is required by an applicable subpart to submit excess emissions and monitoring systems performance reports (and summary reports) on a quarterly (or more frequent) basis may reduce the frequency of reporting for that standard to semiannual if the following conditions are met:
(i) For 1 full year (e.g., 4 quarterly or 12 monthly reporting periods) the affected facility's excess emissions and monitoring systems reports submitted to comply with a standard under this part continually demonstrate that the facility is in compliance with the applicable standard;
(ii) The owner or operator continues to comply with all recordkeeping and monitoring requirements specified in 40 CFR 60, Subpart A, and the applicable standard; and
(iii) The Administrator does not object to a reduced frequency of reporting for the affected facility, as provided in 40 CFR 60.7(e)(2).
(2) The frequency of reporting of excess emissions and monitoring systems performance (and summary) reports may be reduced only after the owner or operator notifies the Administrator in writing of his or her intention to make such a change and the Administrator does not object to the intended change. In deciding whether to approve a reduced frequency of reporting, the Administrator may review information concerning the source's entire previous performance history during the required recordkeeping period prior to the intended change, including performance test results, monitoring data, and evaluations of an owner or operator's conformance with operation and maintenance requirements. Such information may be used by the Administrator to make a judgment about the source's potential for noncompliance in the future. If the Administrator disapproves the owner or operator's request to reduce the frequency of reporting, the Administrator will notify the owner or operator in writing within 45 days after receiving notice of the owner or operator's intention. The notification from the Administrator to the owner or operator will specify the grounds on which the disapproval is based. In the absence of a notice of disapproval within 45 days, approval is automatically granted.

(3) As soon as monitoring data indicate that the affected facility is not in compliance with any emission limitation or operating parameter specified in the applicable standard, the frequency of reporting shall revert to the frequency specified in the applicable standard, and the owner or operator shall submit an excess emissions and monitoring systems performance report (and summary report, if required) at the next appropriate reporting period following the noncomplying event. After demonstrating compliance with the applicable standard for another full year, the owner or operator may again request approval from the Administrator to reduce the frequency of reporting for that standard as provided for in 40 CFR 60.7(e)(1) and (e)(2).
[40 CFR 60.7(e)(1), (2), and (3)]

B.93. Any owner or operator subject to the provisions of 40 CFR 60 shall maintain a file of: all measurements, including continuous monitoring system, monitoring device, and performance testing measurements; all continuous monitoring system performance evaluations; all continuous monitoring system or monitoring device calibration checks; adjustments and maintenance performed on these systems or devices; calibration logs for all instruments; and, all other information required by 40 CFR 60 recorded in a permanent form suitable for inspection. The file shall be retained for at least **5 (five)** years following the date of such measurements, maintenance, reports, and records.
[40 CFR 60.7(f); PSD-FL-006(A) & (D); and, Rule 62-213.440(1)(b)2.b., F.A.C.]

B.94. Notification of Construction or Reconstruction. The owner or operator of an affected facility with a capacity to combust greater than 250 tons per day shall submit a notification of construction, which includes the information specified in paragraphs (1) through (4).
(1) Intent to construct.
(2) Planned initial startup date.
(3) The types of fuels that the owner or operator plans to combust in the affected facility.
(4) The municipal waste combustor unit capacity and supporting capacity calculations prepared in accordance with 40 CFR 60.58b(j).
[40 CFR 60.39b and 40 CFR 60.59b(b)]

B.95. The owner or operator of an affected facility subject to the standards under 40 CFR 60.53b, 60.54b, and 60.55b shall maintain records of the information specified in paragraphs (1) through (15), as applicable, for each affected facility for a period of at least 5 years.
(1) The calendar date of each record.
(2) The emission concentrations and parameters measured using continuous monitoring systems as specified under paragraphs (i) and (ii).
(i) The measurements specified in paragraphs (A) through (D) shall be recorded and be available for submittal to the Administrator or review onsite by an inspector.
(A) All 6-minute average opacity levels as specified under 40 CFR 60.58b(c).
(B) All 1-hour average sulfur dioxide emission concentrations as specified under 40 CFR 60.58b(e).
(C) All 1-hour average nitrogen oxides emission concentrations as specified under 40 CFR 60.58b(h).
(D) All 1-hour average carbon monoxide emission concentrations, municipal waste combustor unit load measurements, and particulate matter control device inlet temperatures as specified under 40 CFR 60.58b(i).
(ii) The average concentrations and percent reductions, as applicable, specified in paragraphs (2)(ii)(A) through (2)(ii)(D) shall be computed and recorded, and shall be available for submittal to the Administrator or review on-site by an inspector.

(A) All 24-hour daily geometric average sulfur dioxide emission concentrations and all 24-hour daily geometric average percent reductions in sulfur dioxide emissions as specified under 40 CFR 60.58b(e).

(B) All 24-hour daily arithmetic average nitrogen oxides emission concentrations as specified under 40 CFR 60.58b(h).

(C) All 4-hour block or 24-hour daily arithmetic average carbon monoxide emission concentrations, as applicable, as specified under 40 CFR 60.58b(i).

(D) All 4-hour block arithmetic average municipal waste combustor unit load levels and particulate matter control device inlet temperatures as specified under 40 CFR 60.58b(i).

(3) Identification of the calendar dates when any of the average emission concentrations, percent reductions, or operating parameters recorded under paragraphs (2)(ii)(A) through (2)(ii)(D), or the opacity levels recorded under paragraph (2)(i)(A) are above the applicable limits, with reasons for such exceedances and a description of corrective actions taken.

(4) For affected facilities that apply activated carbon for mercury or dioxin/furan control, the records specified in paragraphs (i) through (v).

(i) The average carbon mass feed rate (in kilograms per hour or pounds per hour) estimated as required under 40 CFR 60.58b(m)(1)(i) during the initial mercury performance test and all subsequent annual performance tests, with supporting calculations.

(ii) The average carbon mass feed rate (in kilograms per hour or pounds per hour) estimated as required under 40 CFR 60.58b(m)(1)(ii) during the initial dioxin/furan performance test and all subsequent annual performance tests, with supporting calculations.

(iii) The average carbon mass feed rate (in kilograms per hour or pounds per hour) estimated for each hour of operation as required under 40 CFR 60.58b(m)(3)(ii), with supporting calculations.

(iv) The total carbon usage for each calendar quarter estimated as specified by 40 CFR 60.58b(m)(3), with supporting calculations.

(v) Carbon injection system operating parameter data for the parameter(s) that are the primary indicator(s) of carbon feed rate (e.g., screw feeder speed).

(5) [Reserved]

(6) Identification of the calendar dates for which the minimum number of hours of any of the data specified in paragraphs (i) through (v) have not been obtained including reasons for not obtaining sufficient data and a description of corrective actions taken.

(i) Sulfur dioxide emissions data;

(ii) Nitrogen oxides emissions data;

(iii) Carbon monoxide emissions data;

(iv) Municipal waste combustor unit load data; and

(v) Particulate matter control device temperature data.

(7) Identification of each occurrence that sulfur dioxide emissions data, nitrogen oxides emissions data (large municipal waste combustors only), or operational data (i.e., carbon monoxide emissions, unit load, and particulate matter control device temperature) have been excluded from the calculation of average emission concentrations or parameters, and the reasons for excluding the data.

(8) The results of daily drift tests and quarterly accuracy determinations for sulfur dioxide, nitrogen oxides, and carbon monoxide continuous emission monitoring systems, as required under Appendix F of this part, procedure 1.

(9) The test reports documenting the results of the initial performance test and all annual performance tests listed in paragraphs (i) and (ii) shall be recorded along with supporting calculations.

(i) The results of the initial performance test and all annual performance tests conducted to determine compliance with the particulate matter, opacity, cadmium, lead, mercury, dioxins/furans, hydrogen chloride, and fugitive ash emission limits.

(ii) For the initial dioxin/furan performance test and all subsequent dioxin/furan performance tests recorded under paragraph (9)(i), the maximum demonstrated municipal waste combustor unit load and maximum demonstrated particulate matter control device temperature (for each particulate matter control device).

(10) [Reserved]

(12) The records specified in paragraphs (i) through (iii).

(i) Records showing the names of the municipal waste combustor chief facility operator, shift supervisors, and control room operators who have been provisionally certified by the American Society of Mechanical Engineers or an equivalent State-approved certification program as required by 40 CFR 60.54b(a) including the dates of initial and renewal certifications and documentation of current certification.

(ii) Records showing the names of the municipal waste combustor chief facility operator, shift supervisors, and control room operators who have been fully certified by the American Society of Mechanical Engineers or an equivalent State-approved certification program as required by 40 CFR 60.54b(b) including the dates of initial and renewal certifications and documentation of current certification.

(iii) Records showing the names of the municipal waste combustor chief facility operator, shift supervisors, and control room operators who have completed the EPA municipal waste combustor operator training course or a State-approved equivalent course as required by 40 CFR 60.54b(d) including documentation of training completion.

(13) Records showing the names of persons who have completed a review of the operating manual as required by 40 CFR 60.54b(f) including the date of the initial review and subsequent annual reviews.

(14) For affected facilities that apply activated carbon for mercury or dioxin/furan control, identification of the calendar dates when the average carbon mass feed rates recorded under (4)(iii) were less than either of the hourly carbon feed rates estimated during performance tests for mercury or dioxin/furan emissions and recorded under paragraphs (4)(i) and (4)(ii), respectively, with reasons for such feed rates and a description of corrective actions taken.

(15) For affected facilities that apply activated carbon for mercury or dioxin/furan control, identification of the calendar dates when the carbon injection system operating parameter(s) that are the primary indicator(s) of carbon mass feed rate (e.g., screw feeder speed) recorded under paragraph (4)(v) are below the level(s) estimated during the performance tests as specified in 40 CFR 60.58b(m)(1)(i) and 40 CFR 60.58b(m)(1)(ii), with reasons for such occurrences and a description of corrective actions taken.

[40 CFR 60.39b and 40 CFR 60.59b(d)]

B.96. The owner or operator of an affected facility shall submit the information specified in paragraphs (1) through (6) in the initial performance test report.

(1) The initial performance test data as recorded under 40 CFR 60.59b(d)(2)(ii)(A) through (d)(2)(ii)(D) for the initial performance test for sulfur dioxide, nitrogen oxides, carbon monoxide, municipal waste combustor unit load level, and particulate matter control device inlet temperature.

(2) The test report documenting the initial performance test recorded under 40 CFR 60.59b(d)(9) for particulate matter, opacity, cadmium, lead, mercury, dioxins/furans, hydrogen chloride, and fugitive ash emissions.

(3) The performance evaluation of the continuous emission monitoring system using the applicable performance specifications in Appendix B of this part.

(4) The maximum demonstrated municipal waste combustor unit load and maximum demonstrated particulate matter control device inlet temperature(s) established during the initial dioxin/furan performance test as recorded under 40 CFR 60.59b(d)(9).

(5) For affected facilities that apply activated carbon injection for mercury control, the owner or operator shall submit the average carbon mass feed rate recorded under 40 CFR 60.59b(d)(4)(i).

(6) For those affected facilities that apply activated carbon injection for dioxin/furan control, the owner or operator shall submit the average carbon mass feed rate recorded under 40 CFR 60.59b(d)(4)(ii). [40 CFR 60.39b and 40 CFR 60.59b(f)]

B.97. Following the first year of municipal combustor operation, the owner or operator of an affected facility shall submit an annual report including the information specified in paragraphs (1) through (4), as applicable, no later than February 1 of each year following the calendar year in which the data were collected (once the unit is subject to permitting requirements under Title V of the Act, the owner or operator of an affected facility must submit these reports semiannually).

(1) A summary of data collected for all pollutants and parameters regulated under this subpart, which includes the information specified in paragraphs (i) through (v).

(i) A list of the particulate matter, opacity, cadmium, lead, mercury, dioxins/furans, hydrogen chloride, and fugitive ash emission levels achieved during the performance tests recorded under 40 CFR 60.59b (d)(9).

(ii) A list of the highest emission level recorded for sulfur dioxide, nitrogen oxides, carbon monoxide, municipal waste combustor unit load level, and particulate matter control device inlet temperature based on the data recorded under 40 CFR 60.59b(d)(2)(ii)(A) through (d)(2)(ii)(D).

(iii) List the highest opacity level measured, based on the data recorded under 40 CFR 60.59b(d)(2)(i)(A).

(iv) The total number of days that the minimum number of hours of data for sulfur dioxide, nitrogen oxides, carbon monoxide, municipal waste combustor unit load, and particulate matter control device temperature data were not obtained based on the data recorded under 40 CFR 60.59b(d)(6).

(v) The total number of hours that data for sulfur dioxide, nitrogen oxides, carbon monoxide, municipal waste combustor unit load, and particulate matter control device temperature were excluded from the calculation of average emission concentrations or parameters based on the data recorded under 40 CFR 60.59b(d)(7).

(2) The summary of data reported under paragraph (1) shall also provide the types of data specified in paragraphs (1)(i) through (1)(vi) for the calendar year preceding the year being reported, in order to provide the Administrator with a summary of the performance of the affected facility over a 2-year period.

(3) The summary of data including the information specified in paragraphs (1) and (2) shall highlight any emission or parameter levels that did not achieve the emission or parameter limits specified under this subpart.

(4) A notification of intent to begin the reduced dioxin/furan performance testing schedule specified in 40 CFR 60.58b(g)(5)(iii) during the following calendar year.

[40 CFR 60.39b and 40 CFR 60.59b(g)]

B.98. The owner or operator of an affected facility shall submit a semiannual report that includes the information specified in paragraphs (1) through (5) for any recorded pollutant or parameter that does not comply with the pollutant or parameter limit specified under this subpart, according to the schedule specified under paragraph (6).

(1) The semiannual report shall include information recorded under 40 CFR 60.59b(d)(3) for sulfur dioxide, nitrogen oxides, carbon monoxide, municipal waste combustor unit load level, particulate matter control device inlet temperature, and opacity.

(2) For each date recorded as required by 40 CFR 60.59b(d)(3) and reported as required by paragraph (1), the semiannual report shall include the sulfur dioxide, nitrogen oxides, carbon monoxide, municipal waste combustor unit load level, particulate matter control device inlet temperature, or opacity data, as applicable, recorded under 40 CFR 60.59b(d)(2)(ii)(A) through (d)(2)(ii)(D) and (d)(2)(i)(A), as applicable.

(3) If the test reports recorded under 40 CFR 56.59b(d)(9) document any particulate matter, opacity, cadmium, lead, mercury, dioxins/furans, hydrogen chloride, and fugitive ash emission levels that were above the applicable pollutant limits, the semiannual report shall include a copy of the test report documenting the emission levels and the corrective actions taken.
(4) The semiannual report shall include the information recorded under 40 CFR 60.59b(d)(15) for the carbon injection system operating parameter(s) that are the primary indicator(s) of carbon mass feed rate.
(5) For each operating date reported as required by paragraph (4), the semiannual report shall include the carbon feed rate data recorded under 40 CFR 60.59b(d)(4)(iii).
(6) Semiannual reports required by this condition shall be submitted according to the schedule specified in paragraphs (i) and (ii).

(i) If the data reported in accordance with paragraphs (1) through (5) were collected during the first calendar half, then the report shall be submitted by August 1 following the first calendar half.

(ii) If the data reported in accordance with paragraphs (1) through (5) were collected during the second calendar half, then the report shall be submitted by February 1 following the second calendar half.

[40 CFR 60.39b and 40 CFR 60.59b(h)]

B.99. All reports specified under 40 CFR 60.59b(a), (b), (c), (f), (g), (h), and (i) shall be submitted as a paper copy, postmarked on or before the submittal dates specified under these paragraphs, and maintained on-site as a paper copy for a period of **5** years.
[40 CFR 60.39b and 40 CFR 60.59b(j); PSD-FL-006(A) & (D); and, Rule 62-213.440, F.A.C.]

B.100. All records specified under 40 CFR 60.59b(d) and (e) shall be maintained onsite in either paper copy or computer-readable format, unless an alternative format is approved by the Administrator.
[40 CFR 60.39b and 40 CFR 60.59b(k)]

B.101. If the owner or operator of an affected facility would prefer a different annual or semiannual date for submitting the periodic reports required by 40 CFR 60.59b(g), (h) and (i), then the dates may be changed by mutual agreement between the owner or operator and the Administrator according to the procedures specified in 40 CFR 60.19(c) of Subpart A of 40 CFR 60.
[40 CFR 60.39b and 40 CFR 60.59b(l)]

B.102. In the case of excess emissions resulting from malfunctions, each owner or operator shall notify the Department's Southeast District office and the Dade County's DERM office in accordance with Rule 62-4.130, F.A.C. A full written report on the malfunctions shall be submitted in a quarterly report, if requested by the Department or its agent.
Rule 62-210.700(6), F.A.C.]

B.103. Submit to the Department's Southeast District office and the Dade County's DERM office a written report of emissions in excess of emission limiting standards for each calendar quarter. The nature and cause of the excess emissions shall be explained. This report does not relieve the owner or operator of the legal liability for violations. All recorded data shall be maintained on file by the Source for a period of **five** years.
[Rule 62-213.440, F.A.C.]

B.104. The owner or operator shall submit excess emission reports to the Department's Southeast District office and the Dade County's DERM office for any calendar quarter during which there are excess emissions from the facility. If there are no excess emissions during the calendar quarter, the owner or operator shall submit a report quarterly stating that no excess emissions occurred during the quarterly reporting period. The report shall include the following:
(a) The magnitude of excess emissions computed in accordance with 40 CFR 60.13(h), any conversion factors used, and the date and time of commencement and completion of each period of excess emissions [40 CFR 60.7(c)(1)].
(b) Specific identification of each period of excess emissions that occurs during startups, shutdowns, and malfunctions of the furnace boiler system. The nature and cause of any malfunction (if known) and the corrective action taken or preventive measured adopted [40 CFR 60.7(c)(2)].
(c) The date and time identifying each period during which the continuous monitoring system was inoperative except for zero and span checks, and the nature of the system repairs of adjustments [40 CFR 60.7(c)(2)].
(d) When no excess emissions have occurred or the continuous monitoring system has not been inoperative, repaired, or adjusted, such information shall be stated in the report [40 CFR 60.7(c)(4)].
(e) The owner or operator shall maintain a file of all measurements, including continuous monitoring systems performance evaluations; monitoring systems or monitoring device calibration; checks; adjustments and maintenance performed on these systems or devices; and all other information required by this permit recorded in a permanent form suitable for inspection [40 CFR 60.7(d)].
[PSD-FL-006(A)]

B.105. Test Reports.
(a) The owner or operator of an emissions unit for which a compliance test is required shall file a report with the Department's Southeast District office and the Dade County's DERM office on the results of each such test.
(b) The required test report shall be filed with the Department's Southeast District office and the Dade County's DERM office as soon as practical but no later than 45 days after the last sampling run of each test is completed.
(c) The test report shall provide sufficient detail on the emissions unit tested and the test procedures used to allow the Department's Southeast District office and the Dade County's DERM office to determine if the test was properly conducted and the test results properly computed. As a minimum, the test report, other than for an EPA or DEP Method 9 test, shall provide the following information:

1. The type, location, and designation of the emissions unit tested.
2. The facility at which the emissions unit is located.
3. The owner or operator of the emissions unit.
4. The normal type and amount of fuels used and materials processed, and the types and amounts of fuels used and material processed during each test run.
5. The means, raw data and computations used to determine the amount of fuels used and materials processed, if necessary to determine compliance with an applicable emission limiting standard.
6. The type of air pollution control devices installed on the emissions unit, their general condition, their normal operating parameters (pressure drops, total operating current and GPM scrubber water), and their operating parameters during each test run.
7. A sketch of the duct within 8 stack diameters upstream and 2 stack diameters downstream of the sampling ports, including the distance to any upstream and downstream bends or other flow disturbances.
8. The date, starting time and duration of each sampling run.

9. The test procedures used, including any alternative procedures authorized pursuant to Rule 62-297.620, F.A.C. Where optional procedures are authorized in this chapter, indicate which option was used.
10. The number of points sampled and configuration and location of the sampling plane.
11. For each sampling point for each run, the dry gas meter reading, velocity head, pressure drop across the stack, temperatures, average meter temperatures and sample time per point.
12. The type, manufacturer and configuration of the sampling equipment used.
13. Data related to the required calibration of the test equipment.
14. Data on the identification, processing and weights of all filters used.
15. Data on the types and amounts of any chemical solutions used.
16. Data on the amount of pollutant collected from each sampling probe, the filters, and the impingers, are reported separately for the compliance test.
17. The names of individuals who furnished the process variable data, conducted the test, analyzed the samples and prepared the report.
18. All measured and calculated data required to be determined by each applicable test procedure for each run.
19. The detailed calculations for one run that relate the collected data to the calculated emission rate.
20. The applicable emission standard, and the resulting maximum allowable emission rate for the emissions unit, plus the test result in the same form and unit of measure.
21. A certification that, to the knowledge of the owner or his authorized agent, all data submitted are true and correct. When a compliance test is conducted for the Department's Southeast District or its agent, the person who conducts the test shall provide the certification with respect to the test procedures used. The owner or his authorized agent shall certify that all data required and provided to the person conducting the test are true and correct to his knowledge.

[Rule 62-297.310(8), F.A.C.]

B.106. Monthly records shall be maintained of the amount of propane and natural gas used by the auxiliary burners of each emissions unit and the equivalent heat input from the propane and natural gas (calculated using the heat value for the propane and natural gases provided by the gas supplier).
[Rule 62-213.440, F.A.C.; and, PSD-FL-006(D)]

B.107. Charging Rate Monitoring. The average daily RDF charging rate shall be determined on a monthly basis and recorded for each combustor unit. The daily charging rate shall be determined each month on an average daily basis for each combustor unit using the facility's truck scale weight data, refuse pit inventory data and RDF operating data for the preceding calendar month. Monthly truck scale weight records of the weight of solid waste received and processed at the facility, and refuse pit inventory data, shall be used to determine the amount of RDF charged during the preceding calendar month on an average daily basis. The RDF load level measurements or other operating data shall be used to determined the number of operating hours per combustor unit for each day during the preceding calendar month.
[Rule 62-213.440, F.A.C.; PSD-FL-006(D); and, 40 CFR 60.53(a)]

B.108. Segregated Solid Waste Recordkeeping. The following records shall be made and kept to demonstrate compliance with the segregated non-MSW percentage limitations of specific condition **B.12.**: (1) Each segregated load of non-MSW materials, that is subject to the percentage weight limitations of specific condition **B.12.**, which is received for processing shall be documented as to waste description and weight. The weight of all waste materials received for processing shall be measured using the facility truck scales and recorded.

(2) Each day the total weight of segregated tires received shall be computed, and the daily total shall be added to the sum of the daily totals from the current calendar month. At the end of each calendar month, the resultant monthly total weight of tires shall be divided by the total weight of all waste materials received in the same calendar month, and the resulting number shall be multiplied by 100 to express the ratio in percentage terms. The percentage computed shall be compared to the 3% limitation.
(3) Each day the total weight of segregated non-MSW materials received that are subject to the 5% restriction shall be computed, and the daily total shall be added to the sum of the daily totals from the previous days in the current calendar month. At the end of each calendar month, the resultant monthly total weight of segregated non-MSW materials shall be divided by the total weight of all waste materials received in the same calendar month, and the resulting number shall be multiplied by 100 to express the ratio in percentage terms. The percentage computed shall be compared to the 5% limitation.
[Rule 62-213.440, F.A.C.; and, PSD-FL-006(D)]

B.109. The owner or operator shall maintain a central file containing all measurements, records, and other data that are required to be collected pursuant to the various specific conditions of this permit. This file shall include but not be limited to:
1) the data collected from in-stack monitoring instruments;
2) the records on RDF input rates per emissions unit;
3) the amount of propane gas burned per emissions unit;
4) the results of all source tests or performance tests;
5) the amount of activated carbon or other reactant chemicals used for mercury control;
6) calibration logs for all instruments;
7) maintenance/repair logs for any work performed on equipment or instrument which is subject to this permit; and,
8) fuel analyses data.

All measurements, records, and other data required to be maintained by owner or operator shall be retained for at least **five** (5) years following the date on which such measurements, records, or data are recorded. These data shall be made available to the Department upon request. The Department's Southeast District office and the Dade County's DERM office shall be notified in writing at least 15 days prior to the testing of any instrument required to be operated by these conditions of certification in order to allow witnessing by authorized personnel.
[PSD-FL-006(A) & (D); and, Rule 62-213.440, F.A.C.]

B.110. Reports.
a) A copy of the results of any formal emission shall be submitted within forty-five days of the last sampling run to the Department's Southeast District office and the Dade County's DERM office. Reports shall be in a format consistent with and shall include the information in accordance with Rule 62-297.570, F.A.C.
b) Emissions monitoring shall be reported to the Department's Southeast District office and the Dade County's DERM office on a quarterly basis in accordance with Chapter 62-297, F.A.C., and 40 CFR Part 60.7, as appropriate.
c) Notice of anticipated and actual start-up dates of control devices under this permit shall be submitted to Department's Southeast District office and the Dade County's DERM office.
[PSD-FL-006(A) & (D)]

Miscellaneous Requirements.

B.111. Activated Carbon Injection. The owner or operator of an affected facility where activated carbon injection is used to comply with the mercury emission limit (see specific condition **B.27.**), or the dioxin/furan emission limits (see specific condition **B.34.**), or the dioxin/furan emission level specified in 40 CFR 60.58b(g)(5)(iii), shall follow the procedures specified in paragraphs (1) through (3).
(1) During the performance tests for dioxins/furans and mercury, as applicable, the owner or operator shall estimate an average carbon mass feed rate based on carbon injection system operating parameters such as the screw feeder speed, hopper volume, hopper refill frequency, or other parameters appropriate to the feed system being employed, as specified in paragraphs (i) and(ii).
(i) An average carbon mass feed rate in kilograms per hour or pounds per hour shall be estimated during the initial performance test for mercury emissions and each subsequent performance test for mercury emissions.
(ii) An average carbon mass feed rate in kilograms per hour or pounds per hour shall be estimated during the initial performance test for dioxin/furan emissions and each subsequent performance test for dioxin/furan emissions.
(2) During operation of the affected facility, the carbon injection system operating parameter(s) that are the primary indicator(s) of the carbon mass feed rate (e.g., screw feeder setting) must equal or exceed the level(s) documented during the performance tests specified under paragraphs (1)(i) and (1)(ii).
(3) The owner or operator of an affected facility shall estimate the total carbon usage of the plant (kilograms or pounds) for each calendar quarter by two independent methods, according to the procedures in paragraphs (i) and (ii).
(i) The weight of carbon delivered to the plant.
(ii) Estimate the average carbon mass feed rate in kilograms per hour or pounds per hour for each hour of operation for each affected facility based on the parameters specified under paragraph (1), and sum the results for all affected facilities at the plant for the total number of hours of operation during the calendar quarter.
[40 CFR 60.38b and 40 CFR 60.58b(m); and, PSD-FL-006(D)]

B.112. Acid Rain Part Application. For any unit which was a solid waste incinerator, burning less than 20 percent fossil fuel as described in 40 CFR 72.6(b)(7), adopted and incorporated by reference at Rule 62-204.800, F.A.C., the designated representative of the source containing the unit shall submit a complete Acid Rain Part application governing such unit to the Department before the later of January 1, 1998, or March 1 of the year following the three calendar year period in which the incinerator consumed 20 percent or more fossil fuel on a British thermal unit (BTU) basis.
[Rule 62-214.320(1)(h), F.A.C.]

B.113. Baghouse Operations: Air-to-Cloth Ratio. The baghouses shall have a minimum air-to-cloth ratio of 4:1.
[PSD-FL-006(A) & (D)]

B.114. The permittee is authorized to install and operate permanently mounted gas burners, selective noncatalytic reduction (SNCR) systems, and other controls to achieve the nitrogen oxides and carbon monoxide emissions limits.
[PSD-FL-006(D)]

B.115. Credible Evidence. For the purpose of submitting compliance certifications or establishing whether or not a person has violated or is in violation of any standard in 40 CFR 60, nothing in 40 CFR 60 shall preclude the use, including the exclusive use, of any credible evidence or information, relevant to whether a source would have been in compliance with applicable requirements if the appropriate performance or compliance test or procedure had been performed.
[40 CFR 60.11(g)]

Subsection C. This section addresses the following emissions units.

E.U. ID No.	Brief Description
-rrr	MSW to RDF Processing Facility: 3,000 TPD; 18,000 tons/wk; and, 936,000 TPY
-sss	Bulky Waste to Biomass Processing Facility: 400,000 TPY

Emissions Unit **-rrr** is a processing activity of receiving, handling and converting of MSW into RDF and saleable extractables, such as metals and glass. The facility is designed to process 3,000 tons/day, 18,000 tons/wk, and 936,000 tons/yr of RDF.

Emissions Unit **-sss** is an existing bulky waste processing system that will be modified into a biomass fuel preparation system and is designed to process up to 400,000 tons/yr of the bulky waste into biomass, which will be transported off-site for use in biomass-fired cogeneration units or combusted on-site.

{Permitting note(s): Emissions units **-rrr** and **-sss** are each minor emissions units regulated under Rule 62-210.300, F.A.C., Permits Required; Rule 62-212.400, F.A.C., Prevention of Significant Deterioration [PSD; and, PSD-FL-006(A), (B) & (D)]}

The following specific conditions apply to the emissions unit(s) listed above:

General

Essential Potential to Emit (PTE) Parameters

C.1. Hours of Operation. Each emissions unit may operate continuously, i.e., 8,760 hrs/yr.
[Rules 62-213.440, 62-210.200(PTE), and 62-296.700(4)(a)7., F.A.C.; and, PSD-FL-006(D)]

Emission Limitations and Standards

C.2. Particulate Matter Emissions.
(1) Bulky Waste to Biomass Processing Facility. Particulate matter emissions from any baghouse shall not exceed 0.01 gr/dscf.
[PSD-FL-006(A) & (D)]

C.3. Visible Emissions.
a. MSW to RDF Processing Facility. Visible emissions from each baghouse exhaust shall not exceed 10 percent opacity, six-minute average.
b. Bulky Waste to Biomass Processing Facility. Visible emissions from each baghouse exhaust shall not exceed 5 percent opacity, since each emissions unit's potential particulate matter emissions are less than 100 TPY and is equipped with a baghouse control system. As long as the visible emissions do not exceed 5 percent opacity, compliance is assumed for the particulate matter limitations established in specific condition **C.2.**, above.

If the Department's Southeast District office and the Dade County's DERM office has reason to believe that the particulate matter weight emissions standard in specific condition **C.2.** is not being met, it shall require that compliance be demonstrated by the test method specified in specific condition **C.9.**
[PSD-FL-006(A) & (D); and, Rule 62-297.620(4), F.A.C.]

Excess Emissions

C.4. Excess emissions resulting from startup, shutdown or malfunction shall be permitted provided that best operational practices to minimize emissions are adhered to and the duration of excess emissions shall be minimized but in no case exceed two hours in any 24 hour period unless specifically authorized by the Department for longer duration.
[Rule 62-210.700(1), F.A.C.]

C.5. Excess emissions which are caused entirely or in part by poor maintenance, poor operation, or any other equipment or process failure which may reasonably be prevented during startup, shutdown or malfunction shall be prohibited.
[Rule 62-210.700(4), F.A.C.]

Monitoring of Operations

C.6. Determination of Process Variables.
(a) Required Equipment. The owner or operator of an emissions unit for which compliance tests are required shall install, operate, and maintain equipment or instruments necessary to determine process variables, such as process weight input or heat input, when such data are needed in conjunction with emissions data to determine the compliance of the emissions unit with applicable emission limiting standards.
(b) Accuracy of Equipment. Equipment or instruments used to directly or indirectly determine process variables, including devices such as belt scales, weight hoppers, flow meters, and tank scales, shall be calibrated and adjusted to indicate the true value of the parameter being measured with sufficient accuracy to allow the applicable process variable to be determined within 10% of its true value.
[Rule 62-297.310(5), F.A.C.]

Test Methods and Procedures

C.7. Annual Tests Required. Annual visible emissions compliance tests shall be performed for each emissions unit.
[Rule 62-297.310(7), F.A.C.]

C.8. Visible Emissions. The test method for visible emissions for all emissions units shall be EPA Method 9, in accordance with Rule 62-297.401, F.A.C., and 40 CFR 60, Appendix A.
[Rule 62-297.401, F.A.C.; and, PSD-FL-006(A), (B) & (D)]

C.9. Particulate Matter Emissions. The test method for particulate matter emissions for all units shall be EPA Method 5, in accordance with Rule 62-297.401, F.A.C., and 40 CFR 60, Appendix A.
[Rule 62-297.401, F.A.C.; and, PSD-FL-006(A), (B) & (D)]

C.10. Required Number of Test Runs. For mass emission limitations, a compliance test shall consist of three complete and separate determinations of the total air pollutant emission rate through the test section of the stack or duct and three complete and separate determinations of any applicable process variables corresponding to the three distinct time periods during which the stack emission rate was measured provided, however, that three complete and separate determinations shall not be required if the process variables are not subject to variation during a compliance test, or if three determinations are not necessary in order to calculate the unit's emission rate. The three required test runs shall be completed within one consecutive five day period. In the event that a sample is lost or one of the three runs must be

discontinued because of circumstances beyond the control of the owner or operator, and a valid third run cannot be obtained within the five day period allowed for the test, the Secretary or his or her designee may accept the results of the two complete runs as proof of compliance, provided that the arithmetic mean of the results of the two complete runs is at least 20 percent below the allowable emission limiting standards.
[Rule 62-297.310(1), F.A.C.]

C.11. Operating Rate During Testing. Testing of emissions shall be conducted with each emissions unit operation at permitted capacity, which is defined as 90 to 100 percent of the maximum operation rate allowed by the permit. If it is impracticable to test at permitted capacity, an emissions unit may be tested at less than the minimum permitted capacity; in this case, subsequent emissions unit operation is limited to 110 percent of the test load until a new test is conducted. Once the emissions unit is so limited, operation at higher capacities is allowed for no more than 15 consecutive days for the purpose of additional compliance testing to regain the authority to operate at the permitted capacity.
[Rules 62-297.310(2) & (2)(b), F.A.C.]

C.12. Calculation of Emission Rate. The indicated emission rate or concentration shall be the arithmetic average of the emission rate or concentration determined by each of the separate test runs unless otherwise specified in a particular test method or applicable rule.
[Rule 62-297.310(3), F.A.C.]

C.13. Applicable Test Procedures.

(a) Required Sampling Time.

1. Unless otherwise specified in the applicable rule, the required sampling time for each test run shall be no less than one hour and no greater than four hours, and the sampling time at each sampling point shall be of equal intervals of at least two minutes.

2. Opacity Compliance Tests. When either EPA Method 9 or DEP Method 9 is specified as the applicable opacity test method, the required minimum period of observation for a compliance test shall be sixty (60) minutes for emissions units which emit or have the potential to emit 100 tons per year or more of particulate matter, and thirty (30) minutes for emissions units which have potential emissions less than 100 tons per year of particulate matter and are not subject to a multiple-valued opacity standard. The opacity test observation period shall include the period during which the highest opacity emissions can reasonably be expected to occur. Exceptions to these requirements are as follows:

   a. For batch, cyclical processes, or other operations which are normally completed within less than the minimum observation period and do not recur within that time, the period of observation shall be equal to the duration of the batch cycle or operation completion time.

   b. The observation period for special opacity tests that are conducted to provide data to establish a surrogate standard pursuant to Rule 62-297.310(5)(k), F.A.C., Waiver of Compliance Test Requirements, shall be established as necessary to properly establish the relationship between a proposed surrogate standard and an existing mass emission limiting standard.

   c. The minimum observation period for opacity tests conducted by employees or agents of the Department to verify the day-to-day continuing compliance of a unit or activity with an applicable opacity standard shall be twelve minutes.

(b) Minimum Sample Volume. Unless otherwise specified in the applicable rule, the minimum sample volume per run shall be 25 dry standard cubic feet.

(c) Required Flow Rate Range. For EPA Method 5 particulate sampling, acid mist/sulfur dioxide, and fluoride sampling which uses Greenburg Smith type impingers, the sampling nozzle and sampling time shall be selected such that the average sampling rate will be between 0.5 and 1.0 actual cubic feet per minute, and the required minimum sampling volume will be obtained.
(d) Calibration of Sampling Equipment. Calibration of the sampling train equipment shall be conducted in accordance with the schedule shown in Table 297.310-1, attached to this permit.
(e) Allowed Modification to EPA Method 5. When EPA Method 5 is required, the following modification is allowed: the heated filter may be separated from the impingers by a flexible tube.
[Rule 62-297.310(4), F.A.C.]

C.14. Required Stack Sampling Facilities. When a mass emissions stack test is required, the permittee shall comply with the requirements contained in Appendix SS-1, Stack Sampling Facilities, attached to this permit.
[Rule 62-297.310(6), F.A.C.]

C.15. Frequency of Compliance Tests. The following provisions apply only to those emissions units that are subject to an emissions limiting standard for which compliance testing is required.
(a) General Compliance Testing.
3. The owner or operator of an emissions unit that is subject to any emission limiting standard shall conduct a compliance test that demonstrates compliance with the applicable emission limiting standard prior to obtaining a renewed operation permit. Emissions units that are required to conduct an annual compliance test may submit the most recent annual compliance test to satisfy the requirements of this provision. In renewing an air operation permit pursuant to Rule 62-210.300(2)(a)3.b., c., or d., F.A.C., the Department shall not require submission of emission compliance test results for any emissions unit that, during the year prior to renewal:
a. Did not operate; or
b. In the case of a fuel burning emissions unit, burned liquid and/or solid fuel for a total of no more than 400 hours.
4. During each federal fiscal year (October 1 - September 30), unless otherwise specified by rule, order, or permit, the owner or operator of each emissions unit shall have a formal compliance test conducted for:
a. Visible emissions, if there is an applicable standard;
b. Each of the following pollutants, if there is an applicable standard, and if the emissions unit emits or has the potential to emit: 5 tons per year or more of lead or lead compounds measured as elemental lead; 30 tons per year or more of acrylonitrile; or 100 tons per year or more of any other regulated air pollutant; and
c. Each NESHAP pollutant, if there is an applicable emission standard.
9. The owner or operator shall notify the Department's Southeast District office and the Dade County's DERM office at least 15 days prior to the date on which each formal compliance test is to begin, of the date, time, and place of each such test, and the test contact person who will be responsible for coordinating and having such test conducted for the owner or operator.
(b) Special Compliance Tests. When the Department's Southeast District office or the Dade County's DERM office, after investigation, has good reason (such as complaints, increased visible emissions or questionable maintenance of control equipment) to believe that any applicable emission standard contained in a Department rule or in a permit issued pursuant to those rules is being violated, it shall require the owner or operator of the emissions unit to conduct compliance tests which identify the nature and quantity of pollutant emissions from the emissions unit and to provide a report on the results of said tests to the Department's Southeast District office and the Dade County's DERM office.

(c) Waiver of Compliance Test Requirements. If the owner or operator of an emissions unit that is subject to a compliance test requirement demonstrates to the Department, pursuant to the procedure established in Rule 62-297.620, F.A.C., that the compliance of the emissions unit with an applicable weight emission limiting standard can be adequately determined by means other than the designated test procedure, such as specifying a surrogate standard of no visible emissions for particulate matter sources equipped with a bag house or specifying a fuel analysis for sulfur dioxide emissions, the Department shall waive the compliance test requirements for such emissions units and order that the alternate means of determining compliance be used, provided, however, the provisions of Rule 62-297.310(7)(b), F.A.C., shall apply.
[Rule 62-297.310(7), F.A.C.; PSD-FL-006(D); and, SIP approved]

Recordkeeping and Reporting

C.16. In the case of excess emissions resulting from malfunctions, each owner or operator shall notify the Department's Southeast District office and then Dade County's DERM office in accordance with Rule 62-4.130, F.A.C. A full written report on the malfunctions shall be submitted in a quarterly report, if requested by the Department or its agent.
[Rule 62-210.700(6), F.A.C.]

C.17. Test Reports.
(a) The owner or operator of an emissions unit for which a compliance test is required shall file a report with the Department's Southeast District office and the Dade County's DERM office on the results of each such test.
(b) The required test report shall be filed with the Department's Southeast District office and the Dade County's DERM office as soon as practical but no later than 45 days after the last sampling run of each test is completed.
(c) The test report shall provide sufficient detail on the emissions unit tested and the test procedures used to allow the Department's Southeast District office and the Dade County's DERM office to determine if the test was properly conducted and the test results properly computed. As a minimum, the test report, other than for an EPA or DEP Method 9 test, shall provide the following information:

1. The type, location, and designation of the emissions unit tested.
2. The facility at which the emissions unit is located.
3. The owner or operator of the emissions unit.
4. The normal type and amount of fuels used and materials processed, and the types and amounts of fuels used and material processed during each test run.
5. The means, raw data and computations used to determine the amount of fuels used and materials processed, if necessary to determine compliance with an applicable emission limiting standard.
6. The type of air pollution control devices installed on the emissions unit, their general condition, their normal operating parameters (pressure drops, total operating current and GPM scrubber water), and their operating parameters during each test run.
7. A sketch of the duct within 8 stack diameters upstream and 2 stack diameters downstream of the sampling ports, including the distance to any upstream and downstream bends or other flow disturbances.
8. The date, starting time and duration of each sampling run.
9. The test procedures used, including any alternative procedures authorized pursuant to Rule 62-297.620, F.A.C. Where optional procedures are authorized in this chapter, indicate which option was used.
10. The number of points sampled and configuration and location of the sampling plane.

11. For each sampling point for each run, the dry gas meter reading, velocity head, pressure drop across the stack, temperatures, average meter temperatures and sample time per point.
12. The type, manufacturer and configuration of the sampling equipment used.
13. Data related to the required calibration of the test equipment.
14. Data on the identification, processing and weights of all filters used.
15. Data on the types and amounts of any chemical solutions used.
16. Data on the amount of pollutant collected from each sampling probe, the filters, and the impingers, are reported separately for the compliance test.
17. The names of individuals who furnished the process variable data, conducted the test, analyzed the samples and prepared the report.
18. All measured and calculated data required to be determined by each applicable test procedure for each run.
19. The detailed calculations for one run that relate the collected data to the calculated emission rate.
20. The applicable emission standard, and the resulting maximum allowable emission rate for the emissions unit, plus the test result in the same form and unit of measure.
21. A certification that, to the knowledge of the owner or his authorized agent, all data submitted are true and correct. When a compliance test is conducted for the Department's Southeast District or its agent, the person who conducts the test shall provide the certification with respect to the test procedures used. The owner or his authorized agent shall certify that all data required and provided to the person conducting the test are true and correct to his knowledge.

[Rules 62-213.440 and 62-297.310(8), F.A.C.]

Subsection D. This section addresses the following emissions unit.

E.U. ID No.	Brief Description
-ttt	Ash Building and Handling System Ash Storage Silo with Baghouse

Fly ash collected by the existing ESPs (future: fabric filters) is conveyed to the fly ash handling building. The ash handling system is completely enclosed to decrease the potential for fugitive emissions. The ash is quenched and wetted before being temporarily stored in the ash handling facility and loaded onto a truck. A baghouse is located on the ash handling building as an added precaution for fugitive emissions. The baghouse keeps the building under negative pressure.

{Permitting note(s). This emissions unit is regulated under NSPS - 40 CFR 60, Subpart Cb, Emissions Guidelines and Compliance Times for Large Municipal Waste Combustors That Are Constructed on or Before September 20, 1994, adopted and incorporated by reference, subject to provisions, in Rule 62-204.800(8)(b), F.A.C.; and, Rule 62-212.400(5), F.A.C., Prevention of Significant Deterioration [PSD; PSD-FL-006, -006(A), (B) & (D)]. Note: This project is subject to the requirements of 40 CFR 60, Subpart Cb. This permit may refer to the requirements of 40 CFR 60, Subpart Eb, where these requirements are referenced by 40 CFR 60, Subpart Cb. The fugitive particulate matter control requirements for the ash handling activities are specified in 40 CFR 60.55b.}

The following specific Conditions apply to the emissions unit(s) listed above:

General

D.1. Definitions. For the purposes of Rule 62-204.800(8), F.A.C., the definitions contained in the various provisions of 40 CFR Part 60, adopted herein shall apply except that the term "Administrator" when used in 40 CFR Part 60, shall mean the Secretary or the Secretary's designee.
[Rule 62-204.800(8)(a)2., F.A.C.; and, 40 CFR 60.2]

Essential Potential to Emit (PTE) Parameters

D.2. Hours of Operation. This emissions unit is allowed to operate continuously, i.e., 8,760 hours/year.
[Rule 62-210.200(PTE), F.A.C.; and, PSD-FL-006(D)]

Emission Limitations and Standards

D.3. PM and VE: Ash Silo and Ash Conditioning Agent Silo Baghouses.
(a) PM emissions from the any ash silo or ash conditioning agent silo baghouse shall not exceed 0.01 gr/dscf; or,
(b) Visible emissions shall not exceed 5 percent opacity, since each emissions unit's potential particulate matter emissions are less than 100 TPY and is equipped with a baghouse control system. As long as the visible emissions do not exceed 5 percent opacity, compliance is assumed for the particulate matter limitations established in paragraph (a) above.

If the Department's Southeast District office or the Dade County's DERM office has reason to believe that the particulate matter weight emissions standard in paragraph (a) above is not being met, it shall require that compliance be demonstrated by the test method specified in specific condition **D.11.**

(c) Compliance testing of the ash silos (baghouse) shall be conducted within 90 days of completion of construction and initial operation; and, annually thereafter.
[PSD-FL-006(A) & (D); and, Rule 62-297.620(4), F.A.C.]

D.4. Fugitive Ash Emissions. (a) On and after the date on which the initial performance test is completed or is required to be completed under 40 CFR 60.8 of Subpart A (see specific condition **D.10.**), no owner or operator of an affected facility shall cause to be discharged to the atmosphere visible emissions of combustion ash from an ash conveying system (including conveyor transfer points) in excess of 5 percent of the observation period (i.e., 9 minutes per 3-hour period), as determined by EPA Reference Method 22 observations as specified in 40 CFR 60.58b(k), except as provided in paragraphs (b) and (c). See specific condition **D.7.**
(b) The emission limit specified in paragraph (a) does not cover visible emissions discharged inside buildings or enclosures of ash conveying systems; however, the emission limit specified in paragraph (a) does cover visible emissions discharged to the atmosphere from buildings or enclosures of ash conveying systems.
(c) The provisions of paragraph (a) do not apply during maintenance and repair of ash conveying systems.
[40 CFR 60.36b and 40 CFR 60.55b; and, PSD-FL-006(D)]

D.5. The potential for dust generation by ash handling activities will be mitigated by quenching the ash prior to loading in ash transport trucks. The ash handling facilities shall be enclosed. Unprocessed refuse storage areas which must be open for operational purposes (e.g., tipping floor of the refuse bunker while trucks are entering and leaving) will be under negative air pressure. Residue from the grates, grate siftings, and ash from the combustor/boiler and fabric filter hoppers during normal operations shall be discharged into the ash quenching system, or otherwise handled in a manner to minimize visible dust. The ash/residue in the ash handling building shall remain sufficiently moist to prevent dust during storage and handling operations.
[PSD-FL-006(A) & (D); and, Rule 62-4.070(3), F.A.C.]

Excess Emissions

{Permitting note: The Excess Emissions Rule at Rule 62-210.700, F.A.C., cannot vary any requirement of a NSPS, NESHAP, or Acid Rain program provision.}

D.6. At all times, including periods of startup, shutdown, and malfunction, owners and operators shall, to the extent practicable, maintain and operate any affected facility including associated air pollution control equipment in a manner consistent with good air pollution control practice for minimizing emissions. Determination of whether acceptable operating and maintenance procedures are being used will be based on information available to the Administrator which may include, but is not limited to, monitoring results, opacity observations, review of operating and maintenance procedures, and inspection of the source.
[40 CFR 60.11(d)]

D.7. Excess emissions from these emissions units resulting from startup, shutdown or malfunction shall be permitted provided that best operational practices to minimize emissions are adhered to and the duration of excess emissions shall be minimized but in no case exceed two hours in any 24 hour period unless specifically authorized by the Department for longer duration.
[Rule 62-210.700(1), F.A.C.]

D.8. Excess emissions which are caused entirely or in part by poor maintenance, poor operation, or any other equipment or process failure which may reasonably be prevented during startup, shutdown or malfunction shall be prohibited.
[Rule 62-210.700(4), F.A.C.]

Test Methods and Procedures

D.9. The procedures specified in paragraphs (1) through (4) shall be used for determining compliance with the fugitive ash emission limit under 40 CFR 60.55b. (See specific conditions **D.3.** and **D.4.**)
(1) The EPA Reference Method 22 shall be used for determining compliance with the fugitive ash emission limit under 40 CFR 60.55b. The minimum observation time shall be a series of three 1-hour observations. The observation period shall include times when the facility is transferring ash from the municipal waste combustor unit to the area where ash is stored or loaded into containers or trucks.
(2) The average duration of visible emissions per hour shall be calculated from the three 1-hour observations. The average shall be used to determine compliance with 40 CFR 60.55b.
(3) The owner or operator of an affected facility shall conduct an initial performance test for fugitive ash emissions as required under 40 CFR 60.8.
(4) Following the date that the initial performance test for fugitive ash emissions is completed or is required to be completed under 40 CFR 60.8 for an affected facility, the owner or operator shall conduct a performance test for fugitive ash emissions on an annual basis (no more than 12 calendar months following the previous performance test).
[40 CFR 60.38b and 40 CFR 60.58b(k)]

D.10. Performance tests shall be conducted under such conditions as the Administrator shall specify to the plant operator based on representative performance of the affected facility. The owner or operator shall make available to the Administrator such records as may be necessary to determine the conditions of the performance tests. Operations during periods of startup, shutdown, and malfunction shall not constitute representative conditions for the purpose of a performance test nor shall emissions in excess of the level of the applicable emission limit during periods of startup, shutdown, and malfunction be considered a violation of the applicable emission limit unless otherwise specified in the applicable standard.
[40 CFR 60.8(c)]

D.11. Particulate Matter. The test methods for particulate emissions shall be EPA Method 5 incorporated by reference in Chapter 62-297, F.A.C., and 40 CFR 60, Appendix A.
[Rules 62-213.440 and 62-297.401, F.A.C.]

D.12. Visible Emissions. EPA Method 9 shall be used to determine opacity compliance pursuant to Chapter 62-297, F.A.C., and 40 CFR 60, Appendix A.
[Rule 62-297.401, F.A.C.]

D.13. Operating Rate During Testing. Testing of emissions shall be conducted with the emissions unit operation at permitted capacity, which is defined as 90 to 100 percent of the maximum operation rate allowed by the permit. If it is impracticable to test at permitted capacity, an emissions unit may be tested at less than the minimum permitted capacity; in this case, subsequent emissions unit operation is limited to 110 percent of the test load until a new test is conducted. Once the emissions unit is so limited, operation at higher capacities is allowed for no more than 15 consecutive days for the purpose of additional compliance testing to regain the authority to operate at the permitted capacity.
[Rules 62-297.310(2) & (2)(b), F.A.C.]

D.14. Applicable Test Procedures.

(a) Required Sampling Time.

1. Unless otherwise specified in the applicable rule, the required sampling time for each test run shall be no less than one hour and no greater than four hours, and the sampling time at each sampling point shall be of equal intervals of at least two minutes.

2. Opacity Compliance Tests. When either EPA Method 9 or DEP Method 9 is specified as the applicable opacity test method, the required minimum period of observation for a compliance test shall be sixty (60) minutes for emissions units which emit or have the potential to emit 100 tons per year or more of particulate matter, and thirty (30) minutes for emissions units which have potential emissions less than 100 tons per year of particulate matter and are not subject to a multiple-valued opacity standard. The opacity test observation period shall include the period during which the highest opacity emissions can reasonably be expected to occur. Exceptions to these requirements are as follows:

a. For batch, cyclical processes, or other operations which are normally completed within less than the minimum observation period and do not recur within that time, the period of observation shall be equal to the duration of the batch cycle or operation completion time.

b. The observation period for special opacity tests that are conducted to provide data to establish a surrogate standard pursuant to Rule 62-297.310(5)(k), F.A.C., Waiver of Compliance Test Requirements, shall be established as necessary to properly establish the relationship between a proposed surrogate standard and an existing mass emission limiting standard.

c. The minimum observation period for opacity tests conducted by employees or agents of the Department to verify the day-to-day continuing compliance of a unit or activity with an applicable opacity standard shall be twelve minutes.

[Rule 62-297.310(4), F.A.C.]

D.15. Frequency of Compliance Tests. The following provisions apply only to those emissions units that are subject to an emissions limiting standard for which compliance testing is required.

(a) General Compliance Testing.

2. For excess emission limitations for particulate matter specified in Rule 62-210.700, F.A.C., a compliance test shall be conducted annually while the emissions unit is operating under soot blowing conditions in each federal fiscal year during which soot blowing is part of normal emissions unit operation, except that such test shall not be required in any federal fiscal year in which a fossil fuel steam generator does not burn liquid and/or solid fuel for more than 400 hours other than during startup.

3. The owner or operator of an emissions unit that is subject to any emission limiting standard shall conduct a compliance test that demonstrates compliance with the applicable emission limiting standard prior to obtaining a renewed operation permit. Emissions units that are required to conduct an annual compliance test may submit the most recent annual compliance test to satisfy the requirements of this provision. In renewing an air operation permit pursuant to Rule 62-210.300(2)(a)3.b., c., or d., F.A.C., the Department shall not require submission of emission compliance test results for any emissions unit that, during the year prior to renewal:

a Did not operate; or

4. During each federal fiscal year (October 1 - September 30), unless otherwise specified by rule, order, or permit, the owner or operator of each emissions unit shall have a formal compliance test conducted for:
   a. Visible emissions, if there is an applicable standard;
   b. Each of the following pollutants, if there is an applicable standard, and if the emissions unit emits or has the potential to emit: 5 tons per year or more of lead or lead compounds measured as elemental lead; 30 tons per year or more of acrylonitrile; or 100 tons per year or more of any other regulated air pollutant; and
   c. Each NESHAP pollutant, if there is an applicable emission standard.
9. The owner or operator shall notify the Department's Southeast District office and the Dade County's DERM office at least 15 days prior to the date on which each formal compliance test is to begin, of the date, time, and place of each such test, and the test contact person who will be responsible for coordinating and having such test conducted for the owner or operator.

(b) Special Compliance Tests. When the Department's Southeast District office or the Dade County's DERM office, after investigation, has good reason (such as complaints, increased visible emissions or questionable maintenance of control equipment) to believe that any applicable emission standard contained in a Department rule or in a permit issued pursuant to those rules is being violated, it may require the owner or operator of the emissions unit to conduct compliance tests which identify the nature and quantity of pollutant emissions from the emissions unit and to provide a report on the results of said tests to the Department's Southeast District office and the Dade County's DERM office.

(c) Waiver of Compliance Test Requirements. If the owner or operator of an emissions unit that is subject to a compliance test requirement demonstrates to the Department, pursuant to the procedure established in Rule 62-297.620, F.A.C., that the compliance of the emissions unit with an applicable weight emission limiting standard can be adequately determined by means other than the designated test procedure, such as specifying a surrogate standard of no visible emissions for particulate matter sources equipped with a bag house or specifying a fuel analysis for sulfur dioxide emissions, the Department shall waive the compliance test requirements for such emissions units and order that the alternate means of determining compliance be used, provided, however, the provisions of Rule 62-297.310(7)(b), F.A.C., shall apply.

[Rule 62-297.310(7), F.A.C.; PSD-FL-006(D); and, SIP approved]

D.16. Compliance with standards in 40 CFR 60, other than opacity standards, shall be determined only by performance tests established by 40 CFR 60.8, unless otherwise specified in the applicable standard. [40 CFR 60.11(a)]

Monitoring of Operations

D.17. Determination of Process Variables.

(a) Required Equipment. The owner or operator of an emissions unit for which compliance tests are required shall install, operate, and maintain equipment or instruments necessary to determine process variables, such as process weight input or heat input, when such data are needed in conjunction with emissions data to determine the compliance of the emissions unit with applicable emission limiting standards.

(b) Accuracy of Equipment. Equipment or instruments used to directly or indirectly determine process variables, including devices such as belt scales, weight hoppers, flow meters, and tank scales, shall be calibrated and adjusted to indicate the true value of the parameter being measured with sufficient accuracy to allow the applicable process variable to be determined within 10% of its true value. [Rule 62-297.310(5), F.A.C.]

Recordkeeping and Reporting Requirements

D.18. In the case of excess emissions resulting from malfunctions, each owner or operator shall notify the Department's Southeast District office in accordance with Rule 62-4.130, F.A.C. A full written report on the malfunctions shall be submitted in a quarterly report, if requested by the Department or its agent. [Rule 62-210.700(6), F.A.C.]

D.19. The owner or operator subject to the provisions of 40 CFR 60 shall furnish the Administrator written notification as follows:
(4) A notification of any physical or operational change to an existing facility which may increase the emission rate of any air pollutant to which a standard applies, unless that change is specifically exempted under an applicable subpart or in 40 CFR 60.14(e). This notice shall be postmarked 60 days or as soon as practicable before the change is commenced and shall include information describing the precise nature of the change, present and proposed emission control systems, productive capacity of the facility before and after the change, and the expected completion date of the change. The Administrator may request additional relevant information subsequent to this notice.
[40 CFR 60.7(a)(4)]

D.20. The owner or operator subject to the provisions of 40 CFR 60 shall maintain records of the occurrence and duration of any startup, shutdown, or malfunction in the operation of an affected facility; any malfunction of the air pollution control equipment; or, any periods during which a continuous monitoring system or monitoring device is inoperative.
[40 CFR 60.7(b)]

D.21. (1) Notwithstanding the frequency of reporting requirements specified in 40 CFR 60.7(c), an owner or operator who is required by an applicable subpart to submit excess emissions and monitoring systems performance reports (and summary reports) on a quarterly (or more frequent) basis may reduce the frequency of reporting for that standard to semiannual if the following conditions are met: (i) For 1 full year (e.g., 4 quarterly or 12 monthly reporting periods) the affected facility's excess emissions and monitoring systems reports submitted to comply with a standard under this part continually demonstrate that the facility is in compliance with the applicable standard;

(i) The owner or operator continues to comply with all recordkeeping and monitoring requirements specified in 40 CFR 60, Subpart A, and the applicable standard; and
(ii) The Administrator does not object to a reduced frequency of reporting for the affected facility, as provided in 40 CFR 60.7(e)(2).

(2) The frequency of reporting of excess emissions and monitoring systems performance (and summary) reports may be reduced only after the owner or operator notifies the Administrator in writing of his or her intention to make such a change and the Administrator does not object to the intended change. In deciding whether to approve a reduced frequency of reporting, the Administrator may review information concerning the source's entire previous performance history during the required recordkeeping period prior to the intended change, including performance test results, monitoring data, and evaluations of an owner or operator's conformance with operation and maintenance requirements. Such information may be used by the Administrator to make a judgment about the source's potential for noncompliance in the future. If the Administrator disapproves the owner or operator's request to reduce the frequency of reporting, the Administrator will notify the owner or operator in writing within 45 days after receiving notice of the owner or operator's intention. The notification from the Administrator to the owner or operator will specify the grounds on which the disapproval is based. In the absence of a notice of disapproval within 45 days, approval is automatically granted.

(3) As soon as monitoring data indicate that the affected facility is not in compliance with any emission limitation or operating parameter specified in the applicable standard, the frequency of reporting shall revert to the frequency specified in the applicable standard, and the owner or operator shall submit an excess emissions and monitoring systems performance report (and summary report, if required) at the next appropriate reporting period following the noncomplying event. After demonstrating compliance with the applicable standard for another full year, the owner or operator may again request approval from the Administrator to reduce the frequency of reporting for that standard as provided for in 40 CFR 60.7(e)(1) and (e)(2).
[40 CFR 60.7(e)(1)]

{See attached Figure 1: Summary Report-Gaseous and Opacity Excess Emission and Monitoring System Performance}

D.22. Any owner or operator subject to the provisions of 40 CFR 60 shall maintain a file of all measurements, including continuous monitoring system, monitoring device, and performance testing measurements; all continuous monitoring system performance evaluations; all continuous monitoring system or monitoring device calibration checks; adjustments and maintenance performed on these systems or devices; and, all other information required by 40 CFR 60 recorded in a permanent form suitable for inspection. The file shall be retained for at least **5 (five)** years following the date of such measurements, maintenance, reports, and records.
[40 CFR 60.7(f); and, Rule 62-213.440(1)(b)2.b., F.A.C.]

D.23. Test Reports.
(a) The owner or operator of an emissions unit for which a compliance test is required shall file a report with the Department's Southeast District office and the Dade County's DERM office on the results of each such test.
(b) The required test report shall be filed with the Department's Southeast District office and the Dade County's DERM office as soon as practical but no later than 45 days after the last sampling run of each test is completed.
(c) The test report shall provide sufficient detail on the emissions unit tested and the test procedures used to allow the Department's Southeast District office and the Dade County's DERM office to determine if the test was properly conducted and the test results properly computed. As a minimum, the test report, other than for an EPA or DEP Method 9 test, shall provide the following information:

1. The type, location, and designation of the emissions unit tested.
2. The facility at which the emissions unit is located.
3. The owner or operator of the emissions unit.
4. The normal type and amount of fuels used and materials processed, and the types and amounts of fuels used and material processed during each test run.
5. The means, raw data and computations used to determine the amount of fuels used and materials processed, if necessary to determine compliance with an applicable emission limiting standard.
6. The type of air pollution control devices installed on the emissions unit, their general condition, their normal operating parameters (pressure drops, total operating current and GPM scrubber water), and their operating parameters during each test run.
7. A sketch of the duct within 8 stack diameters upstream and 2 stack diameters downstream of the sampling ports, including the distance to any upstream and downstream bends or other flow disturbances.
8. The date, starting time and duration of each sampling run.

9. The test procedures used, including any alternative procedures authorized pursuant to Rule 62-297.620, F.A.C. Where optional procedures are authorized in this chapter, indicate which option was used.
10. The number of points sampled and configuration and location of the sampling plane.
11. For each sampling point for each run, the dry gas meter reading, velocity head, pressure drop across the stack, temperatures, average meter temperatures and sample time per point.
12. The type, manufacturer and configuration of the sampling equipment used.
13. Data related to the required calibration of the test equipment.
14. Data on the identification, processing and weights of all filters used.
15. Data on the types and amounts of any chemical solutions used.
16. Data on the amount of pollutant collected from each sampling probe, the filters, and the impingers, are reported separately for the compliance test.
17. The names of individuals who furnished the process variable data, conducted the test, analyzed the samples and prepared the report.
18. All measured and calculated data required to be determined by each applicable test procedure for each run.
19. The detailed calculations for one run that relate the collected data to the calculated emission rate.
20. The applicable emission standard, and the resulting maximum allowable emission rate for the emissions unit, plus the test result in the same form and unit of measure.
21. A certification that, to the knowledge of the owner or his authorized agent, all data submitted are true and correct. When a compliance test is conducted for the Department's Southeast District or its agent, the person who conducts the test shall provide the certification with respect to the test procedures used. The owner or his authorized agent shall certify that all data required and provided to the person conducting the test are true and correct to his knowledge.

[Rules 62-213.440 and 62-297.310(8), F.A.C.]

Miscellaneous Requirements

D.24. Definitions. For the purposes of Rules 62-204.800(7), (8), and (9), F.A.C., the definitions contained in the various provisions of 40 CFR Parts 60 and 61, adopted herein shall apply except that the term "Administrator" when used in 40 CFR Parts 60 and 61, shall mean the Secretary or the Secretary's designee except as noted in 40 CFR 61.157.
[40 CFR 60.2; and, Rules 62-204.800(7)(a), (8)(a)2., and, (9)(a), F.A.C.]

D.25. Circumvention. No owner or operator subject to the provisions of 40 CFR 60 shall build, erect, install, or use any article, machine, equipment or process, the use of which conceals an emission which would otherwise constitute a violation of an applicable standard. Such concealment includes, but is not limited to, the use of gaseous diluents to achieve compliance with an opacity standard or with a standard which is based on the concentration of a pollutant in the gases discharged to the atmosphere.
[40 CFR 60.12]

D.26. General Applicability and Definitions. The Standards of Performance for New Stationary Sources adopted by reference in Rule 62-204.800(7), F.A.C., the Emission Guidelines for Existing Sources adopted by reference in Rule 62-204.800(8), F.A.C., and the National Emissions Standards for Hazardous Air Pollutants adopted by reference in Rule 62-204.800(9), F.A.C., shall be controlling over other standards in the air pollution rules of the Department except that any emissions limiting standard contained in or determined pursuant to the air pollution rules of the Department which is more stringent than one contained in a Standard of Performance, an Emission Guideline, or a National Emission Standard, or which regulates emissions of pollutants or emissions units not regulated by an applicable Standard of Performance, Emission Guideline, or National Emission Standard, shall apply.
[Rules 62-204.800(7)(c), (8)(a)1., and (9)(c), F.A.C.]

Subsection E. This section addresses the following emissions unit(s).

E.U. ID No.	Brief Description
-uuu	Lime Storage Silo with Baghouse

Lime used in the spray dryer absorbers for each municipal waste combustor is stored in a silo. Emissions from the silo are controlled by a baghouse.

{Permitting note(s): Emissions unit **-uuu** is a minor emissions unit regulated under Rule 62-210.300, F.A.C., Permits Required; and, Rule 62-212.400, F.A.C., Prevention of Significant Deterioration [PSD; and, PSD-FL-006(A), (B) & (D)]}

The following specific conditions apply to the emissions unit listed above:

Essential Potential to Emit (PTE) Parameters

E.1. Hours of Operation. This emissions unit is allowed to operate continuously, i.e., 8,760 hours/year. [Rule 62-210.200(PTE), F.A.C.; and, PSD-FL-006(D)]

Emission Limitations and Standards

E.2. Visible Emissions. Visible emissions shall not exceed five (5) percent opacity. [PSD-FL-006(A), (B) & (D)]

Excess Emissions

E.3. Excess emissions from these emissions units resulting from startup, shutdown or malfunction shall be permitted provided that best operational practices to minimize emissions are adhered to and the duration of excess emissions shall be minimized but in no case exceed two hours in any 24 hour period unless specifically authorized by the Department for longer duration.
[Rule 62-210.700(1), F.A.C.]

E.4. Excess emissions which are caused entirely or in part by poor maintenance, poor operation, or any other equipment or process failure which may reasonably be prevented during startup, shutdown or malfunction shall be prohibited.
[Rule 62-210.700(4), F.A.C.]

Test Methods and Procedures

E.5. Visible Emissions.
a. EPA Method 9 shall be used to determine opacity compliance pursuant to Rule 62-297.401, F.A.C., and 40 CFR 60, Appendix A. The emissions unit is to be operating (i.e., receiving or discharging) during any compliance test.
b. Compliance testing of the lime silo loading operation shall be conducted within 90 days of completion of construction and initial operation; and, annually thereafter.
[Rules 62-4.070(3), 62-213.440, and 62-297.401, F.A.C.; and, PSD-FL-006(D)]

E.6. Operating Rate During Testing. Testing of emissions shall be conducted with the emissions unit operation at permitted capacity, which is defined as 90 to 100 percent of the maximum operation rate allowed by the permit. If it is impracticable to test at permitted capacity, an emissions unit may be tested at less than the minimum permitted capacity; in this case, subsequent emissions unit operation is limited to 110 percent of the test load until a new test is conducted. Once the emissions unit is so limited, operation at higher capacities is allowed for no more than 15 consecutive days for the purpose of additional compliance testing to regain the authority to operate at the permitted capacity.
[Rules 62-297.310(2) & (2)(b), F.A.C.]

E.7. Applicable Test Procedures.
(a) Required Sampling Time.
1. Unless otherwise specified in the applicable rule, the required sampling time for each test run shall be no less than one hour and no greater than four hours, and the sampling time at each sampling point shall be of equal intervals of at least two minutes.
2. Opacity Compliance Tests. When either EPA Method 9 or DEP Method 9 is specified as the applicable opacity test method, the required minimum period of observation for a compliance test shall be sixty (60) minutes for emissions units which emit or have the potential to emit 100 tons per year or more of particulate matter, and thirty (30) minutes for emissions units which have potential emissions less than 100 tons per year of particulate matter and are not subject to a multiple-valued opacity standard. The opacity test observation period shall include the period during which the highest opacity emissions can reasonably be expected to occur. Exceptions to these requirements are as follows:
a. For batch, cyclical processes, or other operations which are normally completed within less than the minimum observation period and do not recur within that time, the period of observation shall be equal to the duration of the batch cycle or operation completion time.
b. The observation period for special opacity tests that are conducted to provide data to establish a surrogate standard pursuant to Rule 62-297.310(5)(k), F.A.C., Waiver of Compliance Test Requirements, shall be established as necessary to properly establish the relationship between a proposed surrogate standard and an existing mass emission limiting standard.
c. The minimum observation period for opacity tests conducted by employees or agents of the Department to verify the day-to-day continuing compliance of a unit or activity with an applicable opacity standard shall be twelve minutes.
[Rule 62-297.310(4), F.A.C.]

E.8. Frequency of Compliance Tests. The following provisions apply only to those emissions units that are subject to an emissions limiting standard for which compliance testing is required.
(a) General Compliance Testing.
3. The owner or operator of an emissions unit that is subject to any emission limiting standard shall conduct a compliance test that demonstrates compliance with the applicable emission limiting standard prior to obtaining a renewed operation permit. Emissions units that are required to conduct an annual compliance test may submit the most recent annual compliance test to satisfy the requirements of this provision. In renewing an air operation permit pursuant to Rule 62-210.300(2)(a)3.b., c., or d., F.A.C., the Department shall not require submission of emission compliance test results for any emissions unit that, during the year prior to renewal:
a Did not operate; or

4. During each federal fiscal year (October 1 - September 30), unless otherwise specified by rule, order, or permit, the owner or operator of each emissions unit shall have a formal compliance test conducted for:
   a. Visible emissions, if there is an applicable standard;
   b. Each of the following pollutants, if there is an applicable standard, and if the emissions unit emits or has the potential to emit: 5 tons per year or more of lead or lead compounds measured as elemental lead; 30 tons per year or more of acrylonitrile; or 100 tons per year or more of any other regulated air pollutant; and
   c. Each NESHAP pollutant, if there is an applicable emission standard.
9. The owner or operator shall notify the Department's Southeast District office and the Dade County's DERM office at least 15 days prior to the date on which each formal compliance test is to begin, of the date, time, and place of each such test, and the test contact person who will be responsible for coordinating and having such test conducted for the owner or operator.

(b) Special Compliance Tests. When the Department's Southeast District office or the Dade County's DERM office, after investigation, has good reason (such as complaints, increased visible emissions or questionable maintenance of control equipment) to believe that any applicable emission standard contained in a Department rule or in a permit issued pursuant to those rules is being violated, it may require the owner or operator of the emissions unit to conduct compliance tests which identify the nature and quantity of pollutant emissions from the emissions unit and to provide a report on the results of said tests to the Department's Southeast District office and the Dade County's DERM office.

(c) Waiver of Compliance Test Requirements. If the owner or operator of an emissions unit that is subject to a compliance test requirement demonstrates to the Department, pursuant to the procedure established in Rule 62-297.620, F.A.C., that the compliance of the emissions unit with an applicable weight emission limiting standard can be adequately determined by means other than the designated test procedure, such as specifying a surrogate standard of no visible emissions for particulate matter sources equipped with a bag house or specifying a fuel analysis for sulfur dioxide emissions, the Department shall waive the compliance test requirements for such emissions units and order that the alternate means of determining compliance be used, provided, however, the provisions of Rule 62-297.310(7)(b), F.A.C., shall apply.

[Rule 62-297.310(7), F.A.C.; PSD-FL-006(D); and, SIP approved]

Monitoring of Operations

E.9. Determination of Process Variables.

(a) Required Equipment. The owner or operator of an emissions unit for which compliance tests are required shall install, operate, and maintain equipment or instruments necessary to determine process variables, such as process weight input or heat input, when such data are needed in conjunction with emissions data to determine the compliance of the emissions unit with applicable emission limiting standards.

(b) Accuracy of Equipment. Equipment or instruments used to directly or indirectly determine process variables, including devices such as belt scales, weight hoppers, flow meters, and tank scales, shall be calibrated and adjusted to indicate the true value of the parameter being measured with sufficient accuracy to allow the applicable process variable to be determined within 10% of its true value.

[Rule 62-297.310(5), F.A.C.]

Recordkeeping and Reporting Requirements

E.10. In the case of excess emissions resulting from malfunctions, each owner or operator shall notify the Department's Southeast District office in accordance with Rule 62-4.130, F.A.C. A full written report on the malfunctions shall be submitted in a quarterly report, if requested by the Department or its agent. [Rule 62-210.700(6), F.A.C.]

E.11. Any measurements, maintenance, reports, and records shall be retained for at least **5 (five)** years following the date of such measurements, maintenance, reports, and records. [Rule 62-213.440(1)(b)2.b., F.A.C.]

E.12. Test Reports.
(a) The owner or operator of an emissions unit for which a compliance test is required shall file a report with the Department's Southeast District office and the Dade County's DERM office on the results of each such test.
(b) The required test report shall be filed with the Department's Southeast District office and the Dade County's DERM office as soon as practical but no later than 45 days after the last sampling run of each test is completed.
(c) The test report shall provide sufficient detail on the emissions unit tested and the test procedures used to allow the Department's Southeast District office and the Dade County's DERM office to determine if the test was properly conducted and the test results properly computed. As a minimum, the test report, other than for an EPA or DEP Method 9 test, shall provide the following information:

1. The type, location, and designation of the emissions unit tested.
2. The facility at which the emissions unit is located.
3. The owner or operator of the emissions unit.
4. The normal type and amount of fuels used and materials processed, and the types and amounts of fuels used and material processed during each test run.
5. The means, raw data and computations used to determine the amount of fuels used and materials processed, if necessary to determine compliance with an applicable emission limiting standard.
6. The type of air pollution control devices installed on the emissions unit, their general condition, their normal operating parameters (pressure drops, total operating current and GPM scrubber water), and their operating parameters during each test run.
7. A sketch of the duct within 8 stack diameters upstream and 2 stack diameters downstream of the sampling ports, including the distance to any upstream and downstream bends or other flow disturbances.
8. The date, starting time and duration of each sampling run.
9. The test procedures used, including any alternative procedures authorized pursuant to Rule 62-297.620, F.A.C. Where optional procedures are authorized in this chapter, indicate which option was used.
10. The number of points sampled and configuration and location of the sampling plane.
11. For each sampling point for each run, the dry gas meter reading, velocity head, pressure drop across the stack, temperatures, average meter temperatures and sample time per point.
12. The type, manufacturer and configuration of the sampling equipment used.
13. Data related to the required calibration of the test equipment.
14. Data on the identification, processing and weights of all filters used.
15. Data on the types and amounts of any chemical solutions used.
16. Data on the amount of pollutant collected from each sampling probe, the filters, and the impingers, are reported separately for the compliance test.

17. The names of individuals who furnished the process variable data, conducted the test, analyzed the samples and prepared the report.
18. All measured and calculated data required to be determined by each applicable test procedure for each run.
19. The detailed calculations for one run that relate the collected data to the calculated emission rate.
20. The applicable emission standard, and the resulting maximum allowable emission rate for the emissions unit, plus the test result in the same form and unit of measure.
21. A certification that, to the knowledge of the owner or his authorized agent, all data submitted are true and correct. When a compliance test is conducted for the Department's Southeast District or its agent, the person who conducts the test shall provide the certification with respect to the test procedures used. The owner or his authorized agent shall certify that all data required and provided to the person conducting the test are true and correct to his knowledge.

[Rules 62-213.440 and 62-297.310(8), F.A.C.]

Section III. Emissions Unit(s) and Conditions.

Subsection F. This section addresses the following emissions unit(s).

E.U. ID No.	Brief Description
-vvv	Activated Carbon (or Comparable Reactant) Storage Silo

Activated carbon (or comparable reactant) used in the injection system for each municipal waste combustor is stored in a silo. The activated carbon (or comparable reactant) will be utilized for the control of mercury and dioxin/furans. Emissions from the silo are controlled by a baghouse.

{Permitting note(s): Emissions unit **-vvv** is a minor emissions unit regulated under Rule 62-210.300, F.A.C., Permits Required; and, Rule 62-212.400, F.A.C., Prevention of Significant Deterioration [PSD; and, PSD-FL-006(A), (B) & (D)]}

The following specific conditions apply to the emissions unit listed above:

Essential Potential to Emit (PTE) Parameters

F.1. Hours of Operation. This emissions unit is allowed to operate continuously, i.e., 8,760 hours/year. [Rule 62-210.200(PTE), F.A.C.; and, PSD-FL-006(D)]

Emission Limitations and Standards

F.2. Particulate Matter and Visible Emissions.
a. Particulate matter emissions shall not exceed 0.01 grains per dry standard cubic foot, front-half catch; or,
b. Visible emissions shall not exceed 5 percent opacity, since each emissions unit's potential particulate matter emissions are less than 100 TPY and is equipped with a baghouse control system. As long as the visible emissions do not exceed 5 percent opacity, compliance is assumed for the particulate matter limitations established in paragraph (a) above.

If the Department's Southeast District office or the Dade County's DERM office has reason to believe that the particulate matter weight emissions standard in paragraph (a) above is not being met, it shall require that compliance be demonstrated by the test method specified in specific condition **F.6.** [PSD-FL-006(A), (B) & (D); and, Rule 62-297.620(4), F.A.C.]

Excess Emissions

F.3. Excess emissions from these emissions units resulting from startup, shutdown or malfunction shall be permitted provided that best operational practices to minimize emissions are adhered to and the duration of excess emissions shall be minimized but in no case exceed two hours in any 24 hour period unless specifically authorized by the Department for longer duration.
[Rule 62-210.700(1), F.A.C.]

F.4. Excess emissions which are caused entirely or in part by poor maintenance, poor operation, or any other equipment or process failure which may reasonably be prevented during startup, shutdown or malfunction shall be prohibited.
[Rule 62-210.700(4), F.A.C.]

Monitoring of Operations

F.5. Determination of Process Variables.
(a) Required Equipment. The owner or operator of an emissions unit for which compliance tests are required shall install, operate, and maintain equipment or instruments necessary to determine process variables, such as process weight input or heat input, when such data are needed in conjunction with emissions data to determine the compliance of the emissions unit with applicable emission limiting standards.
(b) Accuracy of Equipment. Equipment or instruments used to directly or indirectly determine process variables, including devices such as belt scales, weight hoppers, flow meters, and tank scales, shall be calibrated and adjusted to indicate the true value of the parameter being measured with sufficient accuracy to allow the applicable process variable to be determined within 10% of its true value.
[Rule 62-297.310(5), F.A.C.]

Test Methods and Procedures

F.6. Particulate Matter. The test methods for particulate emissions shall be EPA Method 5 pursuant to Rule 62-297.401, F.A.C., and 40 CFR 60, Appendix A
[Rule 62-297.401, F.A.C.]

F.7. Visible Emissions. EPA Method 9 shall be used to determine opacity compliance pursuant to Rule 62-297.401, F.A.C., and 40 CFR 60, Appendix A.
[Rule 62-297.401, F.A.C.]

F.8. Required Number of Test Runs. For mass emission limitations, a compliance test shall consist of three complete and separate determinations of the total air pollutant emission rate through the test section of the stack or duct and three complete and separate determinations of any applicable process variables corresponding to the three distinct time periods during which the stack emission rate was measured provided, however, that three complete and separate determinations shall not be required if the process variables are not subject to variation during a compliance test, or if three determinations are not necessary in order to calculate the unit's emission rate. The three required test runs shall be completed within one consecutive five day period. In the event that a sample is lost or one of the three runs must be discontinued because of circumstances beyond the control of the owner or operator, and a valid third run cannot be obtained within the five day period allowed for the test, the Secretary or his or her designee may accept the results of the two complete runs as proof of compliance, provided that the arithmetic mean of the results of the two complete runs is at least 20 percent below the allowable emission limiting standards.
[Rule 62-297.310(1), F.A.C.]

F.9. Operating Rate During Testing. Testing of emissions shall be conducted with the emissions unit operation at permitted capacity, which is defined as 90 to 100 percent of the maximum operation rate allowed by the permit. If it is impracticable to test at permitted capacity, an emissions unit may be tested at less than the minimum permitted capacity; in this case, subsequent emissions unit operation is limited to 110 percent of the test load until a new test is conducted. Once the emissions unit is so limited, operation at higher capacities is allowed for no more than 15 consecutive days for the purpose of additional compliance testing to regain the authority to operate at the permitted capacity.
[Rules 62-297.310(2) & (2)(b), F.A.C.]

F.10. Calculation of Emission Rate. The indicated emission rate or concentration shall be the arithmetic average of the emission rate or concentration determined by each of the separate test runs unless otherwise specified in a particular test method or applicable rule.
[Rule 62-297.310(3), F.A.C.]

F.11. Applicable Test Procedures.
(a) Required Sampling Time.
1. Unless otherwise specified in the applicable rule, the required sampling time for each test run shall be no less than one hour and no greater than four hours, and the sampling time at each sampling point shall be of equal intervals of at least two minutes.
2. Opacity Compliance Tests. When either EPA Method 9 or DEP Method 9 is specified as the applicable opacity test method, the required minimum period of observation for a compliance test shall be sixty (60) minutes for emissions units which emit or have the potential to emit 100 tons per year or more of particulate matter, and thirty (30) minutes for emissions units which have potential emissions less than 100 tons per year of particulate matter and are not subject to a multiple-valued opacity standard. The opacity test observation period shall include the period during which the highest opacity emissions can reasonably be expected to occur. Exceptions to these requirements are as follows:
a. For batch, cyclical processes, or other operations which are normally completed within less than the minimum observation period and do not recur within that time, the period of observation shall be equal to the duration of the batch cycle or operation completion time.
b. The observation period for special opacity tests that are conducted to provide data to establish a surrogate standard pursuant to Rule 62-297.310(5)(k), F.A.C., Waiver of Compliance Test Requirements, shall be established as necessary to properly establish the relationship between a proposed surrogate standard and an existing mass emission limiting standard.
c. The minimum observation period for opacity tests conducted by employees or agents of the Department to verify the day-to-day continuing compliance of a unit or activity with an applicable opacity standard shall be twelve minutes.
[Rule 62-297.310(4), F.A.C.]

F.12. Required Stack Sampling Facilities. When a mass emissions stack test is required, the permittee shall comply with the requirements contained in Appendix SS-1, Stack Sampling Facilities, attached to this permit.
[Rule 62-297.310(6), F.A.C.]

F.13. Frequency of Compliance Tests. The following provisions apply only to those emissions units that are subject to an emissions limiting standard for which compliance testing is required.
(a) General Compliance Testing.
3. The owner or operator of an emissions unit that is subject to any emission limiting standard shall conduct a compliance test that demonstrates compliance with the applicable emission limiting standard prior to obtaining a renewed operation permit. Emissions units that are required to conduct an annual compliance test may submit the most recent annual compliance test to satisfy the requirements of this provision. In renewing an air operation permit pursuant to Rule 62-210.300(2)(a)3.b., c., or d., F.A.C., the Department shall not require submission of emission compliance test results for any emissions unit that, during the year prior to renewal:
a Did not operate; or

4. During each federal fiscal year (October 1 - September 30), unless otherwise specified by rule, order, or permit, the owner or operator of each emissions unit shall have a formal compliance test conducted for:
   a. Visible emissions, if there is an applicable standard;
   b. Each of the following pollutants, if there is an applicable standard, and if the emissions unit emits or has the potential to emit: 5 tons per year or more of lead or lead compounds measured as elemental lead; 30 tons per year or more of acrylonitrile; or 100 tons per year or more of any other regulated air pollutant; and
   c. Each NESHAP pollutant, if there is an applicable emission standard.
9. The owner or operator shall notify the Department's Southeast District office and the Dade County's DERM office at least 15 days prior to the date on which each formal compliance test is to begin, of the date, time, and place of each such test, and the test contact person who will be responsible for coordinating and having such test conducted for the owner or operator.

(b) Special Compliance Tests. When the Department's Southeast District office or the Dade County's DERM office, after investigation, has good reason (such as complaints, increased visible emissions or questionable maintenance of control equipment) to believe that any applicable emission standard contained in a Department rule or in a permit issued pursuant to those rules is being violated, it may require the owner or operator of the emissions unit to conduct compliance tests which identify the nature and quantity of pollutant emissions from the emissions unit and to provide a report on the results of said tests to the Department's Southeast District office and the Dade County's DERM office.

(c) Waiver of Compliance Test Requirements. If the owner or operator of an emissions unit that is subject to a compliance test requirement demonstrates to the Department, pursuant to the procedure established in Rule 62-297.620, F.A.C., that the compliance of the emissions unit with an applicable weight emission limiting standard can be adequately determined by means other than the designated test procedure, such as specifying a surrogate standard of no visible emissions for particulate matter sources equipped with a bag house or specifying a fuel analysis for sulfur dioxide emissions, the Department shall waive the compliance test requirements for such emissions units and order that the alternate means of determining compliance be used, provided, however, the provisions of Rule 62-297.310(7)(b), F.A.C., shall apply.

[Rule 62-297.310(7), F.A.C.; PSD-FL-006(D); and, SIP approved]

Monitoring of Operations

F.14. Determination of Process Variables.

(a) Required Equipment. The owner or operator of an emissions unit for which compliance tests are required shall install, operate, and maintain equipment or instruments necessary to determine process variables, such as process weight input or heat input, when such data are needed in conjunction with emissions data to determine the compliance of the emissions unit with applicable emission limiting standards.

(b) Accuracy of Equipment. Equipment or instruments used to directly or indirectly determine process variables, including devices such as belt scales, weight hoppers, flow meters, and tank scales, shall be calibrated and adjusted to indicate the true value of the parameter being measured with sufficient accuracy to allow the applicable process variable to be determined within 10% of its true value.

[Rule 62-297.310(5), F.A.C.]

Recordkeeping and Reporting Requirements

F.15. In the case of excess emissions resulting from malfunctions, each owner or operator shall notify the Department's Southeast District office in accordance with Rule 62-4.130, F.A.C. A full written report on the malfunctions shall be submitted in a quarterly report, if requested by the Department or its agent. [Rule 62-210.700(6), F.A.C.]

F.16. Any measurements, maintenance, reports, and records shall be retained for at least **5 (five)** years following the date of such measurements, maintenance, reports, and records. [Rule 62-213.440(1)(b)2.b., F.A.C.]

F.17. Test Reports.
(a) The owner or operator of an emissions unit for which a compliance test is required shall file a report with the Department's Southeast District office and the Dade County's DERM office on the results of each such test.
(b) The required test report shall be filed with the Department's Southeast District office and the Dade County's DERM office as soon as practical but no later than 45 days after the last sampling run of each test is completed.
(c) The test report shall provide sufficient detail on the emissions unit tested and the test procedures used to allow the Department's Southeast District office and the Dade County's DERM office to determine if the test was properly conducted and the test results properly computed. As a minimum, the test report, other than for an EPA or DEP Method 9 test, shall provide the following information:

1. The type, location, and designation of the emissions unit tested.
2. The facility at which the emissions unit is located.
3. The owner or operator of the emissions unit.
4. The normal type and amount of fuels used and materials processed, and the types and amounts of fuels used and material processed during each test run.
5. The means, raw data and computations used to determine the amount of fuels used and materials processed, if necessary to determine compliance with an applicable emission limiting standard.
6. The type of air pollution control devices installed on the emissions unit, their general condition, their normal operating parameters (pressure drops, total operating current and GPM scrubber water), and their operating parameters during each test run.
7. A sketch of the duct within 8 stack diameters upstream and 2 stack diameters downstream of the sampling ports, including the distance to any upstream and downstream bends or other flow disturbances.
8. The date, starting time and duration of each sampling run.
9. The test procedures used, including any alternative procedures authorized pursuant to Rule 62-297.620, F.A.C. Where optional procedures are authorized in this chapter, indicate which option was used.
10. The number of points sampled and configuration and location of the sampling plane.
11. For each sampling point for each run, the dry gas meter reading, velocity head, pressure drop across the stack, temperatures, average meter temperatures and sample time per point.
12. The type, manufacturer and configuration of the sampling equipment used.
13. Data related to the required calibration of the test equipment.
14. Data on the identification, processing and weights of all filters used.
15. Data on the types and amounts of any chemical solutions used.
16. Data on the amount of pollutant collected from each sampling probe, the filters, and the impingers, are reported separately for the compliance test.

17. The names of individuals who furnished the process variable data, conducted the test, analyzed the samples and prepared the report.
18. All measured and calculated data required to be determined by each applicable test procedure for each run.
19. The detailed calculations for one run that relate the collected data to the calculated emission rate.
20. The applicable emission standard, and the resulting maximum allowable emission rate for the emissions unit, plus the test result in the same form and unit of measure.
21. A certification that, to the knowledge of the owner or his authorized agent, all data submitted are true and correct. When a compliance test is conducted for the Department's Southeast District or its agent, the person who conducts the test shall provide the certification with respect to the test procedures used. The owner or his authorized agent shall certify that all data required and provided to the person conducting the test are true and correct to his knowledge.

[Rules 62-213.440 and 62-297.310(8), F.A.C.]

Appendix I-1, List of Insignificant Emissions Units and/or Activities

The facilities, emissions units, or pollutant-emitting activities listed in Rule 62-210.300(3)(a), F.A.C., Categorical Exemptions, are exempt from the permitting requirements of Chapters 62-210 and 62-4, F.A.C.; provided, however, that exempt emissions units shall be subject to any applicable emission limiting standards and the emissions from exempt emissions units or activities shall be considered in determining the potential emissions of the facility containing such emissions units. Emissions units and pollutant-emitting activities exempt from permitting under Rule 62-210.300(3)(a), F.A.C., shall not be exempt from the permitting requirements of Chapter 62-213, F.A.C., if they are contained within a Title V source; however, such emissions units and activities shall be considered insignificant for Title V purposes provided they also meet the criteria of Rule 62-213.430(6)(b), F.A.C. No emissions unit shall be entitled to an exemption from permitting under Rule 62.210.300(3)(a), F.A.C., if its emissions, in combination with the emissions of other units and activities at the facility, would cause the facility to emit or have the potential to emit any pollutant in such amount as to make the facility a Title V source.

The below listed emissions units and/or activities are considered insignificant pursuant to Rule 62-213.430(6), F.A.C.

Brief Description of Emissions Units and/or Activities
1. Combustion Emissions from Mobile Sources
2. Air Conditioning Units
3. Ventilation Systems and Related Facilities
4. Non-Commercial Food Operations
5. Plumbing Vents and Drains
6. Plant Operations, Maintenance and Upkeep
7. Repair and Maintenance Shop Activities
8. Portable Electric Generators
9. Cutting, Grinding, and other Hand Held Equipment
10. Welding Equipment, Cutting Torches, and Related Equipment
11. Air Compressors
12. Batteries and UPS Systems
13. Storage Tanks, Vents, and Drains
14. Continuous Emissions Monitors and Analyzer Vents
15. Pressure Regulator Vents
16. Laboratory Equipment
17. Analytical Instruments
18. Fugitive Particulate Matter Emissions
19. Demineralizer and Water Treatment Systems
20. Cooling Towers
21. Deaerators
22. Fire Suppression Systems
23. Steam Vents and Safety Relief Valves
24. Steam Leaks
25. Housekeeping
26. Landscaping
27. Ash Quenching and Conveying
28. Ash Monofill
29. Plant Roads Unconfined PM Emissions
30. Chemical Tanks, Vents, and Drains
31. Lubrication Oil, Hydraulic Oil, Grease Tanks, Drums, Vents, and Drains
32. Waste Oil Tanks
33. Diesel Engine Powered Generators – Cooling Tower, Lift Station, and Fire Water

34. Degreaser, Solvents, and other Tanks, Drums, Vents, and Drains
35. Propane Tanks
36. Propane Vaporizers
37. LP Gas Cylinders
38. Acetylene and Oxygen Bottles
39. Portable Tire Shredder
40. Stormwater, Wastewater, and Leachate Systems
41. Oil/Water Separator
42. Recovered Material Processing (Ferrous, Aluminum, etc.)
43. Deodorizer
44. Electric Transformers and Equipment
45. Insecticides, Pesticides, and Herbicides
46. Paints and Cleaners
47. Truck Washing
48. Temporary Construction

Appendix H-1, Permit History/ID Number Changes

Dade County Dept. of Solid Waste Management
Dade County Resource Recovery Facility

DRAFT Title V Permit Revision No.: 0250348-004-AV
Facility ID No.: 0250348

Permit History (for tracking purposes):

E.U. ID No	Description	Permit No.	Effective Date	Expiration Date	Project Type [1]
-001	Boiler #1	PSD-FL-006 PA 77-08	2/27/78		
		PA 77-08B	2/24/93		
		PSD-FL-006(A)	12/16/94		
		PSD-FL-006(B)	3/22/99		
		PSD-FL-006(D)	7/21/2000		
		0250348-001-AV	10/12/2000	10/02/2005	Initial
		0250348-004-AV	Pending	10/02/2005	Revision
-002	Boiler #2	PSD-FL-006 PA 77-08	2/27/78		
		PA 77-08B	2/24/93		
		PSD-FL-006(A)	12/16/94		
		PSD-FL-006(B)	3/22/99		
		PSD-FL-006(D)	7/21/2000		
		0250348-001-AV	10/12/2000	10/02/2005	Initial
		0250348-004-AV	Pending	10/02/2005	Revision
-003	Boiler #3	PSD-FL-006 PA 77-08	2/27/78		
		PA 77-08B	2/24/93		
		PSD-FL-006(A)	12/16/94		
		PSD-FL-006(B)	3/22/99		
		PSD-FL-006(D)	7/21/2000		
		0250348-001-AV	10/12/2000	10/02/2005	Initial
		0250348-004-AV	Pending	10/02/2005	Revision
-004	Boiler #4	PSD-FL-006 PA 77-08	2/27/78		
		PA 77-08B	2/24/93		
		PSD-FL-006(A)	12/16/94		
		PSD-FL-006(B)	3/22/99		
		PSD-FL-006(D)	7/21/2000		
		0250348-001-AV	10/12/2000	10/02/2005	Initial
		0250348-004-AV	Pending	10/02/2005	Revision

Appendix H-1, Permit History/ID Number Changes
Dade County Dept. of Solid Waste Management
Dade County Resource Recovery Facility
DRAFT Title V Permit Revision No.: 0250348-004-AV
Facility ID No.: 0250348

E.U. ID No	Description	Permit No.	Effective Date	Expiration Date	Project Type [1]
-rrr	MSW to RDF Processing Facility with Baghouses	PSD-FL-006(A)	12/16/94		
		PSD-FL-006(B)	3/22/99		
		PSD-FL-006(D)	7/21/2000		
		0250348-001-AV	10/12/2000	10/02/2005	Initial
		0250348-004-AV	Pending	10/02/2005	No Change
-sss	Bulky Waste to Biomass Processing Facility with Baghouses	PSD-FL-006(A)	12/16/94		
		PSD-FL-006(B)	3/22/99		
		PSD-FL-006(D)	7/21/2000		
		0250348-001-AV	10/12/2000	10/02/2005	Initial
		0250348-004-AV	Pending	10/02/2005	No Change
-ttt	Ash Building and Handling System Ash Storage Silo with Baghouse Ash Conditioning Agent Storage Silo Baghouse	PSD-FL-006(A)	12/16/94		
		PSD-FL-006(B)	3/22/99		
		PSD-FL-006(D)	7/21/2000		
		0250348-001-AV	10/12/2000	10/02/2005	Initial
		0250348-004-AV	Pending	10/02/2005	No Change
-uuu	Lime Storage Silo with Baghouse	PSD-FL-006(A)	12/16/94		
		PSD-FL-006(B)	3/22/99		
		PSD-FL-006(D)	7/21/2000		
		0250348-001-AV	10/12/2000	10/02/2005	Initial
		0250348-004-AV	Pending	10/02/2005	No Change
-xxx	Activated Carbon or Comparable Reactant Storage Silo with Baghouse	PSD-FL-006(A)	12/16/94		
		PSD-FL-006(B)	3/22/99		
		PSD-FL-006(D)	7/21/2000		
		0250348-001-AV	10/12/2000	10/02/2005	Initial
		0250348-004-AV	Pending	10/02/2005	No Change

[1] Project Type (select one): Initial; Revision; Renewal; Administrative Correction; or, No Change.

Mitchell, Bruce

From: Boutwell, Barbara
Sent: Monday, April 23, 2001 12:10 PM
To: Elizabeth Bartlett; Fillingim, Mary; Gracy Danois; Gregg Worley; Joel Huey; Walker, Elizabeth (AIR)
Cc: Mitchell, Bruce
Subject: New Posting #0250348

There is a new posting on Florida's website.

0250348004AV
MIAMI DADE RRF/MONTENAY

FEDNOTD.UUE

Draft Permit Revision

The notification letter is encoded and attached. If you have any questions, feel free to contact me.

Thanks,
Barbara

Golder Associates Inc.

6241 NW 23rd Street, Suite 500
Gainesville, FL 32653-1500
Telephone (352) 336-5600
Fax (352) 336-6603

RECEIVED
MAR 09 2001
BUREAU OF AIR REGULATION

March 7, 2001

0037532

Florida Department of Environmental Protection
Bureau of Air Regulation
2600 Blair Stone Road
Tallahassee, FL 32399-2400

Attention: Mr. Scott M. Sheplak, P.E.

RE: DADE COUNTY RESOURCES RECOVERY FACILITY
DRAFT TITLE V PERMIT NO. 0250348-004-AV

Dear Mr. Sheplak:

Dade County Department of Solid Waste (DCDSW), Montenay International, and Golder Associates Inc. (Golder) has received the draft Title V permit for the Dade County Resources Recovery Facility, dated December 21, 2000. The purpose of this permit is to incorporate the provisions of PSD permit No. 0250348-003-AC/PSD-FL-006(D) into the Title V permit. The draft permit has been reviewed by all parties, and the comments have been incorporated into the attached marked-up copy of the draft permit. The majority of changes have been made solely to be consistent with and reflect the identical language in the PSD permit. Others have been made for clarification purposes.

It is our desire to resolve these issues and obtain a final revised Title V permit as expeditiously as possible. Therefore, please call Anetha Lue (305-854-2229 ext. 205) or myself (352-336-5600) directly if you have any questions concerning this submittal, or would like to discuss any of the proposed changes.

Sincerely,

GOLDER ASSOCIATES INC.

David A. Buff

David A. Buff, P.E., Q.E.P.
Principal Engineer
Florida P.E.#19011
SEAL

DB/jkw/jkw

Enclosure

cc: Anetha Lue, P.E., Montenay
Vicente Castro, Miami-Dade SWM
Lee Casey, Miami-Dade SWM
David Dee, Landers and Parsons

P:\Projects\2000\0037\0037532A Dade County\02\L030701.doc

Dade County Department of Solid Waste Management
Dade County Resource Recovery Facility
Facility ID No.: 0250348
Dade County

Title V Air Operation Permit Revision
DRAFT Title V Permit Revision No.: 0250348-004-AV

Permitting Authority
State of Florida
Department of Environmental Protection
Division of Air Resources Management
Bureau of Air Regulation
Title V Section

Mail Station #5505
2600 Blair Stone Road
Tallahassee, Florida 32399-2400
Telephone: 850/488-0114
Fax: 850/922-6979

Compliance Authority
Department of Environmental Protection
Southeast District
400 North Congress Avenue
West Palm Beach, Florida 33401
Telephone: 561/681-6600
Fax: 561/681-6755

Title V Air Operation Permit Revision

DRAFT Permit Revision No.: 0250348-004-AV

Table of Contents

Section

Title V Air Operation Permit Placard Page **1**
Section I. Facility Information. **2**
Subsection A. Facility Description. 2
Subsection B. Summary of Emissions Unit ID Numbers and Brief Descriptions. 3
Subsection C. Relevant Documents 3
Section II. Facility-wide Conditions. **4**
Section III. Emissions Units and Conditions. **7**
Subsection A. Reserved. 7
Subsection B. Units 1 thru 4 RDF Combustors and Auxiliary Burners 8
Subsection C. MSW to RDF Processing and Bulky Waste to Biomass Processing Facilities. 54~~55~~52
Subsection D. Ash Building and Handling System. ..... 60~~61~~58
Subsection E. Lime Storage Silo. ..... 69~~70~~66
Subsection F. Activated Carbon or Comparable Reactant Storage Silo ..... 74~~75~~71

Permittee:
Dade County Dept. of Solid Waste Management
8675 NW 53rd Street, Suite 201
Miami, Florida 33166-4598

DRAFT Permit Revision No.: 0250348-004-AV
Facility ID No.: 0250348
SIC Nos.: 49, 4953
Project: Title V Air Operation Permit Revision

The purpose for this permit revision is to incorporate the terms and conditions established in air construction permit No. 0250348-003-AC/PSD-FL-006(D), issued July 21, 2000. The existing facility is located at 6990 Northwest 97th Avenue, Miami, Florida 33178-6430, better described as approximately 0.5 mile north of Northwest 58th Street immediately west of Northwest 97th Avenue, Miami, Dade County. UTM Coordinates: Zone 17, 564.30 km East and 2857.40 km North; Latitude: 25° 50' 06" North and Longitude: 80° 21' 30" West.

STATEMENT OF BASIS: This Title V air operation permit revision is issued under the provisions of Chapter 403, Florida Statutes (F.S.), and Florida Administrative Code (F.A.C.) Chapters 62-4, 62-210, and 62-213. The above named permittee is hereby authorized to perform the work or operate the facility shown on the application and approved drawing(s), plans, and other documents, attached hereto or on file with the permitting authority, in accordance with the terms and conditions of this permit.

Referenced attachments made a part of this permit revision:
Appendix I-1, List of Insignificant Emissions Units and/or Activities
Appendix SS-1, Stack Sampling Facilities (version dated 10/7/96)
Appendix TV-3, Title V Conditions (version dated 04/30/99)
Figure 1: Summary Report-Gaseous and Opacity Excess Emission and Monitoring System Performance (40 CFR 60)
Table 297.310-1, Calibration Schedule

Initial Effective Date: October 2, 2000
Revision Effective Date: (issue date)
Renewal Application Due Date: April 2, 2005
Expiration Date: October 2, 2005

Howard L. Rhodes, Director,
Division of Air Resources Management

HLR/sms/bm

Section I. Facility Information.

Subsection A. Facility Description.

This existing facility consists of four identical Zurn Refuse Derived Fuel (RDF) Spreader Stoker Combustion Units 1 thru 4, with auxiliary burners, and a cooling tower. The facility's primary activities are garbage and trash receiving and processing (including a metals recovery system); fuel handling and storage; biomass production and export; RDF, natural gas, and propane combustion; ash storage and processing, including a monofill ash landfill; and, maintaining ancillary support equipment. These emissions units recently underwent a permit modification activity (PSD-FL-006(D)) that was completed on July 21, 2000. The purpose of the permit modification was to upgrade the air pollution control system pursuant to the requirements of 40 CFR 60, Subpart Cb - Emissions Guidelines and Compliance Schedules for Municipal Waste Combustors That Are Constructed on or Before December 19, 1995, for the existing four RDF boilers built in 1987-1989. The modifications included changes to the overfire air system, fuel feed system, and associated fuel distribution system. The electrostatic precipitators will be replaced with fabric filters, spray dryer absorbers and activated carbon injection units; and, a selective non-catalytic reduction system will be installed, if it is necessary to comply with 40 CFR 60, Subpart Cb.

The facility is designed to process 3,000 tons/day, 18,000 tons/wk, and 936,000 tons/yr of municipal solid waste (MSW: trash and garbage) into RDF and saleable extractables, such as metals. The biomass fuel preparation system will process up to 400,000 tons per year of the bulky solid waste into biomass, which will be either transported off-site for use in biomass-fired cogeneration units or combusted on-site.

Each combustor ~~is allowed to burn~~ shall have a nominal permitted capacity of 27 tons/hr (TPH) of RDF (based on a 12-month rolling average). RDF is the primary fuel; and, propane and natural gas are auxiliary fuels used for startup, shutdown, and malfunctions, and to support good combustion. The auxiliary burners have a maximum heat input of 80 MMBtu/hr. The facility is allowed to burn the facility's processed biomass fuel (5%, by weight) not transported off-site, natural gas, non-MSW materials as segregated waste (5%, by weight), used tires (3%, by weight), and on-specification used oil, oily water, oily sludge, spent greases and oily solid waste (such as rags) generated on-site. The maximum continuous rating (MCR) for each combustor is 180,000 lbs/hr steam at 625 psig and 730 ^{0}F ~~(equivalent to 314 MMBtu/hr and 27 TPH RDF with a heat content of 5,818 Btu/lb), 24-hour block average,~~ when firing RDF. Units 1 and 2 provide steam to a turbine-generator with a nameplate rating of 38.5 megawatts (MW; gross); and, Units 3 and 4 provide steam to a turbine-generator with a nameplate rating of 38.5 MW (gross); and, the electricity is used for in-plant electrical load and the excess is sold ~~to Florida Power Corporation~~.

To comply with 40 CFR 60, Subpart Cb, combustion control systems will be installed for carbon monoxide and nitrogen oxides, as necessary, to meet the emissions limits. Continuous monitoring devices for combustion, process parameters, SO_2, NOx, and CO will be installed to improve combustion efficiency and control. The air pollution control equipment will consist of a spray dryer absorber (for acid gases), an activated carbon or comparable reactant injection system (for mercury and dioxin), and a fabric filter baghouse (for particulate matter and heavy metals). The facility will also have an ash building and handling system, a new lime storage silo, and an activated carbon storage silo. In addition, the existing stacks and flue gas handling systems will be replaced with new stacks and flue gas handling systems; Units 1 and 2 will share a common stack, each with its own flue; and, Units 3 and 4 will share a common stack, each with its own flue. Odors will be minimized by keeping the truck access doors closed during non-use; and, a negative pressure will be maintained on the garbage tipping floor and the air collected will be used as combustion air.

Also included in this permit are miscellaneous insignificant emissions units and/or activities.

This facility is a major source of hazardous air pollutants (HAPs).

The use of 'Permitting Notes' throughout this permit are for informational purposes, only, and are not permit conditions.

Subsection B. Summary of Emissions Unit ID Numbers and Brief Descriptions.

The facility consists of the following emissions units/activities:

E.U./Facility ID No.	Brief Description
-001/Unit 1	~~314~~ 314MMBtu/hr nominal (180,000 lbs/hr steam maximum continuous rating) RDF Combustor & Auxiliary Burners
-002/Unit 2	~~314~~ 314 MMBtu/hr nominal (180,000 lbs/hr steam maximum continuous rating) RDF Combustor & Auxiliary Burners
-003/Unit 3	~~314~~ 314 MMBtu/hr nominal (180,000 lbs/hr steam maximum continuous rating) RDF Combustor & Auxiliary Burners
-004/Unit 4	~~314~~ 314 MMBtu/hr nominal (180,000 lbs/hr steam maximum continuous rating) RDF Combustor & Auxiliary Burners
-rrr	MSW to RDF Processing Facility with Baghouses
-sss	Bulky Waste to Biomass Processing Facility with Baghouses
-ttt	Ash Building and Handling System Ash Storage Silo with Baghouse ~~Ash Conditioning Agent Storage Silo Baghouse~~
-uuu	Lime Storage Silo with Baghouse
~~-xxx~~vvv	Activated Carbon or Comparable Reactant Storage Silo with Baghouse

Please reference the Permit Number, the Facility Identification Number, and the appropriate Emissions Unit(s) ID Number(s) on all correspondence, test report submittals, applications, etc.

Subsection C. Relevant Documents.

{Permitting Note: The documents listed below are not a part of this permit; however, they are specifically related to this permitting action.}

These documents are provided to the permittee for informational purposes:
Appendix A-1, Abbreviations, Acronyms, Citations, and Identification Numbers (version dated 2/5/97)
Appendix H-1, Permit History/ID Number Transfers

These documents are on file with the permitting authority:
Construction permit No. 0250348-003-AC/PSD-FL-006(D) issued July 21, 2000.
Application for a Title V Permit Revision received October 10, 2000.
Initial Title V Permit issued October 12, 2000.

Section II. Facility-wide Conditions.

The following conditions apply facility-wide:

1. Appendix TV-3, Title V Conditions, is a part of this permit.
{Permitting note: Appendix TV-3, Title V Conditions is distributed to the permittee only. Other persons requesting copies of these conditions shall be provided one copy when requested or otherwise appropriate. If desired, a copy of Appendix TV-3, Title V Conditions can be downloaded from the Division of Air Resources Management's Internet Web site located at the following address:
"http://www.dep.state.fl.us/air/permitting/TitleVperm.htm".}

2. General Pollutant Emission Limiting Standards. Objectionable Odor Prohibited. The permittee shall not cause, suffer, allow, or permit the discharge of air pollutants which cause or contribute to an objectionable odor. The truck access doors to the facility shall remain closed except during normal working shifts when garbage is being received near the garbage storage pit area to allow vehicle passage. Also, a negative pressure shall be maintained on the garbage tipping floor and air from within the garbage building will be used as combustion air.
[Rule 62-296.320(2), F.A.C.; Rule 62-296.401(2)(b), F.A.C.; PA 77-08; and, PSD-FL-006, (A) & (D)]

3. Prevention of Accidental Releases (Section 112(r) of CAA).
a. The permittee shall submit its Risk Management Plan (RMP) to the Chemical Emergency Preparedness and Prevention Office (CEPPO) RMP Reporting Center when, and if, such requirement becomes applicable ; and
b. The permittee shall submit to the permitting authority Title V certification forms or a compliance schedule in accordance with Rule 62-213.440(2), F.A.C.
[40 CFR 68]

4. Insignificant Emissions Units and/or Activities. Appendix I-1, List of Insignificant Emissions Units and/or Activities, is a part of this permit.
[Rules 62-213.440(1), 62-213.430(6), and 62-4.040(1)(b), F.A.C.]

5. Unregulated Emissions Units and/or Activities. Appendix U-1, List of Unregulated Emissions Units and/or Activities, is a part of this permit. **There are none deemed so at this time.**
[Rule 62-213.440(1), F.A.C.]

6. General Pollutant Emission Limiting Standards. Volatile Organic Compounds Emissions or Organic Solvents Emissions. The permittee shall allow no person to store, pump, handle, process, load, unload or use in any process or installation, volatile organic compounds or organic solvents without applying known and existing vapor emission control devices or systems deemed necessary and ordered by the Department.

{Permitting Note: No vapor emission control devices or systems are deemed necessary nor ordered by the Department as of the issuance date of this permit.}
[Rule 62-296.320(1)(a), F.A.C.]

7. General Particulate Emission Limiting Standards. General Visible Emissions Standard. Except for emissions units that are subject to a particulate matter or opacity limit set forth or established by rule and reflected by conditions in this permit, no person shall cause, let, permit, suffer or allow to be discharged into the atmosphere the emissions of air pollutants from any activity, the density of which is equal to or greater than that designated as Number 1 on the Ringelmann Chart (20 percent opacity). EPA Method 9 is the method of compliance pursuant to Chapter 62-297, F.A.C.
[Rules 62-296.320(4)(b)1. & 4., F.A.C.]

8. Reasonable precautions to prevent emissions of unconfined particulate matter at this facility include:

A. Facility's Processing of Biomass
(1) Windows and doors of the enclosed space shall be kept closed except when needed to minimize fugitive dust.
(2) Conveyor systems, screens, handling shredded wood fines and dust will be covered or enclosed.
(3) Shredded wood conveyor systems have baghouse pickup points at the transfer points.
(4) Wind breaks will be installed around the shredded wood load-out area.
(5) Floors in the enclosed area will be cleaned periodically.
(6) Loading areas for shredded wood will be cleaned or wetted as needed to minimize fugitive dust.
(7) Trucks transporting shredded wood will be covered.
(8) Landscaping or planting of vegetation.

B. Other Precautions to be taken at the Dade County Complex
(1) Employment of proper dust-control techniques to prevent fugitive dust emissions during construction activities such as demolition of buildings, grading roads, construction, and land clearing (including construction to be experienced during facility improvements to air pollution control equipment to meet the Emission Guideline requirements of 40 CFR 60, Subpart Cb).
(2) Application of asphalt, water, oil, chemicals, or other dust suppressants to roads~~,~~ yards, open stock piles, and similar emissions units/activities as necessary to minimize fugitive dust (except for within the ash landfill).
(3) Confining abrasive blasting where possible.
(4) Operation of the landfill in accordance with all applicable portions of Chapter 62-7, F.A.C.
(5) Landscaping or planting of vegetation.
(6) All roads, except for roads within the ash landfill, shall be adequately paved to control visible emissions.
(7) Maximum 15 MPH speed limit signs shall be posted to minimize dust generation.
(8) Residue from grates, grate siftings, and ash from the combustor/boiler and fabric filter hoppers during normal operations shall be discharged into the ash handling and silo system to minimize fugitive dust.
(9) The ash/residue in the bottom ash building shall be kept sufficiently moist to minimize fugitive dust during storage and handling operations.
(10) Covering transport vehicles for ash and ~~metals.~~
(11) ~~Keeping metal stockpiles damp~~.
(12) Wetting of bottom ash and fly ash as necessary to minimize fugitive dust prior to the use of conveyor systems.

[Rule 62-296.320(4)(c)2., F.A.C.; PSD-FL-006(A) & (D); PA 77-08C; and, proposed by applicant in initial Title V permit application received June 17, 1996, and revised application received September 2, 1999.]

{Permitting Note: This condition presents the reasonable precautions to be implemented in accordance with Rule 62-296.320(4)(c), F.A.C., in lieu of the requirements of Condition No. 58 of Appendix TV-3.}

9. When appropriate, any recording, monitoring, or reporting requirements that are time-specific shall be in accordance with the effective date of the permit, which defines day one.
[Rule 62-213.440, F.A.C.]

10. The permittee shall submit all compliance related notifications and reports required of this permit to the Department's Southeast District office and the Dade County Department of Environmental Resources Management (DERM; also, known as the "designee") office at the following address:

Department of Environmental Protection
Southeast District
400 North Congress Avenue
West Palm Beach, Florida 33401
Telephone: 561/681-6600
Fax: 561/681-6755

Dade County Dept. of Environmental Resources Management
Air Section
33 Southwest Second Avenue, Suite 900
Miami, Florida 33130-1540
Telephone: 305/372-6925
Fax: 305/372-6954

[PSD-FL-006(D)]

11. Any reports, data, notifications, certifications, required to be sent to the United States Environmental Protection Agency, Region 4, should be sent to:

United States Environmental Protection Agency, Region 4
Air, Pesticides & Toxics Management Division
Air & EPCRA Enforcement Branch
Air Enforcement Section
61 Forsyth Street
Atlanta, Georgia 30303
Telephone: 404/562-9155
Fax: 404/562-9163

Section III. Emissions Units and Conditions.

Subsection A. This section addresses the following emissions unit(s).

Reserved.

Subsection B. This section addresses the following emissions unit(s).

E.U./Facility ID Nos.	Brief Description
-001/Unit 1	~~314~~ 314 MMBtu/hr nominal (180,000 lbs/hr steam maximum continuous rating) RDF Combustor & Auxiliary Burners
-002/Unit 2	~~314~~ 314 MMBtu/hr nominal (180,000 lbs/hr steam maximum continuous rating) RDF Combustor & Auxiliary Burners
-003/Unit 3	~~314~~ 314 MMBtu/hr nominal (180,000 lbs/hr steam maximum continuous rating) RDF Combustor & Auxiliary Burners
-004/Unit 4	~~314~~ 314 MMBtu/hr nominal (180,000 lbs/hr steam maximum continuous rating) RDF Combustor & Auxiliary Burners

{Permitting Note: These emissions units are allowed to burn refuse derived fuel as the main fuel. ***Refuse Derived Fuel*** means a type of municipal solid waste produced by processing municipal solid waste through shredding and size classification. This includes all classes of refuse derived fuel including low-density fluff refuse-derived fuel through densified refuse-derived fuel and pelletized refuse-derived fuel. ***Refuse-derived fuel stoker*** means a steam generating unit that combusts refuse-derived fuel in a semisuspension firing mode using air fed distributors. Each of the four refuse derive waste combustors (RDFs) ~~shall not exceed a~~ produce at the manufacturer's maximum continuous rating (MCR) steam flow of 180,000 lbs/hr (at 625 psig and 730°F~~equivalent to 314 MMBtu/hr and 27 TPH RDF, with a fuel heat content of 5,818 Btu/lb~~). Short term capacity is limited by limiting steam production, which effectively limits heat input~~. The design net steam energy is 1,152 Btu/lb (1,360.42 Btu/lb enthalpy of the steam - 208.42 Btu/lb enthalpy of the feedwater)~~.}.
[PSD-FL-006(D); and, 40 CFR 60.51b]

ARMS emissions units Nos. -001, -002, -003 and -004 are identical rebuilt refuse derived fuel (RDF) spreader stoker combustors with Zurn attributes designated as Units 1, 2, 3 and 4, respectively. RDF is burned in suspension and on a grate with a primary and secondary air system to provide air in varying proportions to promote the proper combustion. Units 1 thru 4 began commercial operation January 1, 1982. Particulate matter emissions from Units 1, 2, 3 and 4 will be controlled fabric filters, while CO and NO_X emissions are controlled by good combustion practices. Following retrofitting to comply with the NSPS, 40 CFR 60, Subparts Cb and ~~Eb~~, each boiler will have a maximum capacity of ~~27~~648 tons of RDF per ~~hour~~ day, as determined by a rolling 12 month average. ~~and 314 MMBtu/hr heat input, based on a maximum heat content value of 5,818 British thermal units (BTU) per pound of RDF.~~ Auxiliary burners associated with each RDF combustor will be permitted to fire propane and natural gas at a maximum heat input of 80 MMBtu/hr for startup, shutdown and malfunction, and at other times when necessary and consistent with good combustion practices. No. 2 fuel oil (with a maximum sulfur content of 0.08%, by weight) was allowed to be used for startup only in PA 77-08, but the facility has chosen not to use fuel oil in the auxiliary burners to date. ~~The maximum continuous rating of steam of each~~ Each unit will be allowed to produce at the manufacturer's maximum continuous rating (MCR) of 180,000 lbs/hr, at 625 psig and 730°F ~~not to be exceeded~~, when firing RDF. Combustion control systems will be installed for carbon monoxide and nitrogen oxides, as necessary, to meet the emissions limits. Continuous monitoring devices for combustion and process parameters and SO_2, NOx and CO will be installed to improve combustion efficiency and control. The air pollution control equipment will consist of a spray dryer absorber (for acid gases), an activated carbon or comparable reactant injection system (for mercury and dioxin), and a fabric filter baghouse (for particulate matter and heavy metals). CO and NO_X emissions are currently controlled by good combustion practices; but, for NO_X, a selective non-catalytic reduction system will be installed, if it is necessary to comply with 40 CFR 60, Subpart Cb. In addition, the ~~existing~~ new stacks and flue gas handling systems will replace the existing stacks and flue gas handling systems (Units 1 and 2 will each have a separate flue and share a common stack: Stack height = 250 feet, exit diameter = 8.5 feet, exit temperature = 270 °F, actual volumetric flow rate = 177,200 acfm, and maximum dry standard volumetric flow rate = 109,054 dscfm; and, Units 3 and 4 will each have a separate flue and share a common stack: Stack height = 250 feet, exit diameter = 8.5 feet, exit temperature = ~~270~~ 300°F, actual volumetric flow rate = ~~177,200~~ 227,000 acfm, and maximum dry standard volumetric flow rate = ~~109,054~~ 88,250 dscfm). Two 38.5 MW (gross) turbine-generators (using the steam from the

four boilers) will supply the in-plant electrical load and the balance of the electricity generated will be sold to Florida Power Corporation. Odors will be minimized by keeping the truck access doors closed during non-use; and, a negative pressure will be maintained on the garbage tipping floor and the air collected will be used as combustion air.

{Permitting notes. These emissions units are regulated under NSPS - 40 CFR 60, Subpart Cb, Emissions Guidelines and Compliance Times for Large Municipal Waste Combustors That Are Constructed on or Before September 20, 1994, adopted and incorporated by reference, subject to provisions, in Rule 62-204.800(8)(b), F.A.C.; NSPS - 40 CFR 60, Subpart E, Standards of Performance for Incinerators, adopted and incorporated by reference in Rule 62-204.800(7), F.A.C.; And the applicable sections of the following rules - NSPS - 40 CFR 60, Subpart Eb, Standards of Performance for Large Municipal Waste Combustors That Are Constructed, Modified or Reconstructed on or Before September 20, 1994, adopted and incorporated by reference in Rule 62-204.800(7), F.A.C.; Rule 62-212.400(5), F.A.C., Prevention of Significant Deterioration (PSD) (PSD-FL-006 and PSD-FL-006(A thru D); Rule 62-212.400(6), F.A.C., Best Available Control Technology (BACT); Rule 62-296.401(2), F.A.C., Incinerators; Rule 62-296.416, F.A.C., Waste-to-Energy Facilities; and, PA 77-08 & 77-08(A, B, & C). Also, please note that conditions in 40 CFR 60, Subpart Cb, reference requirements that are contained in 40 CFR 60, Subpart Eb.}

The following specific conditions, unless revised, apply to the emissions unit(s) listed above:

General

B.0. The completion of installation of air pollution control equipment and completion of performance testing shall have been done no later than December 19, 2000, which is specified in the State 111(d) Plan approved by the EPA on November 13, 1997, and effective January 12, 1998.
[0250348-001-AV]

B.1. The Standards of Performance for New Stationary Sources adopted by reference in Rule 62-204.800(7), F.A.C., the Emission Guidelines for Existing Sources adopted by reference in Rule 62-204.800(8), F.A.C., and the National Emissions Standards for Hazardous Air Pollutants adopted by reference in Rule 62-204.800(9), F.A.C. shall be controlling over other standards in the air pollution rules of the Department except that any emissions limiting standard contained in or determined pursuant to the air pollution rules of the Department which is more stringent than one contained in a Standard of Performance, an Emission Guideline, or a National Emission Standard, or which regulates emissions of pollutants or emissions units not regulated by an applicable Standard of Performance, Emission Guideline, or National Emission Standard, shall apply.
[Rules 62-204.800(7)(c), (8)(a)1., and (9)(c), F.A.C.]

B.2. Definitions. For the purposes of Rules 62-204.800(7), (8), and (9), F.A.C., the definitions contained in the various provisions of 40 CFR Parts 60 and 61, adopted herein shall apply except that the term "Administrator" when used in 40 CFR Parts 60 and 61, shall mean the Secretary or the Secretary's designee except as noted in 40 CFR 61.157.
[40 CFR 60.2; and, Rules 62-204.800(7)(a), (8)(a)2., and, (9)(a), F.A.C.]

B.3. Definitions - Subpart Cb. For purposes of Rule 62-204.800(8)(b), F.A.C., the definitions in 40 CFR 60.51b shall apply except for the term "municipal waste combustor plant", which shall have the same meaning as defined in 40 CFR 60.31b.
[Rule 62-204.800(8)(b)2., F.A.C.]

B.4. Circumvention. No owner or operator subject to the provisions of 40 CFR 60 shall build, erect, install, or use any article, machine, equipment or process, the use of which conceals an emission which would otherwise constitute a violation of an applicable standard. Such concealment includes, but is not limited to, the use of gaseous diluents to achieve compliance with an opacity standard or with a standard which is based on the concentration of a pollutant in the gases discharged to the atmosphere.
[40 CFR 60.12]

B.5. Each emissions unit shall have a metal name plate affixed in a conspicuous place on the shell showing manufacturer, model number, type waste, rated capacity, and certification number.
[PA 77-08; and, PSD-FL-006(D)]

B.6. The height of the boiler stacks (2) shall not be less than 250 feet above the ground level at the base of the stack.
[PSD-FL-006(A) & (D)]

B.7. Units 1 thru 4 are subject to the requirements of 40 CFR 60, Subpart E, except that where requirements within this permit are more restrictive, the requirements of this permit shall apply.
[Rule 62-4.070(3), F.A.C.]

Essential Potential to Emit (PTE) Parameters

B.8. Capacity.
(1) RDF Charging Rate and Heat Input. The maximum charging rate of each emissions unit shall not exceed 27 tons/hr (TPH) or 648 tons/day of RDF, along with other permitted fuels, 12-month rolling average; ~~and, the maximum heat input to each emissions unit is 314 MMBtu/hr heat input (with a maximum heating value of 5,818 Btu/lb of RDF)~~ (see specific conditions **B.12.~~B.12.~~B.12.** and **B.111.~~B.112.~~B.111.**).
(2) Facility's Municipal Solid Waste Processing Rates. The facility is permitted to process a maximum of 3,000 tons/day, 18,000 tons/wk, and 936,000 tons/yr of ~~municipal solid waste (MSW: trash and garbage) into~~ RDF ~~and saleable extractables, such as metals~~.
(3) Biomass Fuel Preparation System. The biomass fuel preparation system is allowed to process up to 400,000 tons/yr of the bulky solid waste into biomass, which will be either transported off-site for use in biomass-fired cogeneration units or combusted on-site.
(4) ~~Maximum Continuous Rating (MCR) Steam Flow. The MCR steam flow of each emissions unit is 180,000 lbs/hr, based on a 24-hour block averaged measurement. This MCR shall not be exceeded.~~
Steam Flow: Each boiler pair shall not exceed and average of 180,000 pounds of steam produced per hour per unit based on a 24-hour block averaged measurement.
(5) Load Level : Unit load means the steam load of the municipal waste combustor (MWC) measured as specified in 40 CFR 60.58b(i)(6). Compliance with the load level requirements shall be determined by a steam meter using ASME Power Test Code for Steam Generating Units, Power test Code 4.1 section 4 (see 40 CFR 60.58b(i)(6)(ii) & (iii)). Each MWC unit shall not operate at a load level greater than 110 percent of the unit's "maximum demonstrated unit load" based on a 4-hour block averaged measurement of steam flow. The "maximum demonstrated unit load" is defined by Condition B.10.
~~(5)~~(6) The procedures specified in paragraphs (a) and (b) shall be used for calculating municipal waste combustor unit capacity as defined under 40 CFR 60.51b.

(a) For municipal waste combustor units capable of combusting municipal solid waste continuously for a 24-hour period, municipal waste combustor unit capacity shall be calculated based on 24 hours of operation at the maximum charging rate. The maximum charging rate shall be determined as specified in paragraphs (i) and (ii) as applicable.

(i) For combustors that are designed based on heat capacity, the maximum charging rate shall be calculated based on the maximum design heat input capacity of the unit and a heating value of 12,800 kilojoules per kilogram for combustors firing refuse-derived fuel and a heating value of 10,500 kilojoules per kilogram for combustors firing municipal solid waste that is not refuse-derived fuel.

(ii) For combustors that are not designed based on heat capacity, the maximum charging rate shall be the maximum design charging rate.

(b) For batch feed municipal waste combustor units, municipal waste combustor unit capacity shall be calculated as the maximum design amount of municipal solid waste that can be charged per batch multiplied by the maximum number of batches that could be processed in a 24-hour period. The maximum number of batches that could be processed in a 24-hour period is calculated as 24 hours divided by the design number of hours required to process one batch of municipal solid waste, and may include fractional batches (e.g., if one batch requires 16 hours, then 24/16, or 1.5 batches, could be combusted in a 24-hour period). For batch combustors that are designed based on heat capacity, the design heating value of 12,800 kilojoules per kilogram for combustors firing refuse-derived fuel and a heating value of 10,500 kilojoules per kilogram for combustors firing municipal solid waste that is not refuse-derived fuel shall be used in calculating the municipal waste combustor unit capacity.

[40 CFR 60.31b and 40 CFR 60.58b(j); Rules 62-4.160(2) and 62-210.200(PTE), F.A.C.; and, PSD-FL-006(D)]

B.9. Emissions Unit Operating Rate Limitation After Testing. See specific condition **B.73.~~B.73.B.73.~~**
[Rule 62-297.310(2), F.A.C.]

B.10. Maximum Demonstrated Municipal Waste Combustor Unit Load. Maximum demonstrated municipal waste combustor unit load means the highest 4-hour arithmetic average municipal waste combustor unit load achieved during four consecutive hours during the most recent dioxin/furan performance test demonstrating compliance with the applicable limit for municipal waste combustor organics specified in specific condition **B.34.~~B.34.B.34.~~**
[40 CFR 60.34b(b) and 40 CFR 60.51b]

B.11. Maximum Demonstrated Particulate Matter Control Device Temperature. Maximum demonstrated particulate matter control device temperature means the highest 4-hour arithmetic average flue gas temperature measured at the particulate matter control device inlet during four consecutive hours during the most recent dioxin/furan performance test demonstrating compliance with the applicable limit for municipal waste combustor organics specified in specific condition **B.34.~~B.34.B.34.~~**
[40 CFR 60.34b(b) and 40 CFR 60.51b]

B.12. Methods of Operation - Fuels.

(1) Refuse Derived Fuel. The primary fuel for Units 1 thru 4 is RDF, including the items and materials that fit within the definition of MSW contained in either 40 CFR 60.51b or Section 403.706(5), F.S.

(2) Unauthorized Fuel. Subject to the limitations contained in this permit, the authorized fuels for the facility also include the other solid wastes that are not MSW, which are described below. However, the facility shall not burn:

(a) those materials that are prohibited by state or federal law;
(b) those materials that are prohibited by this permit;
(c) those materials that are not included as authorized fuels;
(d) lead acid batteries;
(e) hazardous waste;
(f) nuclear waste;

(g) radioactive waste;
(h) sewage sludge;
(i) used oil, **except for what is generated on-site**;
(j) explosives;
(k) biological waste;
(l) beryllium-containing waste, as defined in 40 CFR 61.31(g);
(m) untreated biomedical waste from biomedical waste generators regulated pursuant to Chapter 64E-16, F.A.C., and from other similar generators (or sources); or,
(n) segregated loads of biological waste.

(3) The fuel may be received either as a mixture or as a single-item stream (segregated load) of discarded materials. If the facility intends to use an authorized fuel that is segregated non-MSW material, the fuel shall be either:

(a) well mixed with MSW in the refuse pit; or
(b) alternately charged with MSW in the hopper.

The facility operator shall prepare and maintain records concerning the description and quantities of all segregated loads of non-MSW material which are received and used as fuel at the facility, and subject to a percentage weight limitation, below, (5, 6 and 7). For the purposes of this permit, a segregated load is defined to mean a container or truck that is almost completely or exclusively filled with a single item or homogeneous composition of waste material, as determined by visual observation.
(4) Other Solid Waste. Subject to the conditions and limitations contained in this permit, the following other solid waste may be used as fuel at the facility:

SOLID WASTE FROM ON-SITE OPERATIONS

Used Oil from on-site operations

(a) The constituents and properties of the *on-spec used oil* generate from on-site operations shall comply with the following allowable concentration levels, as stipulated and defined in 40 CFR 279.10 (July 1, 1998 version), which is adopted by reference in Rule 62-730.181, F.A.C.

Constituent/Property	Allowable Concentration
Cadmium	2 ppm maximum
Arsenic	5 ppm maximum
Chromium	10 ppm maximum
Lead	100 ppm maximum
Total Halogens	1000 ppm maximum
Flash Point	100 ° F minimum
Polychlorinated Byphenyls (PCBs)	Less than 2 ppm

(b) The heating value of the waste oil shall also be determined during quarterly testing. No more than 0.5 percent of the maximum design heat input rate to the units, on a monthly average, of oily wastes shall be disposed of in the units.
(c) On site generated *on-specification used oil, oily water, oily sludge, spent greases and oily solid waste (such as rags)* burned at this facility shall not be a hazardous waste as defined by Rule 62-730.030, F.A.C., or 40 CFR Part 261 (July 1, 1999 version). These materials shall

conform to the standards of 40 CFR 279.11 and 40 CFR 761.20(e). It shall not include fuels or blended fuels consisting in whole or in part of hazardous waste or which include mixture of any solid waste generated from the treatment, storage, or disposal of hazardous waste. The on-spec used oil shall be burned in compliance with Section 403.769(3), F.S.

(d) The on-site generated *on-specification* used oil samples (representative of the material disposed of) shall be analyzed by EPA Recommended Analytical Procedures for Used Oil for the following constituent/property, associated unit, and using the test methods indicated:

Constituent/Property	Unit	Test Method
Cadmium	ppm	EPA SW-846(6010)
Arsenic	ppm	EPA SW-846(6010)
Chromium	ppm	EPA SW-846(6010)
Lead	ppm	EPA SW-846(6010)
Total Halogens	ppm	EPA SW-846(9252)
Sulfur	percent	ASTM D129 or ASTM D1552
Flash Point	degree F	EPA SW-846(1010)
Heat of Combustion	Btu/gal	ASTM D240
Density	lbs/gal	
Polychlorinated Byphenyls (PCB's)	ppm	EPA SW-846(0010) and EPA 680
Ash		

NOTE: Other test methods may be used only after receiving written prior approval from the Department.

SOLID WASTE FROM OFF-SITE OPERATIONS

(a) Confidential, proprietary or special documents (including but not limited to business records, lottery tickets, event tickets, coupons and microfilm);
(b) Contraband which is being destroyed at the request of appropriately authorized local, state or federal governmental agencies, provided that such material is not an explosive, a propellant, a hazardous waste, or otherwise prohibited at the facility. For the purposes of this section, contraband includes but is not limited to drugs, narcotics, fruits, vegetables, plants, counterfeit money, and counterfeit consumer goods;
(c) Wood pallets, clean wood, and land clearing debris;
(d) Packaging materials and containers;
(e) Clothing, natural and synthetic fibers, fabric remnants, and similar debris, including but not limited to aprons and gloves; or
(f) Rugs, carpets, and floor coverings, but not asbestos-containing materials or polyethylene or polyurethane vinyl floor coverings.

(5) Waste Tires. Subject to the conditions and limitations contained in this permit, waste tires may be used as fuel at the facility. The total quantity of waste tires received as segregated loads and burned at the facility shall not exceed 3%, by weight, of the facility's total fuel. Compliance with this limitation shall be determined on a ~~by using a rolling~~ 30-day calendar monthly average in accordance with specific condition B.112.~~B.112.B.112.~~ below.

(6) Biomass Fuel. Subject to the conditions and limitations contained in this permit, biomass fuel may be burned at this facility (authorized fuel that is not MSW material). The total quantity of biomass material received as segregated load and burned in the combustion units shall not exceed 5%, by weight, of the facility's total fuel. Compliance with this limitation shall be determined on a calendar monthly basis in accordance with specific condition B.112.~~B.112.B.112.~~ below.

(7) Other Solid Waste/Segregated Loads. Subject to the conditions and limitations contained in this permit, the following other solid waste materials may be used as fuel at the facility (i.e. the following are authorized fuels that are non-MSW material). The total quantity of the following non-MSW material

received as segregated loads and burned at the facility shall not exceed 5%, by weight, of the facility's total fuel. Compliance with this limitation shall be determined by using a ~~rolling 30-day average~~ monthly calendar basis in accordance with specific condition **B.112.~~B.112.B.112.~~** below.

(a) Construction and demolition debris.
(b) Oil spill debris from aquatic, coastal, estuarine or river environments. Such items or materials include but are not limited to rags, wipes, and absorbents.
(c) Items suitable for human, plant or domesticated animal use, consumption or application where the item's shelf-life has expired or the generator wishes to remove the items from the market. Such items or materials include but are not limited to off-specification or expired consumer products, pharmaceuticals, medications, health and personal care products, cosmetics, foodstuffs, nutritional supplements, returned goods, and controlled substances.
(d) Consumer-packaged products intended for human or domesticated animal use or application but not consumption. Such items or materials include but are not limited to carpet cleaners, household or bathroom cleaners, polishes, waxes and detergents.
(e) Waste materials that:
(i) are generated in the manufacture of items in categories (c) or (d), above and are functionally or commercially useless (expired, rejected or spent); or
(ii) are not yet formed or packaged for commercial distribution. Such items or materials must be substantially similar to other items or materials routinely found in MSW.
(f) Waste materials that contain oil from:
(i) the routine cleanup of industrial or commercial establishments and machinery; or
(ii) spills of virgin or used petroleum products. Such items or materials include but are not limited to rags, wipes, and absorbents.
(g) Used oil and used oil filters. Used oil containing a PCB concentration equal or greater than 50 ppm shall not be burned, pursuant to the limitations of 40 CFR 761.20(e).
(h) Waste materials generated by manufacturing, industrial or agricultural activities, provided that these items or materials are substantially similar to items or materials that are found routinely in MSW, subject to prior approval of the Department.

(8) Other fuels or wastes shall not be burned in the emissions units without prior specific written approval of the Secretary of the Department of Environmental Protection.
[Rules 62-4.160(2), 62-210.200, and 62-213.440(1), F.A.C.; PSD-FL-006(D); and, PA 77-08]

B.13. Auxiliary Burners. Auxiliary burners for each emissions unit shall be fired only with propane or natural gas fuel during startups, shutdowns and malfunctions, and at other times when necessary and consistent with good combustion practices. The maximum heat input shall not exceed 80 MMBtu/hr per burner.
[PSD-FL-006(D)]

B.14. Hours of Operation. Each emissions unit is allowed to operate continuously, i.e., 8,760 hrs/yr.
[Rule 62-210.200(PTE), F.A.C.; and, PSD-FL-006(D)]

Operating Practices and Requirements

B.15. No owner or operator of an affected facility shall cause such facility to operate at a load level greater than 110 percent of the maximum demonstrated municipal waste combustor unit load as defined in specific condition **B.10.~~B.10.B.10.~~**, except as specified below. The averaging time is specified in specific condition **B.18.~~B.18.B.18.~~**
(1) During the annual dioxin/furan performance test and the two weeks preceding the annual dioxin/furan performance test, no municipal waste combustor unit load limit is applicable.

(2) The municipal waste combustor unit load limit may be waived in accordance with permission granted by the Administrator or delegated State regulatory authority for the purpose of evaluating system performance, testing new technology or control technologies, diagnostic testing, or related activities for the purpose of improving facility performance or advancing the state-of-the-art for controlling facility emissions.
[40 CFR 60.34b(b) and 40 CFR 60.53b(b)]

B.16. Control Device Inlet Temperature. No owner or operator of an affected facility shall cause such facility to operate at a temperature, measured at the particulate matter control device inlet, exceeding 17° C above the maximum demonstrated particulate matter control device temperature as defined in specific condition B.11.~~B.11.B.11.~~, except as specified below. The averaging time is specified in specific condition B.18.~~B.18.B.18.~~ These requirements apply to each particulate matter control device utilized at the affected facility.
(1) During the annual dioxin/furan performance test and the two weeks preceding the annual dioxin/furan performance test, no particulate matter control device temperature limitations are applicable.
(2) The particulate matter control device temperature limits may be waived in accordance with permission granted by the Administrator or delegated State regulatory authority for the purpose of evaluating system performance, testing new technology or control technologies, diagnostic testing, or related activities for the purpose of improving facility performance or advancing the state-of-the-art for controlling facility emissions.
[40 CFR 60.34b(b) and 40 CFR 60.53b(c)]

B.17. Control Device Inlet Temperature. Except during a malfunction, the maximum flue gas temperature at the final particulate matter control device inlet, during the combustion of RDF, shall not exceed 30 °F above the maximum temperature measured at the particulate matter control device inlet during the most recent mercury compliance test under which the facility was found to be in compliance with the mercury emission limit specified in specific condition B.27.~~B.27.B.27.~~, based on a 4-hour block arithmetic average. If the maximum flue gas temperature standard is exceeded during a malfunction, then up to 3 hours of that malfunction may be excluded from the 4-hour block arithmetic average.
[PSD-FL-006(A) & (D)]

B.18. Operating Requirements. The procedures specified in paragraphs (1) through (12) shall be used for determining compliance with the operating requirements under 40 CFR 60.53b.
(1) Compliance with the carbon monoxide emission limits in 40 CFR 60.53b(a) shall be determined using a 4-hour block arithmetic average for all types of affected facilities except mass burn rotary waterwall municipal waste combustors and refuse-derived fuel stokers.
(2) For affected mass burn rotary waterwall municipal waste combustors and refuse-derived fuel stokers, compliance with the carbon monoxide emission limits in 40 CFR 60.53b(a) shall be determined using a 24-hour daily arithmetic average.
(3) The owner or operator of an affected facility shall install, calibrate, maintain, and operate a continuous emission monitoring system for measuring carbon monoxide at the combustor outlet and record the output of the system and shall follow the procedures and methods specified in paragraphs (i) through (iii).

(i) The continuous emission monitoring system shall be operated according to Performance Specification 4A in Appendix B of 40 CFR 60.

(ii) During each relative accuracy test run of the continuous emission monitoring system required by Performance Specification 4A in Appendix B of 40 CFR 60, carbon monoxide and oxygen (or carbon dioxide) data shall be collected concurrently (or within a 30- to 60-minute period) by both the continuous emission monitors and the test methods specified in paragraphs (A) and (B).

(A) For carbon monoxide, EPA Reference Method 10, 10A, or 10B shall be used.

(B) For oxygen (or carbon dioxide), EPA Reference Method 3, 3A, or 3B, as applicable shall be used.

(iii) The span value of the continuous emission monitoring system shall be 125 percent of the maximum estimated hourly potential carbon monoxide emissions of the municipal waste combustor unit.

(4) The 4-hour block and 24-hour daily arithmetic averages specified in paragraphs (1) and (2) shall be calculated from 1-hour arithmetic averages expressed in parts per million by volume corrected to 7 percent oxygen (dry basis). The 1-hour arithmetic averages shall be calculated using the data points generated by the continuous emission monitoring system. At least two data points shall be used to calculate each 1-hour arithmetic average.

(5) The owner or operator of an affected facility may request that compliance with the carbon monoxide emission limit be determined using carbon dioxide measurements corrected to an equivalent of 7 percent oxygen. The relationship between oxygen and carbon dioxide levels for the affected facility shall be established as specified in 40 CFR 60.58b(b)(6).

(6) The procedures specified in paragraphs (i) through (v) shall be used to determine compliance with load level requirements under 40 CFR 60.53b(b).

(i) The owner or operator of an affected facility with steam generation capability shall install, calibrate, maintain, and operate a steam flow meter or a feedwater flow meter; measure steam (or feedwater) flow in kilograms per hour (or pounds per hour) on a continuous basis; and record the output of the monitor. Steam (or feedwater) flow shall be calculated in 4-hour block arithmetic averages.

(ii) The method included in the ``American Society of Mechanical Engineers Power Test Codes: Test Code for Steam Generating Units, Power Test Code 4.1-1964 (R1991)" section 4 (incorporated by reference, see 40 CFR 60.17) shall be used for calculating the steam (or feedwater) flow required under paragraph (6)(i). The recommendations in ``American Society of Mechanical Engineers Interim Supplement 19.5 on Instruments and Apparatus: Application, Part II of Fluid Meters, 6th edition (1971)," chapter 4 (incorporated by reference-see 40 CFR 60.17) shall be followed for design, construction, installation, calibration, and use of nozzles and orifices except as specified in (iii).

(iii) Measurement devices such as flow nozzles and orifices are not required to be recalibrated after they are installed.

(iv) All signal conversion elements associated with steam (or feedwater flow) measurements must be calibrated according to the manufacturer's instructions before each dioxin/furan performance test, and at least once per year.

(7) To determine compliance with the maximum particulate matter control device temperature requirements under 40 CFR 60.53b(c), the owner or operator of an affected facility shall install, calibrate, maintain, and operate a device for measuring on a continuous basis the temperature of the flue gas stream at the inlet to each particulate matter control device utilized by the affected facility. Temperature shall be calculated in 4-hour block arithmetic averages.

(8) The maximum demonstrated municipal waste combustor unit load shall be determined during the initial performance test for dioxins/furans and each subsequent performance test during which compliance with the dioxin/furan emission limit specified in 40 CFR 60.52b(c) is achieved. The maximum demonstrated municipal waste combustor unit load shall be the highest 4-hour arithmetic average load achieved during four consecutive hours during the most recent test during which compliance with the dioxin/furan emission limit was achieved.

(9) For each particulate matter control device employed at the affected facility, the maximum demonstrated particulate matter control device temperature shall be determined during the initial performance test for dioxins/furans and each subsequent performance test during which compliance with the dioxin/furan emission limit specified in 40 CFR 60.52b(c) is achieved. The maximum demonstrated

particulate matter control device temperature shall be the highest 4-hour arithmetic average temperature achieved at the particulate matter control device inlet during four consecutive hours during the most recent test during which compliance with the dioxin/furan limit was achieved.
(10) At a minimum, valid continuous emission monitoring system hourly averages shall be obtained as specified in paragraphs (i) and (ii) for 75 percent of the operating hours per day for 90 percent of the operating days per calendar quarter that the affected facility is combusting municipal solid waste.

(i) At least two data points per hour shall be used to calculate each 1-hour arithmetic average.

(ii) At a minimum, each carbon monoxide 1-hour arithmetic average shall be corrected to 7 percent oxygen on an hourly basis using the 1-hour arithmetic average of the oxygen (or carbon dioxide) continuous emission monitoring system data.

(11) All valid continuous emission monitoring system data must be used in calculating the parameters specified under 40 CFR 60.58b(i) even if the minimum data requirements of paragraph (10) are not met. When carbon monoxide continuous emission data are not obtained because of continuous emission monitoring system breakdowns, repairs, calibration checks, and zero and span adjustments, emissions data shall be obtained using other monitoring systems as approved by the Administrator or EPA Reference Method 10 to provide, as necessary, the minimum valid emission data.
(12) Quarterly accuracy determinations and daily calibration drift tests for the carbon monoxide continuous emission monitoring system shall be performed in accordance with Procedure 1 in Appendix F of 40 CFR 60.
[40 CFR 60.38b and 40 CFR 60.58b(i); and, PSD-FL-006(D)]

Operator Training and Certification

B.19. Standards for municipal waste combustor operator training and certification.
(a) No later than the date 6 months after the date of startup of an affected facility or 12 months after State plan approval [40 CFR 60.39b(c)(4)(ii)], whichever is later, each chief facility operator and shift supervisor shall obtain and maintain a current provisional operator certification from either the American Society of Mechanical Engineers [QRO-1-1994 (incorporated by reference - see 40 CFR 60.17 of Subpart A)] or a State certification program.
(b) No later than the date 6 months after the date of startup of an affected facility or 12 months after State plan approval [40 CFR 60.39b(c)(4)(ii)], whichever is later, each chief facility operator and shift supervisor shall have completed full certification or shall have scheduled a full certification exam with either the American Society of Mechanical Engineers [QRO-1-1994 (incorporated by reference - see 40 CFR 60.17 of Subpart A)] or a State certification program.
(c) No owner or operator of an affected facility shall allow the facility to be operated at any time unless one of the following persons is on duty and at the affected facility: A fully certified chief facility operator, a provisionally certified chief facility operator who is scheduled to take the full certification exam according to the schedule specified in paragraph (b), a fully certified shift supervisor, a provisionally certified shift supervisor who is scheduled to take the full certification exam according to the schedule specified in paragraph (b).

(1) The requirement specified in paragraph (c) shall take effect 6 month after the date of startup of the affected facility or 12 months after State plan approval [40 CFR 60.39b(c)(4)(ii)], whichever is later.

(2) If one of the persons listed in paragraph (c) must leave the affected facility during their operating shift, a provisionally certified control room operator who is onsite at the affected facility may fulfill the requirement in paragraph (c).

(d) All chief facility operators, shift supervisors, and control room operators at affected facilities must complete the EPA or State municipal waste combustor operator training course no later than the date 6

months after the date of startup of the affected facility, or by 12 months after State plan approval [40 CFR 60.39b(c)(4)(iii)], whichever is later.
(e) The owner or operator of an affected facility shall develop and update on a yearly basis a site-specific operating manual that shall, at a minimum, address the elements of municipal waste combustor unit operation specified in paragraph (e)(1) through (e)(11).
(1) A summary of the applicable standards;
(2) A description of basic combustion theory applicable to a municipal waste combustor unit;
(3) Procedures for receiving, handling, and feeding municipal solid waste;
(4) Municipal waste combustor unit startup, shutdown, and malfunction procedures;
(5) Procedures for maintaining proper combustion air supply levels;
(6) Procedures for operating the municipal waste combustor unit within the standards established;
(7) Procedures for responding to periodic upset or off-specification conditions;
(8) Procedures for minimizing particulate matter carryover;
(9) Procedures for handling ash;
(10) Procedures for monitoring municipal waste combustor unit emissions; and
(11) Reporting and recordkeeping procedures.
(f) The owner or operator of an affected facility shall establish a training program to review the operating manual according to the schedule specified in paragraphs (f)(1) and (f)(2) with each person who has responsibilities affecting the operation of an affected facility including, but not limited to, chief facility operators, shift supervisors, control room operators, ash handlers, maintenance personnel, and crane/load handlers.
(1) Each person specified in paragraph (f) shall undergo initial training no later than the date specified in paragraph (f)(1)(i), (f)(1)(ii), or (f)(1)(iii), whichever is later.
(i) The date 6 months after the date of startup of the affected facility;
(ii) The date prior to the day the person assumes responsibilities affecting municipal waste combustor unit operation; or
(iii) 12 months after State plan approval [40 CFR 60.39b(c)(4)(iii)].
(2) Annually, following the initial review required by paragraph (f)(1).
(g) The operating manual required by paragraph (e) shall be kept in a readily accessible location for all persons required to undergo training under paragraph (f). The operating manual and records of training shall be available for inspection by the EPA or its delegated enforcement agency upon request.
(h) A list of all certified personnel shall be submitted to the Department's Southeast District office and the Dade County's DERM office.
[40 CFR 60.35b, 40 CFR 60.39b(c)(4)(ii) & (iii), and 40 CFR 60.54b; and, PSD-FL-006(D)]

B.20. The requirement specified in 40 CFR 60.54b(d) does not apply to chief operators, shift supervisors, and control room operators who have obtained full certification from the American Society of Mechanical Engineers on or before the date of State plan approval.
[40 CFR 60.39b(c)(4)(iii)(A)]

B.21. The owner or operator of a designated facility may request that the EPA Administrator waive the requirement specified in 40 CFR 60.54b(d) for chief operators, shift supervisors, and control room operators who have obtained provisional certification from the American Society of Mechanical Engineers on or before the date of State plan approval.
[40 CFR 60.39b(c)(4)(iii)(B)]

B.22. The initial training requirements specified in 40 CFR 60.54b(f)(1) shall be completed no later than the date specified in (1), (2), or (3), whichever is later.
(1) The date six (6) months after the date of startup of the affected facility;

(2) Twelve (12) months after State plan approval; or
(3) The date prior to the day when the person assumes responsibilities affecting municipal waste combustor unit operation.
[40 CFR 60.39b(c)(4)(iii)(C)]

Emission Limitations and Standards

Particulate Matter

B.23. Particulate matter (PM) emissions from the baghouse shall not exceed 0.011 grains/dry standard ft^3 (gr/dscf), corrected to 7 percent O_2, dry basis (equivalent to ~~0.026~~ 0.024lb/MMBtu and 8.3 lbs/hr), and 29.0 tons/yr per emissions unit.
[PSD-FL-006(D)]

PM_{10}

B.24. PM emissions less than 10 micron diameter from the baghouse shall not exceed 0.011 gr/dscf, corrected to 7 percent O_2, dry basis (equivalent to ~~0.026~~ 0.024lb/MMBtu and 8.3 lbs/hr), and 29.0 tons/yr per emissions unit.
[PSD-FL-006(D)]

Visible Emissions

B.25 The emission limits for opacity exhibited by the gasses discharged to the atmosphere is 10 percent (6-minute block average)~~**B.25.** The emission limit for opacity exhibited by the gases discharged to the atmosphere is 10 percent (6-minute block average). Because Units 1 and 2 share a common stack, visible emissions violations from the stack will be attributed to both units unless opacity meter results show the specific unit causing the violation; and, because Units 3 and 4 share a common stack, visible emissions violations from the stack will be attributed to both units unless opacity meter results show the specific unit causing the violation.~~
~~[40 CFR 60.33b(a)(1)(iii); Rules 62-4.070(3) and 62-213.440, F.A.C.; and, PSD-FL-006(A) & (D)]~~

Cadmium

B.26. Cadmium emissions shall not exceed 15 ug/m^3, corrected to 7 percent O_2, dry basis (equivalent to ~~1.6~~ 1.45x 10^{-5} lb/MMBtu and 0.005 lb/hr), and 0.027 ton/yr per emissions unit.
[PSD-FL-006(D)]

Mercury

B.27. The maximum emission limits for mercury contained in the gases discharged to the atmosphere per emissions unit are:
(1) 0.070 milligrams per dry standard cubic meter, corrected to 7 percent O_2, dry basis (equivalent to ~~7.32~~ 9.266x 10^{-5} lb/MMBtu and 0.023 lb/hr); or
(2) ~~15~~ 20 percent, by weight, of the mercury in the flue gas upstream of the mercury control device (~~85~~80-percent reduction by weight), ~~corrected to 7 percent O_2~~, ~~dry basis~~, whichever is less stringent; and,
(3) 0.080 ton/yr.
[40 CFR 60.33b(a)(3); Rule 62-296.416(3)(a)1., F.A.C.; and, PSD-FL-006(A) & (D)]

B.28. Facilities with sulfur dioxide and hydrogen chloride control equipment in place or under construction as of July 1, 1993, and which choose to control mercury emissions through the use of mercury control equipment, shall comply with the mercury emissions limiting standard of Rule 62-296.416(3)(a)1., F.A.C., by July 1, 1995. All other facilities choosing to control mercury emissions through the use of mercury control equipment shall comply with the mercury emissions limiting standard of Rule 62-296.416(3)(a)1., F.A.C., by the date that the facility is required to demonstrate compliance with sulfur dioxide and hydrogen chloride emission limits, which limits are established at Rule 62-204.800(8)(b), F.A.C.
[Rule 62-296.416(3)(a)2., F.A.C.]

B.29. Facilities subject to the mercury emissions limiting standard of Rule 62-296.416(3)(a)1., F.A.C., shall demonstrate individual emissions unit compliance by the compliance date specified in Rule 62-296.416(3)(a)2., F.A.C., and annually thereafter.
[Rule 62-296.416(3)(a)3., F.A.C.]

B.30. Mercury Emissions Inventory. For emissions inventory purposes, all waste-to-energy facilities with charging rates of 40 tons or more per day shall perform annual individual emissions unit mercury emissions tests and report the results to the Department. This testing shall begin during calendar year 1993 and end upon initiation of mercury testing pursuant to Rule 62-296.416(3)(a) or (b), F.A.C.
[Rule 62-296.416(3)(c), F.A.C.]

Lead

B.31. Lead emissions, per emissions unit, shall not exceed 380 ug/m^3, corrected to 7 percent O_2, dry basis (equivalent to ~~4.1~~3.65 x 10^{-4} lb/MMBtu and 0.13 lb/hr); and, 0.44 ton/yr.
[PSD-FL-006(D)]

Sulfur Dioxide

B.32. The emission limits for sulfur dioxide contained in the gases discharged to the atmosphere per emissions unit are:
(1) 29 parts per million by volume, corrected to 7 percent O_2, dry basis (equivalent to ~~0.08~~0.074 lb/MMBtu and 25.5 lbs/hr); or
(2) 25 percent of the potential sulfur dioxide emission concentration (75-percent reduction by weight or volume), ~~corrected to 7 percent O_2, dry basis~~, whichever is less stringent; and,
(3) 214.2 tons/yr. (4) Compliance with ~~this~~ the emission limit of (1) and (2) above is based on a 24-hour daily period (i.e., block; midnight to midnight) geometric mean.
[40 CFR 60.33b(b)(3)(i); and, PSD-FL-006(D)]

Hydrogen Chloride

B.33. The emission limits for hydrogen chloride contained in the gases discharged to the atmosphere per emissions unit are:
(1) 25 parts per million by volume, corrected to 7 percent O_2, dry basis (equivalent to 0.04 lb/MMBtu and ~~13.0~~ 14.34lbs/hr); or
(2) 5 percent of the potential hydrogen chloride emission concentration (95-percent reduction by weight or volume), ~~corrected to 7 percent O_2, dry basis~~, whichever is less stringent; and,
(3) 57.1 tons/yr.
[40 CFR 60.33b(b)(3)(ii); and, PSD-FL-006(A) & (D)]

Dioxins/Furans

B.34. The emission limits for dioxins/furans contained in the gases discharged to the atmosphere per emissions unit that do not employ an electrostatic precipitator-based emission control system are 30 nanograms per dry standard cubic meter (total mass of tetra- through octa- chlorinated dibenzo-p-dioxins and dibenzofurans), corrected to 7 percent oxygen; and, 0.000038 ton/yr.
[40 CFR 60.33b(c)(1)(ii); and, PSD-FL-006(A) & (D)]

Nitrogen Oxides

B.35. The emission limits for nitrogen oxides contained in the gases discharged to the atmosphere per emissions unit are 250 parts per million by volume, corrected to 7 percent O_2, dry basis (equivalent to ~~0.5~~ 0.457lb/MMBtu and 158.0 lbs/hr), 24-hour daily arithemetic average; and, 614.9 tons/yr. As specified in 40 CFR 60.33b(d)(1), a facility-wide average emissions limit of 230 ppmvd, corrected to 7 percent O_2, 24-hour average, shall be applied in lieu of the per emissions unit limit provided that the conditions of 40 CFR 60.33b(d)(1) are met.
[40 CFR 60.33b(d); and, PSD-FL-006(D)]

Carbon Monoxide

B.36. The emission limits for carbon monoxide contained in the gases discharged to the atmosphere per emissions unit are 200 parts per million by volume, measured at the combustor outlet in conjunction with a measurement of oxygen concentration, corrected to 7 percent O_2, dry basis (equivalent to ~~0.24~~ 0.22 lb/MMBtu and 76.9 lbs/hr), 24-hour daily arithemetic average; and, 267.7 tons/yr.
[40 CFR 60.34b(a); and, PSD-FL-006(D)]

Arsenic

B.37. Arsenic emissions, per emissions unit, shall not exceed 9.3 ug/m^3, corrected to 7 percent O_2, dry basis (equivalent to ~~9.9~~ 8.97 x 10^{-6} lb/MMBtu and 0.0031 lb/hr); and, 0.011 ton/yr.
[PSD-FL-006(D)]

Beryllium

B.38. Beryllium emissions, per emissions unit, shall not exceed 0.46 ug/m^3, corrected to 7 percent O_2, dry basis (equivalent to ~~4.8~~ 4.34x 10^{-7} lb/MMBtu and 0.00015 lb/hr); and, 0.0005 ton/yr.
[PSD-FL-006(D)]

B.39. Reserved.

B.40. Reserved.

Total Fluorides

B.41. Fluoride emissions, per emissions unit, shall not exceed 840 ug/m^3, corrected to 7 percent O_2, dry basis (equivalent to ~~8.9~~ 8.04x 10^{-4} lb/MMBtu and 0.28 lb/hr); and, 0.97 ton/yr.
[PSD-FL-006(D)]

Sulfuric Acid Mist

B.42. Sulfuric acid mist emissions, per emissions unit, shall not exceed 2.1 ppmv, corrected to 7 percent O_2, dry basis (equivalent to ~~8.9~~ 8.19 x 10^{-3} lb/MMBtu and 2.8 lbs/hr); and, 9.8 tons/yr.
[PSD-FL-006(D)]

Volatile Organic Compounds (VOC)

B.43. VOC (hydrocarbons) emissions, per emissions unit, shall not exceed 25 ppmv, corrected to 7 percent O_2, dry basis (equivalent to ~~1.8~~ 1.59x 10^{-2} lb/MMBtu and 5.5 lbs/hr); and, 19.1 tons/yr. The permittee must furnish to the Department evidence (i.e., test results) that this facility emits less than 100 tons per year of hydrocarbons, or must obtain legally enforceable limits for the hydrocarbon emissions from this facility.
[PSD-FL-006(D)]

Excess Emissions

{Permitting Note: The Excess Emissions Rule at Rule 62-210.700, F.A.C., cannot vary any requirement of a NSPS or NESHAP provision.}

B.44. The opacity standards set forth in 40 CFR 60 shall apply at all times except during periods of startup, shutdown, malfunction, and as otherwise provided in the applicable standard.
[40 CFR 60.11(c)]

B.45. At all times, including periods of startup, shutdown, and malfunction, owners and operators shall, to the extent practicable, maintain and operate any affected facility including associated air pollution control equipment in a manner consistent with good air pollution control practice for minimizing emissions. Determination of whether acceptable operating and maintenance procedures are being used will be based on information available to the Administrator which may include, but is not limited to, monitoring results, opacity observations, review of operating and maintenance procedures, and inspection of the source.
[40 CFR 60.11(d)]

B.46. Startup, Shutdown and Malfunction. The provisions for startup, shutdown, and malfunction are provided in paragraphs (1) and (2) .
(1) Except as provided by 40 CFR 60.56b, the standards under 40 CFR 60, Subpart Eb and this permit shall apply at all times except during periods of startup, shutdown, or malfunction. Duration of startup, shutdown, or malfunction periods are limited to two hours in any 24-hour period.

(i) The startup period commences when the affected facility begins the continuous burning of RDF and does not include any warm-up period when the affected facility is combusting natural gas or propane gas and no RDF is being fed to the combustor(s).

(ii) Continuous burning is the continuous, semicontinuous, or batch feeding of RDF for purposes of waste disposal, energy production, or providing heat to the combustion system in preparation for waste disposal or energy production. The use of RDF solely to provide thermal protection of the grate or hearth during the startup period when RDF is not being fed to the grate is not considered to be continuous burning.

(2) A malfunction means:

(a) any unavoidable mechanical and/or electrical failure of air pollution control equipment or process equipment or of a process resulting in operation in an abnormal or unusual manner. [Rule 62-210.200, F.A.C., Definitions]

(b) any sudden, infrequent, and not reasonably preventable failure of air pollution control equipment, process equipment, or a process to operate in a normal or usual manner. Failures that are caused in part by poor maintenance or careless operation are not malfunctions.
[40 CFR 60.2, Definitions]

[40 CFR 60.38b and 40 CFR 60.58b(a); Rule 62-210.200, F.A.C., Definitions; 40 CFR 60.2, Definitions; and, PSD-FL-006(D)]

B.47. Excess emissions resulting from startup, shutdown, or malfunction shall be permitted provided that best operational practices to minimize emissions are adhered to and the duration of excess emissions shall be minimized but in no case exceed two hours in a 24-hour period unless specifically authorized by the Department for longer duration.
[Rule 62-210.700(1), F.A.C.; and, PSD-FL-006(D)]

B.48. Excess emissions which are caused entirely or in part by poor maintenance, poor operation, or any other equipment or process failure which may reasonably be prevented during startup, shutdown, or malfunction shall be prohibited.
[Rule 62-210.700(4), F.A.C.; and, PSD-FL-006(D)]

Test Methods and Procedures

{Permitting note: The permittee may stagger its pollutant performance tests throughout the year with prior Department approval.}

B.49. Within 60 days after achieving the maximum production rate at which the affected facility will be operated, but not later than 180 days after initial startup of such facility and at such other times as may be required by the Administrator under section 114 of the Act, the owner or operator of such facility shall conduct performance test(s) and furnish the Administrator a written report of the results of such performance test(s).
[40 CFR 60.8(a)]

B.50. Performance tests shall be conducted and data reduced in accordance with the test methods and procedures contained in each applicable subpart unless the Administrator (1) specifies or approves, in specific cases, the use of a reference method with minor changes in methodology, (2) approves the use of an equivalent method, (3) approves the use of an alternative method the results of which he has determined to be adequate for indicating whether a specific source is in compliance, (4) waives the requirement for performance tests because the owner or operator of a source has demonstrated by other means to the Administrator's satisfaction that the affected facility is in compliance with the standard, or (5) approves shorter sampling times and smaller sample volumes when necessitated by process variables or other factors. Nothing in this paragraph shall be construed to abrogate the Administrator's authority to require testing under section 114 of the Act.
[40 CFR 60.8(b)]

B.51. Performance tests shall be conducted under such conditions as the Administrator shall specify to the plant operator based on representative performance of the affected facility. The owner or operator shall make available to the Administrator such records as may be necessary to determine the conditions of the performance tests. Operations during periods of startup, shutdown, and malfunction shall not constitute representative conditions for the purpose of a performance test nor shall emissions in excess of the level of the applicable emission limit during periods of startup, shutdown, and malfunction be

considered a violation of the applicable emission limit unless otherwise specified in the applicable standard.
[40 CFR 60.8(c)]

B.52. The owner or operator of an affected facility shall provide the Administrator (Department or its designee) at least 30 days prior notice of any performance test, except as specified under other subparts, to afford the Administrator the opportunity to have an observer present.
[40 CFR 60.8(d)]

B.53. The owner or operator of an affected facility shall provide, or cause to be provided, performance testing facilities as follows:
(1) Sampling ports adequate for test methods applicable to such facility. This includes (i) constructing the air pollution control system such that volumetric flow rates and pollutant emission rates can be accurately determined by applicable test methods and procedures and (ii) providing a stack or duct free of cyclonic flow during performance tests, as demonstrated by applicable test methods and procedures.
(2) Safe sampling platform(s).
(3) Safe access to sampling platform(s).
(4) Utilities for sampling and testing equipment.

{Permitting note: See specific condition **B.76.~~B.76.B.76.~~** and Appendix SS-1, Stack Sampling Facilities (version dated 10/7/96) for State of Florida Stack Sampling Requirements.}

[40 CFR 60.8(e)]

B.54. Unless otherwise specified in the applicable subpart, each performance test shall consist of three separate runs using the applicable test method. Each run shall be conducted for the time and under the conditions specified in the applicable standard. For the purpose of determining compliance with an applicable standard, the arithmetic means of results of the three runs shall apply. In the event that a sample is accidentally lost or conditions occur in which one of the three runs must be discontinued because of forced shutdown, failure of an irreplaceable portion of the sample train, extreme meteorological conditions, or other circumstances, beyond the owner or operator's control, compliance may, upon the Administrator's approval, be determined using the arithmetic mean of the results of the two other runs.
[40 CFR 60.8(f)]

B.55. Compliance with the emission limiting standards shall be demonstrated using EPA Reference Methods, as specified in 40 CFR Part 60, Appendix A, or 40 CFR 61, Appendix B. No other test method shall be used unless approval from the Department has been received in writing. Any alternate sampling procedure shall be approved in accordance with Rule 62-279.620, F.A.C. A test protocol shall be submitted to the Department's Bureau of Air Regulation and Southeast District offices and Dade County's DERM office at least 90 days prior to testing.
[PSD-FL-006(A), (B) & (D)]

~~**B.56.** The weight of the RDF being fed to each combustor during compliance testing shall be determined by use of the EPA published "F" factor for MSW, which is 9,750 dscf/MMBtu (Fd), or 1,820 scf/MMBtu (Fc) (reference 40 CFR 60, Appendix A, Method 19, Table 19-1).~~
~~[PSD-FL-006(A)]~~

Particulate Matter and Opacity

B.57. The procedures and test methods specified in paragraphs (1) through (12) shall be used to determine compliance with the emission limits for particulate matter and opacity.

(1) The EPA Reference Method 1 shall be used to select sampling site and number of traverse points.

(2) The EPA Reference Method 3, 3A, or 3B, as applicable shall be used for gas analysis.

(3) The EPA Reference Method 4 shall be used for the moisture content in the stack gases.

(4) The EPA Reference Method 5 shall be used for determining compliance with the particulate matter emission limit. The minimum sample volume shall be 1.7 cubic meters. The probe and filter holder heating systems in the sample train shall be set to provide a gas temperature no greater than 160 ±14 °C. An oxygen or carbon dioxide measurement shall be obtained simultaneously with each Method 5 run.

(5) The owner or operator of an affected facility may request that compliance with the particulate matter emission limit be determined using carbon dioxide measurements corrected to an equivalent of 7 percent oxygen. The relationship between oxygen and carbon dioxide levels for the affected facility shall be established as specified in paragraph 40 CFR 60.58b(b)(6).

(6) As specified under 40 CFR 60.8, all performance tests shall consist of three test runs. The average of the particulate matter emission concentrations from the three test runs is used to determine compliance.

(7) In accordance with paragraphs (8) and (12), EPA Reference Method 9 shall be used for determining compliance with the opacity limit except as provided under 40 CFR 60.11(e)

(8) The owner or operator of an affected facility shall conduct an initial performance test for particulate matter emissions and opacity as required under 40 CFR 60.8.

(9) The owner or operator of an affected facility shall install, calibrate, maintain, and operate a continuous opacity monitoring system for measuring opacity and shall follow the methods and procedures specified in paragraphs (9)(i) through (9)(iv).

(i) The output of the continuous opacity monitoring system shall be recorded on a 6-minute average basis.

(ii) The continuous opacity monitoring system shall be installed, evaluated, and operated in accordance with 40 CFR 60.13.

(iii) The continuous opacity monitoring system shall conform to Performance Specification 1 in Appendix B of 40 CFR 60.

(iv) The initial performance evaluation shall be completed no later than 180 days after the date of the initial startup of the municipal waste combustor unit, as specified under 40 CFR 60.8.

(10) Following the date that the initial performance test for particulate matter is completed or is required to be completed under 40 CFR 60.8 for an affected facility, the owner or operator shall conduct a performance test for particulate matter on an annual basis (no more than 12 calendar months following the previous performance test).

(11) [reserved]

(12) ~~(12)~~ Following the date that the initial performance test for opacity is completed or is required to be completed under 40 CFR 60.8 for an affected facility, the owner or operator shall conduct a performance test for opacity on an annual basis (no more than 12 calendar months following the previous performance test) using the test method specified in paragraph (7).

(13) EPA Reference Method #2 shall be used for determining stack gas velocity and volumetric flow rate.

[40 CFR 60.38b and 40 CFR 60.58b(c); and, PSD-FL-006(B) & (D)]

PM_{10}

B.58. Compliance with the PM_{10} limits shall be demonstrated using EPA Method 201 or 201A during the initial compliance test and annually thereafter. However, if compliance with the PM emission limit in specific condition ~~B.24.~~ B23 is met, these tests are not required.
[PSD-FL-006(B) & (D)]

Cadmium, Lead and Mercury

B.59. The procedures and test methods specified in paragraphs (1) and (2) shall be used to determine compliance with the emission limits for cadmium, lead, and mercury.
(1) The procedures and test methods specified in paragraphs (1)(i) through (1)(ix) shall be used to determine compliance with the emission limits for cadmium and lead.

(i) The EPA Reference Method 1 shall be used for determining the location and number of sampling points.
(ii) The EPA Reference Method 3, 3A, or 3B, as applicable, shall be used for flue gas analysis.
(iii) The EPA Reference Method 29 shall be used for determining compliance with the cadmium and lead emission limits.
(iv) An oxygen or carbon dioxide measurement shall be obtained simultaneously with each Method 29 test run for cadmium and lead required under paragraph (1)(iii).
(v) The owner or operator of an affected facility may request that compliance with the cadmium or lead emission limit be determined using carbon dioxide measurements corrected to an equivalent of 7 percent oxygen. The relationship between oxygen and carbon dioxide levels for the affected facility shall be established as specified in paragraph 40 CFR 60.58b(b)(6).
(vi) All performance tests shall consist of a minimum of three test runs conducted under representative full load operating conditions. The average of the cadmium or lead emission concentrations from three test runs or more shall be used to determine compliance.
(vii) Following the date of the initial performance test or the date on which the initial performance test is required to be completed under 40 CFR 60.8, the owner or operator of an affected facility shall conduct a performance test for compliance with the emission limits for cadmium and lead on an annual basis (no more than 12 calendar months following the previous performance test).
(viii)[reserved]
(ix) ~~(ix)~~ [reserved]
(x) EPA Reference Method #2 shall be used for determining stack gas velocity and volumetric flow rate

(2) The procedures and test methods specified in paragraphs (2)(i) through (2)(xi) shall be used to determine compliance with the mercury emission limit.

(i) The EPA Reference Method 1 shall be used for determining the location and number of sampling points.
(ii) The EPA Reference Method 3, 3A, or 3B, as applicable, shall be used for flue gas analysis.
(iii) The EPA Reference Method 29 shall be used to determine the mercury emission concentration. The minimum sample volume when using Method 29 for mercury shall be 1.7 cubic meters.
(iv) An oxygen (or carbon dioxide) measurement shall be obtained simultaneously with each Method 29 test run for mercury required under paragraph (2)(iii).

(v) The percent reduction in the potential mercury emissions (% P_{Hg}) is computed using equation 1:

$[\% P_{Hg}] = [(E_i - E_o)/E_i] \times 100$ **(Equation 1)**

where:

% P_{Hg} = percent reduction of the potential mercury emissions achieved.
E_i = potential mercury emission concentration measured at the control device inlet, corrected to 7 percent oxygen (dry basis).
E_o = controlled mercury emission concentration measured at the mercury control device outlet, corrected to 7 percent oxygen (dry basis).

(vi) All performance tests shall consist of a minimum of three test runs conducted under representative full load operating conditions. The average of the mercury emission concentrations or percent reductions from three test runs or more is used to determine compliance.
(vii) The owner or operator of an affected facility may request that compliance with the mercury emission limit be determined using carbon dioxide measurements corrected to an equivalent of 7 percent oxygen. The relationship between oxygen and carbon dioxide levels for the affected facility shall be established as specified in paragraph 40 CFR 60.58b(b)(6).
(viii)The owner or operator of an affected facility shall conduct an initial performance test for mercury emissions as required under 40 CFR 60.8.
(ix) Following the date that the initial performance test for mercury is completed or is required to be completed under 40 CFR 60.8, the owner or operator of an affected facility shall conduct a performance test for mercury emissions on a annual basis (no more than 12 calendar months from the previous performance test).
(x) [reserved]
(xi) ~~(xi)~~ The owner or operator of an affected facility where activated carbon injection is used to comply with the mercury emission limit shall follow the procedures specified in 40 CFR 60.58b(m) (see specific condition **B.115.~~B.115.B.115.~~**) for measuring and calculating carbon usage.
(xii) EPA Reference Method #2 shall be used for determining stack gas velocity and volumetric flow rate

[40 CFR 60.38b and 40 CFR 60.58b(d); and, PSD-FL-006(B) & (D)]

~~**B.60. Mercury Emissions Test Method and Procedures.**~~
~~(3)(d). All mercury emissions tests performed pursuant to the requirements of this rule shall comply with the following provisions.~~
~~1. The test method for mercury shall be EPA Method 29 adopted in Chapter 62-297, F.A.C.~~
~~2. Test procedures shall meet all applicable requirements of Chapter 62-297, F.A.C.~~

(4) Flue Gas Temperature Standard. Waste-to-energy facilities choosing to control mercury emissions through the use of post-combustion control equipment designed to remove mercury from flue gases shall comply with the flue gas temperature standard of Rule 62-296.416(4)(a), F.A.C.
(a) Temperature Standard. The flue gas temperature standard set forth in 40 CFR 60.53b(c) (see specific condition **B.16.~~B.16.B.16.~~**), incorporated by reference in Rule 62-204.800, F.A.C., shall apply.
(b) Temperature Monitoring. The temperature monitoring requirements set forth in 40 CFR 60.58b(i) (see specific condition **B.18.~~B.18.B.18.~~**), incorporated by reference in Rule 62-204.800, F.A.C., shall apply.

(5) Carbon Usage Rate. The carbon injection rate operating standard, based on an 8-hour block average, and monitoring requirements set forth in 40 CFR 60.58b(m) (see specific condition B.115.~~B.115.B.115.~~), incorporated by reference in Rule 62-204.800, F.A.C., shall apply.
[Rules 62-296.416(3)(d),(4), and (5), F.A.C.; and, PSD-FL-006(D)]

Sulfur Dioxide

B.61. The procedures and test methods specified in paragraphs (1) through (14) shall be used for determining compliance with the sulfur dioxide emission.
(1) The EPA Reference Method 19, section 4.3, shall be used to calculate the daily geometric average sulfur dioxide emission concentration.
(2) The EPA Reference Method 19, section 5.4, shall be used to determine the daily geometric average percent reduction in the potential sulfur dioxide emission concentration.
(3) The owner or operator of an affected facility may request that compliance with the sulfur dioxide emission limit be determined using carbon dioxide measurements corrected to an equivalent of 7 percent oxygen. The relationship between oxygen and carbon dioxide levels for the affected facility shall be established as specified in 40 CFR 60.58b(b)(6).
(4) The owner or operator of an affected facility shall conduct an initial performance test for sulfur dioxide emissions as required under 40 CFR 60.8. Compliance with the sulfur dioxide emission limit (concentration or percent reduction) shall be determined by using the continuous emission monitoring system specified in paragraph (5) to measure sulfur dioxide and calculating a 24-hour daily geometric average emission concentration or a 24-hour daily geometric average percent reduction using EPA Reference Method 19, sections 4.3 and 5.4, as applicable.
(5) The owner or operator of an affected facility shall install, calibrate, maintain, and operate a continuous emission monitoring system for measuring sulfur dioxide emissions discharged to the atmosphere and record the output of the system.
(6) Following the date that the initial performance test for sulfur dioxide is completed or is required to be completed under 40 CFR 60.8, compliance with the sulfur dioxide emission limit shall be determined based on the 24-hour (measured between 12:00 midnight and the following midnight) daily geometric average of the hourly arithmetic average emission concentrations using continuous emission monitoring system outlet data if compliance is based on an emission concentration, or continuous emission monitoring system inlet and outlet data if compliance is based on a percent reduction.
(7) At a minimum, valid continuous monitoring system hourly averages shall be obtained as specified in paragraphs (7)(i) and (7)(ii) for 75 percent of the operating hours per day for 90 percent of the operating days per calendar quarter that the affected facility is combusting municipal solid waste.
(i) At least two data points per hour shall be used to calculate each 1-hour arithmetic average.
(ii) Each sulfur dioxide 1-hour arithmetic average shall be corrected to 7 percent oxygen on an hourly basis using the 1-hour arithmetic average of the oxygen (or carbon dioxide) continuous emission monitoring system data.
(8) The 1-hour arithmetic averages required under paragraph (6) shall be expressed in parts per million corrected to 7 percent oxygen (dry basis) and used to calculate the 24-hour daily geometric average emission concentrations and daily geometric average emission percent reductions. The 1-hour arithmetic averages shall be calculated using the data points required under 40 CFR 60.13(e)(2).
(9) All valid continuous emission monitoring system data shall be used in calculating average emission concentrations and percent reductions even if the minimum continuous emission monitoring system data requirements of paragraph (7) are not met.
(10) The procedures under 40 CFR 60.13 shall be followed for installation, evaluation, and operation of the continuous emission monitoring system.
(11) The initial performance evaluation shall be completed no later than 180 days after the date of initial startup of the municipal waste combustor as specified under 40 CFR 60.8.
(12) The continuous emission monitoring system shall be operated according to Performance Specification 2 in 40 CFR 60 Appendix B.
(i) During each relative accuracy test run of the continuous emission monitoring system required by Performance Specification 2 in 40 CFR 60 Appendix B, sulfur dioxide and oxygen (or carbon

dioxide) data shall be collected concurrently (or within a 30- to 60-minute period) by both the continuous emission monitors and the test methods specified in paragraphs (A) and (B).

(A) For sulfur dioxide, EPA Reference Method 6, 6A, or 6C shall be used.

(B) For oxygen (or carbon dioxide), EPA Reference Method 3, 3A, or 3B, as applicable shall be used.

(ii) The span value of the continuous emissions monitoring system at the inlet to the sulfur dioxide control device shall be 125 percent of the maximum estimated hourly potential sulfur dioxide emissions of the municipal waste combustor unit. The span value of the continuous emission monitoring system at the outlet of the sulfur dioxide control device shall be 50 percent of the maximum estimated hourly potential sulfur dioxide emissions of the municipal waste combustor unit.

(13) Quarterly accuracy determinations and daily calibration drift tests shall be performed in accordance with procedure 1 in Appendix F of 40 CFR 60.

(14) When sulfur dioxide emissions data are not obtained because of continuous emission monitoring system breakdowns, repairs, calibration checks, and zero and span adjustments, emissions data shall be obtained by using other monitoring systems as approved by the Administrator or EPA Reference Method 19 to provide, as necessary, valid emissions data for a minimum of 75 percent of the hours per day that the affected facility is operated and combusting municipal solid waste for 90 percent of the days per calendar quarter that the affected facility is operated and combusting municipal solid waste.

[40 CFR 60.38b and 40 CFR 60.58b(e); and, PSD-FL-006(B) & (D)]

Hydrogen Chloride

B.62. The procedures and test methods specified in paragraphs (1) through (8) shall be used for determining compliance with the hydrogen chloride emission limit.

(1) The EPA Reference Method 26 or 26A, as applicable, shall be used to determine the hydrogen chloride emission concentration. The minimum sampling time for Method 26 shall be 1 hour.

(2) An oxygen (or carbon dioxide) measurement shall be obtained simultaneously with each Method 26 test run for hydrogen chloride required by paragraph (1).

(3) The percent reduction in potential hydrogen chloride emissions (% P_{HCl}) is computed using equation 2:

$$[\% P_{HCl}] = [(E_i - E_o)/E_i] \times 100 \qquad \textbf{(Equation 2)}$$

where:

% P_{HCl} = percent reduction of the potential hydrogen chloride emissions achieved.

E_i = potential hydrogen chloride emission concentration measured at the control device inlet, corrected to 7 percent oxygen (dry basis).

E_o = controlled hydrogen chloride emission concentration measured at the control device outlet, corrected to 7 percent oxygen (dry basis).

(4) The owner or operator of an affected facility may request that compliance with the hydrogen chloride emission limit be determined using carbon dioxide measurements corrected to an equivalent of 7 percent oxygen. The relationship between oxygen and carbon dioxide levels for the affected facility shall be established as specified in 40 CFR 60.58b(b)(6).

(5) As specified under 40 CFR 60.8, all performance tests shall consist of three test runs. The average of the hydrogen chloride emission concentrations or percent reductions from the three test runs is used to determine compliance.

(6) The owner or operator of an affected facility shall conduct an initial performance test for hydrogen chloride as required under 40 CFR 60.8.
(7) Following the date that the initial performance test for hydrogen chloride is completed or is required to be completed under 40 CFR 60.8, the owner or operator of an affected facility shall conduct a performance test for hydrogen chloride emissions on an annual basis (no more than 12 calendar months following the previous performance test).
(8) [reserved]
[40 CFR 60.38b and 40 CFR 60.58b(f); and, PSD-FL-006(B) & (D)]

Mercury, Sulfur Dioxide and Hydrogen Chloride

B.63. Testing shall be conducted upstream (removal efficiency for SO_2 and HCl) and downstream (mass emissions) of the applicable control device for the following pollutants, Hg, SO_2 and HCl, if compliance demonstration is based on percent removal efficiency. Soot blowers shall be operated in a mode consistent with normal cleaning requirements of the system during the compliance testing.
[PSD-FL-006(A) & (D)]

Dioxin/Furan

B.64. The procedures and test methods specified in paragraphs (1) through (9) shall be used to determine compliance with the limits for dioxin/furan emissions.
(1) The EPA Reference Method 1 shall be used for determining the location and number of sampling points.
(2) The EPA Reference Method 3, 3A, or 3B, as applicable, shall be used for flue gas analysis.
(3) The EPA Reference Method 23 shall be used for determining the dioxin/furan emission concentration.
(i) The minimum sample time shall be 4 hours per test run.
(ii) An oxygen (or carbon dioxide) measurement shall be obtained simultaneously with each Method 23 test run for dioxins/furans.
(4) The owner or operator of an affected facility shall conduct an initial performance test for dioxin/furan emissions in accordance with paragraph (3), as required under 40 CFR 60.8.
(5) Following the date that the initial performance test for dioxins/furans is completed or is required to be completed under 40 CFR 60.8, the owner or operator of an affected facility shall conduct performance tests for dioxin/furan emissions in accordance with paragraph (3), according to one of the schedules specified in paragraphs (i) through (iii).
(i) For affected facilities, performance tests shall be conducted on an annual basis (no more than 12 calendar months following the previous performance test.)
(ii) [reserved]
(iii) Where all performance tests over a 2-year period indicate that dioxin/furan emissions are less than or equal to 7 nanograms per dry standard cubic meter (total mass) for all affected facilities located within a municipal waste combustor plant, the owner or operator of the municipal waste combustor plant may elect to conduct annual performance tests for one affected facility (i.e., unit) per year at the municipal waste combustor plant. At a minimum, a performance test for dioxin/furan emissions shall be conducted annually (no more than 12 months following the previous performance test) for one affected facility at the municipal waste combustor plant. Each year a different affected facility at the municipal waste combustor plant shall be tested, and the affected facilities at the plant shall be tested in sequence (e.g., Unit 1, Unit 2, Unit 3, as applicable). If each annual performance test continues to indicate a dioxin/furan emission level less than or equal to 7 nanograms per dry standard cubic meter (total mass), the owner or operator may continue conducting a performance test

on only one affected facility per year. If any annual performance test indicates a dioxin/furan emission level greater than 7 nanograms per dry standard cubic meter (total mass), performance tests thereafter shall be conducted annually on all affected facilities at the plant until and unless all annual performance tests for all affected facilities at the plant over a 2-year period indicate a dioxin/furan emission level less than or equal to 7 nanograms per dry standard cubic meter (total mass).

(6) The owner or operator of an affected facility that selects to follow the performance testing schedule specified in paragraph (5)(iii) shall follow the procedures specified in 40 CFR 60 60.59b(g)(4) for reporting the selection of this schedule.

(7) The owner or operator of an affected facility where activated carbon is used to comply with the dioxin/furan emission limits specified in 40 CFR 60.52b(c) or the dioxin/furan emission level specified in paragraph (5)(iii) shall follow the procedures specified in 40 CFR 60.58b(m) for measuring and calculating the carbon usage rate.

(8) The owner or operator of an affected facility may request that compliance with the dioxin/furan emission limit be determined using carbon dioxide measurements corrected to an equivalent of 7 percent oxygen. The relationship between oxygen and carbon dioxide levels for the affected facility shall be established as specified in 40 CFR 60.58b(b)(6).

(9) As specified under 40 CFR 60.8, all performance tests shall consist of three test runs. The average of the dioxin/furan emission concentrations from the three test runs is used to determine compliance.

[40 CFR 60.38b and 40 CFR 60.58b(g); and, PSD-FL-006(B)]

Nitrogen Oxides

B.65. The procedures and test methods specified in paragraphs (1) through (12) shall be used to determine compliance with the nitrogen oxides emission limit for affected facilities under 40 CFR 60.52b(d).

(1) The EPA Reference Method 19, section 4.1, shall be used for determining the daily arithmetic average nitrogen oxides emission concentration.

(2) The owner or operator of an affected facility may request that compliance with the nitrogen oxides emission limit be determined using carbon dioxide measurements corrected to an equivalent of 7 percent oxygen. The relationship between oxygen and carbon dioxide levels for the affected facility shall be established as specified in 40 CFR 60.58b(b)(6).

(3) The owner or operator of an affected facility subject to the nitrogen oxides limit shall conduct an initial performance test for nitrogen oxides as required under 40 CFR 60.8. Compliance with the nitrogen oxides emission limit shall be determined by using the continuous emission monitoring system specified in paragraph (4) for measuring nitrogen oxides and calculating a 24-hour daily arithmetic average emission concentration using EPA Reference Method 19, section 4.1.

(4) The owner or operator of an affected facility subject to the nitrogen oxides emission shall install, calibrate, maintain, and operate a continuous emission monitoring system for measuring nitrogen oxides discharged to the atmosphere, and record the output of the system.

(5) Following the date that the initial performance test for nitrogen oxides is completed or is required to be completed under 40 CFR 60.8, compliance with the emission limit for nitrogen oxides shall be determined based on the 24-hour (measured between 12:00 midnight and the following midnight) daily arithmetic average of the hourly emission concentrations using continuous emission monitoring system outlet data.

(6) At a minimum, valid continuous emission monitoring system hourly averages shall be obtained as specified in paragraphs (i) and (ii) for 75 percent of the operating hours per day for 90 percent of the operating days per calendar quarter that the affected facility is combusting municipal solid waste.

(i) At least 2 data points per hour shall be used to calculate each 1-hour arithmetic average.

(ii) Each nitrogen oxides 1-hour arithmetic average shall be corrected to 7 percent oxygen on an hourly basis using the 1-hour arithmetic average of the oxygen (or carbon dioxide) continuous emission monitoring system data.

(7) The 1-hour arithmetic averages required by paragraph (5) shall be expressed in parts per million by volume (dry basis) and used to calculate the 24-hour daily arithmetic average concentrations. The 1-hour arithmetic averages shall be calculated using the data points required under 40 CFR 60.13(e)(2).

(8) All valid continuous emission monitoring system data must be used in calculating emission averages even if the minimum continuous emission monitoring system data requirements of paragraph (6) are not met.

(9) The procedures under 40 CFR 60.13 shall be followed for installation, evaluation, and operation of the continuous emission monitoring system. The initial performance evaluation shall be completed no later than 180 days after the date of initial startup of the municipal waste combustor unit, as specified under 40 CFR 60.8.

(10) The owner or operator of an affected facility shall operate the continuous emission monitoring system according to Performance Specification 2 in Appendix B of 40 CFR 60 and shall follow the procedures and methods specified in paragraphs(i) and (ii).

(i) During each relative accuracy test run of the continuous emission monitoring system required by Performance Specification 2 of Appendix B of 40 CFR 60, nitrogen oxides and oxygen (or carbon dioxide) data shall be collected concurrently (or within a 30- to 60-minute period) by both the continuous emission monitors and the test methods specified in paragraphs (A) and (B).

(A) For nitrogen oxides, EPA Reference Method 7, 7A, 7C, 7D, or 7E shall be used.

(B) For oxygen (or carbon dioxide), EPA Reference Method 3, 3A, or 3B, as applicable shall be used.

(ii) The span value of the continuous emission monitoring system shall be 125 percent of the maximum estimated hourly potential nitrogen oxide emissions of the municipal waste combustor unit.

(11) Quarterly accuracy determinations and daily calibration drift tests shall be performed in accordance with procedure 1 in Appendix F of 40 CFR 60.

(12) When nitrogen oxides continuous emissions data are not obtained because of continuous emission monitoring system breakdowns, repairs, calibration checks, and zero and span adjustments, emissions data shall be obtained using other monitoring systems as approved by the Administrator or EPA Reference Method 19 to provide, as necessary, valid emissions data for a minimum of 75 percent of the hours per day for 90 percent of the days per calendar quarter the unit is operated and combusting municipal solid waste.

[40 CFR 60.38b and 40 CFR 60.58b(h); and, PSD-FL-006(B) & (D)]

Beryllium

B.66. (a) Unless a waiver of emission testing is obtained under 40 CFR 61.13, each owner or operator required to comply with 40 CFR 61.32(a) shall test emissions from the source according to Method 104 or 29 of Appendix B to 40 CFR 61. Method ~~103~~ 104 of Appendix B to 40 CFR 61 is approved by the Administrator as an alternative method for sources subject to 40 CFR 61.32(a). The emission test shall be performed according to the following:

(1) Within 90 days of the effective date in the case of an existing source or a new source which has an initial startup date preceding the effective date; or

(2) Within 90 days of startup in the case of a new source which did not have an initial startup date preceding the effective date.

(b) The Administrator shall be notified at least 30 days prior to an emission test so that he may at his option observe the test.

(c) Samples shall be taken over such a period or periods as are necessary to accurately determine the maximum emissions which will occur in any 24-hour period. Where emissions depend upon the relative frequency of operation of different types of processes, operating hours, operating capacities, or other factors, the calculation of maximum 24-hour-period emissions will be based on that combination of factors which is likely to occur during the subject period and which result in the maximum emissions. No changes in the operation shall be made, which would potentially increase emissions above that determined by the most recent source test, until a new emission level has been estimated by calculation and the results reported to the Administrator.
(d) All samples shall be analyzed and beryllium emissions shall be determined within 30 days after the source test. All determinations shall be reported to the Administrator by a registered letter dispatched before the close of the next business day following such determination.
(e) Records of emission test results and other data needed to determine total emissions shall be retained at the source and made available, for inspection by the Administrator, for a minimum of 5 years.
(f) An initial compliance test is required; and, a compliance test prior to permit renewal is required.
[40 CFR 61.33; Rule 62-213.440(b), F.A.C.; and, PSD-FL-006(B) & (D)]

Total Fluoride

B.67. Compliance with the total fluoride emissions shall be demonstrated using EPA Method 13A or 13B. An initial compliance test is required; and, a compliance test prior to permit renewal is required.
[PSD-FL-006(B) & (D)]

Carbon Monoxide

B.68. See specific condition B.18.~~B.18.B.18.~~
[PSD-FL-006(A) & (D)]

Volatile Organic Compounds

B.69. Compliance with the volatile organic compounds limits shall be demonstrated using EPA Method ~~18~~, 25 or 25A in conjuction with 18.
[PSD-FL-006(B) & (D)]

Sulfuric Acid Mist

B.70. Compliance with the sulfuric acid mist emissions limits shall be demonstrated using EPA Method 8. Only an initial compliance test is required.
[PSD-FL-006(B) & (D)]

Arsenic

B.71. Compliance with the arsenic emissions limits shall be demonstrated using EPA Method 108 or 29. Only an initial compliance test is required.
[PSD-FL-006(B) & (D)]

B.72. Required Number of Test Runs. For mass emission limitations, a compliance test shall consist of three complete and separate determinations of the total air pollutant emission rate through the test section of the stack or duct and three complete and separate determinations of any applicable process variables corresponding to the three distinct time periods during which the stack emission rate was measured

provided, however, that three complete and separate determinations shall not be required if the process variables are not subject to variation during a compliance test, or if three determinations are not necessary in order to calculate the unit's emission rate. The three required test runs shall be completed within one consecutive five day period. In the event that a sample is lost or one of the three runs must be discontinued because of circumstances beyond the control of the owner or operator, and a valid third run cannot be obtained within the five day period allowed for the test, the Secretary or his or her designee may accept the results of the two complete runs as proof of compliance, provided that the arithmetic mean of the results of the two complete runs is at least 20 percent below the allowable emission limiting standards.
[Rule 62-297.310(1), F.A.C.]

B.73. Operating Rate During Testing. Testing of emissions shall be conducted with the emissions unit operation at permitted capacity, which is defined as 90 to 100 percent of the maximum operation rate allowed by the permit. If it is impracticable to test at permitted capacity, an emissions unit may be tested at less than the minimum permitted capacity; in this case, subsequent emissions unit operation is limited to 110 percent of the test load until a new test is conducted. Once the emissions unit is so limited, operation at higher capacities is allowed for no more than 15 consecutive days for the purpose of additional compliance testing to regain the authority to operate at the permitted capacity.
[Rules 62-297.310(2) & (2)(b), F.A.C.]

B.74. Calculation of Emission Rate. The indicated emission rate or concentration shall be the arithmetic average of the emission rate or concentration determined by each of the three separate test runs unless otherwise specified in a particular test method or applicable rule.
[Rule 62-297.310(3), F.A.C.]

B.75. Applicable Test Procedures.

(a) Required Sampling Time.

1. Unless otherwise specified in the applicable rule, the required sampling time for each test run shall be no less than one hour and no greater than four hours, and the sampling time at each sampling point shall be of equal intervals of at least two minutes.

2. Opacity Compliance Tests. When either EPA Method 9 or DEP Method 9 is specified as the applicable opacity test method, the required minimum period of observation for a compliance test shall be sixty (60) minutes for emissions units which emit or have the potential to emit 100 tons per year or more of particulate matter, and thirty (30) minutes for emissions units which have potential emissions less than 100 tons per year of particulate matter and are not subject to a multiple-valued opacity standard. The opacity test observation period shall include the period during which the highest opacity emissions can reasonably be expected to occur. Exceptions to these requirements are as follows:

a. For batch, cyclical processes, or other operations which are normally completed within less than the minimum observation period and do not recur within that time, the period of observation shall be equal to the duration of the batch cycle or operation completion time.

b. The observation period for special opacity tests that are conducted to provide data to establish a surrogate standard pursuant to Rule 62-297.310(5)(k), F.A.C., Waiver of Compliance Test Requirements, shall be established as necessary to properly establish the relationship between a proposed surrogate standard and an existing mass emission limiting standard.

c. The minimum observation period for opacity tests conducted by employees or agents of the Department to verify the day-to-day continuing compliance of a unit or activity with an applicable opacity standard shall be twelve minutes.

(b) Minimum Sample Volume. Unless otherwise specified in the applicable rule, the minimum sample volume per run shall be 25 dry standard cubic feet.
(c) Required Flow Rate Range. For EPA Method 5 particulate sampling, acid mist/sulfur dioxide, and fluoride sampling which uses Greenburg Smith type impingers, the sampling nozzle and sampling time shall be selected such that the average sampling rate will be between 0.5 and 1.0 actual cubic feet per minute, and the required minimum sampling volume will be obtained.
(d) Calibration of Sampling Equipment. Calibration of the sampling train equipment shall be conducted in accordance with the schedule shown in Table 297.310-1, attached as part of this permit.
(e) Allowed Modification to EPA Method 5. When EPA Method 5 is required, the following modification is allowed: the heated filter may be separated from the impingers by a flexible tube.
[Rule 62-297.310(4), F.A.C.]

B.76. Required Stack Sampling Facilities. When a mass emissions stack test is required, the permittee shall comply with the requirements contained in Appendix SS-1, Stack Sampling Facilities, attached to this permit.
[Rule 62-297.310(6), F.A.C.]

B.77. Frequency of Compliance Tests. The following provisions apply only to those emissions units that are subject to an emissions limiting standard for which compliance testing is required.
(a) General Compliance Testing.
3. The owner or operator of an emissions unit that is subject to any emission limiting standard shall conduct a compliance test that demonstrates compliance with the applicable emission limiting standard prior to obtaining a renewed operation permit. Emissions units that are required to conduct an annual compliance test may submit the most recent annual compliance test to satisfy the requirements of this provision. In renewing an air operation permit pursuant to Rule 62-210.300(2)(a)3.b., c., or d., F.A.C., the Department shall not require submission of emission compliance test results for any emissions unit that, during the year prior to renewal:
   a. Did not operate; or
   b. In the case of a fuel burning emissions unit, burned liquid and/or solid fuel for a total of no more than 400 hours.
4. During each federal fiscal year (October 1 - September 30), unless otherwise specified by rule, order, or permit, the owner or operator of each emissions unit shall have a formal compliance test conducted for:
   a. Visible emissions, if there is an applicable standard;
   b. Each of the following pollutants, if there is an applicable standard, and if the emissions unit emits or has the potential to emit: 5 tons per year or more of lead or lead compounds measured as elemental lead; 30 tons per year or more of acrylonitrile; or 100 tons per year or more of any other regulated air pollutant; and
   c. Each NESHAP pollutant, if there is an applicable emission standard.
5. An annual compliance test for particulate matter emissions shall not be required for any fuel burning emissions unit that, in a federal fiscal year, does not burn liquid and/or solid fuel, other than during startup, for a total of more than 400 hours.
9. The owner or operator shall notify the Department's Southeast District office and the Dade County's DERM office at least 15 days prior to the date on which each formal compliance test is to begin, of the date, time, and place of each such test, and the test contact person who will be responsible for coordinating and having such test conducted for the owner or operator.
(b) Special Compliance Tests. When the Department's Southeast District office or the Dade County's DERM office, after investigation, has good reason (such as complaints, increased visible emissions or questionable maintenance of control equipment) to believe that any applicable emission standard

contained in a Department rule or in a permit issued pursuant to those rules is being violated, it may require the owner or operator of the emissions unit to conduct compliance tests which identify the nature and quantity of pollutant emissions from the emissions unit and to provide a report on the results of said tests to the Department's Southeast District office and the Dade County's DERM office.
(c) Waiver of Compliance Test Requirements. If the owner or operator of an emissions unit that is subject to a compliance test requirement demonstrates to the Department, pursuant to the procedure established in Rule 62-297.620, F.A.C., that the compliance of the emissions unit with an applicable weight emission limiting standard can be adequately determined by means other than the designated test procedure, such as specifying a surrogate standard of no visible emissions for particulate matter sources equipped with a bag house or specifying a fuel analysis for sulfur dioxide emissions, the Department shall waive the compliance test requirements for such emissions units and order that the alternate means of determining compliance be used, provided, however, the provisions of Rule 62-297.310(7)(b), F.A.C., shall apply.
[Rule 62-297.310(7), F.A.C.; PSD-FL-006(D); and, SIP approved]

Compliance With Standards and Maintenance Requirements

B.78. Compliance with standards in 40 CFR 60, other than opacity standards, shall be determined only by performance tests established by 40 CFR 60.8, unless otherwise specified in the applicable standard.
[40 CFR 60.11(a)]

B.79. Compliance with opacity standards in 40 CFR 60 shall be determined by conducting observations in accordance with Reference Method 9 in Appendix A, 40 CFR 60, any alternative method that is approved by the Administrator, or as provided in 40 CFR 60.11(e)(5).
[40 CFR 60.11(b)]

B.80. The owner or operator of an affected facility subject to an opacity standard may submit, for compliance purposes, continuous opacity monitoring system (COMS) data results produced during any performance test required under 40 CFR 60.8 in lieu of EPA Method 9 observation data. If an owner or operator elects to submit COMS data for compliance with the opacity standard, he or she shall notify the Administrator of that decision, in writing, at least 30 days before any performance test required under 40 CFR 60.8 is conducted. Once the owner or operator of an affected facility has notified the Administrator to that effect, the COMS data results will be used to determine opacity compliance during subsequent tests required under 40 CFR 60.8 until the owner or operator notifies the Administrator, in writing, to the contrary. For the purpose of determining compliance with the opacity standard during a performance test required under 40 CFR 60.8 using COMS data, the minimum total time of COMS data collection shall be averages of all 6-minute continuous periods within the duration of the mass emission performance test. Results of the COMS opacity determinations shall be submitted along with the results of the performance test required under 60.8. The owner or operator of an affected facility using a COMS for compliance purposes is responsible for demonstrating that the COMS meets the requirements specified in 40 CFR 60.13(c), that the COMS has been properly maintained and operated, and that the resulting data have not been altered in any way. If COMS data results are submitted for compliance with the opacity standard for a period of time during which EPA Method 9 data indicates noncompliance, the EPA Method 9 data will be used to determine opacity compliance.
[40 CFR 60.11(e)(5)]

Monitoring Requirements

B.81. For the purposes of 40 CFR 60.13, all continuous monitoring systems (CMS) required under applicable subparts shall be subject to the provisions of 40 CFR 60.13 upon promulgation of performance specifications for continuous monitoring systems under Appendix B of 40 CFR 60 and, if the continuous monitoring system is used to demonstrate compliance with emission limits on a continuous basis, Appendix F of 40 CFR 60, unless otherwise specified in an applicable subpart or by the Administrator. Appendix F is applicable December 4, 1987.
[40 CFR 60.13(a)]

B.82. Continuous Monitoring Systems. Continuous monitoring systems (CMS) with recorders for the output shall be installed, calibrated, maintained and operated for each emissions unit, subject to approval by the Department, for the following:

a. Flue Gas Temperature (to be located at the inlet to the final particulate matter control device; the monitors shall be calibrated, operated and maintained in accordance with the manufacturers' instructions; and, the monitoring is to be certified by the manufacturer to be accurate within +1 percent of the temperature being measured);
b. Opacity;
c. Oxygen;
d. Carbon Monoxide;
e. Nitrogen Oxides;
f. Sulfur Dioxide (for SO_2, one monitor shall be located upstream of the scrubber and one shall be located downstream of the baghouse, when using percent removal to determine compliance with the SO_2 limits), as specified in 40 CFR 60, Appendix B.
g. Total Steam Production (lbs/hr, pressure, and temperature);
h. Power Generation;
i. ~~Slake~~ Slaked Lime Production/Utilization;
j. Activated Carbon or Mercury Reactant Injection or Usage Rate;
k. Combustion Zone Temperature (as determined by surrogate temperature monitoring at the boiler roof); and,
l. Baghouse Pressure Drop (to be located downstream of the dry lime scrubbers).

The monitoring equipment shall meet the applicable requirements of Chapter 62-297, F.A.C., 40 CFR 60, Appendix F, 40 CFR 60.58b, and 40 CFR 60.13, including certification of each device in accordance with 40 CFR 60, Appendix B, Performance Specifications, and 40 CFR 60.7(a)(5), Notification Requirements. Data on monitoring equipment specifications, manufacturer, type calibration and maintenance requirements, and the proposed location of each monitor shall be provided to the Department's Southeast District office and the Dade County's DERM office for review at least 90 days prior to installation.
[PSD-FL-006(A) & (D)]

B.83. Opacity. If the owner or operator of an affected facility elects to submit continuous opacity monitoring system (COMS) data for compliance with the opacity standard as provided under 40 CFR 60.11(e)(5), he shall conduct a performance evaluation of the COMS as specified in Performance Specification 1, Appendix B, of 40 CFR 60 before the performance test required under 40 CFR 60.8 is conducted. Otherwise, the owner or operator of an affected facility shall conduct a performance evaluation of the COMS or continuous emission monitoring system (CEMS) during any performance test required under 40 CFR 60.8 or within 30 days thereafter in accordance with the applicable performance specification in Appendix B of 40 CFR 60. The owner or operator of an affected facility shall conduct

COMS or CEMS performance evaluations at such other times as may be required by the Administrator under section 114 of the Act.
(1) The owner or operator of an affected facility using a COMS to determine opacity compliance during any performance test required under 60.8 and as described in 40 CFR 60.11(e)(5) shall furnish the Administrator two or, upon request, more copies of a written report of the results of the COMS performance evaluation described in 40 CFR 60.13(c) at least 10 days before the performance test required under 60.8 is conducted.
[40 CFR 60.13(c)(1)]

B.84. (1) CEMS Zero and Span Values. Owners and operators of all continuous emission monitoring systems (CEMS) installed in accordance with the provisions of this 40 CFR Part 60 shall check the zero (or low-level value between 0 and 20 percent of span value) and span (50 to 100 percent of span value) calibration drifts at least once daily in accordance with a written procedure. The zero and span shall, as a minimum, be adjusted whenever the 24-hour zero drift or 24-hour span drift exceeds two times the limits of the applicable performance specifications in Appendix B. The system must allow the amount of excess zero and span drift measured at the 24-hour interval checks to be recorded and quantified, whenever specified. For continuous monitoring systems measuring opacity of emissions, the optical surfaces exposed to the effluent gases shall be cleaned prior to performing the zero and span drift adjustments except that for systems using automatic zero adjustments. The optical surfaces shall be cleaned when the cumulative automatic zero compensation exceeds 4 percent opacity.
(2) Opacity. Unless otherwise approved by the Administrator, the following procedures shall be followed for continuous monitoring systems measuring opacity of emissions. Minimum procedures shall include a method for producing a simulated zero opacity condition and an upscale (span) opacity condition using a certified neutral density filter or other related technique to produce a known obscuration of the light beam. Such procedures shall provide a system check of the analyzer internal optical surfaces and all electronic circuitry including the lamp and photo detector assembly.
[40 CFR 60.13(d)(1) and (2)]

B.85. Except for system breakdowns, repairs, calibration checks, and zero and span adjustments required under 40 CFR 60.13(d), all continuous monitoring systems (CMS) shall be in continuous operation and shall meet minimum frequency of operation requirements as follows:
(1) Opacity. All continuous monitoring systems referenced by 40 CFR 60.13(c) for measuring opacity of emissions shall complete a minimum of one cycle of sampling and analyzing for each successive 10-second period and one cycle of data recording for each successive 6-minute period.
(2) All continuous monitoring systems referenced by 40 CFR 60.13(c) for measuring emissions, except opacity, shall complete a minimum of one cycle of operation (sampling, analyzing, and data recording) for each successive 15-minute period.
[40 CFR 60.13(e)(1) and (2)]

B.86. All continuous monitoring systems (CMS) or monitoring devices shall be installed such that representative measurements of emissions or process parameters from the affected facility are obtained. Additional procedures for location of continuous monitoring systems contained in the applicable Performance Specifications of Appendix B of 40 CFR 60 shall be used.
[40 CFR 60.13(f)]

B.87. When the effluents from a single affected facility or two or more affected facilities subject to the same emission standards are combined before being released to the atmosphere, the owner or operator may install applicable continuous monitoring systems (CMS) on each effluent or on the combined effluent. When the affected facilities are not subject to the same emission standards, separate continuous

monitoring systems shall be installed on each effluent. When the effluent from one affected facility is released to the atmosphere through more than one point, the owner or operator shall install an applicable continuous monitoring system on each separate effluent unless the installation of fewer systems is approved by the Administrator. When more than one continuous monitoring system is used to measure the emissions from one affected facility (e.g., multiple breachings, multiple outlets), the owner or operator shall report the results as required from each continuous monitoring system.
[40 CFR 60.13(g)]

B.88. Opacity. Owners or operators of all continuous monitoring systems for measurement of opacity shall reduce all data to 6-minute averages and for continuous monitoring systems other than opacity to 1-hour averages for time periods as defined in 40 CFR 60.2. Six-minute opacity averages shall be calculated from 36 or more data points equally spaced over each 6-minute period. For continuous monitoring systems other than opacity, 1-hour averages shall be computed from four or more data points equally spaced over each 1-hour period. Data recorded during periods of continuous monitoring system breakdowns, repairs, calibration checks, and zero and span adjustments shall not be included in the data averages computed under this paragraph. An arithmetic or integrated average of all data may be used. The data may be recorded in reduced or non reduced form (e.g., ppm pollutant and percent O_2 or ng/J of pollutant). All excess emissions shall be converted into units of the standard using the applicable conversion procedures specified in subparts. After conversion into units of the standard, the data may be rounded to the same number of significant digits as used in the applicable subparts to specify the emission limit (e.g., rounded to the nearest 1 percent opacity).
[40 CFR 60.13(h)]

B.89. Determination of Process Variables.
(a) Required Equipment. The owner or operator of an emissions unit for which compliance tests are required shall install, operate, and maintain equipment or instruments necessary to determine process variables, such as process weight input or heat input, when such data are needed in conjunction with emissions data to determine the compliance of the emissions unit with applicable emission limiting standards.
(b) Accuracy of Equipment. Equipment or instruments used to directly or indirectly determine process variables, including devices such as belt scales, weight hoppers, flow meters, and tank scales, shall be calibrated and adjusted to indicate the true value of the parameter being measured with sufficient accuracy to allow the applicable process variable to be determined within 10% of its true value.
[Rule 62-297.310(5), F.A.C.]

B.90. CMS for Oxygen or Carbon Dioxide. The owner or operator of an affected facility shall install, calibrate, maintain, and operate a continuous monitoring system and record the output of the system for measuring the oxygen or carbon dioxide content of the flue gas at each location where carbon monoxide, sulfur dioxide, or nitrogen oxides emissions are monitored and shall comply with the test procedures and test methods specified in paragraphs (1) through (7).
(1) The span value of the oxygen (or carbon dioxide) monitor shall be 25 percent oxygen (or carbon dioxide).
(2) The monitor shall be installed, evaluated, and operated in accordance with 40 CFR 60.13.
(3) The initial performance evaluation shall be completed no later than 180 days after the date of initial startup of the affected facility, as specified under 40 CFR 60.8.
(4) The monitor shall conform to Performance Specification 3 in Appendix B of 40 CFR 60 except for section 2.3 (relative accuracy requirement).
(5) The quality assurance procedures of Appendix F of 40 CFR 60 except for section 5.1.1 (relative accuracy test audit) shall apply to the monitor.

(6) If carbon dioxide is selected for use in diluent corrections, the relationship between oxygen and carbon dioxide levels shall be established during the initial performance test according to the procedures and methods specified in paragraphs(i) through(iv). This relationship may be reestablished during performance compliance tests.

(i) The fuel factor equation in Method 3B shall be used to determine the relationship between oxygen and carbon dioxide at a sampling location. Method 3, 3A, or 3B, as applicable, shall be used to determine the oxygen concentration at the same location as the carbon dioxide monitor.

(ii) Samples shall be taken for at least 30 minutes in each hour.

(iii) Each sample shall represent a 1-hour average.

(iv) A minimum of three runs shall be performed.

(7) The relationship between carbon dioxide and oxygen concentrations that is established in accordance with paragraph (6) shall be submitted to the EPA Administrator as part of the initial performance test report and, if applicable, as part of the annual test report if the relationship is reestablished during the annual performance test.

[40 CFR 60.38b and 40 CFR 60.58b(b)]

Recordkeeping and Reporting Requirements

B.91. The owner or operator subject to the provisions of 40 CFR 60 shall furnish the Administrator written notification as follows:

(4) A notification of any physical or operational change to an existing facility which may increase the emission rate of any air pollutant to which a standard applies, unless that change is specifically exempted under an applicable subpart or in 40 CFR 60.14(e). This notice shall be postmarked 60 days or as soon as practicable before the change is commenced and shall include information describing the precise nature of the change, present and proposed emission control systems, productive capacity of the facility before and after the change, and the expected completion date of the change. The Administrator may request additional relevant information subsequent to this notice.

[40 CFR 60.7(a)(4)]

B.92. The owner or operator subject to the provisions of 40 CFR 60 shall maintain records of the occurrence and duration of any startup, shutdown, or malfunction in the operation of an affected facility; any malfunction of the air pollution control equipment; or, any periods during which a continuous monitoring system or monitoring device is inoperative.

[40 CFR 60.7(b)]

B.93. Each owner or operator required to install a continuous monitoring system (CMS) or monitoring device shall submit an excess emissions and monitoring systems performance report (excess emissions are defined in applicable subparts) and/or a summary report form [see 40 CFR 60.7(d)] to the Administrator semiannually, except when: more frequent reporting is specifically required by an applicable subpart; or, the CMS data are to be used directly for compliance determination, in which case quarterly reports shall be submitted; or, the Administrator, on a case-by-case basis, determines that more frequent reporting is necessary to accurately assess the compliance status of the source. All reports shall be postmarked by the 30th day following the end of each calendar half (or quarter, as appropriate). Written reports of excess emissions shall include the following information:

(1) The magnitude of excess emissions computed in accordance with 40 CFR 60.13(h), any conversion factor(s) used, and the date and time of commencement and completion of each time period of excess emissions. The process operating time during the reporting period.

(2) Specific identification of each period of excess emissions that occurs during startups, shutdowns, and malfunctions of the affected facility. The nature and cause of any malfunction (if known), the corrective action taken or preventative measures adopted.
(3) The date and time identifying each period during which the continuous monitoring system was inoperative except for zero and span checks and the nature of the system repairs or adjustments.
(4) When no excess emissions have occurred or the continuous monitoring system(s) have not been inoperative, repaired, or adjusted, such information shall be stated in the report.
[40 CFR 60.7(c)(1), (2), (3), and (4)]

B.94. The summary report form shall contain the information and be in the format shown in Figure 1 (attached) unless otherwise specified by the Administrator. One summary report form shall be submitted for each pollutant monitored at each affected facility.
(1) If the total duration of excess emissions for the reporting period is less than 1 percent of the total operating time for the reporting period and CMS downtime for the reporting period is less than 5 percent of the total operating time for the reporting period, only the summary report form shall be submitted and the excess emission report described in 40 CFR 60.7(c) need not be submitted unless requested by the Administrator.
(2) If the total duration of excess emissions for the reporting period is 1 percent or greater of the total operating time for the reporting period or the total CMS downtime for the reporting period is 5 percent or greater of the total operating time for the reporting period, the summary report form and the excess emission report described in 40 CFR 60.7(c) shall both be submitted.

{See attached Figure 1: Summary Report-Gaseous and Opacity Excess Emission and Monitoring System Performance}
[40 CFR 60.7(d)(1) and (2)]

B.95. (1) Notwithstanding the frequency of reporting requirements specified in 40 CFR 60.7(c), an owner or operator who is required by an applicable subpart to submit excess emissions and monitoring systems performance reports (and summary reports) on a quarterly (or more frequent) basis may reduce the frequency of reporting for that standard to semiannual if the following conditions are met:
(i) For 1 full year (e.g., 4 quarterly or 12 monthly reporting periods) the affected facility's excess emissions and monitoring systems reports submitted to comply with a standard under this part continually demonstrate that the facility is in compliance with the applicable standard;
(ii) The owner or operator continues to comply with all recordkeeping and monitoring requirements specified in 40 CFR 60, Subpart A, and the applicable standard; and
(iii) The Administrator does not object to a reduced frequency of reporting for the affected facility, as provided in 40 CFR 60.7(e)(2).
(2) The frequency of reporting of excess emissions and monitoring systems performance (and summary) reports may be reduced only after the owner or operator notifies the Administrator in writing of his or her intention to make such a change and the Administrator does not object to the intended change. In deciding whether to approve a reduced frequency of reporting, the Administrator may review information concerning the source's entire previous performance history during the required recordkeeping period prior to the intended change, including performance test results, monitoring data, and evaluations of an owner or operator's conformance with operation and maintenance requirements. Such information may be used by the Administrator to make a judgment about the source's potential for noncompliance in the future. If the Administrator disapproves the owner or operator's request to reduce the frequency of reporting, the Administrator will notify the owner or operator in writing within 45 days after receiving notice of the owner or operator's intention. The notification from the Administrator to the owner or operator will specify the grounds on which the disapproval is based. In the absence of a notice of disapproval within 45 days, approval is automatically granted.

(3) As soon as monitoring data indicate that the affected facility is not in compliance with any emission limitation or operating parameter specified in the applicable standard, the frequency of reporting shall revert to the frequency specified in the applicable standard, and the owner or operator shall submit an excess emissions and monitoring systems performance report (and summary report, if required) at the next appropriate reporting period following the noncomplying event. After demonstrating compliance with the applicable standard for another full year, the owner or operator may again request approval from the Administrator to reduce the frequency of reporting for that standard as provided for in 40 CFR 60.7(e)(1) and (e)(2).
[40 CFR 60.7(e)(1), (2), and (3)]

B.96. Any owner or operator subject to the provisions of 40 CFR 60 shall maintain a file of: all measurements, including continuous monitoring system, monitoring device, and performance testing measurements; all continuous monitoring system performance evaluations; all continuous monitoring system or monitoring device calibration checks; adjustments and maintenance performed on these systems or devices; calibration logs for all instruments; and, all other information required by 40 CFR 60 recorded in a permanent form suitable for inspection. The file shall be retained for at least **5 (five)** years following the date of such measurements, maintenance, reports, and records.
[40 CFR 60.7(f); PSD-FL-006(A) & (D); and, Rule 62-213.440(1)(b)2.b., F.A.C.]

B.97. Notification of Construction or Reconstruction. The owner or operator of an affected facility with a capacity to combust greater than 250 tons per day shall submit a notification of construction, which includes the information specified in paragraphs (1) through (4).
(1) Intent to construct.
(2) Planned initial startup date.
(3) The types of fuels that the owner or operator plans to combust in the affected facility.
(4) The municipal waste combustor unit capacity and supporting capacity calculations prepared in accordance with 40 CFR 60.58b(j).
[40 CFR 60.39b and 40 CFR 60.59b(b)]

B.98. The owner or operator of an affected facility subject to the standards under 40 CFR 60.53b, 60.54b, and 60.55b shall maintain records of the information specified in paragraphs (1) through (15), as applicable, for each affected facility for a period of at least 5 years.
(1) The calendar date of each record.
(2) The emission concentrations and parameters measured using continuous monitoring systems as specified under paragraphs (i) and (ii).

(i) The measurements specified in paragraphs (A) through (D) shall be recorded and be available for submittal to the Administrator or review onsite by an inspector.

(A) All 6-minute average opacity levels as specified under 40 CFR 60.58b(c).

(B) All 1-hour average sulfur dioxide emission concentrations as specified under 40 CFR 60.58b(e).

(C) All 1-hour average nitrogen oxides emission concentrations as specified under 40 CFR 60.58b(h).

(D) All 1-hour average carbon monoxide emission concentrations, municipal waste combustor unit load measurements, and particulate matter control device inlet temperatures as specified under 40 CFR 60.58b(i).

(ii) The average concentrations and percent reductions, as applicable, specified in paragraphs (2)(ii)(A) through (2)(ii)(D) shall be computed and recorded, and shall be available for submittal to the Administrator or review on-site by an inspector.

(A) All 24-hour daily geometric average sulfur dioxide emission concentrations and all 24-hour daily geometric average percent reductions in sulfur dioxide emissions as specified under 40 CFR 60.58b(e).
(B) All 24-hour daily arithmetic average nitrogen oxides emission concentrations as specified under 40 CFR 60.58b(h).
(C) All 4-hour block or 24-hour daily arithmetic average carbon monoxide emission concentrations, as applicable, as specified under 40 CFR 60.58b(i).
(D) All 4-hour block arithmetic average municipal waste combustor unit load levels and particulate matter control device inlet temperatures as specified under 40 CFR 60.58b(i).

(3) Identification of the calendar dates when any of the average emission concentrations, percent reductions, or operating parameters recorded under paragraphs (2)(ii)(A) through (2)(ii)(D), or the opacity levels recorded under paragraph (2)(i)(A) are above the applicable limits, with reasons for such exceedances and a description of corrective actions taken.

(4) For affected facilities that apply activated carbon for mercury or dioxin/furan control, the records specified in paragraphs (i) through (v).

(i) The average carbon mass feed rate (in kilograms per hour or pounds per hour) estimated as required under 40 CFR 60.58b(m)(1)(i) during the initial mercury performance test and all subsequent annual performance tests, with supporting calculations.
(ii) The average carbon mass feed rate (in kilograms per hour or pounds per hour) estimated as required under 40 CFR 60.58b(m)(1)(ii) during the initial dioxin/furan performance test and all subsequent annual performance tests, with supporting calculations.
(iii) The average carbon mass feed rate (in kilograms per hour or pounds per hour) estimated for each hour of operation as required under 40 CFR 60.58b(m)(3)(ii), with supporting calculations.
(iv) The total carbon usage for each calendar quarter estimated as specified by 40 CFR 60.58b(m)(3), with supporting calculations.
(v) Carbon injection system operating parameter data for the parameter(s) that are the primary indicator(s) of carbon feed rate (e.g., screw feeder speed).

(5) [Reserved]

(6) Identification of the calendar dates for which the minimum number of hours of any of the data specified in paragraphs (i) through (v) have not been obtained including reasons for not obtaining sufficient data and a description of corrective actions taken.

(i) Sulfur dioxide emissions data;
(ii) Nitrogen oxides emissions data;
(iii) Carbon monoxide emissions data;
(iv) Municipal waste combustor unit load data; and
(v) Particulate matter control device temperature data.

(7) Identification of each occurrence that sulfur dioxide emissions data, nitrogen oxides emissions data (large municipal waste combustors only), or operational data (i.e., carbon monoxide emissions, unit load, and particulate matter control device temperature) have been excluded from the calculation of average emission concentrations or parameters, and the reasons for excluding the data.

(8) The results of daily drift tests and quarterly accuracy determinations for sulfur dioxide, nitrogen oxides, and carbon monoxide continuous emission monitoring systems, as required under Appendix F of this part, procedure 1.

(9) The test reports documenting the results of the initial performance test and all annual performance tests listed in paragraphs (i) and (ii) shall be recorded along with supporting calculations.

(i) The results of the initial performance test and all annual performance tests conducted to determine compliance with the particulate matter, opacity, cadmium, lead, mercury, dioxins/furans, hydrogen chloride, and fugitive ash emission limits.

(ii) For the initial dioxin/furan performance test and all subsequent dioxin/furan performance tests recorded under paragraph (9)(i), the maximum demonstrated municipal waste combustor unit load and maximum demonstrated particulate matter control device temperature (for each particulate matter control device).

(10) [Reserved]

(12) The records specified in paragraphs (i) through (iii).

(i) Records showing the names of the municipal waste combustor chief facility operator, shift supervisors, and control room operators who have been provisionally certified by the American Society of Mechanical Engineers or an equivalent State-approved certification program as required by 40 CFR 60.54b(a) including the dates of initial and renewal certifications and documentation of current certification.

(ii) Records showing the names of the municipal waste combustor chief facility operator, shift supervisors, and control room operators who have been fully certified by the American Society of Mechanical Engineers or an equivalent State-approved certification program as required by 40 CFR 60.54b(b) including the dates of initial and renewal certifications and documentation of current certification.

(iii) Records showing the names of the municipal waste combustor chief facility operator, shift supervisors, and control room operators who have completed the EPA municipal waste combustor operator training course or a State-approved equivalent course as required by 40 CFR 60.54b(d) including documentation of training completion.

(13) Records showing the names of persons who have completed a review of the operating manual as required by 40 CFR 60.54b(f) including the date of the initial review and subsequent annual reviews.

(14) For affected facilities that apply activated carbon for mercury or dioxin/furan control, identification of the calendar dates when the average carbon mass feed rates recorded under (4)(iii) were less than either of the hourly carbon feed rates estimated during performance tests for mercury or dioxin/furan emissions and recorded under paragraphs (4)(i) and (4)(ii), respectively, with reasons for such feed rates and a description of corrective actions taken.

(15) For affected facilities that apply activated carbon for mercury or dioxin/furan control, identification of the calendar dates when the carbon injection system operating parameter(s) that are the primary indicator(s) of carbon mass feed rate (e.g., screw feeder speed) recorded under paragraph (4)(v) are below the level(s) estimated during the performance tests as specified in 40 CFR 60.58b(m)(1)(i) and 40 CFR 60.58b(m)(1)(ii), with reasons for such occurrences and a description of corrective actions taken.

[40 CFR 60.39b and 40 CFR 60.59b(d)]

B.99. The owner or operator of an affected facility shall submit the information specified in paragraphs (1) through (6) in the initial performance test report.

(1) The initial performance test data as recorded under 40 CFR 60.59b(d)(2)(ii)(A) through (d)(2)(ii)(D) for the initial performance test for sulfur dioxide, nitrogen oxides, carbon monoxide, municipal waste combustor unit load level, and particulate matter control device inlet temperature.

(2) The test report documenting the initial performance test recorded under 40 CFR 60.59b(d)(9) for particulate matter, opacity, cadmium, lead, mercury, dioxins/furans, hydrogen chloride, and fugitive ash emissions.

(3) The performance evaluation of the continuous emission monitoring system using the applicable performance specifications in Appendix B of this part.

(4) The maximum demonstrated municipal waste combustor unit load and maximum demonstrated particulate matter control device inlet temperature(s) established during the initial dioxin/furan performance test as recorded under 40 CFR 60.59b(d)(9).

(5) For affected facilities that apply activated carbon injection for mercury control, the owner or operator shall submit the average carbon mass feed rate recorded under 40 CFR 60.59b(d)(4)(i).

(6) For those affected facilities that apply activated carbon injection for dioxin/furan control, the owner or operator shall submit the average carbon mass feed rate recorded under 40 CFR 60.59b(d)(4)(ii). [40 CFR 60.39b and 40 CFR 60.59b(f)]

B.100. Following the first year of municipal combustor operation, the owner or operator of an affected facility shall submit an annual report including the information specified in paragraphs (1) through (4), as applicable, no later than February 1 of each year following the calendar year in which the data were collected (once the unit is subject to permitting requirements under Title V of the Act, the owner or operator of an affected facility must submit these reports semiannually).
(1) A summary of data collected for all pollutants and parameters regulated under this subpart, which includes the information specified in paragraphs (i) through (v).
(i) A list of the particulate matter, opacity, cadmium, lead, mercury, dioxins/furans, hydrogen chloride, and fugitive ash emission levels achieved during the performance tests recorded under 40 CFR 60.59b (d)(9).
(ii) A list of the highest emission level recorded for sulfur dioxide, nitrogen oxides, carbon monoxide, municipal waste combustor unit load level, and particulate matter control device inlet temperature based on the data recorded under 40 CFR 60.59b(d)(2)(ii)(A) through (d)(2)(ii)(D).
(iii) List the highest opacity level measured, based on the data recorded under 40 CFR 60.59b(d)(2)(i)(A).
(iv) The total number of days that the minimum number of hours of data for sulfur dioxide, nitrogen oxides, carbon monoxide, municipal waste combustor unit load, and particulate matter control device temperature data were not obtained based on the data recorded under 40 CFR 60.59b(d)(6).
(v) The total number of hours that data for sulfur dioxide, nitrogen oxides, carbon monoxide, municipal waste combustor unit load, and particulate matter control device temperature were excluded from the calculation of average emission concentrations or parameters based on the data recorded under 40 CFR 60.59b(d)(7).
(2) The summary of data reported under paragraph (1) shall also provide the types of data specified in paragraphs (1)(i) through (1)(vi) for the calendar year preceding the year being reported, in order to provide the Administrator with a summary of the performance of the affected facility over a 2-year period.
(3) The summary of data including the information specified in paragraphs (1) and (2) shall highlight any emission or parameter levels that did not achieve the emission or parameter limits specified under this subpart.
(4) A notification of intent to begin the reduced dioxin/furan performance testing schedule specified in 40 CFR 60.58b(g)(5)(iii) during the following calendar year.
[40 CFR 60.39b and 40 CFR 60.59b(g)]

B.101. The owner or operator of an affected facility shall submit a semiannual report that includes the information specified in paragraphs (1) through (5) for any recorded pollutant or parameter that does not comply with the pollutant or parameter limit specified under this subpart, according to the schedule specified under paragraph (6).
(1) The semiannual report shall include information recorded under 40 CFR 60.59b(d)(3) for sulfur dioxide, nitrogen oxides, carbon monoxide, municipal waste combustor unit load level, particulate matter control device inlet temperature, and opacity.
(2) For each date recorded as required by 40 CFR 60.59b(d)(3) and reported as required by paragraph (1), the semiannual report shall include the sulfur dioxide, nitrogen oxides, carbon monoxide, municipal waste combustor unit load level, particulate matter control device inlet temperature, or opacity data, as applicable, recorded under 40 CFR 60.59b(d)(2)(ii)(A) through (d)(2)(ii)(D) and (d)(2)(i)(A), as applicable.

(3) If the test reports recorded under 40 CFR 56.59b(d)(9) document any particulate matter, opacity, cadmium, lead, mercury, dioxins/furans, hydrogen chloride, and fugitive ash emission levels that were above the applicable pollutant limits, the semiannual report shall include a copy of the test report documenting the emission levels and the corrective actions taken.
(4) The semiannual report shall include the information recorded under 40 CFR 60.59b(d)(15) for the carbon injection system operating parameter(s) that are the primary indicator(s) of carbon mass feed rate.
(5) For each operating date reported as required by paragraph (4), the semiannual report shall include the carbon feed rate data recorded under 40 CFR 60.59b(d)(4)(iii).
(6) Semiannual reports required by this condition shall be submitted according to the schedule specified in paragraphs (i) and (ii).
(i) If the data reported in accordance with paragraphs (1) through (5) were collected during the first calendar half, then the report shall be submitted by August 1 following the first calendar half.
(ii) If the data reported in accordance with paragraphs (1) through (5) were collected during the second calendar half, then the report shall be submitted by February 1 following the second calendar half.
[40 CFR 60.39b and 40 CFR 60.59b(h)]

B.102. All reports specified under 40 CFR 60.59b(a), (b), (c), (f), (g), (h), and (i) shall be submitted as a paper copy, postmarked on or before the submittal dates specified under these paragraphs, and maintained on-site as a paper copy for a period of **5** years.
[40 CFR 60.39b and 40 CFR 60.59b(j); PSD-FL-006(A) & (D); and, Rule 62-213.440, F.A.C.]

B.103. All records specified under 40 CFR 60.59b(d) and (e) shall be maintained onsite in either paper copy or computer-readable format, unless an alternative format is approved by the Administrator.
[40 CFR 60.39b and 40 CFR 60.59b(k)]

B.104. If the owner or operator of an affected facility would prefer a different annual or semiannual date for submitting the periodic reports required by 40 CFR 60.59b(g), (h) and (i), then the dates may be changed by mutual agreement between the owner or operator and the Administrator according to the procedures specified in 40 CFR 60.19(c) of Subpart A of 40 CFR 60.
[40 CFR 60.39b and 40 CFR 60.59b(l)]

B.105. Reserved.

B.106. In the case of excess emissions resulting from malfunctions, each owner or operator shall notify the Department's Southeast District office and the Dade County's DERM office in accordance with Rule 62-4.130, F.A.C. A full written report on the malfunctions shall be submitted in a quarterly report, if requested by the Department or its agent.
Rule 62-210.700(6), F.A.C.]

B.107. Submit to the Department's Southeast District office and the Dade County's DERM office a written report of emissions in excess of emission limiting standards for each calendar quarter. The nature and cause of the excess emissions shall be explained. This report does not relieve the owner or operator of the legal liability for violations. All recorded data shall be maintained on file by the Source for a period of **five** years.
[Rule 62-213.440, F.A.C.]

B.108. The owner or operator shall submit excess emission reports to the Department's Southeast District office and the Dade County's DERM office for any calendar quarter during which there are excess emissions from the facility. If there are no excess emissions during the calendar quarter, the owner or operator shall submit a report quarterly stating that no excess emissions occurred during the quarterly reporting period. The report shall include the following:
(a) The magnitude of excess emissions computed in accordance with 40 CFR 60.13(h), any conversion factors used, and the date and time of commencement and completion of each period of excess emissions [40 CFR 60.7(c)(1)].
(b) Specific identification of each period of excess emissions that occurs during startups, shutdowns, and malfunctions of the furnace boiler system. The nature and cause of any malfunction (if known) and the corrective action taken or preventive measured adopted [40 CFR 60.7(c)(2)].
(c) The date and time identifying each period during which the continuous monitoring system was inoperative except for zero and span checks, and the nature of the system repairs of adjustments [40 CFR 60.7(c)(2)].
(d) When no excess emissions have occurred or the continuous monitoring system has not been inoperative, repaired, or adjusted, such information shall be stated in the report [40 CFR 60.7(c)(4)].
(e) The owner or operator shall maintain a file of all measurements, including continuous monitoring systems performance evaluations; monitoring systems or monitoring device calibration; checks; adjustments and maintenance performed on these systems or devices; and all other information required by this permit recorded in a permanent form suitable for inspection [40 CFR 60.7(d)].
[PSD-FL-006(A)]

B.109. Test Reports.
(a) The owner or operator of an emissions unit for which a compliance test is required shall file a report with the Department's Southeast District office and the Dade County's DERM office on the results of each such test.
(b) The required test report shall be filed with the Department's Southeast District office and the Dade County's DERM office as soon as practical but no later than 45 days after the last sampling run of each test is completed.
(c) The test report shall provide sufficient detail on the emissions unit tested and the test procedures used to allow the Department's Southeast District office and the Dade County's DERM office to determine if the test was properly conducted and the test results properly computed. As a minimum, the test report, other than for an EPA or DEP Method 9 test, shall provide the following information:

1. The type, location, and designation of the emissions unit tested.
2. The facility at which the emissions unit is located.
3. The owner or operator of the emissions unit.
4. The normal type and amount of fuels used and materials processed, and the types and amounts of fuels used and material processed during each test run.
5. The means, raw data and computations used to determine the amount of fuels used and materials processed, if necessary to determine compliance with an applicable emission limiting standard.
6. The type of air pollution control devices installed on the emissions unit, their general condition, their normal operating parameters (pressure drops, total operating current and GPM scrubber water), and their operating parameters during each test run.
7. A sketch of the duct within 8 stack diameters upstream and 2 stack diameters downstream of the sampling ports, including the distance to any upstream and downstream bends or other flow disturbances.
8. The date, starting time and duration of each sampling run.

9. The test procedures used, including any alternative procedures authorized pursuant to Rule 62-297.620, F.A.C. Where optional procedures are authorized in this chapter, indicate which option was used.
10. The number of points sampled and configuration and location of the sampling plane.
11. For each sampling point for each run, the dry gas meter reading, velocity head, pressure drop across the stack, temperatures, average meter temperatures and sample time per point.
12. The type, manufacturer and configuration of the sampling equipment used.
13. Data related to the required calibration of the test equipment.
14. Data on the identification, processing and weights of all filters used.
15. Data on the types and amounts of any chemical solutions used.
16. Data on the amount of pollutant collected from each sampling probe, the filters, and the impingers, are reported separately for the compliance test.
17. The names of individuals who furnished the process variable data, conducted the test, analyzed the samples and prepared the report.
18. All measured and calculated data required to be determined by each applicable test procedure for each run.
19. The detailed calculations for one run that relate the collected data to the calculated emission rate.
20. The applicable emission standard, and the resulting maximum allowable emission rate for the emissions unit, plus the test result in the same form and unit of measure.
21. A certification that, to the knowledge of the owner or his authorized agent, all data submitted are true and correct. When a compliance test is conducted for the Department's Southeast District or its agent, the person who conducts the test shall provide the certification with respect to the test procedures used. The owner or his authorized agent shall certify that all data required and provided to the person conducting the test are true and correct to his knowledge.

[Rule 62-297.310(8), F.A.C.]

B.110. Monthly records shall be maintained of the amount of propane and natural gas used by the auxiliary burners of each emissions unit and the equivalent heat input from the propane and natural gas (calculated using the heat value for the propane and natural gases provided by the gas supplier).
[Rule 62-213.440, F.A.C.; and, PSD-FL-006(D)]

B.111~~112~~111. Charging Rate Monitoring. The average daily RDF charging rate shall be determined on a monthly basis and recorded for each combustor unit. The daily charging rate shall be determined each month on an average daily basis for each combustor unit using the facility's truck scale weight data, refuse pit inventory data and RDF operating data for the preceding calendar month. Monthly truck scale weight records of the weight of solid waste received and processed at the facility, and refuse pit inventory data, shall be used to determine the amount of RDF charged during the preceding calendar month on an average daily basis. The RDF load level measurements or other operating data shall be used to determined the number of operating hours per combustor unit for each day during the preceding calendar month.
[Rule 62-213.440, F.A.C.; PSD-FL-006(D); and, 40 CFR 60.53(a)]

B.112. Segregated Solid Waste Recordkeeping. The following records shall be made and kept to demonstrate compliance with the segregated non-MSW percentage limitations of specific condition **B.12.**: (1) Each segregated load of non-MSW materials, that is subject to the percentage weight limitations of specific condition **B.12.**, which is received for processing shall be documented as to waste description and weight. The weight of all waste materials received for processing shall be measured using the facility truck scale and recorded.

(2) Each day the total weight of segregated tires received shall be computed, and the daily total shall be added to the sum of the daily totals from the ~~previous 29 days~~current calendar month. At the end of each calendar month the ~~The~~ resultant ~~30 day~~ monthly total weight of ~~tires shall be divided by the total weight~~ of tires shall be divided by the total weight of all waste materials received in the same calendar month, and the resulting ~~all waste materials received in the same 30 day period, and the resultant~~ number shall be multiplied by 100 to express the ratio in percentage terms. The percentage computed shall be compared to the 3% limitation.
(3) Each day the total weight of segregated non-MSW materials received that are subject to the 5% restriction shall be computed, and the daily total shall be added to the sum of the daily totals from the previous ~~29 days~~days in the current calendar month. At the end of each calendar month, the resultant monthly ~~The resultant 30 day~~ total weight of segregated non-MSW materials shall be divided by the total weight of all waste materials received in the same ~~30 day period~~calendar month, and the ~~resultant~~ resulting number shall be multiplied by 100 to express the ratio in percentage terms. The percentage computed shall be compared to the 5% limitation.
[Rule 62-213.440, F.A.C.; and, PSD-FL-006(D)]

B.113. The owner or operator shall maintain a central file containing all measurements, records, and other data that are required to be collected pursuant to the various specific conditions of this permit. This file shall include but not be limited to:
1) the data collected from in-stack monitoring instruments;
2) the records on RDF input rates per emissions unit;
3) the amount of propane gas burned per emissions unit;
4) the results of all source tests or performance tests;
5) the amount of activated carbon or other reactant chemicals used for mercury control;
6) calibration logs for all instruments;
7) maintenance/repair logs for any work performed on equipment or instrument which is subject to this permit; and,
8) fuel analyses data.

All measurements, records, and other data required to be maintained by owner or operator shall be retained for at least **five** (5) years following the date on which such measurements, records, or data are recorded. These data shall be made available to the Department upon request. The Department's Southeast District office and the Dade County's DERM office shall be notified in writing at least 15 days prior to the testing of any instrument required to be operated by these conditions of certification in order to allow witnessing by authorized personnel.
[PSD-FL-006(A) & (D); and, Rule 62-213.440, F.A.C.]

B.114. Reports.
a) A copy of the results of any formal emission shall be submitted within forty-five days of the last sampling run to the Department's Southeast District office and the Dade County's DERM office. Reports shall be in a format consistent with and shall include the information in accordance with Rule 62-297.570, F.A.C.
b) Emissions monitoring shall be reported to the Department's Southeast District office and the Dade County's DERM office on a quarterly basis in accordance with Chapter 62-297, F.A.C., and 40 CFR Part 60.7, as appropriate.
c) Notice of anticipated and actual start-up dates of control devices under this permit shall be submitted to Department's Southeast District office and the Dade County's DERM office.
[PSD-FL-006(A) & (D)]

Miscellaneous Requirements.

B.115. Activated Carbon Injection. The owner or operator of an affected facility where activated carbon injection is used to comply with the mercury emission limit (see specific condition **B.27.~~B.27.B.27.~~**), or the dioxin/furan emission limits (see specific condition **B.34.~~B.34.B.34.~~**), or the dioxin/furan emission level specified in 40 CFR 60.58b(g)(5)(iii), shall follow the procedures specified in paragraphs (1) through (3).

(1) During the performance tests for dioxins/furans and mercury, as applicable, the owner or operator shall estimate an average carbon mass feed rate based on carbon injection system operating parameters such as the screw feeder speed, hopper volume, hopper refill frequency, or other parameters appropriate to the feed system being employed, as specified in paragraphs (i) and(ii).

(i) An average carbon mass feed rate in kilograms per hour or pounds per hour shall be estimated during the initial performance test for mercury emissions and each subsequent performance test for mercury emissions.

(ii) An average carbon mass feed rate in kilograms per hour or pounds per hour shall be estimated during the initial performance test for dioxin/furan emissions and each subsequent performance test for dioxin/furan emissions.

(2) During operation of the affected facility, the carbon injection system operating parameter(s) that are the primary indicator(s) of the carbon mass feed rate (e.g., screw feeder setting) must equal or exceed the level(s) documented during the performance tests specified under paragraphs (1)(i) and (1)(ii).

(3) The owner or operator of an affected facility shall estimate the total carbon usage of the plant (kilograms or pounds) for each calendar quarter by two independent methods, according to the procedures in paragraphs (i) and (ii).

(i) The weight of carbon delivered to the plant.

(ii) Estimate the average carbon mass feed rate in kilograms per hour or pounds per hour for each hour of operation for each affected facility based on the parameters specified under paragraph (1), and sum the results for all affected facilities at the plant for the total number of hours of operation during the calendar quarter.

[40 CFR 60.38b and 40 CFR 60.58b(m); and, PSD-FL-006(D)]

B.116. Acid Rain Part Application. For any unit which was a solid waste incinerator, burning less than 20 percent fossil fuel as described in 40 CFR 72.6(b)(7), adopted and incorporated by reference at Rule 62-204.800, F.A.C., the designated representative of the source containing the unit shall submit a complete Acid Rain Part application governing such unit to the Department before the later of January 1, 1998, or March 1 of the year following the three calendar year period in which the incinerator consumed 20 percent or more fossil fuel on a British thermal unit (BTU) basis.
[Rule 62-214.320(1)(h), F.A.C.]

B.117. Baghouse Operations: Air-to-Cloth Ratio. The baghouses shall have a minimum air-to-cloth ratio of 4:1.
[PSD-FL-006(A) & (D)]

~~**B.118.** The Department's Southeast District office and the Dade County's DERM office shall be given notice of any training sessions related to operation and maintenance of any air pollution control devices. [PSD-FL-006(D)]~~

~~**B.119.** Within 90 days prior to start-up of the modified facility, the permittee shall submit to the Department's Southeast District office and the Dade County's DERM office an operational procedures manual that identifies and prescribes best operational practices that will be used during startup, shutdown, and malfunctions of this facility.~~
~~[PSD-FL-006(D)]~~

~~**B.120.** The permittee shall submit to the Department's Bureau of Air Regulation, within thirty (30) days after it becomes available, copies of technical data pertaining to the selected emissions control systems. The technical data should include, but not be limited to, guaranteed efficiencies and emission rates, and major design parameters.~~
~~[PSD-FL-006(D)]~~

B.121. The permittee is authorized to install and operate permanently mounted gas burners, selective noncatalytic reduction (SNCR) systems, and other controls to achieve the nitrogen oxides and carbon monoxide emissions limits.
[PSD-FL-006(D)]

Subsection C. This section addresses the following emissions units.

E.U. ID No.	Brief Description
-rrr	MSW to RDF Processing Facility: 3,000 TPD; 18,000 tons/wk; and, 936,000 TPY
-sss	Bulky Waste to Biomass Processing Facility: 400,000 TPY

Emissions Unit **-rrr** is a processing activity of receiving, handling and converting of MSW into RDF and saleable extractables, such as metals and glass. The facility is designed to process 3,000 tons/day, 18,000 tons/wk, and 936,000 tons/yr of ~~municipal solid waste (MSW; trash and garbage) into~~ RDF ~~and saleable extractables, such as metals.~~

Emissions Unit **-sss** is an existing bulky waste processing system that will be modified into a biomass fuel preparation system and is designed to process up to 400,000 tons/yr of the bulky waste into biomass, which will be transported off-site for use in biomass-fired cogeneration units or combusted on-site.

{Permitting note(s): Emissions units **-rrr** and **-sss** are each minor emissions units regulated under Rule 62-210.300, F.A.C., Permits Required; Rule 62-212.400, Prevention of Significant Deterioration [PSD; and, PSD-FL-006(A), (B) & (D)]}

The following specific conditions apply to the emissions unit(s) listed above:

{Permitting note: Unless revised, the following specific conditions contained in this subsection shall apply until the installation of new air pollution control systems and compliance testing is completed, which must have been completed by December 19, 2000.}

General

Essential Potential to Emit (PTE) Parameters

C.1. Hours of Operation. Each emissions unit may operate continuously, i.e., 8,760 hrs/yr.
[Rules 62-213.440, 62-210.200(PTE), and 62-296.700(4)(a)7., F.A.C.; and, PSD-FL-006(D)]

Emission Limitations and Standards

C.2. Particulate Matter Emissions.
(1) Bulky Waste to Biomass Processing Facility. Particulate matter emissions from any baghouse shall not exceed 0.01 gr/dscf.
[PSD-FL-006(A) & (D)]

C.3. Visible Emissions.
a. MSW to RDF Processing Facility. Visible emissions from each baghouse exhaust shall not exceed 10 percent opacity, six-minute average.
b. Bulky Waste to Biomass Processing Facility. Visible emissions from each baghouse exhaust shall not exceed 5 percent opacity, since each emissions unit's potential particulate matter emissions are less than 100 TPY and is equipped with a baghouse control system. As long as the visible emissions do not exceed 5 percent opacity, compliance is assumed for the particulate matter limitations established in specific condition C.2.~~C.2.C.2.~~ above.

If the Department's Southeast District office and the Dade County's DERM office has reason to believe that the particulate matter weight emissions standard in C.2.~~C.2.C.2.~~ is not being met, it shall require that compliance be demonstrated by the test method specified in specific condition C.9.~~C.9.C.9.~~ [PSD-FL-006(A) & (D); and, Rule 62-297.620(4), F.A.C.]

Excess Emissions

C.4. Excess emissions resulting from startup, shutdown or malfunction shall be permitted provided that best operational practices to minimize emissions are adhered to and the duration of excess emissions shall be minimized but in no case exceed two hours in any 24 hour period unless specifically authorized by the Department for longer duration.
[Rule 62-210.700(1), F.A.C.]

C.5. Excess emissions which are caused entirely or in part by poor maintenance, poor operation, or any other equipment or process failure which may reasonably be prevented during startup, shutdown or malfunction shall be prohibited.
[Rule 62-210.700(4), F.A.C.]

Monitoring of Operations

C.6. Determination of Process Variables.
(a) Required Equipment. The owner or operator of an emissions unit for which compliance tests are required shall install, operate, and maintain equipment or instruments necessary to determine process variables, such as process weight input or heat input, when such data are needed in conjunction with emissions data to determine the compliance of the emissions unit with applicable emission limiting standards.
(b) Accuracy of Equipment. Equipment or instruments used to directly or indirectly determine process variables, including devices such as belt scales, weight hoppers, flow meters, and tank scales, shall be calibrated and adjusted to indicate the true value of the parameter being measured with sufficient accuracy to allow the applicable process variable to be determined within 10% of its true value.
[Rule 62-297.310(5), F.A.C.]

Test Methods and Procedures

C.7. Annual Tests Required. Annual visible emissions compliance tests shall be performed for each emissions unit.
[Rule 62-297.310(7), F.A.C.]

C.8. Visible Emissions. The test method for visible emissions for all emissions units shall be EPA Method 9, in accordance with Rule 62-297.401, F.A.C., and 40 CFR 60, Appendix A.
[Rule 62-297.401, F.A.C.; and, PSD-FL-006(A), (B) & (D)]

C.9. Particulate Matter Emissions. The test method for particulate matter emissions for all units shall be EPA Method 5, in accordance with Rule 62-297.401, F.A.C., and 40 CFR 60, Appendix A.
[Rule 62-297.401, F.A.C.; and, PSD-FL-006(A), (B) & (D)]

C.10. Required Number of Test Runs. For mass emission limitations, a compliance test shall consist of three complete and separate determinations of the total air pollutant emission rate through the test section of the stack or duct and three complete and separate determinations of any applicable process variables

corresponding to the three distinct time periods during which the stack emission rate was measured provided, however, that three complete and separate determinations shall not be required if the process variables are not subject to variation during a compliance test, or if three determinations are not necessary in order to calculate the unit's emission rate. The three required test runs shall be completed within one consecutive five day period. In the event that a sample is lost or one of the three runs must be discontinued because of circumstances beyond the control of the owner or operator, and a valid third run cannot be obtained within the five day period allowed for the test, the Secretary or his or her designee may accept the results of the two complete runs as proof of compliance, provided that the arithmetic mean of the results of the two complete runs is at least 20 percent below the allowable emission limiting standards.
[Rule 62-297.310(1), F.A.C.]

C.11. Operating Rate During Testing. Testing of emissions shall be conducted with each emissions unit operation at permitted capacity, which is defined as 90 to 100 percent of the maximum operation rate allowed by the permit. If it is impracticable to test at permitted capacity, an emissions unit may be tested at less than the minimum permitted capacity; in this case, subsequent emissions unit operation is limited to 110 percent of the test load until a new test is conducted. Once the emissions unit is so limited, operation at higher capacities is allowed for no more than 15 consecutive days for the purpose of additional compliance testing to regain the authority to operate at the permitted capacity.
[Rules 62-297.310(2) & (2)(b), F.A.C.]

C.12. Calculation of Emission Rate. The indicated emission rate or concentration shall be the arithmetic average of the emission rate or concentration determined by each of the separate test runs unless otherwise specified in a particular test method or applicable rule.
[Rule 62-297.310(3), F.A.C.]

C.13. Applicable Test Procedures.
(a) Required Sampling Time.
1. Unless otherwise specified in the applicable rule, the required sampling time for each test run shall be no less than one hour and no greater than four hours, and the sampling time at each sampling point shall be of equal intervals of at least two minutes.
2. Opacity Compliance Tests. When either EPA Method 9 or DEP Method 9 is specified as the applicable opacity test method, the required minimum period of observation for a compliance test shall be sixty (60) minutes for emissions units which emit or have the potential to emit 100 tons per year or more of particulate matter, and thirty (30) minutes for emissions units which have potential emissions less than 100 tons per year of particulate matter and are not subject to a multiple-valued opacity standard. The opacity test observation period shall include the period during which the highest opacity emissions can reasonably be expected to occur. Exceptions to these requirements are as follows:
a. For batch, cyclical processes, or other operations which are normally completed within less than the minimum observation period and do not recur within that time, the period of observation shall be equal to the duration of the batch cycle or operation completion time.
b. The observation period for special opacity tests that are conducted to provide data to establish a surrogate standard pursuant to Rule 62-297.310(5)(k), F.A.C., Waiver of Compliance Test Requirements, shall be established as necessary to properly establish the relationship between a proposed surrogate standard and an existing mass emission limiting standard.
c. The minimum observation period for opacity tests conducted by employees or agents of the Department to verify the day-to-day continuing compliance of a unit or activity with an applicable opacity standard shall be twelve minutes.

(b) Minimum Sample Volume. Unless otherwise specified in the applicable rule, the minimum sample volume per run shall be 25 dry standard cubic feet.
(c) Required Flow Rate Range. For EPA Method 5 particulate sampling, acid mist/sulfur dioxide, and fluoride sampling which uses Greenburg Smith type impingers, the sampling nozzle and sampling time shall be selected such that the average sampling rate will be between 0.5 and 1.0 actual cubic feet per minute, and the required minimum sampling volume will be obtained.
(d) Calibration of Sampling Equipment. Calibration of the sampling train equipment shall be conducted in accordance with the schedule shown in Table 297.310-1, attached to this permit.
(e) Allowed Modification to EPA Method 5. When EPA Method 5 is required, the following modification is allowed: the heated filter may be separated from the impingers by a flexible tube.
[Rule 62-297.310(4), F.A.C.]

C.14. Required Stack Sampling Facilities. When a mass emissions stack test is required, the permittee shall comply with the requirements contained in Appendix SS-1, Stack Sampling Facilities, attached to this permit.
[Rule 62-297.310(6), F.A.C.]

C.15. Frequency of Compliance Tests. The following provisions apply only to those emissions units that are subject to an emissions limiting standard for which compliance testing is required.
(a) General Compliance Testing.
3. The owner or operator of an emissions unit that is subject to any emission limiting standard shall conduct a compliance test that demonstrates compliance with the applicable emission limiting standard prior to obtaining a renewed operation permit. Emissions units that are required to conduct an annual compliance test may submit the most recent annual compliance test to satisfy the requirements of this provision. In renewing an air operation permit pursuant to Rule 62-210.300(2)(a)3.b., c., or d., F.A.C., the Department shall not require submission of emission compliance test results for any emissions unit that, during the year prior to renewal:
a. Did not operate; or
b. In the case of a fuel burning emissions unit, burned liquid and/or solid fuel for a total of no more than 400 hours.
4. During each federal fiscal year (October 1 - September 30), unless otherwise specified by rule, order, or permit, the owner or operator of each emissions unit shall have a formal compliance test conducted for:
a. Visible emissions, if there is an applicable standard;
b. Each of the following pollutants, if there is an applicable standard, and if the emissions unit emits or has the potential to emit: 5 tons per year or more of lead or lead compounds measured as elemental lead; 30 tons per year or more of acrylonitrile; or 100 tons per year or more of any other regulated air pollutant; and
c. Each NESHAP pollutant, if there is an applicable emission standard.
9. The owner or operator shall notify the Department's Southeast District office and the Dade County's DERM office at least 15 days prior to the date on which each formal compliance test is to begin, of the date, time, and place of each such test, and the test contact person who will be responsible for coordinating and having such test conducted for the owner or operator.
(b) Special Compliance Tests. When the Department's Southeast District office or the Dade County's DERM office, after investigation, has good reason (such as complaints, increased visible emissions or questionable maintenance of control equipment) to believe that any applicable emission standard contained in a Department rule or in a permit issued pursuant to those rules is being violated, it shall require the owner or operator of the emissions unit to conduct compliance tests which identify the nature

and quantity of pollutant emissions from the emissions unit and to provide a report on the results of said tests to the Department's Southeast District office and the Dade County's DERM office.
(c) Waiver of Compliance Test Requirements. If the owner or operator of an emissions unit that is subject to a compliance test requirement demonstrates to the Department, pursuant to the procedure established in Rule 62-297.620, F.A.C., that the compliance of the emissions unit with an applicable weight emission limiting standard can be adequately determined by means other than the designated test procedure, such as specifying a surrogate standard of no visible emissions for particulate matter sources equipped with a bag house or specifying a fuel analysis for sulfur dioxide emissions, the Department shall waive the compliance test requirements for such emissions units and order that the alternate means of determining compliance be used, provided, however, the provisions of Rule 62-297.310(7)(b), F.A.C., shall apply.
[Rule 62-297.310(7), F.A.C.; PSD-FL-006(D); and, SIP approved]

Recordkeeping and Reporting

C.16. In the case of excess emissions resulting from malfunctions, each owner or operator shall notify the Department's Southeast District office and then Dade County's DERM office in accordance with Rule 62-4.130, F.A.C. A full written report on the malfunctions shall be submitted in a quarterly report, if requested by the Department or its agent.
[Rule 62-210.700(6), F.A.C.]

C.17. Test Reports.
(a) The owner or operator of an emissions unit for which a compliance test is required shall file a report with the Department's Southeast District office and the Dade County's DERM office on the results of each such test.
(b) The required test report shall be filed with the Department's Southeast District office and the Dade County's DERM office as soon as practical but no later than 45 days after the last sampling run of each test is completed.
(c) The test report shall provide sufficient detail on the emissions unit tested and the test procedures used to allow the Department's Southeast District office and the Dade County's DERM office to determine if the test was properly conducted and the test results properly computed. As a minimum, the test report, other than for an EPA or DEP Method 9 test, shall provide the following information:

1. The type, location, and designation of the emissions unit tested.
2. The facility at which the emissions unit is located.
3. The owner or operator of the emissions unit.
4. The normal type and amount of fuels used and materials processed, and the types and amounts of fuels used and material processed during each test run.
5. The means, raw data and computations used to determine the amount of fuels used and materials processed, if necessary to determine compliance with an applicable emission limiting standard.
6. The type of air pollution control devices installed on the emissions unit, their general condition, their normal operating parameters (pressure drops, total operating current and GPM scrubber water), and their operating parameters during each test run.
7. A sketch of the duct within 8 stack diameters upstream and 2 stack diameters downstream of the sampling ports, including the distance to any upstream and downstream bends or other flow disturbances.
8. The date, starting time and duration of each sampling run.
9. The test procedures used, including any alternative procedures authorized pursuant to Rule 62-297.620, F.A.C. Where optional procedures are authorized in this chapter, indicate which option was used.

10. The number of points sampled and configuration and location of the sampling plane.
11. For each sampling point for each run, the dry gas meter reading, velocity head, pressure drop across the stack, temperatures, average meter temperatures and sample time per point.
12. The type, manufacturer and configuration of the sampling equipment used.
13. Data related to the required calibration of the test equipment.
14. Data on the identification, processing and weights of all filters used.
15. Data on the types and amounts of any chemical solutions used.
16. Data on the amount of pollutant collected from each sampling probe, the filters, and the impingers, are reported separately for the compliance test.
17. The names of individuals who furnished the process variable data, conducted the test, analyzed the samples and prepared the report.
18. All measured and calculated data required to be determined by each applicable test procedure for each run.
19. The detailed calculations for one run that relate the collected data to the calculated emission rate.
20. The applicable emission standard, and the resulting maximum allowable emission rate for the emissions unit, plus the test result in the same form and unit of measure.
21. A certification that, to the knowledge of the owner or his authorized agent, all data submitted are true and correct. When a compliance test is conducted for the Department's Southeast District or its agent, the person who conducts the test shall provide the certification with respect to the test procedures used. The owner or his authorized agent shall certify that all data required and provided to the person conducting the test are true and correct to his knowledge.

[Rules 62-213.440 and 62-297.310(8), F.A.C.]

Subsection D. This section addresses the following emissions unit.

E.U. ID No.	Brief Description
-ttt	Ash Building and Handling System Ash Storage Silo with Baghouse ~~Ash Conditioning Agent Storage Silo with Baghouse~~

Fly ash collected by the existing ESPs (future: fabric filters) is conveyed to the fly ash handling building. The ash handling system is completely enclosed to decrease the potential for fugitive emissions. The ash is quenched and wetted before being temporarily stored in the ash handling facility and loaded onto a truck. A baghouse is located on the ash handling building as an added precaution for fugitive emissions. The baghouse keeps the building under negative pressure.

{Permitting note(s). This emissions unit is regulated under NSPS - 40 CFR 60, Subpart Cb, Emissions Guidelines and Compliance Times for Large Municipal Waste Combustors That Are Constructed on or Before September 20, 1994, adopted and incorporated by reference, subject to provisions, in Rule 62-204.800(8)(b), F.A.C.; and, Rule 62-212.400(5), F.A.C., Prevention of Significant Deterioration [PSD; PSD-FL-006, -006(A), (B) & (D)]. Note: This project is subject to the requirements of 40 CFR 60, Subpart Cb. This permit may refer to the requirements of 40 CFR 60, Subpart Eb, where these requirements are referenced by 40 CFR 60, Subpart Cb. The fugitive particulate matter control requirements for the ash handling activities are specified in 40 CFR 60.55b.}

The following specific Conditions apply to the emissions unit(s) listed above:

{Permitting note: Unless revised, the following specific conditions contained in this subsection shall apply until the installation of new air pollution control systems and compliance testing is completed, which must have been completed by December 19, 2000.}

General

D.1. Definitions. For the purposes of Rule 62-204.800(8), F.A.C., the definitions contained in the various provisions of 40 CFR Part 60, adopted herein shall apply except that the term "Administrator" when used in 40 CFR Part 60, shall mean the Secretary or the Secretary's designee.
[Rule 62-204.800(8)(a)2., F.A.C.; and, 40 CFR 60.2]

Essential Potential to Emit (PTE) Parameters

D.2. Hours of Operation. This emissions unit is allowed to operate continuously, i.e., 8,760 hours/year.
[Rule 62-210.200(PTE), F.A.C.; and, PSD-FL-006(D)]

Emission Limitations and Standards

D.3. PM and VE: Ash Silo and Ash Conditioning Agent Silo Baghouses.
(a) PM emissions from the any ash silo or ash conditioning agent silo baghouse shall not exceed 0.01 gr/dscf; or,
(b) Visible emissions shall not exceed 5 percent opacity, since each emissions unit's potential particulate matter emissions are less than 100 TPY and is equipped with a baghouse control system. As long as the visible emissions do not exceed 5 percent opacity, compliance is assumed for the particulate matter limitations established in paragraph (a) above.

If the Department's Southeast District office or the Dade County's DERM office has reason to believe that the particulate matter weight emissions standard in paragraph (a) above is not being met, it shall require that compliance be demonstrated by the test method specified in specific condition D.11.~~D.11.D.11.~~
(c) Compliance testing of the ash silos (baghouse) shall be conducted within 90 days of completion of construction and initial operation; and, annually thereafter.
[PSD-FL-006(A) & (D); and, Rule 62-297.620(4), F.A.C.]

D.4. Fugitive Ash Emissions. (a) On and after the date on which the initial performance test is completed or is required to be completed under 40 CFR 60.8 of Subpart A (see specific condition D.10.~~D.10.D.10.~~), no owner or operator of an affected facility shall cause to be discharged to the atmosphere visible emissions of combustion ash from an ash conveying system (including conveyor transfer points) in excess of 5 percent of the observation period (i.e., 9 minutes per 3-hour period), as determined by EPA Reference Method 22 observations as specified in 40 CFR 60.58b(k), except as provided in paragraphs (b) and (c). See specific condition D.7.~~D.7.D.7.~~
(b) The emission limit specified in paragraph (a) does not cover visible emissions discharged inside buildings or enclosures of ash conveying systems; however, the emission limit specified in paragraph (a) does cover visible emissions discharged to the atmosphere from buildings or enclosures of ash conveying systems.
(c) The provisions of paragraph (a) do not apply during maintenance and repair of ash conveying systems.
[40 CFR 60.36b and 40 CFR 60.55b; and, PSD-FL-006(D)]

D.5. The potential for dust generation by ash handling activities will be mitigated by quenching the ash prior to loading in ash transport trucks. The ash handling facilities shall be enclosed. Unprocessed refuse storage areas which must be open for operational purposes (e.g., tipping floor of the refuse bunker while trucks are entering and leaving) will be under negative air pressure. Residue from the grates, grate siftings, and ash from the combustor/boiler and fabric filter hoppers during normal operations shall be discharged into the ash quenching system, or otherwise handled in a manner to minimize visible dust. The ash/residue in the ash handling building shall remain sufficiently moist to prevent dust during storage and handling operations.
[PSD-FL-006(A) & (D); and, Rule 62-4.070(3), F.A.C.]

Excess Emissions

{Permitting note: The Excess Emissions Rule at Rule 62-210.700, F.A.C., cannot vary any requirement of a NSPS, NESHAP, or Acid Rain program provision.}

D.6. At all times, including periods of startup, shutdown, and malfunction, owners and operators shall, to the extent practicable, maintain and operate any affected facility including associated air pollution control equipment in a manner consistent with good air pollution control practice for minimizing emissions. Determination of whether acceptable operating and maintenance procedures are being used will be based on information available to the Administrator which may include, but is not limited to, monitoring results, opacity observations, review of operating and maintenance procedures, and inspection of the source.
[40 CFR 60.11(d)]

D.7. Excess emissions from these emissions units resulting from startup, shutdown or malfunction shall be permitted provided that best operational practices to minimize emissions are adhered to and the

duration of excess emissions shall be minimized but in no case exceed two hours in any 24 hour period unless specifically authorized by the Department for longer duration.
[Rule 62-210.700(1), F.A.C.]

D.8. Excess emissions which are caused entirely or in part by poor maintenance, poor operation, or any other equipment or process failure which may reasonably be prevented during startup, shutdown or malfunction shall be prohibited.
[Rule 62-210.700(4), F.A.C.]

Test Methods and Procedures

D.9. The procedures specified in paragraphs (1) through (4) shall be used for determining compliance with the fugitive ash emission limit under 40 CFR 60.55b. (See specific conditions D.3.~~D.3.D.3.~~ and D.4.~~D.4.D.4.~~)
(1) The EPA Reference Method 22 shall be used for determining compliance with the fugitive ash emission limit under 40 CFR 60.55b. The minimum observation time shall be a series of three 1-hour observations. The observation period shall include times when the facility is transferring ash from the municipal waste combustor unit to the area where ash is stored or loaded into containers or trucks.
(2) The average duration of visible emissions per hour shall be calculated from the three 1-hour observations. The average shall be used to determine compliance with 40 CFR 60.55b.
(3) The owner or operator of an affected facility shall conduct an initial performance test for fugitive ash emissions as required under 40 CFR 60.8.
(4) Following the date that the initial performance test for fugitive ash emissions is completed or is required to be completed under 40 CFR 60.8 for an affected facility, the owner or operator shall conduct a performance test for fugitive ash emissions on an annual basis (no more than 12 calendar months following the previous performance test).
[40 CFR 60.38b and 40 CFR 60.58b(k)]

D.10. Performance tests shall be conducted under such conditions as the Administrator shall specify to the plant operator based on representative performance of the affected facility. The owner or operator shall make available to the Administrator such records as may be necessary to determine the conditions of the performance tests. Operations during periods of startup, shutdown, and malfunction shall not constitute representative conditions for the purpose of a performance test nor shall emissions in excess of the level of the applicable emission limit during periods of startup, shutdown, and malfunction be considered a violation of the applicable emission limit unless otherwise specified in the applicable standard.
[40 CFR 60.8(c)]

D.11. Particulate Matter. The test methods for particulate emissions shall be EPA Method 5 incorporated by reference in Chapter 62-297, F.A.C., and 40 CFR 60, Appendix A.
[Rules 62-213.440 and 62-297.401, F.A.C.]

D.12. Visible Emissions. EPA Method 9 shall be used to determine opacity compliance pursuant to Chapter 62-297, F.A.C., and 40 CFR 60, Appendix A.
[Rule 62-297.401, F.A.C.]

D.13. Operating Rate During Testing. Testing of emissions shall be conducted with the emissions unit operation at permitted capacity, which is defined as 90 to 100 percent of the maximum operation rate allowed by the permit. If it is impracticable to test at permitted capacity, an emissions unit may be tested

at less than the minimum permitted capacity; in this case, subsequent emissions unit operation is limited to 110 percent of the test load until a new test is conducted. Once the emissions unit is so limited, operation at higher capacities is allowed for no more than 15 consecutive days for the purpose of additional compliance testing to regain the authority to operate at the permitted capacity.
[Rules 62-297.310(2) & (2)(b), F.A.C.]

D.14. Applicable Test Procedures.
(a) Required Sampling Time.
1. Unless otherwise specified in the applicable rule, the required sampling time for each test run shall be no less than one hour and no greater than four hours, and the sampling time at each sampling point shall be of equal intervals of at least two minutes.
2. Opacity Compliance Tests. When either EPA Method 9 or DEP Method 9 is specified as the applicable opacity test method, the required minimum period of observation for a compliance test shall be sixty (60) minutes for emissions units which emit or have the potential to emit 100 tons per year or more of particulate matter, and thirty (30) minutes for emissions units which have potential emissions less than 100 tons per year of particulate matter and are not subject to a multiple-valued opacity standard. The opacity test observation period shall include the period during which the highest opacity emissions can reasonably be expected to occur. Exceptions to these requirements are as follows:
a. For batch, cyclical processes, or other operations which are normally completed within less than the minimum observation period and do not recur within that time, the period of observation shall be equal to the duration of the batch cycle or operation completion time.
b. The observation period for special opacity tests that are conducted to provide data to establish a surrogate standard pursuant to Rule 62-297.310(5)(k), F.A.C., Waiver of Compliance Test Requirements, shall be established as necessary to properly establish the relationship between a proposed surrogate standard and an existing mass emission limiting standard.
c. The minimum observation period for opacity tests conducted by employees or agents of the Department to verify the day-to-day continuing compliance of a unit or activity with an applicable opacity standard shall be twelve minutes.
[Rule 62-297.310(4), F.A.C.]

D.15. Frequency of Compliance Tests. The following provisions apply only to those emissions units that are subject to an emissions limiting standard for which compliance testing is required.
(a) General Compliance Testing.
2. For excess emission limitations for particulate matter specified in Rule 62-210.700, F.A.C., a compliance test shall be conducted annually while the emissions unit is operating under soot blowing conditions in each federal fiscal year during which soot blowing is part of normal emissions unit operation, except that such test shall not be required in any federal fiscal year in which a fossil fuel steam generator does not burn liquid and/or solid fuel for more than 400 hours other than during startup.
3. The owner or operator of an emissions unit that is subject to any emission limiting standard shall conduct a compliance test that demonstrates compliance with the applicable emission limiting standard prior to obtaining a renewed operation permit. Emissions units that are required to conduct an annual compliance test may submit the most recent annual compliance test to satisfy the requirements of this provision. In renewing an air operation permit pursuant to Rule 62-210.300(2)(a)3.b., c., or d., F.A.C., the Department shall not require submission of emission compliance test results for any emissions unit that, during the year prior to renewal:
a Did not operate; or

4. During each federal fiscal year (October 1 - September 30), unless otherwise specified by rule, order, or permit, the owner or operator of each emissions unit shall have a formal compliance test conducted for:
   a. Visible emissions, if there is an applicable standard;
   b. Each of the following pollutants, if there is an applicable standard, and if the emissions unit emits or has the potential to emit: 5 tons per year or more of lead or lead compounds measured as elemental lead; 30 tons per year or more of acrylonitrile; or 100 tons per year or more of any other regulated air pollutant; and
   c. Each NESHAP pollutant, if there is an applicable emission standard.
9. The owner or operator shall notify the Department's Southeast District office and the Dade County's DERM office at least 15 days prior to the date on which each formal compliance test is to begin, of the date, time, and place of each such test, and the test contact person who will be responsible for coordinating and having such test conducted for the owner or operator.

(b) Special Compliance Tests. When the Department's Southeast District office or the Dade County's DERM office, after investigation, has good reason (such as complaints, increased visible emissions or questionable maintenance of control equipment) to believe that any applicable emission standard contained in a Department rule or in a permit issued pursuant to those rules is being violated, it may require the owner or operator of the emissions unit to conduct compliance tests which identify the nature and quantity of pollutant emissions from the emissions unit and to provide a report on the results of said tests to the Department's Southeast District office and the Dade County's DERM office.

(c) Waiver of Compliance Test Requirements. If the owner or operator of an emissions unit that is subject to a compliance test requirement demonstrates to the Department, pursuant to the procedure established in Rule 62-297.620, F.A.C., that the compliance of the emissions unit with an applicable weight emission limiting standard can be adequately determined by means other than the designated test procedure, such as specifying a surrogate standard of no visible emissions for particulate matter sources equipped with a bag house or specifying a fuel analysis for sulfur dioxide emissions, the Department shall waive the compliance test requirements for such emissions units and order that the alternate means of determining compliance be used, provided, however, the provisions of Rule 62-297.310(7)(b), F.A.C., shall apply.

[Rule 62-297.310(7), F.A.C.; PSD-FL-006(D); and, SIP approved]

D.16. Compliance with standards in 40 CFR 60, other than opacity standards, shall be determined only by performance tests established by 40 CFR 60.8, unless otherwise specified in the applicable standard. [40 CFR 60.11(a)]

Monitoring of Operations

D.17. Determination of Process Variables.

(a) Required Equipment. The owner or operator of an emissions unit for which compliance tests are required shall install, operate, and maintain equipment or instruments necessary to determine process variables, such as process weight input or heat input, when such data are needed in conjunction with emissions data to determine the compliance of the emissions unit with applicable emission limiting standards.

(b) Accuracy of Equipment. Equipment or instruments used to directly or indirectly determine process variables, including devices such as belt scales, weight hoppers, flow meters, and tank scales, shall be calibrated and adjusted to indicate the true value of the parameter being measured with sufficient accuracy to allow the applicable process variable to be determined within 10% of its true value. [Rule 62-297.310(5), F.A.C.]

Recordkeeping and Reporting Requirements

D.18. In the case of excess emissions resulting from malfunctions, each owner or operator shall notify the Department's Southeast District office in accordance with Rule 62-4.130, F.A.C. A full written report on the malfunctions shall be submitted in a quarterly report, if requested by the Department or its agent. [Rule 62-210.700(6), F.A.C.]

D.19. The owner or operator subject to the provisions of 40 CFR 60 shall furnish the Administrator written notification as follows:
(4) A notification of any physical or operational change to an existing facility which may increase the emission rate of any air pollutant to which a standard applies, unless that change is specifically exempted under an applicable subpart or in 40 CFR 60.14(e). This notice shall be postmarked 60 days or as soon as practicable before the change is commenced and shall include information describing the precise nature of the change, present and proposed emission control systems, productive capacity of the facility before and after the change, and the expected completion date of the change. The Administrator may request additional relevant information subsequent to this notice.
[40 CFR 60.7(a)(4)]

D.20. The owner or operator subject to the provisions of 40 CFR 60 shall maintain records of the occurrence and duration of any startup, shutdown, or malfunction in the operation of an affected facility; any malfunction of the air pollution control equipment; or, any periods during which a continuous monitoring system or monitoring device is inoperative.
[40 CFR 60.7(b)]

D.21. (1) Notwithstanding the frequency of reporting requirements specified in 40 CFR 60.7(c), an owner or operator who is required by an applicable subpart to submit excess emissions and monitoring systems performance reports (and summary reports) on a quarterly (or more frequent) basis may reduce the frequency of reporting for that standard to semiannual if the following conditions are met: (i) For 1 full year (e.g., 4 quarterly or 12 monthly reporting periods) the affected facility's excess emissions and monitoring systems reports submitted to comply with a standard under this part continually demonstrate that the facility is in compliance with the applicable standard;

(i) The owner or operator continues to comply with all recordkeeping and monitoring requirements specified in 40 CFR 60, Subpart A, and the applicable standard; and

(ii) The Administrator does not object to a reduced frequency of reporting for the affected facility, as provided in 40 CFR 60.7(e)(2).

(2) The frequency of reporting of excess emissions and monitoring systems performance (and summary) reports may be reduced only after the owner or operator notifies the Administrator in writing of his or her intention to make such a change and the Administrator does not object to the intended change. In deciding whether to approve a reduced frequency of reporting, the Administrator may review information concerning the source's entire previous performance history during the required recordkeeping period prior to the intended change, including performance test results, monitoring data, and evaluations of an owner or operator's conformance with operation and maintenance requirements. Such information may be used by the Administrator to make a judgment about the source's potential for noncompliance in the future. If the Administrator disapproves the owner or operator's request to reduce the frequency of reporting, the Administrator will notify the owner or operator in writing within 45 days after receiving notice of the owner or operator's intention. The notification from the Administrator to the owner or operator will specify the grounds on which the disapproval is based. In the absence of a notice of disapproval within 45 days, approval is automatically granted.

(3) As soon as monitoring data indicate that the affected facility is not in compliance with any emission limitation or operating parameter specified in the applicable standard, the frequency of reporting shall revert to the frequency specified in the applicable standard, and the owner or operator shall submit an excess emissions and monitoring systems performance report (and summary report, if required) at the next appropriate reporting period following the noncomplying event. After demonstrating compliance with the applicable standard for another full year, the owner or operator may again request approval from the Administrator to reduce the frequency of reporting for that standard as provided for in 40 CFR 60.7(e)(1) and (e)(2).
[40 CFR 60.7(e)(1)]

{See attached Figure 1: Summary Report-Gaseous and Opacity Excess Emission and Monitoring System Performance}

D.22. Any owner or operator subject to the provisions of 40 CFR 60 shall maintain a file of all measurements, including continuous monitoring system, monitoring device, and performance testing measurements; all continuous monitoring system performance evaluations; all continuous monitoring system or monitoring device calibration checks; adjustments and maintenance performed on these systems or devices; and, all other information required by 40 CFR 60 recorded in a permanent form suitable for inspection. The file shall be retained for at least **5 (five)** years following the date of such measurements, maintenance, reports, and records.
[40 CFR 60.7(f); and, Rule 62-213.440(1)(b)2.b., F.A.C.]

D.23. Test Reports.
(a) The owner or operator of an emissions unit for which a compliance test is required shall file a report with the Department's Southeast District office and the Dade County's DERM office on the results of each such test.
(b) The required test report shall be filed with the Department's Southeast District office and the Dade County's DERM office as soon as practical but no later than 45 days after the last sampling run of each test is completed.
(c) The test report shall provide sufficient detail on the emissions unit tested and the test procedures used to allow the Department's Southeast District office and the Dade County's DERM office to determine if the test was properly conducted and the test results properly computed. As a minimum, the test report, other than for an EPA or DEP Method 9 test, shall provide the following information:

1. The type, location, and designation of the emissions unit tested.
2. The facility at which the emissions unit is located.
3. The owner or operator of the emissions unit.
4. The normal type and amount of fuels used and materials processed, and the types and amounts of fuels used and material processed during each test run.
5. The means, raw data and computations used to determine the amount of fuels used and materials processed, if necessary to determine compliance with an applicable emission limiting standard.
6. The type of air pollution control devices installed on the emissions unit, their general condition, their normal operating parameters (pressure drops, total operating current and GPM scrubber water), and their operating parameters during each test run.
7. A sketch of the duct within 8 stack diameters upstream and 2 stack diameters downstream of the sampling ports, including the distance to any upstream and downstream bends or other flow disturbances.
8. The date, starting time and duration of each sampling run.

9. The test procedures used, including any alternative procedures authorized pursuant to Rule 62-297.620, F.A.C. Where optional procedures are authorized in this chapter, indicate which option was used.
10. The number of points sampled and configuration and location of the sampling plane.
11. For each sampling point for each run, the dry gas meter reading, velocity head, pressure drop across the stack, temperatures, average meter temperatures and sample time per point.
12. The type, manufacturer and configuration of the sampling equipment used.
13. Data related to the required calibration of the test equipment.
14. Data on the identification, processing and weights of all filters used.
15. Data on the types and amounts of any chemical solutions used.
16. Data on the amount of pollutant collected from each sampling probe, the filters, and the impingers, are reported separately for the compliance test.
17. The names of individuals who furnished the process variable data, conducted the test, analyzed the samples and prepared the report.
18. All measured and calculated data required to be determined by each applicable test procedure for each run.
19. The detailed calculations for one run that relate the collected data to the calculated emission rate.
20. The applicable emission standard, and the resulting maximum allowable emission rate for the emissions unit, plus the test result in the same form and unit of measure.
21. A certification that, to the knowledge of the owner or his authorized agent, all data submitted are true and correct. When a compliance test is conducted for the Department's Southeast District or its agent, the person who conducts the test shall provide the certification with respect to the test procedures used. The owner or his authorized agent shall certify that all data required and provided to the person conducting the test are true and correct to his knowledge.

[Rules 62-213.440 and 62-297.310(8), F.A.C.]

Miscellaneous Requirements

D.24. Definitions. For the purposes of Rules 62-204.800(7), (8), and (9), F.A.C., the definitions contained in the various provisions of 40 CFR Parts 60 and 61, adopted herein shall apply except that the term "Administrator" when used in 40 CFR Parts 60 and 61, shall mean the Secretary or the Secretary's designee except as noted in 40 CFR 61.157.
[40 CFR 60.2; and, Rules 62-204.800(7)(a), (8)(a)2., and, (9)(a), F.A.C.]

D.25. Circumvention. No owner or operator subject to the provisions of 40 CFR 60 shall build, erect, install, or use any article, machine, equipment or process, the use of which conceals an emission which would otherwise constitute a violation of an applicable standard. Such concealment includes, but is not limited to, the use of gaseous diluents to achieve compliance with an opacity standard or with a standard which is based on the concentration of a pollutant in the gases discharged to the atmosphere.
[40 CFR 60.12]

D.26. General Applicability and Definitions. The Standards of Performance for New Stationary Sources adopted by reference in Rule 62-204.800(7), F.A.C., the Emission Guidelines for Existing Sources adopted by reference in Rule 62-204.800(8), F.A.C., and the National Emissions Standards for Hazardous Air Pollutants adopted by reference in Rule 62-204.800(9), F.A.C., shall be controlling over other standards in the air pollution rules of the Department except that any emissions limiting standard contained in or determined pursuant to the air pollution rules of the Department which is more stringent than one contained in a Standard of Performance, an Emission Guideline, or a National Emission Standard, or which regulates emissions of pollutants or emissions units not regulated by an applicable

Standard of Performance, Emission Guideline, or National Emission Standard, shall apply.
[Rules 62-204.800(7)(c), (8)(a)1., and (9)(c), F.A.C.]

Subsection E. This section addresses the following emissions unit(s).

E.U. ID No.	Brief Description
-uuu	Lime Storage Silo with Baghouse

Lime used in the spray dryer absorbers for each municipal waste combustor is stored in a silo. Emissions from the silo are controlled by a baghouse.

{Permitting note(s): Emissions unit **-uuu** is a minor emissions unit regulated under Rule 62-210.300, F.A.C., Permits Required; Rule 62-212.400, Prevention of Significant Deterioration [PSD; and, PSD-FL-006(A), (B) & (D)]}

The following specific conditions apply to the emissions unit listed above:

{Permitting note: Unless revised, the following specific conditions contained in this subsection shall apply until the installation of new air pollution control systems and compliance testing is completed, which must have been completed by December 19, 2000.}

Essential Potential to Emit (PTE) Parameters

E.1. Hours of Operation. This emissions unit is allowed to operate continuously, i.e., 8,760 hours/year. [Rule 62-210.200(PTE), F.A.C.; and, PSD-FL-006(D)]

Emission Limitations and Standards

E.2. Visible Emissions. Visible emissions shall not exceed five (5) percent opacity.
[PSD-FL-006(A), (B) & (D)]

Excess Emissions

E.3. Excess emissions from these emissions units resulting from startup, shutdown or malfunction shall be permitted provided that best operational practices to minimize emissions are adhered to and the duration of excess emissions shall be minimized but in no case exceed two hours in any 24 hour period unless specifically authorized by the Department for longer duration.
[Rule 62-210.700(1), F.A.C.]

E.4. Excess emissions which are caused entirely or in part by poor maintenance, poor operation, or any other equipment or process failure which may reasonably be prevented during startup, shutdown or malfunction shall be prohibited.
[Rule 62-210.700(4), F.A.C.]

Test Methods and Procedures

E.5. Visible Emissions.
a. EPA Method 9 shall be used to determine opacity compliance pursuant to Rule 62-297.401, F.A.C., and 40 CFR 60, Appendix A. The emissions unit is to be operating (i.e., receiving or discharging) during any compliance test.
b. Complaince testing of the lime silo loading operation shall be conducted within 90 days of completion of construction and initial operation; and, annually thereafter.

[Rules 62-4.070(3), 62-213.440, and 62-297.401, F.A.C.; and, PSD-FL-006(D)]

E.6. Operating Rate During Testing. Testing of emissions shall be conducted with the emissions unit operation at permitted capacity, which is defined as 90 to 100 percent of the maximum operation rate allowed by the permit. If it is impracticable to test at permitted capacity, an emissions unit may be tested at less than the minimum permitted capacity; in this case, subsequent emissions unit operation is limited to 110 percent of the test load until a new test is conducted. Once the emissions unit is so limited, operation at higher capacities is allowed for no more than 15 consecutive days for the purpose of additional compliance testing to regain the authority to operate at the permitted capacity.
[Rules 62-297.310(2) & (2)(b), F.A.C.]

E.7. Applicable Test Procedures.
(a) Required Sampling Time.
1. Unless otherwise specified in the applicable rule, the required sampling time for each test run shall be no less than one hour and no greater than four hours, and the sampling time at each sampling point shall be of equal intervals of at least two minutes.
2. Opacity Compliance Tests. When either EPA Method 9 or DEP Method 9 is specified as the applicable opacity test method, the required minimum period of observation for a compliance test shall be sixty (60) minutes for emissions units which emit or have the potential to emit 100 tons per year or more of particulate matter, and thirty (30) minutes for emissions units which have potential emissions less than 100 tons per year of particulate matter and are not subject to a multiple-valued opacity standard. The opacity test observation period shall include the period during which the highest opacity emissions can reasonably be expected to occur. Exceptions to these requirements are as follows:
a. For batch, cyclical processes, or other operations which are normally completed within less than the minimum observation period and do not recur within that time, the period of observation shall be equal to the duration of the batch cycle or operation completion time.
b. The observation period for special opacity tests that are conducted to provide data to establish a surrogate standard pursuant to Rule 62-297.310(5)(k), F.A.C., Waiver of Compliance Test Requirements, shall be established as necessary to properly establish the relationship between a proposed surrogate standard and an existing mass emission limiting standard.
c. The minimum observation period for opacity tests conducted by employees or agents of the Department to verify the day-to-day continuing compliance of a unit or activity with an applicable opacity standard shall be twelve minutes.
[Rule 62-297.310(4), F.A.C.]

E.8. Frequency of Compliance Tests. The following provisions apply only to those emissions units that are subject to an emissions limiting standard for which compliance testing is required.
(a) General Compliance Testing.
3. The owner or operator of an emissions unit that is subject to any emission limiting standard shall conduct a compliance test that demonstrates compliance with the applicable emission limiting standard prior to obtaining a renewed operation permit. Emissions units that are required to conduct an annual compliance test may submit the most recent annual compliance test to satisfy the requirements of this provision. In renewing an air operation permit pursuant to Rule 62-210.300(2)(a)3.b., c., or d., F.A.C., the Department shall not require submission of emission compliance test results for any emissions unit that, during the year prior to renewal:
a Did not operate; or

4. During each federal fiscal year (October 1 - September 30), unless otherwise specified by rule, order, or permit, the owner or operator of each emissions unit shall have a formal compliance test conducted for:
   a. Visible emissions, if there is an applicable standard;
   b. Each of the following pollutants, if there is an applicable standard, and if the emissions unit emits or has the potential to emit: 5 tons per year or more of lead or lead compounds measured as elemental lead; 30 tons per year or more of acrylonitrile; or 100 tons per year or more of any other regulated air pollutant; and
   c. Each NESHAP pollutant, if there is an applicable emission standard.

9. The owner or operator shall notify the Department's Southeast District office and the Dade County's DERM office at least 15 days prior to the date on which each formal compliance test is to begin, of the date, time, and place of each such test, and the test contact person who will be responsible for coordinating and having such test conducted for the owner or operator.

(b) Special Compliance Tests. When the Department's Southeast District office or the Dade County's DERM office, after investigation, has good reason (such as complaints, increased visible emissions or questionable maintenance of control equipment) to believe that any applicable emission standard contained in a Department rule or in a permit issued pursuant to those rules is being violated, it may require the owner or operator of the emissions unit to conduct compliance tests which identify the nature and quantity of pollutant emissions from the emissions unit and to provide a report on the results of said tests to the Department's Southeast District office and the Dade County's DERM office.

(c) Waiver of Compliance Test Requirements. If the owner or operator of an emissions unit that is subject to a compliance test requirement demonstrates to the Department, pursuant to the procedure established in Rule 62-297.620, F.A.C., that the compliance of the emissions unit with an applicable weight emission limiting standard can be adequately determined by means other than the designated test procedure, such as specifying a surrogate standard of no visible emissions for particulate matter sources equipped with a bag house or specifying a fuel analysis for sulfur dioxide emissions, the Department shall waive the compliance test requirements for such emissions units and order that the alternate means of determining compliance be used, provided, however, the provisions of Rule 62-297.310(7)(b), F.A.C., shall apply.

[Rule 62-297.310(7), F.A.C.; PSD-FL-006(D); and, SIP approved]

Monitoring of Operations

E.9. Determination of Process Variables.

(a) Required Equipment. The owner or operator of an emissions unit for which compliance tests are required shall install, operate, and maintain equipment or instruments necessary to determine process variables, such as process weight input or heat input, when such data are needed in conjunction with emissions data to determine the compliance of the emissions unit with applicable emission limiting standards.

(b) Accuracy of Equipment. Equipment or instruments used to directly or indirectly determine process variables, including devices such as belt scales, weight hoppers, flow meters, and tank scales, shall be calibrated and adjusted to indicate the true value of the parameter being measured with sufficient accuracy to allow the applicable process variable to be determined within 10% of its true value.

[Rule 62-297.310(5), F.A.C.]

Recordkeeping and Reporting Requirements

E.10. In the case of excess emissions resulting from malfunctions, each owner or operator shall notify the Department's Southeast District office in accordance with Rule 62-4.130, F.A.C. A full written report on the malfunctions shall be submitted in a quarterly report, if requested by the Department or its agent. [Rule 62-210.700(6), F.A.C.]

E.11. Any measurements, maintenance, reports, and records shall be retained for at least **5 (five)** years following the date of such measurements, maintenance, reports, and records.
[Rule 62-213.440(1)(b)2.b., F.A.C.]

E.12. Test Reports.
(a) The owner or operator of an emissions unit for which a compliance test is required shall file a report with the Department's Southeast District office and the Dade County's DERM office on the results of each such test.
(b) The required test report shall be filed with the Department's Southeast District office and the Dade County's DERM office as soon as practical but no later than 45 days after the last sampling run of each test is completed.
(c) The test report shall provide sufficient detail on the emissions unit tested and the test procedures used to allow the Department's Southeast District office and the Dade County's DERM office to determine if the test was properly conducted and the test results properly computed. As a minimum, the test report, other than for an EPA or DEP Method 9 test, shall provide the following information:

1. The type, location, and designation of the emissions unit tested.
2. The facility at which the emissions unit is located.
3. The owner or operator of the emissions unit.
4. The normal type and amount of fuels used and materials processed, and the types and amounts of fuels used and material processed during each test run.
5. The means, raw data and computations used to determine the amount of fuels used and materials processed, if necessary to determine compliance with an applicable emission limiting standard.
6. The type of air pollution control devices installed on the emissions unit, their general condition, their normal operating parameters (pressure drops, total operating current and GPM scrubber water), and their operating parameters during each test run.
7. A sketch of the duct within 8 stack diameters upstream and 2 stack diameters downstream of the sampling ports, including the distance to any upstream and downstream bends or other flow disturbances.
8. The date, starting time and duration of each sampling run.
9. The test procedures used, including any alternative procedures authorized pursuant to Rule 62-297.620, F.A.C. Where optional procedures are authorized in this chapter, indicate which option was used.
10. The number of points sampled and configuration and location of the sampling plane.
11. For each sampling point for each run, the dry gas meter reading, velocity head, pressure drop across the stack, temperatures, average meter temperatures and sample time per point.
12. The type, manufacturer and configuration of the sampling equipment used.
13. Data related to the required calibration of the test equipment.
14. Data on the identification, processing and weights of all filters used.
15. Data on the types and amounts of any chemical solutions used.
16. Data on the amount of pollutant collected from each sampling probe, the filters, and the impingers, are reported separately for the compliance test.
17. The names of individuals who furnished the process variable data, conducted the test, analyzed the samples and prepared the report.

18. All measured and calculated data required to be determined by each applicable test procedure for each run.
19. The detailed calculations for one run that relate the collected data to the calculated emission rate.
20. The applicable emission standard, and the resulting maximum allowable emission rate for the emissions unit, plus the test result in the same form and unit of measure.
21. A certification that, to the knowledge of the owner or his authorized agent, all data submitted are true and correct. When a compliance test is conducted for the Department's Southeast District or its agent, the person who conducts the test shall provide the certification with respect to the test procedures used. The owner or his authorized agent shall certify that all data required and provided to the person conducting the test are true and correct to his knowledge.

[Rules 62-213.440 and 62-297.310(8), F.A.C.]

Section III. Emissions Unit(s) and Conditions.

Subsection F. This section addresses the following emissions unit(s).

E.U. ID No.	Brief Description
-vvv	Activated Carbon (or Comparable Reactant) Storage Silo

Activated carbon (or comparable reactant) used in the injection system for each municipal waste combustor is stored in a silo. The activated carbon (or comparable reactant) will be utilized for the control of mercury and dioxin/furans. Emissions from the silo are controlled by a baghouse.

{Permitting note(s): Emissions unit **–vvv** is a minor emissions unit regulated under Rule 62-210.300, F.A.C., Permits Required; and, Rule 62-212.400, Prevention of Significant Deterioration [PSD; and, PSD-FL-006(A), (B) & (D)]}

The following specific conditions apply to the emissions unit listed above:

{Permitting note: Unless revised, the following specific conditions contained in this subsection shall apply until the installation of new air pollution control systems and compliance testing is completed, which must be completed by December 19, 2000.}

Essential Potential to Emit (PTE) Parameters

F.1. Hours of Operation. This emissions unit is allowed to operate continuously, i.e., 8,760 hours/year. [Rule 62-210.200(PTE), F.A.C.; and, PSD-FL-006(D)]

Emission Limitations and Standards

F.2. Particulate Matter and Visible Emissions.
a. Particulate matter emissions shall not exceed 0.01 grains per dry standard cubic foot, front-half catch; or,
b. Visible emissions shall not exceed 5 percent opacity, since each emissions unit's potential particulate matter emissions are less than 100 TPY and is equipped with a baghouse control system. As long as the visible emissions do not exceed 5 percent opacity, compliance is assumed for the particulate matter limitations established in paragraph (a) above.

If the Department's Southeast District office or the Dade County's DERM office has reason to believe that the particulate matter weight emissions standard in paragraph (a) above is not being met, it shall require that compliance be demonstrated by the test method specified in specific condition F.6.~~F.6.F.6.~~
[PSD-FL-006(A), (B) & (D); and, Rule 62-297.620(4), F.A.C.]

Excess Emissions

F.3. Excess emissions from these emissions units resulting from startup, shutdown or malfunction shall be permitted provided that best operational practices to minimize emissions are adhered to and the duration of excess emissions shall be minimized but in no case exceed two hours in any 24 hour period unless specifically authorized by the Department for longer duration.
[Rule 62-210.700(1), F.A.C.]

F.4. Excess emissions which are caused entirely or in part by poor maintenance, poor operation, or any other equipment or process failure which may reasonably be prevented during startup, shutdown or malfunction shall be prohibited.
[Rule 62-210.700(4), F.A.C.]

Monitoring of Operations

F.5. Determination of Process Variables.
(a) Required Equipment. The owner or operator of an emissions unit for which compliance tests are required shall install, operate, and maintain equipment or instruments necessary to determine process variables, such as process weight input or heat input, when such data are needed in conjunction with emissions data to determine the compliance of the emissions unit with applicable emission limiting standards.
(b) Accuracy of Equipment. Equipment or instruments used to directly or indirectly determine process variables, including devices such as belt scales, weight hoppers, flow meters, and tank scales, shall be calibrated and adjusted to indicate the true value of the parameter being measured with sufficient accuracy to allow the applicable process variable to be determined within 10% of its true value.
[Rule 62-297.310(5), F.A.C.]

Test Methods and Procedures

F.6. Particulate Matter. The test methods for particulate emissions shall be EPA Method 5 pursuant to Rule 62-297.401, F.A.C., and 40 CFR 60, Appendix A
[Rule 62-297.401, F.A.C.]

F.7. Visible Emissions. EPA Method 9 shall be used to determine opacity compliance pursuant to Rule 62-297.401, F.A.C., and 40 CFR 60, Appendix A.
[Rule 62-297.401, F.A.C.]

F.8. Required Number of Test Runs. For mass emission limitations, a compliance test shall consist of three complete and separate determinations of the total air pollutant emission rate through the test section of the stack or duct and three complete and separate determinations of any applicable process variables corresponding to the three distinct time periods during which the stack emission rate was measured provided, however, that three complete and separate determinations shall not be required if the process variables are not subject to variation during a compliance test, or if three determinations are not necessary in order to calculate the unit's emission rate. The three required test runs shall be completed within one consecutive five day period. In the event that a sample is lost or one of the three runs must be discontinued because of circumstances beyond the control of the owner or operator, and a valid third run cannot be obtained within the five day period allowed for the test, the Secretary or his or her designee may accept the results of the two complete runs as proof of compliance, provided that the arithmetic mean of the results of the two complete runs is at least 20 percent below the allowable emission limiting standards.
[Rule 62-297.310(1), F.A.C.]

F.9. Operating Rate During Testing. Testing of emissions shall be conducted with the emissions unit operation at permitted capacity, which is defined as 90 to 100 percent of the maximum operation rate allowed by the permit. If it is impracticable to test at permitted capacity, an emissions unit may be tested at less than the minimum permitted capacity; in this case, subsequent emissions unit operation is limited to 110 percent of the test load until a new test is conducted. Once the emissions unit is so limited,

operation at higher capacities is allowed for no more than 15 consecutive days for the purpose of additional compliance testing to regain the authority to operate at the permitted capacity.
[Rules 62-297.310(2) & (2)(b), F.A.C.]

F.10. Calculation of Emission Rate. The indicated emission rate or concentration shall be the arithmetic average of the emission rate or concentration determined by each of the separate test runs unless otherwise specified in a particular test method or applicable rule.
[Rule 62-297.310(3), F.A.C.]

F.11. Applicable Test Procedures.
(a) Required Sampling Time.
1. Unless otherwise specified in the applicable rule, the required sampling time for each test run shall be no less than one hour and no greater than four hours, and the sampling time at each sampling point shall be of equal intervals of at least two minutes.
2. Opacity Compliance Tests. When either EPA Method 9 or DEP Method 9 is specified as the applicable opacity test method, the required minimum period of observation for a compliance test shall be sixty (60) minutes for emissions units which emit or have the potential to emit 100 tons per year or more of particulate matter, and thirty (30) minutes for emissions units which have potential emissions less than 100 tons per year of particulate matter and are not subject to a multiple-valued opacity standard. The opacity test observation period shall include the period during which the highest opacity emissions can reasonably be expected to occur. Exceptions to these requirements are as follows:
a. For batch, cyclical processes, or other operations which are normally completed within less than the minimum observation period and do not recur within that time, the period of observation shall be equal to the duration of the batch cycle or operation completion time.
b. The observation period for special opacity tests that are conducted to provide data to establish a surrogate standard pursuant to Rule 62-297.310(5)(k), F.A.C., Waiver of Compliance Test Requirements, shall be established as necessary to properly establish the relationship between a proposed surrogate standard and an existing mass emission limiting standard.
c. The minimum observation period for opacity tests conducted by employees or agents of the Department to verify the day-to-day continuing compliance of a unit or activity with an applicable opacity standard shall be twelve minutes.
[Rule 62-297.310(4), F.A.C.]

F.12. Required Stack Sampling Facilities. When a mass emissions stack test is required, the permittee shall comply with the requirements contained in Appendix SS-1, Stack Sampling Facilities, attached to this permit.
[Rule 62-297.310(6), F.A.C.]

F.13. Frequency of Compliance Tests. The following provisions apply only to those emissions units that are subject to an emissions limiting standard for which compliance testing is required.
(a) General Compliance Testing.
3. The owner or operator of an emissions unit that is subject to any emission limiting standard shall conduct a compliance test that demonstrates compliance with the applicable emission limiting standard prior to obtaining a renewed operation permit. Emissions units that are required to conduct an annual compliance test may submit the most recent annual compliance test to satisfy the requirements of this provision. In renewing an air operation permit pursuant to Rule 62-210.300(2)(a)3.b., c., or d., F.A.C., the Department shall not require submission of emission compliance test results for any emissions unit that, during the year prior to renewal:

a Did not operate; or

4. During each federal fiscal year (October 1 - September 30), unless otherwise specified by rule, order, or permit, the owner or operator of each emissions unit shall have a formal compliance test conducted for:
   a. Visible emissions, if there is an applicable standard;
   b. Each of the following pollutants, if there is an applicable standard, and if the emissions unit emits or has the potential to emit: 5 tons per year or more of lead or lead compounds measured as elemental lead; 30 tons per year or more of acrylonitrile; or 100 tons per year or more of any other regulated air pollutant; and
   c. Each NESHAP pollutant, if there is an applicable emission standard.
9. The owner or operator shall notify the Department's Southeast District office and the Dade County's DERM office at least 15 days prior to the date on which each formal compliance test is to begin, of the date, time, and place of each such test, and the test contact person who will be responsible for coordinating and having such test conducted for the owner or operator.

(b) Special Compliance Tests. When the Department's Southeast District office or the Dade County's DERM office, after investigation, has good reason (such as complaints, increased visible emissions or questionable maintenance of control equipment) to believe that any applicable emission standard contained in a Department rule or in a permit issued pursuant to those rules is being violated, it may require the owner or operator of the emissions unit to conduct compliance tests which identify the nature and quantity of pollutant emissions from the emissions unit and to provide a report on the results of said tests to the Department's Southeast District office and the Dade County's DERM office.

(c) Waiver of Compliance Test Requirements. If the owner or operator of an emissions unit that is subject to a compliance test requirement demonstrates to the Department, pursuant to the procedure established in Rule 62-297.620, F.A.C., that the compliance of the emissions unit with an applicable weight emission limiting standard can be adequately determined by means other than the designated test procedure, such as specifying a surrogate standard of no visible emissions for particulate matter sources equipped with a bag house or specifying a fuel analysis for sulfur dioxide emissions, the Department shall waive the compliance test requirements for such emissions units and order that the alternate means of determining compliance be used, provided, however, the provisions of Rule 62-297.310(7)(b), F.A.C., shall apply.

[Rule 62-297.310(7), F.A.C.; PSD-FL-006(D); and, SIP approved]

Monitoring of Operations

F.14. Determination of Process Variables.

(a) Required Equipment. The owner or operator of an emissions unit for which compliance tests are required shall install, operate, and maintain equipment or instruments necessary to determine process variables, such as process weight input or heat input, when such data are needed in conjunction with emissions data to determine the compliance of the emissions unit with applicable emission limiting standards.

(b) Accuracy of Equipment. Equipment or instruments used to directly or indirectly determine process variables, including devices such as belt scales, weight hoppers, flow meters, and tank scales, shall be calibrated and adjusted to indicate the true value of the parameter being measured with sufficient accuracy to allow the applicable process variable to be determined within 10% of its true value.

[Rule 62-297.310(5), F.A.C.]

Recordkeeping and Reporting Requirements

F.15. In the case of excess emissions resulting from malfunctions, each owner or operator shall notify the Department's Southeast District office in accordance with Rule 62-4.130, F.A.C. A full written report on the malfunctions shall be submitted in a quarterly report, if requested by the Department or its agent. [Rule 62-210.700(6), F.A.C.]

F.16. Any measurements, maintenance, reports, and records shall be retained for at least **5 (five)** years following the date of such measurements, maintenance, reports, and records.
[Rule 62-213.440(1)(b)2.b., F.A.C.]

F.17. Test Reports.
(a) The owner or operator of an emissions unit for which a compliance test is required shall file a report with the Department's Southeast District office and the Dade County's DERM office on the results of each such test.
(b) The required test report shall be filed with the Department's Southeast District office and the Dade County's DERM office as soon as practical but no later than 45 days after the last sampling run of each test is completed.
(c) The test report shall provide sufficient detail on the emissions unit tested and the test procedures used to allow the Department's Southeast District office and the Dade County's DERM office to determine if the test was properly conducted and the test results properly computed. As a minimum, the test report, other than for an EPA or DEP Method 9 test, shall provide the following information:

1. The type, location, and designation of the emissions unit tested.
2. The facility at which the emissions unit is located.
3. The owner or operator of the emissions unit.
4. The normal type and amount of fuels used and materials processed, and the types and amounts of fuels used and material processed during each test run.
5. The means, raw data and computations used to determine the amount of fuels used and materials processed, if necessary to determine compliance with an applicable emission limiting standard.
6. The type of air pollution control devices installed on the emissions unit, their general condition, their normal operating parameters (pressure drops, total operating current and GPM scrubber water), and their operating parameters during each test run.
7. A sketch of the duct within 8 stack diameters upstream and 2 stack diameters downstream of the sampling ports, including the distance to any upstream and downstream bends or other flow disturbances.
8. The date, starting time and duration of each sampling run.
9. The test procedures used, including any alternative procedures authorized pursuant to Rule 62-297.620, F.A.C. Where optional procedures are authorized in this chapter, indicate which option was used.
10. The number of points sampled and configuration and location of the sampling plane.
11. For each sampling point for each run, the dry gas meter reading, velocity head, pressure drop across the stack, temperatures, average meter temperatures and sample time per point.
12. The type, manufacturer and configuration of the sampling equipment used.
13. Data related to the required calibration of the test equipment.
14. Data on the identification
, processing and weights of all filters used.
15. Data on the types and amounts of any chemical solutions used.
16. Data on the amount of pollutant collected from each sampling probe, the filters, and the impingers, are reported separately for the compliance test.

17. The names of individuals who furnished the process variable data, conducted the test, analyzed the samples and prepared the report.
18. All measured and calculated data required to be determined by each applicable test procedure for each run.
19. The detailed calculations for one run that relate the collected data to the calculated emission rate.
20. The applicable emission standard, and the resulting maximum allowable emission rate for the emissions unit, plus the test result in the same form and unit of measure.
21. A certification that, to the knowledge of the owner or his authorized agent, all data submitted are true and correct. When a compliance test is conducted for the Department's Southeast District or its agent, the person who conducts the test shall provide the certification with respect to the test procedures used. The owner or his authorized agent shall certify that all data required and provided to the person conducting the test are true and correct to his knowledge.

[Rules 62-213.440 and 62-297.310(8), F.A.C.]

Appendix H-1, Permit History/ID Number Changes

Dade County Dept. of Solid Waste Management
Dade County Resource Recovery Facility

DRAFT Title V Permit Revision No.: 0250348-004-AV
Facility ID No.: 0250348

Permit History (for tracking purposes):

E.U. ID No	Description	Permit No.	Effective Date	Expiration Date	Project Type [1]
-001	Boiler #1	PSD-FL-006 PA 77-08	2/27/78		
		PA 77-08B	2/24/93		
		PSD-FL-006(A)	12/16/94		
		PSD-FL-006(B)	3/22/99		
		PSD-FL-006(D)	7/21/2000		
		0250348-001-AV	10/12/2000	10/02/2005	Initial
		0250348-004-AV	Pending	10/02/2005	Revision
-002	Boiler #2	PSD-FL-006 PA 77-08	2/27/78		
		PA 77-08B	2/24/93		
		PSD-FL-006(A)	12/16/94		
		PSD-FL-006(B)	3/22/99		
		PSD-FL-006(D)	7/21/2000		
		0250348-001-AV	10/12/2000	10/02/2005	Initial
		0250348-004-AV	Pending	10/02/2005	Revision
-003	Boiler #3	PSD-FL-006 PA 77-08	2/27/78		
		PA 77-08B	2/24/93		
		PSD-FL-006(A)	12/16/94		
		PSD-FL-006(B)	3/22/99		
		PSD-FL-006(D)	7/21/2000		
		0250348-001-AV	10/12/2000	10/02/2005	Initial
		0250348-004-AV	Pending	10/02/2005	Revision
-004	Boiler #4	PSD-FL-006 PA 77-08	2/27/78		
		PA 77-08B	2/24/93		
		PSD-FL-006(A)	12/16/94		
		PSD-FL-006(B)	3/22/99		
		PSD-FL-006(D)	7/21/2000		
		0250348-001-AV	10/12/2000	10/02/2005	Initial
		0250348-004-AV	Pending	10/02/2005	Revision

Appendix H-1, Permit History/ID Number Changes
Dade County Dept. of Solid Waste Management
Dade County Resource Recovery Facility
DRAFT Title V Permit Revision No.: 0250348-004-AV
Facility ID No.: 0250348

E.U. ID No	Description	Permit No.	Effective Date	Expiration Date	Project Type [1]
-rrr	MSW to RDF Processing Facility with Baghouses	PSD-FL-006(A)	12/16/94		
		PSD-FL-006(B)	3/22/99		
		PSD-FL-006(D)	7/21/2000		
		0250348-001-AV	10/12/2000	10/02/2005	Initial
		0250348-004-AV	Pending	10/02/2005	No Change
-sss	Bulky Waste to Biomass Processing Facility with Baghouses	PSD-FL-006(A)	12/16/94		
		PSD-FL-006(B)	3/22/99		
		PSD-FL-006(D)	7/21/2000		
		0250348-001-AV	10/12/2000	10/02/2005	Initial
		0250348-004-AV	Pending	10/02/2005	No Change
-ttt	Ash Building and Handling System Ash Storage Silo with Baghouse Ash Conditioning Agent Storage Silo Baghouse	PSD-FL-006(A)	12/16/94		
		PSD-FL-006(B)	3/22/99		
		PSD-FL-006(D)	7/21/2000		
		0250348-001-AV	10/12/2000	10/02/2005	Initial
		0250348-004-AV	Pending	10/02/2005	No Change
-uuu	Lime Storage Silo with Baghouse	PSD-FL-006(A)	12/16/94		
		PSD-FL-006(B)	3/22/99		
		PSD-FL-006(D)	7/21/2000		
		0250348-001-AV	10/12/2000	10/02/2005	Initial
		0250348-004-AV	Pending	10/02/2005	No Change
-xxx	Activated Carbon or Comparable Reactant Storage Silo with Baghouse	PSD-FL-006(A)	12/16/94		
		PSD-FL-006(B)	3/22/99		
		PSD-FL-006(D)	7/21/2000		
		0250348-001-AV	10/12/2000	10/02/2005	Initial
		0250348-004-AV	Pending	10/02/2005	No Change

[1] Project Type (select one): Initial; Revision; Renewal; Administrative Correction; or, No Change.

Subsection B. This section addresses the following emissions unit(s).

E.U./Facility ID Nos.	Brief Description
-001/Unit 1	180,000 lbs/hr Steam (maximum continuous rating; at 625 psig and 730 ^{0}F) RDF Combustor & Auxiliary Burners
-002/Unit 2	180,000 lbs/hr Steam (maximum continuous rating; at 625 psig and 730 ^{0}F) RDF Combustor & Auxiliary Burners
-003/Unit 3	180,000 lbs/hr Steam (maximum continuous rating; at 625 psig and 730 ^{0}F) RDF Combustor & Auxiliary Burners
-004/Unit 4	180,000 lbs/hr Steam (maximum continuous rating; at 625 psig and 730 ^{0}F) RDF Combustor & Auxiliary Burners

{Permitting Note: These emissions units are allowed to burn refuse derived fuel as the main fuel. ***Refuse Derived Fuel*** means a type of municipal solid waste produced by processing municipal solid waste through shredding and size classification. This includes all classes of refuse derived fuel including low-density fluff refuse-derived fuel through densified refuse-derived fuel and pelletized refuse-derived fuel. ***Refuse-derived fuel stoker*** means a steam generating unit that combusts refuse-derived fuel in a semisuspension firing mode using air fed distributors. Each of the four refuse derive waste combustors (RDFs) produce at the manufacturer's maximum continuous rating (MCR) steam flow of 180,000 lbs/hr (at 625 psig and 730 ^{0}F). Short term capacity is limited by limiting steam production, which effectively limits heat input.}.
[PSD-FL-006(D); and, 40 CFR 60.51b]

ARMS emissions units Nos. -001, -002, -003 and -004 are identical rebuilt refuse derived fuel (RDF) spreader stoker combustors with Zurn attributes designated as Units 1, 2, 3 and 4, respectively. RDF is burned in suspension and on a grate with a primary and secondary air system to provide air in varying proportions to promote the proper combustion. Units 1 thru 4 began commercial operation January 1, 1982. Particulate matter emissions from Units 1, 2, 3 and 4 will be controlled fabric filters, while CO and NO_X emissions are controlled by good combustion practices. Following retrofitting to comply with the NSPS, 40 CFR 60, Subparts Cb and Eb, each boiler will have a maximum capacity of 648 tons of RDF per day, as determined by a rolling 12-month average. Auxiliary burners associated with each RDF combustor will be permitted to fire propane and natural gas at a maximum heat input of 80 MMBtu/hr for startup, shutdown and malfunction, and at other times when necessary and consistent with good combustion practices. No. 2 fuel oil (with a maximum sulfur content of 0.08%, by weight) was allowed to be used for startup only in PA 77-08, but the facility has chosen not to use fuel oil in the auxiliary burners to date. Each unit will be allowed to produce at the manufacturer's maximum continuous rating (MCR) of 180,000 lbs/hr, at 625 psig and 730 ^{0}F, when firing RDF. Combustion control systems will be installed for carbon monoxide and nitrogen oxides, as necessary, to meet the emissions limits. Continuous monitoring devices for combustion and process parameters and SO_2, NOx and CO will be installed to improve combustion efficiency and control. The air pollution control equipment will consist of a spray dryer absorber (for acid gases), an activated carbon or comparable reactant injection system (for mercury and dioxin), and a fabric filter baghouse (for particulate matter and heavy metals). CO and NO_X emissions are currently controlled by good combustion practices; but, for NO_X, a selective non-catalytic reduction system will be installed, if it is necessary to comply with 40 CFR 60, Subpart Cb. In addition, new stacks and flue gas handling systems will replace the existing stacks and flue gas handling systems (Units 1 and 2 will each have a separate flue and share a common stack: Stack height = 250 feet, exit diameter = 8.5 feet, exit temperature = 270 °F, actual volumetric flow rate = 177,200 acfm, and maximum dry standard volumetric flow rate = 109,054 dscfm; and, Units 3 and 4 will each have a separate flue and share a common stack: Stack height = 250 feet, exit diameter = 8.5 feet, exit temperature = 300 °F, actual volumetric flow rate = 227,000 acfm, and maximum dry standard volumetric flow rate = 88,250 dscfm). Two 38.5 MW (gross) turbine-generators (using the steam from the four boilers) will supply the in-plant electrical load and the balance of the electricity generated will be sold to Florida Power Corporation. Odors will be minimized by keeping the truck access doors closed during non-use; and, a negative pressure will be maintained on the garbage tipping floor and the air collected will be used as combustion air.

110 percent of the unit's *maximum demonstrated unit load* based on 4-hour block averaged measurements of steam flow. The maximum demonstrated unit load is the highest arithmetic averaged measurement of steam flow recorded for four consecutive hours during the most recent dioxin/furan performance stack test in which compliance with the dioxin/furan emission limit was achieved. Higher loads are allowed for testing purposes as specified at 40 CFR 60.53b(b)..

[Rules 62-4.030(3) and 62-204.800(8), F.A.C., 40 CFR 60.31b; 60.38b; 60.51b; 60.53b(b); and 60.58b(i) (6)&(8) and 60.58b(j)]

B. AUXILIARY BURNERS

Auxiliary burners for each unit shall be fired only by propane gas or natural gas. They shall not exceed a heat input of 80 MMBtu/hr. Natural gas or propane gas may be used as fuel during warm-up, start-up, shutdown, and malfunction periods, and at other times when necessary and consistent with good combustion practices.

C. RESTRICTION FOR TYPE OF WASTES COMBUSTED

1) The primary fuel for the facility is municipal solid waste (MSW) which is processed into refuse derived fuel (RDF) including the items and materials that fit within the definition of MSW contained in either 40 CFR 60.51b or Section 403.706(5), Florida Statutes (1995). No biological waste, bio-medical waste, sewage sludge, of hazardous wastes shall be combusted at this facility without obtaining proper modification to the site certification conditions.

(Note: Tires addressed below).

2) The facility shall not burn

(a) those materials that are prohibited by state or federal law;
(b) those materials that are prohibited by the permit;
(c) lead acid batteries;
(d) hazardous waste;
(e) nuclear waste;
(f) radioactive waste;
(g) sewage sludge;
(h) used oil, except for what is generated on-site;
(i) explosives;
(j) biological waste;
(k) bio-medical waste;
(l) Beryllium-containing waste as defined in 40CFR61.31(g).

3) The fuel may be received either as a mixture or as a single-item stream (segregated load) of discarded materials. If the facility intends to use an authorized fuel that is segregated non-MSW material, the fuel shall be well mixed with MSW in the refuse pit or alternately charged with MSW in the hopper. The facility operators shall prepare and maintain records concerning the description and quantities of all segregated loads of non-MSW material which are received and used as fuel at the facility, and subject to a percentage weight limitation, below, (5and 6). For the purposes of this permit, a segregated load is defined to mean a container or truck that is almost completely or exclusively filled with a single item or homogeneous composition of waste material, as determined by visual observation.

4) Other Solid Waste – Subject to the condition and limitations contained in the permit, the following other solid waste may be used as fuel at the facility:

(a) confidential, proprietary or special documents (including but not limited to business records, lottery ticket, event tickets, coupons and microfilm);

(b) Contraband which his being destroyed at the request of appropriately authorized local, state or federal governmental agencies, provided that such material is not an explosive, a propellant, a

Sheplak, Scott

From: Mitchell, Bruce
Sent: Tuesday, April 10, 2001 9:57 AM
To: 'dave_buff@golder.com'
Cc: Fancy, Clair; Sheplak, Scott
Subject: pre-DRAFT Title V Operation Permit Revision: 0250348-004-AV.

4/10/2001

Dear Dave,

I have attached the text of the above referenced permit for your review. I will be pursuing review and signature to put the permit package out for Public Notice and comments for around Thursday. Give me a call if there are any questions. Take care.

Bruce Mitchell

0250348d.004.doc

850/921-9506

Dade County Department of Solid Waste Management
Dade County Resource Recovery Facility
Facility ID No.: 0250348
Dade County

Title V Air Operation Permit Revision
DRAFT Title V Permit Revision No.: 0250348-004-AV

Permitting Authority
State of Florida
Department of Environmental Protection
Division of Air Resources Management
Bureau of Air Regulation
Title V Section

Mail Station #5505
2600 Blair Stone Road
Tallahassee, Florida 32399-2400
Telephone: 850/488-0114
Fax: 850/922-6979

Compliance Authority
Department of Environmental Protection
Southeast District
400 North Congress Avenue
West Palm Beach, Florida 33401
Telephone: 561/681-6600
Fax: 561/681-6755

Title V Air Operation Permit Revision

DRAFT Title V Operation Permit Revision No.: 0250348-004-AV

Table of Contents

Section

Title V Air Operation Permit Placard Page **1**
Section I. Facility Information. **2**
Subsection A. Facility Description. 2
Subsection B. Summary of Emissions Unit ID Numbers and Brief Descriptions. 3
Subsection C. Relevant Documents 3
Section II. Facility-wide Conditions. **4**
Section III. Emissions Units and Conditions. **7**
Subsection A. Reserved. 7
Subsection B. Units 1 thru 4 RDF Combustors and Auxiliary Burners 8
Subsection C. MSW to RDF Processing and Bulky Waste to Biomass Processing Facilities 51
Subsection D. Ash Building and Handling System. 57
Subsection E. Lime Storage Silo. 65
Subsection F. Activated Carbon or Comparable Reactant Storage Silo 70

Department of Environmental Protection

Jeb Bush
Governor

Twin Towers Office Building
2600 Blair Stone Road
Tallahassee, Florida 32399-2400

David B. Struhs
Secretary

Permittee:
Dade County Dept. of Solid Waste Management
8675 NW 53rd Street, Suite 201
Miami, Florida 33166-4598

DRAFT Permit Revision No.: 0250348-004-AV
Facility ID No.: 0250348
SIC Nos.: 49, 4953
Project: Title V Air Operation Permit Revision

The purpose for this permit revision is to incorporate the terms and conditions established in air construction permit, No. 0250348-003-AC/PSD-FL-006(D), issued July 21, 2000. The existing facility is located at 6990 Northwest 97th Avenue, Miami, Florida 33178-6430, better described as approximately 0.5 mile north of Northwest 58th Street immediately west of Northwest 97th Avenue, Miami, Dade County. UTM Coordinates: Zone 17, 564.30 km East and 2857.40 km North; Latitude: 25° 50' 06" North and Longitude: 80° 21' 30" West.

STATEMENT OF BASIS: This Title V air operation permit revision is issued under the provisions of Chapter 403, Florida Statutes (F.S.), and Florida Administrative Code (F.A.C.) Chapters 62-4, 62-210, and 62-213. The above named permittee is hereby authorized to perform the work or operate the facility shown on the application and approved drawing(s), plans, and other documents, attached hereto or on file with the permitting authority, in accordance with the terms and conditions of this permit.

Referenced attachments made a part of this permit revision:
Appendix I-1, List of Insignificant Emissions Units and/or Activities
Appendix SS-1, Stack Sampling Facilities (version dated 10/7/96)
Appendix TV-3, Title V Conditions (version dated 04/30/99)
Figure 1: Summary Report-Gaseous and Opacity Excess Emission and Monitoring System Performance (40 CFR 60)
Table 297.310-1, Calibration Schedule

Initial Effective Date: October 2, 2000
Revision Effective Date: (issue date)
Renewal Application Due Date: April 2, 2005
Expiration Date: October 2, 2005

Howard L. Rhodes, Director,
Division of Air Resources Management

HLR/sms/bm

Section I. Facility Information.

Subsection A. Facility Description.

This existing facility consists of four identical Zurn Refuse Derived Fuel (RDF) Spreader Stoker Combustion Units 1 thru 4, with auxiliary burners, and a cooling tower. The facility's primary activities are garbage and trash receiving and processing (including a metals recovery system); fuel handling and storage; biomass production and export; RDF, natural gas, and propane combustion; ash storage and processing, including a monofill ash landfill; and, maintaining ancillary support equipment. These emissions units recently underwent a permit modification activity (PSD-FL-006(D)) that was completed on July 21, 2000. The purpose of the permit modification was to upgrade the air pollution control system pursuant to the requirements of 40 CFR 60, Subpart Cb - Emissions Guidelines and Compliance Schedules for Municipal Waste Combustors That Are Constructed on or Before December 19, 1995, for the existing four RDF boilers built in 1987-1989. The modifications included changes to the overfire air system, fuel feed system, and associated fuel distribution system. The electrostatic precipitators will be replaced with fabric filters, spray dryer absorbers and activated carbon injection units; and, a selective non-catalytic reduction system will be installed, if it is necessary to comply with 40 CFR 60, Subpart Cb.

The facility is designed to process 3,000 tons/day, 18,000 tons/wk, and 936,000 tons/yr of municipal solid waste (MSW: trash and garbage) into RDF and saleable extractables, such as metals. The biomass fuel preparation system will process up to 400,000 tons per year of the bulky solid waste into biomass, which will be either transported off-site for use in biomass-fired cogeneration units or combusted on-site.

Each combustor has a design rated (nominal) capacity of 27 tons/hr (TPH) of RDF [648 tons/day (TPD): as determined by a rolling 12-month average]. RDF is the primary fuel; and, propane and natural gas are auxiliary fuels used for startup, shutdown, and malfunctions, and to support good combustion. The auxiliary burners have a maximum heat input of 80 MMBtu/hr. The facility is allowed to burn the facility's processed biomass fuel (5%, by weight) not transported off-site, natural gas, non-MSW materials as segregated waste (5%, by weight), used tires (3%, by weight), and on-specification used oil, oily water, oily sludge, spent greases and oily solid waste (such as rags) generated on-site. The maximum continuous rating (MCR) for each combustor is 180,000 lbs/hr steam at 625 psig and 730 ^{0}F, when firing RDF. Units 1 and 2 provide steam to a turbine-generator with a nameplate rating of 38.5 megawatts (MW; gross); and, Units 3 and 4 provide steam to a turbine-generator with a nameplate rating of 38.5 MW (gross); and, the electricity is used for in-plant electrical load and the excess is sold.

To comply with 40 CFR 60, Subpart Cb, combustion control systems will be installed for carbon monoxide and nitrogen oxides, as necessary, to meet the emissions limits. Continuous monitoring devices for combustion, process parameters, SO_2, NOx, and CO will be installed to improve combustion efficiency and control. The air pollution control equipment will consist of a spray dryer absorber (for acid gases), an activated carbon or comparable reactant injection system (for mercury and dioxin), and a fabric filter baghouse (for particulate matter and heavy metals). The facility will also have an ash building and handling system, a new lime storage silo, and an activated carbon storage silo. In addition, the existing stacks and flue gas handling systems will be replaced with new stacks and flue gas handling systems: Units 1 and 2 will share a common stack, each with its own flue; and, Units 3 and 4 will share a common stack, each with its own flue. Odors will be minimized by keeping the truck access doors closed during non-use; and, a negative pressure will be maintained on the garbage tipping floor and the air collected will be used as combustion air.

Also included in this permit are miscellaneous insignificant emissions units and/or activities.

This facility is a major source of hazardous air pollutants (HAPs).

The use of 'Permitting Notes' throughout this permit are for informational purposes, only, and are not permit conditions.

Subsection B. Summary of Emissions Unit ID Numbers and Brief Descriptions.

The facility consists of the following emissions units/activities:

E.U./Facility ID No.	Brief Description
-001/Unit 1	Refuse Derived Fuel (RDF) Spreader Stoker Combustor & Auxiliary Burners
-002/Unit 2	RDF Spreader Stoker Combustor & Auxiliary Burners
-003/Unit 3	RDF Spreader Stoker Combustor & Auxiliary Burners
-004/Unit 4	RDF Spreader Stoker Combustor & Auxiliary Burners
-rrr	MSW to RDF Processing Facility with Baghouses
-sss	Bulky Waste to Biomass Processing Facility with Baghouses
-ttt	Ash Building and Handling System Ash Storage Silo with Baghouse
-uuu	Lime Storage Silo with Baghouse
-vvv	Activated Carbon or Comparable Reactant Storage Silo with Baghouse

Please reference the Permit Number, the Facility Identification Number, and the appropriate Emissions Unit(s) ID Number(s) on all correspondence, test report submittals, applications, etc.

Subsection C. Relevant Documents.

{Permitting Note: The documents listed below are not a part of this permit; however, they are specifically related to this permitting action.}

These documents are provided to the permittee for informational purposes:
Appendix A-1, Abbreviations, Acronyms, Citations, and Identification Numbers (version dated 2/5/97)
Appendix H-1, Permit History/ID Number Transfers

These documents are on file with the permitting authority:
Construction permit No. 0250348-003-AC/PSD-FL-006(D) issued July 21, 2000.
Application for a Title V Permit Revision received October 10, 2000.
Initial Title V Permit issued October 12, 2000.

Section II. Facility-wide Conditions.

The following conditions apply facility-wide:

1. Appendix TV-3, Title V Conditions, is a part of this permit.
{Permitting note: Appendix TV-3, Title V Conditions is distributed to the permittee only. Other persons requesting copies of these conditions shall be provided one copy when requested or otherwise appropriate. If desired, a copy of Appendix TV-3, Title V Conditions can be downloaded from the Division of Air Resources Management's Internet Web site located at the following address:
"http://www.dep.state.fl.us/air/permitting/TitleVperm.htm".}

2. General Pollutant Emission Limiting Standards. Objectionable Odor Prohibited. The permittee shall not cause, suffer, allow, or permit the discharge of air pollutants which cause or contribute to an objectionable odor. The truck access doors to the facility shall remain closed except during normal working shifts when garbage is being received near the garbage storage pit area to allow vehicle passage. Also, a negative pressure shall be maintained on the garbage tipping floor and air from within the garbage building will be used as combustion air.
[Rule 62-296.320(2), F.A.C.; Rule 62-296.401(2)(b), F.A.C.; PA 77-08; and, PSD-FL-006(A) & (D)]

3. Prevention of Accidental Releases (Section 112(r) of CAA).
a. The permittee shall submit its Risk Management Plan (RMP) to the Chemical Emergency Preparedness and Prevention Office (CEPPO) RMP Reporting Center when, and if, such requirement becomes applicable ; and
b. The permittee shall submit to the permitting authority Title V certification forms or a compliance schedule in accordance with Rule 62-213.440(2), F.A.C.
[40 CFR 68]

4. Insignificant Emissions Units and/or Activities. Appendix I-1, List of Insignificant Emissions Units and/or Activities, is a part of this permit.
[Rules 62-213.440(1), 62-213.430(6), and 62-4.040(1)(b), F.A.C.]

5. Unregulated Emissions Units and/or Activities. Appendix U-1, List of Unregulated Emissions Units and/or Activities, is a part of this permit. **There are none deemed so at this time.**
[Rule 62-213.440(1), F.A.C.]

6. General Pollutant Emission Limiting Standards. Volatile Organic Compounds Emissions or Organic Solvents Emissions. The permittee shall allow no person to store, pump, handle, process, load, unload or use in any process or installation, volatile organic compounds or organic solvents without applying known and existing vapor emission control devices or systems deemed necessary and ordered by the Department.

{Permitting Note: No vapor emission control devices or systems are deemed necessary nor ordered by the Department as of the issuance date of this permit.}
[Rule 62-296.320(1)(a), F.A.C.]

7. General Particulate Emission Limiting Standards. General Visible Emissions Standard. Except for emissions units that are subject to a particulate matter or opacity limit set forth or established by rule and reflected by conditions in this permit, no person shall cause, let, permit, suffer or allow to be discharged into the atmosphere the emissions of air pollutants from any activity, the density of which is equal to or greater than that designated as Number 1 on the Ringelmann Chart (20 percent opacity). EPA Method 9 is the method of compliance pursuant to Chapter 62-297, F.A.C.
[Rules 62-296.320(4)(b)1. & 4., F.A.C.]

8. Reasonable precautions to prevent emissions of unconfined particulate matter at this facility include:

A. Facility's Processing of Biomass
(1) Windows and doors of the enclosed space shall be kept closed except when needed to minimize fugitive dust.
(2) Conveyor systems, screens, handling shredded wood fines and dust will be covered or enclosed.
(3) Shredded wood conveyor systems have baghouse pickup points at the transfer points.
(4) Wind breaks will be installed around the shredded wood load-out area.
(5) Floors in the enclosed area will be cleaned periodically.
(6) Loading areas for shredded wood will be cleaned or wetted as needed to minimize fugitive dust.
(7) Trucks transporting shredded wood will be covered.
(8) Landscaping or planting of vegetation.

B. Other Precautions to be taken at the Dade County Complex
(1) Employment of proper dust-control techniques to prevent fugitive dust emissions during construction activities such as demolition of buildings, grading roads, construction, and land clearing (including construction to be experienced during facility improvements to air pollution control equipment to meet the Emission Guideline requirements of 40 CFR 60, Subpart Cb).
(2) Application of asphalt, water, oil, chemicals, or other dust suppressants to roads, yards, open stock piles, and similar emissions units/activities as necessary to minimize fugitive dust (except for within the ash landfill).
(3) Confining abrasive blasting where possible.
(4) Operation of the landfill in accordance with all applicable portions of Chapter 62-7, F.A.C.
(5) Landscaping or planting of vegetation.
(6) All roads, except for roads within the ash landfill, shall be adequately paved to control visible emissions.
(7) Maximum 15 MPH speed limit signs shall be posted to minimize dust generation.
(8) Residue from grates, grate siftings, and ash from the combustor/boiler and fabric filter hoppers during normal operations shall be discharged into the ash handling and silo system to minimize fugitive dust.
(9) The ash/residue in the bottom ash building shall be kept sufficiently moist to minimize fugitive dust during storage and handling operations.
(10) Covering transport vehicles for ash.
(11) Wetting of bottom ash and fly ash as necessary to minimize fugitive dust prior to the use of conveyor systems.

[Rule 62-296.320(4)(c)2., F.A.C.; PSD-FL-006(A) & (D); PA 77-08C; and, 0250348-001-AV]

{Permitting Note: This condition presents the reasonable precautions to be implemented in accordance with Rule 62-296.320(4)(c), F.A.C., in lieu of the requirements of Condition No. 58 of Appendix TV-3.}

9. When appropriate, any recording, monitoring, or reporting requirements that are time-specific shall be in accordance with the effective date of the permit, which defines day one.
[Rule 62-213.440, F.A.C.]

10. The permittee shall submit all compliance related notifications and reports required of this permit to the Department's Southeast District office and the Dade County Department of Environmental Resources Management (DERM; also, known as the "designee") office at the following address:

Department of Environmental Protection
Southeast District
400 North Congress Avenue
West Palm Beach, Florida 33401
Telephone: 561/681-6600
Fax: 561/681-6755

Dade County Dept. of Environmental Resources Management
Air Section
33 Southwest Second Avenue, Suite 900
Miami, Florida 33130-1540
Telephone: 305/372-6925
Fax: 305/372-6954

[PSD-FL-006(D)]

11. Any reports, data, notifications, certifications, required to be sent to the United States Environmental Protection Agency, Region 4, should be sent to:

United States Environmental Protection Agency, Region 4
Air, Pesticides & Toxics Management Division
Air & EPCRA Enforcement Branch
Air Enforcement Section
61 Forsyth Street
Atlanta, Georgia 30303
Telephone: 404/562-9155
Fax: 404/562-9163

12. Statement of Compliance. The annual statement of compliance pursuant to Rule 62-213.440(3)(a)2., F.A.C., shall be submitted within 60 (sixty) days after the end of the calendar year. {See condition 51., APPENDIX TV-3, TITLE V CONDITIONS}.
[Rule 62-213.440(3)(a)2., F.A.C.]

Section III. Emissions Units and Conditions.

Subsection A. This section addresses the following emissions unit(s).

Reserved.

Subsection B. This section addresses the following emissions unit(s).

E.U./Facility ID Nos.	Brief Description
-001/Unit 1	Refuse Derived Fuel (RDF) Spreader Stoker Combustor & Auxiliary Burners
-002/Unit 2	RDF Spreader Stoker Combustor & Auxiliary Burners
-003/Unit 3	RDF Spreader Stoker Combustor & Auxiliary Burners
-004/Unit 4	RDF Spreader Stoker Combustor & Auxiliary Burners

{Permitting Note: These emissions units are allowed to burn refuse derived fuel as the main fuel. ***Refuse Derived Fuel*** means a type of municipal solid waste produced by processing municipal solid waste through shredding and size classification. This includes all classes of refuse derived fuel including low-density fluff refuse-derived fuel through densified refuse-derived fuel and pelletized refuse-derived fuel. ***Refuse-derived fuel stoker*** means a steam generating unit that combusts refuse-derived fuel in a semisuspension firing mode using air fed distributors. Each of the four refuse derive waste combustors (RDFs) produce at the manufacturer's maximum continuous rating (MCR) steam flow of 180,000 lbs/hr (at 625 psig and 730 ^{0}F). Short term capacity is limited by limiting steam production, which effectively limits heat input.}.
[PSD-FL-006(D); and, 40 CFR 60.51b]

ARMS emissions units Nos. -001, -002, -003 and -004 are identical rebuilt refuse derived fuel (RDF) spreader stoker combustors with Zurn attributes designated as Units 1, 2, 3 and 4, respectively. RDF is burned in suspension and on a grate with a primary and secondary air system to provide air in varying proportions to promote the proper combustion. Units 1 thru 4 began commercial operation January 1, 1982. Particulate matter emissions from Units 1, 2, 3 and 4 will be controlled fabric filters, while CO and NO_X emissions are controlled by good combustion practices. Following retrofitting to comply with the NSPS, 40 CFR 60, Subparts Cb and Eb, each boiler will have a maximum capacity of 648 tons of RDF per day, as determined by a rolling 12-month average. The design rated (nominal) capacity for each emissions unit is 27 tons/hour of RDF. Auxiliary burners associated with each RDF combustor will be permitted to fire propane and natural gas at a maximum heat input of 80 MMBtu/hr for startup, shutdown and malfunction, and at other times when necessary and consistent with good combustion practices. No. 2 fuel oil (with a maximum sulfur content of 0.08%, by weight) was allowed to be used for startup only in PA 77-08, but the facility has chosen not to use fuel oil in the auxiliary burners to date. Each unit will be allowed to produce at the manufacturer's maximum continuous rating (MCR) of 180,000 lbs/hr, at 625 psig and 730 ^{0}F, when firing RDF. Combustion control systems will be installed for carbon monoxide and nitrogen oxides, as necessary, to meet the emissions limits. Continuous monitoring devices for combustion and process parameters and SO_2, NOx and CO will be installed to improve combustion efficiency and control. The air pollution control equipment will consist of a spray dryer absorber (for acid gases), an activated carbon or comparable reactant injection system (for mercury and dioxin), and a fabric filter baghouse (for particulate matter and heavy metals). CO and NO_X emissions are currently controlled by good combustion practices; but, for NO_X, a selective non-catalytic reduction system will be installed, if it is necessary to comply with 40 CFR 60, Subpart Cb. In addition, new stacks and flue gas handling systems will replace the existing stacks and flue gas handling systems (Units 1 and 2 will each have a separate flue and share a common stack: Stack height = 250 feet, exit diameter = 8.5 feet, exit temperature = 270 °F, actual volumetric flow rate = 177,200 acfm, and maximum dry standard volumetric flow rate = 109,054 dscfm; and, Units 3 and 4 will each have a separate flue and share a common stack: Stack height = 250 feet, exit diameter = 8.5 feet, exit temperature = 300 °F, actual volumetric flow rate = 227,000 acfm, and maximum dry standard volumetric flow rate = 88,250 dscfm). Two 38.5 MW (gross) turbine-generators (using the steam from the four boilers) will supply the in-plant electrical load and the balance of the electricity generated will be sold. Odors will be minimized by keeping the truck access doors closed during non-use; and, a negative pressure will be maintained on the garbage tipping floor and the air collected will be used as combustion air.

{Permitting notes. These emissions units are regulated under NSPS - 40 CFR 60, Subpart Cb, Emissions Guidelines and Compliance Times for Large Municipal Waste Combustors That Are Constructed on or

Before September 20, 1994, adopted and incorporated by reference, subject to provisions, in Rule 62-204.800(8)(b), F.A.C.; NSPS - 40 CFR 60, Subpart E, Standards of Performance for Incinerators, adopted and incorporated by reference in Rule 62-204.800(7), F.A.C.; NSPS - 40 CFR 60, Subpart Eb, Standards of Performance for Large Municipal Waste Combustors That Are Constructed, Modified or Reconstructed on or Before September 20, 1994, adopted and incorporated by reference in Rule 62-204.800(7), F.A.C.; Rule 62-212.400(5), F.A.C., Prevention of Significant Deterioration (PSD) (PSD-FL-006 and PSD-FL-006(A thru D); Rule 62-212.400(6), F.A.C., Best Available Control Technology (BACT); Rule 62-296.401(2), F.A.C., Incinerators; Rule 62-296.416, F.A.C., Waste-to-Energy Facilities; and, PA 77-08 & 77-08(A, B, & C). Also, please note that conditions in 40 CFR 60, Subpart Cb, reference requirements that are contained in 40 CFR 60, Subpart Eb.}

The following specific conditions, unless revised, apply to the emissions unit(s) listed above:

General

B.0. The completion of installation of air pollution control equipment and completion of performance testing shall have been done no later than December 19, 2000, which is specified in the State 111(d) Plan approved by the EPA on November 13, 1997, and effective January 12, 1998.
[0250348-001-AV]

B.1. The Standards of Performance for New Stationary Sources adopted by reference in Rule 62-204.800(7), F.A.C., the Emission Guidelines for Existing Sources adopted by reference in Rule 62-204.800(8), F.A.C., and the National Emissions Standards for Hazardous Air Pollutants adopted by reference in Rule 62-204.800(9), F.A.C. shall be controlling over other standards in the air pollution rules of the Department except that any emissions limiting standard contained in or determined pursuant to the air pollution rules of the Department which is more stringent than one contained in a Standard of Performance, an Emission Guideline, or a National Emission Standard, or which regulates emissions of pollutants or emissions units not regulated by an applicable Standard of Performance, Emission Guideline, or National Emission Standard, shall apply.
[Rules 62-204.800(7)(c), (8)(a)1., and (9)(c), F.A.C.]

B.2. Definitions. For the purposes of Rules 62-204.800(7), (8), and (9), F.A.C., the definitions contained in the various provisions of 40 CFR Parts 60 and 61, adopted herein shall apply except that the term "Administrator" when used in 40 CFR Parts 60 and 61, shall mean the Secretary or the Secretary's designee except as noted in 40 CFR 61.157.
[40 CFR 60.2; and, Rules 62-204.800(7)(a), (8)(a)2., and, (9)(a), F.A.C.]

B.3. Definitions - Subpart Cb. For purposes of Rule 62-204.800(8)(b), F.A.C., the definitions in 40 CFR 60.51b shall apply except for the term "municipal waste combustor plant", which shall have the same meaning as defined in 40 CFR 60.31b.
[Rule 62-204.800(8)(b)2., F.A.C.]

B.4. Circumvention. No owner or operator subject to the provisions of 40 CFR 60 shall build, erect, install, or use any article, machine, equipment or process, the use of which conceals an emission which would otherwise constitute a violation of an applicable standard. Such concealment includes, but is not limited to, the use of gaseous diluents to achieve compliance with an opacity standard or with a standard which is based on the concentration of a pollutant in the gases discharged to the atmosphere.
[40 CFR 60.12]

B.5. Each emissions unit shall have a metal name plate affixed in a conspicuous place on the shell showing manufacturer, model number, type waste, rated capacity, and certification number.
[PA 77-08; and, PSD-FL-006(D)]

B.6. The height of the boiler stacks (2) shall not be less than 250 feet above the ground level at the base of the stack.
[PSD-FL-006(A) & (D)]

B.7. Units 1 thru 4 are subject to the requirements of 40 CFR 60, Subpart E, except that where requirements within this permit are more restrictive, the requirements of this permit shall apply.
[Rule 62-4.070(3), F.A.C.]

Essential Potential to Emit (PTE) Parameters

B.8. Capacity.
(1) RDF Charging Rate and Heat Input. The design rated (nominal) capacity of each emissions unit is 27 tons/hour of RDF. The maximum charging rate of each emissions unit is 648 tons/day of RDF and other permitted fuels, as determined by a rolling 12-month average (see specific conditions **B.12.** and **B.107.**).
(2) Facility's Municipal Solid Waste Processing Rates. The facility is permitted to process a maximum of 3,000 tons/day, 18,000 tons/wk, and 936,000 tons/yr of RDF.
(3) Biomass Fuel Preparation System. The biomass fuel preparation system is allowed to process up to 400,000 tons/yr of the bulky solid waste into biomass, which will be either transported off-site for use in biomass-fired cogeneration units or combusted on-site.
(4) Steam Flow. Each boiler pair shall not exceed an average of 180,000 pounds of steam produced per hour per unit, based on a 24-hr block averaged measurement.
(5) Load Level. Unit load means the steam load of the municipal waste combustor (MWC) measured as specified in 40 CFR 60.58(i)(6). Compliance with load level requirements shall be determined by a steam meter using ASME Power Test Code for Steam Generating Units, Power Test Code 4.1, section 4 (see 40 CFR 60.58b(i)(6)(ii) & (iii). Each MWC unit shall not operate at a load level greater than 110 percent of the unit's "maximum demonstrated unit load", based on a 4-hour block averaged measurements of steam flow. The "maximum demonstrated unit load" is defined by specific condition B.10. (see specific condition **B.10.**).
(6) The procedures specified in paragraphs (a) and (b) shall be used for calculating municipal waste combustor unit capacity as defined under 40 CFR 60.51b.

(a) For municipal waste combustor units capable of combusting municipal solid waste continuously for a 24-hour period, municipal waste combustor unit capacity shall be calculated based on 24 hours of operation at the maximum charging rate. The maximum charging rate shall be determined as specified in paragraphs (i) and (ii) as applicable.

(i) For combustors that are designed based on heat capacity, the maximum charging rate shall be calculated based on the maximum design heat input capacity of the unit and a heating value of 12,800 kilojoules per kilogram for combustors firing refuse-derived fuel and a heating value of 10,500 kilojoules per kilogram for combustors firing municipal solid waste that is not refuse-derived fuel.

(ii) For combustors that are not designed based on heat capacity, the maximum charging rate shall be the maximum design charging rate.

(b) For batch feed municipal waste combustor units, municipal waste combustor unit capacity shall be calculated as the maximum design amount of municipal solid waste that can be charged per batch multiplied by the maximum number of batches that could be processed in a 24-hour period. The maximum number of batches that could be processed in a 24-hour period is calculated as 24 hours

divided by the design number of hours required to process one batch of municipal solid waste, and may include fractional batches (e.g., if one batch requires 16 hours, then 24/16, or 1.5 batches, could be combusted in a 24-hour period). For batch combustors that are designed based on heat capacity, the design heating value of 12,800 kilojoules per kilogram for combustors firing refuse-derived fuel and a heating value of 10,500 kilojoules per kilogram for combustors firing municipal solid waste that is not refuse-derived fuel shall be used in calculating the municipal waste combustor unit capacity.
[40 CFR 60.31b and 40 CFR 60.58b(j); Rules 62-4.160(2) and 62-210.200(PTE), F.A.C.; and, PSD-FL-006(D)]

B.9. Emissions Unit Operating Rate Limitation After Testing. See specific condition **B.70.**
[Rule 62-297.310(2), F.A.C.]

B.10. Maximum Demonstrated Municipal Waste Combustor Unit Load. Maximum demonstrated municipal waste combustor unit load means the highest 4-hour arithmetic average municipal waste combustor unit load achieved during four consecutive hours during the most recent dioxin/furan performance test demonstrating compliance with the applicable limit for municipal waste combustor organics specified in specific condition **B.34.**
[40 CFR 60.34b(b) and 40 CFR 60.51b]

B.11. Maximum Demonstrated Particulate Matter Control Device Temperature. Maximum demonstrated particulate matter control device temperature means the highest 4-hour arithmetic average flue gas temperature measured at the particulate matter control device inlet during four consecutive hours during the most recent dioxin/furan performance test demonstrating compliance with the applicable limit for municipal waste combustor organics specified in specific condition **B.34.**
[40 CFR 60.34b(b) and 40 CFR 60.51b]

B.12. Methods of Operation - Fuels.
(1) Refuse Derived Fuel. The primary fuel for Units 1 thru 4 is RDF, including the items and materials that fit within the definition of MSW contained in either 40 CFR 60.51b or Section 403.706(5), F.S.
(2) Unauthorized Fuel. Subject to the limitations contained in this permit, the authorized fuels for the facility also include the other solid wastes that are not MSW, which are described in (4) thru (7), below. However, the facility

(a) shall not burn:
1. those materials that are prohibited by state or federal law;
2. those materials that are prohibited by this permit;
3. lead acid batteries;
4. hazardous waste;
5. nuclear waste;
6. radioactive waste;
7. sewage sludge;
8. used oil, **except for what is generated on-site**;
9. explosives; or,
10. beryllium-containing waste, as defined in 40 CFR 61, Subpart C; and,

(b) shall not knowingly burn:

1. untreated biomedical waste from biomedical waste generators regulated pursuant to Chapter 64E-16, F.A.C., and from other similar generators (or sources); or,
2. segregated loads of biological waste.

(3) The fuel may be received either as a mixture or as a single-item stream (segregated load) of discarded materials. If the facility intends to use an authorized fuel that is segregated non-MSW material, the fuel shall be either:

(a) well mixed with MSW in the refuse pit; or
(b) alternately charged with MSW in the hopper.

The facility operator shall prepare and maintain records concerning the description and quantities of all segregated loads of non-MSW material which are received and used as fuel at the facility, and subject to a percentage weight limitation, below (see 5, 6 and 7). For the purposes of this permit, a segregated load is defined to mean a container or truck that is almost completely or exclusively filled with a single item or homogeneous composition of waste material, as determined by visual observation.
(4) Other Solid Waste. Subject to the conditions and limitations contained in this permit, the following other solid waste may be used as fuel at the facility:

SOLID WASTE FROM ON-SITE OPERATIONS

Used Oil from on-site operations

(a) The constituents and properties of the *on-spec used oil* generate from on-site operations shall comply with the following allowable concentration levels, as stipulated and defined in 40 CFR 279.10 (July 1, 1998 version), which is adopted by reference in Rule 62-730.181, F.A.C.

Constituent/Property	Allowable Concentration
Cadmium	2 ppm maximum
Arsenic	5 ppm maximum
Chromium	10 ppm maximum
Lead	100 ppm maximum
Total Halogens	1000 ppm maximum
Flash Point	100 ° F minimum
Polychlorinated Byphenyls (PCBs)	Less than 2 ppm

(b) The heating value of the waste oil shall also be determined during quarterly testing. No more than 0.5 percent of the maximum design heat input rate to the units, on a monthly average, of oily wastes shall be disposed of in the units.
(c) On site generated *on-specification used oil, oily water, oily sludge, spent greases and oily solid waste (such as rags)* burned at this facility shall not be a hazardous waste as defined by Rule 62-730.030, F.A.C., or 40 CFR Part 261 (July 1, 1999 version). These materials shall conform to the standards of 40 CFR 279.11 and 40 CFR 761.20(e). It shall not include fuels or blended fuels consisting in whole or in part of hazardous waste or which include mixture of any solid waste generated from the treatment, storage, or disposal of hazardous waste. The on-spec used oil shall be burned in compliance with Section 403.769(3), F.S.
(d) The on-site generated *on-specification* used oil samples (representative of the material disposed of) shall be analyzed by EPA Recommended Analytical Procedures for Used Oil for the following constituent/property, associated unit, and using the test methods indicated:

Constituent/Property	Unit	Test Method
Cadmium	ppm	EPA SW-846(6010)

Arsenic	ppm	EPA SW-846(6010)
Chromium	ppm	EPA SW-846(6010)
Lead	ppm	EPA SW-846(6010)
Total Halogens	ppm	EPA SW-846(9252)
Sulfur	percent	ASTM D129 or ASTM D1552
Flash Point	degree F	EPA SW-846(1010)
Heat of Combustion	Btu/gal	ASTM D240
Density	lbs/gal	
Polychlorinated Byphenyls (PCB's)	ppm	EPA SW-846(0010) and EPA 680
Ash		

NOTE: Other test methods may be used only after receiving written prior approval from the Department.

SOLID WASTE FROM OFF-SITE OPERATIONS

(a) Confidential, proprietary or special documents (including but not limited to business records, lottery tickets, event tickets, coupons and microfilm);
(b) Contraband which is being destroyed at the request of appropriately authorized local, state or federal governmental agencies, provided that such material is not an explosive, a propellant, a hazardous waste, or otherwise prohibited at the facility. For the purposes of this section, contraband includes but is not limited to drugs, narcotics, fruits, vegetables, plants, counterfeit money, and counterfeit consumer goods;
(c) Wood pallets, clean wood, and land clearing debris;
(d) Packaging materials and containers;
(e) Clothing, natural and synthetic fibers, fabric remnants, and similar debris, including but not limited to aprons and gloves; or
(f) Rugs, carpets, and floor coverings, but not asbestos-containing materials or polyethylene or polyurethane vinyl floor coverings.

(5) Waste Tires. Subject to the conditions and limitations contained in this permit, waste tires may be used as fuel at the facility. The total quantity of waste tires received as segregated loads and burned at the facility shall not exceed 3%, by weight, of the facility's total fuel. Compliance with this limitation shall be determined on a calendar monthly basis in accordance with specific condition **B.108.**, below.
(6) Biomass Fuel. Subject to the conditions and limitations contained in this permit, biomass fuel may be burned at this facility (authorized fuel that is not MSW material). The total quantity of biomass material received as segregated load and burned in the combustion units shall not exceed 5%, by weight, of the facility's total fuel. Compliance with this limitation shall be determined on a calendar monthly basis in accordance with specific condition **B.108.**, below.
(7) Other Solid Waste/Segregated Loads. Subject to the conditions and limitations contained in this permit, the following other solid waste materials may be used as fuel at the facility (i.e. the following are authorized fuels that are non-MSW material). The total quantity of the following non-MSW material received as segregated loads and burned at the facility shall not exceed 5%, by weight, of the facility's total fuel. Compliance with this limitation shall be determined by using a calendar monthly basis in accordance with specific condition **B.108.**, below.

(a) Construction and demolition debris.
(b) Oil spill debris from aquatic, coastal, estuarine or river environments. Such items or materials include but are not limited to rags, wipes, and absorbents.

(c) Items suitable for human, plant or domesticated animal use, consumption or application where the item's shelf-life has expired or the generator wishes to remove the items from the market. Such items or materials include but are not limited to off-specification or expired consumer products, pharmaceuticals, medications, health and personal care products, cosmetics, foodstuffs, nutritional supplements, returned goods, and controlled substances.
(d) Consumer-packaged products intended for human or domesticated animal use or application but not consumption. Such items or materials include but are not limited to carpet cleaners, household or bathroom cleaners, polishes, waxes and detergents.
(e) Waste materials that:
(i) are generated in the manufacture of items in categories (c) or (d), above and are functionally or commercially useless (expired, rejected or spent); or
(ii) are not yet formed or packaged for commercial distribution. Such items or materials must be substantially similar to other items or materials routinely found in MSW.
(f) Waste materials that contain oil from:
(i) the routine cleanup of industrial or commercial establishments and machinery; or
(ii) spills of virgin or used petroleum products. Such items or materials include but are not limited to rags, wipes, and absorbents.
(g) Used oil and used oil filters. Used oil containing a PCB concentration equal or greater than 50 ppm shall not be burned, pursuant to the limitations of 40 CFR 761.20(e).
(h) Waste materials generated by manufacturing, industrial or agricultural activities, provided that these items or materials are substantially similar to items or materials that are found routinely in MSW, subject to prior approval of the Department.
(8) Other fuels or wastes shall not be burned in the emissions units without prior specific written approval of the Secretary of the Department of Environmental Protection.
[Rules 62-4.160(2), 62-210.200, and 62-213.440(1), F.A.C.; PSD-FL-006(D); and, PA 77-08]

B.13. Auxiliary Burners. Auxiliary burners for each emissions unit shall be fired only with propane or natural gas fuel during startups, shutdowns and malfunctions, and at other times when necessary and consistent with good combustion practices. The maximum heat input shall not exceed 80 MMBtu/hr per burner.
[PSD-FL-006(D)]

B.14. Hours of Operation. Each emissions unit is allowed to operate continuously, i.e., 8,760 hrs/yr.
[Rule 62-210.200(PTE), F.A.C.; and, PSD-FL-006(D)]

Operating Practices and Requirements

B.15. No owner or operator of an affected facility shall cause such facility to operate at a load level greater than 110 percent of the maximum demonstrated municipal waste combustor unit load as defined in specific condition **B.10.**, except as specified below. The averaging time is specified in specific condition **B.18.**
(1) During the annual dioxin/furan performance test and the two weeks preceding the annual dioxin/furan performance test, no municipal waste combustor unit load limit is applicable.
(2) The municipal waste combustor unit load limit may be waived in accordance with permission granted by the Administrator or delegated State regulatory authority for the purpose of evaluating system performance, testing new technology or control technologies, diagnostic testing, or related activities for the purpose of improving facility performance or advancing the state-of-the-art for controlling facility emissions.
[40 CFR 60.34b(b) and 40 CFR 60.53b(b)]

B.16. Control Device Inlet Temperature. No owner or operator of an affected facility shall cause such facility to operate at a temperature, measured at the particulate matter control device inlet, exceeding 17° C above the maximum demonstrated particulate matter control device temperature as defined in specific condition **B.11.**, except as specified below. The averaging time is specified in specific condition **B.18.** These requirements apply to each particulate matter control device utilized at the affected facility.
(1) During the annual dioxin/furan performance test and the two weeks preceding the annual dioxin/furan performance test, no particulate matter control device temperature limitations are applicable.
(2) The particulate matter control device temperature limits may be waived in accordance with permission granted by the Administrator or delegated State regulatory authority for the purpose of evaluating system performance, testing new technology or control technologies, diagnostic testing, or related activities for the purpose of improving facility performance or advancing the state-of-the-art for controlling facility emissions.
[40 CFR 60.34b(b) and 40 CFR 60.53b(c)]

B.17. Control Device Inlet Temperature. Except during a malfunction, the maximum flue gas temperature at the final particulate matter control device inlet, during the combustion of RDF, shall not exceed 30 °F above the maximum temperature measured at the particulate matter control device inlet during the most recent mercury compliance test under which the facility was found to be in compliance with the mercury emission limit specified in specific condition **B.27.**, based on a 4-hour block arithmetic average. If the maximum flue gas temperature standard is exceeded during a malfunction, then up to 3 hours of that malfunction may be excluded from the 4-hour block arithmetic average.
[PSD-FL-006(A) & (D)]

B.18. Operating Requirements. The procedures specified in paragraphs (1) through (12) shall be used for determining compliance with the operating requirements under 40 CFR 60.53b.
(1) Compliance with the carbon monoxide emission limits in 40 CFR 60.53b(a) shall be determined using a 4-hour block arithmetic average for all types of affected facilities except mass burn rotary waterwall municipal waste combustors and refuse-derived fuel stokers.
(2) For affected mass burn rotary waterwall municipal waste combustors and refuse-derived fuel stokers, compliance with the carbon monoxide emission limits in 40 CFR 60.53b(a) shall be determined using a 24-hour daily arithmetic average.
(3) The owner or operator of an affected facility shall install, calibrate, maintain, and operate a continuous emission monitoring system for measuring carbon monoxide at the combustor outlet and record the output of the system and shall follow the procedures and methods specified in paragraphs (i) through (iii).

(i) The continuous emission monitoring system shall be operated according to Performance Specification 4A in Appendix B of 40 CFR 60.

(ii) During each relative accuracy test run of the continuous emission monitoring system required by Performance Specification 4A in Appendix B of 40 CFR 60, carbon monoxide and oxygen (or carbon dioxide) data shall be collected concurrently (or within a 30- to 60-minute period) by both the continuous emission monitors and the test methods specified in paragraphs (A) and (B).

(A) For carbon monoxide, EPA Reference Method 10, 10A, or 10B shall be used.

(B) For oxygen (or carbon dioxide), EPA Reference Method 3, 3A, or 3B, as applicable shall be used.

(iii) The span value of the continuous emission monitoring system shall be 125 percent of the maximum estimated hourly potential carbon monoxide emissions of the municipal waste combustor unit.

(4) The 4-hour block and 24-hour daily arithmetic averages specified in paragraphs (1) and (2) shall be calculated from 1-hour arithmetic averages expressed in parts per million by volume corrected to 7 percent oxygen (dry basis). The 1-hour arithmetic averages shall be calculated using the data points generated by the continuous emission monitoring system. At least two data points shall be used to calculate each 1-hour arithmetic average.
(5) The owner or operator of an affected facility may request that compliance with the carbon monoxide emission limit be determined using carbon dioxide measurements corrected to an equivalent of 7 percent oxygen. The relationship between oxygen and carbon dioxide levels for the affected facility shall be established as specified in 40 CFR 60.58b(b)(6).
(6) The procedures specified in paragraphs (i) through (v) shall be used to determine compliance with load level requirements under 40 CFR 60.53b(b).

(i) The owner or operator of an affected facility with steam generation capability shall install, calibrate, maintain, and operate a steam flow meter or a feedwater flow meter; measure steam (or feedwater) flow in kilograms per hour (or pounds per hour) on a continuous basis; and record the output of the monitor. Steam (or feedwater) flow shall be calculated in 4-hour block arithmetic averages.

(ii) The method included in the ``American Society of Mechanical Engineers Power Test Codes: Test Code for Steam Generating Units, Power Test Code 4.1-1964 (R1991)" section 4 (incorporated by reference, see 40 CFR 60.17) shall be used for calculating the steam (or feedwater) flow required under paragraph (6)(i). The recommendations in ``American Society of Mechanical Engineers Interim Supplement 19.5 on Instruments and Apparatus: Application, Part II of Fluid Meters, 6th edition (1971)," chapter 4 (incorporated by reference-see 40 CFR 60.17) shall be followed for design, construction, installation, calibration, and use of nozzles and orifices except as specified in (iii).

(iii) Measurement devices such as flow nozzles and orifices are not required to be recalibrated after they are installed.

(iv) All signal conversion elements associated with steam (or feedwater flow) measurements must be calibrated according to the manufacturer's instructions before each dioxin/furan performance test, and at least once per year.

(7) To determine compliance with the maximum particulate matter control device temperature requirements under 40 CFR 60.53b(c), the owner or operator of an affected facility shall install, calibrate, maintain, and operate a device for measuring on a continuous basis the temperature of the flue gas stream at the inlet to each particulate matter control device utilized by the affected facility. Temperature shall be calculated in 4-hour block arithmetic averages.
(8) The maximum demonstrated municipal waste combustor unit load shall be determined during the initial performance test for dioxins/furans and each subsequent performance test during which compliance with the dioxin/furan emission limit specified in 40 CFR 60.52b(c) is achieved. The maximum demonstrated municipal waste combustor unit load shall be the highest 4-hour arithmetic average load achieved during four consecutive hours during the most recent test during which compliance with the dioxin/furan emission limit was achieved.
(9) For each particulate matter control device employed at the affected facility, the maximum demonstrated particulate matter control device temperature shall be determined during the initial performance test for dioxins/furans and each subsequent performance test during which compliance with the dioxin/furan emission limit specified in 40 CFR 60.52b(c) is achieved. The maximum demonstrated particulate matter control device temperature shall be the highest 4-hour arithmetic average temperature achieved at the particulate matter control device inlet during four consecutive hours during the most recent test during which compliance with the dioxin/furan limit was achieved.
(10) At a minimum, valid continuous emission monitoring system hourly averages shall be obtained as specified in paragraphs (i) and (ii) for 75 percent of the operating hours per day for 90 percent of the operating days per calendar quarter that the affected facility is combusting municipal solid waste.

(i) At least two data points per hour shall be used to calculate each 1-hour arithmetic average.
(ii) At a minimum, each carbon monoxide 1-hour arithmetic average shall be corrected to 7 percent oxygen on an hourly basis using the 1-hour arithmetic average of the oxygen (or carbon dioxide) continuous emission monitoring system data.

(11) All valid continuous emission monitoring system data must be used in calculating the parameters specified under 40 CFR 60.58b(i) even if the minimum data requirements of paragraph (10) are not met. When carbon monoxide continuous emission data are not obtained because of continuous emission monitoring system breakdowns, repairs, calibration checks, and zero and span adjustments, emissions data shall be obtained using other monitoring systems as approved by the Administrator or EPA Reference Method 10 to provide, as necessary, the minimum valid emission data.
(12) Quarterly accuracy determinations and daily calibration drift tests for the carbon monoxide continuous emission monitoring system shall be performed in accordance with Procedure 1 in Appendix F of 40 CFR 60.
[40 CFR 60.38b and 40 CFR 60.58b(i); and, PSD-FL-006(D)]

Operator Training and Certification

B.19. Standards for municipal waste combustor operator training and certification.
(a) No later than the date 6 months after the date of startup of an affected facility or 12 months after State plan approval [40 CFR 60.39b(c)(4)(ii)], whichever is later, each chief facility operator and shift supervisor shall obtain and maintain a current provisional operator certification from either the American Society of Mechanical Engineers [QRO-1-1994 (incorporated by reference - see 40 CFR 60.17 of Subpart A)] or a State certification program.
(b) No later than the date 6 months after the date of startup of an affected facility or 12 months after State plan approval [40 CFR 60.39b(c)(4)(ii)], whichever is later, each chief facility operator and shift supervisor shall have completed full certification or shall have scheduled a full certification exam with either the American Society of Mechanical Engineers [QRO-1-1994 (incorporated by reference - see 40 CFR 60.17 of Subpart A)] or a State certification program.
(c) No owner or operator of an affected facility shall allow the facility to be operated at any time unless one of the following persons is on duty and at the affected facility: A fully certified chief facility operator, a provisionally certified chief facility operator who is scheduled to take the full certification exam according to the schedule specified in paragraph (b), a fully certified shift supervisor, a provisionally certified shift supervisor who is scheduled to take the full certification exam according to the schedule specified in paragraph (b).
(1) The requirement specified in paragraph (c) shall take effect 6 month after the date of startup of the affected facility or 12 months after State plan approval [40 CFR 60.39b(c)(4)(ii)], whichever is later.
(2) If one of the persons listed in paragraph (c) must leave the affected facility during their operating shift, a provisionally certified control room operator who is onsite at the affected facility may fulfill the requirement in paragraph (c).
(d) All chief facility operators, shift supervisors, and control room operators at affected facilities must complete the EPA or State municipal waste combustor operator training course no later than the date 6 months after the date of startup of the affected facility, or by 12 months after State plan approval [40 CFR 60.39b(c)(4)(iii)], whichever is later.
(e) The owner or operator of an affected facility shall develop and update on a yearly basis a site-specific operating manual that shall, at a minimum, address the elements of municipal waste combustor unit operation specified in paragraph (e)(1) through (e)(11).
(1) A summary of the applicable standards;
(2) A description of basic combustion theory applicable to a municipal waste combustor unit;

(3) Procedures for receiving, handling, and feeding municipal solid waste;
(4) Municipal waste combustor unit startup, shutdown, and malfunction procedures;
(5) Procedures for maintaining proper combustion air supply levels;
(6) Procedures for operating the municipal waste combustor unit within the standards established;
(7) Procedures for responding to periodic upset or off-specification conditions;
(8) Procedures for minimizing particulate matter carryover;
(9) Procedures for handling ash;
(10) Procedures for monitoring municipal waste combustor unit emissions; and
(11) Reporting and recordkeeping procedures.

(f) The owner or operator of an affected facility shall establish a training program to review the operating manual according to the schedule specified in paragraphs (f)(1) and (f)(2) with each person who has responsibilities affecting the operation of an affected facility including, but not limited to, chief facility operators, shift supervisors, control room operators, ash handlers, maintenance personnel, and crane/load handlers.

(1) Each person specified in paragraph (f) shall undergo initial training no later than the date specified in paragraph (f)(1)(i), (f)(1)(ii), or (f)(1)(iii), whichever is later.
(i) The date 6 months after the date of startup of the affected facility;
(ii) The date prior to the day the person assumes responsibilities affecting municipal waste combustor unit operation; or
(iii) 12 months after State plan approval [40 CFR 60.39b(c)(4)(iii)].
(2) Annually, following the initial review required by paragraph (f)(1).

(g) The operating manual required by paragraph (e) shall be kept in a readily accessible location for all persons required to undergo training under paragraph (f). The operating manual and records of training shall be available for inspection by the EPA or its delegated enforcement agency upon request.

(h) A list of all certified personnel shall be submitted to the Department's Southeast District office and the Dade County's DERM office.

[40 CFR 60.35b, 40 CFR 60.39b(c)(4)(ii) & (iii), and 40 CFR 60.54b; and, PSD-FL-006(D)]

B.20. The requirement specified in 40 CFR 60.54b(d) does not apply to chief operators, shift supervisors, and control room operators who have obtained full certification from the American Society of Mechanical Engineers on or before the date of State plan approval.
[40 CFR 60.39b(c)(4)(iii)(A)]

B.21. The owner or operator of a designated facility may request that the EPA Administrator waive the requirement specified in 40 CFR 60.54b(d) for chief operators, shift supervisors, and control room operators who have obtained provisional certification from the American Society of Mechanical Engineers on or before the date of State plan approval.
[40 CFR 60.39b(c)(4)(iii)(B)]

B.22. The initial training requirements specified in 40 CFR 60.54b(f)(1) shall be completed no later than the date specified in (1), (2), or (3), whichever is later.
(1) The date six (6) months after the date of startup of the affected facility;
(2) Twelve (12) months after State plan approval; or
(3) The date prior to the day when the person assumes responsibilities affecting municipal waste combustor unit operation.
[40 CFR 60.39b(c)(4)(iii)(C)]

Emission Limitations and Standards

Particulate Matter

B.23. Particulate matter (PM) emissions from the baghouse shall not exceed 0.011 grains/dry standard ft^3 (gr/dscf), corrected to 7 percent O_2, dry basis, and 29.0 tons/yr per emissions unit.
[PSD-FL-006(D)]

PM_{10}

B.24. PM emissions less than 10 micron diameter from the baghouse shall not exceed 0.011 gr/dscf, corrected to 7 percent O_2, dry basis, and 29.0 tons/yr per emissions unit.
[PSD-FL-006(D)]

Visible Emissions

B.25. The emission limit for opacity exhibited by the gases discharged to the atmosphere is 10 percent (6-minute block average).
[40 CFR 60.33b(a)(1)(iii); and, PSD-FL-006(D)]

Cadmium

B.26. Cadmium emissions shall not exceed 15 ug/m^3, corrected to 7 percent O_2, dry basis, and 0.027 ton/yr per emissions unit.
[PSD-FL-006(D)]

Mercury

B.27. The maximum emission limits for mercury contained in the gases discharged to the atmosphere per emissions unit are:
(1) 0.070 milligrams per dry standard cubic meter, corrected to 7 percent O_2, dry basis; or,
(2) 15 percent, by weight, of the mercury in the flue gas upstream of the mercury control device (85-percent reduction by weight), whichever is less stringent; and,
(3) 0.080 ton/yr.
[40 CFR 60.33b(a)(3); Rule 62-296.416(3)(a)1., F.A.C.; and, PSD-FL-006(D)]

B.28. Facilities with sulfur dioxide and hydrogen chloride control equipment in place or under construction as of July 1, 1993, and which choose to control mercury emissions through the use of mercury control equipment, shall comply with the mercury emissions limiting standard of Rule 62-296.416(3)(a)1., F.A.C., by July 1, 1995. All other facilities choosing to control mercury emissions through the use of mercury control equipment shall comply with the mercury emissions limiting standard of Rule 62-296.416(3)(a)1., F.A.C., by the date that the facility is required to demonstrate compliance with sulfur dioxide and hydrogen chloride emission limits, which limits are established at Rule 62-204.800(8)(b), F.A.C.
[Rule 62-296.416(3)(a)2., F.A.C.]

B.29. Facilities subject to the mercury emissions limiting standard of Rule 62-296.416(3)(a)1., F.A.C., shall demonstrate individual emissions unit compliance by the compliance date specified in Rule 62-296.416(3)(a)2., F.A.C., and annually thereafter.
[Rule 62-296.416(3)(a)3., F.A.C.]

B.30. Mercury Emissions Inventory. For emissions inventory purposes, all waste-to-energy facilities with charging rates of 40 tons or more per day shall perform annual individual emissions unit mercury emissions tests and report the results to the Department. This testing shall begin during calendar year 1993 and end upon initiation of mercury testing pursuant to Rule 62-296.416(3)(a) or (b), F.A.C.
[Rule 62-296.416(3)(c), F.A.C.]

Lead

B.31. Lead emissions, per emissions unit, shall not exceed 380 ug/m^3, corrected to 7 percent O_2, dry basis; and, 0.44 ton/yr.
[PSD-FL-006(D)]

Sulfur Dioxide

B.32. The emission limits for sulfur dioxide contained in the gases discharged to the atmosphere per emissions unit are:
(1) 29 parts per million by volume, corrected to 7 percent O_2, dry basis; or,
(2) 25 percent of the potential sulfur dioxide emission concentration (75-percent reduction by weight or volume); and,
(3) 214.2 tons/yr.
(4) Compliance with the limits of (1) and (2), above, is based on a 24-hour daily period (i.e., block; midnight to midnight) geometric mean, whichever is less stringent.
[40 CFR 60.33b(b)(3)(i); and, PSD-FL-006(D)]

Hydrogen Chloride

B.33. The emission limits for hydrogen chloride contained in the gases discharged to the atmosphere per emissions unit are:
(1) 25 parts per million by volume, corrected to 7 percent O_2, dry basis; or
(2) 5 percent of the potential hydrogen chloride emission concentration (95-percent reduction by weight or volume), whichever is less stringent; and,
(3) 57.1 tons/yr.
[40 CFR 60.33b(b)(3)(ii); and, PSD-FL-006(D)]

Dioxins/Furans

B.34. The emission limits for dioxins/furans contained in the gases discharged to the atmosphere per emissions unit that do not employ an electrostatic precipitator-based emission control system are 30 nanograms per dry standard cubic meter (total mass of tetra- through octa- chlorinated dibenzo-p-dioxins and dibenzofurans), corrected to 7 percent oxygen; and, 0.000038 ton/yr.
[40 CFR 60.33b(c)(1)(ii); and, PSD-FL-006(D)]

Nitrogen Oxides

B.35. The emission limits for nitrogen oxides contained in the gases discharged to the atmosphere per emissions unit are 250 parts per million by volume, corrected to 7 percent O_2, dry basis, 24-hour daily arithmetic average; and, 614.9 tons/yr. As specified in 40 CFR 60.33b(d)(1), a facility-wide average emissions limit of 230 ppmvd, corrected to 7 percent O_2, 24-hour average, shall be applied in lieu of the per emissions unit limit provided that the conditions of 40 CFR 60.33b(d)(1) are met.
[40 CFR 60.33b(d); and, PSD-FL-006(D)]

Carbon Monoxide

B.36. The emission limits for carbon monoxide contained in the gases discharged to the atmosphere per emissions unit are 200 parts per million by volume, measured at the combustor outlet in conjunction with a measurement of oxygen concentration, corrected to 7 percent O_2, dry basis, 24-hour daily arithmetic average; and, 267.7 tons/yr.
[40 CFR 60.34b(a); and, PSD-FL-006(D)]

Arsenic

B.37. Arsenic emissions, per emissions unit, shall not exceed 9.3 ug/m^3, corrected to 7 percent O_2, dry basis; and, 0.011 ton/yr.
[PSD-FL-006(D)]

Beryllium

B.38. Beryllium emissions, per emissions unit, shall not exceed 0.46 ug/m^3, corrected to 7 percent O_2, dry basis; and, 0.0005 ton/yr.
[PSD-FL-006(D)]

Total Fluorides

B.39. Fluoride emissions, per emissions unit, shall not exceed 840 ug/m^3, corrected to 7 percent O_2, dry basis; and, 0.97 ton/yr.
[PSD-FL-006(D)]

Sulfuric Acid Mist

B.40. Sulfuric acid mist emissions, per emissions unit, shall not exceed 2.1 ppmv, corrected to 7 percent O_2, dry basis; and, 9.8 tons/yr.
[PSD-FL-006(D)]

Volatile Organic Compounds (VOC)

B.41. VOC (hydrocarbons) emissions, per emissions unit, shall not exceed 25 ppmv, corrected to 7 percent O_2, dry basis; and, 19.1 tons/yr. The permittee must furnish to the Department evidence (i.e., test results) that this facility emits less than 100 tons per year of hydrocarbons, or must obtain legally enforceable limits for the hydrocarbon emissions from this facility.
[PSD-FL-006(D)]

Excess Emissions

{Permitting Note: The Excess Emissions Rule at Rule 62-210.700, F.A.C., cannot vary any requirement of a NSPS or NESHAP provision.}

B.42. The opacity standards set forth in 40 CFR 60 shall apply at all times except during periods of startup, shutdown, malfunction, and as otherwise provided in the applicable standard.
[40 CFR 60.11(c)]

B.43. At all times, including periods of startup, shutdown, and malfunction, owners and operators shall, to the extent practicable, maintain and operate any affected facility including associated air pollution control equipment in a manner consistent with good air pollution control practice for minimizing emissions. Determination of whether acceptable operating and maintenance procedures are being used will be based on information available to the Administrator which may include, but is not limited to, monitoring results, opacity observations, review of operating and maintenance procedures, and inspection of the source.
[40 CFR 60.11(d)]

B.44. Startup, Shutdown and Malfunction. The provisions for startup, shutdown, and malfunction are provided in paragraphs (1) and (2) .
(1) Except as provided by 40 CFR 60.56b, the standards under 40 CFR 60, Subpart Eb and this permit shall apply at all times except during periods of startup, shutdown, or malfunction. Duration of startup, shutdown, or malfunction periods are limited to two hours in any 24-hour period.

(i) The startup period commences when the affected facility begins the continuous burning of RDF and does not include any warm-up period when the affected facility is combusting natural gas or propane gas and no RDF is being fed to the combustor(s).

(ii) Continuous burning is the continuous, semi-continuous, or batch feeding of RDF for purposes of waste disposal, energy production, or providing heat to the combustion system in preparation for waste disposal or energy production. The use of RDF solely to provide thermal protection of the grate or hearth during the startup period when RDF is not being fed to the grate is not considered to be continuous burning.

(2) A malfunction means:

(a) any unavoidable mechanical and/or electrical failure of air pollution control equipment or process equipment or of a process resulting in operation in an abnormal or unusual manner. [Rule 62-210.200, F.A.C., Definitions]

(b) any sudden, infrequent, and not reasonably preventable failure of air pollution control equipment, process equipment, or a process to operate in a normal or usual manner. Failures that are caused in part by poor maintenance or careless operation are not malfunctions. [40 CFR 60.2, Definitions]

[40 CFR 60.38b and 40 CFR 60.58b(a); Rule 62-210.200, F.A.C., Definitions; 40 CFR 60.2, Definitions; and, PSD-FL-006(D)]

B.45. Excess emissions resulting from startup, shutdown, or malfunction shall be permitted provided that best operational practices to minimize emissions are adhered to and the duration of excess emissions shall be minimized but in no case exceed two hours in a 24-hour period unless specifically authorized by the Department for longer duration.
[Rule 62-210.700(1), F.A.C.; and, PSD-FL-006(D)]

B.46. Excess emissions which are caused entirely or in part by poor maintenance, poor operation, or any other equipment or process failure which may reasonably be prevented during startup, shutdown, or malfunction shall be prohibited.
[Rule 62-210.700(4), F.A.C.; and, PSD-FL-006(D)]

Test Methods and Procedures

{Permitting note: The permittee may stagger its pollutant performance tests throughout the year with prior Department approval.}

B.47. Within 60 days after achieving the maximum production rate at which the affected facility will be operated, but not later than 180 days after initial startup of such facility and at such other times as may be required by the Administrator under section 114 of the Act, the owner or operator of such facility shall conduct performance test(s) and furnish the Administrator a written report of the results of such performance test(s).
[40 CFR 60.8(a)]

B.48. Performance tests shall be conducted and data reduced in accordance with the test methods and procedures contained in each applicable subpart unless the Administrator (1) specifies or approves, in specific cases, the use of a reference method with minor changes in methodology, (2) approves the use of an equivalent method, (3) approves the use of an alternative method the results of which he has determined to be adequate for indicating whether a specific source is in compliance, (4) waives the requirement for performance tests because the owner or operator of a source has demonstrated by other means to the Administrator's satisfaction that the affected facility is in compliance with the standard, or (5) approves shorter sampling times and smaller sample volumes when necessitated by process variables or other factors. Nothing in this paragraph shall be construed to abrogate the Administrator's authority to require testing under section 114 of the Act.
[40 CFR 60.8(b)]

B.49. Performance tests shall be conducted under such conditions as the Administrator shall specify to the plant operator based on representative performance of the affected facility. The owner or operator shall make available to the Administrator such records as may be necessary to determine the conditions of the performance tests. Operations during periods of startup, shutdown, and malfunction shall not constitute representative conditions for the purpose of a performance test nor shall emissions in excess of the level of the applicable emission limit during periods of startup, shutdown, and malfunction be considered a violation of the applicable emission limit unless otherwise specified in the applicable standard.
[40 CFR 60.8(c)]

B.50. The owner or operator of an affected facility shall provide the Administrator (Department or its designee) at least 30 days prior notice of any performance test, except as specified under other subparts, to afford the Administrator the opportunity to have an observer present.
[40 CFR 60.8(d)]

B.51. The owner or operator of an affected facility shall provide, or cause to be provided, performance testing facilities as follows:
(1) Sampling ports adequate for test methods applicable to such facility. This includes (i) constructing the air pollution control system such that volumetric flow rates and pollutant emission rates can be accurately determined by applicable test methods and procedures and (ii) providing a stack or duct free of cyclonic flow during performance tests, as demonstrated by applicable test methods and procedures.
(2) Safe sampling platform(s).
(3) Safe access to sampling platform(s).
(4) Utilities for sampling and testing equipment.

{Permitting note: See specific condition **B.73.** and Appendix SS-1, Stack Sampling Facilities (version dated 10/7/96) for State of Florida Stack Sampling Requirements.}

[40 CFR 60.8(e)]

B.52. Unless otherwise specified in the applicable subpart, each performance test shall consist of three separate runs using the applicable test method. Each run shall be conducted for the time and under the conditions specified in the applicable standard. For the purpose of determining compliance with an applicable standard, the arithmetic means of results of the three runs shall apply. In the event that a sample is accidentally lost or conditions occur in which one of the three runs must be discontinued because of forced shutdown, failure of an irreplaceable portion of the sample train, extreme meteorological conditions, or other circumstances, beyond the owner or operator's control, compliance may, upon the Administrator's approval, be determined using the arithmetic mean of the results of the two other runs.
[40 CFR 60.8(f)]

B.53. Compliance with the emission limiting standards shall be demonstrated using EPA Reference Methods, as specified in 40 CFR Part 60, Appendix A, or 40 CFR 61, Appendix B. No other test method shall be used unless approval from the Department has been received in writing. Any alternate sampling procedure shall be approved in accordance with Rule 62-279.620, F.A.C. A test protocol shall be submitted to the Department's Bureau of Air Regulation and Southeast District offices and Dade County's DERM office at least 90 days prior to testing.
[PSD-FL-006(A), (B) & (D)]

Particulate Matter and Opacity

B.54. The procedures and test methods specified in paragraphs (1) through (12) shall be used to determine compliance with the emission limits for particulate matter and opacity.
(1) The EPA Reference Method 1 shall be used to select sampling site and number of traverse points.
(2) The EPA Reference Method 3, 3A, or 3B, as applicable shall be used for gas analysis.
(3) The EPA Reference Method 4 shall be used for the moisture content in the stack gases.
(4) The EPA Reference Method 5 shall be used for determining compliance with the particulate matter emission limit. The minimum sample volume shall be 1.7 cubic meters. The probe and filter holder heating systems in the sample train shall be set to provide a gas temperature no greater than 160 $\pm$14 °C. An oxygen or carbon dioxide measurement shall be obtained simultaneously with each Method 5 run.
(5) The owner or operator of an affected facility may request that compliance with the particulate matter emission limit be determined using carbon dioxide measurements corrected to an equivalent of 7 percent oxygen. The relationship between oxygen and carbon dioxide levels for the affected facility shall be established as specified in paragraph 40 CFR 60.58b(b)(6).
(6) As specified under 40 CFR 60.8, all performance tests shall consist of three test runs. The average of the particulate matter emission concentrations from the three test runs is used to determine compliance.
(7) In accordance with paragraphs (8) and (12), EPA Reference Method 9 shall be used for determining compliance with the opacity limit except as provided under 40 CFR 60.11(e)
(8) The owner or operator of an affected facility shall conduct an initial performance test for particulate matter emissions and opacity as required under 40 CFR 60.8.
(9) The owner or operator of an affected facility shall install, calibrate, maintain, and operate a continuous opacity monitoring system for measuring opacity and shall follow the methods and procedures specified in paragraphs (9)(i) through (9)(iv).
(i) The output of the continuous opacity monitoring system shall be recorded on a 6-minute average basis.
(ii) The continuous opacity monitoring system shall be installed, evaluated, and operated in accordance with 40 CFR 60.13.

(iii) The continuous opacity monitoring system shall conform to Performance Specification 1 in Appendix B of 40 CFR 60.
(iv) The initial performance evaluation shall be completed no later than 180 days after the date of the initial startup of the municipal waste combustor unit, as specified under 40 CFR 60.8.

(10) Following the date that the initial performance test for particulate matter is completed or is required to be completed under 40 CFR 60.8 for an affected facility, the owner or operator shall conduct a performance test for particulate matter on an annual basis (no more than 12 calendar months following the previous performance test).
(11) [reserved]
(12) Following the date that the initial performance test for opacity is completed or is required to be completed under 40 CFR 60.8 for an affected facility, the owner or operator shall conduct a performance test for opacity on an annual basis (no more than 12 calendar months following the previous performance test) using the test method specified in paragraph (7).
(13) EPA Reference Method 2 shall be used for determining stack gas velocity and volumetric flow rate.
[40 CFR 60.38b and 40 CFR 60.58b(c); and, PSD-FL-006(B) & (D)]

PM_{10}

B.55. Compliance with the PM_{10} limits shall be demonstrated using EPA Method 201 or 201A during the initial compliance test and annually thereafter. However, if compliance with the PM emission limit in specific condition **B.24.** is met, these tests are not required.
[PSD-FL-006(B) & (D)]

Cadmium, Lead and Mercury

B.56. The procedures and test methods specified in paragraphs (1) and (2) shall be used to determine compliance with the emission limits for cadmium, lead, and mercury.
(1) The procedures and test methods specified in paragraphs (1)(i) through (1)(ix) shall be used to determine compliance with the emission limits for cadmium and lead.

(i) The EPA Reference Method 1 shall be used for determining the location and number of sampling points.
(ii) The EPA Reference Method 3, 3A, or 3B, as applicable, shall be used for flue gas analysis.
(iii) The EPA Reference Method 29 shall be used for determining compliance with the cadmium and lead emission limits.
(iv) An oxygen or carbon dioxide measurement shall be obtained simultaneously with each Method 29 test run for cadmium and lead required under paragraph (1)(iii).
(v) The owner or operator of an affected facility may request that compliance with the cadmium or lead emission limit be determined using carbon dioxide measurements corrected to an equivalent of 7 percent oxygen. The relationship between oxygen and carbon dioxide levels for the affected facility shall be established as specified in paragraph 40 CFR 60.58b(b)(6).
(vi) All performance tests shall consist of a minimum of three test runs conducted under representative full load operating conditions. The average of the cadmium or lead emission concentrations from three test runs or more shall be used to determine compliance.
(vii) Following the date of the initial performance test or the date on which the initial performance test is required to be completed under 40 CFR 60.8, the owner or operator of an affected facility shall conduct a performance test for compliance with the emission limits for cadmium and lead on an annual basis (no more than 12 calendar months following the previous performance test).
(viii)[reserved]
(ix) [reserved]

(x) EPA Reference Method 2 shall be used for determining stack gas velocity and volumetric flow rate.

(2) The procedures and test methods specified in paragraphs (2)(i) through (2)(xi) shall be used to determine compliance with the mercury emission limit.

(i) The EPA Reference Method 1 shall be used for determining the location and number of sampling points.

(ii) The EPA Reference Method 3, 3A, or 3B, as applicable, shall be used for flue gas analysis.

(iii) The EPA Reference Method 29 shall be used to determine the mercury emission concentration. The minimum sample volume when using Method 29 for mercury shall be 1.7 cubic meters.

(iv) An oxygen (or carbon dioxide) measurement shall be obtained simultaneously with each Method 29 test run for mercury required under paragraph (2)(iii).

(v) The percent reduction in the potential mercury emissions (% P_{Hg}) is computed using equation 1:

$$[\% P_{Hg}] = [(E_i - E_o)/E_i] \times 100 \qquad \textbf{(Equation 1)}$$

where:

% P_{Hg} = percent reduction of the potential mercury emissions achieved.
E_i = potential mercury emission concentration measured at the control device inlet, corrected to 7 percent oxygen (dry basis).
E_o = controlled mercury emission concentration measured at the mercury control device outlet, corrected to 7 percent oxygen (dry basis).

(vi) All performance tests shall consist of a minimum of three test runs conducted under representative full load operating conditions. The average of the mercury emission concentrations or percent reductions from three test runs or more is used to determine compliance.

(vii) The owner or operator of an affected facility may request that compliance with the mercury emission limit be determined using carbon dioxide measurements corrected to an equivalent of 7 percent oxygen. The relationship between oxygen and carbon dioxide levels for the affected facility shall be established as specified in paragraph 40 CFR 60.58b(b)(6).

(viii)The owner or operator of an affected facility shall conduct an initial performance test for mercury emissions as required under 40 CFR 60.8.

(ix) Following the date that the initial performance test for mercury is completed or is required to be completed under 40 CFR 60.8, the owner or operator of an affected facility shall conduct a performance test for mercury emissions on a annual basis (no more than 12 calendar months from the previous performance test).

(x) [reserved]

(xi) The owner or operator of an affected facility where activated carbon injection is used to comply with the mercury emission limit shall follow the procedures specified in 40 CFR 60.58b(m) (see specific condition **B.111.**) for measuring and calculating carbon usage.

(xii) EPA Reference Method 2 shall be used for determining stack gas velocity and volumetric flow rate.

[40 CFR 60.38b and 40 CFR 60.58b(d); and, PSD-FL-006(B) & (D)]

B.57. Control of Mercury Emissions: Flue Gas Temperature Standard and Carbon Usage Rate.

(4) Flue Gas Temperature Standard. Waste-to-energy facilities choosing to control mercury emissions through the use of post-combustion control equipment designed to remove mercury from flue gases shall comply with the flue gas temperature standard of Rule 62-296.416(4)(a), F.A.C.

(a) Temperature Standard. The flue gas temperature standard set forth in 40 CFR 60.53b(c) (see specific condition **B.16.**), incorporated by reference in Rule 62-204.800, F.A.C., shall apply.
(b) Temperature Monitoring. The temperature monitoring requirements set forth in 40 CFR 60.58b(i) (see specific condition **B.18.**), incorporated by reference in Rule 62-204.800, F.A.C., shall apply.
(5) Carbon Usage Rate. The carbon injection rate operating standard, based on an 8-hour block average, and monitoring requirements set forth in 40 CFR 60.58b(m) (see specific condition **B.111.**), incorporated by reference in Rule 62-204.800, F.A.C., shall apply.
[Rules 62-296.416(3)(d),(4), and (5), F.A.C.; and, PSD-FL-006(D)]

Sulfur Dioxide

B.58. The procedures and test methods specified in paragraphs (1) through (14) shall be used for determining compliance with the sulfur dioxide emission.
(1) The EPA Reference Method 19, section 4.3, shall be used to calculate the daily geometric average sulfur dioxide emission concentration.
(2) The EPA Reference Method 19, section 5.4, shall be used to determine the daily geometric average percent reduction in the potential sulfur dioxide emission concentration.
(3) The owner or operator of an affected facility may request that compliance with the sulfur dioxide emission limit be determined using carbon dioxide measurements corrected to an equivalent of 7 percent oxygen. The relationship between oxygen and carbon dioxide levels for the affected facility shall be established as specified in 40 CFR 60.58b(b)(6).
(4) The owner or operator of an affected facility shall conduct an initial performance test for sulfur dioxide emissions as required under 40 CFR 60.8. Compliance with the sulfur dioxide emission limit (concentration or percent reduction) shall be determined by using the continuous emission monitoring system specified in paragraph (5) to measure sulfur dioxide and calculating a 24-hour daily geometric average emission concentration or a 24-hour daily geometric average percent reduction using EPA Reference Method 19, sections 4.3 and 5.4, as applicable.
(5) The owner or operator of an affected facility shall install, calibrate, maintain, and operate a continuous emission monitoring system for measuring sulfur dioxide emissions discharged to the atmosphere and record the output of the system.
(6) Following the date that the initial performance test for sulfur dioxide is completed or is required to be completed under 40 CFR 60.8, compliance with the sulfur dioxide emission limit shall be determined based on the 24-hour (measured between 12:00 midnight and the following midnight) daily geometric average of the hourly arithmetic average emission concentrations using continuous emission monitoring system outlet data if compliance is based on an emission concentration, or continuous emission monitoring system inlet and outlet data if compliance is based on a percent reduction.
(7) At a minimum, valid continuous monitoring system hourly averages shall be obtained as specified in paragraphs (7)(i) and (7)(ii) for 75 percent of the operating hours per day for 90 percent of the operating days per calendar quarter that the affected facility is combusting municipal solid waste.
(i) At least two data points per hour shall be used to calculate each 1-hour arithmetic average.
(ii) Each sulfur dioxide 1-hour arithmetic average shall be corrected to 7 percent oxygen on an hourly basis using the 1-hour arithmetic average of the oxygen (or carbon dioxide) continuous emission monitoring system data.
(8) The 1-hour arithmetic averages required under paragraph (6) shall be expressed in parts per million corrected to 7 percent oxygen (dry basis) and used to calculate the 24-hour daily geometric average emission concentrations and daily geometric average emission percent reductions. The 1-hour arithmetic averages shall be calculated using the data points required under 40 CFR 60.13(e)(2).

(9) All valid continuous emission monitoring system data shall be used in calculating average emission concentrations and percent reductions even if the minimum continuous emission monitoring system data requirements of paragraph (7) are not met.
(10) The procedures under 40 CFR 60.13 shall be followed for installation, evaluation, and operation of the continuous emission monitoring system.
(11) The initial performance evaluation shall be completed no later than 180 days after the date of initial startup of the municipal waste combustor as specified under 40 CFR 60.8.
(12) The continuous emission monitoring system shall be operated according to Performance Specification 2 in 40 CFR 60 Appendix B.

(i) During each relative accuracy test run of the continuous emission monitoring system required by Performance Specification 2 in 40 CFR 60 Appendix B, sulfur dioxide and oxygen (or carbon dioxide) data shall be collected concurrently (or within a 30- to 60-minute period) by both the continuous emission monitors and the test methods specified in paragraphs (A) and (B).

(A) For sulfur dioxide, EPA Reference Method 6, 6A, or 6C shall be used.

(B) For oxygen (or carbon dioxide), EPA Reference Method 3, 3A, or 3B, as applicable shall be used.

(ii) The span value of the continuous emissions monitoring system at the inlet to the sulfur dioxide control device shall be 125 percent of the maximum estimated hourly potential sulfur dioxide emissions of the municipal waste combustor unit. The span value of the continuous emission monitoring system at the outlet of the sulfur dioxide control device shall be 50 percent of the maximum estimated hourly potential sulfur dioxide emissions of the municipal waste combustor unit.

(13) Quarterly accuracy determinations and daily calibration drift tests shall be performed in accordance with procedure 1 in Appendix F of 40 CFR 60.
(14) When sulfur dioxide emissions data are not obtained because of continuous emission monitoring system breakdowns, repairs, calibration checks, and zero and span adjustments, emissions data shall be obtained by using other monitoring systems as approved by the Administrator or EPA Reference Method 19 to provide, as necessary, valid emissions data for a minimum of 75 percent of the hours per day that the affected facility is operated and combusting municipal solid waste for 90 percent of the days per calendar quarter that the affected facility is operated and combusting municipal solid waste.
[40 CFR 60.38b and 40 CFR 60.58b(e); and, PSD-FL-006(B) & (D)]

Hydrogen Chloride

B.59. The procedures and test methods specified in paragraphs (1) through (8) shall be used for determining compliance with the hydrogen chloride emission limit.
(1) The EPA Reference Method 26 or 26A, as applicable, shall be used to determine the hydrogen chloride emission concentration. The minimum sampling time for Method 26 shall be 1 hour.
(2) An oxygen (or carbon dioxide) measurement shall be obtained simultaneously with each Method 26 test run for hydrogen chloride required by paragraph (1).
(3) The percent reduction in potential hydrogen chloride emissions (% P_{HCl}) is computed using equation 2:

$$[\% P_{HCl}] = [(E_i - E_o)/E_i] \times 100 \qquad \textbf{(Equation 2)}$$

where:

% P_{HCl} = percent reduction of the potential hydrogen chloride emissions achieved.
E_i = potential hydrogen chloride emission concentration measured at the control device inlet, corrected to 7 percent oxygen (dry basis).

E_o = controlled hydrogen chloride emission concentration measured at the control device outlet, corrected to 7 percent oxygen (dry basis).

(4) The owner or operator of an affected facility may request that compliance with the hydrogen chloride emission limit be determined using carbon dioxide measurements corrected to an equivalent of 7 percent oxygen. The relationship between oxygen and carbon dioxide levels for the affected facility shall be established as specified in 40 CFR 60.58b(b)(6).
(5) As specified under 40 CFR 60.8, all performance tests shall consist of three test runs. The average of the hydrogen chloride emission concentrations or percent reductions from the three test runs is used to determine compliance.
(6) The owner or operator of an affected facility shall conduct an initial performance test for hydrogen chloride as required under 40 CFR 60.8.
(7) Following the date that the initial performance test for hydrogen chloride is completed or is required to be completed under 40 CFR 60.8, the owner or operator of an affected facility shall conduct a performance test for hydrogen chloride emissions on an annual basis (no more than 12 calendar months following the previous performance test).
(8) [reserved]
[40 CFR 60.38b and 40 CFR 60.58b(f); and, PSD-FL-006(B) & (D)]

Mercury, Sulfur Dioxide and Hydrogen Chloride

B.60. Testing shall be conducted upstream (removal efficiency for SO_2 and HCl) and downstream (mass emissions) of the applicable control device for the following pollutants, Hg, SO_2 and HCl, if compliance demonstration is based on percent removal efficiency. Soot blowers shall be operated in a mode consistent with normal cleaning requirements of the system during the compliance testing.
[PSD-FL-006(A) & (D)]

Dioxin/Furan

B.61. The procedures and test methods specified in paragraphs (1) through (9) shall be used to determine compliance with the limits for dioxin/furan emissions.
(1) The EPA Reference Method 1 shall be used for determining the location and number of sampling points.
(2) The EPA Reference Method 3, 3A, or 3B, as applicable, shall be used for flue gas analysis.
(3) The EPA Reference Method 23 shall be used for determining the dioxin/furan emission concentration.
(i) The minimum sample time shall be 4 hours per test run.
(ii) An oxygen (or carbon dioxide) measurement shall be obtained simultaneously with each Method 23 test run for dioxins/furans.
(4) The owner or operator of an affected facility shall conduct an initial performance test for dioxin/furan emissions in accordance with paragraph (3), as required under 40 CFR 60.8.
(5) Following the date that the initial performance test for dioxins/furans is completed or is required to be completed under 40 CFR 60.8, the owner or operator of an affected facility shall conduct performance tests for dioxin/furan emissions in accordance with paragraph (3), according to one of the schedules specified in paragraphs (i) through (iii).
(i) For affected facilities, performance tests shall be conducted on an annual basis (no more than 12 calendar months following the previous performance test.)
(ii) [reserved]

(iii) Where all performance tests over a 2-year period indicate that dioxin/furan emissions are less than or equal to 7 nanograms per dry standard cubic meter (total mass) for all affected facilities located within a municipal waste combustor plant, the owner or operator of the municipal waste combustor plant may elect to conduct annual performance tests for one affected facility (i.e., unit) per year at the municipal waste combustor plant. At a minimum, a performance test for dioxin/furan emissions shall be conducted annually (no more than 12 months following the previous performance test) for one affected facility at the municipal waste combustor plant. Each year a different affected facility at the municipal waste combustor plant shall be tested, and the affected facilities at the plant shall be tested in sequence (e.g., Unit 1, Unit 2, Unit 3, as applicable). If each annual performance test continues to indicate a dioxin/furan emission level less than or equal to 7 nanograms per dry standard cubic meter (total mass), the owner or operator may continue conducting a performance test on only one affected facility per year. If any annual performance test indicates a dioxin/furan emission level greater than 7 nanograms per dry standard cubic meter (total mass), performance tests thereafter shall be conducted annually on all affected facilities at the plant until and unless all annual performance tests for all affected facilities at the plant over a 2-year period indicate a dioxin/furan emission level less than or equal to 7 nanograms per dry standard cubic meter (total mass).

(6) The owner or operator of an affected facility that selects to follow the performance testing schedule specified in paragraph (5)(iii) shall follow the procedures specified in 40 CFR 60 60.59b(g)(4) for reporting the selection of this schedule.

(7) The owner or operator of an affected facility where activated carbon is used to comply with the dioxin/furan emission limits specified in 40 CFR 60.52b(c) or the dioxin/furan emission level specified in paragraph (5)(iii) shall follow the procedures specified in 40 CFR 60.58b(m) for measuring and calculating the carbon usage rate.

(8) The owner or operator of an affected facility may request that compliance with the dioxin/furan emission limit be determined using carbon dioxide measurements corrected to an equivalent of 7 percent oxygen. The relationship between oxygen and carbon dioxide levels for the affected facility shall be established as specified in 40 CFR 60.58b(b)(6).

(9) As specified under 40 CFR 60.8, all performance tests shall consist of three test runs. The average of the dioxin/furan emission concentrations from the three test runs is used to determine compliance.

[40 CFR 60.38b and 40 CFR 60.58b(g); and, PSD-FL-006(B)]

Nitrogen Oxides

B.62. The procedures and test methods specified in paragraphs (1) through (12) shall be used to determine compliance with the nitrogen oxides emission limit for affected facilities under 40 CFR 60.52b(d).

(1) The EPA Reference Method 19, section 4.1, shall be used for determining the daily arithmetic average nitrogen oxides emission concentration.

(2) The owner or operator of an affected facility may request that compliance with the nitrogen oxides emission limit be determined using carbon dioxide measurements corrected to an equivalent of 7 percent oxygen. The relationship between oxygen and carbon dioxide levels for the affected facility shall be established as specified in 40 CFR 60.58b(b)(6).

(3) The owner or operator of an affected facility subject to the nitrogen oxides limit shall conduct an initial performance test for nitrogen oxides as required under 40 CFR 60.8. Compliance with the nitrogen oxides emission limit shall be determined by using the continuous emission monitoring system specified in paragraph (4) for measuring nitrogen oxides and calculating a 24-hour daily arithmetic average emission concentration using EPA Reference Method 19, section 4.1.

(4) The owner or operator of an affected facility subject to the nitrogen oxides emission shall install, calibrate, maintain, and operate a continuous emission monitoring system for measuring nitrogen oxides discharged to the atmosphere, and record the output of the system.
(5) Following the date that the initial performance test for nitrogen oxides is completed or is required to be completed under 40 CFR 60.8, compliance with the emission limit for nitrogen oxides shall be determined based on the 24-hour (measured between 12:00 midnight and the following midnight) daily arithmetic average of the hourly emission concentrations using continuous emission monitoring system outlet data.
(6) At a minimum, valid continuous emission monitoring system hourly averages shall be obtained as specified in paragraphs (i) and (ii) for 75 percent of the operating hours per day for 90 percent of the operating days per calendar quarter that the affected facility is combusting municipal solid waste.
(i) At least 2 data points per hour shall be used to calculate each 1-hour arithmetic average.
(ii) Each nitrogen oxides 1-hour arithmetic average shall be corrected to 7 percent oxygen on an hourly basis using the 1-hour arithmetic average of the oxygen (or carbon dioxide) continuous emission monitoring system data.
(7) The 1-hour arithmetic averages required by paragraph (5) shall be expressed in parts per million by volume (dry basis) and used to calculate the 24-hour daily arithmetic average concentrations. The 1-hour arithmetic averages shall be calculated using the data points required under 40 CFR 60.13(e)(2).
(8) All valid continuous emission monitoring system data must be used in calculating emission averages even if the minimum continuous emission monitoring system data requirements of paragraph (6) are not met.
(9) The procedures under 40 CFR 60.13 shall be followed for installation, evaluation, and operation of the continuous emission monitoring system. The initial performance evaluation shall be completed no later than 180 days after the date of initial startup of the municipal waste combustor unit, as specified under 40 CFR 60.8.
(10) The owner or operator of an affected facility shall operate the continuous emission monitoring system according to Performance Specification 2 in Appendix B of 40 CFR 60 and shall follow the procedures and methods specified in paragraphs(i) and (ii).
(i) During each relative accuracy test run of the continuous emission monitoring system required by Performance Specification 2 of Appendix B of 40 CFR 60, nitrogen oxides and oxygen (or carbon dioxide) data shall be collected concurrently (or within a 30- to 60-minute period) by both the continuous emission monitors and the test methods specified in paragraphs (A) and (B).
(A) For nitrogen oxides, EPA Reference Method 7, 7A, 7C, 7D, or 7E shall be used.
(B) For oxygen (or carbon dioxide), EPA Reference Method 3, 3A, or 3B, as applicable shall be used.
(ii) The span value of the continuous emission monitoring system shall be 125 percent of the maximum estimated hourly potential nitrogen oxide emissions of the municipal waste combustor unit.
(11) Quarterly accuracy determinations and daily calibration drift tests shall be performed in accordance with procedure 1 in Appendix F of 40 CFR 60.
(12) When nitrogen oxides continuous emissions data are not obtained because of continuous emission monitoring system breakdowns, repairs, calibration checks, and zero and span adjustments, emissions data shall be obtained using other monitoring systems as approved by the Administrator or EPA Reference Method 19 to provide, as necessary, valid emissions data for a minimum of 75 percent of the hours per day for 90 percent of the days per calendar quarter the unit is operated and combusting municipal solid waste.
[40 CFR 60.38b and 40 CFR 60.58b(h); and, PSD-FL-006(B) & (D)]

Beryllium

B.63. (a) Unless a waiver of emission testing is obtained under 40 CFR 61.13, each owner or operator required to comply with 40 CFR 61.32(a) shall test emissions from the source according to Method 104 or 29 of Appendix B to 40 CFR 61. EPA Method 104 of Appendix B to 40 CFR 61 is approved by the Administrator as an alternative method for sources subject to 40 CFR 61.32(a). The emission test shall be performed according to the following:

(1) Within 90 days of the effective date in the case of an existing source or a new source which has an initial startup date preceding the effective date; or

(2) Within 90 days of startup in the case of a new source which did not have an initial startup date preceding the effective date.

(b) The Administrator shall be notified at least 30 days prior to an emission test so that he may at his option observe the test.

(c) Samples shall be taken over such a period or periods as are necessary to accurately determine the maximum emissions which will occur in any 24-hour period. Where emissions depend upon the relative frequency of operation of different types of processes, operating hours, operating capacities, or other factors, the calculation of maximum 24-hour-period emissions will be based on that combination of factors which is likely to occur during the subject period and which result in the maximum emissions. No changes in the operation shall be made, which would potentially increase emissions above that determined by the most recent source test, until a new emission level has been estimated by calculation and the results reported to the Administrator.

(d) All samples shall be analyzed and beryllium emissions shall be determined within 30 days after the source test. All determinations shall be reported to the Administrator by a registered letter dispatched before the close of the next business day following such determination.

(e) Records of emission test results and other data needed to determine total emissions shall be retained at the source and made available, for inspection by the Administrator, for a minimum of **5** years.

(f) An initial compliance test is required; and, a compliance test prior to permit renewal is required.

[40 CFR 61.33; Rule 62-213.440(b), F.A.C.; and, PSD-FL-006(B) & (D)]

Total Fluoride

B.64. Compliance with the total fluoride emissions shall be demonstrated using EPA Method 13A or 13B. An initial compliance test is required; and, a compliance test prior to permit renewal is required.
[PSD-FL-006(B) & (D)]

Carbon Monoxide

B.65. See specific condition **B.18.**
[PSD-FL-006(A) & (D)]

Volatile Organic Compounds

B.66. Compliance with the volatile organic compounds limits shall be demonstrated using EPA Method 25 or 25A.
[PSD-FL-006(D)]

Sulfuric Acid Mist

B.67. Compliance with the sulfuric acid mist emissions limits shall be demonstrated using EPA Method 8. Only an initial compliance test is required.
[PSD-FL-006(B) & (D)]

Arsenic

B.68. Compliance with the arsenic emissions limits shall be demonstrated using EPA Method 108 or 29. Only an initial compliance test is required.
[PSD-FL-006(B) & (D)]

B.69. Required Number of Test Runs. For mass emission limitations, a compliance test shall consist of three complete and separate determinations of the total air pollutant emission rate through the test section of the stack or duct and three complete and separate determinations of any applicable process variables corresponding to the three distinct time periods during which the stack emission rate was measured provided, however, that three complete and separate determinations shall not be required if the process variables are not subject to variation during a compliance test, or if three determinations are not necessary in order to calculate the unit's emission rate. The three required test runs shall be completed within one consecutive five day period. In the event that a sample is lost or one of the three runs must be discontinued because of circumstances beyond the control of the owner or operator, and a valid third run cannot be obtained within the five day period allowed for the test, the Secretary or his or her designee may accept the results of the two complete runs as proof of compliance, provided that the arithmetic mean of the results of the two complete runs is at least 20 percent below the allowable emission limiting standards.
[Rule 62-297.310(1), F.A.C.]

B.70. Operating Rate During Testing. Testing of emissions shall be conducted with the emissions unit operation at permitted capacity, which is defined as 90 to 100 percent of the maximum operation rate allowed by the permit. If it is impracticable to test at permitted capacity, an emissions unit may be tested at less than the minimum permitted capacity; in this case, subsequent emissions unit operation is limited to 110 percent of the test load until a new test is conducted. Once the emissions unit is so limited, operation at higher capacities is allowed for no more than 15 consecutive days for the purpose of additional compliance testing to regain the authority to operate at the permitted capacity.
[Rules 62-297.310(2) & (2)(b), F.A.C.]

B.71. Calculation of Emission Rate. The indicated emission rate or concentration shall be the arithmetic average of the emission rate or concentration determined by each of the three separate test runs unless otherwise specified in a particular test method or applicable rule.
[Rule 62-297.310(3), F.A.C.]

B.72. Applicable Test Procedures.
(a) Required Sampling Time.
1. Unless otherwise specified in the applicable rule, the required sampling time for each test run shall be no less than one hour and no greater than four hours, and the sampling time at each sampling point shall be of equal intervals of at least two minutes.
2. Opacity Compliance Tests. When either EPA Method 9 or DEP Method 9 is specified as the applicable opacity test method, the required minimum period of observation for a compliance test shall be sixty (60) minutes for emissions units which emit or have the potential to emit 100 tons per year or more of particulate matter, and thirty (30) minutes for emissions units which have potential emissions less than 100 tons per year of particulate matter and are not subject to a multiple-valued opacity standard. The opacity test observation period shall include the period during which the highest opacity emissions can reasonably be expected to occur. Exceptions to these requirements are as follows:

a. For batch, cyclical processes, or other operations which are normally completed within less than the minimum observation period and do not recur within that time, the period of observation shall be equal to the duration of the batch cycle or operation completion time.
b. The observation period for special opacity tests that are conducted to provide data to establish a surrogate standard pursuant to Rule 62-297.310(5)(k), F.A.C., Waiver of Compliance Test Requirements, shall be established as necessary to properly establish the relationship between a proposed surrogate standard and an existing mass emission limiting standard.
c. The minimum observation period for opacity tests conducted by employees or agents of the Department to verify the day-to-day continuing compliance of a unit or activity with an applicable opacity standard shall be twelve minutes.

(b) Minimum Sample Volume. Unless otherwise specified in the applicable rule, the minimum sample volume per run shall be 25 dry standard cubic feet.
(c) Required Flow Rate Range. For EPA Method 5 particulate sampling, acid mist/sulfur dioxide, and fluoride sampling which uses Greenburg Smith type impingers, the sampling nozzle and sampling time shall be selected such that the average sampling rate will be between 0.5 and 1.0 actual cubic feet per minute, and the required minimum sampling volume will be obtained.
(d) Calibration of Sampling Equipment. Calibration of the sampling train equipment shall be conducted in accordance with the schedule shown in Table 297.310-1, attached as part of this permit.
(e) Allowed Modification to EPA Method 5. When EPA Method 5 is required, the following modification is allowed: the heated filter may be separated from the impingers by a flexible tube.
[Rule 62-297.310(4), F.A.C.]

B.73. Required Stack Sampling Facilities. When a mass emissions stack test is required, the permittee shall comply with the requirements contained in Appendix SS-1, Stack Sampling Facilities, attached to this permit.
[Rule 62-297.310(6), F.A.C.]

B.74. Frequency of Compliance Tests. The following provisions apply only to those emissions units that are subject to an emissions limiting standard for which compliance testing is required.
(a) General Compliance Testing.
3. The owner or operator of an emissions unit that is subject to any emission limiting standard shall conduct a compliance test that demonstrates compliance with the applicable emission limiting standard prior to obtaining a renewed operation permit. Emissions units that are required to conduct an annual compliance test may submit the most recent annual compliance test to satisfy the requirements of this provision. In renewing an air operation permit pursuant to Rule 62-210.300(2)(a)3.b., c., or d., F.A.C., the Department shall not require submission of emission compliance test results for any emissions unit that, during the year prior to renewal:
a. Did not operate; or
b. In the case of a fuel burning emissions unit, burned liquid and/or solid fuel for a total of no more than 400 hours.
4. During each federal fiscal year (October 1 - September 30), unless otherwise specified by rule, order, or permit, the owner or operator of each emissions unit shall have a formal compliance test conducted for:
a. Visible emissions, if there is an applicable standard;
b. Each of the following pollutants, if there is an applicable standard, and if the emissions unit emits or has the potential to emit: 5 tons per year or more of lead or lead compounds measured as elemental lead; 30 tons per year or more of acrylonitrile; or 100 tons per year or more of any other regulated air pollutant; and
c. Each NESHAP pollutant, if there is an applicable emission standard.

5. An annual compliance test for particulate matter emissions shall not be required for any fuel burning emissions unit that, in a federal fiscal year, does not burn liquid and/or solid fuel, other than during startup, for a total of more than 400 hours.
9. The owner or operator shall notify the Department's Southeast District office and the Dade County's DERM office at least 15 days prior to the date on which each formal compliance test is to begin, of the date, time, and place of each such test, and the test contact person who will be responsible for coordinating and having such test conducted for the owner or operator.

(b) Special Compliance Tests. When the Department's Southeast District office or the Dade County's DERM office, after investigation, has good reason (such as complaints, increased visible emissions or questionable maintenance of control equipment) to believe that any applicable emission standard contained in a Department rule or in a permit issued pursuant to those rules is being violated, it may require the owner or operator of the emissions unit to conduct compliance tests which identify the nature and quantity of pollutant emissions from the emissions unit and to provide a report on the results of said tests to the Department's Southeast District office and the Dade County's DERM office.

(c) Waiver of Compliance Test Requirements. If the owner or operator of an emissions unit that is subject to a compliance test requirement demonstrates to the Department, pursuant to the procedure established in Rule 62-297.620, F.A.C., that the compliance of the emissions unit with an applicable weight emission limiting standard can be adequately determined by means other than the designated test procedure, such as specifying a surrogate standard of no visible emissions for particulate matter sources equipped with a bag house or specifying a fuel analysis for sulfur dioxide emissions, the Department shall waive the compliance test requirements for such emissions units and order that the alternate means of determining compliance be used, provided, however, the provisions of Rule 62-297.310(7)(b), F.A.C., shall apply.

[Rule 62-297.310(7), F.A.C.; PSD-FL-006(D); and, SIP approved]

Compliance With Standards and Maintenance Requirements

B.75. Compliance with standards in 40 CFR 60, other than opacity standards, shall be determined only by performance tests established by 40 CFR 60.8, unless otherwise specified in the applicable standard.
[40 CFR 60.11(a)]

B.76. Compliance with opacity standards in 40 CFR 60 shall be determined by conducting observations in accordance with Reference Method 9 in Appendix A, 40 CFR 60, any alternative method that is approved by the Administrator, or as provided in 40 CFR 60.11(e)(5).
[40 CFR 60.11(b)]

B.77. The owner or operator of an affected facility subject to an opacity standard may submit, for compliance purposes, continuous opacity monitoring system (COMS) data results produced during any performance test required under 40 CFR 60.8 in lieu of EPA Method 9 observation data. If an owner or operator elects to submit COMS data for compliance with the opacity standard, he or she shall notify the Administrator of that decision, in writing, at least 30 days before any performance test required under 40 CFR 60.8 is conducted. Once the owner or operator of an affected facility has notified the Administrator to that effect, the COMS data results will be used to determine opacity compliance during subsequent tests required under 40 CFR 60.8 until the owner or operator notifies the Administrator, in writing, to the contrary. For the purpose of determining compliance with the opacity standard during a performance test required under 40 CFR 60.8 using COMS data, the minimum total time of COMS data collection shall be averages of all 6-minute continuous periods within the duration of the mass emission performance test. Results of the COMS opacity determinations shall be submitted along with the results of the performance test required under 60.8. The owner or operator of an affected facility using a COMS for compliance

purposes is responsible for demonstrating that the COMS meets the requirements specified in 40 CFR 60.13(c), that the COMS has been properly maintained and operated, and that the resulting data have not been altered in any way. If COMS data results are submitted for compliance with the opacity standard for a period of time during which EPA Method 9 data indicates noncompliance, the EPA Method 9 data will be used to determine opacity compliance.
[40 CFR 60.11(e)(5)]

Monitoring Requirements

B.78. For the purposes of 40 CFR 60.13, all continuous monitoring systems (CMS) required under applicable subparts shall be subject to the provisions of 40 CFR 60.13 upon promulgation of performance specifications for continuous monitoring systems under Appendix B of 40 CFR 60 and, if the continuous monitoring system is used to demonstrate compliance with emission limits on a continuous basis, Appendix F of 40 CFR 60, unless otherwise specified in an applicable subpart or by the Administrator. Appendix F is applicable December 4, 1987.
[40 CFR 60.13(a)]

B.79. Continuous Monitoring Systems. Continuous monitoring systems (CMS) with recorders for the output shall be installed, calibrated, maintained and operated for each emissions unit, subject to approval by the Department, for the following:

a. Flue Gas Temperature (to be located at the inlet to the final particulate matter control device; the monitors shall be calibrated, operated and maintained in accordance with the manufacturers' instructions; and, the monitoring is to be certified by the manufacturer to be accurate within +1 percent of the temperature being measured);
b. Opacity;
c. Oxygen;
d. Carbon Monoxide;
e. Nitrogen Oxides;
f. Sulfur Dioxide (for SO_2, one monitor shall be located upstream of the scrubber and one shall be located downstream of the baghouse, when using percent removal to determine compliance with the SO_2 limits), as specified in 40 CFR 60, Appendix B.
g. Total Steam Production (lbs/hr, pressure, and temperature);
h. Power Generation;
i. Slaked Lime Production/Utilization;
j. Activated Carbon or Mercury Reactant Injection or Usage Rate;
k. Combustion Zone Temperature (as determined by surrogate temperature monitoring at the boiler roof); and,
l. Baghouse Pressure Drop (to be located downstream of the dry lime scrubbers).

The monitoring equipment shall meet the applicable requirements of Chapter 62-297, F.A.C., 40 CFR 60, Appendix F, 40 CFR 60.58b, and 40 CFR 60.13, including certification of each device in accordance with 40 CFR 60, Appendix B, Performance Specifications, and 40 CFR 60.7(a)(5), Notification Requirements. Data on monitoring equipment specifications, manufacturer, type calibration and maintenance requirements, and the proposed location of each monitor shall be provided to the Department's Southeast District office and the Dade County's DERM office for review at least 90 days prior to installation.
[PSD-FL-006(A) & (D)]

B.80. Opacity. If the owner or operator of an affected facility elects to submit continuous opacity monitoring system (COMS) data for compliance with the opacity standard as provided under 40 CFR 60.11(e)(5), he shall conduct a performance evaluation of the COMS as specified in Performance Specification 1, Appendix B, of 40 CFR 60 before the performance test required under 40 CFR 60.8 is conducted. Otherwise, the owner or operator of an affected facility shall conduct a performance evaluation of the COMS or continuous emission monitoring system (CEMS) during any performance test required under 40 CFR 60.8 or within 30 days thereafter in accordance with the applicable performance specification in Appendix B of 40 CFR 60. The owner or operator of an affected facility shall conduct COMS or CEMS performance evaluations at such other times as may be required by the Administrator under section 114 of the Act.
(1) The owner or operator of an affected facility using a COMS to determine opacity compliance during any performance test required under 60.8 and as described in 40 CFR 60.11(e)(5) shall furnish the Administrator two or, upon request, more copies of a written report of the results of the COMS performance evaluation described in 40 CFR 60.13(c) at least 10 days before the performance test required under 60.8 is conducted.
[40 CFR 60.13(c)(1)]

B.81. (1) CEMS Zero and Span Values. Owners and operators of all continuous emission monitoring systems (CEMS) installed in accordance with the provisions of this 40 CFR Part 60 shall check the zero (or low-level value between 0 and 20 percent of span value) and span (50 to 100 percent of span value) calibration drifts at least once daily in accordance with a written procedure. The zero and span shall, as a minimum, be adjusted whenever the 24-hour zero drift or 24-hour span drift exceeds two times the limits of the applicable performance specifications in Appendix B. The system must allow the amount of excess zero and span drift measured at the 24-hour interval checks to be recorded and quantified, whenever specified. For continuous monitoring systems measuring opacity of emissions, the optical surfaces exposed to the effluent gases shall be cleaned prior to performing the zero and span drift adjustments except that for systems using automatic zero adjustments. The optical surfaces shall be cleaned when the cumulative automatic zero compensation exceeds 4 percent opacity.
(2) Opacity. Unless otherwise approved by the Administrator, the following procedures shall be followed for continuous monitoring systems measuring opacity of emissions. Minimum procedures shall include a method for producing a simulated zero opacity condition and an upscale (span) opacity condition using a certified neutral density filter or other related technique to produce a known obscuration of the light beam. Such procedures shall provide a system check of the analyzer internal optical surfaces and all electronic circuitry including the lamp and photo detector assembly.
[40 CFR 60.13(d)(1) and (2)]

B.82. Except for system breakdowns, repairs, calibration checks, and zero and span adjustments required under 40 CFR 60.13(d), all continuous monitoring systems (CMS) shall be in continuous operation and shall meet minimum frequency of operation requirements as follows:
(1) Opacity. All continuous monitoring systems referenced by 40 CFR 60.13(c) for measuring opacity of emissions shall complete a minimum of one cycle of sampling and analyzing for each successive 10-second period and one cycle of data recording for each successive 6-minute period.
(2) All continuous monitoring systems referenced by 40 CFR 60.13(c) for measuring emissions, except opacity, shall complete a minimum of one cycle of operation (sampling, analyzing, and data recording) for each successive 15-minute period.
[40 CFR 60.13(e)(1) and (2)]

B.83. All continuous monitoring systems (CMS) or monitoring devices shall be installed such that representative measurements of emissions or process parameters from the affected facility are obtained.

Additional procedures for location of continuous monitoring systems contained in the applicable Performance Specifications of Appendix B of 40 CFR 60 shall be used.
[40 CFR 60.13(f)]

B.84. When the effluents from a single affected facility or two or more affected facilities subject to the same emission standards are combined before being released to the atmosphere, the owner or operator may install applicable continuous monitoring systems (CMS) on each effluent or on the combined effluent. When the affected facilities are not subject to the same emission standards, separate continuous monitoring systems shall be installed on each effluent. When the effluent from one affected facility is released to the atmosphere through more than one point, the owner or operator shall install an applicable continuous monitoring system on each separate effluent unless the installation of fewer systems is approved by the Administrator. When more than one continuous monitoring system is used to measure the emissions from one affected facility (e.g., multiple breachings, multiple outlets), the owner or operator shall report the results as required from each continuous monitoring system.
[40 CFR 60.13(g)]

B.85. Opacity. Owners or operators of all continuous monitoring systems for measurement of opacity shall reduce all data to 6-minute averages and for continuous monitoring systems other than opacity to 1-hour averages for time periods as defined in 40 CFR 60.2. Six-minute opacity averages shall be calculated from 36 or more data points equally spaced over each 6-minute period. For continuous monitoring systems other than opacity, 1-hour averages shall be computed from four or more data points equally spaced over each 1-hour period. Data recorded during periods of continuous monitoring system breakdowns, repairs, calibration checks, and zero and span adjustments shall not be included in the data averages computed under this paragraph. An arithmetic or integrated average of all data may be used. The data may be recorded in reduced or non reduced form (e.g., ppm pollutant and percent O_2 or ng/J of pollutant). All excess emissions shall be converted into units of the standard using the applicable conversion procedures specified in subparts. After conversion into units of the standard, the data may be rounded to the same number of significant digits as used in the applicable subparts to specify the emission limit (e.g., rounded to the nearest 1 percent opacity).
[40 CFR 60.13(h)]

B.86. Determination of Process Variables.
(a) Required Equipment. The owner or operator of an emissions unit for which compliance tests are required shall install, operate, and maintain equipment or instruments necessary to determine process variables, such as process weight input or heat input, when such data are needed in conjunction with emissions data to determine the compliance of the emissions unit with applicable emission limiting standards.
(b) Accuracy of Equipment. Equipment or instruments used to directly or indirectly determine process variables, including devices such as belt scales, weight hoppers, flow meters, and tank scales, shall be calibrated and adjusted to indicate the true value of the parameter being measured with sufficient accuracy to allow the applicable process variable to be determined within 10% of its true value.
[Rule 62-297.310(5), F.A.C.]

B.87. CMS for Oxygen or Carbon Dioxide. The owner or operator of an affected facility shall install, calibrate, maintain, and operate a continuous monitoring system and record the output of the system for measuring the oxygen or carbon dioxide content of the flue gas at each location where carbon monoxide, sulfur dioxide, or nitrogen oxides emissions are monitored and shall comply with the test procedures and test methods specified in paragraphs (1) through (7).

(1) The span value of the oxygen (or carbon dioxide) monitor shall be 25 percent oxygen (or carbon dioxide).
(2) The monitor shall be installed, evaluated, and operated in accordance with 40 CFR 60.13.
(3) The initial performance evaluation shall be completed no later than 180 days after the date of initial startup of the affected facility, as specified under 40 CFR 60.8.
(4) The monitor shall conform to Performance Specification 3 in Appendix B of 40 CFR 60 except for section 2.3 (relative accuracy requirement).
(5) The quality assurance procedures of Appendix F of 40 CFR 60 except for section 5.1.1 (relative accuracy test audit) shall apply to the monitor.
(6) If carbon dioxide is selected for use in diluent corrections, the relationship between oxygen and carbon dioxide levels shall be established during the initial performance test according to the procedures and methods specified in paragraphs(i) through(iv). This relationship may be reestablished during performance compliance tests.

(i) The fuel factor equation in Method 3B shall be used to determine the relationship between oxygen and carbon dioxide at a sampling location. Method 3, 3A, or 3B, as applicable, shall be used to determine the oxygen concentration at the same location as the carbon dioxide monitor.
(ii) Samples shall be taken for at least 30 minutes in each hour.
(iii) Each sample shall represent a 1-hour average.
(iv) A minimum of three runs shall be performed.

(7) The relationship between carbon dioxide and oxygen concentrations that is established in accordance with paragraph (6) shall be submitted to the EPA Administrator as part of the initial performance test report and, if applicable, as part of the annual test report if the relationship is reestablished during the annual performance test.
[40 CFR 60.38b and 40 CFR 60.58b(b)]

Recordkeeping and Reporting Requirements

B.88. The owner or operator subject to the provisions of 40 CFR 60 shall furnish the Administrator written notification as follows:
(4) A notification of any physical or operational change to an existing facility which may increase the emission rate of any air pollutant to which a standard applies, unless that change is specifically exempted under an applicable subpart or in 40 CFR 60.14(e). This notice shall be postmarked 60 days or as soon as practicable before the change is commenced and shall include information describing the precise nature of the change, present and proposed emission control systems, productive capacity of the facility before and after the change, and the expected completion date of the change. The Administrator may request additional relevant information subsequent to this notice.
[40 CFR 60.7(a)(4)]

B.89. The owner or operator subject to the provisions of 40 CFR 60 shall maintain records of the occurrence and duration of any startup, shutdown, or malfunction in the operation of an affected facility; any malfunction of the air pollution control equipment; or, any periods during which a continuous monitoring system or monitoring device is inoperative.
[40 CFR 60.7(b)]

B.90. Each owner or operator required to install a continuous monitoring system (CMS) or monitoring device shall submit an excess emissions and monitoring systems performance report (excess emissions are defined in applicable subparts) and/or a summary report form [see 40 CFR 60.7(d)] to the Administrator semiannually, except when: more frequent reporting is specifically required by an applicable subpart; or, the CMS data are to be used directly for compliance determination, in which case

quarterly reports shall be submitted; or, the Administrator, on a case-by-case basis, determines that more frequent reporting is necessary to accurately assess the compliance status of the source. All reports shall be postmarked by the 30th day following the end of each calendar half (or quarter, as appropriate). Written reports of excess emissions shall include the following information:
(1) The magnitude of excess emissions computed in accordance with 40 CFR 60.13(h), any conversion factor(s) used, and the date and time of commencement and completion of each time period of excess emissions. The process operating time during the reporting period.
(2) Specific identification of each period of excess emissions that occurs during startups, shutdowns, and malfunctions of the affected facility. The nature and cause of any malfunction (if known), the corrective action taken or preventative measures adopted.
(3) The date and time identifying each period during which the continuous monitoring system was inoperative except for zero and span checks and the nature of the system repairs or adjustments.
(4) When no excess emissions have occurred or the continuous monitoring system(s) have not been inoperative, repaired, or adjusted, such information shall be stated in the report.
[40 CFR 60.7(c)(1), (2), (3), and (4)]

B.91. The summary report form shall contain the information and be in the format shown in Figure 1 (attached) unless otherwise specified by the Administrator. One summary report form shall be submitted for each pollutant monitored at each affected facility.
(1) If the total duration of excess emissions for the reporting period is less than 1 percent of the total operating time for the reporting period and CMS downtime for the reporting period is less than 5 percent of the total operating time for the reporting period, only the summary report form shall be submitted and the excess emission report described in 40 CFR 60.7(c) need not be submitted unless requested by the Administrator.
(2) If the total duration of excess emissions for the reporting period is 1 percent or greater of the total operating time for the reporting period or the total CMS downtime for the reporting period is 5 percent or greater of the total operating time for the reporting period, the summary report form and the excess emission report described in 40 CFR 60.7(c) shall both be submitted.

{See attached Figure 1: Summary Report-Gaseous and Opacity Excess Emission and Monitoring System Performance}
[40 CFR 60.7(d)(1) and (2)]

B.92. (1) Notwithstanding the frequency of reporting requirements specified in 40 CFR 60.7(c), an owner or operator who is required by an applicable subpart to submit excess emissions and monitoring systems performance reports (and summary reports) on a quarterly (or more frequent) basis may reduce the frequency of reporting for that standard to semiannual if the following conditions are met:

(i) For 1 full year (e.g., 4 quarterly or 12 monthly reporting periods) the affected facility's excess emissions and monitoring systems reports submitted to comply with a standard under this part continually demonstrate that the facility is in compliance with the applicable standard;

(ii) The owner or operator continues to comply with all recordkeeping and monitoring requirements specified in 40 CFR 60, Subpart A, and the applicable standard; and

(iii) The Administrator does not object to a reduced frequency of reporting for the affected facility, as provided in 40 CFR 60.7(e)(2).

(2) The frequency of reporting of excess emissions and monitoring systems performance (and summary) reports may be reduced only after the owner or operator notifies the Administrator in writing of his or her intention to make such a change and the Administrator does not object to the intended change. In deciding whether to approve a reduced frequency of reporting, the Administrator may review information concerning the source's entire previous performance history during the required recordkeeping period prior to the intended change, including performance test results, monitoring data, and evaluations of an

owner or operator's conformance with operation and maintenance requirements. Such information may be used by the Administrator to make a judgment about the source's potential for noncompliance in the future. If the Administrator disapproves the owner or operator's request to reduce the frequency of reporting, the Administrator will notify the owner or operator in writing within 45 days after receiving notice of the owner or operator's intention. The notification from the Administrator to the owner or operator will specify the grounds on which the disapproval is based. In the absence of a notice of disapproval within 45 days, approval is automatically granted.
(3) As soon as monitoring data indicate that the affected facility is not in compliance with any emission limitation or operating parameter specified in the applicable standard, the frequency of reporting shall revert to the frequency specified in the applicable standard, and the owner or operator shall submit an excess emissions and monitoring systems performance report (and summary report, if required) at the next appropriate reporting period following the noncomplying event. After demonstrating compliance with the applicable standard for another full year, the owner or operator may again request approval from the Administrator to reduce the frequency of reporting for that standard as provided for in 40 CFR 60.7(e)(1) and (e)(2).
[40 CFR 60.7(e)(1), (2), and (3)]

B.93. Any owner or operator subject to the provisions of 40 CFR 60 shall maintain a file of: all measurements, including continuous monitoring system, monitoring device, and performance testing measurements; all continuous monitoring system performance evaluations; all continuous monitoring system or monitoring device calibration checks; adjustments and maintenance performed on these systems or devices; calibration logs for all instruments; and, all other information required by 40 CFR 60 recorded in a permanent form suitable for inspection. The file shall be retained for at least **5 (five)** years following the date of such measurements, maintenance, reports, and records.
[40 CFR 60.7(f); PSD-FL-006(A) & (D); and, Rule 62-213.440(1)(b)2.b., F.A.C.]

B.94. Notification of Construction or Reconstruction. The owner or operator of an affected facility with a capacity to combust greater than 250 tons per day shall submit a notification of construction, which includes the information specified in paragraphs (1) through (4).
(1) Intent to construct.
(2) Planned initial startup date.
(3) The types of fuels that the owner or operator plans to combust in the affected facility.
(4) The municipal waste combustor unit capacity and supporting capacity calculations prepared in accordance with 40 CFR 60.58b(j).
[40 CFR 60.39b and 40 CFR 60.59b(b)]

B.95. The owner or operator of an affected facility subject to the standards under 40 CFR 60.53b, 60.54b, and 60.55b shall maintain records of the information specified in paragraphs (1) through (15), as applicable, for each affected facility for a period of at least 5 years.
(1) The calendar date of each record.
(2) The emission concentrations and parameters measured using continuous monitoring systems as specified under paragraphs (i) and (ii).
(i) The measurements specified in paragraphs (A) through (D) shall be recorded and be available for submittal to the Administrator or review onsite by an inspector.
(A) All 6-minute average opacity levels as specified under 40 CFR 60.58b(c).
(B) All 1-hour average sulfur dioxide emission concentrations as specified under 40 CFR 60.58b(e).
(C) All 1-hour average nitrogen oxides emission concentrations as specified under 40 CFR 60.58b(h).

(D) All 1-hour average carbon monoxide emission concentrations, municipal waste combustor unit load measurements, and particulate matter control device inlet temperatures as specified under 40 CFR 60.58b(i).

(ii) The average concentrations and percent reductions, as applicable, specified in paragraphs (2)(ii)(A) through (2)(ii)(D) shall be computed and recorded, and shall be available for submittal to the Administrator or review on-site by an inspector.

(A) All 24-hour daily geometric average sulfur dioxide emission concentrations and all 24-hour daily geometric average percent reductions in sulfur dioxide emissions as specified under 40 CFR 60.58b(e).

(B) All 24-hour daily arithmetic average nitrogen oxides emission concentrations as specified under 40 CFR 60.58b(h).

(C) All 4-hour block or 24-hour daily arithmetic average carbon monoxide emission concentrations, as applicable, as specified under 40 CFR 60.58b(i).

(D) All 4-hour block arithmetic average municipal waste combustor unit load levels and particulate matter control device inlet temperatures as specified under 40 CFR 60.58b(i).

(3) Identification of the calendar dates when any of the average emission concentrations, percent reductions, or operating parameters recorded under paragraphs (2)(ii)(A) through (2)(ii)(D), or the opacity levels recorded under paragraph (2)(i)(A) are above the applicable limits, with reasons for such exceedances and a description of corrective actions taken.

(4) For affected facilities that apply activated carbon for mercury or dioxin/furan control, the records specified in paragraphs (i) through (v).

(i) The average carbon mass feed rate (in kilograms per hour or pounds per hour) estimated as required under 40 CFR 60.58b(m)(1)(i) during the initial mercury performance test and all subsequent annual performance tests, with supporting calculations.

(ii) The average carbon mass feed rate (in kilograms per hour or pounds per hour) estimated as required under 40 CFR 60.58b(m)(1)(ii) during the initial dioxin/furan performance test and all subsequent annual performance tests, with supporting calculations.

(iii) The average carbon mass feed rate (in kilograms per hour or pounds per hour) estimated for each hour of operation as required under 40 CFR 60.58b(m)(3)(ii), with supporting calculations.

(iv) The total carbon usage for each calendar quarter estimated as specified by 40 CFR 60.58b(m)(3), with supporting calculations.

(v) Carbon injection system operating parameter data for the parameter(s) that are the primary indicator(s) of carbon feed rate (e.g., screw feeder speed).

(5) [Reserved]

(6) Identification of the calendar dates for which the minimum number of hours of any of the data specified in paragraphs (i) through (v) have not been obtained including reasons for not obtaining sufficient data and a description of corrective actions taken.

(i) Sulfur dioxide emissions data;

(ii) Nitrogen oxides emissions data;

(iii) Carbon monoxide emissions data;

(iv) Municipal waste combustor unit load data; and

(v) Particulate matter control device temperature data.

(7) Identification of each occurrence that sulfur dioxide emissions data, nitrogen oxides emissions data (large municipal waste combustors only), or operational data (i.e., carbon monoxide emissions, unit load, and particulate matter control device temperature) have been excluded from the calculation of average emission concentrations or parameters, and the reasons for excluding the data.

(8) The results of daily drift tests and quarterly accuracy determinations for sulfur dioxide, nitrogen oxides, and carbon monoxide continuous emission monitoring systems, as required under Appendix F of this part, procedure 1.

(9) The test reports documenting the results of the initial performance test and all annual performance tests listed in paragraphs (i) and (ii) shall be recorded along with supporting calculations.

(i) The results of the initial performance test and all annual performance tests conducted to determine compliance with the particulate matter, opacity, cadmium, lead, mercury, dioxins/furans, hydrogen chloride, and fugitive ash emission limits.

(ii) For the initial dioxin/furan performance test and all subsequent dioxin/furan performance tests recorded under paragraph (9)(i), the maximum demonstrated municipal waste combustor unit load and maximum demonstrated particulate matter control device temperature (for each particulate matter control device).

(10) [Reserved]

(12) The records specified in paragraphs (i) through (iii).

(i) Records showing the names of the municipal waste combustor chief facility operator, shift supervisors, and control room operators who have been provisionally certified by the American Society of Mechanical Engineers or an equivalent State-approved certification program as required by 40 CFR 60.54b(a) including the dates of initial and renewal certifications and documentation of current certification.

(ii) Records showing the names of the municipal waste combustor chief facility operator, shift supervisors, and control room operators who have been fully certified by the American Society of Mechanical Engineers or an equivalent State-approved certification program as required by 40 CFR 60.54b(b) including the dates of initial and renewal certifications and documentation of current certification.

(iii) Records showing the names of the municipal waste combustor chief facility operator, shift supervisors, and control room operators who have completed the EPA municipal waste combustor operator training course or a State-approved equivalent course as required by 40 CFR 60.54b(d) including documentation of training completion.

(13) Records showing the names of persons who have completed a review of the operating manual as required by 40 CFR 60.54b(f) including the date of the initial review and subsequent annual reviews.

(14) For affected facilities that apply activated carbon for mercury or dioxin/furan control, identification of the calendar dates when the average carbon mass feed rates recorded under (4)(iii) were less than either of the hourly carbon feed rates estimated during performance tests for mercury or dioxin/furan emissions and recorded under paragraphs (4)(i) and (4)(ii), respectively, with reasons for such feed rates and a description of corrective actions taken.

(15) For affected facilities that apply activated carbon for mercury or dioxin/furan control, identification of the calendar dates when the carbon injection system operating parameter(s) that are the primary indicator(s) of carbon mass feed rate (e.g., screw feeder speed) recorded under paragraph (4)(v) are below the level(s) estimated during the performance tests as specified in 40 CFR 60.58b(m)(1)(i) and 40 CFR 60.58b(m)(1)(ii), with reasons for such occurrences and a description of corrective actions taken.

[40 CFR 60.39b and 40 CFR 60.59b(d)]

B.96. The owner or operator of an affected facility shall submit the information specified in paragraphs (1) through (6) in the initial performance test report.

(1) The initial performance test data as recorded under 40 CFR 60.59b(d)(2)(ii)(A) through (d)(2)(ii)(D) for the initial performance test for sulfur dioxide, nitrogen oxides, carbon monoxide, municipal waste combustor unit load level, and particulate matter control device inlet temperature.

(2) The test report documenting the initial performance test recorded under 40 CFR 60.59b(d)(9) for particulate matter, opacity, cadmium, lead, mercury, dioxins/furans, hydrogen chloride, and fugitive ash emissions.

(3) The performance evaluation of the continuous emission monitoring system using the applicable performance specifications in Appendix B of this part.

(4) The maximum demonstrated municipal waste combustor unit load and maximum demonstrated particulate matter control device inlet temperature(s) established during the initial dioxin/furan performance test as recorded under 40 CFR 60.59b(d)(9).
(5) For affected facilities that apply activated carbon injection for mercury control, the owner or operator shall submit the average carbon mass feed rate recorded under 40 CFR 60.59b(d)(4)(i).
(6) For those affected facilities that apply activated carbon injection for dioxin/furan control, the owner or operator shall submit the average carbon mass feed rate recorded under 40 CFR 60.59b(d)(4)(ii).
[40 CFR 60.39b and 40 CFR 60.59b(f)]

B.97. Following the first year of municipal combustor operation, the owner or operator of an affected facility shall submit an annual report including the information specified in paragraphs (1) through (4), as applicable, no later than February 1 of each year following the calendar year in which the data were collected (once the unit is subject to permitting requirements under Title V of the Act, the owner or operator of an affected facility must submit these reports semiannually).
(1) A summary of data collected for all pollutants and parameters regulated under this subpart, which includes the information specified in paragraphs (i) through (v).
(i) A list of the particulate matter, opacity, cadmium, lead, mercury, dioxins/furans, hydrogen chloride, and fugitive ash emission levels achieved during the performance tests recorded under 40 CFR 60.59b (d)(9).
(ii) A list of the highest emission level recorded for sulfur dioxide, nitrogen oxides, carbon monoxide, municipal waste combustor unit load level, and particulate matter control device inlet temperature based on the data recorded under 40 CFR 60.59b(d)(2)(ii)(A) through (d)(2)(ii)(D).
(iii) List the highest opacity level measured, based on the data recorded under 40 CFR 60.59b(d)(2)(i)(A).
(iv) The total number of days that the minimum number of hours of data for sulfur dioxide, nitrogen oxides, carbon monoxide, municipal waste combustor unit load, and particulate matter control device temperature data were not obtained based on the data recorded under 40 CFR 60.59b(d)(6).
(v) The total number of hours that data for sulfur dioxide, nitrogen oxides, carbon monoxide, municipal waste combustor unit load, and particulate matter control device temperature were excluded from the calculation of average emission concentrations or parameters based on the data recorded under 40 CFR 60.59b(d)(7).
(2) The summary of data reported under paragraph (1) shall also provide the types of data specified in paragraphs (1)(i) through (1)(vi) for the calendar year preceding the year being reported, in order to provide the Administrator with a summary of the performance of the affected facility over a 2-year period.
(3) The summary of data including the information specified in paragraphs (1) and (2) shall highlight any emission or parameter levels that did not achieve the emission or parameter limits specified under this subpart.
(4) A notification of intent to begin the reduced dioxin/furan performance testing schedule specified in 40 CFR 60.58b(g)(5)(iii) during the following calendar year.
[40 CFR 60.39b and 40 CFR 60.59b(g)]

B.98. The owner or operator of an affected facility shall submit a semiannual report that includes the information specified in paragraphs (1) through (5) for any recorded pollutant or parameter that does not comply with the pollutant or parameter limit specified under this subpart, according to the schedule specified under paragraph (6).
(1) The semiannual report shall include information recorded under 40 CFR 60.59b(d)(3) for sulfur dioxide, nitrogen oxides, carbon monoxide, municipal waste combustor unit load level, particulate matter control device inlet temperature, and opacity.

(2) For each date recorded as required by 40 CFR 60.59b(d)(3) and reported as required by paragraph (1), the semiannual report shall include the sulfur dioxide, nitrogen oxides, carbon monoxide, municipal waste combustor unit load level, particulate matter control device inlet temperature, or opacity data, as applicable, recorded under 40 CFR 60.59b(d)(2)(ii)(A) through (d)(2)(ii)(D) and (d)(2)(i)(A), as applicable.
(3) If the test reports recorded under 40 CFR 56.59b(d)(9) document any particulate matter, opacity, cadmium, lead, mercury, dioxins/furans, hydrogen chloride, and fugitive ash emission levels that were above the applicable pollutant limits, the semiannual report shall include a copy of the test report documenting the emission levels and the corrective actions taken.
(4) The semiannual report shall include the information recorded under 40 CFR 60.59b(d)(15) for the carbon injection system operating parameter(s) that are the primary indicator(s) of carbon mass feed rate.
(5) For each operating date reported as required by paragraph (4), the semiannual report shall include the carbon feed rate data recorded under 40 CFR 60.59b(d)(4)(iii).
(6) Semiannual reports required by this condition shall be submitted according to the schedule specified in paragraphs (i) and (ii).

(i) If the data reported in accordance with paragraphs (1) through (5) were collected during the first calendar half, then the report shall be submitted by August 1 following the first calendar half.
(ii) If the data reported in accordance with paragraphs (1) through (5) were collected during the second calendar half, then the report shall be submitted by February 1 following the second calendar half.

[40 CFR 60.39b and 40 CFR 60.59b(h)]

B.99. All reports specified under 40 CFR 60.59b(a), (b), (c), (f), (g), (h), and (i) shall be submitted as a paper copy, postmarked on or before the submittal dates specified under these paragraphs, and maintained on-site as a paper copy for a period of **5** years.
[40 CFR 60.39b and 40 CFR 60.59b(j); PSD-FL-006(A) & (D); and, Rule 62-213.440, F.A.C.]

B.100. All records specified under 40 CFR 60.59b(d) and (e) shall be maintained onsite in either paper copy or computer-readable format, unless an alternative format is approved by the Administrator.
[40 CFR 60.39b and 40 CFR 60.59b(k)]

B.101. If the owner or operator of an affected facility would prefer a different annual or semiannual date for submitting the periodic reports required by 40 CFR 60.59b(g), (h) and (i), then the dates may be changed by mutual agreement between the owner or operator and the Administrator according to the procedures specified in 40 CFR 60.19(c) of Subpart A of 40 CFR 60.
[40 CFR 60.39b and 40 CFR 60.59b(l)]

B.102. In the case of excess emissions resulting from malfunctions, each owner or operator shall notify the Department's Southeast District office and the Dade County's DERM office in accordance with Rule 62-4.130, F.A.C. A full written report on the malfunctions shall be submitted in a quarterly report, if requested by the Department or its agent.
Rule 62-210.700(6), F.A.C.]

B.103. Submit to the Department's Southeast District office and the Dade County's DERM office a written report of emissions in excess of emission limiting standards for each calendar quarter. The nature and cause of the excess emissions shall be explained. This report does not relieve the owner or operator of the legal liability for violations. All recorded data shall be maintained on file by the Source for a period of **five** years.
[Rule 62-213.440, F.A.C.]

B.104. The owner or operator shall submit excess emission reports to the Department's Southeast District office and the Dade County's DERM office for any calendar quarter during which there are excess emissions from the facility. If there are no excess emissions during the calendar quarter, the owner or operator shall submit a report quarterly stating that no excess emissions occurred during the quarterly reporting period. The report shall include the following:
(a) The magnitude of excess emissions computed in accordance with 40 CFR 60.13(h), any conversion factors used, and the date and time of commencement and completion of each period of excess emissions [40 CFR 60.7(c)(1)].
(b) Specific identification of each period of excess emissions that occurs during startups, shutdowns, and malfunctions of the furnace boiler system. The nature and cause of any malfunction (if known) and the corrective action taken or preventive measured adopted [40 CFR 60.7(c)(2)].
(c) The date and time identifying each period during which the continuous monitoring system was inoperative except for zero and span checks, and the nature of the system repairs of adjustments [40 CFR 60.7(c)(2)].
(d) When no excess emissions have occurred or the continuous monitoring system has not been inoperative, repaired, or adjusted, such information shall be stated in the report [40 CFR 60.7(c)(4)].
(e) The owner or operator shall maintain a file of all measurements, including continuous monitoring systems performance evaluations; monitoring systems or monitoring device calibration; checks; adjustments and maintenance performed on these systems or devices; and all other information required by this permit recorded in a permanent form suitable for inspection [40 CFR 60.7(d)].
[PSD-FL-006(A)]

B.105. Test Reports.
(a) The owner or operator of an emissions unit for which a compliance test is required shall file a report with the Department's Southeast District office and the Dade County's DERM office on the results of each such test.
(b) The required test report shall be filed with the Department's Southeast District office and the Dade County's DERM office as soon as practical but no later than 45 days after the last sampling run of each test is completed.
(c) The test report shall provide sufficient detail on the emissions unit tested and the test procedures used to allow the Department's Southeast District office and the Dade County's DERM office to determine if the test was properly conducted and the test results properly computed. As a minimum, the test report, other than for an EPA or DEP Method 9 test, shall provide the following information:

1. The type, location, and designation of the emissions unit tested.
2. The facility at which the emissions unit is located.
3. The owner or operator of the emissions unit.
4. The normal type and amount of fuels used and materials processed, and the types and amounts of fuels used and material processed during each test run.
5. The means, raw data and computations used to determine the amount of fuels used and materials processed, if necessary to determine compliance with an applicable emission limiting standard.
6. The type of air pollution control devices installed on the emissions unit, their general condition, their normal operating parameters (pressure drops, total operating current and GPM scrubber water), and their operating parameters during each test run.
7. A sketch of the duct within 8 stack diameters upstream and 2 stack diameters downstream of the sampling ports, including the distance to any upstream and downstream bends or other flow disturbances.
8. The date, starting time and duration of each sampling run.

9. The test procedures used, including any alternative procedures authorized pursuant to Rule 62-297.620, F.A.C. Where optional procedures are authorized in this chapter, indicate which option was used.
10. The number of points sampled and configuration and location of the sampling plane.
11. For each sampling point for each run, the dry gas meter reading, velocity head, pressure drop across the stack, temperatures, average meter temperatures and sample time per point.
12. The type, manufacturer and configuration of the sampling equipment used.
13. Data related to the required calibration of the test equipment.
14. Data on the identification, processing and weights of all filters used.
15. Data on the types and amounts of any chemical solutions used.
16. Data on the amount of pollutant collected from each sampling probe, the filters, and the impingers, are reported separately for the compliance test.
17. The names of individuals who furnished the process variable data, conducted the test, analyzed the samples and prepared the report.
18. All measured and calculated data required to be determined by each applicable test procedure for each run.
19. The detailed calculations for one run that relate the collected data to the calculated emission rate.
20. The applicable emission standard, and the resulting maximum allowable emission rate for the emissions unit, plus the test result in the same form and unit of measure.
21. A certification that, to the knowledge of the owner or his authorized agent, all data submitted are true and correct. When a compliance test is conducted for the Department's Southeast District or its agent, the person who conducts the test shall provide the certification with respect to the test procedures used. The owner or his authorized agent shall certify that all data required and provided to the person conducting the test are true and correct to his knowledge.

[Rule 62-297.310(8), F.A.C.]

B.106. Monthly records shall be maintained of the amount of propane and natural gas used by the auxiliary burners of each emissions unit and the equivalent heat input from the propane and natural gas (calculated using the heat value for the propane and natural gases provided by the gas supplier).
[Rule 62-213.440, F.A.C.; and, PSD-FL-006(D)]

B.107. Charging Rate Monitoring. The average daily RDF charging rate shall be determined on a monthly basis and recorded for each combustor unit. The daily charging rate shall be determined each month on an average daily basis for each combustor unit using the facility's truck scale weight data, refuse pit inventory data and RDF operating data for the preceding calendar month. Monthly truck scale weight records of the weight of solid waste received and processed at the facility, and refuse pit inventory data, shall be used to determine the amount of RDF charged during the preceding calendar month on an average daily basis. The RDF load level measurements or other operating data shall be used to determined the number of operating hours per combustor unit for each day during the preceding calendar month.
[Rule 62-213.440, F.A.C.; PSD-FL-006(D); and, 40 CFR 60.53(a)]

B.108. Segregated Solid Waste Recordkeeping. The following records shall be made and kept to demonstrate compliance with the segregated non-MSW percentage limitations of specific condition **B.12.**: (1) Each segregated load of non-MSW materials, that is subject to the percentage weight limitations of specific condition **B.12.**, which is received for processing shall be documented as to waste description and weight. The weight of all waste materials received for processing shall be measured using the facility truck scales and recorded.

(2) Each day the total weight of segregated tires received shall be computed, and the daily total shall be added to the sum of the daily totals from the current calendar month. At the end of each calendar month, the resultant monthly total weight of tires shall be divided by the total weight of all waste materials received in the same calendar month, and the resulting number shall be multiplied by 100 to express the ratio in percentage terms. The percentage computed shall be compared to the 3% limitation.
(3) Each day the total weight of segregated non-MSW materials received that are subject to the 5% restriction shall be computed, and the daily total shall be added to the sum of the daily totals from the previous days in the current calendar month. At the end of each calendar month, the resultant monthly total weight of segregated non-MSW materials shall be divided by the total weight of all waste materials received in the same calendar month, and the resulting number shall be multiplied by 100 to express the ratio in percentage terms. The percentage computed shall be compared to the 5% limitation.
[Rule 62-213.440, F.A.C.; and, PSD-FL-006(D)]

B.109. The owner or operator shall maintain a central file containing all measurements, records, and other data that are required to be collected pursuant to the various specific conditions of this permit. This file shall include but not be limited to:
1) the data collected from in-stack monitoring instruments;
2) the records on RDF input rates per emissions unit;
3) the amount of propane gas burned per emissions unit;
4) the results of all source tests or performance tests;
5) the amount of activated carbon or other reactant chemicals used for mercury control;
6) calibration logs for all instruments;
7) maintenance/repair logs for any work performed on equipment or instrument which is subject to this permit; and,
8) fuel analyses data.

All measurements, records, and other data required to be maintained by owner or operator shall be retained for at least **five** (5) years following the date on which such measurements, records, or data are recorded. These data shall be made available to the Department upon request. The Department's Southeast District office and the Dade County's DERM office shall be notified in writing at least 15 days prior to the testing of any instrument required to be operated by these conditions of certification in order to allow witnessing by authorized personnel.
[PSD-FL-006(A) & (D); and, Rule 62-213.440, F.A.C.]

B.110. Reports.
a) A copy of the results of any formal emission shall be submitted within forty-five days of the last sampling run to the Department's Southeast District office and the Dade County's DERM office. Reports shall be in a format consistent with and shall include the information in accordance with Rule 62-297.570, F.A.C.
b) Emissions monitoring shall be reported to the Department's Southeast District office and the Dade County's DERM office on a quarterly basis in accordance with Chapter 62-297, F.A.C., and 40 CFR Part 60.7, as appropriate.
c) Notice of anticipated and actual start-up dates of control devices under this permit shall be submitted to Department's Southeast District office and the Dade County's DERM office.
[PSD-FL-006(A) & (D)]

Miscellaneous Requirements.

B.111. Activated Carbon Injection. The owner or operator of an affected facility where activated carbon injection is used to comply with the mercury emission limit (see specific condition **B.27.**), or the dioxin/furan emission limits (see specific condition **B.34.**), or the dioxin/furan emission level specified in 40 CFR 60.58b(g)(5)(iii), shall follow the procedures specified in paragraphs (1) through (3).
(1) During the performance tests for dioxins/furans and mercury, as applicable, the owner or operator shall estimate an average carbon mass feed rate based on carbon injection system operating parameters such as the screw feeder speed, hopper volume, hopper refill frequency, or other parameters appropriate to the feed system being employed, as specified in paragraphs (i) and(ii).
(i) An average carbon mass feed rate in kilograms per hour or pounds per hour shall be estimated during the initial performance test for mercury emissions and each subsequent performance test for mercury emissions.
(ii) An average carbon mass feed rate in kilograms per hour or pounds per hour shall be estimated during the initial performance test for dioxin/furan emissions and each subsequent performance test for dioxin/furan emissions.
(2) During operation of the affected facility, the carbon injection system operating parameter(s) that are the primary indicator(s) of the carbon mass feed rate (e.g., screw feeder setting) must equal or exceed the level(s) documented during the performance tests specified under paragraphs (1)(i) and (1)(ii).
(3) The owner or operator of an affected facility shall estimate the total carbon usage of the plant (kilograms or pounds) for each calendar quarter by two independent methods, according to the procedures in paragraphs (i) and (ii).
(i) The weight of carbon delivered to the plant.
(ii) Estimate the average carbon mass feed rate in kilograms per hour or pounds per hour for each hour of operation for each affected facility based on the parameters specified under paragraph (1), and sum the results for all affected facilities at the plant for the total number of hours of operation during the calendar quarter.
[40 CFR 60.38b and 40 CFR 60.58b(m); and, PSD-FL-006(D)]

B.112. Acid Rain Part Application. For any unit which was a solid waste incinerator, burning less than 20 percent fossil fuel as described in 40 CFR 72.6(b)(7), adopted and incorporated by reference at Rule 62-204.800, F.A.C., the designated representative of the source containing the unit shall submit a complete Acid Rain Part application governing such unit to the Department before the later of January 1, 1998, or March 1 of the year following the three calendar year period in which the incinerator consumed 20 percent or more fossil fuel on a British thermal unit (BTU) basis.
[Rule 62-214.320(1)(h), F.A.C.]

B.113. Baghouse Operations: Air-to-Cloth Ratio. The baghouses shall have a minimum air-to-cloth ratio of 4:1.
[PSD-FL-006(A) & (D)]

B.114. The permittee is authorized to install and operate permanently mounted gas burners, selective noncatalytic reduction (SNCR) systems, and other controls to achieve the nitrogen oxides and carbon monoxide emissions limits.
[PSD-FL-006(D)]

Subsection C. This section addresses the following emissions units.

E.U. ID No.	Brief Description
-rrr	MSW to RDF Processing Facility: 3,000 TPD; 18,000 tons/wk; and, 936,000 TPY
-sss	Bulky Waste to Biomass Processing Facility: 400,000 TPY

Emissions Unit **-rrr** is a processing activity of receiving, handling and converting of MSW into RDF and saleable extractables, such as metals and glass. The facility is designed to process 3,000 tons/day, 18,000 tons/wk, and 936,000 tons/yr of RDF.

Emissions Unit **-sss** is an existing bulky waste processing system that will be modified into a biomass fuel preparation system and is designed to process up to 400,000 tons/yr of the bulky waste into biomass, which will be transported off-site for use in biomass-fired cogeneration units or combusted on-site.

{Permitting note(s): Emissions units **-rrr** and **-sss** are each minor emissions units regulated under Rule 62-210.300, F.A.C., Permits Required; Rule 62-212.400, F.A.C., Prevention of Significant Deterioration [PSD; and, PSD-FL-006(A), (B) & (D)]}

The following specific conditions apply to the emissions unit(s) listed above:

General

Essential Potential to Emit (PTE) Parameters

C.1. Hours of Operation. Each emissions unit may operate continuously, i.e., 8,760 hrs/yr.
[Rules 62-213.440, 62-210.200(PTE), and 62-296.700(4)(a)7., F.A.C.; and, PSD-FL-006(D)]

Emission Limitations and Standards

C.2. Particulate Matter Emissions.
(1) Bulky Waste to Biomass Processing Facility. Particulate matter emissions from any baghouse shall not exceed 0.01 gr/dscf.
[PSD-FL-006(A) & (D)]

C.3. Visible Emissions.
a. MSW to RDF Processing Facility. Visible emissions from each baghouse exhaust shall not exceed 10 percent opacity, six-minute average.
b. Bulky Waste to Biomass Processing Facility. Visible emissions from each baghouse exhaust shall not exceed 5 percent opacity, since each emissions unit's potential particulate matter emissions are less than 100 TPY and is equipped with a baghouse control system. As long as the visible emissions do not exceed 5 percent opacity, compliance is assumed for the particulate matter limitations established in specific condition **C.2.**, above.

If the Department's Southeast District office and the Dade County's DERM office has reason to believe that the particulate matter weight emissions standard in specific condition **C.2.** is not being met, it shall require that compliance be demonstrated by the test method specified in specific condition **C.9.**
[PSD-FL-006(A) & (D); and, Rule 62-297.620(4), F.A.C.]

Excess Emissions

C.4. Excess emissions resulting from startup, shutdown or malfunction shall be permitted provided that best operational practices to minimize emissions are adhered to and the duration of excess emissions shall be minimized but in no case exceed two hours in any 24 hour period unless specifically authorized by the Department for longer duration.
[Rule 62-210.700(1), F.A.C.]

C.5. Excess emissions which are caused entirely or in part by poor maintenance, poor operation, or any other equipment or process failure which may reasonably be prevented during startup, shutdown or malfunction shall be prohibited.
[Rule 62-210.700(4), F.A.C.]

Monitoring of Operations

C.6. Determination of Process Variables.
(a) Required Equipment. The owner or operator of an emissions unit for which compliance tests are required shall install, operate, and maintain equipment or instruments necessary to determine process variables, such as process weight input or heat input, when such data are needed in conjunction with emissions data to determine the compliance of the emissions unit with applicable emission limiting standards.
(b) Accuracy of Equipment. Equipment or instruments used to directly or indirectly determine process variables, including devices such as belt scales, weight hoppers, flow meters, and tank scales, shall be calibrated and adjusted to indicate the true value of the parameter being measured with sufficient accuracy to allow the applicable process variable to be determined within 10% of its true value.
[Rule 62-297.310(5), F.A.C.]

Test Methods and Procedures

C.7. Annual Tests Required. Annual visible emissions compliance tests shall be performed for each emissions unit.
[Rule 62-297.310(7), F.A.C.]

C.8. Visible Emissions. The test method for visible emissions for all emissions units shall be EPA Method 9, in accordance with Rule 62-297.401, F.A.C., and 40 CFR 60, Appendix A.
[Rule 62-297.401, F.A.C.; and, PSD-FL-006(A), (B) & (D)]

C.9. Particulate Matter Emissions. The test method for particulate matter emissions for all units shall be EPA Method 5, in accordance with Rule 62-297.401, F.A.C., and 40 CFR 60, Appendix A.
[Rule 62-297.401, F.A.C.; and, PSD-FL-006(A), (B) & (D)]

C.10. Required Number of Test Runs. For mass emission limitations, a compliance test shall consist of three complete and separate determinations of the total air pollutant emission rate through the test section of the stack or duct and three complete and separate determinations of any applicable process variables corresponding to the three distinct time periods during which the stack emission rate was measured provided, however, that three complete and separate determinations shall not be required if the process variables are not subject to variation during a compliance test, or if three determinations are not necessary in order to calculate the unit's emission rate. The three required test runs shall be completed within one consecutive five day period. In the event that a sample is lost or one of the three runs must be discontinued because of circumstances beyond the control of the owner or operator, and a valid third run cannot be obtained within the five day period allowed for the test, the Secretary or his or her designee

may accept the results of the two complete runs as proof of compliance, provided that the arithmetic mean of the results of the two complete runs is at least 20 percent below the allowable emission limiting standards.
[Rule 62-297.310(1), F.A.C.]

C.11. Operating Rate During Testing. Testing of emissions shall be conducted with each emissions unit operation at permitted capacity, which is defined as 90 to 100 percent of the maximum operation rate allowed by the permit. If it is impracticable to test at permitted capacity, an emissions unit may be tested at less than the minimum permitted capacity; in this case, subsequent emissions unit operation is limited to 110 percent of the test load until a new test is conducted. Once the emissions unit is so limited, operation at higher capacities is allowed for no more than 15 consecutive days for the purpose of additional compliance testing to regain the authority to operate at the permitted capacity.
[Rules 62-297.310(2) & (2)(b), F.A.C.]

C.12. Calculation of Emission Rate. The indicated emission rate or concentration shall be the arithmetic average of the emission rate or concentration determined by each of the separate test runs unless otherwise specified in a particular test method or applicable rule.
[Rule 62-297.310(3), F.A.C.]

C.13. Applicable Test Procedures.
(a) Required Sampling Time.
1. Unless otherwise specified in the applicable rule, the required sampling time for each test run shall be no less than one hour and no greater than four hours, and the sampling time at each sampling point shall be of equal intervals of at least two minutes.
2. Opacity Compliance Tests. When either EPA Method 9 or DEP Method 9 is specified as the applicable opacity test method, the required minimum period of observation for a compliance test shall be sixty (60) minutes for emissions units which emit or have the potential to emit 100 tons per year or more of particulate matter, and thirty (30) minutes for emissions units which have potential emissions less than 100 tons per year of particulate matter and are not subject to a multiple-valued opacity standard. The opacity test observation period shall include the period during which the highest opacity emissions can reasonably be expected to occur. Exceptions to these requirements are as follows:
a. For batch, cyclical processes, or other operations which are normally completed within less than the minimum observation period and do not recur within that time, the period of observation shall be equal to the duration of the batch cycle or operation completion time.
b. The observation period for special opacity tests that are conducted to provide data to establish a surrogate standard pursuant to Rule 62-297.310(5)(k), F.A.C., Waiver of Compliance Test Requirements, shall be established as necessary to properly establish the relationship between a proposed surrogate standard and an existing mass emission limiting standard.
c. The minimum observation period for opacity tests conducted by employees or agents of the Department to verify the day-to-day continuing compliance of a unit or activity with an applicable opacity standard shall be twelve minutes.
(b) Minimum Sample Volume. Unless otherwise specified in the applicable rule, the minimum sample volume per run shall be 25 dry standard cubic feet.
(c) Required Flow Rate Range. For EPA Method 5 particulate sampling, acid mist/sulfur dioxide, and fluoride sampling which uses Greenburg Smith type impingers, the sampling nozzle and sampling time shall be selected such that the average sampling rate will be between 0.5 and 1.0 actual cubic feet per minute, and the required minimum sampling volume will be obtained.

(d) Calibration of Sampling Equipment. Calibration of the sampling train equipment shall be conducted in accordance with the schedule shown in Table 297.310-1, attached to this permit.
(e) Allowed Modification to EPA Method 5. When EPA Method 5 is required, the following modification is allowed: the heated filter may be separated from the impingers by a flexible tube.
[Rule 62-297.310(4), F.A.C.]

C.14. Required Stack Sampling Facilities. When a mass emissions stack test is required, the permittee shall comply with the requirements contained in Appendix SS-1, Stack Sampling Facilities, attached to this permit.
[Rule 62-297.310(6), F.A.C.]

C.15. Frequency of Compliance Tests. The following provisions apply only to those emissions units that are subject to an emissions limiting standard for which compliance testing is required.
(a) General Compliance Testing.

3. The owner or operator of an emissions unit that is subject to any emission limiting standard shall conduct a compliance test that demonstrates compliance with the applicable emission limiting standard prior to obtaining a renewed operation permit. Emissions units that are required to conduct an annual compliance test may submit the most recent annual compliance test to satisfy the requirements of this provision. In renewing an air operation permit pursuant to Rule 62-210.300(2)(a)3.b., c., or d., F.A.C., the Department shall not require submission of emission compliance test results for any emissions unit that, during the year prior to renewal:
   a. Did not operate; or
   b. In the case of a fuel burning emissions unit, burned liquid and/or solid fuel for a total of no more than 400 hours.
4. During each federal fiscal year (October 1 - September 30), unless otherwise specified by rule, order, or permit, the owner or operator of each emissions unit shall have a formal compliance test conducted for:
   a. Visible emissions, if there is an applicable standard;
   b. Each of the following pollutants, if there is an applicable standard, and if the emissions unit emits or has the potential to emit: 5 tons per year or more of lead or lead compounds measured as elemental lead; 30 tons per year or more of acrylonitrile; or 100 tons per year or more of any other regulated air pollutant; and
   c. Each NESHAP pollutant, if there is an applicable emission standard.
9. The owner or operator shall notify the Department's Southeast District office and the Dade County's DERM office at least 15 days prior to the date on which each formal compliance test is to begin, of the date, time, and place of each such test, and the test contact person who will be responsible for coordinating and having such test conducted for the owner or operator.

(b) Special Compliance Tests. When the Department's Southeast District office or the Dade County's DERM office, after investigation, has good reason (such as complaints, increased visible emissions or questionable maintenance of control equipment) to believe that any applicable emission standard contained in a Department rule or in a permit issued pursuant to those rules is being violated, it shall require the owner or operator of the emissions unit to conduct compliance tests which identify the nature and quantity of pollutant emissions from the emissions unit and to provide a report on the results of said tests to the Department's Southeast District office and the Dade County's DERM office.
(c) Waiver of Compliance Test Requirements. If the owner or operator of an emissions unit that is subject to a compliance test requirement demonstrates to the Department, pursuant to the procedure established in Rule 62-297.620, F.A.C., that the compliance of the emissions unit with an applicable weight emission limiting standard can be adequately determined by means other than the designated test procedure, such as specifying a surrogate standard of no visible emissions for particulate matter sources

equipped with a bag house or specifying a fuel analysis for sulfur dioxide emissions, the Department shall waive the compliance test requirements for such emissions units and order that the alternate means of determining compliance be used, provided, however, the provisions of Rule 62-297.310(7)(b), F.A.C., shall apply.
[Rule 62-297.310(7), F.A.C.; PSD-FL-006(D); and, SIP approved]

Recordkeeping and Reporting

C.16. In the case of excess emissions resulting from malfunctions, each owner or operator shall notify the Department's Southeast District office and then Dade County's DERM office in accordance with Rule 62-4.130, F.A.C. A full written report on the malfunctions shall be submitted in a quarterly report, if requested by the Department or its agent.
[Rule 62-210.700(6), F.A.C.]

C.17. Test Reports.
(a) The owner or operator of an emissions unit for which a compliance test is required shall file a report with the Department's Southeast District office and the Dade County's DERM office on the results of each such test.
(b) The required test report shall be filed with the Department's Southeast District office and the Dade County's DERM office as soon as practical but no later than 45 days after the last sampling run of each test is completed.
(c) The test report shall provide sufficient detail on the emissions unit tested and the test procedures used to allow the Department's Southeast District office and the Dade County's DERM office to determine if the test was properly conducted and the test results properly computed. As a minimum, the test report, other than for an EPA or DEP Method 9 test, shall provide the following information:

1. The type, location, and designation of the emissions unit tested.
2. The facility at which the emissions unit is located.
3. The owner or operator of the emissions unit.
4. The normal type and amount of fuels used and materials processed, and the types and amounts of fuels used and material processed during each test run.
5. The means, raw data and computations used to determine the amount of fuels used and materials processed, if necessary to determine compliance with an applicable emission limiting standard.
6. The type of air pollution control devices installed on the emissions unit, their general condition, their normal operating parameters (pressure drops, total operating current and GPM scrubber water), and their operating parameters during each test run.
7. A sketch of the duct within 8 stack diameters upstream and 2 stack diameters downstream of the sampling ports, including the distance to any upstream and downstream bends or other flow disturbances.
8. The date, starting time and duration of each sampling run.
9. The test procedures used, including any alternative procedures authorized pursuant to Rule 62-297.620, F.A.C. Where optional procedures are authorized in this chapter, indicate which option was used.
10. The number of points sampled and configuration and location of the sampling plane.
11. For each sampling point for each run, the dry gas meter reading, velocity head, pressure drop across the stack, temperatures, average meter temperatures and sample time per point.
12. The type, manufacturer and configuration of the sampling equipment used.
13. Data related to the required calibration of the test equipment.
14. Data on the identification, processing and weights of all filters used.
15. Data on the types and amounts of any chemical solutions used.

16. Data on the amount of pollutant collected from each sampling probe, the filters, and the impingers, are reported separately for the compliance test.
17. The names of individuals who furnished the process variable data, conducted the test, analyzed the samples and prepared the report.
18. All measured and calculated data required to be determined by each applicable test procedure for each run.
19. The detailed calculations for one run that relate the collected data to the calculated emission rate.
20. The applicable emission standard, and the resulting maximum allowable emission rate for the emissions unit, plus the test result in the same form and unit of measure.
21. A certification that, to the knowledge of the owner or his authorized agent, all data submitted are true and correct. When a compliance test is conducted for the Department's Southeast District or its agent, the person who conducts the test shall provide the certification with respect to the test procedures used. The owner or his authorized agent shall certify that all data required and provided to the person conducting the test are true and correct to his knowledge.

[Rules 62-213.440 and 62-297.310(8), F.A.C.]

Subsection D. This section addresses the following emissions unit.

E.U. ID No.	Brief Description
-ttt	Ash Building and Handling System Ash Storage Silo with Baghouse

Fly ash collected by the existing ESPs (future: fabric filters) is conveyed to the fly ash handling building. The ash handling system is completely enclosed to decrease the potential for fugitive emissions. The ash is quenched and wetted before being temporarily stored in the ash handling facility and loaded onto a truck. A baghouse is located on the ash handling building as an added precaution for fugitive emissions. The baghouse keeps the building under negative pressure.

{Permitting note(s). This emissions unit is regulated under NSPS - 40 CFR 60, Subpart Cb, Emissions Guidelines and Compliance Times for Large Municipal Waste Combustors That Are Constructed on or Before September 20, 1994, adopted and incorporated by reference, subject to provisions, in Rule 62-204.800(8)(b), F.A.C.; and, Rule 62-212.400(5), F.A.C., Prevention of Significant Deterioration [PSD; PSD-FL-006, -006(A), (B) & (D)]. Note: This project is subject to the requirements of 40 CFR 60, Subpart Cb. This permit may refer to the requirements of 40 CFR 60, Subpart Eb, where these requirements are referenced by 40 CFR 60, Subpart Cb. The fugitive particulate matter control requirements for the ash handling activities are specified in 40 CFR 60.55b.}

The following specific Conditions apply to the emissions unit(s) listed above:

General

D.1. Definitions. For the purposes of Rule 62-204.800(8), F.A.C., the definitions contained in the various provisions of 40 CFR Part 60, adopted herein shall apply except that the term "Administrator" when used in 40 CFR Part 60, shall mean the Secretary or the Secretary's designee.
[Rule 62-204.800(8)(a)2., F.A.C.; and, 40 CFR 60.2]

Essential Potential to Emit (PTE) Parameters

D.2. Hours of Operation. This emissions unit is allowed to operate continuously, i.e., 8,760 hours/year.
[Rule 62-210.200(PTE), F.A.C.; and, PSD-FL-006(D)]

Emission Limitations and Standards

D.3. PM and VE: Ash Silo and Ash Conditioning Agent Silo Baghouses.
(a) PM emissions from the any ash silo or ash conditioning agent silo baghouse shall not exceed 0.01 gr/dscf; or,
(b) Visible emissions shall not exceed 5 percent opacity, since each emissions unit's potential particulate matter emissions are less than 100 TPY and is equipped with a baghouse control system. As long as the visible emissions do not exceed 5 percent opacity, compliance is assumed for the particulate matter limitations established in paragraph (a) above.

If the Department's Southeast District office or the Dade County's DERM office has reason to believe that the particulate matter weight emissions standard in paragraph (a) above is not being met, it shall require that compliance be demonstrated by the test method specified in specific condition **D.11.**
(c) Compliance testing of the ash silos (baghouse) shall be conducted within 90 days of completion of construction and initial operation; and, annually thereafter.

[PSD-FL-006(A) & (D); and, Rule 62-297.620(4), F.A.C.]

D.4. Fugitive Ash Emissions. (a) On and after the date on which the initial performance test is completed or is required to be completed under 40 CFR 60.8 of Subpart A (see specific condition **D.10.**), no owner or operator of an affected facility shall cause to be discharged to the atmosphere visible emissions of combustion ash from an ash conveying system (including conveyor transfer points) in excess of 5 percent of the observation period (i.e., 9 minutes per 3-hour period), as determined by EPA Reference Method 22 observations as specified in 40 CFR 60.58b(k), except as provided in paragraphs (b) and (c). See specific condition **D.7.**
(b) The emission limit specified in paragraph (a) does not cover visible emissions discharged inside buildings or enclosures of ash conveying systems; however, the emission limit specified in paragraph (a) does cover visible emissions discharged to the atmosphere from buildings or enclosures of ash conveying systems.
(c) The provisions of paragraph (a) do not apply during maintenance and repair of ash conveying systems.
[40 CFR 60.36b and 40 CFR 60.55b; and, PSD-FL-006(D)]

D.5. The potential for dust generation by ash handling activities will be mitigated by quenching the ash prior to loading in ash transport trucks. The ash handling facilities shall be enclosed. Unprocessed refuse storage areas which must be open for operational purposes (e.g., tipping floor of the refuse bunker while trucks are entering and leaving) will be under negative air pressure. Residue from the grates, grate siftings, and ash from the combustor/boiler and fabric filter hoppers during normal operations shall be discharged into the ash quenching system, or otherwise handled in a manner to minimize visible dust. The ash/residue in the ash handling building shall remain sufficiently moist to prevent dust during storage and handling operations.
[PSD-FL-006(A) & (D); and, Rule 62-4.070(3), F.A.C.]

Excess Emissions

{Permitting note: The Excess Emissions Rule at Rule 62-210.700, F.A.C., cannot vary any requirement of a NSPS, NESHAP, or Acid Rain program provision.}

D.6. At all times, including periods of startup, shutdown, and malfunction, owners and operators shall, to the extent practicable, maintain and operate any affected facility including associated air pollution control equipment in a manner consistent with good air pollution control practice for minimizing emissions. Determination of whether acceptable operating and maintenance procedures are being used will be based on information available to the Administrator which may include, but is not limited to, monitoring results, opacity observations, review of operating and maintenance procedures, and inspection of the source.
[40 CFR 60.11(d)]

D.7. Excess emissions from these emissions units resulting from startup, shutdown or malfunction shall be permitted provided that best operational practices to minimize emissions are adhered to and the duration of excess emissions shall be minimized but in no case exceed two hours in any 24 hour period unless specifically authorized by the Department for longer duration.
[Rule 62-210.700(1), F.A.C.]

D.8. Excess emissions which are caused entirely or in part by poor maintenance, poor operation, or any other equipment or process failure which may reasonably be prevented during startup, shutdown or malfunction shall be prohibited.

[Rule 62-210.700(4), F.A.C.]

Test Methods and Procedures

D.9. The procedures specified in paragraphs (1) through (4) shall be used for determining compliance with the fugitive ash emission limit under 40 CFR 60.55b. (See specific conditions **D.3.** and **D.4.**)
(1) The EPA Reference Method 22 shall be used for determining compliance with the fugitive ash emission limit under 40 CFR 60.55b. The minimum observation time shall be a series of three 1-hour observations. The observation period shall include times when the facility is transferring ash from the municipal waste combustor unit to the area where ash is stored or loaded into containers or trucks.
(2) The average duration of visible emissions per hour shall be calculated from the three 1-hour observations. The average shall be used to determine compliance with 40 CFR 60.55b.
(3) The owner or operator of an affected facility shall conduct an initial performance test for fugitive ash emissions as required under 40 CFR 60.8.
(4) Following the date that the initial performance test for fugitive ash emissions is completed or is required to be completed under 40 CFR 60.8 for an affected facility, the owner or operator shall conduct a performance test for fugitive ash emissions on an annual basis (no more than 12 calendar months following the previous performance test).
[40 CFR 60.38b and 40 CFR 60.58b(k)]

D.10. Performance tests shall be conducted under such conditions as the Administrator shall specify to the plant operator based on representative performance of the affected facility. The owner or operator shall make available to the Administrator such records as may be necessary to determine the conditions of the performance tests. Operations during periods of startup, shutdown, and malfunction shall not constitute representative conditions for the purpose of a performance test nor shall emissions in excess of the level of the applicable emission limit during periods of startup, shutdown, and malfunction be considered a violation of the applicable emission limit unless otherwise specified in the applicable standard.
[40 CFR 60.8(c)]

D.11. Particulate Matter. The test methods for particulate emissions shall be EPA Method 5 incorporated by reference in Chapter 62-297, F.A.C., and 40 CFR 60, Appendix A.
[Rules 62-213.440 and 62-297.401, F.A.C.]

D.12. Visible Emissions. EPA Method 9 shall be used to determine opacity compliance pursuant to Chapter 62-297, F.A.C., and 40 CFR 60, Appendix A.
[Rule 62-297.401, F.A.C.]

D.13. Operating Rate During Testing. Testing of emissions shall be conducted with the emissions unit operation at permitted capacity, which is defined as 90 to 100 percent of the maximum operation rate allowed by the permit. If it is impracticable to test at permitted capacity, an emissions unit may be tested at less than the minimum permitted capacity; in this case, subsequent emissions unit operation is limited to 110 percent of the test load until a new test is conducted. Once the emissions unit is so limited, operation at higher capacities is allowed for no more than 15 consecutive days for the purpose of additional compliance testing to regain the authority to operate at the permitted capacity.
[Rules 62-297.310(2) & (2)(b), F.A.C.]

D.14. Applicable Test Procedures.
(a) Required Sampling Time.

1. Unless otherwise specified in the applicable rule, the required sampling time for each test run shall be no less than one hour and no greater than four hours, and the sampling time at each sampling point shall be of equal intervals of at least two minutes.
2. Opacity Compliance Tests. When either EPA Method 9 or DEP Method 9 is specified as the applicable opacity test method, the required minimum period of observation for a compliance test shall be sixty (60) minutes for emissions units which emit or have the potential to emit 100 tons per year or more of particulate matter, and thirty (30) minutes for emissions units which have potential emissions less than 100 tons per year of particulate matter and are not subject to a multiple-valued opacity standard. The opacity test observation period shall include the period during which the highest opacity emissions can reasonably be expected to occur. Exceptions to these requirements are as follows:
a. For batch, cyclical processes, or other operations which are normally completed within less than the minimum observation period and do not recur within that time, the period of observation shall be equal to the duration of the batch cycle or operation completion time.
b. The observation period for special opacity tests that are conducted to provide data to establish a surrogate standard pursuant to Rule 62-297.310(5)(k), F.A.C., Waiver of Compliance Test Requirements, shall be established as necessary to properly establish the relationship between a proposed surrogate standard and an existing mass emission limiting standard.
c. The minimum observation period for opacity tests conducted by employees or agents of the Department to verify the day-to-day continuing compliance of a unit or activity with an applicable opacity standard shall be twelve minutes.

[Rule 62-297.310(4), F.A.C.]

D.15. Frequency of Compliance Tests. The following provisions apply only to those emissions units that are subject to an emissions limiting standard for which compliance testing is required.

(a) General Compliance Testing.

2. For excess emission limitations for particulate matter specified in Rule 62-210.700, F.A.C., a compliance test shall be conducted annually while the emissions unit is operating under soot blowing conditions in each federal fiscal year during which soot blowing is part of normal emissions unit operation, except that such test shall not be required in any federal fiscal year in which a fossil fuel steam generator does not burn liquid and/or solid fuel for more than 400 hours other than during startup.
3. The owner or operator of an emissions unit that is subject to any emission limiting standard shall conduct a compliance test that demonstrates compliance with the applicable emission limiting standard prior to obtaining a renewed operation permit. Emissions units that are required to conduct an annual compliance test may submit the most recent annual compliance test to satisfy the requirements of this provision. In renewing an air operation permit pursuant to Rule 62-210.300(2)(a)3.b., c., or d., F.A.C., the Department shall not require submission of emission compliance test results for any emissions unit that, during the year prior to renewal:
a Did not operate; or
4. During each federal fiscal year (October 1 - September 30), unless otherwise specified by rule, order, or permit, the owner or operator of each emissions unit shall have a formal compliance test conducted for:
a. Visible emissions, if there is an applicable standard;
b. Each of the following pollutants, if there is an applicable standard, and if the emissions unit emits or has the potential to emit: 5 tons per year or more of lead or lead compounds measured as elemental lead; 30 tons per year or more of acrylonitrile; or 100 tons per year or more of any other regulated air pollutant; and
c. Each NESHAP pollutant, if there is an applicable emission standard.

9. The owner or operator shall notify the Department's Southeast District office and the Dade County's DERM office at least 15 days prior to the date on which each formal compliance test is to begin, of the date, time, and place of each such test, and the test contact person who will be responsible for coordinating and having such test conducted for the owner or operator.

(b) Special Compliance Tests. When the Department's Southeast District office or the Dade County's DERM office, after investigation, has good reason (such as complaints, increased visible emissions or questionable maintenance of control equipment) to believe that any applicable emission standard contained in a Department rule or in a permit issued pursuant to those rules is being violated, it may require the owner or operator of the emissions unit to conduct compliance tests which identify the nature and quantity of pollutant emissions from the emissions unit and to provide a report on the results of said tests to the Department's Southeast District office and the Dade County's DERM office.

(c) Waiver of Compliance Test Requirements. If the owner or operator of an emissions unit that is subject to a compliance test requirement demonstrates to the Department, pursuant to the procedure established in Rule 62-297.620, F.A.C., that the compliance of the emissions unit with an applicable weight emission limiting standard can be adequately determined by means other than the designated test procedure, such as specifying a surrogate standard of no visible emissions for particulate matter sources equipped with a bag house or specifying a fuel analysis for sulfur dioxide emissions, the Department shall waive the compliance test requirements for such emissions units and order that the alternate means of determining compliance be used, provided, however, the provisions of Rule 62-297.310(7)(b), F.A.C., shall apply.

[Rule 62-297.310(7), F.A.C.; PSD-FL-006(D); and, SIP approved]

D.16. Compliance with standards in 40 CFR 60, other than opacity standards, shall be determined only by performance tests established by 40 CFR 60.8, unless otherwise specified in the applicable standard. [40 CFR 60.11(a)]

Monitoring of Operations

D.17. Determination of Process Variables.

(a) Required Equipment. The owner or operator of an emissions unit for which compliance tests are required shall install, operate, and maintain equipment or instruments necessary to determine process variables, such as process weight input or heat input, when such data are needed in conjunction with emissions data to determine the compliance of the emissions unit with applicable emission limiting standards.

(b) Accuracy of Equipment. Equipment or instruments used to directly or indirectly determine process variables, including devices such as belt scales, weight hoppers, flow meters, and tank scales, shall be calibrated and adjusted to indicate the true value of the parameter being measured with sufficient accuracy to allow the applicable process variable to be determined within 10% of its true value. [Rule 62-297.310(5), F.A.C.]

Recordkeeping and Reporting Requirements

D.18. In the case of excess emissions resulting from malfunctions, each owner or operator shall notify the Department's Southeast District office in accordance with Rule 62-4.130, F.A.C. A full written report on the malfunctions shall be submitted in a quarterly report, if requested by the Department or its agent. [Rule 62-210.700(6), F.A.C.]

D.19. The owner or operator subject to the provisions of 40 CFR 60 shall furnish the Administrator written notification as follows:

(4) A notification of any physical or operational change to an existing facility which may increase the emission rate of any air pollutant to which a standard applies, unless that change is specifically exempted under an applicable subpart or in 40 CFR 60.14(e). This notice shall be postmarked 60 days or as soon as practicable before the change is commenced and shall include information describing the precise nature of the change, present and proposed emission control systems, productive capacity of the facility before and after the change, and the expected completion date of the change. The Administrator may request additional relevant information subsequent to this notice.
[40 CFR 60.7(a)(4)]

D.20. The owner or operator subject to the provisions of 40 CFR 60 shall maintain records of the occurrence and duration of any startup, shutdown, or malfunction in the operation of an affected facility; any malfunction of the air pollution control equipment; or, any periods during which a continuous monitoring system or monitoring device is inoperative.
[40 CFR 60.7(b)]

D.21. (1) Notwithstanding the frequency of reporting requirements specified in 40 CFR 60.7(c), an owner or operator who is required by an applicable subpart to submit excess emissions and monitoring systems performance reports (and summary reports) on a quarterly (or more frequent) basis may reduce the frequency of reporting for that standard to semiannual if the following conditions are met: (i) For 1 full year (e.g., 4 quarterly or 12 monthly reporting periods) the affected facility's excess emissions and monitoring systems reports submitted to comply with a standard under this part continually demonstrate that the facility is in compliance with the applicable standard;

(i) The owner or operator continues to comply with all recordkeeping and monitoring requirements specified in 40 CFR 60, Subpart A, and the applicable standard; and

(ii) The Administrator does not object to a reduced frequency of reporting for the affected facility, as provided in 40 CFR 60.7(e)(2).

(2) The frequency of reporting of excess emissions and monitoring systems performance (and summary) reports may be reduced only after the owner or operator notifies the Administrator in writing of his or her intention to make such a change and the Administrator does not object to the intended change. In deciding whether to approve a reduced frequency of reporting, the Administrator may review information concerning the source's entire previous performance history during the required recordkeeping period prior to the intended change, including performance test results, monitoring data, and evaluations of an owner or operator's conformance with operation and maintenance requirements. Such information may be used by the Administrator to make a judgment about the source's potential for noncompliance in the future. If the Administrator disapproves the owner or operator's request to reduce the frequency of reporting, the Administrator will notify the owner or operator in writing within 45 days after receiving notice of the owner or operator's intention. The notification from the Administrator to the owner or operator will specify the grounds on which the disapproval is based. In the absence of a notice of disapproval within 45 days, approval is automatically granted.
(3) As soon as monitoring data indicate that the affected facility is not in compliance with any emission limitation or operating parameter specified in the applicable standard, the frequency of reporting shall revert to the frequency specified in the applicable standard, and the owner or operator shall submit an excess emissions and monitoring systems performance report (and summary report, if required) at the next appropriate reporting period following the noncomplying event. After demonstrating compliance with the applicable standard for another full year, the owner or operator may again request approval from the Administrator to reduce the frequency of reporting for that standard as provided for in 40 CFR 60.7(e)(1) and (e)(2).
[40 CFR 60.7(e)(1)]

{See attached Figure 1: Summary Report-Gaseous and Opacity Excess Emission and Monitoring System Performance}

D.22. Any owner or operator subject to the provisions of 40 CFR 60 shall maintain a file of all measurements, including continuous monitoring system, monitoring device, and performance testing measurements; all continuous monitoring system performance evaluations; all continuous monitoring system or monitoring device calibration checks; adjustments and maintenance performed on these systems or devices; and, all other information required by 40 CFR 60 recorded in a permanent form suitable for inspection. The file shall be retained for at least **5 (five)** years following the date of such measurements, maintenance, reports, and records.
[40 CFR 60.7(f); and, Rule 62-213.440(1)(b)2.b., F.A.C.]

D.23. Test Reports.
(a) The owner or operator of an emissions unit for which a compliance test is required shall file a report with the Department's Southeast District office and the Dade County's DERM office on the results of each such test.
(b) The required test report shall be filed with the Department's Southeast District office and the Dade County's DERM office as soon as practical but no later than 45 days after the last sampling run of each test is completed.
(c) The test report shall provide sufficient detail on the emissions unit tested and the test procedures used to allow the Department's Southeast District office and the Dade County's DERM office to determine if the test was properly conducted and the test results properly computed. As a minimum, the test report, other than for an EPA or DEP Method 9 test, shall provide the following information:

1. The type, location, and designation of the emissions unit tested.
2. The facility at which the emissions unit is located.
3. The owner or operator of the emissions unit.
4. The normal type and amount of fuels used and materials processed, and the types and amounts of fuels used and material processed during each test run.
5. The means, raw data and computations used to determine the amount of fuels used and materials processed, if necessary to determine compliance with an applicable emission limiting standard.
6. The type of air pollution control devices installed on the emissions unit, their general condition, their normal operating parameters (pressure drops, total operating current and GPM scrubber water), and their operating parameters during each test run.
7. A sketch of the duct within 8 stack diameters upstream and 2 stack diameters downstream of the sampling ports, including the distance to any upstream and downstream bends or other flow disturbances.
8. The date, starting time and duration of each sampling run.
9. The test procedures used, including any alternative procedures authorized pursuant to Rule 62-297.620, F.A.C. Where optional procedures are authorized in this chapter, indicate which option was used.
10. The number of points sampled and configuration and location of the sampling plane.
11. For each sampling point for each run, the dry gas meter reading, velocity head, pressure drop across the stack, temperatures, average meter temperatures and sample time per point.
12. The type, manufacturer and configuration of the sampling equipment used.
13. Data related to the required calibration of the test equipment.
14. Data on the identification, processing and weights of all filters used.
15. Data on the types and amounts of any chemical solutions used.
16. Data on the amount of pollutant collected from each sampling probe, the filters, and the impingers, are reported separately for the compliance test.

17. The names of individuals who furnished the process variable data, conducted the test, analyzed the samples and prepared the report.
18. All measured and calculated data required to be determined by each applicable test procedure for each run.
19. The detailed calculations for one run that relate the collected data to the calculated emission rate.
20. The applicable emission standard, and the resulting maximum allowable emission rate for the emissions unit, plus the test result in the same form and unit of measure.
21. A certification that, to the knowledge of the owner or his authorized agent, all data submitted are true and correct. When a compliance test is conducted for the Department's Southeast District or its agent, the person who conducts the test shall provide the certification with respect to the test procedures used. The owner or his authorized agent shall certify that all data required and provided to the person conducting the test are true and correct to his knowledge.

[Rules 62-213.440 and 62-297.310(8), F.A.C.]

Miscellaneous Requirements

D.24. Definitions. For the purposes of Rules 62-204.800(7), (8), and (9), F.A.C., the definitions contained in the various provisions of 40 CFR Parts 60 and 61, adopted herein shall apply except that the term "Administrator" when used in 40 CFR Parts 60 and 61, shall mean the Secretary or the Secretary's designee except as noted in 40 CFR 61.157.
[40 CFR 60.2; and, Rules 62-204.800(7)(a), (8)(a)2., and, (9)(a), F.A.C.]

D.25. Circumvention. No owner or operator subject to the provisions of 40 CFR 60 shall build, erect, install, or use any article, machine, equipment or process, the use of which conceals an emission which would otherwise constitute a violation of an applicable standard. Such concealment includes, but is not limited to, the use of gaseous diluents to achieve compliance with an opacity standard or with a standard which is based on the concentration of a pollutant in the gases discharged to the atmosphere.
[40 CFR 60.12]

D.26. General Applicability and Definitions. The Standards of Performance for New Stationary Sources adopted by reference in Rule 62-204.800(7), F.A.C., the Emission Guidelines for Existing Sources adopted by reference in Rule 62-204.800(8), F.A.C., and the National Emissions Standards for Hazardous Air Pollutants adopted by reference in Rule 62-204.800(9), F.A.C., shall be controlling over other standards in the air pollution rules of the Department except that any emissions limiting standard contained in or determined pursuant to the air pollution rules of the Department which is more stringent than one contained in a Standard of Performance, an Emission Guideline, or a National Emission Standard, or which regulates emissions of pollutants or emissions units not regulated by an applicable Standard of Performance, Emission Guideline, or National Emission Standard, shall apply.
[Rules 62-204.800(7)(c), (8)(a)1., and (9)(c), F.A.C.]

Subsection E. This section addresses the following emissions unit(s).

E.U. ID No.	Brief Description
-uuu	Lime Storage Silo with Baghouse

Lime used in the spray dryer absorbers for each municipal waste combustor is stored in a silo. Emissions from the silo are controlled by a baghouse.

{Permitting note(s): Emissions unit **-uuu** is a minor emissions unit regulated under Rule 62-210.300, F.A.C., Permits Required; and, Rule 62-212.400, F.A.C., Prevention of Significant Deterioration [PSD; and, PSD-FL-006(A), (B) & (D)]}

The following specific conditions apply to the emissions unit listed above:

Essential Potential to Emit (PTE) Parameters

E.1. Hours of Operation. This emissions unit is allowed to operate continuously, i.e., 8,760 hours/year. [Rule 62-210.200(PTE), F.A.C.; and, PSD-FL-006(D)]

Emission Limitations and Standards

E.2. Visible Emissions. Visible emissions shall not exceed five (5) percent opacity.
[PSD-FL-006(A), (B) & (D)]

Excess Emissions

E.3. Excess emissions from these emissions units resulting from startup, shutdown or malfunction shall be permitted provided that best operational practices to minimize emissions are adhered to and the duration of excess emissions shall be minimized but in no case exceed two hours in any 24 hour period unless specifically authorized by the Department for longer duration.
[Rule 62-210.700(1), F.A.C.]

E.4. Excess emissions which are caused entirely or in part by poor maintenance, poor operation, or any other equipment or process failure which may reasonably be prevented during startup, shutdown or malfunction shall be prohibited.
[Rule 62-210.700(4), F.A.C.]

Test Methods and Procedures

E.5. Visible Emissions.
a. EPA Method 9 shall be used to determine opacity compliance pursuant to Rule 62-297.401, F.A.C., and 40 CFR 60, Appendix A. The emissions unit is to be operating (i.e., receiving or discharging) during any compliance test.
b. Compliance testing of the lime silo loading operation shall be conducted within 90 days of completion of construction and initial operation; and, annually thereafter.
[Rules 62-4.070(3), 62-213.440, and 62-297.401, F.A.C.; and, PSD-FL-006(D)]

E.6. Operating Rate During Testing. Testing of emissions shall be conducted with the emissions unit operation at permitted capacity, which is defined as 90 to 100 percent of the maximum operation rate

allowed by the permit. If it is impracticable to test at permitted capacity, an emissions unit may be tested at less than the minimum permitted capacity; in this case, subsequent emissions unit operation is limited to 110 percent of the test load until a new test is conducted. Once the emissions unit is so limited, operation at higher capacities is allowed for no more than 15 consecutive days for the purpose of additional compliance testing to regain the authority to operate at the permitted capacity.
[Rules 62-297.310(2) & (2)(b), F.A.C.]

E.7. Applicable Test Procedures.
(a) Required Sampling Time.
1. Unless otherwise specified in the applicable rule, the required sampling time for each test run shall be no less than one hour and no greater than four hours, and the sampling time at each sampling point shall be of equal intervals of at least two minutes.
2. Opacity Compliance Tests. When either EPA Method 9 or DEP Method 9 is specified as the applicable opacity test method, the required minimum period of observation for a compliance test shall be sixty (60) minutes for emissions units which emit or have the potential to emit 100 tons per year or more of particulate matter, and thirty (30) minutes for emissions units which have potential emissions less than 100 tons per year of particulate matter and are not subject to a multiple-valued opacity standard. The opacity test observation period shall include the period during which the highest opacity emissions can reasonably be expected to occur. Exceptions to these requirements are as follows:
a. For batch, cyclical processes, or other operations which are normally completed within less than the minimum observation period and do not recur within that time, the period of observation shall be equal to the duration of the batch cycle or operation completion time.
b. The observation period for special opacity tests that are conducted to provide data to establish a surrogate standard pursuant to Rule 62-297.310(5)(k), F.A.C., Waiver of Compliance Test Requirements, shall be established as necessary to properly establish the relationship between a proposed surrogate standard and an existing mass emission limiting standard.
c. The minimum observation period for opacity tests conducted by employees or agents of the Department to verify the day-to-day continuing compliance of a unit or activity with an applicable opacity standard shall be twelve minutes.
[Rule 62-297.310(4), F.A.C.]

E.8. Frequency of Compliance Tests. The following provisions apply only to those emissions units that are subject to an emissions limiting standard for which compliance testing is required.
(a) General Compliance Testing.
3. The owner or operator of an emissions unit that is subject to any emission limiting standard shall conduct a compliance test that demonstrates compliance with the applicable emission limiting standard prior to obtaining a renewed operation permit. Emissions units that are required to conduct an annual compliance test may submit the most recent annual compliance test to satisfy the requirements of this provision. In renewing an air operation permit pursuant to Rule 62-210.300(2)(a)3.b., c., or d., F.A.C., the Department shall not require submission of emission compliance test results for any emissions unit that, during the year prior to renewal:
a Did not operate; or
4. During each federal fiscal year (October 1 - September 30), unless otherwise specified by rule, order, or permit, the owner or operator of each emissions unit shall have a formal compliance test conducted for:
a. Visible emissions, if there is an applicable standard;
b. Each of the following pollutants, if there is an applicable standard, and if the emissions unit emits or has the potential to emit: 5 tons per year or more of lead or lead compounds measured as

elemental lead; 30 tons per year or more of acrylonitrile; or 100 tons per year or more of any other regulated air pollutant; and

c. Each NESHAP pollutant, if there is an applicable emission standard.

9. The owner or operator shall notify the Department's Southeast District office and the Dade County's DERM office at least 15 days prior to the date on which each formal compliance test is to begin, of the date, time, and place of each such test, and the test contact person who will be responsible for coordinating and having such test conducted for the owner or operator.

(b) Special Compliance Tests. When the Department's Southeast District office or the Dade County's DERM office, after investigation, has good reason (such as complaints, increased visible emissions or questionable maintenance of control equipment) to believe that any applicable emission standard contained in a Department rule or in a permit issued pursuant to those rules is being violated, it may require the owner or operator of the emissions unit to conduct compliance tests which identify the nature and quantity of pollutant emissions from the emissions unit and to provide a report on the results of said tests to the Department's Southeast District office and the Dade County's DERM office.

(c) Waiver of Compliance Test Requirements. If the owner or operator of an emissions unit that is subject to a compliance test requirement demonstrates to the Department, pursuant to the procedure established in Rule 62-297.620, F.A.C., that the compliance of the emissions unit with an applicable weight emission limiting standard can be adequately determined by means other than the designated test procedure, such as specifying a surrogate standard of no visible emissions for particulate matter sources equipped with a bag house or specifying a fuel analysis for sulfur dioxide emissions, the Department shall waive the compliance test requirements for such emissions units and order that the alternate means of determining compliance be used, provided, however, the provisions of Rule 62-297.310(7)(b), F.A.C., shall apply.

[Rule 62-297.310(7), F.A.C.; PSD-FL-006(D); and, SIP approved]

Monitoring of Operations

E.9. Determination of Process Variables.

(a) Required Equipment. The owner or operator of an emissions unit for which compliance tests are required shall install, operate, and maintain equipment or instruments necessary to determine process variables, such as process weight input or heat input, when such data are needed in conjunction with emissions data to determine the compliance of the emissions unit with applicable emission limiting standards.

(b) Accuracy of Equipment. Equipment or instruments used to directly or indirectly determine process variables, including devices such as belt scales, weight hoppers, flow meters, and tank scales, shall be calibrated and adjusted to indicate the true value of the parameter being measured with sufficient accuracy to allow the applicable process variable to be determined within 10% of its true value.

[Rule 62-297.310(5), F.A.C.]

Recordkeeping and Reporting Requirements

E.10. In the case of excess emissions resulting from malfunctions, each owner or operator shall notify the Department's Southeast District office in accordance with Rule 62-4.130, F.A.C. A full written report on the malfunctions shall be submitted in a quarterly report, if requested by the Department or its agent.

[Rule 62-210.700(6), F.A.C.]

E.11. Any measurements, maintenance, reports, and records shall be retained for at least **5 (five)** years following the date of such measurements, maintenance, reports, and records.

[Rule 62-213.440(1)(b)2.b., F.A.C.]

E.12. Test Reports.

(a) The owner or operator of an emissions unit for which a compliance test is required shall file a report with the Department's Southeast District office and the Dade County's DERM office on the results of each such test.

(b) The required test report shall be filed with the Department's Southeast District office and the Dade County's DERM office as soon as practical but no later than 45 days after the last sampling run of each test is completed.

(c) The test report shall provide sufficient detail on the emissions unit tested and the test procedures used to allow the Department's Southeast District office and the Dade County's DERM office to determine if the test was properly conducted and the test results properly computed. As a minimum, the test report, other than for an EPA or DEP Method 9 test, shall provide the following information:

1. The type, location, and designation of the emissions unit tested.
2. The facility at which the emissions unit is located.
3. The owner or operator of the emissions unit.
4. The normal type and amount of fuels used and materials processed, and the types and amounts of fuels used and material processed during each test run.
5. The means, raw data and computations used to determine the amount of fuels used and materials processed, if necessary to determine compliance with an applicable emission limiting standard.
6. The type of air pollution control devices installed on the emissions unit, their general condition, their normal operating parameters (pressure drops, total operating current and GPM scrubber water), and their operating parameters during each test run.
7. A sketch of the duct within 8 stack diameters upstream and 2 stack diameters downstream of the sampling ports, including the distance to any upstream and downstream bends or other flow disturbances.
8. The date, starting time and duration of each sampling run.
9. The test procedures used, including any alternative procedures authorized pursuant to Rule 62-297.620, F.A.C. Where optional procedures are authorized in this chapter, indicate which option was used.
10. The number of points sampled and configuration and location of the sampling plane.
11. For each sampling point for each run, the dry gas meter reading, velocity head, pressure drop across the stack, temperatures, average meter temperatures and sample time per point.
12. The type, manufacturer and configuration of the sampling equipment used.
13. Data related to the required calibration of the test equipment.
14. Data on the identification, processing and weights of all filters used.
15. Data on the types and amounts of any chemical solutions used.
16. Data on the amount of pollutant collected from each sampling probe, the filters, and the impingers, are reported separately for the compliance test.
17. The names of individuals who furnished the process variable data, conducted the test, analyzed the samples and prepared the report.
18. All measured and calculated data required to be determined by each applicable test procedure for each run.
19. The detailed calculations for one run that relate the collected data to the calculated emission rate.
20. The applicable emission standard, and the resulting maximum allowable emission rate for the emissions unit, plus the test result in the same form and unit of measure.
21. A certification that, to the knowledge of the owner or his authorized agent, all data submitted are true and correct. When a compliance test is conducted for the Department's Southeast District or its agent, the person who conducts the test shall provide the certification with respect to the test

procedures used. The owner or his authorized agent shall certify that all data required and provided to the person conducting the test are true and correct to his knowledge.
[Rules 62-213.440 and 62-297.310(8), F.A.C.]

Section III. Emissions Unit(s) and Conditions.

Subsection F. This section addresses the following emissions unit(s).

E.U. ID No.	Brief Description
-vvv	Activated Carbon (or Comparable Reactant) Storage Silo

Activated carbon (or comparable reactant) used in the injection system for each municipal waste combustor is stored in a silo. The activated carbon (or comparable reactant) will be utilized for the control of mercury and dioxin/furans. Emissions from the silo are controlled by a baghouse.

{Permitting note(s): Emissions unit **-vvv** is a minor emissions unit regulated under Rule 62-210.300, F.A.C., Permits Required; and, Rule 62-212.400, F.A.C., Prevention of Significant Deterioration [PSD; and, PSD-FL-006(A), (B) & (D)]}

The following specific conditions apply to the emissions unit listed above:

Essential Potential to Emit (PTE) Parameters

F.1. Hours of Operation. This emissions unit is allowed to operate continuously, i.e., 8,760 hours/year. [Rule 62-210.200(PTE), F.A.C.; and, PSD-FL-006(D)]

Emission Limitations and Standards

F.2. Particulate Matter and Visible Emissions.
a. Particulate matter emissions shall not exceed 0.01 grains per dry standard cubic foot, front-half catch; or,
b. Visible emissions shall not exceed 5 percent opacity, since each emissions unit's potential particulate matter emissions are less than 100 TPY and is equipped with a baghouse control system. As long as the visible emissions do not exceed 5 percent opacity, compliance is assumed for the particulate matter limitations established in paragraph (a) above.

If the Department's Southeast District office or the Dade County's DERM office has reason to believe that the particulate matter weight emissions standard in paragraph (a) above is not being met, it shall require that compliance be demonstrated by the test method specified in specific condition **F.6.** [PSD-FL-006(A), (B) & (D); and, Rule 62-297.620(4), F.A.C.]

Excess Emissions

F.3. Excess emissions from these emissions units resulting from startup, shutdown or malfunction shall be permitted provided that best operational practices to minimize emissions are adhered to and the duration of excess emissions shall be minimized but in no case exceed two hours in any 24 hour period unless specifically authorized by the Department for longer duration.
[Rule 62-210.700(1), F.A.C.]

F.4. Excess emissions which are caused entirely or in part by poor maintenance, poor operation, or any other equipment or process failure which may reasonably be prevented during startup, shutdown or malfunction shall be prohibited.
[Rule 62-210.700(4), F.A.C.]

Monitoring of Operations

F.5. Determination of Process Variables.
(a) Required Equipment. The owner or operator of an emissions unit for which compliance tests are required shall install, operate, and maintain equipment or instruments necessary to determine process variables, such as process weight input or heat input, when such data are needed in conjunction with emissions data to determine the compliance of the emissions unit with applicable emission limiting standards.
(b) Accuracy of Equipment. Equipment or instruments used to directly or indirectly determine process variables, including devices such as belt scales, weight hoppers, flow meters, and tank scales, shall be calibrated and adjusted to indicate the true value of the parameter being measured with sufficient accuracy to allow the applicable process variable to be determined within 10% of its true value.
[Rule 62-297.310(5), F.A.C.]

Test Methods and Procedures

F.6. Particulate Matter. The test methods for particulate emissions shall be EPA Method 5 pursuant to Rule 62-297.401, F.A.C., and 40 CFR 60, Appendix A
[Rule 62-297.401, F.A.C.]

F.7. Visible Emissions. EPA Method 9 shall be used to determine opacity compliance pursuant to Rule 62-297.401, F.A.C., and 40 CFR 60, Appendix A.
[Rule 62-297.401, F.A.C.]

F.8. Required Number of Test Runs. For mass emission limitations, a compliance test shall consist of three complete and separate determinations of the total air pollutant emission rate through the test section of the stack or duct and three complete and separate determinations of any applicable process variables corresponding to the three distinct time periods during which the stack emission rate was measured provided, however, that three complete and separate determinations shall not be required if the process variables are not subject to variation during a compliance test, or if three determinations are not necessary in order to calculate the unit's emission rate. The three required test runs shall be completed within one consecutive five day period. In the event that a sample is lost or one of the three runs must be discontinued because of circumstances beyond the control of the owner or operator, and a valid third run cannot be obtained within the five day period allowed for the test, the Secretary or his or her designee may accept the results of the two complete runs as proof of compliance, provided that the arithmetic mean of the results of the two complete runs is at least 20 percent below the allowable emission limiting standards.
[Rule 62-297.310(1), F.A.C.]

F.9. Operating Rate During Testing. Testing of emissions shall be conducted with the emissions unit operation at permitted capacity, which is defined as 90 to 100 percent of the maximum operation rate allowed by the permit. If it is impracticable to test at permitted capacity, an emissions unit may be tested at less than the minimum permitted capacity; in this case, subsequent emissions unit operation is limited to 110 percent of the test load until a new test is conducted. Once the emissions unit is so limited, operation at higher capacities is allowed for no more than 15 consecutive days for the purpose of additional compliance testing to regain the authority to operate at the permitted capacity.
[Rules 62-297.310(2) & (2)(b), F.A.C.]

F.10. Calculation of Emission Rate. The indicated emission rate or concentration shall be the arithmetic average of the emission rate or concentration determined by each of the separate test runs unless otherwise specified in a particular test method or applicable rule.
[Rule 62-297.310(3), F.A.C.]

F.11. Applicable Test Procedures.
(a) Required Sampling Time.
1. Unless otherwise specified in the applicable rule, the required sampling time for each test run shall be no less than one hour and no greater than four hours, and the sampling time at each sampling point shall be of equal intervals of at least two minutes.
2. Opacity Compliance Tests. When either EPA Method 9 or DEP Method 9 is specified as the applicable opacity test method, the required minimum period of observation for a compliance test shall be sixty (60) minutes for emissions units which emit or have the potential to emit 100 tons per year or more of particulate matter, and thirty (30) minutes for emissions units which have potential emissions less than 100 tons per year of particulate matter and are not subject to a multiple-valued opacity standard. The opacity test observation period shall include the period during which the highest opacity emissions can reasonably be expected to occur. Exceptions to these requirements are as follows:
a. For batch, cyclical processes, or other operations which are normally completed within less than the minimum observation period and do not recur within that time, the period of observation shall be equal to the duration of the batch cycle or operation completion time.
b. The observation period for special opacity tests that are conducted to provide data to establish a surrogate standard pursuant to Rule 62-297.310(5)(k), F.A.C., Waiver of Compliance Test Requirements, shall be established as necessary to properly establish the relationship between a proposed surrogate standard and an existing mass emission limiting standard.
c. The minimum observation period for opacity tests conducted by employees or agents of the Department to verify the day-to-day continuing compliance of a unit or activity with an applicable opacity standard shall be twelve minutes.
[Rule 62-297.310(4), F.A.C.]

F.12. Required Stack Sampling Facilities. When a mass emissions stack test is required, the permittee shall comply with the requirements contained in Appendix SS-1, Stack Sampling Facilities, attached to this permit.
[Rule 62-297.310(6), F.A.C.]

F.13. Frequency of Compliance Tests. The following provisions apply only to those emissions units that are subject to an emissions limiting standard for which compliance testing is required.
(a) General Compliance Testing.
3. The owner or operator of an emissions unit that is subject to any emission limiting standard shall conduct a compliance test that demonstrates compliance with the applicable emission limiting standard prior to obtaining a renewed operation permit. Emissions units that are required to conduct an annual compliance test may submit the most recent annual compliance test to satisfy the requirements of this provision. In renewing an air operation permit pursuant to Rule 62-210.300(2)(a)3.b., c., or d., F.A.C., the Department shall not require submission of emission compliance test results for any emissions unit that, during the year prior to renewal:
a Did not operate; or
4. During each federal fiscal year (October 1 - September 30), unless otherwise specified by rule, order, or permit, the owner or operator of each emissions unit shall have a formal compliance test conducted for:

a. Visible emissions, if there is an applicable standard;
b. Each of the following pollutants, if there is an applicable standard, and if the emissions unit emits or has the potential to emit: 5 tons per year or more of lead or lead compounds measured as elemental lead; 30 tons per year or more of acrylonitrile; or 100 tons per year or more of any other regulated air pollutant; and
c. Each NESHAP pollutant, if there is an applicable emission standard.

9. The owner or operator shall notify the Department's Southeast District office and the Dade County's DERM office at least 15 days prior to the date on which each formal compliance test is to begin, of the date, time, and place of each such test, and the test contact person who will be responsible for coordinating and having such test conducted for the owner or operator.

(b) Special Compliance Tests. When the Department's Southeast District office or the Dade County's DERM office, after investigation, has good reason (such as complaints, increased visible emissions or questionable maintenance of control equipment) to believe that any applicable emission standard contained in a Department rule or in a permit issued pursuant to those rules is being violated, it may require the owner or operator of the emissions unit to conduct compliance tests which identify the nature and quantity of pollutant emissions from the emissions unit and to provide a report on the results of said tests to the Department's Southeast District office and the Dade County's DERM office.

(c) Waiver of Compliance Test Requirements. If the owner or operator of an emissions unit that is subject to a compliance test requirement demonstrates to the Department, pursuant to the procedure established in Rule 62-297.620, F.A.C., that the compliance of the emissions unit with an applicable weight emission limiting standard can be adequately determined by means other than the designated test procedure, such as specifying a surrogate standard of no visible emissions for particulate matter sources equipped with a bag house or specifying a fuel analysis for sulfur dioxide emissions, the Department shall waive the compliance test requirements for such emissions units and order that the alternate means of determining compliance be used, provided, however, the provisions of Rule 62-297.310(7)(b), F.A.C., shall apply.

[Rule 62-297.310(7), F.A.C.; PSD-FL-006(D); and, SIP approved]

Monitoring of Operations

F.14. Determination of Process Variables.

(a) Required Equipment. The owner or operator of an emissions unit for which compliance tests are required shall install, operate, and maintain equipment or instruments necessary to determine process variables, such as process weight input or heat input, when such data are needed in conjunction with emissions data to determine the compliance of the emissions unit with applicable emission limiting standards.

(b) Accuracy of Equipment. Equipment or instruments used to directly or indirectly determine process variables, including devices such as belt scales, weight hoppers, flow meters, and tank scales, shall be calibrated and adjusted to indicate the true value of the parameter being measured with sufficient accuracy to allow the applicable process variable to be determined within 10% of its true value.

[Rule 62-297.310(5), F.A.C.]

Recordkeeping and Reporting Requirements

F.15. In the case of excess emissions resulting from malfunctions, each owner or operator shall notify the Department's Southeast District office in accordance with Rule 62-4.130, F.A.C. A full written report on the malfunctions shall be submitted in a quarterly report, if requested by the Department or its agent. [Rule 62-210.700(6), F.A.C.]

F.16. Any measurements, maintenance, reports, and records shall be retained for at least **5 (five)** years following the date of such measurements, maintenance, reports, and records. [Rule 62-213.440(1)(b)2.b., F.A.C.]

F.17. Test Reports.
(a) The owner or operator of an emissions unit for which a compliance test is required shall file a report with the Department's Southeast District office and the Dade County's DERM office on the results of each such test.
(b) The required test report shall be filed with the Department's Southeast District office and the Dade County's DERM office as soon as practical but no later than 45 days after the last sampling run of each test is completed.
(c) The test report shall provide sufficient detail on the emissions unit tested and the test procedures used to allow the Department's Southeast District office and the Dade County's DERM office to determine if the test was properly conducted and the test results properly computed. As a minimum, the test report, other than for an EPA or DEP Method 9 test, shall provide the following information:

1. The type, location, and designation of the emissions unit tested.
2. The facility at which the emissions unit is located.
3. The owner or operator of the emissions unit.
4. The normal type and amount of fuels used and materials processed, and the types and amounts of fuels used and material processed during each test run.
5. The means, raw data and computations used to determine the amount of fuels used and materials processed, if necessary to determine compliance with an applicable emission limiting standard.
6. The type of air pollution control devices installed on the emissions unit, their general condition, their normal operating parameters (pressure drops, total operating current and GPM scrubber water), and their operating parameters during each test run.
7. A sketch of the duct within 8 stack diameters upstream and 2 stack diameters downstream of the sampling ports, including the distance to any upstream and downstream bends or other flow disturbances.
8. The date, starting time and duration of each sampling run.
9. The test procedures used, including any alternative procedures authorized pursuant to Rule 62-297.620, F.A.C. Where optional procedures are authorized in this chapter, indicate which option was used.
10. The number of points sampled and configuration and location of the sampling plane.
11. For each sampling point for each run, the dry gas meter reading, velocity head, pressure drop across the stack, temperatures, average meter temperatures and sample time per point.
12. The type, manufacturer and configuration of the sampling equipment used.
13. Data related to the required calibration of the test equipment.
14. Data on the identification, processing and weights of all filters used.
15. Data on the types and amounts of any chemical solutions used.
16. Data on the amount of pollutant collected from each sampling probe, the filters, and the impingers, are reported separately for the compliance test.

17. The names of individuals who furnished the process variable data, conducted the test, analyzed the samples and prepared the report.
18. All measured and calculated data required to be determined by each applicable test procedure for each run.
19. The detailed calculations for one run that relate the collected data to the calculated emission rate.
20. The applicable emission standard, and the resulting maximum allowable emission rate for the emissions unit, plus the test result in the same form and unit of measure.
21. A certification that, to the knowledge of the owner or his authorized agent, all data submitted are true and correct. When a compliance test is conducted for the Department's Southeast District or its agent, the person who conducts the test shall provide the certification with respect to the test procedures used. The owner or his authorized agent shall certify that all data required and provided to the person conducting the test are true and correct to his knowledge.

[Rules 62-213.440 and 62-297.310(8), F.A.C.]

Bruce fyi
return to Barbara for file

STATE OF FLORIDA
DEPARTMENT OF ENVIRONMENTAL PROTECTION

RECEIVED
MAR 19 2001
BUREAU OF AIR REGULATION

MIAMI-DADE COUNTY,

Petitioner,

v.

DEPARTMENT OF ENVIRONMENTAL PROTECTION,

Respondent.
_____/

Title V Permit Revision
No. 0250348-004-AV
DEP File No. PSD-FL-006D

MIAMI-DADE COUNTY'S REQUEST FOR EXTENSION OF TIME TO FILE PETITION

Petitioner, Miami-Dade County (the "County"), pursuant to Rule 28-106.111(3), Florida Administrative Code, respectfully requests the Department of Environmental Protection ("Department") to grant the County an additional extension of time to file a petition for a formal administrative hearing concerning the Department's proposed revision to the Title V air operation permit for the County's Resource Recovery Facility (DEP Title V Permit Revision No. 0250348-004-AV). In support of this request, the County says:

1. On October 10, 2000, the County filed an application with the Department for certain revisions to the Title V air operation permit for the County's Resource Recovery Facility ("Facility") located at 6990 N.W. 97th Avenue, Miami, Florida. As the applicant for the requested revision to the Title V Air Operation Permit, the County is affected by the Department's proposed action.

2. On December 22, 2000, the Department distributed its Draft Title V Air Operation Permit Revision ("Draft Permit") and related documents concerning the Resource Recovery Facility. The County received the Draft Permit on December 29, 2000.

3. On January 10, 2001, the County requested an extension of time to file its petition for administrative hearing and by order dated March 15, 2001, the Department granted the County's request and extended the time to file a petition until March 19, 2001.

4. On March 7, 2001, Golder Associates, Inc., the County's consultant, filed a set of comments concerning the Draft Permit with the Department.

5. The Draft Permit is lengthy and raises a variety of complex issues. The County has provided the Department with comments concerning the Draft Permit and the Department is working with the County to resolve issues raised in its comments.

6. The County requests a 60-day extension of time to work with the Department concerning its comments and to review the final revisions to the Draft Permit before the County waives its right to a hearing. The County requires this amount of time to allow the County and the company operating the Facility for the County to adequately review the Department's revisions to the Draft Permit.

7. Petitioner's counsel has discussed this request with

Scott Sheplak on the Department's staff and Mr. Sheplak indicated that he has no objection to this request.

WHEREFORE, the County requests the Department to grant a 60-day extension of time to file a petition for a formal administrative hearing concerning the Draft Permit.

Respectfully submitted this 16th day of March, 2001.

LANDERS & PARSONS

DAVID S. DEE
Fla. Bar No. 281999
JOHN T. LaVIA, III
Fla. Bar No. 853666
310 West College Avenue (32301)
P.O. Box 271
Tallahassee, Florida 32302
850/681-0311
850/224-5595 (fax)

CERTIFICATE OF SERVICE

I HEREBY CERTIFY that an original and one copy of the foregoing was furnished by hand-delivery to the CLERK'S OFFICE, Department of Environmental Protection, Office of General Counsel, 3900 Commonwealth Boulevard, Room 633B, Tallahassee, Florida 32399; and a copy by U.S. Mail to Scott Sheplak, Department of Environmental Protection, Division of Air Resources Management, 2600 Blair Stone Road, Mail Station 5500, Tallahassee, Florida 32399; and Martha Nebelsiek, Department of Environmental Protection, Office of General Counsel, 3900 Commonwealth Boulevard, Mail Station 35, Tallahassee, Florida 32399, on this 16th day of March, 2001.

Attorney

Bruce fyi
Smith 3/8

Sheplak, Scott

From: Buff, Dave [DBuff@GOLDER.com]
Sent: Wednesday, March 07, 2001 5:39 PM
To: Sheplak, Scott
Cc: Anetha Lue (E-mail)
Subject: Montenay Title V Comments

DCRR T5 3-5-01 comment ltr.doc... DCRR Title V permit 3-5-01.doc...

Scott, attached are the comments on the draft Title V permit for Dade County. A hard copy is coming overnight for Friday delivery.

David A.Buff
David A. Buff, P.E., Q.E.P.
Golder Associates Inc.
Phone: 352-336-5600 x545
Fax: 352-336-6603
E-Mail: dave_buff@golder.com <mailto:dave_buff@golder.com>

March 8, 2001 0037532

Florida Department of Environmental Protection
Bureau of Air Regulation
2600 Blair Stone Road
Tallahassee, FL 32399-2400

Attention: Mr. Scott M. Sheplak, P.E.

RE: DADE COUNTY RESOURCES RECOVERY FACILITY
DRAFT TITLE V PERMIT NO. 0250348-004-AV

Dear Mr. Sheplak:

Dade County Department of Solid Waste (DCDSW), Montenay International, and Golder Associates Inc. (Golder) has received the draft Title V permit for the Dade County Resources Recovery Facility, dated December 21, 2000. The purpose of this permit is to incorporate the provisions of PSD permit No. 0250348-003-AC/PSD-FL-006(D) into the Title V permit. The draft permit has been reviewed by all parties, and the comments have been incorporated into the attached marked-up copy of the draft permit. The majority of changes have been made solely to be consistent with and reflect the identical language in the PSD permit. Others have been made for clarification purposes.

It is our desire to resolve these issues and obtain a final revised Title V permit as expeditiously as possible. Therefore, please call Anetha Lue (305-854-2229) or myself (352-336-5600) directly if you have any questions concerning this submittal, or would like to discuss any of the proposed changes.

Sincerely,

GOLDER ASSOCIATES INC.

David A. Buff, P.E., Q.E.P.
Principal Engineer
Florida P. E. #19011
SEAL

DB/jkw/jkw

Enclosure

cc: Anetha Lue, P.E., Montenay
Vicente Castro, Miami-Dade SWM
Lee Casey, Miami-Dade SWM
David Dee, Landers and Parsons

P:\Projects\2000\0037\0037532A Dade County\02\L030701.doc