

Memorandum

Florida Department of Environmental Protection

TO: Trina Vielhauer, Chief - Bureau of Air Regulation
THROUGH: Jeff Koerner, Air Permitting North
FROM: Jonathan Holtom *JH*
DATE: July 10, 2007
SUBJECT: Draft/Proposed Title V Renewal Permit No. 0730003-011-AV
City of Tallahassee – Hopkins Generating Station

Attached for your review are the following items:

- Intent to Issue Permit and Public Notice Package;
- Statement of Basis;
- Draft Title V Permit Renewal; and,
- P.E. Certification.

This project is for the renewal of the Title V permit for the City of Tallahassee's Hopkins Generating Station.

The Statement of Basis provides a description of the facility. Day #90 is September 23. I recommend your approval of the attached Draft Permits for this project.

Attachments



Florida Department of Environmental Protection

Bob Martinez Center
2600 Blair Stone Road
Tallahassee, Florida 32399-2400

Charlie Crist
Governor

Jeff Kottkamp
Lt. Governor

Michael W. Sole
Secretary

P.E. Certification Statement


Permittee:

City of Tallahassee
Arvah B. Hopkins Generating Station

DRAFT Permit No.: 0730003-011-AV
Facility ID No.: 0730003

Project: Title V Air Operation Permit Renewal.

I HEREBY CERTIFY that the engineering features described in the above referenced application and related additional information submittals, if any, and subject to the proposed permit conditions outlined in the "Statement of Basis" attached to this permit, provide reasonable assurance of compliance with applicable provisions of Chapter 403, Florida Statutes, and Florida Administrative Code Chapters 62-4 and 62-204 through 62-297. However, I have not evaluated and I do not certify aspects of the proposal outside of my area of expertise (including but not limited to the electrical, mechanical, structural, hydrological, and geological features).

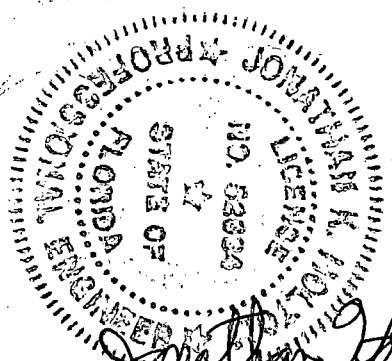

Jonathan K. Holtom
Jonathan K. Holtom, P.E.
Registration Number: 52664

7/10/07
Date



Florida Department of Environmental Protection

Bob Martinez Center
2600 Blair Stone Road
Tallahassee, Florida 32399-2400

Charlie Crist
Governor

Jeff Kottkamp
Lt. Governor

Michael W. Sole
Secretary

August 6, 2007

Mr. Robert McGarrah
Manager of Power Production
City of Tallahassee
2602 Jackson Bluff Road
Tallahassee, Florida 32304

Re: DRAFT Title V Operation Permit Renewal No. 0730003-011-AV
Arvah B. Hopkins Generating Station

Dear Mr. McGarrah:

Enclosed is one copy of the draft/proposed Title V air operation permit renewal for the Arvah B. Hopkins Generating Station located at 1125 Geddie Road, Tallahassee, Leon County. The Department's "Intent To Issue A Title V Air Operation Permit Renewal" and the "Public Notice Of Intent To Issue A Title V Air Operation Permit Renewal" are also included.

An electronic version of the draft/proposed Title V air operation permit revision has been posted on the Division of Air Resource Management's World Wide Web site for the United States Environmental Protection Agency (USEPA) Region 4 office's review. The web site address is:

"<http://www.dep.state.fl.us/air/eproducts/ards/default.asp>"

The "Public Notice Of Intent To Issue A Title V Air Operation Permit Renewal" must be published one time only, as soon as possible, the legal advertising section of a newspaper of general circulation in the area affected, pursuant to the requirements of Chapter 50, Florida Statutes. Proof of publication, i.e., newspaper affidavit, must be provided to the Department's Bureau of Air Regulation office within 7 (seven) days of publication. Failure to publish the notice and provide proof of publication within the allotted time may result in the denial of the permit modification.

Please submit any written comments you wish to have considered concerning the Department's proposed action to Mr. Jeff Koerner, P.E., Administrator, North Permitting Section at the above letterhead address. If you have any questions, please call Mr. Jonathan Holtom, P.E., at 850/921-9531.

Sincerely,

Trina Vielhauer, Chief
Bureau of Air Regulation

TLV/jk/jh

Enclosures

WRITTEN NOTICE OF INTENT TO ISSUE A TITLE V OPERATION PERMIT RENEWAL

In the Matter of an
Application for Permit by:

Mr. Robert McGarrah, Manager of Power Production
City of Tallahassee
2602 Jackson Bluff Road
Tallahassee, Florida 32304

Draft/Proposed Permit Project No. 0730003-011-AV
Arvah B. Hopkins Generating Station
Leon County, Florida

Facility Location: City of Tallahassee operates the existing Arvah B. Hopkins Generating Station, which is located at 1125 Geddies Road, Tallahassee, in Leon County.

Project: The applicant, City of Tallahassee, applied on June 25, 2007 to the Department for a Title V air operation permit renewal. This is a renewal of Title V air operation permit No. 0730003-003-AV. The existing facility consists of two fossil fuel-fired steam generators, two older fossil fuel-fired combustion turbines, and two new simple cycle, inlet-chilled combustion turbines, complete with electrical generator sets.

Permitting Authority: The application for this permit renewal is subject to review in accordance with the provisions of Chapter 403, Florida Statutes (F.S.), and Chapters 62-4, 62-210, 62-213 and 62-214, Florida Administrative Code (F.A.C.). The proposed project is not exempt from air permitting requirements and an air permit is required to operate the facility. The Department of Environmental Protection's Bureau of Air Regulation is the Permitting Authority responsible for making a Permit determination regarding this project. The Permitting Authority's physical address is: 111 South Magnolia Drive, Suite 4, Tallahassee, Florida 32301. The Permitting Authority's mailing address is: 2600 Blair Stone Road, Mail Station #5505, Tallahassee, Florida 32399-2400 (Telephone: 850/488-0114).

Project File: A complete project file is available for public inspection during the normal business hours of 8:00 a.m. to 5:00 p.m., Monday through Friday (except legal holidays), at address indicated above for the Permitting Authority. The complete project file includes the Technical Evaluation and Preliminary Determination, Draft Air Construction Permit, Draft Title V Operation Permit Revision, the Statement of Basis, the application, and the information submitted by the applicant, exclusive of confidential records under Section 403.111, F.S. Interested persons may view the draft permit by visiting the following website: <http://www.dep.state.fl.us/air/eproducts/ards/>. A copy of the complete project file is also available at:

Permitting Authority:
Department of Environmental Protection
Bureau of Air Regulation
111 South Magnolia Drive, Suite 4
Tallahassee, Florida 32301
Telephone: 850/488-0114
Fax: 850/921-9533

Affected District:
Department of Environmental Protection
Northwest District
160 Governmental Center
Pensacola, Florida 32501-5794
Telephone: 850/595-8364
Fax: 850/595-8096

Notice of Intent to Issue Permit: The Permitting Authority gives notice of its intent to issue a Title V air operation permit to the applicant for the project described above. The applicant has provided reasonable assurance that operation of proposed equipment will not adversely impact air quality and that the project will comply with all appropriate provisions of Chapters 62-4, 62-204, 62-210, 62-212, 62-213, 62-214, 62-296 and 62-297, F.A.C. The Permitting Authority will issue a final permit in accordance with the conditions of this draft/proposed permit unless a timely petition for an administrative hearing is filed under Sections 120.569 and 120.57, F.S. or unless public comment received in accordance with this notice results in a different decision or a significant change of terms or conditions.

Public Notice: Pursuant to Sections 403.087 & 403.815, F.S. and Rules 62-110.106 & 62-210.350, F.A.C., you (the applicant) are required to publish at your own expense the enclosed "Public Notice of Intent to Issue Air Permit" (Public Notice). The Public Notice shall be published one time only as soon as possible in the legal advertisement section of a newspaper of general circulation in the area affected by this project. The newspaper used must meet the requirements of Sections 50.011 and 50.031, F.S. in the county where the activity is to take place. If you are uncertain that a newspaper meets these requirements, please contact the Permitting Authority at above address or

phone number. Pursuant to Rule 62-110.106(5), F.A.C., the applicant shall provide proof of publication to the Permitting Authority at the above address within seven (7) days of publication. Failure to publish the notice and provide proof of publication may result in the denial of the permit pursuant to Rule 62-110.106(11), F.A.C.

Comments: The Permitting Authority will accept written comments concerning this draft/proposed Permit for a period of fourteen (30) days from the date of publication of the Public Notice. Written comments must be provided to the Permitting Authority at the above address. Any written comments filed will be made available for public inspection. If written comments received result in a significant change to the draft/proposed permit, the Permitting Authority shall revise the draft/proposed permit and require, if applicable, another Public Notice.

Petitions: A person whose substantial interests are affected by the proposed permitting decision may petition for an administrative hearing in accordance with Sections 120.569 and 120.57, F.S. The petition must contain the information set forth below and must be filed with (received by) the Department's Agency Clerk in the Office of General Counsel of the Department of Environmental Protection, 3900 Commonwealth Boulevard, Mail Station #35, Tallahassee, Florida 32399-3000. Petitions filed by the applicant or any of the parties listed below must be filed within fourteen (14) days of receipt of this Written Notice of Intent to Issue Air Permit. Petitions filed by any persons other than those entitled to written notice under Section 120.60(3), F.S., must be filed within fourteen (14) days of publication of the attached Public Notice or within fourteen (14) days of receipt of this Written Notice of Intent to Issue Air Permit, whichever occurs first. Under Section 120.60(3), F.S., however, any person who asked the Permitting Authority for notice of agency action may file a petition within fourteen (14) days of receipt of that notice, regardless of the date of publication. A petitioner shall mail a copy of the petition to the applicant at the address indicated above, at the time of filing. The failure of any person to file a petition within the appropriate time period shall constitute a waiver of that person's right to request an administrative determination (hearing) under Sections 120.569 and 120.57, F.S., or to intervene in this proceeding and participate as a party to it. Any subsequent intervention will be only at the approval of the presiding officer upon the filing of a motion in compliance with Rule 28-106.205, F.A.C.

A petition that disputes the material facts on which the Permitting Authority's action is based must contain the following information: (a) The name and address of each agency affected and each agency's file or identification number, if known; (b) The name, address, and telephone number of the petitioner; the name, address and telephone number of the petitioner's representative, if any, which shall be the address for service purposes during the course of the proceeding; and an explanation of how the petitioner's substantial interests will be affected by the agency determination; (c) A statement of how and when each petitioner received notice of the agency action or proposed action; (d) A statement of all disputed issues of material fact. If there are none, the petition must so state; (e) A concise statement of the ultimate facts alleged, including the specific facts the petitioner contends warrant reversal or modification of the agency's proposed action; (f) A statement of the specific rules or statutes the petitioner contends require reversal or modification of the agency's proposed action; and, (g) A statement of the relief sought by the petitioner, stating precisely the action the petitioner wishes the agency to take with respect to the agency's proposed action. A petition that does not dispute the material facts upon which the Permitting Authority's action is based shall state that no such facts are in dispute and otherwise shall contain the same information as set forth above, as required by Rule 28-106.301, F.A.C.

Because the administrative hearing process is designed to formulate final agency action, the filing of a petition means that the Permitting Authority's final action may be different from the position taken by it in this Written Notice of Intent to Issue Air Permit. Persons whose substantial interests will be affected by any such final decision of the Permitting Authority on the application have the right to petition to become a party to the proceeding, in accordance with the requirements set forth above.

Mediation: Mediation is not available for this proceeding.


Draft/Proposed Permit Processing: EPA has agreed to treat the draft Title V permit as a proposed Title V permit and to perform its 45-day review provided by the law and regulations concurrently with the public comment period. Although EPA's 45-day review period will be performed concurrently with the public comment period, the deadline for submitting a citizen petition to object to the EPA Administrator will be determined as if EPA's 45-day review period is performed after the public comment period has ended. The final Title V air operation permit will be issued after the conclusion of the 45-day EPA review period so long as no adverse comments are received that results in a different decision or significant change of terms or conditions.

The status regarding EPA's 45-day review of this project and the deadline for submitting a citizen petition can be found at the following website address: <http://www.epa.gov/region4/air/permits/Florida.htm>.

Pursuant to 42 United States Code (U.S.C.) Section 7661d(b)(2), any person may petition the Administrator of the EPA within 60 (sixty) days of the expiration of the Administrator's 45 (forty-five) day review period as established at 42 U.S.C. Section 7661d(b)(1), to object to issuance of any Title V permit. Any petition shall be based only on objections to the Title V permit that were raised with reasonable specificity during the 30 (thirty) day public comment period provided in this notice, unless the petitioner demonstrates to the Administrator of the EPA that it was impracticable to raise such objections within the comment period or unless the grounds for such objection arose after the comment period. Filing of a petition with the Administrator of the EPA does not stay the effective date of any Title V permit properly issued pursuant to the provisions of Chapter 62-213, F.A.C. Petitions filed with the Administrator of EPA must meet the requirements of 42 U.S.C. Section 7661d(b)(2) and must be filed with the Administrator of the EPA at: U.S. EPA, 401 M Street, S.W., Washington, D.C. 20460.

Executed in Tallahassee, Florida.

**STATE OF FLORIDA DEPARTMENT
OF ENVIRONMENTAL PROTECTION**



Trina L. Vielhauer, Chief
Bureau of Air Regulation


CERTIFICATE OF SERVICE

The undersigned duly designated deputy agency clerk hereby certifies that this Intent To Issue Title V Air Operation Permit Renewal (including the Public Notice and the Draft/Proposed Permit package) and all copies were sent electronically (with Received Receipt) before the close of business on 8/7/07 to the person(s) listed:

Mr. Robert McGarrah, Manager, City of Tallahassee (McGarraR@Talgov.com)
Mr. John Powell, P.E., City of Tallahassee (powellj@talgov.com)
Mr. Rick Bradburn, DEP – NWD (rick.bradburn@dep.state.fl.us)

Clerk Stamp

FILING AND ACKNOWLEDGMENT FILED, on this date, pursuant to §120.52, Florida Statutes, with the designated Department Clerk, receipt of which is hereby acknowledged.

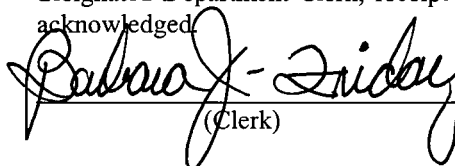 8/7/07
(Clerk) (Date)

PUBLIC NOTICE OF INTENT TO ISSUE TITLE V AIR OPERATION PERMIT RENEWAL

STATE OF FLORIDA
DEPARTMENT OF ENVIRONMENTAL PROTECTION
Draft/Proposed Title V Operation Permit Renewal No. 0730003-011-AV

City of Tallahassee
Arvah B. Hopkins Generating Station
Leon County

Applicant: The applicant for this project is City of Tallahassee. The applicant's responsible official is: Mr. Robert McGarrah, Manager of Power Production, 2602 Jackson Bluff Road, Tallahassee, Florida 32304.

Facility Location: City of Tallahassee operates the existing Arvah B. Hopkins Generating Station, which is located at 1125 Geddie Road, Tallahassee, in Leon County.

Project: The applicant, City of Tallahassee, applied on June 25, 2007 to the Department for a Title V air operation permit renewal. This is a renewal of Title V air operation permit No. 0730003-003-AV. The existing facility consists of two fossil fuel-fired steam generators, two older fossil fuel-fired combustion turbines, and two new simple cycle, inlet-chilled combustion turbines, complete with electrical generator sets.

Permitting Authority: Applications for permits are subject to review in accordance with the provisions of Chapter 403, Florida Statutes (F.S.), and Chapters 62-4, 62-210, 62-213 and 62-214, Florida Administrative Code (F.A.C.). The proposed project is not exempt from air permitting requirements and a permit is required to operate the facility. The Department of Environmental Protection's Bureau of Air Regulation is the Permitting Authority responsible for making a permit determination regarding this project. The Permitting Authority's physical address is: 111 South Magnolia Drive, Suite 4, Tallahassee, Florida 32301. The Permitting Authority's mailing address is: 2600 Blair Stone Road, Mail Station #5505, Tallahassee, Florida 32399-2400. The Permitting Authority's telephone number is: 850/488-0114.

Project File: A complete project file is available for public inspection during the normal business hours of 8:00 a.m. to 5:00 p.m., Monday through Friday (except legal holidays), at the address indicated above for the Permitting Authority. The complete project file includes the draft permits, the statement of basis, the application, and the information submitted by the applicant, exclusive of confidential records under Section 403.111, F.S. Interested persons may contact the Permitting Authority's project review engineer for additional information at the address and phone number listed, above, or may view the draft permit by visiting the following website: <http://www.dep.state.fl.us/air/eproducts/ards/>. A copy of the complete project file is also available at:

Permitting Authority:
Department of Environmental Protection
Bureau of Air Regulation
111 South Magnolia Drive, Suite 4
Tallahassee, Florida 32301
Telephone: 850/488-0114
Fax: 850/921-9533

Affected District:
Department of Environmental Protection
Northwest District
160 Governmental Center
Pensacola, Florida 32501-5794
Telephone: 850/595-8364
Fax: 850/595-8096

Notice of Intent to Issue Air Permit: The Permitting Authority gives notice of its intent to issue an air permit to the applicant for the project described above. The applicant has provided reasonable assurance that operation of proposed equipment will not adversely impact air quality and that the project will comply with all appropriate provisions of Chapters 62-4, 62-204, 62-210, 62-212, 62-213, 62-214, 62-296 and 62-297, F.A.C. The Permitting Authority will issue a final permit in accordance with the conditions of this draft/proposed permit unless a timely petition for an administrative hearing is filed under Sections 120.569 and 120.57, F.S. or unless public comment received in accordance with this notice results in a different decision or a significant change of terms or conditions.

Comments: The Permitting Authority will accept written comments concerning the draft/proposed permit for a period of thirty (30) days from the date of publication of this Public Notice. Written comments must be post-marked and all facsimile comments must be received by the close of business (5:00 pm), on or before the end of this 30-day period, by the Permitting Authority at **the above address**. As part of his or her comments, any person may also request that the Permitting Authority hold a public meeting on this permitting action. If the Permitting Authority determines there is sufficient interest for a public meeting, it will publish notice of the time, date, and location in the Florida Administrative Weekly (<http://faw.dos.state.fl.us/>) and in a newspaper of general circulation in the area affected by the permitting action. For additional information, contact the Permitting Authority at the above address or phone number. If written comments or comments received at a public meeting result in a significant change to the draft/proposed permit, the Permitting Authority shall issue a revised draft permit and require, if applicable, another Public Notice. All comments filed will be made available for public inspection.

Petitions: A person whose substantial interests are affected by the proposed permitting decision may petition for an administrative hearing in accordance with Sections 120.569 and 120.57, F.S. The petition must contain the information set forth below and must be filed with (received by) the Department's Agency Clerk in the Office of General Counsel of the Department of Environmental Protection at 3900 Commonwealth Boulevard, Mail Station #35, Tallahassee, Florida 32399-3000. Petitions filed by any persons other than those entitled to written notice under Section 120.60(3), F.S., must be filed within fourteen (14) days of publication of this Public Notice or receipt of a written notice, whichever occurs first. Under Section 120.60(3), F.S., however, any person who asked the Permitting Authority for notice of agency action may file a petition within fourteen (14) days of receipt of that notice, regardless of the date of publication. A petitioner shall mail a copy of the petition to the applicant at the address indicated above, at the time of filing. The failure of any person to file a petition within the appropriate time period shall constitute a waiver of that person's right to request an administrative determination (hearing) under Sections 120.569 and 120.57, F.S., or to intervene in this proceeding and participate as a party to it. Any subsequent intervention (in a proceeding initiated by another party) will be only at the approval of the presiding officer upon the filing of a motion in compliance with Rule 28-106.205, F.A.C.

A petition that disputes the material facts on which the Permitting Authority's action is based must contain the following information: (a) The name and address of each agency affected and each agency's file or identification number, if known; (b) The name, address and telephone number of the petitioner; the name address and telephone number of the petitioner's representative, if any, which shall be the address for service purposes during the course of the proceeding; and an explanation of how the petitioner's substantial rights will be affected by the agency determination; (c) A statement of when and how the petitioner received notice of the agency action or proposed decision; (d) A statement of all disputed issues of material fact. If there are none, the petition must so state; (e) A concise statement of the ultimate facts alleged, including the specific facts the petitioner contends warrant reversal or modification of the agency's proposed action; (f) A statement of the specific rules or statutes the petitioner contends require reversal or modification of the agency's proposed action including an explanation of how the alleged facts relate to the specific rules or statutes; and, (g) A statement of the relief sought by the petitioner, stating precisely the action the petitioner wishes the agency to take with respect to the agency's proposed action. A petition that does not dispute the material facts upon which the Permitting Authority's action is based shall state that no such facts are in dispute and otherwise shall contain the same information as set forth above, as required by Rule 28-106.301, F.A.C.

Because the administrative hearing process is designed to formulate final agency action, the filing of a petition means that the Permitting Authority's final action may be different from the position taken by it in this Public Notice of intent. Persons whose substantial interests will be affected by any such final decision of the Permitting Authority on the application have the right to petition to become a party to the proceeding, in accordance with the requirements set forth above.

Mediation: Mediation is not available for this proceeding.

Draft/Proposed Permit Processing: EPA has agreed to treat the draft Title V permit as a proposed Title V Permit and to perform its 45-day review provided by the law and regulations concurrently with the public comment period. Although EPA's 45-day review period will be performed concurrently with the public comment period, the deadline for submitting a citizen petition to object to the EPA Administrator will be determined as if EPA's 45-day review period is performed after the public comment period has ended. The final Title V air operation permit will be issued

after the conclusion of the 45-day EPA review period so long as no adverse comments are received that results in a different decision or significant change of terms or conditions.

The status regarding EPA's 45-day review of this project and the deadline for submitting a citizen petition can be found at the following website address: <http://www.epa.gov/region4/air/permits/Florida.htm>.

Pursuant to 42 United States Code (U.S.C.) Section 7661d(b)(2), any person may petition the Administrator of the EPA within 60 (sixty) days of the expiration of the Administrator's 45 (forty-five) day review period as established at 42 U.S.C. Section 7661d(b)(1), to object to issuance of any Title V permit. Any petition shall be based only on objections to the Title V permit that were raised with reasonable specificity during the 30 (thirty) day public comment period provided in this notice, unless the petitioner demonstrates to the Administrator of the EPA that it was impracticable to raise such objections within the comment period or unless the grounds for such objection arose after the comment period. Filing of a petition with the Administrator of the EPA does not stay the effective date of any Title V permit properly issued pursuant to the provisions of Chapter 62-213, F.A.C. Petitions filed with the Administrator of EPA must meet the requirements of 42 U.S.C. Section 7661d(b)(2) and must be filed with the Administrator of the EPA at: U.S. EPA, 401 M Street, S.W., Washington, D.C. 20460.

STATEMENT OF BASIS

City of Tallahassee
Arvah B. Hopkins Generating Station
Facility ID No.: 0730003
Leon County

Title V Air Operation Permit Renewal
Draft/Proposed Permit No.: 0730003-011-AV

This Title V air operation permit is issued under the provisions of Chapter 403, Florida Statutes (F.S.), and Florida Administrative Code (F.A.C.) Chapters 62-4, 62-210 62-213 and 62-214. The above named permittee is hereby authorized to perform the work or operate the facility shown on the application and approved drawing(s), plans, and other documents, attached hereto or on file with the permitting authority, in accordance with the terms and conditions of this permit.

This facility consists of two fossil fuel-fired steam generators, two older fossil fuel-fired combustion turbines, and two new simple cycle, inlet-chilled combustion turbines, complete with electrical generator sets. The two new gas turbines are capable of producing a nominal 100 mega watts (MW) of electricity. The two steam generators and the two new combustion turbines are Phase II Acid Rain Units. Boiler Number 2 is regulated under the Florida Electrical Power Plant Siting Act. The total (nominal) combined electrical generating capacity from the facility is 456.27 MW, of which, 313 MW are provided by the two steam generators and 143.27 MW are provided by the four combustion turbines. The fuels used at this facility are natural gas, fuel oil and on-specification used oil. Also included in this permit are miscellaneous unregulated/insignificant emissions units and/or activities.

Emissions unit number -001 is a Foster-Wheeler Corporation fossil fuel fired steam generator (model number SF-5) designated as "Boiler Number 1". It is rated at a maximum heat input of 903 million Btu per hour (MMBtu/hour) when firing natural gas or fuel oil and a nominal 75 MW and 750,000 pounds of steam per hour.

Emissions unit number -004 is a Babcock & Wilcox steam generator (model number RB-533) designated as "Boiler Number 2". It is rated at a maximum heat input of 2,325 MMBtu/hour when firing fuel oil and 2,500 MMBtu/hour when firing natural gas and a nominal 238 MW and 1,619,000 pounds of steam per hour.

Emissions unit number -002 is a combustion turbine manufactured by Westinghouse (model number W191G) and is designated as "Combustion Turbine Number 1". It is rated at a maximum heat input of 228 MMBtu/hour while being fueled by natural gas and/or No. 2 fuel oil with a maximum fuel oil sulfur content of 0.4%, by weight. Emissions unit number -003 is a combustion turbine manufactured by Westinghouse (model number W251G) and is designated as "Combustion Turbine Number 2". It is rated at a maximum heat input of 446 MMBtu/hour while being fueled by natural gas and/or No. 2 fuel oil with a maximum fuel oil sulfur content of 0.4%, by weight. Combustion Turbine Number 1 runs a nominal 16.47 MW generator and Combustion Turbine Number 2 runs a nominal 26.8 MW generator. Emissions from the combustion turbines are uncontrolled.

Emissions unit numbers -031 and -032 are General Electric LM 6000 Sprint simple cycle, inlet-chilled combustion turbines, complete with electrical generator sets. The gas turbines are capable of producing a nominal 100 MW (50 MW each). The turbines are permitted to fire 0.05% sulfur oil with natural gas as a back-up fuel. The units are equipped with selective catalytic reduction (SCR) systems for the reduction of Nitrogen Oxides (NO_x) emissions and oxidation catalysts for the reduction of Carbon Monoxide (CO), Volatile Organic

Compounds (VOC), formaldehyde and Non-Methane/Non-Ethane emissions. The initial startup date for these units was July 31, 2005.

Compliance Assurance Monitoring (CAM) does not apply because there are no emissions limited emissions units using add-on control devices that do not have continuous emissions monitors used for continuous compliance determination.

Based on the Title V permit renewal application received June 25, 2007, this facility is a major source of hazardous air pollutants (HAP).

City of Tallahassee
Arvah B. Hopkins Generating Station
Facility ID No. 0730003
Leon County

Title V Air Operation Permit Renewal

Draft/Proposed Permit No. 0730003-011-AV

Renewal of Title V Air Operation Permit No. 0730003-003-AV

Permitting Authority

State of Florida
Department of Environmental Protection
Division of Air Resources Management
Bureau of Air Regulation
Permitting North Section

Mail Station #5505
2600 Blair Stone Road
Tallahassee, Florida 32399-2400

Telephone: 850/488-0114
Fax: 850/921-9533

Title V Air Operation Permit Renewal

Draft/Proposed Permit No. 0730003-011-AV

Table of Contents

Section	Page Number
Title V Air Operation Permit Placard Page.	1
I. Facility Information.	2
A. Facility Description.	
B. Summary of Emissions Unit ID Numbers and Brief Descriptions.	
C. Relevant Documents.	
D. Miscellaneous.	
II. Facility-wide Conditions.	4
III. Emissions Units and Conditions.	
A. Boiler Number 1 (Phase II Acid Rain Unit).	8
B. Boiler Number 2 (Phase II Acid Rain Unit).	21
C. Combustion Turbines Number 1 and Number 2.	34
D. Combustion Turbines Number 3 and Number 4.	39
IV. Acid Rain Part.	
A. Acid Rain, Phase II.	52
Appendix I-1, List of Insignificant Emissions Units and/or Activities.	56
Appendix U-1, List of Unregulated Emissions Units and/or Activities.	59
Appendix H-1, Permit History/ID Number Changes.	60
Referenced Attachments.	61

Permittee:

City of Tallahassee
300 South Adams Street
Tallahassee, Florida 32301

Draft/Proposed Permit No. 0730003-011-AV**Facility ID No.** 0730003**SIC Nos.** 49, 4911**Project:** Title V Air Operation Permit Renewal

This permit renewal is for the continued operation of the existing Arvah B. Hopkins Generating Station. This facility is located at 1125 Geddie Road, Tallahassee, Leon County.

This Title V air operation permit is issued under the provisions of Chapter 403, Florida Statutes (F.S.), and Florida Administrative Code (F.A.C.) Chapters 62-4, 62-210, 62-213, and 62-214. The above named permittee is hereby authorized to perform the work or operate the facility shown on the application and approved drawing(s), plans, and other documents, attached hereto or on file with the permitting authority, in accordance with the terms and conditions of this permit.

Referenced attachments made a part of this permit:

Appendix I-1, List of Insignificant Emissions Units and/or Activities

Appendix U-1, List of Unregulated Emissions Units and/or Activities

Phase II Acid Rain Permit Application/Compliance Plan Received June 25, 2007

Appendix GG, Standards of Performance for Stationary Gas Turbines

Appendix SS-1, Stack Sampling Facilities (version dated 10/7/96)

Appendix TV-6, Title V Conditions (version dated 6/23/06)

ASP Number 97-B-01

Scrivener's Order Correcting ASP Number 97-B-01 (dated July 9, 1997)

Figure 1: Summary Report-Gaseous and Opacity Excess Emission and Monitoring
System Performance (40 CFR 60, July, 1996)

Table 297.310-1 Calibration Schedule

Effective Date: January 1, 2008**Renewal Application Due Date:** July 5, 2012**Expiration Date:** December 31, 2012

(DRAFT)

Joseph Kahn, Director
Division of Air Resource Management

JK/tlv/jfk/jh

Section I. Facility Information

Subsection A. Facility Description

This facility consists of two fossil fuel-fired steam generators, two older fossil fuel-fired combustion turbines, and two new simple cycle, inlet-chilled combustion turbines, complete with electrical generator sets. The two new gas turbines are capable of producing a nominal 100 mega watts (MW) of electricity. The two steam generators are Phase II Acid Rain Units. Boiler Number 2 is regulated under the Florida Electrical Power Plant Siting Act. The total (nominal) combined electrical generating capacity from the facility is 456.27 MW, of which, 313 MW are provided by the two steam generators and 143.27 MW are provided by the four combustion turbines. The fuels used at this facility are natural gas, fuel oil and on-specification used oil.

Also included in this permit are miscellaneous unregulated/insignificant emissions units and/or activities.

Based on the Title V permit renewal application received June 25, 2007, this facility is a major source of hazardous air pollutants (HAP).

Subsection B. Summary of Emissions Unit ID No(s). and Brief Description(s)

Regulated Emissions Units:

E.U. ID

<u>No.</u>	<u>Brief Description</u>
-001	Boiler Number 1: 903 million British thermal units per hour (MMBtu/hour) (Phase II Acid Rain Unit)
-002	Combustion Turbine Number 1: 228 MMBtu/hour
-003	Combustion Turbine Number 2: 446 MMBtu/hour
-004	Boiler Number 2: 2,325 - 2,500 MMBtu/hour (Phase II Acid Rain Unit)
-031	Combustion Turbine HC3: 445 MMBtu/hour (Phase II Acid Rain Unit)
-032	Combustion Turbine HC4: 445 MMBtu/hour (Phase II Acid Rain Unit)

Unregulated emissions Units and/or Activities (See Appendix U-1):

E.U. ID

<u>No.</u>	<u>Brief Description</u>
-005	Fugitive Volatile Organic Compound (VOC) Sources - Painting Operations
-006	General Purpose Engines
-007	Emergency Generators
-034	750 KW Emergency Diesel Generator

Please reference the Permit No., Facility ID No., and appropriate Emissions Unit(s) ID Number(s) on all correspondence, test report submittals, applications, etc.

Subsection C. Relevant Documents

The following documents are part of this permit:

Appendix I-1, List of Insignificant Emissions Units and/or Activities
Appendix U-1, List of Unregulated Emissions Units and/or Activities
Phase II Acid Rain Permit Application/Compliance Plan Received June 25, 2007
Appendix GG, Standards of Performance for Stationary Gas Turbines
Appendix SS-1, Stack Sampling Facilities (version dated 10/7/96)
Appendix TV-6, Title V Conditions (version dated 6/23/06)
Figure 1: Summary Report-Gaseous and Opacity Excess Emission and Monitoring
System Performance (40 CFR 60, July, 1996)
ASP Number 97-B-01
Scrivener's Order Correcting ASP Number 97-B-01 (dated July 9, 1997)
Table 297.310-1 Calibration Schedule

{Permitting Note: The documents listed below are not a part of this permit; however, they are specifically related to this permitting action.}

These documents are provided to the permittee for information purposes only:

Appendix H-1, Permit History / ID Number Changes
Appendix A-1, Abbreviations, Acronyms, Citations, and Identification Numbers (version dated 2/5/97)
Table 1-1, Summary of Air Pollutant Standards and Terms
Table 2-1, Summary of Compliance Requirements
Statement of Basis

These documents are on file with the permitting authority:

Title V Permit Renewal Application received June 25, 2007

Section II. Facility-wide Conditions

The following conditions apply facility-wide:

1. Appendix TV-6, Title V Conditions (version dated 6/23/06), is a part of this permit.
{Permitting note: Appendix TV-6, Title V Conditions is distributed to the permittee only. Other persons requesting copies of these conditions shall be provided one copy when requested or otherwise appropriate.}
2. Not federally enforceable. General Pollutant Emission Limiting Standards. Objectionable Odor Prohibited. The permittee shall not cause, suffer, allow, or permit the discharge of air pollutants which cause or contribute to an objectionable odor.
[Rule 62-296.320(2), F.A.C.]
3. Prevention of Accidental Releases (Section 112(r) of the Clean Air Act (CAA)).
 - a. As required by Section 112(r)(7)(B)(iii) of the CAA and 40 Code of Federal Regulations (CFR) 68, the owner or operator shall submit an updated Risk Management Plan (RMP) to the Chemical Emergency Preparedness and Prevention Office (CEPPO) RMP Reporting Center.
 - b. As required under Section 252.941(1)(c), F.S., the owner or operator shall report to the appropriate representative of the Department of Community Affairs (DCA), as established by department rule, within one working day of discovery of an accidental release of a regulated substance from the stationary source, if the owner or operator is required to report the release to the United States Environmental Protection Agency under Section 112(r)(6) of the CAA.
 - c. The owner or operator shall submit the required annual registration fee to the DCA on or before April 1, in accordance with Part IV, Chapter 252, F.S. and Rule 9G-21, F.A.C.

Any required written reports, notifications, certifications, and data required to be sent to the DCA, should be sent to:

Department of Community Affairs
Division of Emergency Management
2555 Shumard Oak Boulevard
Tallahassee, FL 32399-2100
Telephone: 850/413-9921, Fax: 850/488-1739

Any Risk Management Plans, original submittals, revisions or updates to submittals, should be sent to:

RMP Reporting Center
Post Office Box 1515
Lanham-Seabrook, MD 20703-1515
Telephone: 301/429-5018

Any required reports to be sent to the National Response Center, should be sent to:

National Response Center
EPA Office of Solid Waste and Emergency Response
USEPA (5305 W)
401 M Street, SW
Washington, D.C. 20460
Telephone: 1/800/424-8802

Send the required annual registration fee using approved forms made payable to:

Cashier
Department of Community Affairs
State Emergency Response Commission
2555 Shumard Oak Boulevard
Tallahassee, FL 32399-2149

[Part IV, Chapter 252, F.S.; and, Rule 9G-21, F.A.C.]

4. Insignificant Emissions Units and/or Activities. Appendix I-1, List of Insignificant Emissions Units and/or Activities, is a part of this permit.

[Rules 62-213.440(1), 62-213.430(6), and 62-4.040(1)(b), F.A.C.]

5. Unregulated Emissions Units and/or Activities. Appendix U-1, List of Unregulated Emissions Units and/or Activities, is a part of this permit.

[Rule 62-213.440(1), F.A.C.]

6. General Pollutant Emission Limiting Standards. Volatile Organic Compounds Emissions or Organic Solvents Emissions. The permittee shall allow no person to store, pump, handle, process, load, unload or use in any process or installation, volatile organic compounds or organic solvents without applying known and existing vapor emission control devices or systems deemed necessary and ordered by the Department.

[Rule 62-296.320(1)(a), F.A.C.]

{Permitting Note: No vapor emission control devices or systems are deemed necessary nor ordered by the Department as of the issuance date of this permit.}

7. General Particulate Emission Limiting Standards. General Visible Emissions Standard. Except for emissions units that are subject to a particulate matter or opacity limit set forth or established by rule and reflected by conditions in this permit, no person shall cause, let, permit, suffer or allow to be discharged into the atmosphere the emissions of air pollutants from any activity, the density of which is equal to or greater than that designated as Number 1 on the Ringelmann Chart (20 percent opacity). EPA Method 9 is the method of compliance pursuant to Chapter 62-297, F.A.C.

[Rules 62-296.320(4)(b)1. & 4., F.A.C.]

8. Not federally enforceable. Reasonable precautions to prevent emissions of unconfined particulate matter at this facility include:

- a. Concrete mixing in the portable concrete mixer shall be operated on an as-needed basis. Reasonable precautions include enclosing the activity wherever practical.
- b. Abrasive blasting activities that are associated with normal maintenance and corrosion control activities shall be enclosed where practical.
- c. Unconfined emissions associated with the limited on-site traffic shall be controlled by limiting vehicle speeds and unnecessary traffic within the plant grounds.
- d. Aggregate storage piles occur on a temporary basis associated with miscellaneous construction activities. Water is applied on an as-needed basis to control unconfined emissions from the handling and storage of the aggregate materials where practical.
- e. Spray applications of surface coatings are associated with normal maintenance and corrosion activities. The activities are enclosed whenever practicable.

[Rule 62-296.320(4)(c)2., F.A.C.; and, proposed by applicant in Title V permit renewal application received June 25, 2007.]

{Permitting note: This condition implements the requirements of Rules 62-296.320(4)(c)1., 3., & 4., F.A.C. (see Condition No. 57. of Appendix TV-6, Title V Conditions).}

9. When appropriate, any recording, monitoring, or reporting requirements that are time-specific shall be in accordance with the effective date of the permit, which defines day one.

[Rule 62-213.440, F.A.C.]

10. The Department's Northwest District Branch Office (Tallahassee) telephone number for reporting problems, malfunctions or exceedances under this permit is 850/488-3704, day or night, and for emergencies involving a significant threat to human health or the environment is 850/413-9911. The Department's Northwest District Office (Pensacola) telephone number for routine business, including compliance test notifications, is 850/444-8364 during normal working hours.

11. The permittee shall submit all compliance-related notifications and reports required of this permit (other than Acid Rain Program Information) to the Department's Northwest District office:

Department of Environmental Protection
Northwest District Office
160 Governmental Center
Pensacola, Florida 32501-5794
Telephone: 850/595-8364
Fax: 850/595-8096

Acid Rain Program Information shall be submitted, as necessary, to:

Department of Environmental Protection
2600 Blair Stone Road
Mail Station #5510
Tallahassee, Florida 32399-2400
Telephone: 850/488-0114
Fax: 850/922-6979

12. Any reports, data, notifications, certifications, and requests (other than Acid Rain Program Information) required to be sent to the United States Environmental Protection Agency, Region 4, should be sent to:

United States Environmental Protection Agency, Region 4
Air, Pesticides & Toxics Management Division
Air and EPCRA Enforcement Branch
Air Enforcement Section
61 Forsyth Street
Atlanta, Georgia 30303-8960
Telephone: 404/562-9155; Fax: 404/562-9163

Reporting Requirements

13. Statement of Compliance. The annual statement of compliance pursuant to Rule 62-213.440(3)(a)2., F.A.C., shall be submitted to the Department and EPA within 60 (sixty) days after the end of the calendar year using DEP Form No. 62-213.900(7), F.A.C.
[Rules 62-213.440(3) and 62-213.900, F.A.C.]

{Permitting Note: This condition implements the requirements of Rules 62-213.440(3)(a)2. & 3., F.A.C. (see Condition 51. of Appendix TV-6, Title V Conditions).}

14. Certification by Responsible Official (RO). In addition to the professional engineering certification required for applications by Rule 62-4.050(3), F.A.C., any application form, report, compliance statement, compliance plan and compliance schedule submitted pursuant to Chapter 62-213, F.A.C., shall contain a certification signed by a responsible official that, based on information and belief formed after reasonable inquiry, the statements and information in the document are true, accurate, and complete. Any responsible official who fails to submit any required information or who has submitted incorrect information shall, upon becoming aware of such failure or incorrect submittal, promptly submit such supplementary information or correct information.
[Rule 62-213.420(4), F.A.C.]

Section III. Emissions Units and Conditions

Subsection A. This section addresses the following emissions unit:

E.U. ID	No.	Brief Description
	-001	Boiler Number 1 (Phase II Acid Rain Unit)

Emissions unit number 001 is a Foster-Wheeler Corporation fossil fuel fired steam generator (model number SF-5) designated as "Boiler Number 1". It is rated at a maximum heat input of 903 MMBtu/hour when firing natural gas or fuel oil and a nominal 75 MW (electric) and 750,000 pounds of steam per hour.

{Permitting notes: This emissions unit is regulated under Acid Rain, Phase II. This emissions unit pre-dates the Prevention of Significant Deterioration (PSD) regulations, but is regulated under Rule 62-296.405, F.A.C., Fossil Fuel Steam Generators with more than 250 MMBtu/hour Heat Input. Stack height = 200 feet, exit diameter = 11.0 feet, exit temperature = 260.6 °F, actual volumetric flow rate per minute (ACFM) = 223,755 acfm. Emissions from this boiler are uncontrolled. This unit began commercial operation in May of 1971.}

The following Specific Conditions apply to the emissions unit listed above:

Essential Potential to Emit (PTE) Parameters

A.1. Permitted Capacity. The maximum operation heat input rate is as follows:

Unit No.	MMBtu/hr Heat Input	Fuel Type
-001	903	Natural Gas
	903	No. 2 - No. 6 Fuel Oil; On-Specification Used Oil

[Rules 62-4.160(2), 62-210.200(PTE) and 62-296.405, F.A.C.]

A.2. Emissions Unit Operating Rate Limitation After Testing. See Specific Condition **A.23.**
[Rule 62-297.310(2), F.A.C.]

A.3. Methods of Operation.

- Fuels.** The fuels that are allowed to be burned in this boiler are natural gas and/or new No. 2 through No. 6 fuel oil and/or on-specification used oil (See Specific Condition A.35.). In case of a natural gas curtailment, liquefied petroleum gas (LPG) may be used as an igniter fuel for the fuel oil.
- Other.** Fuel additives typically of a magnesium oxide, hydroxide, sulfonate, or calcium nitrate origin may be used.

[Rule 62-213.410, F.A.C. and Applicant request.]

A.4. Hours of Operation. This emissions unit may operate continuously, i.e. 8,760 hours/year. The permittee shall maintain an operation log available for Department inspection that documents the total hours of annual operation, including a detailed account of the hours operated on each of the allowable fuels.

[Rule 62-210.200(PTE), F.A.C.; AO37-242825, Specific Condition #3.; and, applicant request.]

Emission Limitations and Standards

{Permitting Note: The attached Table 1-1, Summary of Air Pollutant Standards and Terms, summarizes information for convenience purposes only. This table does not supersede any of the terms or conditions of this permit.}

{Permitting note: Unless otherwise specified, the averaging times for conditions **A.5. – A.10.** are based on the specified averaging time of the applicable test method.}

A.5. Visible Emissions. Visible emissions shall not exceed 20 percent opacity, except for one six-minute period per hour during which opacity shall not exceed 27 percent.

[Rule 62-296.405(1)(a), F.A.C. and applicant request.]

A.6. Visible Emissions - Soot Blowing and Load Change. Visible emissions shall not exceed 60 percent opacity during the 3-hours in any 24-hour period of excess emissions allowed for boiler cleaning (soot blowing) and load change.

A load change occurs when the operational capacity of a unit is in the 10 percent to 100 percent capacity range, other than startup or shutdown, which exceeds 10 percent of the unit's rated capacity and which occurs at a rate of 0.5 percent per minute or more.

[Rule 62-210.700(3), F.A.C.]

A.7. Particulate Matter. Particulate matter emissions shall not exceed 0.1 pound per million Btu heat input, as measured by applicable compliance methods.

[Rule 62-296.405(1)(b), F.A.C.]

A.8. Particulate Matter - Soot Blowing and Load Change. Particulate matter emissions shall not exceed an average of 0.3 pound per million Btu heat input during the 3-hours in any 24-hour period of excess emissions allowed for boiler cleaning (soot blowing) and load change.

[Rule 62-210.700(3), F.A.C.]

A.9. Sulfur Dioxide. When burning liquid fuel, sulfur dioxide (SO₂) emissions shall not exceed 1.87 pounds per million Btu heat input, as measured by applicable compliance methods.

[Rule 62-296.405(1)(c)1.h., F.A.C.]

A.10. Sulfur Dioxide. For compliance purposes, the following limit supersedes the limit contained in Specific Condition A.9. SO₂ emissions shall not exceed 0.75 pound per million Btu heat input, as measured by applicable compliance methods. Any calculations used to demonstrate compliance shall be based solely on the heating value, quantities, and the percent sulfur of the liquid and gaseous fuels being burned. (See Specific Conditions A.11. & A.21.)

[Rule 62-204.220 & .240, F.A.C.; AO37-242825 Specific Condition 4; and, Applicant request.]

A.11. Fuel Sulfur. Fuel sulfur content (percent, by weight) shall be determined by a fuel analysis representative of all “as-fired” fuels. Prior to burning any fuels in the boiler pursuant to this permit, receipts of the analyses of the existing fuels shall have been received by the City in order to use their values and calculate a maximum allowable fuel blend of natural gas and fuel oil. Upon subsequent fuel deliveries, if the vendor’s delivery receipts indicate that the sulfur content of the delivered fuel is greater than the sulfur content established by the previous analysis, then a new maximum allowable fuel blend shall be calculated using the assumption that any future fuel fired contains the higher sulfur content. The resulting maximum allowable fuel blend shall be adhered to until such time that a more accurate analysis has been provided. If the vendor’s delivery receipt indicates that the sulfur content of the delivered fuel is less than the sulfur content previously established, a new analysis is only necessary if the permittee wishes to adjust the previously established maximum allowable fuel blend. (See Specific Conditions **A.10.** and **A.21.**).

[Rules 62-4.070(3) & 62-296.405(1)(c)3., F.A.C. and Applicant Request.]

Excess Emissions

A.12. Excess emissions resulting from malfunction shall be permitted provided that best operational practices to minimize emissions are adhered to and the duration of excess emissions shall be minimized but in no case exceed two hours in any 24-hour period unless specifically authorized by the Department for longer duration.

[Rule 62-210.700(1), F.A.C.]

A.13. Excess emissions resulting from startup or shutdown shall be permitted provided that best operational practices to minimize emissions are adhered to and the duration of excess emissions shall be minimized.

[Rule 62-210.700(2), F.A.C.]

A.14. Excess emissions which are caused entirely or in part by poor maintenance, poor operation, or any other equipment or process failure which may reasonably be prevented during startup, shutdown or malfunction shall be prohibited.

[Rule 62-210.700(4), F.A.C.]

Monitoring of Operations

{Permitting Note: In accordance with the Acid Rain Phase II requirements, the following continuous monitors are installed on this unit: Gas Fuel Flow, Oil Fuel Flow, Nitrogen Oxides (NO_x) and Carbon Dioxide (CO₂).}

A.15. Sulfur Dioxide. The permittee elected to demonstrate compliance using fuel sampling and analysis. This protocol is allowed because the emissions unit does not have an operating flue gas desulfurization device. See Specific Conditions **A.11.** and **A.21.** of this permit.

[Rule 62-296.405(1)(f)1.b., F.A.C.]

A.16. Determination of Process Variables.

- (a) Required Equipment. The owner or operator of an emissions unit for which compliance tests are required shall install, operate, and maintain equipment or instruments necessary to determine process variables, such as process weight input or heat input, when such data are needed in conjunction with emissions data to determine the compliance of the emissions unit with applicable emission limiting standards.
- (b) Accuracy of Equipment. Equipment or instruments used to directly or indirectly determine process variables, including devices such as belt scales, weight hoppers, flow meters, and tank scales, shall be calibrated and adjusted to indicate the true value of the parameter being measured with sufficient accuracy to allow the applicable process variable to be determined within 10% of its true value.

[Rule 62-297.310(5), F.A.C.]

Test Methods and Procedures

{Permitting Note: The attached Table 2-1, Summary of Compliance Requirements, summarizes information for convenience purposes only. This table does not supersede any of the terms or conditions of this permit.}

A.17. Visible emissions. The test method for visible emissions shall be DEP Method 9, incorporated in Chapter 62-297, F.A.C. A transmissometer may be used and calibrated according to Rule 62-297.520, F.A.C. See Specific Condition A.18.

[Rule 62-296.405(1)(e)1., F.A.C.]

A.18. DEP Method 9. The provisions of EPA Method 9 (40 CFR 60, Appendix A) are adopted by reference with the following exceptions:

1. EPA Method 9, Section 2.4, Recording Observations. Opacity observations shall be made and recorded by a certified observer at sequential fifteen-second intervals during the required period of observation.
2. EPA Method 9, Section 2.5, Data Reduction. For a set of observations to be acceptable, the observer shall have made and recorded, or verified the recording of, at least 90 percent of the possible individual observations during the required observation period. For single-valued opacity standards (e.g., 20 percent opacity), the test result shall be the highest valid six-minute average for the set of observations taken. For multiple-valued opacity standards (e.g., 20 percent opacity, except that an opacity of 40 percent is permissible for not more than two minutes per hour) opacity shall be computed as follows:
 - a. For the basic part of the standard (i.e., 20 percent opacity), the opacity shall be determined as specified above for a single-valued opacity standard.
 - b. For the short-term average part of the standard, opacity shall be the highest valid short-term average (i.e., two-minute, three-minute average) for the set of observations taken.

In order to be valid, any required average (i.e., a six-minute or two-minute average) shall be based on all of the valid observations in the sequential subset of observations selected, and the selected subset shall contain at least 90 percent of the observations possible for the required averaging time. Each required average shall be calculated by summing the opacity value of each of the valid observations in the appropriate subset, dividing this sum by the number of valid

observations in the subset, and rounding the result to the nearest whole number. The number of missing observations in the subset shall be indicated in parenthesis after the subset average value.
[Rule 62-297.401(9)(c), F.A.C.]

A.19. Particulate Matter. The test methods for particulate matter emissions shall be EPA Methods 17, 5, 5B, or 5F, incorporated by reference in Chapter 62-297, F.A.C. The minimum sample volume shall be 30 dry standard cubic feet. EPA Method 5 may be used with filter temperature at no more than 320 degrees Fahrenheit. For EPA Method 17, stack temperature shall be less than 375 degrees Fahrenheit. The owner or operator may use EPA Method 5 to demonstrate compliance. EPA Method 3 or 3A with Orsat analysis shall be used when the oxygen based F-factor, computed according to EPA Method 19, is used in lieu of heat input. Acetone wash shall be used with EPA Method 5 or 17.
[Rules 62-296.405(1)(e)2. and 62-297.401, F.A.C.]

A.20. Sulfur Dioxide. The test methods for sulfur dioxide emissions shall be EPA Methods 6, 6A, 6B, or 6C, incorporated by reference in Chapter 62-297, F.A.C. Fuel sampling and analysis may be used as an alternate sampling procedure if such a procedure is incorporated into the operation permit for the emissions unit. If the emissions unit obtains an alternate procedure under the provisions of Rule 62-297.620, F.A.C., the procedure shall become a condition of the emissions unit's permit. The Department will retain the authority to require EPA Method 6 or 6C if it has reason to believe that exceedances of the sulfur dioxide emissions limiting standard are occurring. Results of an approved fuel sampling and analysis program shall have the same effect as EPA Method 6 test results for purposes of demonstrating compliance or noncompliance with sulfur dioxide standards. The permittee may use the EPA test methods, referenced above, to demonstrate compliance; however, as an alternate sampling procedure authorized by permit, the permittee elected to demonstrate compliance by using fuel sampling and analysis. See Specific Conditions **A.11.** and **A.21.**
[Rules 62-213.440, 62-296.405(1)(e)3., 62-296.405(1)(f)1.b. & 62-297.401, F.A.C.; and, Permit No. AO37-242825.]

A.21. The following fuel sampling and analysis protocol shall be used as an alternate sampling procedure authorized by permit to demonstrate compliance with the sulfur dioxide standard and to provide the necessary values needed to calculate a maximum allowable fuel blend:

- a. Establish and maintain a record of the sulfur content (percent, by weight) of the "as-fired" fuel oil using either ASTM D2622-92, ASTM D4294-90, both ASTM D4057-88 and ASTM D129-91, or equivalent, to analyze a representative sample of the blended fuel following each fuel delivery. This record may be maintained either by;
 - 1) retaining the delivery receipts that are provided by the fuel oil vendor (which indicates that the proper ASTM test methods have been followed) each time a fuel oil delivery is received, or;
 - 2) by "as-fired" sample results provided by the permittee.
- b. Establish and maintain a record of the sulfur content of the "as-fired" natural gas using either ASTM D1072-90(94)E-1, ASTM D3031-81(86), ASTM D3246-92, ASTM D4084-94, ASTM D5504-94, or equivalent. This record may be maintained either by;
 - 1) retaining delivery receipts provided by the natural gas vendor (which indicates that the proper ASTM test methods have been followed and which shall be provided, at a minimum, each time there is a measurable increase in the sulfur content of the natural gas), or;

- 2) by on-site sample results provided by the permittee, or;
 - 3) by utilizing the FERC Tariff guaranteed maximum sulfur content of 10 grains per 100 cubic feet of natural gas as a "default value".
- c. Establish and maintain a record of either the density (using ASTM D 1298-80, or equivalent), or the mass, and the calorific heat value in Btu per pound (using ASTM D 240-76, or equivalent), of the fuel oil combusted. This record may be maintained either by;
- 1) retaining the delivery receipts that are provided by the fuel oil vendor (which indicates that the proper ASTM test methods have been followed) each time a fuel oil delivery is received, or;
 - 2) by on-site sample results provided by the permittee, or;
 - 3) by utilizing data provided by a certified continuous mass flow monitor in accordance with 40 CFR 75, Appendix D.
- d. Record daily the amount of each fuel fired, the sulfur content (percent, by weight) of each fuel, either the density or mass of the fuel oil, and the calorific heat value of each fuel. For all fuels fired, the highest value for any parameter (i.e., density, calorific heat value, etc.) that has been established by the vendor's receipt shall be utilized until an as-fired fuel analysis is received to establish a new value for the parameter in question.
- e. Utilize the information in a., b. c. and d., above, to calculate the SO₂ emission rate to ensure compliance at all times.
- [Rules 62-213.440, 62-296.405(1)(e)3., 62-296.405(1)(f)1.b. & 62-297.440, F.A.C.; and, Applicant Request.]

Compliance Test Requirements

A.22. Required Number of Test Runs. For mass emission limitations, a compliance test shall consist of three complete and separate determinations of the total air pollutant emission rate through the test section of the stack or duct and three complete and separate determinations of any applicable process variables corresponding to the three distinct time periods during which the stack emission rate was measured provided, however, that three complete and separate determinations shall not be required if the process variables are not subject to variation during a compliance test, or if three determinations are not necessary in order to calculate the unit's emission rate. The three required test runs shall be completed within one consecutive five day period. In the event that a sample is lost or one of the three runs must be discontinued because of circumstances beyond the control of the owner or operator, and a valid third run cannot be obtained within the five day period allowed for the test, the Secretary or his or her designee may accept the results of the two complete runs as proof of compliance, provided that the arithmetic mean of the results of the two complete runs is at least 20 percent below the allowable emission limiting standards.

[Rule 62-297.310(1), F.A.C.]

A.23. Operating Rate During Testing. Testing of emissions shall be conducted with the emissions unit operation at permitted capacity, which is defined as 90 to 100 percent of the maximum operation rate allowed by the permit. If it is impracticable to test at permitted capacity, an emissions unit may be tested at less than the minimum permitted capacity; in this case, subsequent emissions unit operation is limited to 110 percent of the test load until a new test is conducted. Once the emissions unit is so limited,

operation at higher capacities is allowed for no more than 15 consecutive days for the purpose of additional compliance testing to regain the authority to operate at the permitted capacity.

[Rules 62-297.310(2) & (2)(b), F.A.C.]

A.24. Operating Conditions During Testing. If particulate matter and visible emissions tests are required, the tests shall be conducted concurrently and shall be performed using the maximum fuel oil to natural gas ratio that can be fired while meeting the standards.

[Rule 62-4.070(3), F.A.C. and Applicant request.]

A.25. Calculation of Emission Rate. The indicated emission rate or concentration shall be the arithmetic average of the emission rate or concentration determined by each of the separate test runs unless otherwise specified in a particular test method or applicable rule.

[Rule 62-297.310(3), F.A.C.]

A.26. Applicable Test Procedures.

(a) Required Sampling Time.

1. Unless otherwise specified in the applicable rule, the required sampling time for each test run shall be no less than one hour and no greater than four hours, and the sampling time at each sampling point shall be of equal intervals of at least two minutes.

2. Opacity Compliance Tests. When either EPA Method 9 or DEP Method 9 is specified as the applicable opacity test method, the required minimum period of observation for a compliance test shall be sixty (60) minutes for emissions units which emit or have the potential to emit 100 tons per year or more of particulate matter, and thirty (30) minutes for emissions units which have potential emissions less than 100 tons per year of particulate matter and are not subject to a multiple-valued opacity standard. The opacity test observation period shall include the period during which the highest opacity emissions can reasonably be expected to occur. Exceptions to these requirements are as follows:

c. The minimum observation period for opacity tests conducted by employees or agents of the Department to verify the day-to-day continuing compliance of a unit or activity with an applicable opacity standard shall be twelve minutes.

(b) Minimum Sample Volume. Unless otherwise specified in the applicable rule, the minimum sample volume per run shall be 25 dry standard cubic feet.

(c) Required Flow Rate Range. For EPA Method 5 particulate sampling, acid mist/sulfur dioxide, and fluoride sampling which uses Greenburg Smith type impingers, the sampling nozzle and sampling time shall be selected such that the average sampling rate will be between 0.5 and 1.0 actual cubic feet per minute, and the required minimum sampling volume will be obtained.

(d) Calibration of Sampling Equipment. Calibration of the sampling train equipment shall be conducted in accordance with the schedule shown in Table 297.310-1 (see attached Table 297.310-1 Calibration Schedule).

(e) Allowed Modification to EPA Method 5. When EPA Method 5 is required, the following modification is allowed: the heated filter may be separated from the impingers by a flexible tube.

[Rule 62-297.310(4), F.A.C.]

A.27. Required Stack Sampling Facilities. When a mass emissions stack test is required, the permittee shall comply with the requirements contained in Appendix SS-1, Stack Sampling Facilities, attached to this permit.

[Rule 62-297.310(6), F.A.C.]

A.28. Frequency of Compliance Tests. The following provisions apply only to those emissions units that are subject to an emissions limiting standard for which compliance testing is required.

(a) General Compliance Testing.

2. For excess emission limitations for particulate matter specified in Rule 62-210.700, F.A.C., a compliance test shall be conducted annually while the emissions unit is operating under soot blowing conditions in each federal fiscal year during which soot blowing is part of normal emissions unit operation, except that such test shall not be required in any federal fiscal year in which a fossil fuel steam generator does not burn liquid for more than 400 hours other than during startup.
3. The owner or operator of an emissions unit that is subject to any emission limiting standard shall conduct a compliance test that demonstrates compliance with the applicable emission limiting standard prior to obtaining a renewed operation permit. Emissions units that are required to conduct an annual compliance test may submit the most recent annual compliance test to satisfy the requirements of this provision. In renewing an air operation permit pursuant to Rule 62-210.300(2)(a)3.b., c., or d., F.A.C., the Department shall not require submission of emission compliance test results for any emissions unit that, during the year prior to renewal:
 - a. Did not operate; or
 - b. In the case of a fuel burning emissions unit, burned liquid fuel for a total of no more than 400 hours.
4. During each federal fiscal year (October 1 - September 30), unless otherwise specified by rule, order, or permit, the owner or operator of each emissions unit shall have a formal compliance test conducted for:
 - a. Visible emissions, if there is an applicable standard (see Specific Condition A.29.);
 - b. Each of the following pollutants, if there is an applicable standard, and if the emissions unit emits or has the potential to emit: 5 tons per year or more of lead or lead compounds measured as elemental lead; 30 tons per year or more of acrylonitrile; or 100 tons per year or more of any other regulated air pollutant; and
 - c. Each NESHAP pollutant, if there is an applicable emission standard.
5. An annual compliance test for particulate matter emissions shall not be required for any fuel burning emissions unit that, in a federal fiscal year, does not burn liquid fuel, other than during startup, for a total of more than 400 hours (see Specific Condition A.30.).
9. The owner or operator shall notify the Department, at least 15 days prior to the date on which each formal compliance test is to begin, of the date, time, and place of each such test, and the test contact person who will be responsible for coordinating and having such test conducted for the owner or operator.

(b) Special Compliance Tests. When the Department, after investigation, has good reason (such as complaints, increased visible emissions or questionable maintenance of control equipment) to believe that any applicable emission standard contained in a Department rule or in a permit issued pursuant to those rules is being violated, it may require the owner or operator of the emissions unit to conduct

compliance tests which identify the nature and quantity of pollutant emissions from the emissions unit and to provide a report on the results of said tests to the Department.

- (c) Waiver of Compliance Test Requirements. If the owner or operator of an emissions unit that is subject to a compliance test requirement demonstrates to the Department, pursuant to the procedure established in Rule 62-297.620, F.A.C., that the compliance of the emissions unit with an applicable weight emission limiting standard can be adequately determined by means other than the designated test procedure, such as specifying a surrogate standard of no visible emissions for particulate matter sources equipped with a bag house or specifying a fuel analysis for sulfur dioxide emissions, the Department shall waive the compliance test requirements for such emissions units and order that the alternate means of determining compliance be used, provided, however, the provisions of Rule 62-297.310(7)(b), F.A.C., shall apply.

[Rule 62-297.310(7), F.A.C.; and, SIP Approved.]

A.29. Visible Emissions Testing - Annual. By this permit, annual emissions compliance testing for visible emissions is not required for these emissions units while burning:

- a. only gaseous fuel(s); or,
- b. gaseous fuel(s) in combination with any amount of liquid fuel(s) for less than 400 hours per year; or,
- c. only liquid fuel(s) for less than 400 hours per year.

[Rule 62-297.310(7)(a)4., F.A.C.]

A.30. Particulate Matter Testing - Annual and Permit Renewal. Annual and permit renewal compliance testing for particulate matter emissions is not required for these emissions units while burning:

- a. only gaseous fuel(s); or,
- b. gaseous fuel(s) in combination with any amount of liquid fuel(s) for less than 400 hours per year; or,
- c. only liquid fuel(s) for less than 400 hours per year.

[Rules 62-297.310(7)(a)3. & 5., F.A.C.; and, ASP Number 97-B-01.]

Recordkeeping and Reporting Requirements

A.31. The owner or operator shall maintain continuous records of fuel consumption and each analysis that provides the heating value and sulfur content for all fuels fired. These records must be of sufficient detail to determine compliance with the conditions of this permit.

[Rule 62-4.070(3), F.A.C.]

A.32. In the case of excess emissions resulting from malfunctions, each owner or operator shall notify the Department in accordance with Rule 62-4.130, F.A.C. A full written report on the malfunctions shall be submitted in a quarterly report, if requested by the Department.

[Rule 62-210.700(6), F.A.C.]

A.33. Quarterly Reports. Submit to the Department a written report of emissions in excess of emission limiting standards as set forth in Rule 62-296.405(1), F.A.C., for each calendar quarter. The nature and cause of the excess emissions shall be explained. This report does not relieve the owner or operator of

the legal liability for violations. All recorded data shall be maintained on file by the Source for a period of five years.

[Rules 62-213.440 and 62-296.405(1)(g), F.A.C.]

A.34. Test Reports.

- (a) The owner or operator of an emissions unit for which a compliance test is required shall file a report with the Department on the results of each such test.
- (b) The required test report shall be filed with the Department as soon as practical but no later than 45 days after the last sampling run of each test is completed.
- (c) The test report shall provide sufficient detail on the emissions unit tested and the test procedures used to allow the Department to determine if the test was properly conducted and the test results properly computed. As a minimum, the test report, other than for an EPA or DEP Method 9 test, shall provide the following information:
 - 1. The type, location, and designation of the emissions unit tested.
 - 2. The facility at which the emissions unit is located.
 - 3. The owner or operator of the emissions unit.
 - 4. The normal type and amount of fuels used and materials processed, and the types and amounts of fuels used and material processed during each test run.
 - 5. The means, raw data and computations used to determine the amount of fuels used and materials processed, if necessary to determine compliance with an applicable emission limiting standard.
 - 6. The type of air pollution control devices installed on the emissions unit, their general condition, their normal operating parameters (pressure drops, total operating current and GPM scrubber water), and their operating parameters during each test run.
 - 7. A sketch of the duct within 8 stack diameters upstream and 2 stack diameters downstream of the sampling ports, including the distance to any upstream and downstream bends or other flow disturbances.
 - 8. The date, starting time and duration of each sampling run.
 - 9. The test procedures used, including any alternative procedures authorized pursuant to Rule 62-297.620, F.A.C. Where optional procedures are authorized in this chapter, indicate which option was used.
 - 10. The number of points sampled and configuration and location of the sampling plane.
 - 11. For each sampling point for each run, the dry gas meter reading, velocity head, pressure drop across the stack, temperatures, average meter temperatures and sample time per point.
 - 12. The type, manufacturer and configuration of the sampling equipment used.
 - 13. Data related to the required calibration of the test equipment.
 - 14. Data on the identification, processing and weights of all filters used.
 - 15. Data on the types and amounts of any chemical solutions used.
 - 16. Data on the amount of pollutant collected from each sampling probe, the filters, and the impingers, are reported separately for the compliance test.
 - 17. The names of individuals who furnished the process variable data, conducted the test, analyzed the samples and prepared the report.
 - 18. All measured and calculated data required to be determined by each applicable test procedure for each run.
 - 19. The detailed calculations for one run that relate the collected data to the calculated emission rate.

20. The applicable emission standard, and the resulting maximum allowable emission rate for the emissions unit, plus the test result in the same form and unit of measure.
21. A certification that, to the knowledge of the owner or his authorized agent, all data submitted are true and correct. When a compliance test is conducted for the Department or its agent, the person who conducts the test shall provide the certification with respect to the test procedures used. The owner or his authorized agent shall certify that all data required and provided to the person conducting the test are true and correct to his knowledge.

[Rules 62-213.440 and 62-297.310(8), F.A.C.]

Miscellaneous Conditions

A.35. Used Oil. Burning of on-specification used oil is allowed in this emissions unit in accordance with all other conditions of this permit and the following conditions:

- a. **On-specification Used Oil Emissions Limitations.** This emissions unit is permitted to burn on-specification used oil, which contains a PCB concentration of less than 50 ppm. On-specification used oil is defined as used oil that meets the specifications of 40 CFR 279 - Standards for the Management of Used Oil, listed below. "Off-specification" used oil shall not be burned. Used oil which fails to comply with any of these specification levels is considered "off-specification" used oil.

CONSTITUENT/property	ALLOWABLE LEVEL
Arsenic	5 ppm maximum
Cadmium	2 ppm maximum
Chromium	10 ppm maximum
Lead	100 ppm maximum
Total Halogens	1000 ppm maximum
Flash point	100 degrees F minimum

- b. **Quantity Limitation.** This emissions unit is permitted to burn "on-specification" used oil that is generated by the City of, not to exceed 10,000 gallons during any calendar year.
- c. **PCB Limitation.** Used oil containing a PCB concentration of 50 or more ppm shall not be burned at this facility. Used oil shall not be blended to meet this requirement.
- d. **Operational Requirements.** On-specification used oil with a PCB concentration of 2 to less than 50 ppm shall be burned only at normal source operating temperatures. On-specification used oil with a PCB concentration of 2 to less than 50 ppm shall not be burned during periods of startup or shutdown.
- e. **Testing Requirements.** For each batch of used oil to be burned, the owner or operator must be able to demonstrate that the used oil qualifies as on-specification used oil and that the PCB content is less than 50 ppm.

The requirements of this demonstration are governed by the following federal regulations:

Analysis of used oil fuel. A generator, transporter, processor/re-refiner, or burner may determine that used oil that is to be burned for energy recovery meets the fuel specifications of Sec. 279.11 by performing analyses or obtaining copies of analyses or other information documenting that the used oil fuel meets the specifications.

[40 CFR 279.72(a)]

Testing of used oil fuel. Used oil to be burned for energy recovery is presumed to contain quantifiable levels (2 ppm) of PCB unless the marketer obtains analyses (testing) or other information that the used oil fuel does not contain quantifiable levels of PCBs.

- (i) The person who first claims that a used oil fuel does not contain quantifiable level (2 ppm) PCB must obtain analyses or other information to support that claim.
- (ii) Testing to determine the PCB concentration in used oil may be conducted on individual samples, or in accordance with the testing procedures described in Sec. 761.60(g)(2). However, for purposes of this part, if any PCBs at a concentration of 50 ppm or greater have been added to the container or equipment, then the total container contents must be considered as having a PCB concentration of 50 ppm or greater for purposes of complying with the disposal requirements of this part.
- (iii) Other information documenting that the used oil fuel does not contain quantifiable levels (2 ppm) of PCBs may consist of either personal, special knowledge of the source and composition of the used oil, or a certification from the person generating the used oil claiming that the oil contains no detectable PCBs.

[40 CFR 761.20(e)(2)]

When testing is required, the owner or operator shall sample and analyze each batch of used oil to be burned for the following parameters:

Arsenic, cadmium, chromium, lead, total halogens, flash point and PCBs.

Testing (sampling, extraction and analysis) shall be performed using approved methods specified in EPA Publication SW-846 (Test Methods for Evaluating Solid Waste, Physical/Chemical Methods).

In addition to the above requirements, the owner or operator shall sample and analyze each batch of used oil to be burned for the sulfur content (by weight), density and heat content in accordance with approved test methods.

- f. Record Keeping Requirements. The owner or operator shall obtain, make, and keep the following records related to the use of used oil in a form suitable for inspection at the facility by the Department:

- (1) The gallons of on-specification used oil placed into inventory to be burned and the gallons of on-specification used oil burned each month.
- (2) Results of the analyses of each deposit of used oil, as required by the above conditions.
- (3) Other information, besides testing, used to make a claim that the used oil meets the requirements of on-specification used oil or that the used oil contains less than 50 ppm of PCBs.

[40 CFR 279.72(b), 40 CFR 279.74(b) and 40 CFR 761.20(e)]

- g. Reporting Requirements. The owner or operator shall submit, with the Annual Operation Report form, the analytical results required above and the total amount of on-specification used oil placed into inventory to be burned and the total amount of on-specification used oil burned during the previous calendar year.

[Rule 62-4.070(3) and 62-213.440, F.A.C., 40 CFR 279 and 40 CFR 761, unless otherwise noted.]

Subsection B. This section addresses the following emissions unit(s):

<u>E.U. ID No.</u>	<u>Brief Description</u>
-004	Boiler Number 2 (Phase II Acid Rain Unit)

Emissions unit number 004 is a Babcock & Wilcox steam generator (model number RB-533) designated as "Boiler Number 2". It is rated at a maximum heat input of 2,325 MMBtu/hour when firing fuel oil and 2,500 MMBtu/hour when firing natural gas and a nominal 238 MW and 1,619,000 pounds of steam per hour.

{Permitting notes: This emissions unit is regulated under Acid Rain, Phase II and the Florida Electrical Power Plant Siting Act (permit number PA 74-03D). This emissions unit pre-dates PSD regulations, but is regulated under Rule 62-296.405, F.A.C., Fossil Fuel Steam Generators with more than 250 million Btu per Hour Heat Input. Stack height = 250 feet, exit diameter = 14.0 feet, exit temperature = 220 - 305°F, actual volumetric flow rate = 636,706 acfm. Emissions from this boiler are uncontrolled. This unit began commercial operation in October of 1977.}

The following conditions apply to the emissions unit listed above:

Essential Potential to Emit (PTE) Parameters

B.1. Permitted Capacity. The maximum operation heat input rate is as follows:

<u>Unit No.</u>	<u>MMBtu/hr Heat Input</u>	<u>Fuel Type</u>
-004	2,500	Natural Gas
	2,325	No. 2 - No. 6 Fuel Oil;
		On-Specification Used Oil

Note: When a blend of fuel oil and natural gas is fired, the allowable heat input is prorated based on the percent heat input of each fuel.

[Rules 62-4.160(2), 62-210.200(PTE) & 62-296.405, F.A.C.; and, Applicant request.]

B.2. Emissions Unit Operating Rate Limitation After Testing. See Specific Condition **B.26**.
[Rule 62-297.310(2), F.A.C.]

B.3. Methods of Operation.

- Fuels.** The fuels that are allowed to be burned in this boiler are natural gas and/or new No. 2 through No. 6 fuel oil and/or on-specification used oil (See Specific Condition **B.38**). In case of a natural gas curtailment, liquefied petroleum gas (LPG) may be used as an igniter fuel for the fuel oil.
- Other.** Fuel additives typically of a magnesium oxide, hydroxide, sulfonate, or calcium nitrate origin may be used.

[Rule 62-213.410, F.A.C. and Applicant request.]

B.4. Hours of Operation. This emissions unit may operate continuously, i.e. 8760 hours/year. The permittee shall maintain an operation log available for Department inspection that documents the total

hours of annual operation, including a detailed account of the hours operated on each of the allowable fuels.

[Rule 62-210.200(PTE), F.A.C. and applicant request.]

Emission Limitations and Standards

{Permitting Note: The attached Table 1-1, Air Pollutant Standards and Terms, summarizes information for convenience purposes only. This table does not supersede any of the terms or conditions of this permit.}

{Permitting note: Unless otherwise specified, the averaging times for conditions B.5. – B.10. are based on the averaging time of the applicable test method.}

B.5. Visible Emissions. Visible emissions shall not exceed 20 percent opacity, except for one six-minute period per hour during which opacity shall not exceed 27 percent.

[Rule 62-296.405(1)(a), F.A.C. and applicant request.]

B.6. Visible Emissions. Visible emissions shall not exceed 60 percent opacity during the 3-hours in any 24 hour period of excess emissions allowed for boiler cleaning (soot blowing) and load change.

[Rule 62-210.700(3), F.A.C.]

B.7. Particulate Matter. Particulate matter emissions shall not exceed 0.1 pound per million Btu heat input, as measured by applicable compliance methods.

[Rule 62-296.405(1)(b), F.A.C.]

B.8. Particulate Matter. Particulate matter emissions shall not exceed an average of 0.3 pound per million Btu heat input during the 3-hours in any 24 hour period of excess emissions allowed for boiler cleaning (soot blowing) and load change.

A load change occurs when the operational capacity of a unit is in the 10 percent to 100 percent capacity range, other than startup or shutdown, which exceeds 10 percent of the unit's rated capacity and which occurs at a rate of 0.5 percent per minute or more.

[Rule 62-210.700(3), F.A.C.]

B.9. Sulfur Dioxide. Sulfur dioxide emissions when burning liquid fuel shall not exceed 1.87 pounds per million Btu heat input, as measured by applicable compliance methods.

[Rule 62-296.405(1)(c)1.h., F.A.C.]

B.10. Sulfur Dioxide. For compliance purposes, the following limit supersedes the limit contained in Specific Condition **B.9.** Sulfur dioxide emissions shall not exceed 1.4 pounds per million Btu heat input, as measured by applicable compliance methods. Any calculations used to demonstrate compliance shall be based solely on the heating value, quantities, and the percent sulfur of the liquid and gaseous fuels being burned. (See Specific Conditions **B.11. & B.24.**)

[Rule 62-204.220 & .240, F.A.C.; AO37-242825 Specific Condition 4; and, Applicant request.]

B.11. Fuel Sulfur. Fuel sulfur content (percent, by weight) shall be determined by a fuel analysis representative of all “as-fired” fuels. Prior to burning any fuels in the boiler pursuant to this permit, receipts of the analyses of the existing fuels shall have been received by the City in order to use their values and calculate a maximum allowable fuel blend of natural gas and fuel oil. Upon subsequent fuel deliveries, if the vendor’s delivery receipts indicate that the sulfur content of the delivered fuel is greater than the sulfur content established by the previous analysis, then a new maximum allowable fuel blend shall be calculated using the assumption that any future fuel fired contains the higher sulfur content. The resulting maximum allowable fuel blend shall be adhered to until such time that a more accurate analysis has been provided. If the vendor’s delivery receipt indicates that the sulfur content of the delivered fuel is less than the sulfur content previously established, a new analysis is only necessary if the permittee wishes to adjust the previously established maximum allowable fuel blend. (See Specific Conditions **B.10. and B.24.**)

[Rules 62-4.070(3) & 62-296.405(1)(c)3., F.A.C.; and, Applicant Request.]

B.12. Nitrogen Oxide. Nitrogen oxide emissions shall not exceed 0.3 pounds per million Btu heat input, as measured by applicable compliance methods.

[Rule 62-296.405(1)(d)3., F.A.C.]

Excess Emissions

B.13. Excess emissions resulting from malfunction shall be permitted provided that best operational practices to minimize emissions are adhered to and the duration of excess emissions shall be minimized but in no case exceed two hours in any 24 hour period unless specifically authorized by the Department for longer duration.

[Rule 62-210.700(1), F.A.C.]

B.14. Excess emissions resulting from startup or shutdown shall be permitted provided that best operational practices to minimize emissions are adhered to and the duration of excess emissions shall be minimized.

[Rule 62-210.700(2), F.A.C.]

B.15. Excess emissions which are caused entirely or in part by poor maintenance, poor operation, or any other equipment or process failure which may reasonably be prevented during startup, shutdown or malfunction shall be prohibited.

[Rule 62-210.700(4), F.A.C.]

B.16. Excess visible emissions resulting from fuel switching, startup or shutdown of an individual burner, or minor load changes shall be permitted provided that best operational practices to minimize emissions are adhered to and the duration of such excess visible emissions shall be minimized but in no case exceed two hours in any 24 hour period unless specifically authorized by the Department for longer duration. A “minor load” change means a change in the operational load of the unit, other than startup or shutdown, which is between 2 percent and 10 percent of the unit’s rated capacity and occurs at a rate of 0.5 percent per minute or more.

[Rule 62-210.700 (5), F.A.C. and Permit No. 0730003-006-AC.]

Monitoring of Operations

{Permitting Note: In accordance with the Acid Rain Phase II requirements, the following continuous monitors are installed on this unit: Gas Fuel Flow, Oil Fuel Flow, NO_x and CO₂.}
[Rules 62-296.405(1)(f)1.c. & d., 62-214.320 and 62-214.330, F.A.C.; and, 40 CFR Part 75 Appendix D, Section 2.1]}

B.17. Sulfur Dioxide. The permittee elected to demonstrate compliance using fuel sampling and analysis. This protocol is allowed because the emissions unit does not have an operating flue gas desulfurization device. See Specific Conditions **B.11. and B.24.** of this permit.
[Rule 62-296.405(1)(f)1.b., F.A.C.]

B.18. Nitrogen Oxides. For emission units that are subject to continuous monitoring requirements under 42 U.S.C. sections 7661-7661f or 40 CFR Part 75, compliance with nitrogen oxides emission limits shall be demonstrated based on a 30-day rolling average, except as specifically provided by 40 CFR Parts 60 or 76.
[Rule 62-296.405(1)(e)4., F.A.C.]

B.19. Determination of Process Variables.

- (a) **Required Equipment.** The owner or operator of an emissions unit for which compliance tests are required shall install, operate, and maintain equipment or instruments necessary to determine process variables, such as process weight input or heat input, when such data are needed in conjunction with emissions data to determine the compliance of the emissions unit with applicable emission limiting standards.
- (b) **Accuracy of Equipment.** Equipment or instruments used to directly or indirectly determine process variables, including devices such as belt scales, weight hoppers, flow meters, and tank scales, shall be calibrated and adjusted to indicate the true value of the parameter being measured with sufficient accuracy to allow the applicable process variable to be determined within 10% of its true value.
[Rule 62-297.310(5), F.A.C.]

Test Methods and Procedures

{Permitting Note: The attached Table 2-1, Summary of Compliance Requirements, summarizes information for convenience purposes only. This table does not supersede any of the terms or conditions of this permit.}

B.20. Visible emissions. The test method for visible emissions shall be DEP Method 9, incorporated in Chapter 62-297, F.A.C. A transmissometer may be used and calibrated according to Rule 62-297.520, F.A.C. See Specific Condition **B.21.**
[Rule 62-296.405(1)(e)1., F.A.C.]

B.21. DEP Method 9. The provisions of EPA Method 9 (40 CFR 60, Appendix A) are adopted by reference with the following exceptions:

1. EPA Method 9, Section 2.4, Recording Observations. Opacity observations shall be made and recorded by a certified observer at sequential fifteen second intervals during the required period of observation.
2. EPA Method 9, Section 2.5, Data Reduction. For a set of observations to be acceptable, the observer shall have made and recorded, or verified the recording of, at least 90 percent of the possible individual observations during the required observation period. For single-valued opacity standards (e.g., 20 percent opacity), the test result shall be the highest valid six-minute average for the set of observations taken. For multiple-valued opacity standards (e.g., 20 percent opacity, except that an opacity of 40 percent is permissible for not more than two minutes per hour) opacity shall be computed as follows:
 - a. For the basic part of the standard (i.e., 20 percent opacity), the opacity shall be determined as specified above for a single-valued opacity standard.
 - b. For the short-term average part of the standard, opacity shall be the highest valid short-term average (i.e., two-minute, three-minute average) for the set of observations taken.

In order to be valid, any required average (i.e., a six-minute or two-minute average) shall be based on all of the valid observations in the sequential subset of observations selected, and the selected subset shall contain at least 90 percent of the observations possible for the required averaging time. Each required average shall be calculated by summing the opacity value of each of the valid observations in the appropriate subset, dividing this sum by the number of valid observations in the subset, and rounding the result to the nearest whole number. The number of missing observations in the subset shall be indicated in parenthesis after the subset average value.

[Rule 62-297.401(9)(c), F.A.C.]

B.22. Particulate Matter. The test methods for particulate emissions shall be EPA Methods 17, 5, 5B, or 5F, incorporated by reference in Chapter 62-297, F.A.C. The minimum sample volume shall be 30 dry standard cubic feet. EPA Method 5 may be used with filter temperature no more than 320 degrees Fahrenheit. For EPA Method 17, stack temperature shall be less than 375 degrees Fahrenheit. The owner or operator may use EPA Method 5 to demonstrate compliance. EPA Method 3 or 3A with Orsat analysis shall be used when the oxygen based F-factor, computed according to EPA Method 19, is used in lieu of heat input. Acetone wash shall be used with EPA Method 5 or 17.

[Rules 62-296.405(1)(e)2. and 62-297.401, F.A.C.]

B.23. Sulfur Dioxide. The test methods for sulfur dioxide emissions shall be EPA Methods 6, 6A, 6B, or 6C, incorporated by reference in Chapter 62-297, F.A.C. Fuel sampling and analysis may be used as an alternate sampling procedure if such a procedure is incorporated into the operation permit for the emissions unit. If the emissions unit obtains an alternate procedure under the provisions of Rule 62-297.620, F.A.C., the procedure shall become a condition of the emissions unit's permit. The Department will retain the authority to require EPA Method 6 or 6C if it has reason to believe that exceedances of the sulfur dioxide emissions limiting standard are occurring. Results of an approved fuel sampling and analysis program shall have the same effect as EPA Method 6 test results for purposes of demonstrating compliance or noncompliance with sulfur dioxide standards. **The permittee may use the EPA test methods, referenced above, to demonstrate compliance; however, as an alternate sampling procedure authorized by permit, the permittee elected to demonstrate compliance by using fuel sampling and analysis. See Specific Conditions B.11. and B.24.**

[Rules 62-213.440, 62-296.405(1)(e)3., 62-296.405(1)(f)1.b. and 62-297.401, F.A.C.; and, Permit No. AO37-242825.]

B.24. The following fuel sampling and analysis protocol shall be used as an alternate sampling procedure authorized by permit to demonstrate compliance with the sulfur dioxide standard and to provide the necessary values needed to calculate a maximum allowable fuel blend:

- a. Establish and maintain a record of the sulfur content (percent, by weight) of the “as-fired” fuel oil using either ASTM D2622-92, ASTM D4294-90, both ASTM D4057-88 and ASTM D129-91, or equivalent, to analyze a representative sample of the blended fuel following each fuel delivery. This record may be maintained either by;
 - 1) retaining the delivery receipts that are provided by the fuel oil vendor (which indicates that the proper ASTM test methods have been followed) each time a fuel oil delivery is received, or;
 - 2) by “as-fired” sample results provided by the permittee.
- b. Establish and maintain a record of the sulfur content of the “as-fired” natural gas using either ASTM D1072-90(94)E-1, ASTM D3031-81(86), ASTM D3246-92, ASTM D4084-94, ASTM D5504-94, or equivalent. This record may be maintained either by;
 - 1) retaining delivery receipts provided by the natural gas vendor (which indicates that the proper ASTM test methods have been followed and which shall be provided, at a minimum, each time there is a measurable increase in the sulfur content of the natural gas), or;
 - 2) by on-site sample results provided by the permittee, or;
 - 3) by utilizing the FERC Tariff guaranteed maximum sulfur content of 10 grains per 100 cubic feet of natural gas as a “default value”.
- c. Establish and maintain a record of either the density (using ASTM D 1298-80, or equivalent), or the mass, and the calorific heat value in Btu per pound (using ASTM D 240-76, or equivalent), of the fuel oil combusted. This record may be maintained either by;
 - 1) retaining the delivery receipts that are provided by the fuel oil vendor (which indicates that the proper ASTM test methods have been followed) each time a fuel oil delivery is received, or;
 - 2) by on-site sample results provided by the permittee, or;
 - 3) by utilizing data provided by a certified continuous mass flow monitor in accordance with 40 CFR 75, Appendix D.
- d. Record daily the amount of each fuel fired, the sulfur content (percent, by weight) of each fuel, either the density or mass of the fuel oil, and the calorific heat value of each fuel. For all fuels fired, the highest value for any parameter (i.e., density, calorific heat value, etc.) that has been established by the vendor’s receipt shall be utilized until an as-fired fuel analysis is received to establish a new value for the parameter in question.
- e. Utilize the information in a., b. c. and d., above, to calculate the SO₂ emission rate to ensure compliance at all times.

[Rules 62-213.440, 62-296.405(1)(e)3., 62-296.405(1)(f)1.b. & 62-297.440, F.A.C.; and, Applicant Request.]

Compliance Test Requirements

B.25. Required Number of Test Runs. For mass emission limitations, a compliance test shall consist of three complete and separate determinations of the total air pollutant emission rate through the test section of the stack or duct and three complete and separate determinations of any applicable process variables corresponding to the three distinct time periods during which the stack emission rate was measured provided, however, that three complete and separate determinations shall not be required if the process variables are not subject to variation during a compliance test, or if three determinations are not necessary in order to calculate the unit's emission rate. The three required test runs shall be completed within one consecutive five day period. In the event that a sample is lost or one of the three runs must be discontinued because of circumstances beyond the control of the owner or operator, and a valid third run cannot be obtained within the five day period allowed for the test, the Secretary or his or her designee may accept the results of the two complete runs as proof of compliance, provided that the arithmetic mean of the results of the two complete runs is at least 20 percent below the allowable emission limiting standards.

[Rule 62-297.310(1), F.A.C.]

B.26. Operating Rate During Testing. Testing of emissions shall be conducted with the emissions unit operation at permitted capacity, which is defined as 90 to 100 percent of the maximum operation rate allowed by the permit. If it is impracticable to test at permitted capacity, an emissions unit may be tested at less than the minimum permitted capacity; in this case, subsequent emissions unit operation is limited to 110 percent of the test load until a new test is conducted. Once the emissions unit is so limited, operation at higher capacities is allowed for no more than 15 consecutive days for the purpose of additional compliance testing to regain the authority to operate at the permitted capacity.

[Rules 62-297.310(2) & (2)(b), F.A.C.]

B.27. Operating Conditions During Testing. If particulate matter and visible emissions tests are required, the tests shall be conducted concurrently and shall be performed using the maximum fuel oil to natural gas ratio that can be fired while meeting the standards.

[Rule 62-4.070(3), F.A.C.; and, Applicant request.]

B.28. Calculation of Emission Rate. The indicated emission rate or concentration shall be the arithmetic average of the emission rate or concentration determined by each of the separate test runs unless otherwise specified in a particular test method or applicable rule.

[Rule 62-297.310(3), F.A.C.]

B.29. Applicable Test Procedures.

(a) Required Sampling Time.

1. Unless otherwise specified in the applicable rule, the required sampling time for each test run shall be no less than one hour and no greater than four hours, and the sampling time at each sampling point shall be of equal intervals of at least two minutes.
2. Opacity Compliance Tests. When either EPA Method 9 or DEP Method 9 is specified as the applicable opacity test method, the required minimum period of observation for a compliance test shall be sixty (60) minutes for emissions units which emit or have the potential to emit 100 tons per year or more of particulate matter, and thirty (30) minutes for emissions units which have

potential emissions less than 100 tons per year of particulate matter and are not subject to a multiple-valued opacity standard. The opacity test observation period shall include the period during which the highest opacity emissions can reasonably be expected to occur. Exceptions to these requirements are as follows:

- c. The minimum observation period for opacity tests conducted by employees or agents of the Department to verify the day-to-day continuing compliance of a unit or activity with an applicable opacity standard shall be twelve minutes.
- (b) Minimum Sample Volume. Unless otherwise specified in the applicable rule, the minimum sample volume per run shall be 25 dry standard cubic feet.
- (c) Required Flow Rate Range. For EPA Method 5 particulate sampling, acid mist/sulfur dioxide, and fluoride sampling which uses Greenburg Smith type impingers, the sampling nozzle and sampling time shall be selected such that the average sampling rate will be between 0.5 and 1.0 actual cubic feet per minute, and the required minimum sampling volume will be obtained.
- (d) Calibration of Sampling Equipment. Calibration of the sampling train equipment shall be conducted in accordance with the schedule shown in Table 297.310-1 (see attached Table 297.310-1 Calibration Schedule).
- (e) Allowed Modification to EPA Method 5. When EPA Method 5 is required, the following modification is allowed: the heated filter may be separated from the impingers by a flexible tube.

[Rule 62-297.310(4), F.A.C.]

B.30. Required Stack Sampling Facilities. When a mass emissions stack test is required, the permittee shall comply with the requirements contained in Appendix SS-1, Stack Sampling Facilities, attached to this permit.

[Rule 62-297.310(6), F.A.C.]

B.31. Frequency of Compliance Tests. The following provisions apply only to those emissions units that are subject to an emissions limiting standard for which compliance testing is required.

(a) General Compliance Testing.

- 2. For excess emission limitations for particulate matter specified in Rule 62-210.700, F.A.C., a compliance test shall be conducted annually while the emissions unit is operating under soot blowing conditions in each federal fiscal year during which soot blowing is part of normal emissions unit operation, except that such test shall not be required in any federal fiscal year in which a fossil fuel steam generator does not burn liquid for more than 400 hours other than during startup.
- 3. The owner or operator of an emissions unit that is subject to any emission limiting standard shall conduct a compliance test that demonstrates compliance with the applicable emission limiting standard prior to obtaining a renewed operation permit. Emissions units that are required to conduct an annual compliance test may submit the most recent annual compliance test to satisfy the requirements of this provision. In renewing an air operation permit pursuant to Rule 62-210.300(2)(a)3.b., c., or d., F.A.C., the Department shall not require submission of emission compliance test results for any emissions unit that, during the year prior to renewal:
 - a. Did not operate; or,
 - b. In the case of a fuel burning emissions unit, burned liquid fuel for a total of no more than 400 hours.

4. During each federal fiscal year (October 1 - September 30), unless otherwise specified by rule, order, or permit, the owner or operator of each emissions unit shall have a formal compliance test conducted for:
 - a. Visible emissions, if there is an applicable standard (see **Specific Condition B.32.**);
 - b. Each of the following pollutants, if there is an applicable standard, and if the emissions unit emits or has the potential to emit: 5 tons per year or more of lead or lead compounds measured as elemental lead; 30 tons per year or more of acrylonitrile; or 100 tons per year or more of any other regulated air pollutant; and
 - c. Each NESHAP pollutant, if there is an applicable emission standard.
 5. An annual compliance test for particulate matter emissions shall not be required for any fuel burning emissions unit that, in a federal fiscal year, does not burn liquid fuel, other than during startup, for a total of more than 400 hours (see **Specific Condition B.33.**).
 9. The owner or operator shall notify the Department, at least 15 days prior to the date on which each formal compliance test is to begin, of the date, time, and place of each such test, and the test contact person who will be responsible for coordinating and having such test conducted for the owner or operator.
- (b) Special Compliance Tests. When the Department, after investigation, has good reason (such as complaints, increased visible emissions or questionable maintenance of control equipment) to believe that any applicable emission standard contained in a Department rule or in a permit issued pursuant to those rules is being violated, it may require the owner or operator of the emissions unit to conduct compliance tests which identify the nature and quantity of pollutant emissions from the emissions unit and to provide a report on the results of said tests to the Department.
- (c) Waiver of Compliance Test Requirements. If the owner or operator of an emissions unit that is subject to a compliance test requirement demonstrates to the Department, pursuant to the procedure established in Rule 62-297.620, F.A.C., that the compliance of the emissions unit with an applicable weight emission limiting standard can be adequately determined by means other than the designated test procedure, such as specifying a surrogate standard of no visible emissions for particulate matter sources equipped with a bag house or specifying a fuel analysis for sulfur dioxide emissions, the Department shall waive the compliance test requirements for such emissions units and order that the alternate means of determining compliance be used, provided, however, the provisions of Rule 62-297.310(7)(b), F.A.C., shall apply.

[Rule 62-297.310(7), F.A.C. and SIP Approved.]

B.32. Visible Emissions Testing - Annual. By this permit, annual emissions compliance testing for visible emissions is not required for these emissions units while burning:

- a. only gaseous fuel(s); or,
- b. gaseous fuel(s) in combination with any amount of liquid fuel(s) for less than 400 hours per year; or,
- c. only liquid fuel(s) for less than 400 hours per year.

[Rule 62-297.310(7)(a)4., F.A.C.]

B.33. Particulate Matter Testing - Annual and Permit Renewal. Annual and permit renewal compliance testing for particulate matter emissions is not required for these emissions units while burning:

- a. only gaseous fuel(s); or,

- b. gaseous fuel(s) in combination with any amount of liquid fuel(s) for less than 400 hours per year;
or,
 - c. only liquid fuel(s) for less than 400 hours per year.
- [Rules 62-297.310(7)(a)3. & 5., F.A.C.; and, ASP Number 97-B-01.]

Recordkeeping and Reporting Requirements

B.34. The owner or operator shall maintain continuous records of fuel consumption and each analysis that provides the heating value and sulfur content for all fuels fired. These records must be of sufficient detail to determine compliance with the conditions of this permit.
[Rule 62-4.070(3), F.A.C.]

B.35. The owner or operator shall maintain continuous records of fuel consumption and each analysis that provides the heating value and sulfur content for all fuels fired. These records must be of sufficient detail to determine compliance with the allowable sulfur dioxide emission limitation.
[Rule 62-4.070(3), F.A.C.]

B.36. In the case of excess emissions resulting from malfunctions, each owner or operator shall notify the Department in accordance with Rule 62-4.130, F.A.C. A full written report on the malfunctions shall be submitted in a quarterly report, if requested by the Department.
[Rule 62-210.700(6), F.A.C.]

B.37. Quarterly Reports. Submit to the Department a written report of emissions in excess of emission limiting standards as set forth in Rule 62-296.405(1), F.A.C., for each calendar quarter. The nature and cause of the excess emissions shall be explained. This report does not relieve the owner or operator of the legal liability for violations. All recorded data shall be maintained on file by the Source for a period of five years.
[Rules 62-213.440 and 62-296.405(1)(g), F.A.C.]

B.38. Test Reports.

- (a) The owner or operator of an emissions unit for which a compliance test is required shall file a report with the Department on the results of each such test.
- (b) The required test report shall be filed with the Department as soon as practical but no later than 45 days after the last sampling run of each test is completed.
- (c) The test report shall provide sufficient detail on the emissions unit tested and the test procedures used to allow the Department to determine if the test was properly conducted and the test results properly computed. As a minimum, the test report, other than for an EPA or DEP Method 9 test, shall provide the following information:
 - 1. The type, location, and designation of the emissions unit tested.
 - 2. The facility at which the emissions unit is located.
 - 3. The owner or operator of the emissions unit.
 - 4. The normal type and amount of fuels used and materials processed, and the types and amounts of fuels used and material processed during each test run.
 - 5. The means, raw data and computations used to determine the amount of fuels used and materials processed, if necessary to determine compliance with an applicable emission limiting standard.

6. The type of air pollution control devices installed on the emissions unit, their general condition, their normal operating parameters (pressure drops, total operating current and GPM scrubber water), and their operating parameters during each test run.
7. A sketch of the duct within 8 stack diameters upstream and 2 stack diameters downstream of the sampling ports, including the distance to any upstream and downstream bends or other flow disturbances.
8. The date, starting time and duration of each sampling run.
9. The test procedures used, including any alternative procedures authorized pursuant to Rule 62-297.620, F.A.C. Where optional procedures are authorized in this chapter, indicate which option was used.
10. The number of points sampled and configuration and location of the sampling plane.
11. For each sampling point for each run, the dry gas meter reading, velocity head, pressure drop across the stack, temperatures, average meter temperatures and sample time per point.
12. The type, manufacturer and configuration of the sampling equipment used.
13. Data related to the required calibration of the test equipment.
14. Data on the identification, processing and weights of all filters used.
15. Data on the types and amounts of any chemical solutions used.
16. Data on the amount of pollutant collected from each sampling probe, the filters, and the impingers, are reported separately for the compliance test.
17. The names of individuals who furnished the process variable data, conducted the test, analyzed the samples and prepared the report.
18. All measured and calculated data required to be determined by each applicable test procedure for each run.
19. The detailed calculations for one run that relate the collected data to the calculated emission rate.
20. The applicable emission standard, and the resulting maximum allowable emission rate for the emissions unit, plus the test result in the same form and unit of measure.
21. A certification that, to the knowledge of the owner or his authorized agent, all data submitted are true and correct. When a compliance test is conducted for the Department or its agent, the person who conducts the test shall provide the certification with respect to the test procedures used. The owner or his authorized agent shall certify that all data required and provided to the person conducting the test are true and correct to his knowledge.

[Rules 62-213.440 and 62-297.310(8), F.A.C.]

Miscellaneous Conditions

B.39. Used Oil. Burning of on-specification used oil is allowed in this emissions unit in accordance with all other conditions of this permit and the following conditions:

- a. **On-specification Used Oil Emissions Limitations.** This emissions unit is permitted to burn on-specification used oil, which contains a PCB concentration of less than 50 ppm. On-specification used oil is defined as used oil that meets the specifications of 40 CFR 279 - Standards for the Management of Used Oil, listed below. "Off-specification" used oil shall not be burned. Used oil which fails to comply with any of these specification levels is considered "off-specification" used oil.

CONSTITUENT/PROPERTY	ALLOWABLE LEVEL
Arsenic	5 ppm maximum
Cadmium	2 ppm maximum
Chromium	10 ppm maximum
Lead	100 ppm maximum
Total Halogens	1000 ppm maximum
Flash point	100 degrees F minimum

- b. Quantity Limitation. This emissions unit is permitted to burn “on-specification” used oil that is generated by the City of Tallahassee, not to exceed 10,000 gallons during any calendar year.
- c. PCB Limitation. Used oil containing a PCB concentration of 50 or more ppm shall not be burned at this facility. Used oil shall not be blended to meet this requirement.
- d. Operational Requirements. On-specification used oil with a PCB concentration of 2 to less than 50 ppm shall be burned only at normal source operating temperatures. On-specification used oil with a PCB concentration of 2 to less than 50 ppm shall not be burned during periods of startup or shutdown.
- e. Testing Requirements: For each batch of used oil to be burned, the owner or operator must be able to demonstrate that the used oil qualifies as on-specification used oil and that the PCB content is less than 50 ppm.

The requirements of this demonstration are governed by the following federal regulations:

Analysis of used oil fuel. A generator, transporter, processor/re-refiner, or burner may determine that used oil that is to be burned for energy recovery meets the fuel specifications of Sec. 279.11 by performing analyses or obtaining copies of analyses or other information documenting that the used oil fuel meets the specifications.
[40 CFR 279.72(a)]

Testing of used oil fuel. Used oil to be burned for energy recovery is presumed to contain quantifiable levels (2 ppm) of PCB unless the marketer obtains analyses (testing) or other information that the used oil fuel does not contain quantifiable levels of PCBs.

- (i) The person who first claims that a used oil fuel does not contain quantifiable level (2 ppm) PCB must obtain analyses or other information to support that claim.
- (ii) Testing to determine the PCB concentration in used oil may be conducted on individual samples, or in accordance with the testing procedures described in Sec. 761.60(g)(2). However, for purposes of this part, if any PCBs at a concentration of 50 ppm or greater have been added to the container or equipment, then the total container contents must be considered as having a PCB concentration of 50 ppm or greater for purposes of complying with the disposal requirements of this part.
- (iii) Other information documenting that the used oil fuel does not contain quantifiable levels (2 ppm) of PCBs may consist of either personal, special knowledge of the source and

composition of the used oil, or a certification from the person generating the used oil claiming that the oil contains no detectable PCBs.

[40 CFR 761.20(e)(2)]

When testing is required, the owner or operator shall sample and analyze each batch of used oil to be burned for the following parameters:

Arsenic, cadmium, chromium, lead, total halogens, flash point and PCBs.

Testing (sampling, extraction and analysis) shall be performed using approved methods specified in EPA Publication SW-846 (Test Methods for Evaluating Solid Waste, Physical/Chemical Methods).

In addition to the above requirements, the owner or operator shall sample and analyze each batch of used oil to be burned for the sulfur content (by weight), density and heat content in accordance with approved test methods.

- f. Record Keeping Requirements: The owner or operator shall obtain, make, and keep the following records related to the use of used oil in a form suitable for inspection at the facility by the Department:
- (1) The gallons of on-specification used oil placed into inventory to be burned and the gallons of on-specification used oil burned each month.
 - (2) Results of the analyses of each deposit of used oil, as required by the above conditions.
 - (3) Other information, besides testing, used to make a claim that the used oil meets the requirements of on-specification used oil or that the used oil contains less than 50 ppm of PCBs.

[40 CFR 279.72(b), 40 CFR 279.74(b) and 40 CFR 761.20(e)]

- g. Reporting Requirements: The owner or operator shall submit, with the Annual Operation Report form, the analytical results required above and the total amount of on-specification used oil placed into inventory to be burned and the total amount of on-specification used oil burned during the previous calendar year.

[Rule 62-4.070(3) and 62-213.440, F.A.C., 40 CFR 279 and 40 CFR 761, unless otherwise noted.]

Subsection C. This section addresses the following emissions units:

E.U. ID

No. Brief Description

- 002 Combustion Turbine Number 1
- 003 Combustion Turbine Number 2

Emissions unit number 002 is a combustion turbine manufactured by Westinghouse (model number W191G) and is designated as "Combustion Turbine Number 1". It is rated at a maximum heat input of 228 MMBtu/hour while being fueled by natural gas and/or No. 2 fuel oil with a maximum fuel oil sulfur content of 0.4%, by weight. Emissions unit number 003 is a combustion turbine manufactured by Westinghouse (model number W251G) and is designated as "Combustion Turbine Number 2". It is rated at a maximum heat input of 446 MMBtu/hour while being fueled by natural gas and/or No. 2 fuel oil with a maximum fuel oil sulfur content of 0.4%, by weight. Combustion Turbine Number 1 runs a nominal 16.47 MW generator and Combustion Turbine Number 2 runs a nominal 26.8 MW generator. Emissions from the combustion turbines are uncontrolled.

{Permitting notes: These emissions units are regulated under Rule 62-210.300, F.A.C., Permits Required. These units are not subject to 40 CFR 60, Subpart GG, Standards of Performance for New Stationary Gas Turbines. Each combustion turbine has its own stack. Combustion Turbine Number 1: Stack height = 29 feet, exit diameter = 9.2 feet, exit temperature = 802.4 °F, actual volumetric flow rate = 456,297.2 acfm. Combustion Turbine Number 2: Stack height = 30 feet, exit diameter = 14.7 feet, exit temperature = 874.4 °F, actual volumetric flow rate = 707,144.2 acfm. Combustion Turbine Number 1 began commercial operation in February of 1970, Combustion Turbine Number 2 began commercial operation in September of 1972.}

The following conditions apply to the emissions units listed above:

Essential Potential to Emit (PTE) Parameters

C.1. Permitted Capacity. The maximum operation heat input rates are as follows:

Unit No.	MMBtu/hr Heat Input	Fuel Type
-002(CT #1)	228 (LHV @ 80 degrees Fahrenheit)	Natural Gas
	228 (LHV @ 80 degrees Fahrenheit)	No. 2 Fuel Oil
-003 (CT #2)	446 (LHV @ 80 degrees Fahrenheit)	Natural Gas
	446 (LHV @ 80 degrees Fahrenheit)	No. 2 Fuel Oil

[Rules 62-4.160(2) and 62-210.200(PTE), F.A.C.]

C.2. Emissions Unit Operating Rate Limitation After Testing. See Specific Condition C.13.
[Rule 62-297.310(2), F.A.C.]

C.3. Methods of Operation.

- a. **Fuels.** Only natural gas and/or new No. 2 fuel oil shall be fired in these turbines.

- b. Other. Fuel additives typically of a magnesium oxide, hydroxide, sulfonate, or calcium nitrate origin may be used.

[Rule 62-213.410, F.A.C. and Applicant request.]

C.4. Hours of Operation. Combustion Turbine Number 1 may operate 8,491 hours per year. Combustion Turbine Number 2 may operate 7,071 hours per year. The Permittee shall maintain an operation log available for Department inspection that documents the total hours of operation annually.
[Rule 62-210.200, F.A.C., (PTE) and Permit No. AO37-242824 Specific Condition number 3.]

Emission Limitations and Standards

{Permitting Note: The attached Table 1-1, Air Pollutant Standards and Terms, summarizes information for convenience purposes only. This table does not supersede any of the terms or conditions of this permit.}

C.5. Visible Emissions. Visible emissions from each turbine shall not be equal to or greater than 20 percent opacity.
[Rule 62-296.320(4)(b)1., F.A.C. and Permit No. AO37-242824.]

{Permitting note: The averaging time for this condition is based on the averaging time of the applicable test method.}

C.6. Not federally enforceable. Sulfur Dioxide – Fuel Oil Sulfur Content. The sulfur content of the No. 2 fuel oil shall not exceed 0.4 percent, by weight. See Specific Condition C.12.
[Permit No. AO37-242824 and applicant request.]

Excess Emissions.

C.7. Excess emissions from these emissions units resulting from startup, shutdown or malfunction shall be permitted provided that best operational practices to minimize emissions are adhered to and the duration of excess emissions shall be minimized but in no case exceed two hours in any 24 hour period unless specifically authorized by the Department for longer duration.
[Rule 62-210.700(1), F.A.C.]

C.8. Excess emissions which are caused entirely or in part by poor maintenance, poor operation, or any other equipment or process failure which may reasonably be prevented during startup, shutdown or malfunction shall be prohibited.
[Rule 62-210.700(4), F.A.C.]

Monitoring of Operations

C.9. Sulfur Dioxide. The permittee shall demonstrate compliance with the liquid fuel sulfur limit by means of a fuel analysis provided by the vendor upon each fuel delivery. See Specific Conditions C.6. and C.12.
[Rule 62-213.440, F.A.C.]

C.10. Determination of Process Variables.

- (a) **Required Equipment.** The owner or operator of an emissions unit for which compliance tests are required shall install, operate, and maintain equipment or instruments necessary to determine process variables, such as process weight input or heat input, when such data are needed in conjunction with emissions data to determine the compliance of the emissions unit with applicable emission limiting standards.
- (b) **Accuracy of Equipment.** Equipment or instruments used to directly or indirectly determine process variables, including devices such as belt scales, weight hoppers, flow meters, and tank scales, shall be calibrated and adjusted to indicate the true value of the parameter being measured with sufficient accuracy to allow the applicable process variable to be determined within 10% of its true value.

[Rule 62-297.310(5), F.A.C.]

Test Methods and Procedures

{Permitting Note: The attached Table 2-1, Summary of Compliance Requirements, summarizes information for convenience purposes only. This table does not supersede any of the terms or conditions of this permit.}

C.11. Visible emissions. The test method for visible emissions shall be EPA Method 9, adopted and incorporated by reference in Rule 62-204.800, F.A.C., and referenced in Chapter 62-297, F.A.C.

[Rules 62-204.800, 62-296.320(4)(b)4.a. and 62-297.401, F.A.C.]

C.12. Sulfur Content. The fuel sulfur content, percent by weight, for liquid fuels shall be evaluated using either ASTM D2622-92, ASTM D4294-90, both ASTM D4057-88 and ASTM D129-91, or equivalent.

[Rules 62-213.440 and 62-297.440, F.A.C.]

C.13. Operating Rate During Testing. Testing of emissions shall be conducted with each emissions unit operating at permitted capacity, which is defined as 90-100 percent of the manufacturer's rated heat input achievable for the average ambient (or conditioned) air temperature during the test. If it is impracticable to test at capacity, then sources may be tested at less than capacity. In such cases, the entire heat input vs. inlet temperature curve will be adjusted by the increment equal to the difference between the design heat input value and 110 percent of the value reached during the test. Data, curves, and calculations necessary to demonstrate the heat input rate correction at both design and test conditions shall be submitted to the Department with the compliance test report.

[Rule 62-297.310(2), F.A.C.]

C.14. Applicable Test Procedures.

(a) Required Sampling Time.

- 2. **Opacity Compliance Tests.** When either EPA Method 9 or DEP Method 9 is specified as the applicable opacity test method, the required minimum period of observation for a compliance test shall be sixty (60) minutes for emissions units which emit or have the potential to emit 100 tons per year or more of particulate matter, and thirty (30) minutes for emissions units which have

potential emissions less than 100 tons per year of particulate matter and are not subject to a multiple-valued opacity standard. The opacity test observation period shall include the period during which the highest opacity emissions can reasonably be expected to occur. Exceptions to these requirements are as follows:

- c. The minimum observation period for opacity tests conducted by employees or agents of the Department to verify the day-to-day continuing compliance of a unit or activity with an applicable opacity standard shall be twelve minutes.

[Rule 62-297.310(4)(a)2., F.A.C.]

C.15. Frequency of Compliance Tests. The following provisions apply only to those emissions units that are subject to an emissions limiting standard for which compliance testing is required.

(a) General Compliance Testing.

3. The owner or operator of an emissions unit that is subject to any emission limiting standard shall conduct a compliance test that demonstrates compliance with the applicable emission limiting standard prior to obtaining a renewed operation permit. Emissions units that are required to conduct an annual compliance test may submit the most recent annual compliance test to satisfy the requirements of this provision. In renewing an air operation permit pursuant to Rule 62-210.300(2)(a)3.b., c., or d., F.A.C., the Department shall not require submission of emission compliance test results for any emissions unit that, during the year prior to renewal:
 - a. Did not operate; or
 - b. In the case of a fuel burning emissions unit, burned liquid fuel for a total of no more than 400 hours.
4. During each federal fiscal year (October 1 - September 30), unless otherwise specified by rule, order, or permit, the owner or operator of each emissions unit shall have a formal compliance test conducted for:
 - a. Visible emissions, if there is an applicable standard (see Specific Condition C.16.);
8. Any combustion turbine that does not operate for more than 400 hours per year shall conduct a visible emissions compliance test once per each five-year period, coinciding with the term of its air operation permit.
9. The owner or operator shall notify the Department, at least 15 days prior to the date on which each formal compliance test is to begin, of the date, time, and place of each such test, and the test contact person who will be responsible for coordinating and having such test conducted for the owner or operator.

- (b) Special Compliance Tests. When the Department, after investigation, has good reason (such as complaints, increased visible emissions or questionable maintenance of control equipment) to believe that any applicable emission standard contained in a Department rule or in a permit issued pursuant to those rules is being violated, it may require the owner or operator of the emissions unit to conduct compliance tests which identify the nature and quantity of pollutant emissions from the emissions unit and to provide a report on the results of said tests to the Department.

[Rule 62-297.310(7), F.A.C.; Permit No. AO65-242827, Specific Condition #5 (frequency); and, SIP Approved.]

C.16. Visible Emissions Testing - Annual. By this permit, annual emissions compliance testing for visible emissions is not required for these emissions units while burning:

- a. only gaseous fuels; or,

- b. gaseous fuels in combination with any amount of liquid fuels for less than 400 hours per year; or,
 - c. only liquid fuels for less than 400 hours per year.
- [Rules 62-297.310(7)(a)4. & 8., F.A.C.]

Recordkeeping and Reporting Requirements

C.17. Malfunction Reporting. In the case of excess emissions resulting from malfunctions, each owner or operator shall notify the Department or the appropriate Local Program in accordance with Rule 62-4.130, F.A.C. A full written report on the malfunctions shall be submitted in a quarterly report, if requested by the Department.
[Rule 62-210.700(6), F.A.C.]

C.18. Test Reports.

- (a) The owner or operator of an emissions unit for which a compliance test is required shall file a report with the Department on the results of each such test.
 - (b) The required test report shall be filed with the Department as soon as practical but no later than 45 days after the last sampling run of each test is completed.
- [Rule 62-297.310(8), F.A.C.]

Subsection D. This section addresses the following emissions units:

E.U. ID No. Brief Description

- | | |
|------|--|
| -031 | Combustion Turbine – Unit Number HC3 (Phase II Acid Rain Unit) |
| -032 | Combustion Turbine – Unit Number HC4 (Phase II Acid Rain Unit) |

This section addresses two General Electric LM 6000 Sprint simple cycle, inlet-chilled combustion turbines, complete with electrical generator sets. The gas turbines are capable of producing a nominal 100 MW of electricity (50 MW each). The turbines are permitted to fire 0.05% sulfur oil with natural gas as a back-up fuel. The units are equipped with selective catalytic reduction (SCR) systems and water injection for the reduction of Nitrogen Oxides (NO_x) emissions and oxidation catalysts for the reduction of Carbon Monoxide (CO), Volatile Organic Compounds (VOC), formaldehyde and Non-Methane/Non-Ethane emissions. The initial startup date for these units was July 31, 2005.

{Permitting notes: These emissions units are regulated under New Source Performance Standards (NSPS) - 40 CFR 60, Subpart GG, Standards of Performance for Stationary Gas Turbines (1997 version), adopted and incorporated by reference in Rule 62-204.800(7)(b)38., F.A.C.; Air Construction Permit No. 0730003-005-AC; PSD-FL-343, Prevention of Significant Deterioration (PSD), in Rule 62-212.400, F.A.C.; and, Best Available Control Technology (BACT), in Rule 62-212.410, F.A.C. Emissions Units 031 and 032 are subject to Acid Rain, Phase II. Stack height = 85 feet; exit diameter = 10 feet; exit temperature = 825°F; actual volumetric flow rate = 601,200 acfm.

The following specific conditions apply to the emissions units listed above:

General

D.1. Definitions. For the purposes of Rule 62-204.800(7), F.A.C., the definitions contained in the various provisions of 40 CFR 60, shall apply except that the term "Administrator" when used in 40 CFR 60, shall mean the Secretary or the Secretary's designee.
[40 CFR 60.2; and, Rule 62-204.800(7)(a), F.A.C.]

D.2. Circumvention. No owner or operator subject to the provisions of 40 CFR 60 shall build, erect, install, or use any article, machine, equipment or process, the use of which conceals an emission which would otherwise constitute a violation of an applicable standard. Such concealment includes, but is not limited to, the use of gaseous diluents to achieve compliance with an opacity standard or with a standard which is based on the concentration of a pollutant in the gases discharged to the atmosphere. The permittee shall not circumvent the air pollution control equipment or allow the emission of air pollutants without this equipment operating properly.
[40 CFR 60.12; Rule 62-210.650, F.A.C.; and, Permit No. 0730003-005-AC / PSD-FL-343]

D.3. Modifications. The permittee shall give written notification to the Department when there is any modification to this facility. This notice shall be submitted sufficiently in advance of any critical date involved to allow sufficient time for review, discussion, and revision of plans, if necessary. Such notice shall include, but not be limited to, information describing the precise nature of the change; modifications to any emission control system; production capacity of the facility before and after the

change; and the anticipated completion date of the change.
[40 CFR 60.14 and Permit No. 0730003-005-AC / PSD-FL-343]

D.4. NSPS Requirements. In addition to the emissions limits, record keeping, and reporting requirements listed below, the permittee is also required to comply with all applicable requirements of 40 CFR 60, adopted by reference in Rule 62-204.800(7)(b), F.A.C.

(a) **Subpart A, General Provisions,** including:

- 40 CFR 60.7, Notification and Record Keeping
- 40 CFR 60.8, Performance Tests
- 40 CFR 60.11, Compliance with Standards and Maintenance Requirements
- 40 CFR 60.12, Circumvention
- 40 CFR 60.13, Monitoring Requirements
- 40 CFR 60.19, General Notification and Reporting Requirements

(b) **Subpart GG, Standards of Performance for Stationary Gas Turbines:** These provisions include a requirement to correct test data to ISO conditions; however, such correction is not used for compliance determinations with the BACT standards. (See attached Appendix GG - Standards of Performance for Stationary Gas Turbines.)

[40 CFR 60, Subpart GG and 62-213.440, F.A.C.]

Essential Potential to Emit (PTE) Parameters

D.5. Permitted Capacity. The heat input to each combustion turbine from firing natural gas shall not exceed 445 MMBtu/hour based on the following: 100% base load, a lower heating value (LHV) for natural gas and a compressor inlet air temperature of 29° F. The heat input to each combustion turbine from firing No. 2 fuel oil shall not exceed 434 MMBtu/hour based on the following: 100% base load, LHV and a compressor inlet air temperature of 29° F. The permittee shall provide manufacturer's performance curves (or equations) that correct for site conditions to the Permitting and Compliance Authorities within 45 days of completing the initial compliance testing. Heat input rates will vary depending upon compressor conditions and the combustion turbine characteristics. Operating data may be adjusted for the appropriate site conditions in accordance with the performance curves on file with the Department.

[Design, Rule 62-210.200, F.A.C. (Definition - PTE); and, Permit No. 0730003-005-AC / PSD-FL-343]

D.6. Simple Cycle, Intermittent Operation. Each combustion turbine shall operate only in simple cycle mode not to exceed the permitted hours of operation allowed by this permit. This restriction is based on the permittee's request, which formed the basis of the PSD applicability and BACT determination and resulted in the emission standards specified in this permit. For any request to convert this unit to combined cycle operation by installing/connecting to heat recovery steam generators or increasing the allowable hours of operation, including changes to the fuel quality or quantity which may cause an increase in short or long-term emissions, the permittee may be required submit a full PSD permit application complete with a new proposal of the best available control technology as if the unit had never been built.

[Rules 62-212.400(2)(g) and 62-212.400(6)(b), F.A.C.; and, Permit No. 0730003-005-AC / PSD-FL-343]

D.7. Emissions Unit Operating Rate Limitation After Testing. See Specific Condition **D.34.**

[Rule 62-297.310(2), F.A.C.]

D.8. Methods of Operation - Allowable Fuels. Each combustion turbine shall only be fired with natural gas containing no more than 2 grains of sulfur per 100 dry standard cubic feet of gas (monthly average) and 0.05% sulfur distillate oil (or superior). The permittee shall demonstrate compliance with the fuel sulfur limit by keeping the records specified in this permit.

[Rule 62-210.200, F.A.C. (Definition - PTE) and Permit No. 0730003-005-AC / PSD-FL-343]

D.9. Hours of Operation. Each combustion turbine shall operate no more than 5840 hours during any consecutive 12-month period, 4,000 of which may be on distillate fuel oil. The permittee shall have installed, shall keep calibrated, and shall operate and maintain a monitoring system to measure and accumulate the hours of operation.

[Rule 62-212.400, F.A.C. (BACT); Rule 62-210.200, F.A.C. (PTE); and, Permit No. 0730003-005-AC / PSD-FL-343]

Emissions Controls

D.10. Water Injection Technology. The permittee shall install, calibrate, tune, operate, and maintain a water injection system for the unit. The system shall be designed and operated so as to ensure that NO_x emissions prior to the SCR are sufficient to achieve the NO_x emission limits in Specific Condition **D.11**.

[Rule 62-4.070(3); Rule 62-212.400, F.A.C. (BACT); and, Permit No. 0730003-005-AC / PSD-FL-343)]

D.11. SCR/Oxidation Catalyst. To control NO_x and CO emissions, the combustion turbine shall include an SCR system and an oxidation catalyst. The catalyst systems shall be designed in order to achieve the following emissions, regardless of fuel being combusted: 5 ppmvd NO_x @ 15% O₂ and 6 ppmvd CO @ 15% O₂.

[Design and Rule 62-212.400, F.A.C. and Permit No. 0730003-005-AC / PSD-FL-343]

Emission Limitations and Standards

{Permitting note: Table 1-1, Summary of Air Pollutant Standards and Terms (attached), summarizes information for convenience purposes only. This table does not supersede any of the terms or conditions of this permit.}

{Permitting note: The averaging times for Specific Conditions **D.12. – D.17.** are based on the specified averaging time of the applicable test method.}

{Permitting note: The following table summarizes the emissions standards for each pollutant and total emissions in lb/hr and TPY for informational and convenience purposes (PTE) only. This table does not supersede any of the terms or conditions of this permit.

Pollutant	Emission Standard	CT Emissions (lb/hr)		One CT (lb/year)	TPY for 2 CT's
		OIL	GAS		
NO _x	5 ppmvd @ 15% O ₂	8.67	8.62	50,541	50.5
CO	6 ppmvd @ 15% O ₂	6.35	6.27	36,937	36.9
SO ₂	NG & 0.05% S oil	10.31	1.13	43,319	43.4

Pollutant	Emission Standard	CT Emissions (lb/hr)		One CT (lb/year)	TPY for 2 CT's
		OIL	GAS		
PM ₁₀	VE	14.94	2.45	64,268	64.2
PM	VE	14.94	2.45	64,268	64.2
VOC	3 ppmvd @ 15% O ₂	2.66	1.79	13,934	13.9
SAM	NG & 0.05% S oil	9.66	1.15	40,756	40.8

Note: Annual emissions, for the purposes of this table only, are based on 4000 hours of oil operation and 1840 hours of natural gas operation.

(End of Permitting Note).}

D.12. Carbon Monoxide (CO). CO emissions from the combustion turbine shall not exceed 6.0 ppmvd corrected to 15% oxygen for each fuel. The permittee shall demonstrate compliance with this standard by conducting performance tests and emissions monitoring in accordance with EPA Method 10 and the requirements of this permit.

[Rule 62-212.400, F.A.C. (PSD Avoidance) and Permit No. 0730003-005-AC / PSD-FL-343]

D.13. Nitrogen Oxides (NO_x). NO_x emissions from the combustion turbine shall not exceed 5.0 ppmvd corrected to 15% oxygen for each fuel. The permittee shall demonstrate compliance with this standard by conducting performance tests and emissions monitoring in accordance with 40 CFR Part 60 Subpart GG and based on a 24-hour block average for data collected from the continuous emissions monitor.

[Rule 62-212.400, F.A.C. (BACT)]

D.14. Ammonia. The ammonia slip rate shall be limited to 10 ppmvd @ 15% O₂.

[Rule 62-212.400, F.A.C. (BACT) and Permit No. 0730003-005-AC / PSD-FL-343]

D.15. Particulate Matter (PM/PM₁₀), Sulfuric Acid Mist (SAM) and Sulfur Dioxides (SO₂). Fuel Specifications. Emissions of PM, PM₁₀, SAM, and SO₂ shall be limited by the use of pipeline-quality natural gas containing no more than 2 grain per 100 standard cubic feet, the use of 0.05% Sulfur oil, and good combustion techniques as specified in this permit. The permittee shall demonstrate compliance with the fuel sulfur limit by maintaining the records specified by this permit.

[Rule 62-212.400, F.A.C. (PSD Applicability) and Permit No. 0730003-005-AC / PSD-FL-343]

D.16. Visible Emissions. Visible emissions from the combustion turbine shall not exceed 10% opacity, based on a 6-minute average. This work practice standard is established as a means of ensuring the non-applicability of BACT. The permittee shall demonstrate compliance with this standard by conducting tests in accordance with EPA Method 9 and the performance testing requirements of this permit.

[Rule 62-212.400, F.A.C. (PSD Applicability) and Permit No. 0730003-005-AC / PSD-FL-343]

D.17. Volatile Organic Compounds (VOC). VOC emissions from the combustion turbine shall not exceed 3.0 ppmvd corrected to 15% oxygen for each fuel. The VOC emissions shall be measured and reported in terms of methane. The permittee shall demonstrate compliance with these standards by conducting initial tests in accordance with EPA Methods 25 and/or 25A and the performance testing requirements of this permit. Optional testing in accordance with EPA Method 18 may be conducted to account for the actual methane fraction of the measured VOC emissions.

[Application, Design; Rule 62-4.070(3), F.A.C.; and, Permit No. 0730003-005-AC / PSD-FL-343]

Excess Emissions

{Permitting note: The Excess Emissions Rule at Rule 62-210.700, F.A.C., cannot vary any requirement of a NSPS or NESHAP provision.}

D.18. Excess Emissions Prohibited. Excess emissions caused entirely or in part by poor maintenance, poor operation, or any other equipment or process failure that may reasonably be prevented during startup, shutdown or malfunction, shall be prohibited. These emissions shall be included in the calculation of the 24-hour averages to demonstrate compliance with the continuous NO_x emissions standard.
[Rule 62-210.700(4), F.A.C. and Permit No. 0730003-005-AC / PSD-FL-343]

D.19. Excess Emissions Allowed. Providing the permittee adheres to best operational practices to minimize the amount and duration of excess emissions, the following conditions shall apply:

- (a) During startup and shutdown, visible emissions excluding water vapor shall not exceed 20% opacity for more than 120 minutes in any 24-hour period.
- (b) The continuous emissions monitoring system (CEMS) shall monitor and record emissions during all periods of operation including startups, shutdowns, fuel switches, tuning sessions, and malfunctions.
- (c) Up to 45 minutes of NO_x CEMS data may be excluded due to a startup when demonstrating compliance with the NO_x BACT emissions standard.
- (d) Up to 15 minutes of NO_x CEMS data may be excluded due to a shutdown when demonstrating compliance with the NO_x BACT emissions standard.
- (e) Up to 15 minutes of NO_x CEMS data may be excluded due to a fuel switch when demonstrating compliance with the NO_x BACT emissions standard.
- (f) To maintain efficient operation, it is necessary to periodically tune the dry low-NO_x combustion, water injection, and/or selective catalytic reduction (SCR) systems. Provided the tuning sessions are performed according to manufacturer or industry specifications, NO_x CEMS data may be excluded due to such tuning sessions. A tuning session would occur after equipment replacement, repair, or as required to maintain proper operation of the combustor, water injection or SCR systems. At least one day prior to performing a tuning session, the permittee shall notify the Compliance Authority with details of the activity and the proposed schedule. The notice may be made by telephone, facsimile transmittal, or electronic mail.
- (g) Up to 120 minutes of NO_x CEMS data during any 24-hour period may be excluded due to documented malfunctions when demonstrating compliance with the NO_x BACT emissions standard. A documented malfunction means a malfunction that is documented within one working day of detection by contacting the Compliance Authority by telephone, facsimile, or electronic mail. In case of malfunctions, the permittee shall notify the Compliance Authorities within one working day. A full written report on the malfunctions shall be submitted in a quarterly report, if requested by the Department.

As limited above, only those periods of data directly attributable to startup, shutdown, malfunction, fuel switching, or tuning shall be excluded from any compliance demonstration. No monitoring data shall be excluded when demonstrating compliance with the NSPS Subpart GG emissions standards. All valid data shall be used to report annual emissions.

[Rules 62-210.700(1) & (5), 62-4.130, F.A.C ; Permit No. 0730003-005-AC / PSD-FL-343; and Permit No. 0730003-010-AC / PSD-FL-343A]

D.20. At all times, including periods of startup, shutdown, and malfunction, owners and operators shall, to the extent practicable, maintain and operate any affected facility including associated air pollution control equipment in a manner consistent with good air pollution control practice for minimizing emissions. Determination of whether acceptable operating and maintenance procedures are being used will be based on information available to the Administrator which may include, but is not limited to, monitoring results, opacity observations, review of operating and maintenance procedures, and inspection of the source.

[40 CFR 60.11(d)]

Continuous Monitoring Requirements

D.21. NO_x CEMS: The permittee shall have installed and calibrated, and shall operate and maintain a CEMS to measure and record NO_x and oxygen concentrations in the combustion turbine exhaust stack. A monitor for carbon dioxide may be used in place of the oxygen monitor, but the system shall be capable of correcting the emissions to 15% oxygen. The NO_x monitoring devices shall comply with the requirements of 40 CFR 60.334(b) for 40 CFR Part 75 monitoring systems. A monitoring plan shall be provided to the Department's Emissions Monitoring Section Administrator, EPA Region 4, and the Compliance Authority for review no later than 45 days prior to the first scheduled certification test pursuant to 40 CFR 75.62. The plan shall consist of data on CEM equipment specifications, manufacturer, type, calibration and maintenance needs, and its proposed location.

[Rule 62-212.400, F.A.C. (BACT); 40 CFR 75; and, Permit No. 0730003-005-AC / PSD-FL-343]

D.22. NO_x CEMS Data Requirements:

- (a) **Installation.** The CEMS shall be installed, calibrated, and properly functioning prior to the initial performance tests. Each device shall comply with the applicable monitoring system requirements of 40 CFR 60.7(a)(5), 40 CFR 60.13, and 40 CFR 60.334(b).
- (b) **Data Collection.** Emissions shall be monitored and recorded at all times including startup, operation, shutdown, and malfunction except for continuous monitoring system breakdowns, repairs, calibration checks, and zero and span adjustments. Each valid 1-hour average shall be calculated using at least two valid data points at least 15 minutes apart.
- (c) **Data Reporting:** Data collected by the CEMS shall be used to demonstrate compliance with the emissions standards specified for each 24-hour block average. Emissions shall be reported in units of ppmvd corrected to 15% oxygen for each hour of operation. The compliance averages shall be determined by calculating the arithmetic average of a 24-hour block of valid hourly emission rates. When a monitoring system reports emissions in excess of the standards allowed by this permit, the permittee shall notify the Compliance Authority within one (1) working day of: the nature, extent, and duration of the excess emissions; the cause of the excess emissions; and the actions taken to correct the problem. The Department may request a written report summarizing the excess emissions incident. The permittee shall also report excess emissions in a quarterly report as required in Specific Condition D.43. of this permit.
- (d) **Data Exclusion.** Unless prohibited by 62-210.700 F.A.C., valid hourly emission rates shall not include periods of start up, shutdown, or documented malfunction as described under the excess emissions requirements of this permit.

[Rules 62-4.130, 62-4.160(8), 62-204.800, 62-210.700, 62-297.520, F.A.C.; 40 CFR 60.7; and, Permit No. 0730003-005-AC / PSD-FL-343]

Required Tests, Test Methods and Procedures

{Permitting note: Table 2-1, Summary of Compliance Requirements, summarizes information for convenience purposes only. This table does not supersede any of the terms or conditions of this permit.}

D.23. Annual Performance Tests. To demonstrate compliance with the emission standards specified in this permit, the permittee shall conduct annual performance tests for NO_x, CO, and visible emissions from the combustion turbine for each fuel. Testing for ammonia slip is required during the first scheduled annual performance tests after the cumulative hours of operation on each combustion turbine exceed 1,500 hours of oil firing or 5,000 hours of gas firing starting from the initial installation of the SCR catalysts. Thereafter, ammonia testing is required during the first scheduled annual performance tests after subsequent cumulative 1,500 hours of oil firing and 5,000 hours of gas firing in each combustion turbine or after regeneration, replacement or addition to the SCR catalyst system. If conducted at permitted capacity, NO_x emissions data collected during the annual NO_x continuous monitor RATA required pursuant to 40 CFR 75 may be substituted for the required annual performance test. Tests required on an annual basis shall be conducted at least once during each federal fiscal year (October 1st to September 30th). In the event that the operation of the CT is less than 400 hours per year on natural gas or distillate oil, annual testing is not required for that year and that fuel.

[Rule 62-297.310(7)(a), F.A.C. and Permit No. 0730003-005-AC / PSD-FL-343]

D.24. Tests Prior to Permit Renewal. Prior to renewing the air operation permit, the permittee shall conduct performance tests for CO, NO_x, and visible emissions from the combustion turbine. VOC emission tests are not required prior to permit renewal provided the CO emission standards are met. Testing for ammonia slip meeting the requirements of Specific Condition D.23., Annual Performance Tests, will meet the requirements of this condition. These tests shall be conducted within the 12-month period prior to renewing the air operation permit. For pollutants required to be tested annually, the permittee may submit the most recent annual compliance test to satisfy the requirements of this provision.

[Rule 62-297.310(7)(a)3., F.A.C. and Permit No. 0730003-005-AC / PSD-FL-343]

D.25. Tests After Major Repairs or Replacements. The Department may require that additional compliance testing be conducted within 90 days after major repairs or replacements are performed.

[Rule 62-297.310(7)(a)4., F.A.C. and Permit No. 0730003-005-AC / PSD-FL-343]

D.26. Performance Test Methods. Compliance tests shall be performed in accordance with the following reference methods as described in 40 CFR 60, Appendix A, and adopted by reference in Chapter 62-204.800, F.A.C.

- (a) EPA Method 9 - Visual Determination of the Opacity of Emissions from Stationary Sources;
- (b) EPA Method 10 - Determination of Carbon Monoxide Emissions from Stationary Sources;
- (h) EPA Method 7e - Determination of Nitrogen Oxides Emissions from Stationary Sources (Instrumental Analyzer Procedure); or EPA Method 20 - Determination of Oxides of Nitrogen Oxide, Sulfur Dioxide and Diluent Emissions from Stationary Gas Turbines; or ASTM D6522-00 Standard Test Method for Determination of Nitrogen Oxides, Carbon Monoxide and Oxygen Concentrations in Emissions from Natural Gas-Fired Reciprocating Engines, Combustion Turbines, Boilers and Process Heaters Using Portable Analyzers, as specified in 40 CFR 60.335;
- (i) EPA Method 25 or 25A - Determination of Volatile Organic Concentrations. (EPA Method 18 may be conducted to account for the non-regulated methane portion of the VOC emissions); and
- (j) Conditional Test Method 027 – Measurement of Ammonia Slip.

No other test methods may be used for compliance testing unless prior DEP approval is received, in writing, from the DEP Emissions Monitoring Section Administrator in accordance with an alternate sampling procedure specified in Rule 62-297.620, F.A.C.

[Permit No. 0730003-005-AC / PSD-FL-343]

D.27. Nitrogen Oxides. To compute the nitrogen oxides emissions, the owner or operator shall use analytical methods and procedures that are accurate to within 5 percent and are approved by the Department to determine the nitrogen content of the fuel being fired.

[40 CFR 60.335(a).]

D.28. Nitrogen and Sulfur Contents. To meet the requirements of 40 CFR 60.334(b), the owner or operator shall use the methods specified in 40 CFR 60.335(a) and 40 CFR 60.335(d) of 40 CFR 60.335 to determine the nitrogen and sulfur contents of the fuel being burned. The analysis may be performed by the owner or operator, a service contractor retained by the owner or operator, the fuel vendor, or any other qualified agency.

[40 CFR 60.335(e).]

D.29. General. Compliance with standards in 40 CFR 60, other than opacity standards, shall be determined only by performance tests established by 40 CFR 60.8, unless otherwise specified in the applicable standard.

[40 CFR 60.11(a).]

D.30. Performance tests shall be conducted under such conditions as the Administrator shall specify to the plant operator based on representative performance of the affected facility. The owner or operator shall make available to the Administrator such records as may be necessary to determine the conditions of the performance tests. Operations during periods of startup, shutdown, and malfunction shall not constitute representative conditions for the purpose of a performance test nor shall emissions in excess of the level of the applicable emission limit during periods of startup, shutdown, and malfunction be considered a violation of the applicable emission limit unless otherwise specified in the applicable standard.

[40 CFR 60.8(c).]

D.31. The owner or operator shall provide, or cause to be provided, stack sampling and performance testing facilities as follows:

- (1) Sampling ports adequate for test methods applicable to such facilities.
- (2) Safe sampling platform(s).
- (3) Safe access to sampling platform(s).
- (4) Utilities for sampling and testing equipment.

[40 CFR 60.8(e)(1), (2), (3) & (4).]

D.32. Required Stack Sampling Facilities. When a mass emissions stack test is required, the permittee shall comply with the requirements contained in Appendix SS-1, Stack Sampling Facilities, attached to this permit.

[Rule 62-297.310(6), F.A.C. and Permit No. 0730003-005-AC / PSD-FL-343]

D.33. Required Number of Test Runs. For mass emission limitations, a compliance test shall consist of three complete and separate determinations of the total air pollutant emission rate through the test section of the stack or duct and three complete and separate determinations of any applicable process variables corresponding to the three distinct time periods during which the stack emission rate was measured provided, however, that three complete and separate determinations shall not be required if the process variables are not subject to variation during a compliance test, or if three determinations are not necessary in order to calculate the unit's emission rate. The three required test runs shall be completed within one consecutive five day period. In the event that a sample is lost or one of the three runs must be discontinued because of circumstances beyond the control of the owner or operator, and a valid third run cannot be obtained within the five day period allowed for the test, the Secretary or his or her designee may accept the results of the two complete runs as proof of compliance, provided that the arithmetic mean of the results of the two complete runs is at least 20 percent below the allowable emission limiting standards.

[Rule 62-297.310(1), F.A.C.]

D.34. Combustion Turbine Testing Capacity. Performance tests for compliance with standards specified in this permit shall be conducted with the combustion turbine operating at permitted capacity. Permitted capacity is defined as 90-100 percent of the maximum heat input rate allowed by the permit, corrected for the average ambient air temperature during the test (with 100 percent represented by a curve depicting heat input vs. ambient temperature). If it is impracticable to test at permitted capacity, the source may be tested at less than permitted capacity. However, subsequent operation is limited by adjusting the entire heat input vs. ambient temperature curve downward by an increment equal to the difference between the maximum permitted heat input (corrected for inlet temperature) and 110 percent of the value reached during the test until a new test is conducted. Once the unit is so limited, operation at higher capacities is allowed for no more than 15 consecutive days for the purposes of additional compliance testing to regain the permitted capacity. Emissions performance tests shall meet all applicable requirements of Chapters 62-204 and 62-297, F.A.C.

[Rule 62-297.310(2), F.A.C. and Permit No. 0730003-005-AC / PSD-FL-343]

D.35. Calculation of Emission Rate. The indicated emission rate or concentration shall be the arithmetic average of the emission rate or concentration determined by each of the separate test runs unless otherwise specified in a particular test method or applicable rule.

[Rule 62-297.310(3), F.A.C. and Permit No. 0730003-005-AC / PSD-FL-343]

D.36. Applicable Test Procedures.

(a) Required Sampling Time.

1. Unless otherwise specified in the applicable rule, the required sampling time for each test run shall be no less than one hour and no greater than four hours, and the sampling time at each sampling point shall be of equal intervals of at least two minutes.

2. The minimum observation period for a visible emissions compliance test shall be sixty (60) minutes. The observation period shall include the period during which the highest opacity can reasonably be expected to occur.

(b) Minimum Sample Volume. Unless otherwise specified in the applicable rule, the minimum sample volume per run shall be 25 dry standard cubic feet.

(c) Calibration of Sampling Equipment. Calibration of the sampling train equipment shall be conducted in accordance with the schedule shown in Table 297.310-1 (see attached Table 297.310-1 Calibration Schedule).

[Rule 62-297.310(4), F.A.C. and Permit No. 0730003-005-AC / PSD-FL-343]

D.37. Determination of Process Variables.

- (a) Required Equipment. The owner or operator of an emissions unit for which compliance tests are required shall install, operate, and maintain equipment or instruments necessary to determine process variables, such as process weight input or heat input, when such data are needed in conjunction with emissions data to determine the compliance of the emissions unit with applicable emission limiting standards.
- (b) Accuracy of Equipment. Equipment or instruments used to directly or indirectly determine process variables, including devices such as belt scales, weight hoppers, flow meters, and tank scales, shall be calibrated and adjusted to indicate the true value of the parameter being measured with sufficient accuracy to allow the applicable process variable to be determined within 10% of its true value.

[Rule 62-297.310(5), F.A.C. and Permit No. 0730003-005-AC / PSD-FL-343]

D.38. Frequency of Compliance Tests. The following provisions apply only to those emissions units that are subject to an emissions limiting standard for which compliance testing is required.

(a) General Compliance Testing.

- 3. The owner or operator of an emissions unit that is subject to any emission limiting standard shall conduct a compliance test that demonstrates compliance with the applicable emission limiting standard prior to obtaining a renewed operation permit. Emissions units that are required to conduct an annual compliance test may submit the most recent annual compliance test to satisfy the requirements of this provision. In renewing an air operation permit pursuant to Rule 62-210.300(2)(a)3.b., c., or d., F.A.C., the Department shall not require submission of emission compliance test results for any emissions unit that, during the year prior to renewal:
 - a. Did not operate; or,
 - b. In the case of a fuel burning emissions unit, burned liquid fuel for a total of no more than 400 hours.
 - 4. During each federal fiscal year (October 1 - September 30), unless otherwise specified by rule, order, or permit, the owner or operator of each emissions unit shall have a formal compliance test conducted for:
 - a. Visible emissions, if there is an applicable standard;
 - b. Each of the following pollutants, if there is an applicable standard, and if the emissions unit emits or has the potential to emit: 5 tons per year or more of lead or lead compounds measured as elemental lead; 30 tons per year or more of acrylonitrile; or 100 tons per year or more of any other regulated air pollutant; and,
 - c. Each NESHAP pollutant, if there is an applicable emission standard.
 - 8. Any combustion turbine that does not operate for more than 400 hours per year shall conduct a visible emissions compliance test once per each five-year period, coinciding with the term of its air operation permit.
 - 9. The owner or operator shall notify the Department, at least 15 days prior to the date on which each formal compliance test is to begin, of the date, time, and place of each such test, and the test contact person who will be responsible for coordinating and having such test conducted for the owner or operator.
- (b) Special Compliance Tests. When the Department, after investigation, has good reason (such as complaints, increased visible emissions or questionable maintenance of control equipment) to believe

that any applicable emission standard contained in a Department rule or in a permit issued pursuant to those rules is being violated, it may require the owner or operator of the emissions unit to conduct compliance tests which identify the nature and quantity of pollutant emissions from the emissions unit and to provide a report on the results of said tests to the Department.

- (c) Waiver of Compliance Test Requirements. If the owner or operator of an emissions unit that is subject to a compliance test requirement demonstrates to the Department, pursuant to the procedure established in Rule 62-297.620, F.A.C., that the compliance of the emissions unit with an applicable weight emission limiting standard can be adequately determined by means other than the designated test procedure, such as specifying a surrogate standard of no visible emissions for particulate matter sources equipped with a bag house or specifying a fuel analysis for sulfur dioxide emissions, the Department shall waive the compliance test requirements for such emissions units and order that the alternate means of determining compliance be used, provided, however, the provisions of Rule 62-297.310(7)(b), F.A.C., shall apply.

[Rule 62-297.310(7), F.A.C. and SIP approved.]

D.39. Test Notification. The permittee shall notify the Compliance Authority in writing at least 30 days prior to initial NSPS performance tests and at least 15 days prior to any other required tests.

[40 CFR 60.7, 40 CFR 60.8; Rule 62-297.310(7)(a)9., F.A.C.; and, 0730003-005-AC / PSD-FL-343]

Recordkeeping and Reporting Requirements

D.40. Records Retention. All measurements, records, and other data required by this permit shall be documented in a permanent, legible format and retained for at least five (5) years following the date on which such measurements, records, or data are recorded. Records shall be made available to the Department upon request.

[Rules 62-4.160(14) & 62-213.440(1)(b)2., F.A.C. and Permit No. 0730003-005-AC / PSD-FL-343]

D.41. Fuel Records. The permittee shall demonstrate compliance with the fuel sulfur limits for natural gas and fuel oil specified in this permit by maintaining records required by 40 CFR 60.334 and 60.335.

[Rules 62-4.070(3) & 62-4.160(15), F.A.C.; and, Permit No. 0730003-005-AC / PSD-FL-343]

D.42. Monthly Operations Summary. By the fifth calendar day of each month, the permittee shall record the hours of operation and amount of each fuel fired for the combustion turbine. The information shall be recorded in a written or electronic log and shall summarize the previous month of operation and the previous 12 months of operation. All hours of operation shall be included in the demonstration of compliance with the 12-month fuel usage limitations. Information recorded and stored as an electronic file shall be available for inspection and/or printing within at least one day of a request from the Compliance Authority.

[Rule 62-4.160(15), F.A.C. and Permit No. 0730003-005-AC / PSD-FL-343]

D.43. Excess Emissions Reporting and Semi-annual Reports. If excess NO_x or visible emissions occur due to malfunction, the permittee shall notify the Compliance Authority within (1) working day of: the nature, extent, and duration of the excess emissions; the cause of the excess emissions; and the actions taken to correct the problem. In addition, the Department may request a written summary report of the incident. Following the NSPS format in 40 CFR 60.7(c), Subpart A, periods of startup, shutdown and malfunction, shall be monitored, recorded and reported as excess emissions when emission levels exceed the standards specified in this permit. Within thirty (30) days following each calendar semi-annual period, the permittee shall submit a report on any

periods of excess emissions that occurred during the previous semi-annual to the Compliance Authority. [Rules 62-4.130, 62-204.800 & 62-210.700(6), F.A.C.; 40 CFR 60.7; and, Permit No. 0730003-005-AC / PSD-FL-343]

D.44. The owner or operator subject to the provisions of 40 CFR 60 shall furnish the Administrator written notification as follows:

- (4) A notification of any physical or operational change to an existing facility which may increase the emission rate of any air pollutant to which a standard applies, unless that change is specifically exempted under an applicable subpart or in 40 CFR 60.14(e). This notice shall be postmarked 60 days or as soon as practicable before the change is commenced and shall include information describing the precise nature of the change, present and proposed emission control systems, productive capacity of the facility before and after the change, and the expected completion date of the change. The Administrator may request additional relevant information subsequent to this notice.

[40 CFR 60.7(a)(4).]

D.45. The owner or operator subject to the provisions of 40 CFR 60 shall maintain records of the occurrence and duration of any startup, shutdown, or malfunction in the operation of an affected facility; any malfunction of the air pollution control equipment; or, any periods during which a continuous monitoring system or monitoring device is inoperative.

[40 CFR 60.7(b).]

D.46. The owner or operator required to install a continuous monitoring system (CMS) or monitoring device shall submit an excess emissions and monitoring systems performance report and/or a summary report form [see 40 CFR 60.7(d)] to the Administrator semiannually, except when: more frequent reporting is specifically required by an applicable subpart; or, the CMS data are to be used directly for compliance determination, in which case quarterly reports shall be submitted; or, the Administrator, on a case-by-case basis, determines that more frequent reporting is necessary to accurately assess the compliance status of the source. All reports shall be postmarked by the 30th day following the end of each calendar half (or quarter, as appropriate). Written reports of excess emissions shall include the following information:

- (1) The magnitude of excess emissions computed in accordance with 40 CFR 60.13(h), any conversion factor(s) used, and the date and time of commencement and completion of each time period of excess emissions. The process operating time during the reporting period.
- (2) Specific identification of each period of excess emissions that occurs during startups, shutdowns, and malfunctions of the affected facility. The nature and cause of any malfunction (if known), the corrective action taken or preventative measures adopted.
- (3) The date and time identifying each period during which the continuous monitoring system was inoperative except for zero and span checks and the nature of the system repairs or adjustments.
- (4) When no excess emissions have occurred or the continuous monitoring system(s) have not been inoperative, repaired, or adjusted, such information shall be stated in the report.

[40 CFR 60.7(c)(1), (2), (3), and (4).]

D.47. The summary report form shall contain the information and be in the format shown in Figure 1 (attached) unless otherwise specified by the Administrator. One summary report form shall be submitted for each pollutant monitored at each affected facility.

(1) If the total duration of excess emissions for the reporting period is less than 1 percent of the total operating time for the reporting period and CMS downtime for the reporting period is less than 5 percent of the total operating time for the reporting period, only the summary report form shall be submitted and the excess emission report described in 40 CFR 60.7(c) need not be submitted unless requested by the Administrator.

(2) If the total duration of excess emissions for the reporting period is 1 percent or greater of the total operating time for the reporting period or the total CMS downtime for the reporting period is 5 percent or greater of the total operating time for the reporting period, the summary report form and the excess emission report described in 40 CFR 60.7(c) shall both be submitted.

[40 CFR 60.7(d)(1) and (2).]

{See attached Figure 1: Summary Report-Gaseous and Opacity Excess Emission and Monitoring System Performance}

D.48. Notification.

(1) Notwithstanding the frequency of reporting requirements specified in 40 CFR 60.7(c), an owner or operator who is required by an applicable subpart to submit excess emissions and monitoring systems performance reports (and summary reports) on a quarterly (or more frequent) basis may reduce the frequency of reporting for that standard to semiannual if the following conditions are met:

(i) For 1 full year (e.g., 4 quarterly or 12 monthly reporting periods) the affected facility's excess emissions and monitoring systems reports submitted to comply with a standard under this part continually demonstrate that the facility is in compliance with the applicable standard;

(ii) The owner or operator continues to comply with all recordkeeping and monitoring requirements specified in 40 CFR 60, Subpart A, and the applicable standard; and,

(iii) The Administrator does not object to a reduced frequency of reporting for the affected facility, as provided in 40 CFR 60.7(e)(2).

(2) The frequency of reporting of excess emissions and monitoring systems performance (and summary) reports may be reduced only after the owner or operator notifies the Administrator in writing of his or her intention to make such a change and the Administrator does not object to the intended change. In deciding whether to approve a reduced frequency of reporting, the Administrator may review information concerning the source's entire previous performance history during the required recordkeeping period prior to the intended change, including performance test results, monitoring data, and evaluations of an owner or operator's conformance with operation and maintenance requirements. Such information may be used by the Administrator to make a judgment about the source's potential for noncompliance in the future. If the Administrator disapproves the owner or operator's request to reduce the frequency of reporting, the Administrator will notify the owner or operator in writing within 45 days after receiving notice of the owner or operator's intention. The notification from the Administrator to the owner or operator will specify the grounds on which the disapproval is based. In the absence of a notice of disapproval within 45 days, approval is automatically granted.

- (3) As soon as monitoring data indicate that the affected facility is not in compliance with any emission limitation or operating parameter specified in the applicable standard, the frequency of reporting shall revert to the frequency specified in the applicable standard, and the owner or operator shall submit an excess emissions and monitoring systems performance report (and summary report, if required) at the next appropriate reporting period following the noncomplying event. After demonstrating compliance with the applicable standard for another full year, the owner or operator may again request approval from the Administrator to reduce the frequency of reporting for that standard as provided for in 40 CFR 60.7(e)(1) and (e)(2).

[40 CFR 60.7(e)(1).]

D.49. The owner or operator subject to the provisions of 40 CFR 60 shall maintain a file of all measurements, including continuous monitoring system, monitoring device, and performance testing measurements; all continuous monitoring system performance evaluations; all continuous monitoring system or monitoring device calibration checks; adjustments and maintenance performed on these systems or devices; and, all other information required by 40 CFR 60 recorded in a permanent form suitable for inspection. The file shall be retained for at least **5 (five)** years following the date of such measurements, maintenance, reports, and records.

[40 CFR 60.7(f) and Rule 62-213.440(1)(b)2.b., F.A.C.]

D.50. In the case of excess emissions resulting from malfunctions, each owner or operator shall notify the Department in accordance with Rule 62-4.130, F.A.C. A full written report on the malfunctions shall be submitted in a quarterly report, if requested by the Department.

[Rule 62-210.700(6), F.A.C.]

D.51. Test Reports.

- (a) The owner or operator of an emissions unit for which a compliance test is required shall file a report with the Department on the results of each such test.
- (b) The required test report shall be filed with the Department as soon as practical but no later than 45 days after the last sampling run of each test is completed.
- (c) The test report shall provide sufficient detail on the emissions unit tested and the test procedures used to allow the Department to determine if the test was properly conducted and the test results properly computed. As a minimum, the test report, other than for an EPA Method 9 test, shall provide the following information:
1. The type, location, and designation of the emissions unit tested.
 2. The facility at which the emissions unit is located.
 3. The owner or operator of the emissions unit.
 4. The normal type and amount of fuels used and materials processed, and the types and amounts of fuels used and material processed during each test run.
 5. The means, raw data and computations used to determine the amount of fuels used and materials processed, if necessary to determine compliance with an applicable emission limiting standard.
 6. The type of air pollution control devices installed on the emissions unit, their general condition, their normal operating parameters (pressure drops, total operating current and GPM scrubber water), and their operating parameters during each test run.

7. A sketch of the duct within 8 stack diameters upstream and 2 stack diameters downstream of the sampling ports, including the distance to any upstream and downstream bends or other flow disturbances.
8. The date, starting time and duration of each sampling run.
9. The test procedures used, including any alternative procedures authorized pursuant to Rule 62-297.620, F.A.C. Where optional procedures are authorized in this chapter, indicate which option was used.
10. The number of points sampled and configuration and location of the sampling plane.
11. For each sampling point for each run, the dry gas meter reading, velocity head, pressure drop across the stack, temperatures, average meter temperatures and sample time per point.
12. The type, manufacturer and configuration of the sampling equipment used.
13. Data related to the required calibration of the test equipment.
14. Data on the identification, processing and weights of all filters used.
15. Data on the types and amounts of any chemical solutions used.
16. Data on the amount of pollutant collected from each sampling probe, the filters, and the impingers, are reported separately for the compliance test.
17. The names of individuals who furnished the process variable data, conducted the test, analyzed the samples and prepared the report.
18. All measured and calculated data required to be determined by each applicable test procedure for each run.
19. The detailed calculations for one run that relate the collected data to the calculated emission rate.
20. The applicable emission standard, and the resulting maximum allowable emission rate for the emissions unit, plus the test result in the same form and unit of measure.
21. A certification that, to the knowledge of the owner or his authorized agent, all data submitted are true and correct. When a compliance test is conducted for the Department or its agent, the person who conducts the test shall provide the certification with respect to the test procedures used. The owner or his authorized agent shall certify that all data required and provided to the person conducting the test are true and correct to his knowledge.

[Rules 62-213.440 and 62-297.310(8), F.A.C.]

D.52. In each compliance test report, submit the maximum input/production rate at which each emissions unit was operated since the most recent compliance test.

[Rule 62-213.440, F.A.C.]

Section IV. Acid Rain Part

Operated by: City of Tallahassee
ORIS Code: 0688

Subsection A. This subsection addresses Acid Rain, Phase II

The emissions units listed below are regulated under Acid Rain, Phase II.

E.U. ID

No.	Description
-001	Boiler Number 1: 903 MMBtu/hour
-004	Boiler Number 2: 2,325 - 2,500 MMBtu/hour

A.1. The Phase II Acid Rain Part application submitted for this facility, as approved by the Department, is a part of this permit. The owners and operators of these Phase II acid rain units must comply with the standard requirements and special provisions set forth in the application listed below:

a. DEP Form No. 62-210.900(1)(a), dated 07/01/02, received 07/01/02.

[Chapter 62-213, F.A.C. and Rule 62-214.320, F.A.C.]

A.2. Sulfur dioxide (SO₂) allowance allocations and nitrogen oxide (NO_x) requirements for each Acid Rain unit are as follows:

E.U. ID No.	EPA ID	Year	2008	2009	2010	2011	2012
-001	Boiler 1	SO ₂ allowances, under Table 2or 3 of 40 CFR 73	81*	81*	85*	85*	85*
-004	Boiler 2	SO ₂ allowances, under Table 2or 3 of 40 CFR 73	5522*	5522*	5532*	5532*	5532*
-031	Combustion Turbine HC3	SO ₂ allowances, under Table 2or 3 of 40 CFR 73	0*	0*	0*	0*	0*
-032	Combustion Turbine HC4	SO ₂ allowances, under Table 2or 3 of 40 CFR 73	0*	0*	0*	0*	0*

* The number of allowances held by an Acid Rain source in a unit account may differ from the number allocated by the USEPA under Table 2, 3, or 4 of 40 CFR 73.

A.3. Emission Allowances. Emissions from sources subject to the Federal Acid Rain Program (Title IV) shall not exceed any allowances that the source lawfully holds under the Federal Acid Rain Program. Allowances shall not be used to demonstrate compliance with a non-Title IV applicable requirement of the Act.

1. No permit revision shall be required for increases in emissions that are authorized by allowances acquired pursuant to the Federal Acid Rain Program, provided that such increases do not require a permit revision pursuant to Rule 62-213.400(3), F.A.C.

2. No limit shall be placed on the number of allowances held by the source under the Federal Acid Rain Program.

3. Allowances shall be accounted for under the Federal Acid Rain Program.

[Rule 62-213.440(1)(c)1., 2. & 3., F.A.C.]

A.4. Comments, notes, and justifications: None.

Appendix I-1, List of Insignificant Emissions Units and/or Activities

City of Tallahassee, Electric Utilities
Arvah B. Hopkins Generating Station

Draft/Proposed Permit No. 0730003-011-AV
Facility ID No. 0730003

The facilities, emissions units, or pollutant-emitting activities listed in Rule 62-210.300(3)(a), F.A.C., Categorical Exemptions, are exempt from the permitting requirements of Chapters 62-210 and 62-4, F.A.C.; provided, however, that exempt emissions units shall be subject to any applicable emission limiting standards and the emissions from exempt emissions units or activities shall be considered in determining the potential emissions of the facility containing such emissions units. Emissions units and pollutant-emitting activities exempt from permitting under Rule 62-210.300(3)(a), F.A.C., shall not be exempt from the permitting requirements of Chapter 62-213, F.A.C., if they are contained within a Title V source; however, such emissions units and activities shall be considered insignificant for Title V purposes provided they also meet the criteria of Rule 62-213.430(6)(b), F.A.C. No emissions unit shall be entitled to an exemption from permitting under Rule 62-210.300(3)(a), F.A.C., if its emissions, in combination with the emissions of other units and activities at the facility, would cause the facility to emit or have the potential to emit any pollutant in such amount as to make the facility a Title V source.

The below listed emissions units and/or activities are considered insignificant pursuant to Rule 62-213.430(6), F.A.C.

Emissions Related to Steam Generator No. 1

1. Deareator Vents
2. Air Ejectors
3. Oil Vapor Extractors
4. Noncondensable Gas Extractors
5. Seal Oil Vacuum Pumps
6. Lube Oil Tanks (storage)
7. Lube/Fuel Oil Drip Pans
8. Hydrogen Gas Vents
9. Fuel Oil Piping
10. Natural Gas Blowdown/Vent
11. CO₂ Vent Purge
12. City of Tallahassee Electric Utility Generated Non-hazardous Boiler Chemical Cleaning Wastes

Emissions Related to Steam Generator No. 2

13. Deareator Vents
14. Air Ejectors
15. Oil Vapor Extractors
16. Noncondensable Gas Extractors
17. Seal Oil Vacuum Pumps
18. Lube Oil Tanks (storage)
19. Lube/Fuel Oil Drip Pans
20. Hydrogen Gas Vents
21. Fuel Oil Piping
22. Natural Gas Blowdown Vent
23. CO₂ Purge Vent
24. City of Tallahassee Electric Utility Generated Non-hazardous Boiler Chemical Cleaning Wastes

Appendix I-1, Continued

Emissions Related to Combustion Turbine No. 1

- 25. Diesel Engine (Starter)
- 26. Diesel Tank (#10)
- 27. Oil Vapor Extractor
- 28. Lube Oil Tank
- 29. Natural Gas Blowdown
- 30. Fuel Oil Piping

Emissions Related to Combustion Turbine No. 2

- 31. Diesel Engine (Starter)
- 32. Diesel Tank (#11)
- 33. Oil Vapor Extractor
- 34. Lube Oil Tank
- 35. Natural Gas Blowdown
- 36. Fuel Oil Piping

Fuel Storage

- 37. Day Tank (Diesel Tank #12)
- 38. Diesel Fuel Dispensing Operation
- 39. Diesel Tank (#13)

Fuel Farm

- 40. Diesel Tank #1
- 41. Diesel Tank #2
- 42. Fuel Oil Tank #3
- 43. Fuel Oil Tank #4
- 44. Fuel Oil Piping
- 45. Fuel Oil Transfer Station #1
- 46. Fuel Oil Transfer Station #2
- 47. Diesel Oil Transfer Station
- 48. Diesel Oil Tank Associated With the Hydrant Main

Fuel Dispensing Operations

- 49. Truck Loading/Unloading Station #1
- 50. Truck Loading/Unloading Station #2
- 51. Gasoline Tank
- 52. Gasoline Pump
- 53. Diesel Oil Tank
- 54. Diesel Pump

Organic Liquid Storage

- 55. Kerosene Tank #7
- 56. Lube Oil Tank #8
- 57. Lube Oil Tank #9

Appendix I-1, Continued

Fugitive VOC Emissions

58. (1-15) Parts Washers - Non-halogenated Solvents

Space Heaters

59. (1-12) Space Heaters
60. (2) Fresh Water Cooling Towers
61. Central Vacuum System

Maintenance Activities

62. Welding Exempt per Rule 62-210.300(3)(a)16, F.A.C.
63. High Temperature Metal Cutting

Plant Operations

64. Lube Oil Storage Tanks
65. Propane Storage Tanks
66. Sulfuric Acid Tank Vent
67. Sodium Hydroxide Tank Vents
68. Demineralizer Degasifier
69. G/C Natural Gas Vent
70. Natural Gas Blowdown

Fugitive PM₁₀ Emissions

71. Paved Roads
72. Unpaved Roads
73. Heavy Construction Activities
74. Aggregate Handling & Storage

Laboratory

75. Laboratory Equipment
76. Chemical Usage
77. Vacuum Pumps
78. Laboratory Fume Hoods

Appendix U-1, List of Unregulated Emissions Units and/or Activities

City of Tallahassee, Electric Utilities
Arvah B. Hopkins Generating Station

Draft/Proposed Permit No. 0730003-011-AV
Facility ID No. 0730003

Unregulated Emissions Units and/or Activities. An emissions unit which emits no “emissions-limited pollutant” and which is subject to no unit-specific work practice standard, though it may be subject to regulations applied on a facility-wide basis (e.g., unconfined emissions, odor, general opacity) or to regulations that require only that it be able to prove exemption from unit-specific emissions or work practice standards.

The below listed emissions units and/or activities are neither “regulated emissions units” nor “exempt emissions units”.

E.U. ID

No. Brief Description of Emissions Units and/or Activity

- 005 Fugitive VOC Sources - Painting Operations
- 006 General Purpose Internal Combustion Engines
- 007 Emergency Generators
- 034 750KW Emergency Diesel Generator

- 005 Fugitive VOC Emissions. Fugitive VOC emissions are generated from the painting operations associated with normal plant maintenance. SCC: 4-90-999-98, Miscellaneous Volatile Organic Compound Evaporation.

- 006 General Purpose Internal Combustion Engines.
Located for use at this source is (1) Welding Generator. SCC: 2-03-003-01.
Diesel Driven Fire Pump (Associated With the Hydrant Main). SCC: 2-03-001-01.
Portable Diesel Pump. SCC: 2-03-001-01.

- 007 Emergency Generators.
Located for use at this source is (1) Stationary Emergency Generator. SCC: 2-03-001-01.
(3) Portable Emergency Generators. SCC: 2-03-003-01.

- 034 750 KW Emergency Diesel Generator.
Located for use at this source in conjunction with units -031 and -032 is (1) 750 KW Stationary Emergency Diesel Generator. SCC: 2-01-001-02.

Appendix H-1, Permit History/ID Number Changes

City of Tallahassee
Arvah B. Hopkins Generating Station

Draft/Proposed Permit No. 0730003-011-AV
Facility ID No. 0730003

Permit History (for tracking purposes):

E.U. ID No	Description	Permit No.	Issue / Effective Date	Expiration Date	Extended Date ^{1,2}	Revised Date(s)
-001	Boiler Hopkins #1	AO37-242825	03/08/94	03/01/99		
-002	Combustion Turbine Hopkins #1	AO37-242824	03/08/94	12/31/98		06/10/94, 06/24/94
-003	Combustion Turbine Hopkins #2	AO37-242824	03/08/94	12/31/98		06/10/94, 06/24/94
-004	Unit #2 Boiler	PA74-03D	05/20/75			05/18/94, 10/27/86
All	Initial Title V Permit	0730003-001-AV	01/01/98	12/31/02		
All	Admin Correction To Update Appendix TV-1 to TV-2	0730003-002-AV	01/02/98	12/31/02		
All	Title V Permit Renewal	0730003-003-AV	01/01/03	12/31/07		
-002	Establish excess VE for minor load change	0730003-006-AC	12/7/04	5/31/05		
-002	Title V revision to incorporate 0730003-006-AC	0730003-007-AV	3/15/05	12/31/07		
-031 & - 032	Title V revision to incorporate 0730003-005-AC	0730003-008-AV	4/17/07	12/31/07		

Referenced Attachments

Phase II Acid Rain Application/Compliance Plan

Appendix A-1, Abbreviations, Definitions, Citations, and Identification Numbers

Appendix GG, Standards of Performance for Stationary Gas Turbines

Appendix SS-1, Stack Sampling Facilities (version dated 10/7/96)

Appendix TV-6, Title V Conditions (version dated 6/23/06)

ASP Number 97-B-01 **(With Scrivener's Order Dated July 9, 1997)**

Figure 1: Summary Report-Gaseous and Opacity Excess Emission and Monitoring System Performance (40 CFR 60, July, 1996)

Table 297.310-1 Calibration Schedule

Table 1-1, Summary of Air Pollutant Standards and Terms

Table 2-1, Compliance Requirements

Title V Air Operation Permit Renewal

Draft/Proposed Permit No. 0730003-011-AV

Table of Contents

Section	Page Number
Title V Air Operation Permit Placard Page.	1
I. Facility Information.	2
A. Facility Description.	
B. Summary of Emissions Unit ID Numbers and Brief Descriptions.	
C. Relevant Documents.	
D. Miscellaneous.	
II. Facility-wide Conditions.	4
III. Emissions Units and Conditions.	
A. Boiler Number 1 (Phase II Acid Rain Unit).	8
B. Boiler Number 2 (Phase II Acid Rain Unit).	21
C. Combustion Turbines Number 1 and Number 2.	34
D. Combustion Turbines Number 3 and Number 4.	39
IV. Acid Rain Part.	
A. Acid Rain, Phase II.	54
Appendix I-1, List of Insignificant Emissions Units and/or Activities.	56
Appendix U-1, List of Unregulated Emissions Units and/or Activities.	59
Appendix H-1, Permit History/ID Number Changes.	60
Referenced Attachments.	61

Phase II Acid Rain Permit Application/Compliance Plan

Acid Rain Part Application

For more information, see instructions and refer to 40 CFR 72.30 and 72.31 and Chapter 62-214, F.A.C.

This submission is: ☐ New ☐ Revised ☒ Renewal

STEP 1

Identify the source by plant name, State, and ORIS code

Plant Name	A.B. Hopkins Generating Station	State	Florida	ORIS Code	688
------------	---------------------------------	-------	---------	-----------	-----

STEP 2

Enter the unit ID# for every Acid Rain unit at the Acid Rain source in column "a." For new units, enter the requested information in columns "c" and "d."

a	b	c	d
Unit ID#	Unit will hold allowances in accordance with 40 CFR 72.9(c)(1)	New Units Commence Operation Date	New Units Monitor Certification Deadline
Boiler No. 1 – EU001	Yes		
Boiler No. 2 – EU004	Yes		
Combustion Turbine HC3 – EU031	Yes		
Combustion Turbine HC4 – EU032	Yes		
	Yes		
	Yes		
	Yes		
	Yes		
	Yes		
	Yes		
	Yes		
	Yes		
	Yes		

A.B. Hopkins Generating Station
Plant Name (from Step 1)

STEP 3
Read the standard
requirements

Acid Rain Part Requirements

- (1) The designated representative of each Acid Rain source and each Acid Rain unit at the source shall:
 - (i) Submit a complete Acid Rain part application (including a compliance plan) under 40 CFR part 72 and Rules 62-214.320 and 330, F.A.C., in accordance with the deadlines specified in Rule 62-214.320, F.A.C.; and
 - (ii) Submit in a timely manner any supplemental information that the Department determines is necessary in order to review an Acid Rain part application and issue or deny an Acid Rain part;
- (2) The owners and operators of each Acid Rain source and each Acid Rain unit at the source shall:
 - (i) Operate the unit in compliance with a complete Acid Rain part application or a superseding Acid Rain part issued by the Department; and
 - (ii) Have an Acid Rain Part.

Monitoring Requirements

- (1) The owners and operators and, to the extent applicable, designated representative of each Acid Rain source and each Acid Rain unit at the source shall comply with the monitoring requirements as provided in 40 CFR part 75, and Rule 62-214.420, F.A.C.
- (2) The emissions measurements recorded and reported in accordance with 40 CFR part 75 shall be used to determine compliance by the unit with the Acid Rain emissions limitations and emissions reduction requirements for sulfur dioxide and nitrogen oxides under the Acid Rain Program.
- (3) The requirements of 40 CFR part 75 shall not affect the responsibility of the owners and operators to monitor emissions of other pollutants or other emissions characteristics at the unit under other applicable requirements of the Act and other provisions of the operating permit for the source.

Sulfur Dioxide Requirements

- (1) The owners and operators of each source and each Acid Rain unit at the source shall:
 - (i) Hold allowances, as of the allowance transfer deadline, in the unit's compliance subaccount (after deductions under 40 CFR 73.34(c)), or in the compliance subaccount of another Acid Rain unit at the same source to the extent provided in 40 CFR 73.35(b)(3), not less than the total annual emissions of sulfur dioxide for the previous calendar year from the unit; and
 - (ii) Comply with the applicable Acid Rain emissions limitations for sulfur dioxide.
- (2) Each ton of sulfur dioxide emitted in excess of the Acid Rain emissions limitations for sulfur dioxide shall constitute a separate violation of the Act.
- (3) An Acid Rain unit shall be subject to the requirements under paragraph (1) of the sulfur dioxide requirements as follows:
 - (i) Starting January 1, 2000, an Acid Rain unit under 40 CFR 72.6(a)(2); or
 - (ii) Starting on the later of January 1, 2000 or the deadline for monitor certification under 40 CFR part 75, an Acid Rain unit under 40 CFR 72.6(a)(3).
- (4) Allowances shall be held in, deducted from, or transferred among Allowance Tracking System accounts in accordance with the Acid Rain Program.
- (5) An allowance shall not be deducted in order to comply with the requirements under paragraph (1) of the sulfur dioxide requirements prior to the calendar year for which the allowance was allocated.
- (6) An allowance allocated by the Administrator under the Acid Rain Program is a limited authorization to emit sulfur dioxide in accordance with the Acid Rain Program. No provision of the Acid Rain Program, the Acid Rain part application, the Acid Rain part, or an exemption under 40 CFR 72.7 or 72.8 and no provision of law shall be construed to limit the authority of the United States to terminate or limit such authorization.
- (7) An allowance allocated by the Administrator under the Acid Rain Program does not constitute a property right.

Nitrogen Oxides Requirements The owners and operators of the source and each Acid Rain unit at the source shall comply with the applicable Acid Rain emissions limitation for nitrogen oxides.

Excess Emissions Requirements

- (1) The designated representative of an Acid Rain unit that has excess emissions in any calendar year shall submit a proposed offset plan, as required under 40 CFR part 77.
- (2) The owners and operators of an Acid Rain unit that has excess emissions in any calendar year shall:
 - (i) Pay without demand the penalty required, and pay upon demand the interest on that penalty, as required by 40 CFR part 77; and
 - (ii) Comply with the terms of an approved offset plan, as required by 40 CFR part 77.

Recordkeeping and Reporting Requirements

- (1) Unless otherwise provided, the owners and operators of the source and each Acid Rain unit at the source shall keep on site at the source each of the following documents for a period of 5 years from the date the document is created. This period may be extended for cause, at any time prior to the end of 5 years, in writing by the EPA or the Department:
 - (i) The certificate of representation for the designated representative for the source and each Acid Rain unit at the source and all documents that demonstrate the truth of the statements in the certificate of representation, in accordance with Rule 62-214.350, F.A.C.; provided that the certificate and documents shall be retained on site at the source beyond such 5-year period until such documents are superseded because of the submission of a new certificate of representation changing the designated representative;
 - (ii) All emissions monitoring information, in accordance with 40 CFR part 75, provided that to the extent that 40 CFR part 75 provides for a 3-year period for recordkeeping, the 3-year period shall apply;
 - (iii) Copies of all reports, compliance certifications, and other submissions and all records made or required under the Acid Rain Program; and

A.B. Hopkins Generating Station
Plant Name (from Step 1)

STEP 3,
Cont'd.

Recordkeeping and Reporting Requirements (cont)

(iv) Copies of all documents used to complete an Acid Rain part application and any other submission under the Acid Rain Program or to demonstrate compliance with the requirements of the Acid Rain Program.

(2) The designated representative of an Acid Rain source and each Acid Rain unit at the source shall submit the reports and compliance certifications required under the Acid Rain Program, including those under 40 CFR part 72 subpart I and 40 CFR part 75.

Liability.

(1) Any person who knowingly violates any requirement or prohibition of the Acid Rain Program, a complete Acid Rain part application, an Acid Rain part, or an exemption under 40 CFR 72.7 or 72.8, including any requirement for the payment of any penalty owed to the United States, shall be subject to enforcement pursuant to section 113(c) of the Act.

(2) Any person who knowingly makes a false, material statement in any record, submission, or report under the Acid Rain Program shall be subject to criminal enforcement pursuant to section 113(c) of the Act and 18 U.S.C. 1001.

(3) No permit revision shall excuse any violation of the requirements of the Acid Rain Program that occurs prior to the date that the revision takes effect.

(4) Each Acid Rain source and each Acid Rain unit shall meet the requirements of the Acid Rain Program.

(5) Any provision of the Acid Rain Program that applies to an Acid Rain source (including a provision applicable to the designated representative of an Acid Rain source) shall also apply to the owners and operators of such source and of the Acid Rain units at the source.

(6) Any provision of the Acid Rain Program that applies to an Acid Rain unit (including a provision applicable to the designated representative of an Acid Rain unit) shall also apply to the owners and operators of such unit. Except as provided under 40 CFR 72.44 (Phase II repowering extension plans) and 40 CFR 76.11 (NO_x averaging plans), and except with regard to the requirements applicable to units with a common stack under 40 CFR part 75 (including 40 CFR 75.16, 75.17, and 75.18), the owners and operators and the designated representative of one Acid Rain unit shall not be liable for any violation by any other Acid Rain unit of which they are not owners or operators or the designated representative and that is located at a source of which they are not owners or operators or the designated representative.

(7) Each violation of a provision of 40 CFR parts 72, 73, 75, 76, 77, and 78 by an Acid Rain source or Acid Rain unit, or by an owner or operator or designated representative of such source or unit, shall be a separate violation of the Act.

Effect on Other Authorities.

No provision of the Acid Rain Program, an Acid Rain part application, an Acid Rain part, or an exemption under 40 CFR 72.7 or 72.8 shall be construed as:

(1) Except as expressly provided in title IV of the Act, exempting or excluding the owners and operators and, to the extent applicable, the designated representative of an Acid Rain source or Acid Rain unit from compliance with any other provision of the Act, including the provisions of title I of the Act relating to applicable National Ambient Air Quality Standards or State Implementation Plans;

(2) Limiting the number of allowances a unit can hold; *provided*, that the number of allowances held by the unit shall not affect the source's obligation to comply with any other provisions of the Act;

(3) Requiring a change of any kind in any State law regulating electric utility rates and charges, affecting any State law regarding such State regulation, or limiting such State regulation, including any prudence review requirements under such State law;

(4) Modifying the Federal Power Act or affecting the authority of the Federal Energy Regulatory Commission under the Federal Power Act; or,


(5) Interfering with or impairing any program for competitive bidding for power supply in a State in which such program is established.

STEP 4

Certification

Read the
certification
statement, sign,
and date

I am authorized to make this submission on behalf of the owners and operators of the Acid Rain source or Acid Rain units for which the submission is made. I certify under penalty of law that I have personally examined, and am familiar with, the statements and information submitted in this document and all its attachments. Based on my inquiry of those individuals with primary responsibility for obtaining the information, I certify that the statements and information are to the best of my knowledge and belief true, accurate, and complete. I am aware that there are significant penalties for submitting false statements and information or omitting required statements and information, including the possibility of fine or imprisonment.

Name Robert E. McGarrah, Manager of Power Production, City of Tallahassee	
Signature 	Date 6/4/07

Appendix A-1,
Abbreviations, Definitions, Citations, and Identification Numbers
(Version Dated 2/5/97)

Appendix A-1, Abbreviations, Acronyms, Citations, and Identification Numbers (version dated 02/05/97)

Abbreviations and Acronyms:

°F: Degrees Fahrenheit
BACT: Best Available Control Technology
CFR: Code of Federal Regulations
DEP: State of Florida, Department of Environmental Protection
DARM: Division of Air Resource Management
EPA: United States Environmental Protection Agency
F.A.C.: Florida Administrative Code
F.S.: Florida Statute
ISO: International Standards Organization
LAT: Latitude
LONG: Longitude
MMBtu: million British thermal units
MW: Megawatt
ORIS: Office of Regulatory Information Systems
SOA: Specific Operating Agreement
UTM: Universal Transverse Mercator

Citations:

The following examples illustrate the methods used in this permit to abbreviate and cite the references of rules, regulations, guidance memorandums, permit numbers, and ID numbers.

Code of Federal Regulations:

Example: [40 CFR 60.334]

Where:	40	reference to	Title 40
	CFR	reference to	Code of Federal Regulations
	60	reference to	Part 60
	60.334	reference to	Regulation 60.334

Florida Administrative Code (F.A.C.) Rules:

Example: [Rule 62-213, F.A.C.]

Where:	62	reference to	Title 62
	62-213	reference to	Chapter 62-213
	62-213.205	reference to	Rule 62-213.205, F.A.C.

ISO: International Standards Organization refers to those conditions at 288 degrees K, 60 percent relative humidity, and 101.3 kilopascals pressure.

Appendix A-1, Abbreviations, Acronyms, Citations, and Identification Numbers (version dated 02/05/97) (continued)

Identification Numbers:

Facility Identification (ID) Number:

Example: Facility ID No.: 1050221

Where:

105 = 3-digit number code identifying the facility is located in Polk County
0221 = 4-digit number assigned by state database.

Permit Numbers:

Example: 1050221-002-AV, or
1050221-001-AC

Where:

AC = Air Construction Permit
AV = Air Operation Permit (Title V Source)
105 = 3-digit number code identifying the facility is located in Polk County
0221 = 4-digit number assigned by permit tracking database
001 or 002 = 3-digit sequential project number assigned by permit tracking database

Example: PSD-FL-185
PA95-01
AC53-208321

Where:

PSD = Prevention of Significant Deterioration Permit
PA = Power Plant Siting Act Permit
AC = old Air Construction Permit numbering

Appendix GG-1,
Standards of Performance for Stationary Gas Turbines

Appendix GG-Standards of Performance for Stationary Gas Turbines

§ 60.330 Applicability and designation of affected facility.

(a) The provisions of this subpart are applicable to the following affected facilities: All stationary gas turbines with a heat input at peak load equal to or greater than 10.7 gigajoules (10 million Btu) per hour, based on the lower heating value of the fuel fired.

(b) Any facility under paragraph (a) of this section which commences construction, modification, or reconstruction after October 3, 1977, is subject to the requirements of this part except as provided in paragraphs (e) and (j) of § 60.332.

§ 60.331 Definitions.

As used in this subpart, all terms not defined herein shall have the meaning given them in the Act and in subpart A of this part.

(a) *Stationary gas turbine* means any simple cycle gas turbine, regenerative cycle gas turbine or any gas turbine portion of a combined cycle steam/electric generating system that is not self propelled. It may, however, be mounted on a vehicle for portability.

(b) *Simple cycle gas turbine* means any stationary gas turbine which does not recover heat from the gas turbine exhaust gases to preheat the inlet combustion air to the gas turbine, or which does not recover heat from the gas turbine exhaust gases to heat water or generate steam.

(c) *Regenerative cycle gas turbine* means any stationary gas turbine which recovers heat from the gas turbine exhaust gases to preheat the inlet combustion air to the gas turbine.

(d) *Combined cycle gas turbine* means any stationary gas turbine which recovers heat from the gas turbine exhaust gases to heat water or generate steam.

(e) *Emergency gas turbine* means any stationary gas turbine which operates as a mechanical or electrical power source only when the primary power source for a facility has been rendered inoperable by an emergency situation.

(f) *Ice fog* means an atmospheric suspension of highly reflective ice crystals.

(g) *ISO standard day conditions* means 288 degrees Kelvin, 60 percent relative humidity and 101.3 kilopascals pressure.

(h) *Efficiency* means the gas turbine manufacturer's rated heat rate at peak load in terms of heat input per unit of power output based on the lower heating value of the fuel.

(i) *Peak load* means 100 percent of the manufacturer's design capacity of the gas turbine at ISO standard day conditions.

(j) *Base load* means the load level at which a gas turbine is normally operated.

(k) *Fire-fighting turbine* means any stationary gas turbine that is used solely to pump water for extinguishing fires.

(l) *Turbines employed in oil/gas production or oil/gas transportation* means any stationary gas turbine used to provide power to extract crude oil/natural gas from the earth or to move crude oil/natural gas, or products refined from these substances through pipelines.

(m) A *Metropolitan Statistical Area* or *MSA* as defined by the Department of Commerce.

(n) *Offshore platform gas turbines* means any stationary gas turbine located on a platform in an ocean.

(o) *Garrison facility* means any permanent military installation.

(p) *Gas turbine model* means a group of gas turbines having the same nominal air flow, combustor inlet pressure, combustor inlet temperature, firing temperature, turbine inlet temperature and turbine inlet pressure.

(q) *Electric utility stationary gas turbine* means any stationary gas turbine constructed for the purpose of supplying more than one-third of its potential electric output capacity to any utility power distribution system for sale.

(r) *Emergency fuel* is a fuel fired by a gas turbine only during circumstances, such as natural gas supply curtailment or breakdown of delivery system, that make it impossible to fire natural gas in the gas turbine.

(s) *Unit operating hour* means a clock hour during which any fuel is combusted in the affected unit. If the unit combusts fuel for the entire clock hour, it is considered to be a full unit operating hour. If the unit combusts fuel for only part of the clock hour, it is considered to be a partial unit operating hour.

(t) *Excess emissions* means a specified averaging period over which either:

- (1) The NO_x emissions are higher than the applicable emission limit in Sec. 60.332;
- (2) The total sulfur content of the fuel being combusted in the affected facility exceeds the limit specified in Sec. 60.333; or
- (3) The recorded value of a particular monitored parameter is outside the acceptable range specified in the parameter monitoring plan for the affected unit.

(u) *Natural gas* means a naturally occurring fluid mixture of hydrocarbons (e.g., methane, ethane, or propane) produced in geological formations beneath the Earth's surface that maintains a gaseous state at standard atmospheric temperature and pressure under ordinary conditions. Natural gas contains 20.0 grains or less of total sulfur per 100 standard cubic feet. Equivalents of this in other units are as follows: 0.068 weight percent total sulfur, 680 parts per million by weight (ppmw) total sulfur, and 338 parts per million by volume (ppmv) at 20 degrees Celsius total sulfur. Additionally, natural gas must either be composed of at least 70 percent methane by volume or have a gross calorific value between 950 and 1100 British thermal units (Btu) per standard cubic foot. Natural gas does not include the following gaseous fuels: landfill gas, digester gas, refinery gas, sour gas, blast furnace gas, coal-derived gas, producer gas, coke oven gas, or any gaseous fuel produced in a process which might result in highly variable sulfur content or heating value.

(v) Duct burner means a device that combusts fuel and that is placed in the exhaust duct from another source, such as a stationary gas turbine, internal combustion engine, kiln, etc., to allow the firing of additional fuel to heat the exhaust gases before the exhaust gases enter a heat recovery steam generating unit.

(w) Lean premix stationary combustion turbine means any stationary combustion turbine where the air and fuel are thoroughly mixed to form a lean mixture for combustion in the combustor. Mixing may occur before or in the combustion chamber. A unit which is capable of operating in both lean premix and diffusion flame modes is considered a lean premix stationary combustion turbine when it is in the lean premix mode, and it is considered a diffusion flame stationary combustion turbine when it is in the diffusion flame mode.

(x) Diffusion flame stationary combustion turbine means any stationary combustion turbine where fuel and air are injected at the combustor and are mixed only by diffusion prior to ignition. A unit which is capable of operating in both lean premix and diffusion flame modes is considered a lean premix stationary combustion turbine when it is in the lean premix mode, and it is considered a diffusion flame stationary combustion turbine when it is in the diffusion flame mode.

(y) Unit operating day means a 24-hour period between 12:00 midnight and the following midnight during which any fuel is combusted at any time in the unit. It is not necessary for fuel to be combusted continuously for the entire 24-hour period.

§ 60.332 Standard for nitrogen oxides.

(a) On and after the date on which the performance test required by § 60.8 is completed, every owner or operator subject to the provisions of this subpart as specified in paragraphs (b), (c), and (d) of this section shall comply with one of the following, except as provided in paragraphs (e), (f), (g), (h), (i), (j), (k), and (l) of this section.

(1) No owner or operator subject to the provisions of this subpart shall cause to be discharged into the atmosphere from any stationary gas turbine, any gases which contain nitrogen oxides in excess of:

$$STD = 0.0075 \frac{(14.4)}{Y} + F$$

where:

STD = allowable ISO corrected (if required as given in Sec. 60.335(b)(1)) NO_x emission concentration (percent by volume at 15 percent oxygen and on a dry basis),

Y = manufacturer's rated heat rate at manufacturer's rated load (kilojoules per watt hour) or, actual measured heat rate based on lower heating value of fuel as measured at actual peak load for the facility. The value of Y shall not exceed 14.4 kilojoules per watt hour, and

F = NO_x emission allowance for fuel-bound nitrogen as defined in paragraph (a)(4) of this section.

(2) No owner or operator subject to the provisions of this subpart shall cause to be discharged into the atmosphere from any stationary gas turbine, any gases which contain nitrogen oxides in excess of:

$$STD = 0.0150 \frac{(14.4)}{Y} + F$$

where:

STD = allowable ISO corrected (if required as given in Sec. 60.335(b)(1)) NO_x emission concentration (percent by volume at 15 percent oxygen and on a dry basis),

Y = manufacturer's rated heat rate at manufacturer's rated peak load (kilojoules per watt hour), or actual measured heat rate based on lower heating value of fuel as measured at actual peak load for the facility. The value of Y shall not exceed 14.4 kilojoules per watt hour, and

F = NO_x emission allowance for fuel-bound nitrogen as defined in paragraph (a)(4) of this section.

(3) The use of F in paragraphs (a)(1) and (2) of this section is optional. That is, the owner or operator may choose to apply a NO_x allowance for fuel-bound nitrogen and determine the appropriate F-value in accordance with paragraph (a)(4) of this section or may accept an F-value of zero.

(4) If the owner or operator elects to apply a NO_x emission allowance for fuel-bound nitrogen, F shall be defined according to the nitrogen content of the fuel during the most recent performance test required under Sec. 60.8 as follows:

Fuel-bound nitrogen (% by weight)	F (NO _x % by volume)
N≤0.015.....	0
0.015<N≤0.1.....	0.04(N)
0.1<N≤0.25.....	0.004+0.0067(N-0.1)
N>0.25.....	0.005

Where:

N = the nitrogen content of the fuel (percent by weight).or:

Manufacturers may develop and submit to EPA custom fuel-bound nitrogen allowances for each gas turbine model they manufacture. These fuel-bound nitrogen allowances shall be substantiated with data and must be approved for use by the Administrator before the initial performance test required by Sec. 60.8. Notices of approval of custom fuel-bound nitrogen allowances will be published in the Federal Register.

(b) Electric utility stationary gas turbines with a heat input at peak load greater than 107.2 gigajoules per hour (100 million Btu/hour) based on the lower heating value of the fuel fired shall comply with the provisions of paragraph (a)(1) of this section.

(c) Stationary gas turbines with a heat input at peak load equal to or greater than 10.7 gigajoules per hour (10 million Btu/hour) but less than or equal to 107.2 gigajoules per hour (100 million Btu/hour) based on the lower heating value of the fuel fired, shall comply with the provisions of paragraph (a)(2) of this section.

(d) Stationary gas turbines with a manufacturer's rated base load at ISO conditions of 30 megawatts or less except as provided in § 60.332(b) shall comply with paragraph (a)(2) of this section.

(e) Stationary gas turbines with a heat input at peak load equal to or greater than 10.7 gigajoules per hour (10 million Btu/hour) but less than or equal to 107.2 gigajoules per hour (100 million Btu/hour) based on the lower heating value of the fuel fired and that have commenced construction prior to October 3, 1982 are exempt from paragraph (a) of this section.

(f) Stationary gas turbines using water or steam injection for control of NO_x emissions are exempt from paragraph (a) when ice fog is deemed a traffic hazard by the owner or operator of the gas turbine.

(g) Emergency gas turbines, military gas turbines for use in other than a garrison facility, military gas turbines installed for use as military training facilities, and fire fighting gas turbines are exempt from paragraph (a) of this section.

(h) Stationary gas turbines engaged by manufacturers in research and development of equipment for both gas turbine emission control techniques and gas turbine efficiency improvements are exempt from paragraph (a) on a case-by-case basis as determined by the Administrator.

(i) Exemptions from the requirements of paragraph (a) of this section will be granted on a case-by-case basis as determined by the Administrator in specific geographical areas where mandatory water restrictions are required by governmental agencies because of drought conditions. These exemptions will be allowed only while the mandatory water restrictions are in effect.

(j) Stationary gas turbines with a heat input at peak load greater than 107.2 gigajoules per hour that commenced construction, modification, or reconstruction between the dates of October 3, 1977, and January 27, 1982, and were required in the September 10, 1979, Federal Register (44 FR 52792) to comply with paragraph (a)(1) of this section, except electric utility stationary gas turbines, are exempt from paragraph (a) of this section.

(k) Stationary gas turbines with a heat input greater than or equal to 10.7 gigajoules per hour (10 million Btu/hour) when fired with natural gas are exempt from paragraph (a)(2) of this section when being fired with an emergency fuel.

(l) Regenerative cycle gas turbines with a heat input less than or equal to 107.2 gigajoules per hour (100 million Btu/hour) are exempt from paragraph (a) of this section.

§ 60.333 Standard for sulfur dioxide.

On and after the date on which the performance test required to be conducted by § 60.8 is completed, every owner or operator subject to the provision of this subpart shall comply with one or the other of the following conditions:

(a) No owner or operator subject to the provisions of this subpart shall cause to be discharged into the atmosphere from any stationary gas turbine any gases which contain sulfur dioxide in excess of 0.015 percent by volume at 15 percent oxygen and on a dry basis.

(b) No owner or operator subject to the provisions of this subpart shall burn in any stationary gas turbine any fuel which contains total sulfur in excess of 0.8 percent by weight (8000 ppmw).

§ 60.334 Monitoring of operations.

(a) Except as provided in paragraph (b) of this section, the owner or operator of any stationary gas turbine subject to the provisions of this subpart and using water or steam injection to control NO_x emissions shall install, calibrate, maintain and operate a continuous monitoring system to monitor and record the fuel consumption and the ratio of water or steam to fuel being fired in the turbine.

(b) The owner or operator of any stationary gas turbine that commenced construction, reconstruction or modification after October 3, 1977, but before July 8, 2004, and which uses water or steam injection to control NO_x emissions may, as an alternative to operating the continuous monitoring system described in paragraph (a) of this section, install, certify, maintain, operate, and quality-assure a continuous emission monitoring system (CEMS) consisting of NO_x and O₂ monitors. As an alternative, a CO₂ monitor may be used to adjust the measured NO_x concentrations to 15 percent O₂ by either converting the CO₂ hourly averages to equivalent O₂ concentrations using Equation F-14a or F-14b in appendix F to part 75 of this chapter and making the adjustments to 15 percent O₂, or by using the CO₂ readings directly to make the adjustments, as described in Method 20. If the option to use a CEMS is chosen, the CEMS shall be installed, certified, maintained and operated as follows:

(1) Each CEMS must be installed and certified according to PS 2 and 3 (for diluent) of 40 CFR part 60, appendix B, except the 7-day calibration drift is based on unit operating days, not calendar days. Appendix F, Procedure 1 is not required. The relative accuracy test audit (RATA) of the NO_x and diluent monitors may be performed individually or on a combined basis, i.e., the relative accuracy tests of the CEMS may be performed either:

- (i) On a ppm basis (for NO_x) and a percent O₂ basis for oxygen; or
- (ii) On a ppm at 15 percent O₂ basis; or
- (iii) On a ppm basis (for NO_x) and a percent CO₂ basis (for a CO₂ monitor

that uses the procedures in Method 20 to correct the NO_x data to 15 percent O₂).

(2) As specified in Sec. 60.13(e)(2), during each full unit operating hour, each monitor must complete a minimum of one cycle of operation (sampling, analyzing, and data recording) for each 15-minute quadrant of the hour, to validate the hour. For partial unit operating hours, at least one valid data point must be obtained for each quadrant of the hour in which the unit operates. For unit operating hours in which required quality assurance and maintenance activities are performed on the CEMS, a minimum of two valid data points (one in each of two quadrants) are required to validate the hour.

(3) For purposes of identifying excess emissions, CEMS data must be reduced to hourly averages as specified in Sec. 60.13(h).

(i) For each unit operating hour in which a valid hourly average, as described in paragraph (b)(2) of this section, is obtained for both NO_x and diluent, the data acquisition and handling system must calculate and record the hourly NO_x emissions in the units of the applicable NO_x emission standard under Sec. 60.332(a), i.e., percent NO_x by volume, dry basis, corrected to 15 percent O₂ and International Organization for Standardization (ISO) standard conditions (if required as given in Sec. 60.335(b)(1)). For any hour in which the hourly average O₂ concentration exceeds 19.0 percent O₂, a diluent cap value of 19.0 percent O₂ may be used in the emission calculations.

(ii) A worst case ISO correction factor may be calculated and applied using historical ambient data. For the purpose of this calculation, substitute the maximum humidity of ambient air (H_o), minimum ambient temperature (T_a), and minimum combustor inlet absolute pressure (P_o) into the ISO correction equation.

(iii) If the owner or operator has installed a NO_x CEMS to meet the requirements of part 75 of this chapter, and is continuing to meet the ongoing requirements of part 75 of this chapter, the CEMS may be used to meet the requirements of this section, except that the missing data substitution methodology provided for at 40 CFR part 75, subpart D, is not required for purposes of identifying excess emissions. Instead, periods of missing CEMS data are to be reported as monitor downtime in the excess emissions and monitoring performance report required in Sec. 60.7(c).

(c) For any turbine that commenced construction, reconstruction or modification after October 3, 1977, but before July 8, 2004, and which does not use steam or water injection to control NO_x emissions, the owner or operator may, for purposes of determining excess emissions, use a CEMS that meets the requirements of paragraph (b) of this section. Also, if the owner or operator has previously submitted and received EPA or local permitting authority approval of a petition for an alternative procedure of continuously monitoring compliance with the applicable NO_x emission limit under Sec. 60.332, that approved procedure may continue to be used, even if it deviates from paragraph (a) of this section.

(d) The owner or operator of any new turbine constructed after July 8, 2004, and which uses water or steam injection to control NO_x emissions may elect to use either the requirements in paragraph (a) of this section for continuous water or steam to fuel ratio monitoring or may use a NO_x CEMS installed, certified, operated, maintained, and quality-assured as described in paragraph (b) of this section.

(e) The owner or operator of any new turbine that commences construction after July 8, 2004, and which does not use water or steam injection to control NO_x emissions may elect to use a NO_x CEMS installed, certified, operated, maintained, and quality-assured as described in paragraph (b) of this section. An acceptable alternative to installing a CEMS is described in paragraph (f) of this section.

(f) The owner or operator of a new turbine who elects not to install a CEMS under paragraph (e) of this section, may instead perform continuous parameter monitoring as follows:

(1) For a diffusion flame turbine without add-on selective catalytic reduction controls (SCR), the owner or operator shall define at least four parameters indicative of the unit's NO_x formation characteristics and shall monitor these parameters continuously.

(2) For any lean premix stationary combustion turbine, the owner or operator shall continuously monitor the appropriate parameters to determine whether the unit is operating in the lean premixed (low- NO_x) combustion mode.

(3) For any turbine that uses SCR to reduce NO_x emissions, the owner or operator shall continuously monitor appropriate parameters to verify the proper operation of the emission controls.

(4) For affected units that are also regulated under part 75 of this chapter, if the owner or operator elects to monitor NO_x emission rate using the methodology in appendix E to part 75 of this chapter, or the low mass emissions methodology in Sec. 75.19 of this chapter, the requirements of this paragraph (f) may be met by performing the parametric monitoring described in section 2.3 of appendix E or in Sec. 75.19(c)(1)(iv)(H) of this chapter.

(g) The steam or water to fuel ratio or other parameters that are continuously monitored as described in paragraphs (a), (d) or (f) of this section shall be monitored during the performance test required under Sec. 60.8, to establish acceptable values and ranges. The owner or operator may supplement the performance test data with engineering analyses, design specifications, manufacturer's recommendations and other relevant information to define the acceptable parametric ranges more precisely. The owner or operator shall develop and keep on-site a parameter monitoring plan which explains the procedures used to document proper operation of the NO_x emission controls. The plan shall include the parameter(s) monitored and the acceptable range(s) of the parameter(s) as well as the basis for designating the parameter(s) and acceptable range(s). Any supplemental data such as engineering analyses, design specifications, manufacturer's recommendations and other relevant information shall be included in the monitoring plan. For affected units that are also subject to part 75 of this chapter and that use the low mass emissions methodology in Sec. 75.19 of this chapter or the NO_x emission measurement methodology in appendix E to part 75, the owner or operator may meet the requirements of this paragraph by developing and keeping on-site (or at a central location for unmanned facilities) a quality-assurance plan, as described in Sec. 75.19 (e)(5) or in section 2.3 of appendix E and section 1.3.6 of appendix B to part 75 of this chapter.

(h) The owner or operator of any stationary gas turbine subject to the provisions of this subpart:

(1) Shall monitor the total sulfur content of the fuel being fired in the turbine, except as provided in paragraph (h)(3) of this section. The sulfur content of the fuel must be determined using total sulfur methods described in Sec. 60.335(b)(10). Alternatively, if the total sulfur content of the gaseous fuel during the most recent performance test was less than 0.4 weight percent (4000 ppmw), ASTM D4084-82, 94, D5504-01, D6228-98, or Gas Processors Association Standard 2377-86 (all of which are incorporated by reference-see Sec. 60.17), which measure the major sulfur compounds may be used; and

(2) Shall monitor the nitrogen content of the fuel combusted in the turbine, if the owner or operator claims an allowance for fuel bound nitrogen (i.e., if an F-value greater than zero is being or will be used by the owner or operator to calculate STD in Sec. 60.332). The nitrogen content of the fuel shall be determined using methods described in Sec. 60.335(b)(9) or an approved alternative.

(3) Notwithstanding the provisions of paragraph (h)(1) of this section, the owner or operator may elect not to monitor the total sulfur content of the gaseous fuel combusted in the turbine, if the gaseous fuel is demonstrated to meet the definition of natural gas in Sec. 60.331(u), regardless of whether an existing custom schedule approved by the administrator for subpart GG requires such monitoring. The owner or operator shall use one of the following sources of information to make the required demonstration:

(i) The gas quality characteristics in a current, valid purchase contract, tariff sheet or transportation contract for the gaseous fuel, specifying that the maximum total sulfur content of the fuel is 20.0 grains/100 scf or less; or

(ii) Representative fuel sampling data which show that the sulfur content of the gaseous fuel does not exceed 20 grains/100 scf. At a minimum, the amount of fuel sampling data specified in section 2.3.1.4 or 2.3.2.4 of appendix D to part 75 of this chapter is required.

(4) For any turbine that commenced construction, reconstruction or modification after October 3, 1977, but before July 8, 2004, and for which a custom fuel monitoring schedule has previously been approved, the owner or operator may, without submitting a special petition to the Administrator, continue monitoring on this schedule.

(i) The frequency of determining the sulfur and nitrogen content of the fuel shall be as follows:

(1) Fuel oil. For fuel oil, use one of the total sulfur sampling options and the associated sampling frequency described in sections 2.2.3, 2.2.4.1, 2.2.4.2, and 2.2.4.3 of appendix D to part 75 of this chapter (i.e., flow proportional sampling, daily sampling, sampling from the unit's storage tank after each addition of fuel to the tank, or sampling each delivery prior to combining it with fuel oil already in the intended storage tank). If an emission allowance is being claimed for fuel-bound nitrogen, the nitrogen content of the oil shall be determined and recorded once per unit operating day.

(2) Gaseous fuel. Any applicable nitrogen content value of the gaseous fuel shall be determined and recorded once per unit operating day. For owners and operators that elect not to demonstrate sulfur content using options in paragraph (h)(3) of this section, and for which the fuel is supplied without intermediate bulk storage, the sulfur content value of the gaseous fuel shall be determined and recorded once per unit operating day.

(3) Custom schedules. Notwithstanding the requirements of paragraph (i)(2) of this section, operators or fuel vendors may develop custom schedules for determination of the total sulfur content of gaseous fuels, based on the design and operation of the affected facility and the characteristics of the fuel supply. Except as provided in paragraphs (i)(3)(i) and (i)(3)(ii) of this section, custom schedules shall be substantiated with data and shall be approved by the Administrator before they can be used to comply with the standard in Sec. 60.333.

(i) The two custom sulfur monitoring schedules set forth in paragraphs (i)(3)(i)(A) through (D) and in paragraph (i)(3)(ii) of this section are acceptable, without prior Administrative approval:

(A) The owner or operator shall obtain daily total sulfur content measurements for 30 consecutive unit operating days, using the applicable methods specified in this subpart. Based on the results of the 30 daily samples, the required frequency for subsequent monitoring of the fuel's total sulfur content shall be as specified in paragraph (i)(3)(i)(B), (C), or (D) of this section, as applicable.

(B) If none of the 30 daily measurements of the fuel's total sulfur content exceeds 0.4 weight percent (4000 ppmw), subsequent sulfur content monitoring may be performed at 12 month intervals. If any of the samples taken at 12-month intervals has a total sulfur content between 0.4 and 0.8 weight percent (4000 and 8000 ppmw), follow the procedures in paragraph (i)(3)(i)(C) of this section. If any measurement exceeds 0.8 weight percent (8000 ppmw), follow the procedures in paragraph (i)(3)(i)(D) of this section.

(C) If at least one of the 30 daily measurements of the fuel's total sulfur content is between 0.4 and 0.8 weight percent (4000 and 8000 ppmw), but none exceeds 0.8 weight percent (8000 ppmw), then:

(1) Collect and analyze a sample every 30 days for three months. If any sulfur content measurement exceeds 0.8 weight percent (8000 ppmw), follow the procedures in paragraph (i)(3)(i)(D) of this section. Otherwise, follow the procedures in paragraph (i)(3)(i)(C)(2) of this section.

(2) Begin monitoring at 6-month intervals for 12 months. If any sulfur content measurement exceeds 0.8 weight percent (8000 ppmw), follow the procedures in paragraph (i)(3)(i)(D) of this section. Otherwise, follow the procedures in paragraph (i)(3)(i)(C)(3) of this section.

(3) Begin monitoring at 12-month intervals. If any sulfur content measurement exceeds 0.8 weight percent (8000 ppmw), follow the procedures in paragraph (i)(3)(i)(D) of this section. Otherwise, continue to monitor at this frequency.

(D) If a sulfur content measurement exceeds 0.8 weight percent (8000 ppmw), immediately begin daily monitoring according to paragraph (i)(3)(i)(A) of this section. Daily monitoring shall continue until 30 consecutive daily samples, each having a sulfur

content no greater than 0.8 weight percent (8000 ppmw), are obtained. At that point, the applicable procedures of paragraph (i)(3)(i)(B) or (C) of this section shall be followed.

(ii) The owner or operator may use the data collected from the 720-hour sulfur sampling demonstration described in section 2.3.6 of appendix D to part 75 of this chapter to determine a custom sulfur sampling schedule, as follows:

(A) If the maximum fuel sulfur content obtained from the 720 hourly samples does not exceed 20 grains/100 scf (i.e., the maximum total sulfur content of natural gas as defined in Sec. 60.331(u)), no additional monitoring of the sulfur content of the gas is required, for the purposes of this subpart.

(B) If the maximum fuel sulfur content obtained from any of the 720 hourly samples exceeds 20 grains/100 scf, but none of the sulfur content values (when converted to weight percent sulfur) exceeds 0.4 weight percent (4000 ppmw), then the minimum required sampling frequency shall be one sample at 12 month intervals.

(C) If any sample result exceeds 0.4 weight percent sulfur (4000 ppmw), but none exceeds 0.8 weight percent sulfur (8000 ppmw), follow the provisions of paragraph (i)(3)(i)(C) of this section.

(D) If the sulfur content of any of the 720 hourly samples exceeds 0.8 weight percent (8000 ppmw), follow the provisions of paragraph (i)(3)(i)(D) of this section.

(j) For each affected unit required to continuously monitor parameters or emissions, or to periodically determine the fuel sulfur content or fuel nitrogen content under this subpart, the owner or operator shall submit reports of excess emissions and monitor downtime, in accordance with Sec. 60.7(c). Excess emissions shall be reported for all periods of unit operation, including startup, shutdown and malfunction. For the purpose of reports required under Sec. 60.7(c), periods of excess emissions and monitor downtime that shall be reported are defined as follows:

(1) Nitrogen oxides.

(i) For turbines using water or steam to fuel ratio monitoring:

(A) An excess emission shall be any unit operating hour for which the average steam or water to fuel ratio, as measured by the continuous monitoring system, falls below the acceptable steam or water to fuel ratio needed to demonstrate compliance with Sec. 60.332, as established during the performance test required in Sec. 60.8. Any unit operating hour in which no water or steam is injected into the turbine shall also be considered an excess emission.

(B) A period of monitor downtime shall be any unit operating hour in which water or steam is injected into the turbine, but the essential parametric data needed to determine the steam or water to fuel ratio are unavailable or invalid.

(C) Each report shall include the average steam or water to fuel ratio, average fuel consumption, ambient conditions (temperature, pressure, and humidity), gas turbine load, and (if applicable) the nitrogen content of the fuel during each excess emission. You do not have to report ambient conditions if you opt to use the worst case ISO correction factor as specified in Sec. 60.334(b)(3)(ii), or if you are not using the ISO correction equation under the provisions of Sec. 60.335(b)(1).

(ii) If the owner or operator elects to take an emission allowance for fuel bound nitrogen, then excess emissions and periods of monitor downtime are as described in paragraphs (j)(1)(ii)(A) and (B) of this section.

(A) An excess emission shall be the period of time during which the fuel-bound nitrogen (N) is greater than the value measured during the performance test required in Sec. 60.8 and used to determine the allowance. The excess emission begins on the date and hour of the sample which shows that N is greater than the performance test value, and

ends with the date and hour of a subsequent sample which shows a fuel nitrogen content less than or equal to the performance test value.

(B) A period of monitor downtime begins when a required sample is not taken by its due date. A period of monitor downtime also begins on the date and hour that a required sample is taken, if invalid results are obtained. The period of monitor downtime ends on the date and hour of the next valid sample.

(iii) For turbines using NO_x and diluent CEMS:

(A) An hour of excess emissions shall be any unit operating hour in which the 4-hour rolling average NO_x concentration exceeds the applicable emission limit in Sec. 60.332(a)(1) or (2). For the purposes of this subpart, a "4-hour rolling average NO_x concentration" is the arithmetic average of the average NO_x concentration measured by the CEMS for a given hour (corrected to 15 percent O₂ and, if required under Sec. 60.335(b)(1), to ISO standard conditions) and the three unit operating hour average NO_x concentrations immediately preceding that unit operating hour.

(B) A period of monitor downtime shall be any unit operating hour in which sufficient data are not obtained to validate the hour, for either NO_x concentration or diluent (or both).

(C) Each report shall include the ambient conditions (temperature, pressure, and humidity) at the time of the excess emission period and (if the owner or operator has claimed an emission allowance for fuel bound nitrogen) the nitrogen content of the fuel during the period of excess emissions. You do not have to report ambient conditions if you opt to use the worst case ISO correction factor as specified in Sec. 60.334(b)(3)(ii), or if you are not using the ISO correction equation under the provisions of Sec. 60.335(b)(1).

(iv) For turbines required under paragraph (f) of this section to monitor combustion parameters or parameters that document proper operation of the NO_x emission controls:

(A) An excess emission shall be a 4-hour rolling unit operating hour average in which any monitored parameter does not achieve the target value or is outside the acceptable range defined in the parameter monitoring plan for the unit.

(B) A period of monitor downtime shall be a unit operating hour in which any of the required parametric data are either not recorded or are invalid.

(2) Sulfur dioxide. If the owner or operator is required to monitor the sulfur content of the fuel under paragraph (h) of this section:

(i) For samples of gaseous fuel and for oil samples obtained using daily sampling, flow proportional sampling, or sampling from the unit's storage tank, an excess emission occurs each unit operating hour included in the period beginning on the date and hour of any sample for which the sulfur content of the fuel being fired in the gas turbine exceeds 0.8 weight percent and ending on the date and hour that a subsequent sample is taken that demonstrates compliance with the sulfur limit.

(ii) If the option to sample each delivery of fuel oil has been selected, the owner or operator shall immediately switch to one of the other oil sampling options (i.e., daily sampling, flow proportional sampling, or sampling from the unit's storage tank) if the sulfur content of a delivery exceeds 0.8 weight percent. The owner or operator shall continue to use one of the other sampling options until all of the oil from the delivery has been combusted, and shall evaluate excess emissions according to paragraph (j)(2)(i) of this section. When all of the fuel from the delivery has been burned, the owner or operator may resume using the as-delivered sampling option.

(iii) A period of monitor downtime begins when a required sample is not taken by its due date. A period of monitor downtime also begins on the date and hour of a

required sample, if invalid results are obtained. The period of monitor downtime shall include only unit operating hours, and ends on the date and hour of the next valid sample.

(3) *Ice fog*. Each period during which an exemption provided in § 60.332(f) is in effect shall be reported in writing to the Administrator quarterly. For each period the ambient conditions existing during the period, the date and time the air pollution control system was deactivated, and the date and time the air pollution control system was reactivated shall be reported. All quarterly reports shall be postmarked by the 30th day following the end of each calendar quarter.

(4) *Emergency fuel*. Each period during which an exemption provided in § 60.332(k) is in effect shall be included in the report required in § 60.7(c). For each period, the type, reasons, and duration of the firing of the emergency fuel shall be reported.

(5) All reports required under Sec. 60.7(c) shall be postmarked by the 30th day following the end of each calendar quarter.

Sec. 60.335 Test methods and procedures.

(a) The owner or operator shall conduct the performance tests required in Sec. 60.8, using either

- (1) EPA Method 20,
- (2) ASTM D6522-00 (incorporated by reference, see Sec. 60.17), or
- (3) EPA Method 7E and either EPA Method 3 or 3A in appendix A to this part, to

determine NO_x and diluent concentration.

(4) Sampling traverse points are to be selected following Method 20 or Method 1, (non-particulate procedures) and sampled for equal time intervals. The sampling shall be performed with a traversing single-hole probe or, if feasible, with a stationary multi-hole probe that samples each of the points sequentially. Alternatively, a multi-hole probe designed and documented to sample equal volumes from each hole may be used to sample simultaneously at the required points.

(5) Notwithstanding paragraph (a)(4) of this section, the owner or operator may test at few points than are specified in Method 1 or Method 20 if the following conditions are met:

- (i) You may perform a stratification test for NO_x and diluent pursuant to

(A) [Reserved]

(B) The procedures specified in section 6.5.6.1(a) through (e) appendix A to part 75 of this chapter.

(ii) Once the stratification sampling is completed, the owner or operator may use the following alternative sample point selection criteria for the performance test:

(A) If each of the individual traverse point NO_x concentrations, normalized to 15 percent O₂, is within 10 percent of the mean normalized concentration for all traverse points, then you may use 3 points (located either 16.7, 50.0, and 83.3 percent of the way across the stack or duct, or, for circular stacks or ducts greater than 2.4 meters (7.8 feet) in diameter, at 0.4, 1.2, and 2.0 meters from the wall). The 3 points shall be located along the measurement line that exhibited the highest average normalized NO_x concentration during the stratification test; or

(B) If each of the individual traverse point NO_x concentrations, normalized to 15 percent O₂, is within 5 percent of the mean normalized concentration for all traverse points, then you may sample at a single point, located at least 1 meter from the stack wall or at the stack centroid.

(6) Other acceptable alternative reference methods and procedures are given in paragraph (c) of this section.

(b) The owner or operator shall determine compliance with the applicable nitrogen oxides emission limitation in Sec. 60.332 and shall meet the performance test requirements of Sec. 60.8 as follows:

(1) For each run of the performance test, the mean nitrogen oxides emission concentration (NO_{x0}) corrected to 15 percent O_2 shall be corrected to ISO standard conditions using the following equation. Notwithstanding this requirement, use of the ISO correction equation is optional for: Lean premix stationary combustion turbines; units used in association with heat recovery steam generators (HRSG) equipped with duct burners; and units equipped with add-on emission control devices:

$$\text{NO}_x = (\text{NO}_{x0})(P_r/P_o)^{0.5} e^{19(H_o - 0.00633)} (288[\text{deg}]\text{K}/T_a)^{1.53}$$

Where:

NO_x = emission concentration of NO_x at 15 percent O_2 and ISO standard ambient conditions, ppm by volume, dry basis,

NO_{x0} = mean observed NO_x concentration, ppm by volume, dry basis, at 15 percent O_2 ,

P_r = reference combustor inlet absolute pressure at 101.3 kilopascals ambient pressure, mm Hg,

P_o = observed combustor inlet absolute pressure at test, mm Hg,

H_o = observed humidity of ambient air, g H_2O /g air,

e = transcendental constant, 2.718, and

T_a = ambient temperature, [deg]K.

(2) The 3-run performance test required by Sec. 60.8 must be performed within 5 percent at 30, 50, 75, and 90-to-100 percent of peak load or at four evenly-spaced load points in the normal operating range of the gas turbine, including the minimum point in the operating range and 90-to-100 percent of peak load, or at the highest achievable load point if 90-to-100 percent of peak load cannot be physically achieved in practice. If the turbine combusts both oil and gas as primary or backup fuels, separate performance testing is required for each fuel. Notwithstanding these requirements, performance testing is not required for any emergency fuel (as defined in Sec. 60.331).

(3) For a combined cycle turbine system with supplemental heat (duct burner), the owner or operator may elect to measure the turbine NO_x emissions after the duct burner rather than directly after the turbine. If the owner or operator elects to use this alternative sampling location, the applicable NO_x emission limit in Sec. 60.332 for the combustion turbine must still be met.

(4) If water or steam injection is used to control NO_x with no additional post-combustion NO_x control and the owner or operator chooses to monitor the steam or water to fuel ratio in accordance with Sec. 60.334(a), then that monitoring system must be operated concurrently with each EPA Method 20, ASTM D6522-00 (incorporated by reference, see Sec. 60.17), or EPA Method 7E run and shall be used to determine the fuel consumption and the steam or water to fuel ratio necessary to comply with the applicable Sec. 60.332 NO_x emission limit.

(5) If the owner operator elects to claim an emission allowance for fuel bound nitrogen as described in Sec. 60.332, then concurrently with each reference method run, a representative sample of the fuel used shall be collected and analyzed, following the applicable procedures described in Sec. 60.335(b)(9). These data shall be used to determine the maximum fuel nitrogen content for which the established water (or steam) to fuel ratio will be valid.

(6) If the owner or operator elects to install a CEMS, the performance evaluation of the CEMS may either be conducted separately (as described in paragraph (b)(7) of this section) or as part of the initial performance test of the affected unit.

(7) If the owner or operator elects to install and certify a NO_x CEMS under Sec. 60.334(e), then the initial performance test required under Sec. 60.8 may be done in the following alternative manner:

(i) Perform a minimum of 9 reference method runs, with a minimum time per run of 21 minutes, at a single load level, between 90 and 100 percent of peak (or the highest physically achievable) load.

(ii) Use the test data both to demonstrate compliance with the applicable NO_x emission limit under Sec. 60.332 and to provide the required reference method data for the RATA of the CEMS described under Sec. 60.334(b).

(iii) The requirement to test at three additional load levels is waived.

(8) If the owner or operator is required under Sec. 60.334(f) to monitor combustion parameters or parameters indicative of proper operation of NO_x emission controls, the appropriate parameters shall be continuously monitored and recorded during each run of the initial performance test, to establish acceptable operating ranges, for purposes of the parameter monitoring plan for the affected unit, as specified in Sec. 60.334(g).

(9) To determine the fuel bound nitrogen content of fuel being fired (if an emission allowance is claimed for fuel bound nitrogen), the owner or operator may use equipment and procedures meeting the requirements of:

(i) For liquid fuels, ASTM D2597-94 (Reapproved 1999), D6366-99, D4629-02, D5762-02 (all of which are incorporated by reference, see Sec. 60.17); or

(ii) For gaseous fuels, shall use analytical methods and procedures that are accurate to within 5 percent of the instrument range and are approved by the Administrator.

(10) If the owner or operator is required under Sec. 60.334(i)(1) or (3) to periodically determine the sulfur content of the fuel combusted in the turbine, a minimum of three fuel samples shall be collected during the performance test. Analyze the samples for the total sulfur content of the fuel using:

(i) For liquid fuels, ASTM D129-00, D2622-98, D4294-02, D1266-98, D5453-00 or D1552-01 (all of which are incorporated by reference, see Sec. 60.17); or

(ii) For gaseous fuels, ASTM D1072-80, 90 (Reapproved 1994); D3246-81, 92, 96; D4468-85 (Reapproved 2000); or D6667-01 (all of which are incorporated by reference, see Sec. 60.17). The applicable ranges of some ASTM methods mentioned above are not adequate to measure the levels of sulfur in some fuel gases. Dilution of samples before analysis (with verification of the dilution ratio) may be used, subject to the prior approval of the Administrator.

(11) The fuel analyses required under paragraphs (b)(9) and (b)(10) of this section may be performed by the owner or operator, a service contractor retained by the owner or operator, the fuel vendor, or any other qualified agency.

(c) The owner or operator may use the following as alternatives to the reference methods and procedures specified in this section:

(1) Instead of using the equation in paragraph (b)(1) of this section, manufacturers may develop ambient condition correction factors to adjust the nitrogen oxides emission level measured by the performance test as provided in Sec. 60.8 to ISO standard day conditions.

Appendix SS-1,
Stack Sampling Facilities (version dated 10/7/96)

APPENDIX SS-1, STACK SAMPLING FACILITIES (version dated 10/07/96)

Stack Sampling Facilities Provided by the Owner of an Emissions Unit. This section describes the minimum requirements for stack sampling facilities that are necessary to sample point emissions units. Sampling facilities include sampling ports, work platforms, access to work platforms, electrical power, and sampling equipment support. Emissions units must provide these facilities at their expense. All stack sampling facilities must meet any Occupational Safety and Health Administration (OSHA) Safety and Health Standards described in 29 CFR Part 1910, Subparts D and E.

(a) Permanent Test Facilities. The owner or operator of an emissions unit for which a compliance test, other than a visible emissions test, is required on at least an annual basis, shall install and maintain permanent stack sampling facilities.

(b) Temporary Test Facilities. The owner or operator of an emissions unit that is not required to conduct a compliance test on at least an annual basis may use permanent or temporary stack sampling facilities. If the owner chooses to use temporary sampling facilities on an emissions unit, and the Department elects to test the unit, such temporary facilities shall be installed on the emissions unit within 5 days of a request by the Department and remain on the emissions unit until the test is completed.

(c) Sampling Ports.

1. All sampling ports shall have a minimum inside diameter of 3 inches.
2. The ports shall be capable of being sealed when not in use.
3. The sampling ports shall be located in the stack at least 2 stack diameters or equivalent diameters downstream and at least 0.5 stack diameter or equivalent diameter upstream from any fan, bend, constriction or other flow disturbance.
4. For emissions units for which a complete application to construct has been filed prior to December 1, 1980, at least two sampling ports, 90 degrees apart, shall be installed at each sampling location on all circular stacks that have an outside diameter of 15 feet or less. For stacks with a larger diameter, four sampling ports, each 90 degrees apart, shall be installed. For emissions units for which a complete application to construct is filed on or after December 1, 1980, at least two sampling ports, 90 degrees apart, shall be installed at each sampling location on all circular stacks that have an outside diameter of 10 feet or less. For stacks with larger diameters, four sampling ports, each 90 degrees apart, shall be installed. On horizontal circular ducts, the ports shall be located so that the probe can enter the stack vertically, horizontally or at a 45 degree angle.

5. On rectangular ducts, the cross sectional area shall be divided into the number of equal areas in accordance with EPA Method 1. Sampling ports shall be provided which allow access to each sampling point. The ports shall be located so that the probe can be inserted perpendicular to the gas flow.

(d) Work Platforms.

1. Minimum size of the working platform shall be 24 square feet in area. Platforms shall be at least 3 feet wide.

2. On circular stacks with 2 sampling ports, the platform shall extend at least 110 degrees around the stack.

3. On circular stacks with more than two sampling ports, the work platform shall extend 360 degrees around the stack.

4. All platforms shall be equipped with an adequate safety rail (ropes are not acceptable), toeboard, and hinged floor-opening cover if ladder access is used to reach the platform. The safety rail directly in line with the sampling ports shall be removable so that no obstruction exists in an area 14 inches below each sample port and 6 inches on either side of the sampling port.

(e) Access to Work Platform.

APPENDIX SS-1, STACK SAMPLING FACILITIES (version dated 10/07/96)
(continued)

1. Ladders to the work platform exceeding 15 feet in length shall have safety cages or fall arresters with a minimum of 3 compatible safety belts available for use by sampling personnel.

2. Walkways over free-fall areas shall be equipped with safety rails and toeboards.

(f) Electrical Power.

1. A minimum of two 120-volt AC, 20-amp outlets shall be provided at the sampling platform within 20 feet of each sampling port.

2. If extension cords are used to provide the electrical power, they shall be kept on the plant's property and be available immediately upon request by sampling personnel.

(g) Sampling Equipment Support.

1. A three-quarter inch eyebolt and an angle bracket shall be attached directly above each port on vertical stacks and above each row of sampling ports on the sides of horizontal ducts.

a. The bracket shall be a standard 3 inch x 3 inch x one-quarter inch equal-legs bracket which is 1 and one-half inches wide. A hole that is one-half inch in diameter shall be drilled through the exact center of the horizontal portion of the bracket. The horizontal portion of the bracket shall be located 14 inches above the centerline of the sampling port.

b. A three-eighth inch bolt which protrudes 2 inches from the stack may be substituted for the required bracket. The bolt shall be located 15 and one-half inches above the centerline of the sampling port.

c. The three-quarter inch eyebolt shall be capable of supporting a 500 pound working load. For stacks that are less than 12 feet in diameter, the eyebolt shall be located 48 inches above the horizontal portion of the angle bracket. For stacks that are greater than or equal to 12 feet in diameter, the eyebolt shall be located 60 inches above the horizontal portion of the angle bracket. If the eyebolt is more than 120 inches above the platform, a length of chain shall be attached to it to bring the free end of the chain to within safe reach from the platform.

2. A complete monorail or dualrail arrangement may be substituted for the eyebolt and bracket.

3. When the sample ports are located in the top of a horizontal duct, a frame shall be provided above the port to allow the sample probe to be secured during the test.

[Rule 62-297.310(6), F.A.C.]

Appendix TV-6,
Title V Conditions (version dated 6/23/06)

APPENDIX TV-6, TITLE V CONDITIONS (version dated 06/23/06)

[Note: This attachment includes "canned conditions" developed from the "Title V Core List."]

{Permitting note: APPENDIX TV-6, TITLE V CONDITIONS, is distributed to the permittee only. Other persons requesting copies of these conditions shall be provided one copy when requested or otherwise appropriate.}

Chapter 62-4, F.A.C.

1. **Not federally enforceable. General Prohibition.** Any stationary installation which will reasonably be expected to be a source of pollution shall not be operated, maintained, constructed, expanded, or modified without the appropriate and valid permits issued by the Department, unless the source is exempted by Department rule. The Department may issue a permit only after it receives reasonable assurance that the installation will not cause pollution in violation of any of the provisions of Chapter 403, F.S., or the rules promulgated thereunder. A permitted installation may only be operated, maintained, constructed, expanded or modified in a manner that is consistent with the terms of the permit.

[Rule 62-4.030, Florida Administrative Code (F.A.C.); and, Section 403.087, Florida Statute (F.S.)]

2. **Not federally enforceable. Procedures to Obtain Permits and Other Authorizations; Applications.**

- (1) Any person desiring to obtain a permit from the Department shall apply on forms prescribed by the Department and shall submit such additional information as the Department by law may require.
- (2) All applications and supporting documents shall be filed in quadruplicate with the Department.
- (3) To ensure protection of public health, safety, and welfare, any construction, modification, or operation of an installation which may be a source of pollution, shall be in accordance with sound professional engineering practices pursuant to Chapter 471, F.S. All applications for a Department permit shall be certified by a professional engineer registered in the State of Florida except, when the application is for renewal of an air pollution operation permit at a non-Title V source as defined in Rule 62-210.200, F.A.C., or where professional engineering is not required by Chapter 471, F.S. Where required by Chapter 471 or 492, F.S., applicable portions of permit applications and supporting documents which are submitted to the Department for public record shall be signed and sealed by the professional(s) who prepared or approved them.
- (4) Processing fees for air construction permits shall be in accordance with Rule 62-4.050(4), F.A.C.
- (5)(a) To be considered by the Department, each application must be accompanied by the proper processing fee. The fee shall be paid by check, payable to the Department of Environmental Protection. The fee is non-refundable except as provided in Section 120.60, F.S., and in this section.
 - (b) When an application is received without the required fee, the Department shall acknowledge receipt of the application and shall immediately notify the applicant by certified mail that the required fee was not received and advise the applicant of the correct fee. The Department shall take no further action until the correct fee is received. If a fee was received by the Department which is less than the amount required, the Department shall return the fee along with the written notification.
 - (c) Upon receipt of the proper application fee, the permit processing time requirements of Sections 120.60(2) and 403.0876, F.S., shall begin.
 - (d) If the applicant does not submit the required fee within ten days of receipt of written notification, the Department shall either return the unprocessed application or arrange with the applicant for the pick up of the application.
 - (e) If an applicant submits an application fee in excess of the required fee, the permit processing time requirements of Sections 120.60(2) and 403.0876, F.S., shall begin upon receipt, and the Department shall refund to the applicant the amount received in excess of the required fee.
- (6) Any substantial modification to a complete application shall require an additional processing fee determined pursuant to the schedule set forth in Rule 62-4.050, F.A.C., and shall restart the time requirements of Sections 120.60 and 403.0876, F.S. For purposes of this subsection, the term "substantial modification" shall mean a modification which is reasonably expected to lead to substantially different environmental impacts which require a detailed review.
- (7) Modifications to existing permits proposed by the permittee which require substantial changes in the existing permit or require substantial evaluation by the Department of potential impacts of the proposed modifications shall require the same fee as a new application for the same time duration except for modification under Chapter 62-45, F.A.C.

[Rule 62-4.050, F.A.C.]

3. Standards for Issuing or Denying Permits. Except as provided at Rule 62-213.460, F.A.C., the issuance of a permit does not relieve any person from complying with the requirements of Chapter 403, F.S., or Department rules.
[Rule 62-4.070(7), F.A.C.]

4. Modification of Permit Conditions.

(1) For good cause and after notice and an administrative hearing, if requested, the Department may require the permittee to conform to new or additional conditions. The Department shall allow the permittee a reasonable time to conform to the new or additional conditions and on application of the permittee the Department may grant additional time. For the purpose of this section, good cause shall include, but not be limited to, any of the following: **(also, see Condition No. 38.)**

- (a) A showing that an improvement in effluent or emission quality or quantity can be accomplished because of technological advances without unreasonable hardship.
- (b) A showing that a higher degree of treatment is necessary to effect the intent and purpose of Chapter 403, F.S.
- (c) A showing of any change in the environment or surrounding conditions that requires a modification to conform to applicable air or water quality standards.
- (e) Adoption or revision of Florida Statutes, rules, or standards which require the modification of a permit condition for compliance.

(2) A permittee may request a modification of a permit by applying to the Department.

(3) A permittee may request that a permit be extended as a modification of the permit. Such a request must be submitted to the Department in writing before the expiration of the permit. Upon timely submittal of a request for extension, unless the permit automatically expires by statute or rule, the permit will remain in effect until final agency action is taken on the request. For construction permits, an extension shall be granted if the applicant can demonstrate reasonable assurances that, upon completion, the extended permit will comply with the standards and conditions required by applicable regulation. For all other permits, an extension shall be granted if the applicant can demonstrate reasonable assurances that the extended permit will comply with the standards and conditions applicable to the original permit. A permit for which the permit application fee was prorated in accordance with Rule 62-4.050(4)(v), F.A.C., shall not be extended. In no event shall a permit be extended or remain in effect longer than the time limits established by statute or rule.

[Rule 62-4.080, F.A.C.]

5. Renewals. Prior to 180 days before the expiration of a permit issued pursuant to Chapter 62-213, F.A.C., the permittee shall apply for a renewal of a permit using forms incorporated by reference in the specific rule chapter for that kind of permit. A renewal application shall be timely and sufficient. If the application is submitted prior to 180 days before expiration of the permit, it will be considered timely and sufficient. If the renewal application is submitted at a later date, it will not be considered timely and sufficient unless it is submitted and made complete prior to the expiration of the operation permit. When the application for renewal is timely and sufficient, the existing permit shall remain in effect until the renewal application has been finally acted upon by the Department or, if there is court review of the Department's final agency action, until a later date is required by Section 120.60, F.S., provided that, for renewal of a permit issued pursuant to Chapter 62-213, F.A.C., the applicant complies with the requirements of Rules 62-213.420(1)(b)3. and 4., F.A.C.

[Rule 62-4.090, F.A.C.]

6. Suspension and Revocation.

(1) Permits shall be effective until suspended, revoked, surrendered, or expired and shall be subject to the provisions of Chapter 403, F.S., and rules of the Department.

(2) Failure to comply with pollution control laws and rules shall be grounds for suspension or revocation.

(3) A permit issued pursuant to Chapter 62-4, F.A.C., shall not become a vested property right in the permittee. The Department may revoke any permit issued by it if it finds that the permit holder or his agent:

- (a) Submitted false or inaccurate information in his application or operational reports.
- (b) Has violated law, Department orders, rules or permit conditions.
- (c) Has failed to submit operational reports or other information required by Department rules.
- (d) Has refused lawful inspection under Section 403.091, F.S.

(4) No revocation shall become effective except after notice is served by personal services, certified mail, or newspaper notice pursuant to Section 120.60(7), F.S., upon the person or persons named therein and a hearing held if requested within the time specified in the notice. The notice shall specify the provision of the law, or rule alleged to be violated, or the permit condition or Department order alleged to be violated, and the facts alleged to constitute a violation thereof.

[Rule 62-4.100, F.A.C.]

7. **Not federally enforceable.** Financial Responsibility. The Department may require an applicant to submit proof of financial responsibility and may require the applicant to post an appropriate bond to guarantee compliance with the law and Department rules. [Rule 62-4.110, F.A.C.]

8. Transfer of Permits.

(1) Within 30 days after the sale or legal transfer of a permitted facility, an "Application for Transfer of Permit" (DEP Form 62-1.201(1)) must be submitted to the Department. This form must be completed with the notarized signatures of both the permittee and the proposed new permittee. For air permits, an "Application for Transfer of Air Permit" (DEP Form 62-210.900(7)) shall be submitted.

(2) The Department shall approve the transfer of a permit unless it determines that the proposed new permittee cannot provide reasonable assurances that conditions of the permit will be met. The determination shall be limited solely to the ability of the new permittee to comply with the conditions of the existing permit, and it shall not concern the adequacy of these permit conditions. If the Department proposes to deny the transfer, it shall provide both the permittee and the proposed new permittee a written objection to such transfer together with notice of a right to request a Chapter 120, F.S., proceeding on such determination.

(3) Within 30 days of receiving a properly completed Application for Transfer of Permit form, the Department shall issue a final determination. The Department may toll the time for making a determination on the transfer by notifying both the permittee and the proposed new permittee that additional information is required to adequately review the transfer request. Such notification shall be served within 30 days of receipt of an Application for Transfer of Permit form, completed pursuant to Rule 62-4.120(1), F.A.C. If the Department fails to take action to approve or deny the transfer within 30 days of receipt of the completed Application for Transfer of Permit form, or within 30 days of receipt of the last item of timely requested additional information, the transfer shall be deemed approved.

(4) The permittee is encouraged to apply for a permit transfer prior to the sale or legal transfer of a permitted facility. However, the transfer shall not be effective prior to the sale or legal transfer.

(5) Until this transfer is approved by the Department, the permittee and any other person constructing, operating, or maintaining the permitted facility shall be liable for compliance with the terms of the permit. The permittee transferring the permit shall remain liable for corrective actions that may be required as a result of any violations occurring prior to the sale or legal transfer of the facility.

[Rule 62-4.120, F.A.C.]

9. Plant Operation-Problems. If the permittee is temporarily unable to comply with any of the conditions of the permit due to breakdown of equipment or destruction by hazard of fire, wind or by other cause, the permittee shall immediately notify the Department. Notification shall include pertinent information as to the cause of the problem, and what steps are being taken to correct the problem and to prevent its recurrence, and where applicable, the owner's intent toward reconstruction of destroyed facilities. Such notification does not release the permittee from any liability for failure to comply with Department rules. (also, see Condition No. 10.)

[Rule 62-4.130, F.A.C.]

10. For purposes of notification to the Department pursuant to Condition No. 9., Condition No. 12.(8), and Rule 62-4.130, F.A.C., Plant Operation-Problems, "immediately" shall mean the same day, if during a workday (i.e., 8:00 a.m. - 5:00 p.m.), or the first business day after the incident, excluding weekends and holidays; and, for purposes of 40 CFR 70.6(a)(3)(iii)(B), "prompt" shall have the same meaning as "immediately". [also, see Conditions Nos. 9. and 12.(8).]

[40 CFR 70.6(a)(3)(iii)(B)]

11. **Not federally enforceable.** Review. Failure to request a hearing within 14 days of receipt of notice of proposed or final agency action on a permit application or as otherwise required in Chapter 62-103, F.A.C., shall be deemed a waiver of the right to an administrative hearing.

[Rule 62-4.150, F.A.C.]

12. Permit Conditions. All permits issued by the Department shall include the following general conditions:

(1) The terms, conditions, requirements, limitations and restrictions set forth in this permit, are "permit conditions" and are binding and enforceable pursuant to Sections 403.141, 403.727, or 403.859 through 403.861, F.S. The permittee is placed on notice that the Department will review this permit periodically and may initiate enforcement action for any violation of these conditions.

(2) This permit is valid only for the specific processes and operations applied for and indicated in the approved drawings or exhibits. Any unauthorized deviation from the approved drawings, exhibits, specifications, or conditions of this permit may constitute grounds for revocation and enforcement action by the Department.

(3) As provided in Subsections 403.987(6) and 403.722(5), F.S., the issuance of this permit does not convey any vested rights or any exclusive privileges. Neither does it authorize any injury to public or private property or any invasion of personal rights, nor any infringement of federal, state, or local laws or regulations. This permit is not a waiver of or approval of any other Department permit that may be required for other aspects of the total project which are not addressed in this permit.

(4) This permit conveys no title to land or water, does not constitute State recognition or acknowledgment of title, and does not constitute authority for the use of submerged lands unless herein provided and the necessary title or leasehold interests have been obtained from the State. Only the Trustees of the Internal Improvement Trust Fund may express State opinion as to title.

(5) This permit does not relieve the permittee from liability for harm or injury to human health or welfare, animal, or plant life, or property caused by the construction or operation of this permitted source, or from penalties therefore; nor does it allow the permittee to cause pollution in contravention of F.S. and Department rules, unless specifically authorized by an order from the Department.

(6) The permittee shall properly operate and maintain the facility and systems of treatment and control (and related appurtenances) that are installed and used by the permittee to achieve compliance with the conditions of this permit, as required by Department rules. This provision includes the operation of backup or auxiliary facilities or similar systems when necessary to achieve compliance with the conditions of the permit and when required by Department rules.

(7) The permittee, by accepting this permit, specifically agrees to allow authorized Department personnel, upon presentation of credentials or other documents as may be required by law and at reasonable times, access to the premises where the permitted activity is located or conducted to:

- (a) Have access to and copy any records that must be kept under conditions of the permit;
- (b) Inspect the facility, equipment, practices, or operations regulated or required under this permit; and
- (c) Sample or monitor any substances or parameters at any location reasonably necessary to assure compliance with this permit or Department rules. Reasonable time may depend on the nature of the concern being investigated.

(8) If, for any reason, the permittee does not comply with or will be unable to comply with any condition or limitation specified in this permit, the permittee shall immediately provide the Department with the following information: **(also, see Condition No. 10.)**

- (a) A description of and cause of noncompliance; and
- (b) The period of noncompliance, including dates and times; or, if not corrected, the anticipated time the noncompliance is expected to continue, and steps being taken to reduce, eliminate, and prevent recurrence of the noncompliance. The permittee shall be responsible for any and all damages which may result and may be subject to enforcement action by the Department for penalties or for revocation of this permit.

(9) In accepting this permit, the permittee understands and agrees that all records, notes, monitoring data and other information relating to the construction or operation of this permitted source which are submitted to the Department may be used by the Department as evidence in any enforcement case involving the permitted source arising under the Florida Statutes or Department rules, except where such use is prescribed by Sections 403.111 and 403.73, F.S. Such evidence shall only be used to the extent it is consistent with the Florida Rules of Civil Procedure and appropriate evidentiary rules.

(10) The permittee agrees to comply with changes in Department rules and Florida Statutes after a reasonable time for compliance; provided, however, the permittee does not waive any other rights granted by Florida Statutes or Department rules.

(11) This permit is transferable only upon Department approval in accordance with Rule 62-4.120, F.A.C., as applicable. The permittee shall be liable for any non-compliance of the permitted activity until the transfer is approved by the Department.

(12) This permit or a copy thereof shall be kept at the work site of the permitted activity.

(14) The permittee shall comply with the following:

- (a) Upon request, the permittee shall furnish all records and plans required under Department rules. During enforcement actions, the retention period for all records will be extended automatically unless otherwise stipulated by the Department.
- (b) The permittee shall hold at the facility or other location designated by this permit records of all monitoring information (including all calibration and maintenance records and all original strip chart recordings for continuous monitoring instrumentation) required by the permit, copies of all reports required by this permit, and records of all data used to complete the application for this permit. These materials shall be retained at least five (5) years from the date of the sample, measurement, report, or application unless otherwise specified by Department rule.
- (c) Records of monitoring information shall include:
 - 1. The date, exact place, and time of sampling or measurements;
 - 2. The person responsible for performing the sampling or measurements;
 - 3. The dates analyses were performed;
 - 4. The person responsible for performing the analyses;

5. The analytical techniques or methods used;
6. The results of such analyses.

(15) When requested by the Department, the permittee shall within a reasonable time furnish any information required by law which is needed to determine compliance with the permit. If the permittee becomes aware the relevant facts were not submitted or were incorrect in the permit application or in any report to the Department, such facts or information shall be corrected promptly.
[Rules 62-4.160 and 62-213.440(1)(b), F.A.C.]

13. Construction Permits.

(1) No person shall construct any installation or facility which will reasonably be expected to be a source of air ~~or water~~ pollution without first applying for and receiving a construction permit from the Department unless exempted by statute or Department rule. In addition to the requirements of Chapter 62-4, F.A.C., applicants for a Department Construction Permit shall submit the following as applicable:

- (a) A completed application on forms furnished by the Department.
- (b) An engineering report covering:
 1. Plant description and operations,
 2. Types and quantities of all waste material to be generated whether liquid, gaseous or solid,
 3. Proposed waste control facilities,
 4. The treatment objectives,
 5. The design criteria on which the control facilities are based, and
 6. Other information deemed relevant.

Design criteria submitted pursuant to Rule 62-4.210(1)(b)5., F.A.C., shall be based on the results of laboratory and pilot-plant scale studies whenever such studies are warranted. The design efficiencies of the proposed waste treatment facilities and the quantities and types of pollutants in the treated effluents or emissions shall be indicated. Work of this nature shall be subject to the requirements of Chapter 471, F.S. Where confidential records are involved, certain information may be kept confidential pursuant to Section 403.111, F.S.

- (c) The owners' written guarantee to meet the design criteria as accepted by the Department and to abide by Chapter 403, F.S., and the rules of the Department as to the quantities and types of materials to be discharged from the installation. The owner may be required to post an appropriate bond or other equivalent evidence of financial responsibility to guarantee compliance with such conditions in instances where the owner's financial resources are inadequate or proposed control facilities are experimental in nature.

(2) The construction permit may contain conditions and an expiration date as determined by the Secretary or the Secretary's designee.

(3) When the Department issues a permit to construct, the permittee shall be allowed a period of time, specified in the permit, to construct, and to operate and test to determine compliance with Chapter 403, F.S., and the rules of the Department and, where applicable, to apply for and receive an operation permit. The Department may require tests and evaluations of the treatment facilities by the permittee at his/her expense.

[Rule 62-4.210, F.A.C.]

14. **Not federally enforceable.** Operation Permit for New Sources. To properly apply for an operation permit for new sources the applicant shall submit the appropriate fee and certification that construction was completed, noting any deviations from the conditions in the construction permit and test results where appropriate.

[Rule 62-4.220, F.A.C.]

Chapters 28-106 and 62-110, F.A.C.

15. Public Notice, Public Participation, and Proposed Agency Action. The permittee shall comply with all of the requirements for public notice, public participation, and proposed agency action pursuant to Rules 62-110.106 and 62-210.350, F.A.C.
[Rules 62-110.106, 62-210.350 and 62-213.430(1)(b), F.A.C.]

16. Administrative Hearing. The permittee shall comply with all of the requirements for a petition for administrative hearing or waiver of right to administrative proceeding pursuant to Rules 28-106.201, 28-106.301 and 62-110.106, F.A.C.
[Rules 28-106.201, 28-106.301 and 62-110.106, F.A.C.]

Chapter 62-204, F.A.C.

17. Asbestos. This permit does not authorize any demolition or renovation of the facility or its parts or components which involves asbestos removal. This permit does not constitute a waiver of any of the requirements of Chapter 62-257, F.A.C., and 40 CFR 61, Subpart M, National Emission Standard for Asbestos, adopted and incorporated by reference in Rule 62-204.800, F.A.C. Compliance with Chapter 62-257, F.A.C., and 40 CFR 61, Subpart M, Section 61.145, is required for any asbestos demolition or renovation at the source.

[40 CFR 61; Rule 62-204.800, F.A.C.; and, Chapter 62-257, F.A.C.]

Chapter 62-210, F.A.C.

18. Permits Required. Unless exempted from permitting pursuant to Rule 62-210.300(3)(a) or (b), F.A.C., or Rule 62-4.040, F.A.C., or unless specifically authorized by provision of Rule 62-210.300(4), F.A.C., or Rule 62-213.300, F.A.C., the owner or operator of any facility or emissions unit which emits or can reasonably be expected to emit any air pollutant shall obtain an appropriate permit from the Department prior to beginning construction, reconstruction pursuant to 40 CFR 60.15 or 63.2, modification, or the addition of pollution control equipment; or to authorize initial or continued operation of the emissions unit; or to establish a PAL or Air Emissions Bubble. All emissions limitations, controls, and other requirements imposed by such permits shall be at least as stringent as any applicable limitations and requirements contained in or enforceable under the State Implementation Plan (SIP) or that are otherwise federally enforceable. Except as provided at Rule 62-213.460, F.A.C., issuance of a permit does not relieve the owner or operator of a facility or an emissions unit from complying with any applicable requirements, any emission limiting standards or other requirements of the air pollution rules of the Department or any other such requirements under federal, state, or local law.

(1) Air Construction Permits.

(a) Unless exempt from permitting pursuant to Rule 62-210.300(3)(a) or (b), F.A.C., or Rule 62-4.040, F.A.C., an air construction permit shall be obtained by the owner or operator of any proposed new, reconstructed, or modified facility or emissions unit, or any new pollution control equipment prior to the beginning of construction, reconstruction pursuant to 40 CFR 60.15 or 63.2, or modification of the facility or emissions unit or addition of the pollution control equipment; or to establish a PAL; in accordance with all applicable provisions of Chapter 62-210, F.A.C., Chapter 62-212, F.A.C., and Chapter 62-4, F.A.C. Except as provided under Rule 62-213.415, F.A.C., the owner or operator of any facility seeking to create or change an air emissions bubble shall obtain an air construction permit in accordance with all the applicable provisions of Chapter 62-210, F.A.C., Chapters 62-212 and 62-4, F.A.C. The construction permit shall be issued for a period of time sufficient to allow construction, reconstruction or modification of the facility or emissions unit or addition of the air pollution control equipment; and operation while the owner or operator of the new, reconstructed or modified facility or emissions unit or the new pollution control equipment is conducting tests or otherwise demonstrating initial compliance with the conditions of the construction permit.

(b) Notwithstanding the expiration of an air construction permit, all limitations and requirements of such permit that are applicable to the design and operation of the permitted facility or emissions unit shall remain in effect until the facility or emissions unit is permanently shut down, except for any such limitation or requirement that is obsolete by its nature (such as a requirement for initial compliance testing) or any such limitation or requirement that is changed in accordance with the provisions of Rule 62-210.300(1)(b)1., F.A.C. Either the applicant or the Department can propose that certain conditions be considered obsolete. Any conditions or language in an air construction permit that are included for informational purposes only, if they are transferred to the air operation permit, shall be transferred for informational purposes only and shall not become enforceable conditions unless voluntarily agreed to by the permittee or otherwise required under Department rules.

1. Except for those limitations or requirements that are obsolete, all limitations and requirements of an air construction permit shall be included and identified in any air operation permit for the facility or emissions unit. The limitations and requirements included in the air operation permit can be changed, and thereby superseded, through the issuance of an air construction permit, federally enforceable state air operation permit, federally enforceable air general permit, or Title V air operation permit; provided, however, that:

- a. Any change that would constitute an administrative correction may be made pursuant to Rule 62-210.360, F.A.C.;
- b. Any change that would constitute a modification, as defined at Rule 62-210.200, F.A.C., shall be accomplished only through the issuance of an air construction permit; and
- c. Any change in a permit limitation or requirement that originates from a permit issued pursuant to 40 CFR 52.21, Rule 62-204.800(1)(d)2., F.A.C., Rule 62-212.400, F.A.C., Rule 62-212.500, F.A.C., or any former codification of Rule 62-212.400 or Rule 62-212.500, F.A.C., shall be accomplished only through the issuance of a new or revised air construction permit under Rule 62-204.800(1)(d)2., Rule 62-212.400 or Rule 62-212.500, F.A.C., as appropriate.

2. The force and effect of any change in a permit limitation or requirement made in accordance with the provisions of Rule 62-210.300(1)(b)1., F.A.C., shall be the same as if such change were made to the original air construction permit.

3. Nothing in Rule 62-210.300(1)(b), F.A.C., shall be construed as to allow operation of a facility or emissions unit without a valid air operation permit.

(2) Air Operation Permits. Upon expiration of the air operation permit for any existing facility or emissions unit, subsequent to construction or modification, or subsequent to the creation of or change to a bubble, and demonstration of compliance with the conditions of the construction permit for any new or modified facility or emissions unit, any air emissions bubble, or as otherwise provided in Chapter 62-210, F.A.C., or Chapter 62-213, F.A.C., the owner or operator of such facility or emissions unit shall obtain a renewal air operation permit, an initial air operation permit or air general permit, or an administrative correction or revision of an existing air operation permit, whichever is appropriate, in accordance with all applicable provisions of Chapter 62-210, F.A.C., Chapter 62-213, F.A.C., and Chapter 62-4, F.A.C.

(a) Minimum Requirements for All Air Operation Permits. At a minimum, a permit issued pursuant to this subsection shall:

1. Specify the manner, nature, volume and frequency of the emissions permitted, and the applicable emission limiting standards or performance standards, if any;
2. Require proper operation and maintenance of any pollution control equipment by qualified personnel, where applicable in accordance with the provisions of any operation and maintenance plan required by the air pollution rules of the Department.
3. Contain an effective date stated in the permit which shall not be earlier than the date final action is taken on the application and be issued for a period, beginning on the effective date, as provided below.

a. The operation permit for an emissions unit which is in compliance with all applicable rules and in operational condition, and which the owner or operator intends to continue operating, shall be issued or renewed for a five-year period, except that, for Title V sources subject to Rule 62-213.420(1)(a)1., F.A.C., operation permits shall be extended until 60 days after the due date for submittal of the facility's Title V permit application as specified in Rule 62-213.420(1)(a)1., F.A.C.

b. Except as provided in Rule 62-210.300(2)(a)3.d., F.A.C., the operation permit for an emissions unit which has been shut down for six months or more prior to the expiration date of the current operation permit, shall be renewed for a period not to exceed five years from the date of shutdown, even if the emissions unit is not maintained in operational condition, provided:

- (i) the owner or operator of the emissions unit demonstrates to the Department that the emissions unit may need to be reactivated and used, or that it is the owner's or operator's intent to apply to the Department for a permit to construct a new emissions unit at the facility before the end of the extension period; and
- (ii) the owner or operator of the emissions unit agrees to and is legally prohibited from providing the allowable emission permitted by the renewed permit as an emissions offset to any other person under Rule 62-212.500, F.A.C.; and
- (iii) the emissions unit was operating in compliance with all applicable rules as of the time the source was shut down.

c. Except as provided in Rule 62-210.300(2)(a)3.d., F.A.C., the operation permit for an emissions unit which has been shut down for five years or more prior to the expiration date of the current operation permit shall be renewed for a maximum period not to exceed ten years from the date of shutdown, even if the emissions unit is not maintained in operational condition, provided the conditions given in Rule 62-210.300(2)(a)3.b., F.A.C., are met and the owner or operator demonstrates to the Department that failure to renew the permit would constitute a hardship, which may include economic hardship.

d. The operation permit for an electric utility generating unit on cold standby or long-term reserve shutdown shall be renewed for a five-year period, and additional five-year periods, even if the unit is not maintained in operational condition, provided the conditions given in Rules 62-210.300(2)(a)3.b.(i) through (iii), F.A.C., are met.

4. In the case of an emissions unit permitted pursuant to Rules 62-210.300(2)(a)3.b., c., and d., F.A.C., include reasonable notification and compliance testing requirements for reactivation of such emissions unit and provide that the owner or operator demonstrate to the Department prior to reactivation that such reactivation would not constitute reconstruction pursuant to Rule 62-204.800(8), F.A.C.

[Rules 62-210.300(1) & (2), F.A.C.]

19. **Not federally enforceable.** Notification of Startup. The owners or operator of any emissions unit or facility which has a valid air operation permit which has been shut down more than one year, shall notify the Department in writing of the intent to start up such emissions unit or facility, a minimum of 60 days prior to the intended startup date.

- (a) The notification shall include information as to the startup date, anticipated emission rates or pollutants released, changes to processes or control devices which will result in changes to emission rates, and any other conditions which may differ from the valid outstanding operation permit.

(b) If, due to an emergency, a startup date is not known 60 days prior thereto, the owner shall notify the Department as soon as possible after the date of such startup is ascertained.

[Rule 62-210.300(5), F.A.C.]

20. Emissions Unit Reclassification.

(a) Any emissions unit whose operation permit has been revoked as provided for in Chapter 62-4, F.A.C., shall be deemed permanently shut down for purposes of Rule 62-212.500, F.A.C. Any emissions unit whose permit to operate has expired without timely renewal or transfer may be deemed permanently shut down, provided, however, that no such emissions unit shall be deemed permanently shut down if, within 20 days after receipt of written notice from the Department, the emissions unit owner or operator demonstrates that the permit expiration resulted from inadvertent failure to comply with the requirements of Rule 62-4.090, F.A.C., and that the owner or operator intends to continue the emissions unit in operation, and either submits an application for an air operation permit or complies with permit transfer requirements, if applicable.

(b) If the owner or operator of an emissions unit which is so permanently shut down, applies to the Department for a permit to reactivate or operate such emissions unit, the emissions unit will be reviewed and permitted as a new emissions unit.

[Rule 62-210.300(6), F.A.C.]

21. Transfer of Air Permits.

(a) An air permit is transferable only after submission of an Application for Transfer of Air Permit (DEP Form 62-210.900(7)) and Department approval in accordance with Rule 62-4.120, F.A.C. For Title V permit transfers only, a complete application for transfer of air permit shall include the requirements of 40 CFR 70.7(d)(1)(iv), adopted and incorporated by reference at Rule 62-204.800, F.A.C. Within 30 days after approval of the transfer of permit, the Department shall update the permit by an administrative permit correction pursuant to Rule 62-210.360, F.A.C.

(b) For an air general permit, the provision of Rules 62-210.300(7)(a) and 62-4.120, F.A.C., do not apply. Thirty (30) days before using an air general permit, the new owner must submit an air general permit notification to the Department in accordance with Rule 62-210.300(4), F.A.C., or Rule 62-213.300(2)(b), F.A.C.

[Rule 62-210.300(7), F.A.C.]

22. Public Notice and Comment.

(1) Public Notice of Proposed Agency Action.

(a) A notice of proposed agency action on permit application, where the proposed agency action is to issue the permit, shall be published by any applicant for:

1. An air construction permit;
2. An air operation permit, permit renewal or permit revision subject to Rule 62-210.300(2)(b), F.A.C., (i.e., a FESOP), except as provided in Rule 62-210.300(2)(b)1.b., F.A.C.; or
3. An air operation permit, permit renewal, or permit revision subject to Chapter 62-213, F.A.C., except Title V air general permits or those permit revisions meeting the requirements of Rule 62-213.412(1), F.A.C.

(b) The notice required by Rule 62-210.350(1)(a), F.A.C., shall be published in accordance with all otherwise applicable provisions of Rule 62-110.106, F.A.C. A public notice under Rule 62-210.350(1)(a)1., F.A.C., for an air construction permit may be combined with any required public notice under Rule 62-210.350(1)(a)2. or 3., F.A.C., for air operation permits. If such notices are combined, the public notice must comply with the requirements for both notices.

(c) Except as otherwise provided at Rules 62-210.350(2), (5), and (6), F.A.C., each notice of intent to issue an air construction permit shall provide a 14-day period for submittal of public comments.

(2) Additional Public Notice Requirements for Emissions Units Subject to Prevention of Significant Deterioration or Nonattainment - Area Preconstruction Review.

(a) Before taking final agency action on a construction permit application for any proposed new or modified facility or emissions unit subject to the preconstruction review requirements of Rule 62-212.400 or 62-212.500, F.A.C., the Department shall comply with all applicable provisions of Rule 62-110.106, F.A.C., and provide an opportunity for public comment which shall include as a minimum the following:

1. A complete file available for public inspection in at least one location in the district affected which includes the information submitted by the owner or operator, exclusive of confidential records under Section 403.111, F.S., and the Department's analysis of the effect of the proposed construction or modification on ambient air quality, including the Department's preliminary determination of whether the permit should be approved or disapproved;
2. A 30-day period for submittal of public comments; and

3. A notice, by advertisement in a newspaper of general circulation in the county affected, specifying the nature and location of the proposed facility or emissions unit, whether BACT or LAER has been determined, the degree of PSD increment consumption expected, if applicable, and the location of the information specified in paragraph 1. above; and notifying the public of the opportunity for submitting comments and requesting a public hearing.
 - (b) The notice provided for in Rule 62-210.350(2)(a)3., F.A.C., shall be prepared by the Department and published by the applicant in accordance with all applicable provisions of Rule 62-110.106, F.A.C., except that the applicant shall cause the notice to be published no later than thirty (30) days prior to final agency action.
 - (c) A copy of the notice provided for in Rule 62-210.350(2)(a)3., F.A.C., shall also be sent by the Department to the Regional Office of the U. S. Environmental Protection Agency and to all other state and local officials or agencies having cognizance over the location of such new or modified facility or emissions unit, including local air pollution control agencies, chief executives of city or county government, regional land use planning agencies, and any other state, Federal Land Manager, or Indian Governing Body whose lands may be affected by emissions from the new or modified facility or emissions unit.
 - (d) A copy of the notice provided for in Rule 62-210.350(2)(a)3., F.A.C., shall be displayed in the appropriate district, branch and local program offices.
 - (e) An opportunity for public hearing shall be provided in accordance with Chapter 120, F.S., and Rule 62-110.106, F.A.C.
 - (f) Any public comments received shall be made available for public inspection in the location where the information specified in Rule 62-210.350(2)(a)1., F.A.C., is available and shall be considered by the Department in making a final determination to approve or deny the permit.
 - (g) The final determination shall be made available for public inspection at the same location where the information specified in Rule 62-210.350(2)(a)1., F.A.C., was made available.
 - (h) For a proposed new or modified emissions unit which would be located within 100 kilometers of any Federal Class I area or whose emissions may affect any Federal Class I area, and which would be subject to the preconstruction review requirements of Rule 62-212.400 or 62-212.500, F.A.C.:
 1. The Department shall mail or transmit to the Administrator a copy of the initial application for an air construction permit and notice of every action related to the consideration of the permit application.
 2. The Department shall mail or transmit to the Federal Land Manager of each affected Class I area a copy of any written notice of intent to apply for an air construction permit; the initial application for an air construction permit, including all required analyses and demonstrations; any subsequently submitted information related to the application; the preliminary determination and notice of proposed agency action on the permit application; and any petition for an administrative hearing regarding the application or the Department's proposed action. Each such document shall be mailed or transmitted to the Federal Land Manager within fourteen (14) days after its receipt by the Department.
- (3) Additional Public Notice Requirements for Facilities Subject to Operation Permits for Title V Sources.
- (a) Before taking final agency action to issue a new, renewed, or revised air operation permit subject to Chapter 62-213, F.A.C., the Department shall comply with all applicable provisions of Rule 62-110.106, F.A.C., and provide an opportunity for public comment which shall include as a minimum the following:
 1. A complete file available for public inspection in at least one location in the district affected which includes the information submitted by the owner or operator, exclusive of confidential records under Section 403.111, F.S.; and
 2. A 30-day period for submittal of public comments.
 - (b) The notice provided for in Rule 62-210.350(3)(a), F.A.C., shall be prepared by the Department and published by the applicant in accordance with all applicable provisions of Rule 62-110.106, F.A.C., except that the applicant shall cause the notice to be published no later than thirty (30) days prior to final agency action. If written comments received during the 30-day comment period on a draft permit result in the Department's issuance of a revised draft permit in accordance with Rule 62-213.430(1), F.A.C., the Department shall require the applicant to publish another public notice in accordance with Rule 62-210.350(1)(a), F.A.C.
 - (c) The notice shall identify:
 1. The facility;
 2. The name and address of the office at which processing of the permit occurs;
 3. The activity or activities involved in the permit action;
 4. The emissions change involved in any permit revision;
 5. The name, address, and telephone number of a Department representative from whom interested persons may obtain additional information, including copies of the permit draft, the application, and all relevant supporting materials, including any permit application, compliance plan, permit, monitoring report, and compliance statement required pursuant to Chapter 62-213, F.A.C. (except for information entitled to confidential treatment pursuant to Section 403.111, F.S.), and all other materials available to the Department that are relevant to the permit decision;

6. A brief description of the comment procedures required by Rule 62-210.350(3), F.A.C.;
7. The time and place of any hearing that may be held, including a statement of procedure to request a hearing (unless a hearing has already been scheduled); and
8. The procedures by which persons may petition the Administrator to object to the issuance of the proposed permit after expiration of the Administrator's 45-day review period.

[Rules 62-210.350(1) thru (3), F.A.C.]

23. Administrative Permit Corrections.

- (1) A facility owner shall notify the Department by letter of minor corrections to information contained in a permit. Such notifications shall include:
 - (a) Typographical errors noted in the permit;
 - (b) Name, address or phone number change from that in the permit;
 - (c) A change requiring more frequent monitoring or reporting by the permittee;
 - (d) A change in ownership or operational control of a facility, subject to the following provisions:
 1. The Department determines that no other change in the permit is necessary;
 2. The permittee and proposed new permittee have submitted an Application for Transfer of Air Permit, and the Department has approved the transfer pursuant to Rule 62-210.300(7), F.A.C.; and
 3. The new permittee has notified the Department of the effective date of sale or legal transfer.
 - (e) Changes listed at 40 CFR 72.83(a)(1), (2), (6), (9) and (10), adopted and incorporated by reference at Rule 62-204.800, F.A.C., and changes made pursuant to Rules 62-214.340(1) and (2), F.A.C., to Title V sources subject to emissions limitations or reductions pursuant to 42 USC ss. 7651-7651o;
 - (f) Changes listed at 40 CFR 72.83(a)(11) and (12), adopted and incorporated by reference at Rule 62-204.800, F.A.C., to Title V sources subject to emissions limitations or reductions pursuant to 42 USC ss. 7651-7651o, provided the notification is accompanied by a copy of any EPA determination concerning the similarity of the change to those listed at Rule 62-210.360(1)(e), F.A.C.; and
 - (g) Any other similar minor administrative change at the source.
- (2) Upon receipt of any such notification, the Department shall within 60 days correct the permit and provide a corrected copy to the owner.
- (3) After first notifying the owner, the Department shall correct any permit in which it discovers errors of the types listed at Rules 62-210.360(1)(a) and (b), F.A.C., and provide a corrected copy to the owner.
- (4) For Title V source permits, other than general permits, a copy of the corrected permit shall be provided to EPA and any approved local air program in the county where the facility or any part of the facility is located.

[Rule 62-210.360, F.A.C.]

24. Emissions Computation and Reporting.

- (1) **Applicability.** This rule sets forth required methodologies to be used by the owner or operator of a facility for computing actual emissions, baseline actual emissions, and net emissions increase, as defined at Rule 62-210.200, F.A.C., and for computing emissions for purposes of the reporting requirements of subsection 62-210.370(3) and paragraph 62-212.300(1)(e), F.A.C., or of any permit condition that requires emissions be computed in accordance with this rule. This rule is not intended to establish methodologies for determining compliance with the emission limitations of any air permit.
- (2) **Computation of Emissions.** For any of the purposes set forth in subsection 62-210.370(1), F.A.C., the owner or operator of a facility shall compute emissions in accordance with the requirements set forth in this subsection.
 - (a) **Basic Approach.** The owner or operator shall employ, on a pollutant-specific basis, the most accurate of the approaches set forth below to compute the emissions of a pollutant from an emissions unit; provided, however, that nothing in this rule shall be construed to require installation and operation of any continuous emissions monitoring system (CEMS), continuous parameter monitoring system (CPMS), or predictive emissions monitoring system (PEMS) not otherwise required by rule or permit, nor shall anything in this rule be construed to require performance of any stack testing not otherwise required by rule or permit.
 1. If the emissions unit is equipped with a CEMS meeting the requirements of paragraph 62-210.370(2)(b), F.A.C., the owner or operator shall use such CEMS to compute the emissions of the pollutant, unless the owner or operator demonstrates to the department that an alternative approach is more accurate because the CEMS represents still-emerging technology.
 2. If a CEMS is not available or does not meet the requirements of paragraph 62-210.370(2)(b), F.A.C., but emissions of the pollutant can be computed pursuant to the mass balance methodology of paragraph 62-210.370(2)(c), F.A.C., the owner or operator shall use such methodology, unless the owner or operator demonstrates to the department that an alternative approach is more accurate.
 3. If a CEMS is not available or does not meet the requirements of paragraph 62-210.370(2)(b), F.A.C., and emissions cannot be computed pursuant to the mass balance methodology, the owner or operator shall use an emission factor meeting the requirements of paragraph 62-210.370(2)(d), F.A.C., unless the owner or operator demonstrates to the department that an alternative approach is more accurate.
 - (b) **Continuous Emissions Monitoring System (CEMS).**
 1. An owner or operator may use a CEMS to compute emissions of a pollutant for purposes of this rule provided:
 - a. The CEMS complies with the applicable certification and quality assurance requirements of 40 CFR Part 60, Appendices B and F, or, for an acid rain unit, the certification and quality assurance requirements of 40 CFR Part 75, all adopted by reference at Rule 62-204.800, F.A.C.; or

- b. The owner or operator demonstrates that the CEMS otherwise represents the most accurate means of computing emissions for purposes of this rule.
 2. Stack gas volumetric flow rates used with the CEMS to compute emissions shall be obtained by the most accurate of the following methods as demonstrated by the owner or operator:
 - a. A calibrated flowmeter that records data on a continuous basis, if available; or
 - b. The average flow rate of all valid stack tests conducted during a five-year period encompassing the period over which the emissions are being computed, provided all stack tests used shall represent the same operational and physical configuration of the unit.
 3. The owner or operator may use CEMS data in combination with an appropriate f-factor, heat input data, and any other necessary parameters to compute emissions if such method is demonstrated by the owner or operator to be more accurate than using a stack gas volumetric flow rate as set forth at subparagraph 62-210.370(2)(b)2., F.A.C., above.
 - (c) Mass Balance Calculations.
 1. An owner or operator may use mass balance calculations to compute emissions of a pollutant for purposes of this rule provided the owner or operator:
 - a. Demonstrates a means of validating the content of the pollutant that is contained in or created by all materials or fuels used in or at the emissions unit; and
 - b. Assumes that the emissions unit emits all of the pollutant that is contained in or created by any material or fuel used in or at the emissions unit if it cannot otherwise be accounted for in the process or in the capture and destruction of the pollutant by the unit's air pollution control equipment.
 2. Where the vendor of a raw material or fuel which is used in or at the emissions unit publishes a range of pollutant content from such material or fuel, the owner or operator shall use the highest value of the range to compute the emissions, unless the owner or operator demonstrates using site-specific data that another content within the range is more accurate.
 3. In the case of an emissions unit using coatings or solvents, the owner or operator shall document, through purchase receipts, records and sales receipts, the beginning and ending VOC inventories, the amount of VOC purchased during the computational period, and the amount of VOC disposed of in the liquid phase during such period.
 - (d) Emission Factors.
 1. An owner or operator may use an emission factor to compute emissions of a pollutant for purposes of this rule provided the emission factor is based on site-specific data such as stack test data, where available, unless the owner or operator demonstrates to the department that an alternative emission factor is more accurate. An owner or operator using site-specific data to derive an emission factor, or set of factors, shall meet the following requirements.
 - a. If stack test data are used, the emission factor shall be based on the average emissions per unit of input, output, or gas volume, whichever is appropriate, of all valid stack tests conducted during at least a five-year period encompassing the period over which the emissions are being computed, provided all stack tests used shall represent the same operational and physical configuration of the unit.
 - b. Multiple emission factors shall be used as necessary to account for variations in emission rate associated with variations in the emissions unit's operating rate or operating conditions during the period over which emissions are computed.
 - c. The owner or operator shall compute emissions by multiplying the appropriate emission factor by the appropriate input, output or gas volume value for the period over which the emissions are computed. The owner or operator shall not compute emissions by converting an emission factor to pounds per hour and then multiplying by hours of operation, unless the owner or operator demonstrates that such computation is the most accurate method available.
 2. If site-specific data are not available to derive an emission factor, the owner or operator may use a published emission factor directly applicable to the process for which emissions are computed. If no directly-applicable emission factor is available, the owner or operator may use a factor based on a similar, but different, process.
 - (e) Accounting for Emissions During Periods of Missing Data from CEMS, PEMS, or CPMS. In computing the emissions of a pollutant, the owner or operator shall account for the emissions during periods of missing data from CEMS, PEMS, or CPMS using other site-specific data to generate a reasonable estimate of such emissions.
 - (f) Accounting for Emissions During Periods of Startup and Shutdown. In computing the emissions of a pollutant, the owner or operator shall account for the emissions during periods of startup and shutdown of the emissions unit.
 - (g) Fugitive Emissions. In computing the emissions of a pollutant from a facility or emissions unit, the owner or operator shall account for the fugitive emissions of the pollutant, to the extent quantifiable, associated with such facility or emissions unit.
 - (h) Recordkeeping. The owner or operator shall retain a copy of all records used to compute emissions pursuant to this rule for a period of five years from the date on which such emissions information is submitted to the department for any regulatory purpose.
- (3) Annual Operating Report for Air Pollutant Emitting Facility.
- (a) The Annual Operating Report for Air Pollutant Emitting Facility (DEP Form No. 62-210.900(5)) shall be completed each year.
 - (c) The annual operating report shall be submitted to the appropriate Department of Environmental Protection (DEP) division, district or DEP-approved local air pollution control program office by March 1 of the following year.
 - (d) Beginning with 2007 annual emissions, emissions shall be computed in accordance with the provisions of Rule 62-210.370(2), F.A.C., for purposes of the annual operating report.

[Rules 62-210.370(1), (2) and (3)(a), (c) & (d), F.A.C.]

25. Circumvention. No person shall circumvent any air pollution control device, or allow the emission of air pollutants without the applicable air pollution control device operating properly.

[Rule 62-210.650, F.A.C.]

26. Forms and Instructions. The forms used by the Department in the stationary source control program are adopted and incorporated by reference in this section. The forms are listed by rule number, which is also the form number, with the subject, title and effective date. Copies of forms may be obtained by writing to the Department of Environmental Protection, Division of Air Resource Management, 2600 Blair Stone Road, Tallahassee, Florida 32399-2400, or by accessing the Division's website at www.dep.state.fl.us/air. The requirement of Rule 62-4.050(2), F.A.C., to file application forms in quadruplicate is waived if an air permit application is submitted using the Department's electronic application form.

(1) Application for Air Permit - Long Form, Form and Instructions (Effective 02-02-2006).

(a) Acid Rain Part, Form and Instructions (Effective 06-16-2003).

1. Repowering Extension Plan, Form and Instructions (Effective 07/01/1995).

2. New Unit Exemption, Form and Instructions (Effective 04/16/2001).

3. Retired Unit Exemption, Form and Instructions (Effective 04/16/2001).

4. Phase II NOx Compliance Plan, Form and Instructions (Effective 01/06/1998).

5. Phase II NOx Averaging Plan, Form (Effective 01/06/1998).

(b) Reserved.

(5) Annual Operating Report for Air Pollutant Emitting Facility, Form and Instructions (Effective 02/11/1999).

(7) Application for Transfer of Air Permit – Title V Source, (Effective 04/16/2001).

[Rule 62-210.900, F.A.C.]

Chapter 62-213, F.A.C.

27. Responsible Official.

(1) Each Title V source must identify a responsible official on each application for Title V permit, permit revision, and permit renewal. For sources with only one responsible official, this is how the Title V source designates the responsible official.

(2) Each Title V source may designate more than one responsible official, provided a primary responsible official is designated as responsible for the certifications of all other designated responsible officials. Any action taken by the primary responsible official shall take precedence over any action taken by any other designated responsible official.

(3) Any facility initially designating more than one responsible official or changing the list of responsible officials must submit a Responsible Official Notification Form (DEP Form No. 62-213.900(8)) designating all responsible officials for a Title V source, stating which responsible official is the primary responsible official, and providing an effective date for any changes to the list of responsible officials. Each individual listed on the Responsible Official Notification Form must meet the definition of responsible official given at Rule 62-210.200, F.A.C.

(4) A Title V source with only one responsible official shall submit DEP Form No. 62-213.900(8) for a change in responsible official.

(5) No person shall take any action as a responsible official at a Title V source unless designated a responsible official as required by this rule, except that the existing responsible official of any Title V source which has a change in responsible official during the term of the permit and before the effective date of this rule may continue to act as a responsible official until the first submittal of DEP Form No. 62-213.900(8) or the next application for Title V permit, permit revision or permit renewal, whichever comes first.

[Rules 62-213.202(1) thru (5), F.A.C.]

28. Annual Emissions Fee. Each Title V source permitted to operate in Florida must pay between January 15 and March 1 of each year, upon written notice from the Department, an annual emissions fee in an amount determined as set forth in Rule 62-213.205(1), F.A.C.

(1)(g) If the Department has not received the fee by February 15 of the year following the calendar year for which the fee is calculated, the Department will send the primary responsible official of the Title V source a written warning of the consequences for failing to pay the fee by March 1. If the fee is not postmarked by March 1 of the year due, the Department shall impose, in addition to the fee, a penalty of 50 percent of the amount of the fee unpaid plus interest on such amount computed in accordance with Section 220.807, F.S. If the Department determines that a submitted fee was inaccurately calculated, the Department shall either refund to the permittee any amount overpaid or notify the permittee of any amount underpaid. The Department shall not impose a penalty or interest on any amount underpaid, provided that the permittee has timely remitted payment of at least 90 percent of the amount determined to be due and remits full payment within 60 days after receipt of notice of the amount underpaid. The Department shall waive the collection of underpayment and shall not refund overpayment of the fee, if the amount is less than 1 percent of the fee due, up to \$50.00. The Department shall make every effort to provide a timely assessment of the adequacy of the submitted fee. Failure to

pay timely any required annual emissions fee, penalty, or interest constitutes grounds for permit revocation pursuant to Rule 62-4.100, F.A.C.

(1)(i) Any documentation of actual hours of operation, actual material or heat input, actual production amount, or actual emissions used to calculate the annual emissions fee shall be retained by the owner for a minimum of five (5) years and shall be made available to the Department upon request.

(1)(j) A completed DEP Form 62-213.900(1), "Major Air Pollution Source Annual Emissions Fee Form", must be submitted by a responsible official with the annual emissions fee.

[Rules 62-213.205, (1)(g), (1)(i) & (1)(j), F.A.C.]

29. Reserved.

30. Reserved.

31. Air Operation Permit Fees. No permit application processing fee, renewal fee, modification fee or amendment fee is required for an operation permit for a Title V source.

[Rule 62-213.205(4), F.A.C.]

32. Permits and Permit Revisions Required. All Title V sources are subject to the permit requirements of Chapter 62-213, F.A.C., except those Title V sources permittable pursuant to Rule 62-213.300, F.A.C., Title V Air General Permits.

(1) No Title V source may operate except in compliance with Chapter 62-213, F.A.C.

(2) Except as provided in Rule 62-213.410, F.A.C., no source with a permit issued under the provisions of Chapter 62-213, F.A.C., shall make any changes in its operation without first applying for and receiving a permit revision if the change meets any of the following:

- (a) Constitutes a modification;
- (b) Violates any applicable requirement;
- (c) Exceeds the allowable emissions of any air pollutant from any unit within the source;
- (d) Contravenes any permit term or condition for monitoring, testing, recordkeeping, reporting or of a compliance certification requirement;
- (e) Requires a case-by-case determination of an emission limitation or other standard or a source specific determination of ambient impacts, or a visibility or increment analysis under the provisions of Chapter 62-212 or 62-296, F.A.C.;
- (f) Violates a permit term or condition which the source has assumed for which there is no corresponding underlying applicable requirement to which the source would otherwise be subject;
- (g) Results in the trading of emissions among units within a source except as specifically authorized pursuant to Rule 62-213.415, F.A.C.;
- (h) Results in the change of location of any relocatable facility identified as a Title V source pursuant to paragraph (a)-(e), (g) or (h) of the definition of "major source of air pollution" at Rule 62-210.200, F.A.C.;
- (i) Constitutes a change at an Acid Rain Source under the provisions of 40 CFR 72.81(a)(1), (2), or (3), (b)(1) or (b)(3), hereby incorporated by reference;
- (j) Constitutes a change in a repowering plan, nitrogen oxides averaging plan, or nitrogen oxides compliance deadline extension at an Acid Rain Source;

[Rules 62-213.400(1) & (2), F.A.C.]

33. Changes Without Permit Revision. Title V sources having a valid permit issued pursuant to Chapter 62-213, F.A.C., may make the following changes without permit revision, provided that sources shall maintain source logs or records to verify periods of operation:

(1) Permitted sources may change among those alternative methods of operation;

(2) A permitted source may implement operating changes, as defined in Rule 62-210.200, F.A.C., after the source submits any forms required by any applicable requirement and provides the Department and EPA with at least 7 days written notice prior to implementation. The source and the Department shall attach each notice to the relevant permit;

(a) The written notice shall include the date on which the change will occur, and a description of the change within the permitted source, the pollutants emitted and any change in emissions, and any term or condition becoming applicable or no longer applicable as a result of the change;

(b) The permit shield described in Rule 62-213.460, F.A.C., shall not apply to such changes;

(3) Permitted sources may implement changes involving modes of operation only in accordance with Rule 62-213.415, F.A.C.

[Rule 62-213.410, F.A.C.]

34. Immediate Implementation Pending Revision Process.

(1) Those permitted Title V sources making any change that constitutes a modification pursuant to the definition of modification at Rule 62-210.200, F.A.C., but which would not constitute a modification pursuant to 42 USC 7412(a) or to 40 CFR 52.01, 60.2, or 61.15, adopted and incorporated by reference at Rule 62-204.800, F.A.C., may implement such change prior to final issuance of a permit revision, provided the change:

- (a) Does not violate any applicable requirement;
- (b) Does not contravene any permit term or condition for monitoring, testing, recordkeeping or reporting, or any compliance certification requirement;
- (c) Does not require or change a case-by-case determination of an emission limitation or other standard, or a source-specific determination of ambient impacts, or a visibility or increment analysis under the provisions of Chapter 62-212 or 62-296, F.A.C.;
- (d) Does not seek to establish or change a permit term or condition for which there is no corresponding underlying applicable requirement and which the source has assumed to avoid an applicable requirement to which the source would otherwise be subject including any federally enforceable emissions cap or federally enforceable alternative emissions limit.

(2) A Title V source may immediately implement such changes after they have been incorporated into the terms and conditions of a new or revised construction permit issued pursuant to Chapter 62-212, F.A.C., and after the source provides to EPA, the Department, each affected state and any approved local air program having geographic jurisdiction over the source, a copy of the source's application for operation permit revision. The Title V source may conform its application for construction permit to include all information required by Rule 62-213.420, F.A.C., in lieu of submitting separate application forms.

(3) The Department shall process the application for operation permit revision in accordance with the provisions of Chapter 62-213, F.A.C., except that the Department shall issue a draft permit revision or a determination to deny the revision within 60 days of receipt of a complete application for operation permit revision or, if the Title V source has submitted a construction permit application conforming to the requirements of Rule 62-213.420, F.A.C., the Department shall issue a draft permit or a determination to deny the revision at the same time the Department issues its determination on issuance or denial of the construction permit application. The Department shall not take final action on the operation permit revision application until all the requirements of Rules 62-213.430(1)(a), (c), (d), and (e), F.A.C., have been complied with.

(4) Pending final action on the operation permit revision application, the source shall implement the changes in accordance with the terms and conditions of the source's new or revised construction permit. If any terms and conditions of the new or revised construction permit have not been complied with prior to the issuance of the draft operation permit revision, the operation permit shall include a compliance plan in accordance with the provisions of Rule 62-213.440(2), F.A.C.

(5) The permit shield described in Rule 62-213.460, F.A.C., shall not apply to such changes until after the Department takes final action to issue the operation permit revision.

(6) If the Department denies the source's application for operation permit revision, the source shall cease implementation of the proposed changes.

[Rule 62-213.412, F.A.C.]

35. Permit Applications.

(1) **Duty to Apply.** For each Title V source, the owner or operator shall submit a timely and complete permit application in compliance with the requirements of Rules 62-213.420, F.A.C., and Rules 62-4.050(1) through (3), F.A.C.

(a) Timely Application.

3. For purposes of permit renewal, a timely application is one that is submitted in accordance with Rule 62-4.090, F.A.C.

(b) Complete Application.

1. Any applicant for a Title V permit, permit revision or permit renewal must submit an application on DEP Form No. 62-210.900(1), which must include all the information specified by Rule 62-213.420(3), F.A.C., except that an application for permit revision must contain only that information related to the proposed change(s) from the currently effective Title V permit and any other requirements that become applicable at the time of application. The applicant shall include information concerning fugitive emissions and stack emissions in the application. Each application for permit, permit revision or permit renewal shall be certified by a responsible official in accordance with Rule 62-213.420(4), F.A.C.

2. For those applicants submitting initial permit applications pursuant to Rule 62-213.420(1)(a)1., F.A.C., a complete application shall be an application that substantially addresses all the information required by the application form number 62-210.900(1), and such applications shall be deemed complete within sixty days of receipt of a signed and certified application unless the Department notifies the applicant of incompleteness within that time. For all other applicants, the applications shall be deemed complete sixty days after receipt, unless the Department, within sixty days after receipt of a signed application for permit, permit revision or permit renewal, requests additional documentation or information needed

to process the application. An applicant making timely and complete application for permit, or timely application for permit renewal as described by Rule 62-4.090(1), F.A.C., shall continue to operate the source under the authority and provisions of any existing valid permit or Florida Electrical Power Plant Siting Certification, and in accordance with applicable requirements of the Acid Rain Program, until the conclusion of proceedings associated with its permit application or until the new permit becomes effective, whichever is later, provided the applicant complies with all the provisions of Rules 62-213.420(1)(b)3. and 4., F.A.C. Failure of the Department to request additional information within sixty days of receipt of a properly signed application shall not impair the Department's ability to request additional information pursuant to Rules 62-213.420(1)(b)3. and 4., F.A.C.

3. For those permit applications submitted pursuant to the provisions of Rule 62-213.420(1)(a)1., F.A.C., the Department shall notify the applicant if the Department becomes aware at any time during processing of the application that the application contains incorrect or incomplete information. The applicant shall submit the corrected or supplementary information to the Department within ninety days unless the applicant has requested and been granted additional time to submit the information. Failure of an applicant to submit corrected or supplementary information requested by the Department within ninety days or such additional time as requested and granted shall render the application incomplete.

4. For all applications other than those addressed at Rule 62-213.420(1)(b)3., F.A.C., should the Department become aware, during processing of any application that the application contains incorrect information, or should the Department become aware, as a result of comment from an affected State, an approved local air program, EPA, or the public that additional information is needed to evaluate the application, the Department shall notify the applicant within 30 days. When an applicant becomes aware that an application contains incorrect or incomplete information, the applicant shall submit the corrected or supplementary information to the Department. If the Department notifies an applicant that corrected or supplementary information is necessary to process the permit, and requests a response, the applicant shall provide the information to the Department within ninety days of the Department request unless the applicant has requested and been granted additional time to submit the information or, the applicant shall, within ninety days, submit a written request that the Department process the application without the information. Failure of an applicant to submit corrected or supplementary information requested by the Department within ninety days, or such additional time as requested and granted, or to demand in writing within ninety days that the application be processed without the information shall render the application incomplete. Nothing in this section shall limit any other remedies available to the Department.

[Rules 62-213.420(1)(a)3. and 62-213.420(1)(b)1., 2., 3. & 4., F.A.C.]

36. Confidential Information. Whenever an applicant submits information under a claim of confidentiality pursuant to Section 403.111, F.S., the applicant shall also submit a copy of all such information and claim directly to EPA. (also, see Condition No. 50.) [Rule 62-213.420(2), F.A.C.]

37. Standard Application Form and Required Information. Applications shall be submitted under Chapter 62-213, F.A.C., on forms provided by the Department and adopted by reference in Rule 62-210.900(1), F.A.C. The information as described in Rule 62-210.900(1), F.A.C., shall be included for the Title V source and each emissions unit. An application must include information sufficient to determine all applicable requirements for the Title V source and each emissions unit and to evaluate a fee amount pursuant to Rule 62-213.205, F.A.C.

[Rule 62-213.420(3), F.A.C.]

38. a. Permit Renewal and Expiration. Permits being renewed are subject to the same requirements that apply to permit issuance at the time of application for renewal. Permit renewal applications shall contain that information identified in Rules 62-210.900(1) and 62-213.420(3), F.A.C. Unless a Title V source submits a timely application for permit renewal in accordance with the requirements of Rule 62-4.090(1), F.A.C., the existing permit shall expire and the source's right to operate shall terminate. No Title V permit will be issued for a new term except through the renewal process.

b. Permit Revision Procedures. Permit revisions shall meet all requirements of Chapter 62-213, F.A.C., including those for content of applications, public participation, review by approved local programs and affected states, and review by EPA, as they apply to permit issuance and permit renewal, except that permit revisions for those activities implemented pursuant to Rule 62-213.412, F.A.C., need not meet the requirements of Rule 62-213.430(1)(b), F.A.C. The Department shall require permit revision in accordance with the provisions of Rule 62-4.080, F.A.C., and 40 CFR 70.7(f), whenever any source becomes subject to any condition listed at 40

CFR 70.7(f)(1), hereby adopted and incorporated by reference. The below requirements from 40 CFR 70.7(f) are adopted and incorporated by reference in Rule 62-213.430(4), F.A.C.:

o 40 CFR 70.7(f): Reopening for Cause. (also, see **Condition No. 4.**)

(1) This section contains provisions from 40 CFR 70.7(f) that specify the conditions under which a Title V permit shall be reopened prior to the expiration of the permit. A Title V permit shall be reopened and revised under any of the following circumstances:

- (i) Additional applicable requirements under the Act become applicable to a major Part 70 source with a remaining permit term of 3 or more years. Such a reopening shall be completed not later than 18 months after promulgation of the applicable requirement. No such reopening is required if the effective date of the requirement is later than the date on which the permit is due to expire, unless the original permit or any of its terms and conditions has been extended pursuant to 40 CFR 70.4(b)(10)(i) or (ii).
 - (ii) Additional requirements (including excess emissions requirements) become applicable to an affected source under the acid rain program. Upon approved by the Administrator, excess emissions offset plans shall be deemed to be incorporated into the permit.
 - (iii) The permitting authority or EPA determines that the permit contains a material mistake or that inaccurate statements were made in establishing the emissions standards or other terms or conditions of the permit.
 - (iv) The Administrator or the permitting authority determines that the permit must be revised or revoked to assure compliance with the applicable requirements.
- (2) Proceedings to reopen and issue a permit shall follow the same procedures as apply to initial permit issuance and shall affect only those parts of the permit for which cause to reopen exists. Such reopening shall be made as expeditiously as practicable.
- (3) Reopenings under 40 CFR 70.7(f)(1) shall not be initiated before a notice of such intent is provided to the Part 70 source by the permitting authority at least 30 days in advance of the date that the permit is to be reopened, except that the permitting authority may provide a shorter time period in the case of an emergency.

[Rules 62-213.430(3) & (4), F.A.C.; and, 40 CFR 70.7(f)]

39. Insignificant Emissions Units or Pollutant-Emitting Activities.

(a) All requests for determination of insignificant emissions units or activities made pursuant to Rule 62-213.420(3)(n), F.A.C., shall be processed in conjunction with the permit, permit renewal or permit revision application submitted pursuant to Chapter 62-213, F.A.C. Insignificant emissions units or activities shall be approved by the Department consistent with the provisions of Rule 62-4.040(1)(b), F.A.C. Emissions units or activities which are added to a Title V source after issuance of a permit under Chapter 62-213, F.A.C., shall be incorporated into the permit at its next renewal, provided such emissions units or activities have been exempted from the requirement to obtain an air construction permit and also qualify as insignificant pursuant to Rule 62-213.430(6), F.A.C.

(b) An emissions unit or activity shall be considered insignificant if all of the following criteria are met:

- 1. Such unit or activity would be subject to no unit-specific applicable requirement;
- 2. Such unit or activity, in combination with other units or activities proposed as insignificant, would not cause the facility to exceed any major source threshold(s) as defined in Rule 62-213.420(3)(c)1., F.A.C., unless it is acknowledged in the permit application that such units or activities would cause the facility to exceed such threshold(s);
- 3. Such unit or activity would not emit or have the potential to emit:
 - a. 500 pounds per year or more of lead and lead compounds expressed as lead;
 - b. 1,000 pounds per year or more of any hazardous air pollutant;
 - c. 2,500 pounds per year or more of total hazardous air pollutants; or
 - d. 5.0 tons per year or more of any other regulated pollutant.

[Rule 62-213.430(6), F.A.C.]

40. Permit Duration. Permits for sources subject to the Federal Acid Rain Program shall be issued for terms of five years, provided that the initial Acid Rain Part may be issued for a term less than five years where necessary to coordinate the term of such part with the term of a Title V permit to be issued to the source. Operation permits for Title V sources may not be extended as provided in Rule 62-4.080(3), F.A.C., if such extension will result in a permit term greater than five years.

[Rule 62-213.440(1)(a), F.A.C.]

41. Monitoring Information. All records of monitoring information shall specify the date, place, and time of sampling or measurement and the operating conditions at the time of sampling or measurement, the date(s) analyses were performed, the company or entity that performed the analyses, the analytical techniques or methods used, and the results of such analyses.

[Rule 62-213.440(1)(b)2.a., F.A.C.]

42. Retention of Records. Retention of records of all monitoring data and support information shall be for a period of at least 5 years from the date of the monitoring sample, measurement, report, or application. Support information includes all calibration and maintenance records and all original strip-chart recordings for continuous monitoring instrumentation, and copies of all reports required by the permit.

[Rule 62-213.440(1)(b)2.b., F.A.C.]

43. Monitoring Reports. The permittee shall submit reports of any required monitoring at least every six (6) months. All instances of deviations from permit requirements must be clearly identified in such reports.

[Rule 62-213.440(1)(b)3.a., F.A.C.]

44. Deviation from Permit Requirements Reports. The permittee shall report in accordance with the requirements of Rules 62-210.700(6) and 62-4.130, F.A.C., deviations from permit requirements, including those attributable to upset conditions as defined in the permit. Reports shall include the probable cause of such deviations, and any corrective actions or preventive measures taken.

[Rule 62-213.440(1)(b)3.b., F.A.C.]

45. Reports. All reports shall be accompanied by a certification by a responsible official, pursuant to Rule 62-213.420(4), F.A.C.

[Rule 62-213.440(1)(b)3.c., F.A.C.]

46. If any portion of the final permit is invalidated, the remainder of the permit shall remain in effect.

[Rule 62-213.440(1)(d)1., F.A.C.]

47. It shall not be a defense for a permittee in an enforcement action that maintaining compliance with any permit condition would necessitate halting of or reduction of the source activity.

[Rule 62-213.440(1)(d)3., F.A.C.]

48. Any Title V source shall comply with all the terms and conditions of the existing permit until the Department has taken final action on any permit renewal or any requested permit revision, except as provided at Rule 62-213.412(2), F.A.C.

[Rule 62-213.440(1)(d)4., F.A.C.]

49. A situation arising from sudden and unforeseeable events beyond the control of the source which causes an exceedance of a technology-based emissions limitation because of unavoidable increases in emissions attributable to the situation and which requires immediate corrective action to restore normal operation, shall be an affirmative defense to an enforcement action in accordance with the provisions and requirements of 40 CFR 70.6(g)(2) and (3), hereby adopted and incorporated by reference.

[Rule 62-213.440(1)(d)5., F.A.C.]

50. Confidentiality Claims. Any permittee may claim confidentiality of any data or other information by complying with Rule 62-213.420(2), F.A.C. (also, see **Condition No. 36.**)

[Rule 62-213.440(1)(d)6., F.A.C.]

51. Statement of Compliance. (a)2. The permittee shall submit a Statement of Compliance with all terms and conditions of the permit that includes all the provisions of 40 CFR 70.6(c)(5)(iii), incorporated by reference at Rule 62-204.800, F.A.C., using DEP Form No. 62-213.900(7). Such statement shall be accompanied by a certification in accordance with Rule 62-213.420(4), F.A.C., for Title V requirements and with Rule 62-214.350, F.A.C., for Acid Rain requirements. Such statements shall be submitted (postmarked) to the Department and EPA:

a. Annually, within 60 days after the end of each calendar year during which the Title V permit was effective, or more frequently if specified by Rule 62-213.440(2), F.A.C., or by any other applicable requirement; and

b. Within 60 days after submittal of a written agreement for transfer of responsibility as required pursuant to 40 CFR 70.7(d)(1)(iv), adopted and incorporated by reference at Rule 62-204.800, F.A.C., or within 60 days after permanent shutdown of a facility permitted under Chapter 62-213, F.A.C.; provided that, in either such case, the reporting period shall be the portion of the calendar year the permit was effective up to the date of transfer of responsibility or permanent facility shutdown, as applicable.

3. In lieu of individually identifying all applicable requirements and specifying times of compliance with, non-compliance with, and deviation from each, the responsible official may use DEP Form No. 62-213.900(7) as such statement of compliance so long as the responsible official identifies all reportable deviations from and all instances of non-compliance with any applicable requirements and includes all information required by the federal regulation relating to each reportable deviation and instance of non-compliance.

(b) The responsible official may treat compliance with all other applicable requirements as a surrogate for compliance with Rule 62-296.320(2), Objectionable Odor Prohibited.

[Rules 62-213.440(3)(a)2. & 3. and (b), F.A.C.]

52. Permit Shield. Except as provided in Chapter 62-213, F.A.C., compliance with the terms and conditions of a permit issued pursuant to Chapter 62-213, F.A.C., shall, as of the effective date of the permit, be deemed compliance with any applicable requirements in effect, provided that the source included such applicable requirements in the permit application. Nothing in Rule 62-213.460, F.A.C., or in any permit shall alter or affect the ability of EPA or the Department to deal with an emergency, the liability of an owner or operator of a source for any violation of applicable requirements prior to or at the time of permit issuance, or the requirements of the Federal Acid Rain Program.

[Rule 62-213.460, F.A.C.]

53. Forms and Instructions. The forms used by the Department in the Title V source operation program are adopted and incorporated by reference in Rule 62-213.900, F.A.C. The form is listed by rule number, which is also the form number, and with the subject, title, and effective date. Copies of forms may be obtained by writing to the Department of Environmental Protection, Division of Air Resource Management, 2600 Blair Stone Road, Tallahassee, Florida 32399-2400, or by contacting the appropriate permitting authority.

(1) Major Air Pollution Source Annual Emissions Fee Form. (Effective 01/03/2001)

(7) Statement of Compliance Form. (Effective 06/02/2002)

(8) Responsible Official Notification Form. (Effective 06/02/2002)

[Rule 62-213.900, F.A.C.: Forms (1), (7) and (8)]

Chapter 62-256, F.A.C.

54. **Not federally enforceable.** Open Burning. This permit does not authorize any open burning nor does it constitute any waiver of the requirements of Chapter 62-256, F.A.C. Source shall comply with Chapter 62-256, F.A.C., for any open burning at the source.

[Chapter 62-256, F.A.C.]

Chapter 62-281, F.A.C.

55. Refrigerant Requirements. Any facility having refrigeration equipment, including air conditioning equipment, which uses a Class I or II substance (listed at 40 CFR 82, Subpart A, Appendices A and B), and any facility which maintains, services, or repairs motor vehicles using a Class I or Class II substance as refrigerant must comply with all requirements of 40 CFR 82, Subparts B and F, and with Rule 62-281.100, F.A.C. Those requirements include the following restrictions:

(1) Any facility having any refrigeration equipment normally containing 50 (fifty) pounds of refrigerant, or more, must keep servicing records documenting the date and type of all service and the quantity of any refrigerant added pursuant to 40 CFR 82.166;

(2) No person repairing or servicing a motor vehicle may perform any service on a motor vehicle air conditioner (MVAC) involving the refrigerant for such air conditioner unless the person has been properly trained and certified as provided at 40 CFR 82.34 and 40 CFR 82.40, and properly uses equipment approved pursuant to 40 CFR 82.36 and 40 CFR 82.38, and complies with 40 CFR 82.42;

(3) No person may sell or distribute, or offer for sale or distribution, any substance listed as a Class I or Class II substance at 40 CFR 82, Subpart A, Appendices A and B, except in compliance with Rule 62-281.100, F.A.C., and 40 CFR 82.34(b), 40 CFR 82.42, and/or 40 CFR 82.166;

(4) No person maintaining, servicing, repairing, or disposing of appliances may knowingly vent or otherwise release into the atmosphere any Class I or Class II substance used as a refrigerant in such equipment and no other person may open appliances (except MVACs as defined at 40 CFR 82.152) for service, maintenance or repair unless the person has been properly trained and certified pursuant to 40 CFR 82.161 and unless the person uses equipment certified for that type of appliance pursuant to 40 CFR 82.158 and unless the person observes the practices set forth at 40 CFR 82.156 and 40 CFR 82.166;

(5) No person may dispose of appliances (except small appliances, as defined at 40 CFR 82.152) without using equipment certified for that type of appliance pursuant to 40 CFR 82.158 and without observing the practices set forth at 40 CFR 82.156 and 40 CFR 82.166;

(6) No person may recover refrigerant from small appliances, MVACs and MVAC-like appliances (as defined at 40 CFR 82.152), except in compliance with the requirements of 40 CFR 82, Subpart F.

[40 CFR 82; and, Chapter 62-281, F.A.C. (**Chapter 62-281, F.A.C., is not federally enforceable**)]

Chapter 62-296, F.A.C.

56. Industrial, Commercial, and Municipal Open Burning Prohibited. Open burning in connection with industrial, commercial, or municipal operations is prohibited, except when:

- (a) Open burning is determined by the Department to be the only feasible method of operation and is authorized by an air permit issued pursuant to Chapter 62-210 or 62-213, F.A.C.; or
- (b) An emergency exists which requires immediate action to protect human health and safety; or
- (c) A county or municipality would use a portable air curtain incinerator to burn yard trash generated by a hurricane, tornado, fire or other disaster and the air curtain incinerator would otherwise be operated in accordance with the permitting exemption criteria of Rule 62-210.300(3), F.A.C.

[Rule 62-296.320(3), F.A.C.]

57. Unconfined Emissions of Particulate Matter.

(4)(c)1. No person shall cause, let, permit, suffer or allow the emissions of unconfined particulate matter from any activity, including vehicular movement; transportation of materials; construction; alteration; demolition or wrecking; or industrially related activities such as loading, unloading, storing or handling; without taking reasonable precautions to prevent such emissions.

3. Reasonable precautions include the following:

- a. Paving and maintenance of roads, parking areas and yards.
- b. Application of water or chemicals to control emissions from such activities as demolition of buildings, grading roads, construction, and land clearing.
- c. Application of asphalt, water, oil, chemicals or other dust suppressants to unpaved roads, yards, open stock piles and similar activities.
- d. Removal of particulate matter from roads and other paved areas under the control of the owner or operator of the facility to prevent reentrainment, and from buildings or work areas to prevent particulate from becoming airborne.
- e. Landscaping or planting of vegetation.
- f. Use of hoods, fans, filters, and similar equipment to contain, capture and/or vent particulate matter.
- g. Confining abrasive blasting where possible.
- h. Enclosure or covering of conveyor systems.

4. In determining what constitutes reasonable precautions for a particular facility, the Department shall consider the cost of the control technique or work practice, the environmental impacts of the technique or practice, and the degree of reduction of emissions expected from a particular technique or practice.

[Rules 62-296.320(4)(c)1., 3., & 4. F.A.C.]

[electronic file name: tv-6.doc]

ASP Number 97-B-01
(With Scrivener's Order Dated July 9, 1997)

STATE OF FLORIDA
DEPARTMENT OF ENVIRONMENTAL PROTECTION

In the matter of:

Florida Electric Power Coordinating Group, Inc.,)
Petitioner.)

ASP No. 97-B-01

ORDER ON REQUEST
FOR
ALTERNATE PROCEDURES AND REQUIREMENTS

Pursuant to Rule 62-297.620, Florida Administrative Code (F.A.C.), the Florida Electric Coordinating Group, Incorporated, (FCG) petitioned for approval to: (1) Exempt fossil fuel steam generators which burn liquid and/or solid fuel for less than 400 hours during the federal fiscal year from the requirement to conduct an annual particulate matter compliance test; and, (2) Exempt fossil fuel steam generators which burn liquid and/or solid fuel for less than 400 hours during the federal fiscal year from the requirement to conduct an annual particulate matter compliance test during the year prior to renewal of an operation permit. This Order is intended to clarify particulate testing requirements for those fossil fuel steam generators which primarily burn gaseous fuels including, but not necessarily limited to natural gas.

Having considered the provisions of Rule 62-296.405(1), F.A.C., Rule 62-297.310(7), F.A.C., and all supporting documentation, the following Findings of Fact, Conclusions of Law, and Order are entered:

FINDINGS OF FACT

1. The Florida Electric Power Coordinating Group, Incorporated, petitioned the Department to exempt those fossil fuel steam generators which have a heat input of more than 250 million Btu per hour and burn solid and/or liquid fuel less than 400 hours during the year from the requirement to conduct an annual particulate matter compliance test. [Exhibit 1]
2. Rule 62-296.405(1)(a), F.A.C., applies to those fossil fuel steam generators that are not subject to the federal standards of performance for new stationary sources (NSPS) in 40 CFR 60 and which have a heat input of more than 250 million Btu per hour.
3. Rule 62-296.405(1)(a), F.A.C., limits visible emissions from affected fossil fuel steam generators to, "20 percent opacity except for either one six-minute period per hour during which

not exceed 40 percent. The option selected shall be specified in the emissions unit's construction and operation permits. Emissions units governed by this visible emission limit shall test for particulate emission compliance annually and as otherwise required by Rule 62-297, F.A.C."

4. Rule 62-296.405(1)(a), F.A.C., further states, "Emissions units electing to test for particulate matter emission compliance quarterly shall be allowed visible emissions of 40 percent opacity. The results of such tests shall be submitted to the Department. Upon demonstration that the particulate standard has been regularly complied with, the Secretary, upon petition by the applicant, shall reduce the frequency of particulate testing to no less than once annually."

5. Rule 297.310(7)(a)1., F.A.C., states, "The owner or operator of a new or modified emissions unit that is subject to an emission limiting standard shall conduct a compliance test that demonstrates compliance with the applicable emission limiting standard prior to obtaining an operation permit for such emissions unit."

6. Rule 297.310(7)(a)3., F.A.C., states, "The owner or operator of an emissions unit that is subject to any emission limiting standard shall conduct a compliance test that demonstrates compliance with the applicable emission limiting standard prior to obtaining a renewed operation permit. Emissions units that are required to conduct an annual compliance test may submit the most recent annual compliance test to satisfy the requirements of this provision."

7. Rule 297.310(7)(a)3., F.A.C., further states, "In renewing an air operation permit pursuant to Rule 62-210.300(2)(a)3.b., c., or d., F.A.C., the Department shall not require submission of emission compliance test results for any emissions unit that, during the year prior to renewal: a. Did not operate; or, b. In the case of a fuel burning emissions unit, burned liquid and/or solid fuel for a total of no more than 400 hours."

8. Rule 297.310(7)(a)4., F.A.C., states, "During each federal fiscal year (October 1 -- September 30), unless otherwise specified by rule, order, or permit, the owner or operator of each emissions unit shall have a formal compliance test conducted for: a. Visible emissions, if there is an applicable standard; b. Each of the following pollutants, if there is an applicable standard, and if the emissions unit emits or has the potential to emit: 5 tons per year or more of lead or lead compounds measured as elemental lead; 30 tons per year or more of acrylonitrile; or 100 tons per year or more of any other regulated air pollutant..."

9. Rule 297.310(7)(a)5., F.A.C., states, "An annual compliance test for particulate matter emissions shall not be required for any fuel burning emissions unit that, in a federal fiscal year, does not burn liquid and/or solid fuel, other than during startup, for a total of more than 400 hours."

10. Rule 297.310(7)(a)6., F.A.C., states, "For fossil fuel steam generators on a semi-annual particulate matter emission compliance testing schedule, a compliance test shall not be

required for any six-month period in which liquid and/or solid fuel is not burned for more than 200 hours other than during startup."

11. Rule 297.310(7)(a)7., F.A.C., states, "For emissions units electing to conduct particulate matter emission compliance testing quarterly pursuant to Rule 62-296.405(2)(a), F.A.C., a compliance test shall not be required for any quarter in which liquid and/or solid fuel is not burned for more than 100 hours other than during startup." [Note: The reference should be to Rule 62-296.405(1)(a), F.A.C., rather than Rule 62-296.405(2)(a), F.A.C.]

12. The fifth edition of the U. S. Environmental Protection Agency's Compilation of Air Pollutant Emission Factors, AP-42, that emissions of filterable particulate from gas-fired fossil fuel steam generators with a heat input of more than about 10 million Btu per hour may be expected to range from 0.001 to 0.006 pound per million Btu. [Exhibit 2]

13. Rule 62-296.405(1)(b), F.A.C. and the federal standards of performance for new stationary sources in 40 CFR 60.42, Subpart D, limit particulate emissions from uncontrolled fossil fuel fired steam generators with a heat input of more than 250 million Btu to 0.1 pound per million Btu.

CONCLUSIONS OF LAW

1. The Department has jurisdiction to consider the matter pursuant to Section 403.061, Florida Statutes (F.S.), and Rule 62-297.620, F.A.C.

2. Pursuant to Rule 62-297.310(7), F.A.C., the Department may require Petitioner to conduct compliance tests that identify the nature and quantity of pollutant emissions, if, after investigation, it is believed that any applicable emission standard or condition of the applicable permits is being violated.

3. There is reason to believe that a fossil fuel steam generator which does not burn liquid and/or solid fuel (other than during startup) for a total of more than 400 hours in a federal fiscal year and complies with all other applicable limits and permit conditions is in compliance with the applicable particulate mass emission limiting standard.

ORDER

Having considered the requirements of Rule 62-296.405, F.A.C., Rule 62-297.310, F.A.C., and supporting documentation, it is hereby ordered that:

1. An annual compliance test for particulate matter emissions shall not be required for any fuel burning emissions unit that, in a federal fiscal year, does not burn liquid and/or solid fuel, other than during startup, for a total of more than 400 hours;

2. For fossil fuel steam generators on a semi-annual particulate matter emission compliance testing schedule, a compliance test shall not be required for any six-month period in which liquid and/or solid fuel is not burned for more than 200 hours other than during startup;

3. For emissions units electing to conduct particulate matter emission compliance testing quarterly pursuant to Rule 62-296.405(1)(a), F.A.C., a compliance test shall not be required for any quarter in which liquid and/or solid fuel is not burned for more than 100 hours other than during startup;

4. In renewing an air operation permit pursuant to Rule 62-210.300(2)(a)3.b., c., or d., F.A.C., the Department shall not require submission of particulate matter emission compliance test results for any fossil fuel steam generator emissions unit that burned liquid and/or solid fuel for a total of no more than 400 hours during the year prior to renewal.

5. Pursuant to Rule 62-297.310(7), F.A.C., owners of affected fossil fuel steam generators may be required to conduct compliance tests that identify the nature and quantity of pollutant emissions, if, after investigation, it is believed that any applicable emission standard or condition of the applicable permits is being violated.

6. Pursuant to Rule 62-297.310(8), F.A.C., owners of affected fossil fuel steam generators shall submit the compliance test report to the District Director of the Department district office having jurisdiction over the emissions unit and, where applicable, the Air Program Administrator of the appropriate Department-approved local air program within 45 days of completion of the test.

PETITION FOR ADMINISTRATIVE REVIEW

The Department will take the action described in this Order unless a timely petition for an administrative hearing is filed pursuant to sections 120.569 and 120.57 of the Florida Statutes, or a party requests mediation as an alternative remedy under section 120.573 before the deadline for filing a petition. Choosing mediation will not adversely affect the right to a hearing if mediation does not result in a settlement. The procedures for petitioning for a hearing are set forth below, followed by the procedures for requesting mediation.

A person whose substantial interests are affected by the Department's proposed decision may petition for an administrative hearing in accordance with sections 120.569 and 120.57 of the Florida Statutes. The petition must contain the information set forth below and must be filed (received) in the Office of General Counsel of the Department at 3900 Commonwealth Boulevard, Mail Station 35, Tallahassee, Florida 32399-3000. Petitions must be filed within 21 days of receipt of this Order. A petitioner must mail a copy of the petition to the applicant at the address indicated above, at the time of filing. The failure of any person to file a petition (or a request for mediation, as discussed below) within the appropriate time period shall constitute a waiver of that person's right to request an administrative determination (hearing) under sections 120.569 and 120.57 of

the Florida Statutes, or to intervene in this proceeding and participate as a party to it. Any subsequent intervention will be only at the approval of the presiding officer upon the filing of a motion in compliance with Rule 28-5.207 of the Florida Administrative Code.

A petition must contain the following information:

- (a) The name, address, and telephone number of each petitioner, the applicant's name and address, the Department File Number, and the county in which the project is proposed;
- (b) A statement of how and when each petitioner received notice of the Department's action or proposed action;
- (c) A statement of how each petitioner's substantial interests are affected by the Department's action or proposed action;
- (d) A statement of the material facts disputed by each petitioner, if any;
- (e) A statement of facts that the petitioner contends warrant reversal or modification of the Department's action or proposed action;
- (f) A statement identifying the rules or statutes each petitioner contends require reversal or modification of the Department's action or proposed action; and,
- (g) A statement of the relief sought by each petitioner, stating precisely the action each petitioner wants the Department to take with respect to the Department's action or proposed action in the notice of intent.

Because the administrative hearing process is designed to formulate final agency action, the filing of a petition means that the Department's final action may be different from the position taken by it in this Order. Persons whose substantial interests will be affected by any such final decision of the Department on the application have the right to petition to become a party to the proceeding, in accordance with the requirements set forth above.

A person whose substantial interests are affected by the Department's proposed decision, may elect to pursue mediation by asking all parties to the proceeding to agree to such mediation and by filing with the Department a request for mediation and the written agreement of all such parties to mediate the dispute. The request and agreement must be filed in (received by) the Office of General Counsel of the Department at 3900 Commonwealth Boulevard, Mail Station 35, Tallahassee, Florida 32399-3000, by the same deadline as set forth above for the filing of a petition.

A request for mediation must contain the following information:

(a) The name, address, and telephone number of the person requesting mediation and that person's representative, if any;

(b) A statement of the preliminary agency action;

(c) A statement of the relief sought; and

(d) Either an explanation of how the requester's substantial interests will be affected by the action or proposed action addressed in this notice of intent or a statement clearly identifying the petition for hearing that the requester has already filed, and incorporating it by reference.

The agreement to mediate must include the following:

(a) The names, addresses, and telephone numbers of any persons who may attend the mediation;

(b) The name, address, and telephone number of the mediator selected by the parties, or a provision for selecting a mediator within a specified time;

(c) The agreed allocation of the costs and fees associated with the mediation;

(d) The agreement of the parties on the confidentiality of discussions and documents introduced during mediation;

(e) The date, time, and place of the first mediation session, or a deadline for holding the first session, if no mediator has yet been chosen;

(f) The name of each party's representative who shall have authority to settle or recommend settlement; and

(g) The signatures of all parties or their authorized representatives.

As provided in section 120.573 of the Florida Statutes, the timely agreement of all parties to mediate will toll the time limitations imposed by sections 120.569 and 120.57 for requesting and holding an administrative hearing. Unless otherwise agreed by the parties, the mediation must be concluded within sixty days of the execution of the agreement. If mediation results in settlement of the administrative dispute, the Department must enter a final order incorporating the agreement of the parties. Persons whose substantial interests will be affected by such a modified final decision of the Department have a right to petition for a hearing only in accordance with the requirements for such petitions set forth above. If mediation terminates without settlement of the dispute, the Department shall notify all parties in writing that the administrative hearing processes under sections 120.569 and 120.57 remain available for disposition of the dispute, and the notice will

specify the deadlines that then will apply for challenging the agency action and electing remedies under those two statutes.

In addition to the above, a person subject to regulation has a right to apply for a variance from or waiver of the requirements of particular rules, on certain conditions, under section 120.542 of the Florida Statutes. The relief provided by this state statute applies only to state rules, not statutes, and not to any federal regulatory requirements. Applying for a variance or waiver does not substitute or extend the time for filing a petition for an administrative hearing or exercising any other right that a person may have in relation to the action proposed in this notice of intent.

The application for a variance or waiver is made by filing a petition with the Office of General Counsel of the Department, 3900 Commonwealth Boulevard, Mail Station 35, Tallahassee, Florida 32399-3000.

The petition must specify the following information:

- (a) The name, address, and telephone number of the petitioner;
- (b) The name, address, and telephone number of the attorney or qualified representative of the petitioner, if any;
- (c) Each rule or portion of a rule from which a variance or waiver is requested;
- (d) The citation to the statute underlying (implemented by) the rule identified in (c) above;
- (e) The type of action requested;
- (f) The specific facts that would justify a variance or waiver for the petitioner;
- (g) The reason why the variance or waiver would serve the purposes of the underlying statute (implemented by the rule); and
- (h) A statement whether the variance or waiver is permanent or temporary and, if temporary, a statement of the dates showing the duration of the variance or waiver requested.

The Department will grant a variance or waiver, when the petition demonstrates both that the application of the rule would create a substantial hardship or violate principles of fairness, as each of those terms is defined in section 120.542(2) of the Florida Statutes, and that the purpose of the underlying statute will be or has been achieved by other means by the petitioner. Persons subject to regulation pursuant to any federally delegated or approved air program should be aware that Florida is specifically not authorized to issue variances or waivers from any requirements of any such federally delegated or approved program. The requirements of the program remain fully

each of those terms is defined in section 120.542(2) of the Florida Statutes, and that the purpose of the underlying statute will be or has been achieved by other means by the petitioner. Persons subject to regulation pursuant to any federally delegated or approved air program should be aware that Florida is specifically not authorized to issue variances or waivers from any requirements of any such federally delegated or approved program. The requirements of the program remain fully enforceable by the Administrator of the EPA and by any person under the Clean Air Act unless and until the Administrator separately approves any variance or waiver in accordance with the procedures of the federal program.


This Order constitutes final agency action unless a petition is filed in accordance with the above paragraphs. Upon timely filing of a petition, this Order will not be effective until further Order of the Department.

RIGHT TO APPEAL

Any party to this Order has the right to seek judicial review of the Order pursuant to Section 120.68, F.S., by the filing of a Notice of Appeal pursuant to Rule 9.110, Florida Rules of Appellate Procedure, with the Clerk of the Department in the Office of General Counsel, 3900 Commonwealth Boulevard, Mail Station 35, Tallahassee, Florida 32399-3000; and, by filing a copy of the Notice of Appeal accompanied by the applicable filing fees with the appropriate District Court of Appeal. The Notice of Appeal must be filed within 30 days from the date the Notice of Agency Action is filed with the Clerk of the Department.

DONE AND ORDERED this 17 day of March, 1997 in Tallahassee, Florida.

STATE OF FLORIDA DEPARTMENT
OF ENVIRONMENTAL PROTECTION



HOWARD L. RHODES, Director
Division of Air Resources Management
Twin Towers Office Building
2600 Blair Stone Road
Tallahassee, Florida 32399-2400
(904) 488-0114

CERTIFICATE OF SERVICE

The undersigned duly designated deputy clerk hereby certifies that a copy of the foregoing was mailed to Rich Piper, Chair, Florida Power Coordinating Group, Inc., 405 Reo Street, Suite 100, Tampa, Florida 33609-1004, on this 18th day of March 1997.

Clerk Stamp

FILING AND ACKNOWLEDGMENT

FILED, on this date, pursuant to §120.52(7), Florida Statutes, with the designated Department Clerk, receipt of which is hereby acknowledged.

Martha M. Wise 3-18-97
Clerk Date

STATE OF FLORIDA
DEPARTMENT OF ENVIRONMENTAL PROTECTION

In the matter of:

Florida Electric Power Coordinating Group, Inc.,)

ASP No. 97-B-01

Petitioner.)

ORDER CORRECTING SCRIVENER'S ERROR

The Order which authorizes owners of natural gas fired fossil fuel steam generators to forgo particulate matter compliance testing on an annual basis and prior to renewal of an operation permit entered on the 17th day of March, 1997, is hereby corrected on page 4, paragraph number 4, by deleting the words "pursuant to Rule 62-210.300(2)(a)3.b., c., or d., F.A.C.":

4. In renewing an air operation permit ~~pursuant to Rule 62-210.300(2)(a)3.b., c., or d., F.A.C.~~, the Department shall not require submission of particulate matter emission compliance test results for any fossil fuel steam generator emissions unit that burned liquid and/or solid fuel for a total of no more than 400 hours during the year prior to renewal.

DONE AND ORDERED this 2 day of July, 1997 in Tallahassee, Florida.

STATE OF FLORIDA DEPARTMENT
OF ENVIRONMENTAL PROTECTION



HOWARD L. RHODES, Director
Division of Air Resources Management
Twin Towers Office Building
2600 Blair Stone Road
Tallahassee, Florida 32399-2400
(904) 488-0114

Figure 1: Summary Report-
Gaseous and Opacity Excess Emission and Monitoring System
Performance

FIGURE 1--SUMMARY REPORT--GASEOUS AND OPACITY EXCESS EMISSION AND MONITORING SYSTEM PERFORMANCE

[Note: This form is referenced in 40 CFR 60.7, Subpart A-General Provisions]

Pollutant (Circle One): SO₂ NO_x TRS H₂S CO Opacity

Reporting period dates: From _____ to _____

Company: _____

Emission Limitation: _____

Address: _____

Monitor Manufacturer: _____

Model No.: _____

Date of Latest CMS Certification or Audit: _____

Process Unit(s) Description: _____

Total source operating time in reporting period ¹: _____

Emission data summary ¹	CMS performance summary ¹
1. Duration of excess emissions in reporting period due to:	1. CMS downtime in reporting period due to:
a. Startup/shutdown	a. Monitor equipment malfunctions
b. Control equipment problems	b. Non-Monitor equipment malfunctions
c. Process problems	c. Quality assurance calibration
d. Other known causes	d. Other known causes
e. Unknown causes	e. Unknown causes
2. Total duration of excess emissions	2. Total CMS Downtime
3. Total duration of excess emissions x (100) / [Total source operating time] % ²	3. [Total CMS Downtime] x (100) / [Total source operating time] % ²

¹ For opacity, record all times in minutes. For gases, record all times in hours.

² For the reporting period: If the total duration of excess emissions is 1 percent or greater of the total operating time or the total CMS downtime is 5 percent or greater of the total operating time, both the summary report form and the excess emission report described in 40 CFR 60.7(c) shall be submitted.

Note: On a separate page, describe any changes since last quarter in CMS, process or controls.

I certify that the information contained in this report is true, accurate, and complete.

Name: _____

Signature: _____ Date: _____

Title: _____

Table 297.310-1, Calibration Schedule
(Version Dated 10/07/96)

TABLE 297.310-1 CALIBRATION SCHEDULE
(version dated 10/07/96)

[Note: This table is referenced in Rule 62-297.310, F.A.C.]

ITEM	MINIMUM CALIBRATION FREQUENCY	REFERENCE INSTRUMENT	TOLERANCE
Liquid in glass thermometer	Annually	ASTM Hg in glass ref. thermometer or equivalent, or thermometric points	+/-2%
Bimetallic thermometer	Quarterly	Calib. liq. in glass thermometer	5 degrees F
Thermocouple	Annually	ASTM Hg in glass ref. thermometer, NBS calibrated reference and potentiometer	5 degrees F
Barometer	Monthly	Hg barometer or NOAA station	+/-1% scale
Pitot Tube	When required or when damaged	By construction or measurements in wind tunnel D greater than 16" and standard pitot tube	See EPA Method 2, Fig. 2-2 & 2-3
Probe Nozzles	Before each test or when nicked, dented, or corroded	Micrometer	+/-0.001" mean of at least three readings Max. deviation between readings .004"
Dry Gas Meter and Orifice Meter	1. Full Scale: When received, When 5% change observed, Annually 2. One Point: Semiannually 3. Check after each test series	Spirometer or calibrated wet test or dry gas test meter	2%
		Comparison check	5%

[electronic file name: 297310-1.doc]

Table 1-1, Summary of Air Pollutant Standards and Terms

Table 1-1, Summary of Air Pollutant Standards and Terms

City of Tallahassee, Electric Utilities Department
Arvah B. Hopkins Generating Station

DRAFT/PROPOSED Permit No. 0730003-003-AV
Facility ID No. 0730003

This table summarizes information for convenience purposes only. This table does not supersede any of the terms or conditions of the permit.

E. U. ID No.	Brief Description	Pollutant Name	Fuel(s)	Hours/ Year	Allowable Emissions			Equivalent Emissions*		Regulatory Citation(s)	See Permit Condition(s)
					Standard(s)	lbs./hour	TPY	lbs./hour	TPY		
-001	Boiler #1 (903 MMBtu/hour) Acid Rain Phase II Unit (75 MW Turbine-generator) (each unit)	VE	No. 2 - No. 6 F.O.	8760	20%; 40% - 1 two min. period/hr.	N/A	N/A	N/A	N/A	62-296.405(1)(a)	A.5. & A.6.
			Natural Gas	8760	20%; 40% - 1 two min. period/hr.	N/A	N/A	N/A	N/A	62-296.405(1)(a)	A.5. & A.6.
		PM	No. 2 - No. 6 F.O.	8760	0.1 lb/MMBtu	N/A	N/A	90.3	395.5	62-296.405(1)(b)	A.7.
			Natural Gas	8760	0.1 lb/MMBtu	N/A	N/A	90.3	395.5	62-296.405(1)(b)	A.7.
		PM - SB **	No. 2 - No. 6 F.O.	3 hr/day	0.3 lb/MMBtu	N/A	N/A	270.9	494.4	62-210.700(3)	A.8.
			Natural Gas	3 hr/day	0.3 lb/MMBtu	N/A	N/A	270.9	494.4	62-210.700(3)	A.8.
-004	Boiler #2 (2,325 MMBtu/hour - Oil) (2,500 MMBtu/hour - Gas) Acid Rain Phase II Unit (238 MW Turbine-generator)	VE	No. 2 - No. 6 F.O.	8760	20%; 40% - 1 two min. period/hr.	N/A	N/A	N/A	N/A	62-296.405(1)(a)	B.5. & B.6.
			Natural Gas	8760	20%; 40% - 1 two min. period/hr.	N/A	N/A	N/A	N/A	62-296.405(1)(a)	B.5. & B.6.
		PM	No. 2 - No. 6 F.O.	8760	0.1 lb/MMBtu	N/A	N/A	232.5	1,018.4	62-296.405(1)(b)	B.7.
			Natural Gas	8760	0.1 lb/MMBtu	N/A	N/A	232.5	1,018.4	62-296.405(1)(b)	B.7.
		PM - SB **	No. 2 - No. 6 F.O.	3 hr/day	0.3 lb/MMBtu	N/A	N/A	697.5	1,272.9	62-210.700(3)	B.8.
			Natural Gas	3 hr/day	0.3 lb/MMBtu	N/A	N/A	697.5	1,272.9	62-210.700(3)	B.8.
		SO ₂	No. 2 - No. 6 F.O.	8760	1.4 lb/MMBtu	N/A	N/A	3,255.0	14,256.9	Applicant Request	B.10.
			Natural Gas	8760	N/A	N/A	N/A	N/A	N/A	62-296.405(1)(c)	B.10.
-002	Combustion Turbine No. 1 (228 MMBtu/hour)	VE	No. 2 F.O.	8491	Less than 20%	N/A	N/A	N/A	N/A	62-296.320(4)(b)	C.5.
			Natural Gas	8491	Less than 20%	N/A	N/A	N/A	N/A	62-296.320(4)(b)	C.5.
		SO ₂	No. 2 F.O.	8491	0.4% sulfur	N/A	N/A	97.4	413.5	AO37-242824	C.6.
			Natural Gas	8491	N/A	N/A	N/A	N/A	N/A	N/A	N/A
-003	Combustion Turbine No. 2 (446 MMBtu/hour)	VE	No. 2 F.O.	7071	Less than 20%	N/A	N/A	N/A	N/A	62-296.320(4)(b)	C.5.
			Natural Gas	7071	N/A	N/A	N/A	N/A	N/A	62-296.320(4)(b)	C.5.
		SO ₂	No. 2 F.O.	7071	0.4% sulfur	N/A	N/A	190.6	673.9	AO37-242824	C.6.
			Natural Gas	7071	N/A	N/A	N/A	N/A	N/A	N/A	N/A

E. U. ID No.	Brief Description	Pollutant Name	Fuel(s)	Hours/ Year	Allowable Emissions			Equivalent Emissions*		Regulatory Citation(s)	See Permit Condition(s)
					Standard(s)	lbs./hour	TPY	lbs./hour	TPY		
-031 & -032	Combustion Turbine HC3 & Combustion Turbine HC4 (434 MMBtu/hour - Oil) (445 MMBtu/hour - Gas) (50 MW each)	VE	No. 2 F.O.	4000	10%			N/A	N/A	0730003-005-AC	D.16.
			Natural Gas	5840	10%			N/A	N/A	0730003-005-AC	D.16.
		CO	No. 2 F.O.	4000	6.0 ppmvd @ 15% O2			6.35		0730003-005-AC	D.12.
			Natural Gas	5840	6.0 ppmvd @ 15% O2			6.27	36.9	0730003-005-AC	D.12.
		VOC	No. 2 F.O.	4000	3.0 ppmvd @ 15% O2			2.66		0730003-005-AC	D.17.
			Natural Gas	5840	3.0 ppmvd @ 15% O2			1.79	13.9	0730003-005-AC	D.17.
		SO ₂	No. 2 F.O.	4000	0.05%S	N/A	N/A	10.31		0730003-005-AC	D.28.
			Natural Gas	5840	2 gr S/100scf	N/A	N/A	1.13	43.4	0730003-005-AC	D.28.
		NOx	No. 2 F.O.	4000	5.0 ppmvd @ 15% O2			8.67		0730003-005-AC	D.13.
			Natural Gas	5840	5.0 ppmvd @ 15% O2			8.62	50.5	0730003-005-AC	D.13.
		SAM	No. 2 F.O.	4000	0.05%S	N/A	N/A	9.66		0730003-005-AC	D.13.
			Natural Gas	5840	2 gr S/100scf	N/A	N/A	1.15	40.8	0730003-005-AC	D.13.
		Amonia	No. 2 F.O.	4000	10.0 ppmvd @ 15% O2			1.6		0730003-005-AC	D.14.
			Natural Gas	5840	10.0 ppmvd @ 15% O2			1.6	9.32	0730003-005-AC	D.14.

Notes:

* The "Equivalent Emissions" listed are for informational purposes.

Table 2-1, Summary of Compliance Requirements

Table 2-1, Summary of Compliance Requirements

City of Tallahassee, Electric Utilities
Arvah B. Hopkins Generating Station

DRAFT/PROPOSED Permit No. 0730003-003-AV
Facility ID No. 0730003

This table summarizes information for convenience purposes only. This table does not supersede any of the terms or conditions of this permit.

E. U. ID No.	Brief Description	Pollutant Name or Parameter	Fuel(s)	Compliance Method	Testing Time	Frequency	Min. Compliance Test	CMS ¹	See Permit Condition(s)
					Frequency	Base Date ²	Duration		
-001	Boiler #1 -903 MMBtu/hour -Acid Rain Phase II Unit -75 MW generator	VE	No. 2 - No. 6 F.O. Natural Gas	DEP method 9 DEP method 9	Annually ³ N/A	7/1 - 9/30 7/1 - 9/30	60 Minutes 60 Minutes	No No	A.17., A.18., A.23, A.26., A.29.
		PM	No. 2 - No. 6 F.O. Natural Gas	17, 5, 5B or 5F 17, 5, 5B or 5F	Annually ³ Annually ³	7/1 - 9/30 7/1 - 9/30	1 Hour 1 Hour	No No	A.19., A.22. - 28., A.30.
		SO ₂	No. 2 - No. 6 F.O.	Fuel Sampling & Analysis				No	A.11., A.15., A.20., A.21.
004	Boiler #2 -2,325 MMBtu/hour - Oil -2,500 MMBtu/hour - Gas -Acid Rain Phase II Unit -238 MW generator	VE	No. 2 - No. 6 F.O. Natural Gas	DEP method 9 DEP method 9	Annually N/A	7/1 - 9/30 7/1 - 9/30	60 Minutes 60 Minutes	No No	B.22., B.23., B.28., B.31., B.34.
		PM	No. 2 - No. 6 F.O. Natural Gas	17, 5, 5B or 5F 17, 5, 5B or 5F	Annually ³ Annually ³	7/1 - 9/30 7/1 - 9/30	1 Hour 1 Hour	No No	B.24., B.27. - 33., B.35.
		SO ₂	No. 2 - No. 6 F.O.	Fuel sampling & analysis per Acid Rain Phase II commitment				No	B.11., B.16., B.25., B.26.
		NO _x	No. 2 - No. 6 F.O. Natural Gas	30 day rolling avg. 30 day rolling avg.	Continuous Continuous	N/A N/A	N/A N/A	Yes Yes	B.17., B.18., B.19.,
-002	Combustion Turbine No. 1	VE	No. 2 F.O.	EPA Method 9	Annually ³	7/1 - 9/30	30 Minutes	No	C.11., C.13. - 16.
-003	Combustion Turbine No. 2		Natural Gas	EPA Method 9	Annually ⁴	7/1 - 9/30	30 Minutes	No	
		SO ₂	No. 2 F.O.	Fuel Sampling & Analysis Provided by Vendor				No	C.9. & C.12.

E. U. ID No.	Brief Description	Pollutant Name or Parameter	Fuel(s)	Compliance Method	Testing Time Frequency	Frequency Base Date ²	Min. Compliance Test Duration	CMS ¹	See Permit Condition(s)
-031 & -032	Combustion Turbine HC3 & Combustion Turbine HC4 (434 MMBtu/hour - Oil) (445 MMBtu/hour - Gas) (50 MW each)	VE	No. 2 F.O. Natural Gas	EPA Method 9 EPA Method 9	Annually ³ Annually ⁴	7/1 - 9/30 7/1 - 9/30	30 Minutes 30 Minutes	No No	D.23. D.23.
		CO	No. 2 F.O. Natural Gas	EPA Method 10 EPA Method 10	Annually ³ Annually ⁴			No No	D.23. D.23.
		VOC	No. 2 F.O. Natural Gas	EPA Mtd. 25 or 25a EPA Mtd. 25 or 25a	Renewal Renewal			No No	D.17. D.17.
		SO ₂	No. 2 F.O. Natural Gas	Fuel Sulfur Sampling & Analysis Provided by Vendor Fuel Sulfur Sampling & Analysis Provided by Vendor				No No	D.28. D.28.
		NOx	No. 2 F.O. Natural Gas	EPA Mtd. 7e or 20 EPA Mtd. 7e or 20	Continuous Continuous	N/A N/A	N/A N/A	Yes Yes	D.21. & 22. D.21. & 22.
		SAM	No. 2 F.O. Natural Gas	Fuel Sulfur Sampling & Analysis Provided by Vendor Fuel Sulfur Sampling & Analysis Provided by Vendor				No No	D.15. D.15.
		Amonia	No. 2 F.O. Natural Gas	EPA Method 27 EPA Method 27	150 hrs 5000 hrs			No No	D.26. D.26.

Notes:

¹ CMS [=] continuous monitoring system.

² Frequency base date established for planning purposes only; see Rule 62-297.310, F.A.C.

³ Test not required in years that fuel oil is fired less than 400 hours.

⁴ If a combustion turbine is operated less than 400 hours per year, test is only required once every 5 years, during the year prior to permit renewal.

Friday, Barbara

From: Friday, Barbara
Sent: Tuesday, August 07, 2007 1:24 PM
To: 'McGarraR@Talgov.com'; 'PowellJ@talgov.com'; Bradburn, Rick
Cc: Holtom, Jonathan
Subject: DRAFT/PROPOSED Title V Permit Renewal No.: 0730003-011-AV - City of Tallahassee-Arvah B. Hopkins Generating Station
Attachments: 0730003.011.AV.P_pdf[1].zip

Dear Sir/Madam:

Please send a "reply" message verifying receipt of the attached document(s); this may be done by selecting "Reply" on the menu bar of your e-mail software and then selecting "Send". We must receive verification of receipt and your reply will preclude subsequent e-mail transmissions to verify receipt of the document(s).

The document(s) may require immediate action within a specified time frame. Please open and review the document(s) as soon as possible.

The document is in Adobe Portable Document Format (pdf). Adobe Acrobat Reader can be downloaded for free at the following internet site: <http://www.adobe.com/products/acrobat/readstep.html>.

The Bureau of Air Regulation is issuing electronic documents for permits, notices and other correspondence in lieu of hard copies through the United States Postal System, to provide greater service to the applicant and the engineering community. Please advise this office of any changes to your e-mail address or that of the Engineer-of-Record.

Thank you,

DEP, Bureau of Air Regulation

8/7/2007

Friday, Barbara

From: Exchange Administrator
Sent: Tuesday, August 07, 2007 1:25 PM
To: Friday, Barbara
Subject: Delivery Status Notification (Relay)

Attachments: ATT115955.txt; DRAFT/PROPOSED Title V Permit Renewal No.: 0730003-011-AV - City of Tallahassee-Arvah B. Hopkins Generating Station



ATT115955.txt DRAFT/PROPOSED
(363 B) Title V Permit ...

This is an automatically generated Delivery Status Notification.

Your message has been successfully relayed to the following recipients, but the requested delivery status notifications may not be generated by the destination.

McGarraR@Talgov.com
PowellJ@talgov.com

Friday, Barbara

From: Mcgarrah, Rob [McGarraR@talgov.com]
To: Friday, Barbara
Sent: Tuesday, August 07, 2007 1:40 PM
Subject: Read: DRAFT/PROPOSED Title V Permit Renewal No.: 0730003-011-AV - City of Tallahassee-Arvah B. Hopkins Generating Station

Your message

To: McGarraR@talgov.com
Subject:

was read on 8/7/2007 1:40 PM.

Friday, Barbara

From: Mcgarrah, Rob [McGarraR@talgov.com]
Sent: Tuesday, August 07, 2007 1:41 PM
To: Friday, Barbara
Cc: Powell, John
Subject: RE: DRAFT/PROPOSED Title V Permit Renewal No.: 0730003-011-AV - City of Tallahassee-Arvah B. Hopkins Generating Station

Tallahassee has received this

-----Original Message-----

From: Friday, Barbara [mailto:Barbara.Friday@dep.state.fl.us]
Sent: Tuesday, August 07, 2007 1:24 PM
To: Mcgarrah, Rob; Powell, John; Bradburn, Rick
Cc: Holtom, Jonathan
Subject: DRAFT/PROPOSED Title V Permit Renewal No.: 0730003-011-AV - City of Tallahassee-Arvah B. Hopkins Generating Station

Dear Sir/Madam:

Please send a "reply" message verifying receipt of the attached document(s); this may be done by selecting "Reply" on the menu bar of your e-mail software and then selecting "Send". We must receive verification of receipt and your reply will preclude subsequent e-mail transmissions to verify receipt of the document(s).

The document(s) may require immediate action within a specified time frame. Please open and review the document(s) as soon as possible.

The document is in Adobe Portable Document Format (pdf). Adobe Acrobat Reader can be downloaded for free at the following internet site:
<http://www.adobe.com/products/acrobat/readstep.html>.

The Bureau of Air Regulation is issuing electronic documents for permits, notices and other correspondence in lieu of hard copies through the United States Postal System, to provide greater service to the applicant and the engineering community. Please advise this office of any changes to your e-mail address or that of the Engineer-of-Record.

Thank you,

DEP, Bureau of Air Regulation

 This footnote confirms that this email message has been scanned by
 PineApp Mail-SeCure for the presence of malicious code, vandals & computer viruses.

8/7/2007

Friday, Barbara

From: Powell, John [PowellJ@talgov.com]
To: Friday, Barbara
Sent: Tuesday, August 07, 2007 1:28 PM
Subject: Read: DRAFT/PROPOSED Title V Permit Renewal No.: 0730003-011-AV - City of Tallahassee-Arvah B. Hopkins Generating Station

Your message

To: PowellJ@talgov.com
Subject:

was read on 8/7/2007 1:28 PM.

Friday, Barbara

From: System Administrator
To: Bradburn, Rick
Sent: Tuesday, August 07, 2007 1:37 PM
Subject: Delivered:DRAFT/PROPOSED Title V Permit Renewal No.: 0730003-011-AV - City of Tallahassee-Arvah B. Hopkins Generating Station

Your message

To: Bradburn, Rick
Subject: DRAFT/PROPOSED Title V Permit Renewal No.: 0730003-011-AV - City of Tallahassee-Arvah B. Hopkins Generating Station
Sent: 8/7/2007 1:37 PM

was delivered to the following recipient(s):

Bradburn, Rick on 8/7/2007 1:37 PM

Friday, Barbara

From: Bradburn, Rick
To: Friday, Barbara
Sent: Tuesday, August 07, 2007 1:47 PM
Subject: Read: DRAFT/PROPOSED Title V Permit Renewal No.: 0730003-011-AV - City of Tallahassee-Arvah B. Hopkins Generating Station

Your message

To: Bradburn, Rick
Subject: DRAFT/PROPOSED Title V Permit Renewal No.: 0730003-011-AV - City of Tallahassee-Arvah B. Hopkins Generating Station
Sent: 8/7/2007 1:37 PM

was read on 8/7/2007 1:47 PM.

Friday, Barbara

To: Bradburn, Rick
Subject: DRAFT/PROPOSED Title V Permit Renewal No.: 0730003-011-AV - City of Tallahassee-Arvah B. Hopkins Generating Station
Attachments: 0730003.011.AV.P_pdf[1].zip

Dear Sir/Madam:

Please send a "reply" message verifying receipt of the attached document(s); this may be done by selecting "Reply" on the menu bar of your e-mail software and then selecting "Send". We must receive verification of receipt and your reply will preclude subsequent e-mail transmissions to verify receipt of the document(s).

The document(s) may require immediate action within a specified time frame. Please open and review the document(s) as soon as possible.

The document is in Adobe Portable Document Format (pdf). Adobe Acrobat Reader can be downloaded for free at the following internet site: <http://www.adobe.com/products/acrobat/readstep.html>.

The Bureau of Air Regulation is issuing electronic documents for permits, notices and other correspondence in lieu of hard copies through the United States Postal System, to provide greater service to the applicant and the engineering community. Please advise this office of any changes to your e-mail address or that of the Engineer-of-Record.

Thank you,

DEP, Bureau of Air Regulation

8/7/2007