

United States
Environmental Protection
Agency

Region 4
345 Courtland Street, NE
Atlanta, GA 30308

EPA 904/9-79-044J
October 1979



Environmental Impact Statement

DRAFT

**Estech General Chemicals Corporation
Duette Mine
Manatee County, Florida**

AIR QUALITY

RESOURCE DOCUMENT

AIR QUALITY
RESOURCE DOCUMENT
Draft Environmental Impact Statement

Swift Agricultural Chemicals Corporation
Durette Mine Site
Manatee County, Florida

October, 1979

Prepared for: U.S. ENVIRONMENTAL PROTECTION AGENCY
Region IV
345 Courtland Street, N.E.
Atlanta, Georgia 30308

Prepared by: CONSERVATION CONSULTANTS, INC.
Post Office Box 35
Palmetto, Florida 33561

AIR QUALITY
RESOURCE DOCUMENT

TABLE OF CONTENTS

	Page
LIST OF TABLES	iv
LIST OF FIGURES	v
1. INTRODUCTION	1
1.1 Source and Emissions Descriptions	1
1.2 Relationship with Areawide Central Florida FEIS	2
2. METHODOLOGY	5
2.1 Temporary Impacts	5
2.2 Plant Operation Impacts	6
<u>Particulate Matter</u>	<u>6</u>
Proposed Particulate Matter Emissions	6
1977 Particulate Matter Baseline	7
PSD Increment Consumption	8
Post Construction (1982) Air Quality	9
<u>Sulfur Dioxide</u>	<u>10</u>
Proposed Emissions	10
Measured Sulfur Dioxide Baseline	10
Source PSD Increment Consumption	11
Conformance to NAAQS	12
<u>Nitrogen Oxides</u>	<u>12</u>
Proposed Emissions	12
Nitrogen Oxides Baseline	13
Source Contribution	13
Conformance to NAAQS	14
<u>Additional Impact Analysis</u>	<u>14</u>
3. POLLUTANT CONTROL SYSTEMS	16
3.1 System Selection - Rock Dryer	16
3.2 System Description - Rock Dryer	17
3.3 System Selection - Fugitive Dust Control	22
3.4 System Description - Fugitive Dust Control	23
3.5 Control Technology - Package Boiler	26
3.6 Control Technology - Natural Fugitive Dust Emissions	26
4. EMISSIONS ESTIMATES	28
4.1 Temporary Phase Daily Emissions	30

TABLE OF CONTENTS
(Continued)

	Page
<u>Site Preparation</u>	30
<u>Construction</u>	31
4.2 Plant Operation Phase Daily Emissions	31
<u>Mining</u>	31
<u>Wet Rock Storage</u>	32
<u>Rock Drying</u>	33
<u>Dry Rock Storage and Transfer</u>	36
<u>Transportation</u>	36
4.3 Plant Operation Emissions - Annual	36
5. PRECONSTRUCTION AIR QUALITY	39
5.1 TSP Measurement Results	41
5.2 Computed 1977 Baseline Determinations	48
<u>Long-Term (Annual) Baseline</u>	48
<u>Short-Term (24-hour) Baselines</u>	49
5.3 SO ₂ Measurement Results	51
5.4 Fluoride Measurement Results - Total	
Atmospheric	57
5.5 Fluoride Measurement Results - Total	
Vegetative	59
5.6 Area Nitrogen Dioxide Concentrations	61
6. POST CONSTRUCTION AIR QUALITY	64
6.1 Total Suspended Particulate	64
<u>Long-Term (Annual) Effects</u>	64
Proposed Source Effects	64
Increment Consuming Source Effects (PSD)	65
Projected Annual Particulate	
Concentrations (1982)	68
<u>Short-Term (24-hour) Effects</u>	68
Proposed Source Effect	70
Increment Consuming Sources (PSD)	72
Projected Short-Term Particulate	
Concentrations (1982)	74
6.2 Sulfur Dioxide	76
<u>Long-Term (Annual) Effects of Proposed</u>	
<u>Source</u>	77

TABLE OF CONTENTS
(Continued)

	Page
<u>Short-Term (24-hour) Effects of the Proposed Source</u>	77
6.3 Nitrogen Dioxide	78
<u>Long-Term (Annual) Effects of Proposed Source</u>	79
6.4 Effects on Soils and Vegetation	80
<u>Sulfur Compounds</u>	80
<u>Nitrogen Compounds</u>	81
<u>Phosphate Compounds</u>	81
<u>Fluorides</u>	81
<u>Radioactive Substances</u>	83
6.5 Effects on Visibility	83
<u>Photochemical Smog</u>	83
<u>Plumes</u>	84
<u>Wind Entrained Dust</u>	85
<u>High Relative Humidity Haze and Fog</u>	86
6.6 Secondary Growth Effect	86
BIBLIOGRAPHY	87
APPENDICES	89

AIR QUALITY
RESOURCE DOCUMENT

LIST OF TABLES

		Page
Table 4-A	Project Emissions (Pounds Per Day)	29
Table 4.2-A	Particulate Matter Projected vs. Modeled Emission Rates	34
Table 4.3-A	Estimates Annual Operating Emissions (Tons Per Year)	37
Table 5.1-A	Annual TSP Summary for 1977-78	42
Table 5.1-B	Log TSP Concentration - Frequency Estimates for 1977-78	46
Table 5.3-A	Annual SO ₂ Summary for 1977-78	53
Table 5.3-B	Log SO ₂ Concentration - Frequency Estimates for 1977-78	55
Table 5.4-A	Annual Total F _{atm} Summary for 1977-78	58
Table 5.5-A	Maximum Observations - Total F _{veg}	60

AIR QUALITY
RESOURCE DOCUMENT

LIST OF FIGURES

	Page
Figure 3.2-1 Process/Control System Flowsheet Phosphate Rock Dryers	18
Figure 3.4-1 Silo Storage and Reclaim Fugitive Dust Control Systems	24
Figure 3.4-2 Dry Rock Loading Fugitive Dust Control System	25
Figure 5-1 SACC Monitoring Sites	40
Figure 5.1-1 1977-78 Total Suspended Particulate, SACC Station S-1, Log Concentration vs. Frequency of Occurrence	45
Figure 5.2-1 Annual 1977 Total Suspended Particulate Baseline	50
Figure 5.2-2 Short-Term (24 Hour) 1977 TSP Baseline at Locations of Maximum Proposed Source Influence	52
Figure 6.1-1 Long-Term (Annual) Effects of Proposed Source Particulate Emissions	65
Figure 6.1-2 Long-Term (Annual) Effects of Increment Consuming Source Particulate Emissions	67
Figure 6.1-3 Projected Long-Term (Annual) Effects of All Stationary Source Particulate Emissions	69
Figure 6.1-4 Short-Term (24 Hour) Effects of Proposed Source Particulate Emissions	71
Figure 6.1-5 Short-Term (24 Hour) Effects of Increment Consuming Source Particulate Emissions	73
Figure 6.1-6 Projected Short-Term (24 Hour) Effects of all Stationary Source Particulate Emissions	75

NOTE:

Effective August 1, 1979, Swift Agricultural Chemicals Corporation changed its name to Esteche General Chemicals Corporation.

The preparation of the Draft Environmental Impact Statement was substantially completed at the time of the name change. Therefore, the name of Swift Agricultural Chemicals Corporation (Swift) is used throughout the Draft Environmental Impact Statement and all attendant Resource Documents.

AIR QUALITY RESOURCE DOCUMENT

1. INTRODUCTION

1.1 Source and Emissions Descriptions

The proposed mining activity may be expected to contribute both primary and secondary air quality effects. Primary effects will be contributed by the two year period of construction and approximate 20 year life of the available phosphate deposit. Secondary effects will be contributed by population, commercial, and industrial development induced by the proposed project.

Air pollution emissions during the construction period are varied and include increased contributions of natural soil dusts which are produced by disturbance of the land surface. Such emissions are characteristically similar to natural and agricultural emissions of the preconstruction period. Other pollutant sources are construction machinery and vehicles, and the resulting emissions are products of fuel combustion.

Operating emissions are primarily related to the phosphate rock drying, storage and loading operations, but also include fugitive dust contributions from land clearing and reclamation activities. The dust contribution is near identical in character to construction emissions except that the dusts originate from different geologic strata. Primary emissions from the rock dryers and associated facilities are very fine clay and phosphate rock dusts and by-products of the combustion of fuel oil, e.g., sulfur dioxide, nitrogen oxides, and carbon monoxide. Control

of these emissions is achieved by confining and collecting the pollutant gases and passing them through collection devices.

As the combined emissions are sufficient to qualify the proposed mine as a major emitting source, the source is subject to Prevention of Significant Deterioration (PSD) regulations. The regulations require preconstruction monitoring of pollutant levels, application of Best Available Control Technology (BACT), and control of emissions to insure that PSD concentration increments are not exceeded. This analysis of project air quality examined environmental impact in a manner consistent with the Prevention of Significant Deterioration objectives and includes the results of preconstruction monitoring efforts, control equipment selection, and mathematical modeling exercises to project future air quality conditions and effects of the proposed development.

1.2 Relationship with Areawide Central Florida FEIS

The proposed action received a broad environmental review in the Areawide Central Florida Phosphate Industry FEIS (EPA, 1978A). This impact analysis defined the proposed action as permitting existing and new sources with incorporation of process modifications.

One modification upon which impacts were based was chemical processing of wet, rather dry rock within the seven county study area. However, for the portion of rock processed within the region, fertilizer plant modifications will require considerable time and capital expenditure. For some fertilizer processes, technical feasibility of the assumed modification remains questionable. The definition of the proposed action did not presuppose that rock exported from the seven county area would also be subjected to

wet processing. Hence, there would be a reduction in the quantity of rock dried over an extended period of time and not necessarily a total elimination of the phosphate rock drying process.

The proposed facility reflects the assumed direction of events by shipment of a portion of production capacity to a wet rock processing facility within the FEIS study area, but is also committed to shipments of dry product.

Since the FEIS study was undertaken, important study assumptions relative to air quality were mitigated by a significant action of the U. S. Congress. The Clean Air Act Amendments of 1977 required the application of Best Available Control Technology (BACT) to all significant sources and source modifications which had potential to deteriorate air quality. Air quality effects consequential to the FEIS proposed action were based upon greater allowable source emission rates than would subsequently be permitted by U. S. EPA Prevention of Significant Deterioration (PSD) Regulations. For example, study assumptions for particulate matter were limited by allowable emission rates provided in the Florida Administrative Code (F.A.C. 17-2.05, 2, Process Weight Table). This rule would permit particulate emissions substantially greater than allowed under the PSD Regulations. A conclusion of the FEIS proposed action was that the phosphate industry pollutant contribution would remain relatively constant after 1977. Provided that the mining rates were not dramatically increased, the PSD Regulations suggest that the pollutant contributions should decrease as new processing facilities are constructed and older less efficient control equipment is abandoned and replaced with new technology.

An implied assumption of the FEIS proposed action was that air quality would tend to seek levels within the national standards in a relatively uncontrolled fashion, and that clean air areas might be substantially degraded as mining activities moved toward the South. By establishing maximum increments of allowable deterioration the PSD Regulations effectively restrict availability of the air resource. Once the available resource is consumed by competing interests, no significant additional source effect can be permitted without a corresponding reduction in effect from another source. Thus, the objective of the FEIS proposed action has been achieved with an alternate, enforceable and pervasive system of air quality controls that exert influence over all major source contributions, rather than the contributions of only one industrial sector.

2. METHODOLOGY

Analysis of the proposed facility was separated into two major sub-categories of temporary (construction-related) and operational (mining-related) activities for convenience of both analysis and discussion.

2.1 Temporary Impacts

Temporary Impacts are related to the two year facilities construction schedule and will vary both in character and quantity depending on type and intensity of construction activity. Pollutant emission rates were estimated for the project construction phase as an element of the state regional planning approval process (DRI, 1978). The estimates were prepared using the AP-42 EPA Compilation of Emission Factors (EPA, 1973) as a recognized uniform source of emission factors for the various construction activities planned. Being generalized in nature, the estimates for individual activities may include some inaccuracies. However as a group, they are considered to provide a reasonable projection of total pollutant emissions accompanying construction of a major project as proposed in this action.

Prevention of Significant Deterioration (PSD) Regulations generally provide for exclusion of temporary construction emissions from consumption of PSD increment. However, for the proposed development, maximum annual pollutant emissions were determined from daily estimates and all were found to be well below the PSD general emission criterion of 250 tons per year. The construction emission estimates also enabled comparison with modeled operating emissions to assure that ambient standards would not be adversely affected during the construction period.

2.2 Plant Operation Impacts

Primary operating emissions include particulate matter relating to the rock drying, storage, and loadout operations, and fugitive dust contributions from both land clearing and reclamation activities. Other significant emissions are by-products of both internal and external combustion of fuel oils and include sulfur dioxide, nitrogen oxides, and carbon monoxide.

Particulate Matter - Emissions of particulate matter from rock drying-related operations are in excess of 100 tons per year and the controlled emissions are projected to be in excess of 50 ton per year. This fact establishes the proposed operation as a major source of particulate matter emissions defined under the Prevention of Significant Deterioration (PSD) Regulations. Major source status requires that a complete Air Quality Review be performed to quantify both PSD increment consumption and conformance to federal air quality standards (NAAQS). For the case of particulate matter, the analysis of air quality effects was confined to stationary source emissions. Reasons for exclusion of non-stationary emissions include regulatory provisions for the exclusion of natural fugitive dusts from the review, spatial variability of the emissions with time, and certain physical characteristics of the emissions which are discussed in more detail in the next section.

The following information was developed to complete the required Air Quality Review.

Proposed Particulate Matter Emissions: Proposed source emissions of particulate matter were computed from allowable emission rates included in draft Best Available Control Technology (BACT) applications (BACT, 1979), manufacturers' design/performance data, and proposed operating parameters

included in draft PSD construction permit applications (PERMITS, 1979). These allowable source emissions were added to an inventory of surrounding stationary source emissions for completion of other portions of the air quality review.

1977 Particulate Matter Baseline: The 1977 Baseline was constructed by preparation of an emissions inventory describing actual source emissions as of the date of passage of the 1977 Clean Air Act Amendments (August 7, 1977) with appropriate adjustment for increment consuming sources (constructed after January 6, 1975). The inventory comprised approximately 275 sources in Hillsborough, Polk, Manatee, Sarasota, and Hardee Counties. As the total number of sources in the area of interest were significantly greater than 275, a set of source selection criteria were used to make the inventory and modeling effort more manageable. The final inventory included all sources within a 30 kilometer radius and all sources emitting greater than 50 ton per year of particulate matter extending to a 50 kilometer radius. Smaller sources were treated as adding with predominating natural fugitive emissions to form the background pollutant concentration.

A second element of Baseline information was a thorough analysis of Total Suspended Particulate data gathered as part of a preconstruction monitoring program. These data were used to check preconstruction air quality against ambient standards and to develop estimates of short and long term background concentrations.

The 1977 inventory was used to generate annual and short-term (24-hour) estimates of 1977 Baseline stationary source particulate matter contributions using the AQDM and PTMTP-W air quality models. Baseline contributions

were estimated for maximum property boundary locations, locations of "worst case" impact irrespective of property limits and other points of interest. AQDM estimates were prepared from the latest available 5 year meteorological summary (Star program, 1969-73) and PTMTP-W estimates were prepared using "worst case" meteorology developed from the CRSTER program (TD-1440) for the period 1970-74. "Worst case" meteorology corresponded with the day on which the proposed source combined with interacting increment-consuming sources to produce highest, second highest contributions at two primary points of interest. (Note: the 24-hour baseline at other locations, e.g., population centers, etc., would be dependent on source/receptor geographical relationships and accompanying meteorological patterns, and does not enable a "worst case" ambient level projection.) 1977 Baseline values were computed by addition of source contributions to a background concentration determined from measurements at the site.

PSD Increment Consumption: A source inventory of allowable emissions for 33 increment consuming sources was prepared.

Long-term increment consumption was determined for property boundaries, the point of maximum combined source effect, and other points of interest by computation. The increment-consuming source contributions were extracted from post construction (1982) AQDM source contribution listings for user specified receptors. (Note: inasmuch as the concentration gradient is very slight in the proposed mine area, relatively little error in the increment consumer maximum point location is introduced by this modeling simplification.)

Directional "worst case" meteorology output by the CRSTER model for 1970-1974 was used in conjunction with the PTMTP-W model to estimate short-term

(24-hour) increment consumption. "Worst case" meteorology was developed and examined for approximate distances which maximized upwind source effects and proposed source effects, and for distances which maximized effect at the property boundary and the maximum point irrespective of property boundary. The applicable "worst case" from this array of "worst case" meteorologies was used to project increment consumption at the property boundary and point of maximum effect irrespective of property boundary.

The effect of upwind source groupings was treated by determination of a line of maximum impact through upwind sources of similar geographic location. The line was determined using the PTMTP-W model with the source group as input. Representative worst day, worst hour CRSTER meteorology was rotated through the source group to determine the wind direction which produced highest concentration.

Post Construction (1982) Air Quality: A projection of the first year of operation (1982) annual and short-term air quality was prepared for comparison with the state and national standards (NAAQS) for particulate matter. The inventory used for the 1982 projection relied upon either allowable emissions or growth projections developed from a study of area emissions performed for EPA (PEDCo, 1977). The growth projection scheme was applied because production capacity of most sources is limited by factors other than regulated air pollutant emissions. Many sources do not have the potential to attain emission rates allowed by state process weight regulations without some modification of existing Operation Permits. An exception to the growth projection scheme was electrical power facilities which were estimated at 100 percent allowable for both

annual and short-term analysis. Annual and short-term 1982 source contributions were projected for maximum property boundary locations and locations of worst impact by the same methods used for increment consumers except that source inventories were significantly expanded. Post construction air quality was determined by addition of source contributions to background levels determined from measurements at the site.

Sulfur Dioxide - The projected total project emission of sulfur dioxide is less than 50 tons per year, and would ordinarily allow a reduced level of review under current regulations. However, since the annual rate was very close to the 50 tons per year limit, sulfur dioxide emissions were subjected to a screening level of analysis. The approach used was more sophisticated than the Guidelines for Air Quality Maintenance Planning and Analysis, Volume 10 (Revised), Procedures for Evaluating Air Quality Impact of New Stationary Sources (EPA, 1977), and considered sufficient to expose any possible need for a more detailed modeling analysis of Sulfur Dioxide effects.

Proposed Emissions: The greatest portion of sulfur dioxide emissions are contributed by the rock dryers and small package boiler, however, there are additional contributions from non-stationary diesel equipment used for land clearing and reclamation (see Table 4-A). The non-stationary emissions will originate from several and spacially variable areas of activity within the sixteen plus square miles enclosed by the mine boundaries. Effects of such emissions are extremely difficult to estimate and can only be treated by the use of simplifying assumptions.

Measured Sulfur Dioxide Baseline: An approximate baseline for 24-hour and annual averaging times was constructed from an analysis of sulfur dioxide

measurements conducted at the site for a period of approximately one year. This time period conforms closely with the August 7, 1977 Baseline defined in PSD regulations, however, it also includes the effect of increment consuming sources which would ordinarily not be a part of the 1977 Baseline. The measured air quality baseline, however, is still of some practical use for evaluating future compliance with ambient air quality standards (NAAQS).

Source PSD Increment Consumption: In principle, proposed source contributions to annual sulfur dioxide concentrations were determined by use of a factor of proportionality between sulfur dioxide emissions and nitrogen oxide emissions. These factors were then applied to modeled AQDM nitrogen oxide concentrations to determine corresponding sulfur dioxide concentrations. For computational convenience, the portion of the sulfur dioxide emissions contributed by non-stationary sources (e.g., earthmoving equipment, diesel trucks, etc.) was assumed as an area source approximated by several virtual point sources. The area source size was equivalent to one year of mining activity and the area was located along a property boundary where maximum stationary source effect would occur. Short-term analysis was performed using the PTMTP-W computer code with worst case (highest, second highest) CRSTER meterology developed for the particulate matter analysis. For convenience, non-stationary emissions were assumed to be a virtual point source at the location of dry rock loadout stations. The short-term virtual point source assumption tends to superimpose and maximize downwind effect of these spacially separated activities.

The relationship with increment consumption was evaluated on the basis of preconstruction air quality measurements at the site which included the existing effect of all sources. This approach was based upon the

reasoning that if all existing sources plus the proposed source did not exceed the allowable increment, then the relatively small fraction of sources defined as increment consumers would not reasonably contribute to future exceedance of the allowable Class II PSD increments.

Conformance to NAAQS: Potential for exceedance of NAAQS was evaluated by addition of the proposed source effect to the measured baseline. Since the PSD regulations will tend to prevent any substantial increase in future pollutant concentrations, the existence of a substantial margin, e.g., greater than 50 percent of the standard, with the new source in operation was considered to adequately demonstrate conformance with NAAQS.

Nitrogen Oxides - The total project emission of nitrogen oxides is estimated to exceed 100 tons per year and the PSD regulations require a demonstration that the ambient air quality standards (NAAQS) will not be exceeded if the source is constructed. An analysis of proposed source effect was examined using the AQDM analysis described above for analysis of annual sulfur dioxide effects.

Proposed Emissions: The major portion of nitrogen oxide emissions are contributed by stationary external combustion processes in the rock dryers and small package industrial boiler (see Section 4). However, a significant quantity of nitrogen oxides are also contributed by non-stationary diesel machinery, e.g., railroad locomotives, trucks, and earthmoving equipment. The non-stationary emissions will originate from several distinctly separate areas of activity, e.g., land clearing, reclamation, etc., in a manner identical to non-stationary emissions of other pollutants, but are distinct in that they will exhibit fairly rapid conversion to other pollutant forms

by various atmospheric photochemical reaction processes. Effects of these individually small and spacially variable emissions can only be evaluated by simplifying approximations.

Nitrogen Oxides Baseline: The analysis of potential nitrogen dioxide effect relied partially on measurements of nitrogen dioxide conducted at a location approximately 6 miles (9.5 kilometers) west of the proposed 16+ square mile site (about half the distance to the FP&L Manatee electric power generating station). Since some anomalous differences were observed in sulfur dioxide measurements between the nitrogen oxide measurement site and the proposed mine site, the measurements were only considered reflective of generally low nitrogen dioxide concentrations in the area surrounding the point of measurement. On the basis of source geography, other area measurements of nitrogen dioxide, and that the remote source criteria for annual nitrogen dioxide concentration would also be satisfied, it was assumed that the annual guideline level (20 micrograms per cubic meter) could be utilized as a conservative estimate of nitrogen dioxide baseline in the area of the proposed mine (see Section 5.1 for additional discussion relating annual background and baseline levels).

Source Contribution: The source contribution to annual nitrogen oxide concentrations was determined for comparison with the PSD significance level (1 microgram per cubic meter, annual average) and NAAQS (100 micrograms per cubic meter, annual average). The estimate of source effects was performed using the AODM model with the same 1969-73 meteorological input used for other analyses. Non-stationary source emissions were estimated as an area source (i.e., virtual point source approximation) for an area equivalent to one year of mining activity (315 acres). The area

source was located adjacent to the property boundary to maximize effect of diesel earthmoving equipment. Effect was evaluated for a condition with the north and south reclamation crews operating on a single tract of land. This method is considered to conservatively overestimate non-stationary source effects as diesel equipment will probably be spread over much larger areas than the area chosen for analysis, particularly when the draglines become separated by a distance of several miles.

Conformance to NAAQS: Potential for exceedance of the NAAQS was evaluated by addition of the proposed source effect to the assumed baseline concentration. Since PSD regulations will tend to prevent any substantial future increases in pollutant concentrations, the existence of a substantial margin, e.g., greater than 50 percent of the standard, with the new source in operation would be considered to adequately demonstrate conformance with NAAQS.

Additional Impact Analysis - The PSD regulations also require an analysis of impairment to visibility, adverse effect on soil and vegetation of significant commercial or recreational value, and the secondary effect of general commercial, residential, industrial and other growth associated with the proposed development.

Visibility impact was evaluated in terms of the fine particulate emissions and the water vapor plume expected to accompany dryer operations.

The presence of both soluble and insoluble fluorides in phosphate rock was the impetus for preconstruction monitoring of atmospheric and vegetative fluorides at the site. These data were reviewed, summarized to indicate baseline levels, and evaluated in terms of possible influence from

existing phosphate operations to the North and Northeast of the proposed site. The character of the proposed operation and source emissions were reviewed and discussed in terms of potential for increased fluoride levels for adjoining citrus, produce, and cattle growing interests.

The potential for growth in other sectors that would contribute secondary degradation of air quality were considered in terms of employment and commercial needs of the proposed project. Impacts were predicated on historical attitudes of the area labor force and support services.

3. POLLUTANT CONTROL SYSTEMS

The pollutant control systems discussed below are the primary mitigative measures to be applied to air pollutants generated by the proposed activity.

3.1 System Selection - Rock Dryer

Constraints imposed by Prevention of Significant Degradation (PSD) and Best Available Control Technology (BACT) resulted in selection of wet scrubber control technology for the proposed phosphate rock dryers. This selection was influenced by a decision to remove not only particulate matter, but also a substantial quantity of sulfur dioxide that may accompany the process of drying phosphate pebble and concentrate products.

Important factors considered in the selection process included system energy requirements, capital and operating costs, projected availability of low sulfur fuel oil, system capability to effectively remove both particulate and gaseous pollutants, and the character of the gases exiting the phosphate rock dryers.

As part of the BACT process, dry collection systems were also examined for this application. While fabric collectors and electrostatic precipitators could offer comparable particulate collection efficiencies, they did not offer the benefit of simultaneous collection of sulfur dioxide desired for this application. Other disadvantages of dry systems were the requirement for special materials of construction, i.e., non corrosive steels, special fabrics, etc., to guard against rapid system deterioration by corrosive pollutant gases and potential for serious operating and maintenance problems.

For the special case of fabric collectors, it was determined that the dryer exit gases would require direct fired preheating with an estimated increase in fuel consumption of 96 gallons per hour and additional sulfur dioxide, nitrogen oxides and carbon monoxide loadings. Along with preheating the wet dryer exit gases, extensive insulation and a temperature control system is required to insure against the formation of condensation and resultant catastrophic destruction (blinding) of costly fabric bags used in the collector. Expansion of the gases with increased temperature also requires that the system provide significantly greater air handling capacity. Of major significance, use of a baghouse on an oil-fired process has considerable potential to result in chronic bag blinding problems with a potential for prohibitive maintenance cost. One major supplier of fabric filter control equipment declined to submit a baghouse collector performance proposal for this reason. Another problem was determination of a suitable fabric for use in the dryer exit gases. Another major fabric filter supplier exhausted available fabric alternatives and appeared unable to offer an alternate fabric filter collector that would be practical for the application.

3.2 System Description - Rock Dryer

As discussed elsewhere in this study of the proposed facility, two fluidized bed dryers are planned for drying 262 ton per hour each (dry basis) of phosphate rock from 13 to 2 percent moisture (see Figure 3.2-1). The dryers remove (transfer) moisture by passing heated air through the ¹ fluidized bed of rock. The air is heated by combustion of fuel oil in the air stream directly before entering the fluidized bed. Larger size, heavier components of product exit the fluidized bed dryer to a product conveyor, and the smaller lighter components are carried over with

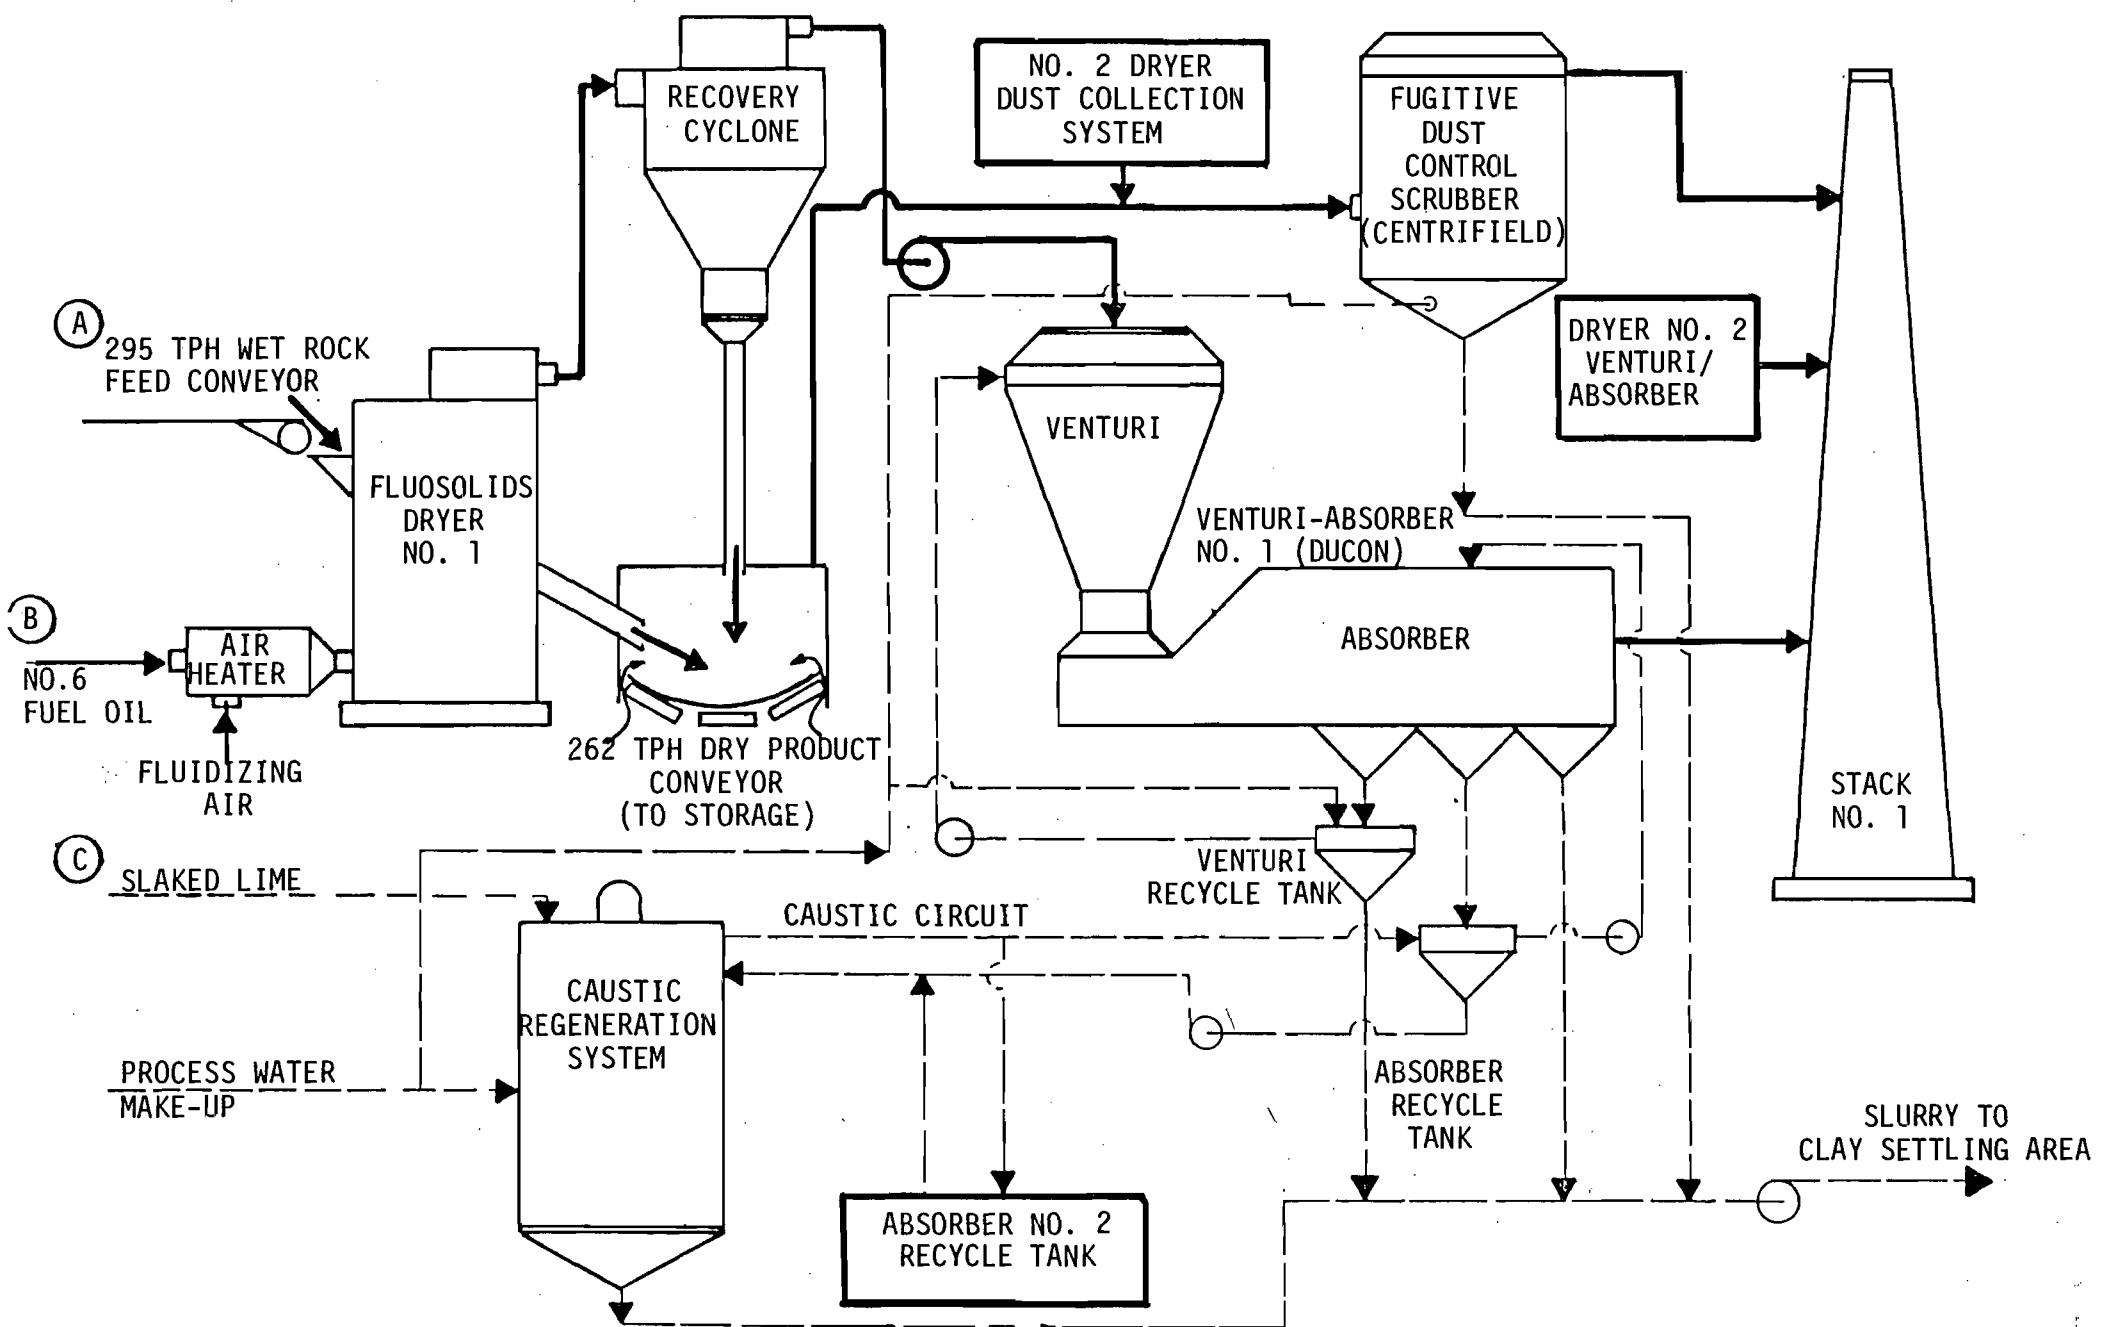


Figure 3.2-1 Process/Control System Flowsheet Phosphate Rock Dryers

the fluidizing air through product recovery cyclones which remove economically recoverable product from the gas stream. Product recovered by the cyclones is also discharged to the product conveyor. The remaining hot gas stream contains considerable moisture and conveys residual particulate and gaseous contaminants to the pollution control device. The contaminant laden gas is routed through a wet scrubber before exiting to the atmosphere through a stack 60 feet in height.

Pollutants in the phosphate dryer exit gas stream originate from both the phosphate rock product and fuel used to dry the rock. Two forms of particulate matter may be present — phosphate rock and clay dusts. The relative proportions of these dusts are dependent on the product form.

Pebble rock typically provides the greatest proportion of fine particulate clay dust (EPA, 1978; EPA, 1973) and while pebble represents a relatively small portion of the total product processed through the drying system, the included clay particulate effectively determines control system requirements. Phosphate dust is primarily contributed by mechanical abrasion of product in the handling of wet rock fed to the dryer, and to a less significant degree by attrition in the fluidized bed drying process. Particulate matter (dusts) are removed in the wet scrubbing device by imparting sufficient energy to spray water droplets and particles so that they collide. The resultant larger, heavier water droplets containing particulate matter are more easily collected by inertial and gravitational settling and are returned to a spray liquid reservoir. Make-up water is continuously added to the reservoir and discharge water containing particulate matter is drawn from the reservoir to maintain a low solids concentration in the recycle spray water. The discharge water, a slurry of water and particles, joins with other control equipment discharges and

is pumped to clay settling areas so that the water component can be recovered for reuse. The largest proportion of particles not removed in the collection device are less than 2 micron diameter size and more than one half are sub-micron sizes (EPA, 1976).

A contaminant problem associated with the particulate dusts is a radioactive component. This pollutant potential is treated fully in the radiation section of this study.

Sulfur oxides are contributed by sulfur contained in the fuel oil which is burned to dry the rock. The proportion converted to sulfur dioxide is related to sulfur concentration, combustion conditions, i.e., temperature, excess air, etc., and possibly also to the presence of trace contaminants in the fuel. Measurements conducted by SACC (SACC, 1978) suggest that a substantial portion of the sulfur dioxide is removed in the fluidized bed by suspected reactions with natural constituents in the phosphate rock, e.g., limestone. A part of the proposed system control technology will be use of low sulfur residual fuel oil containing a maximum of 1.0 percent sulfur by weight. Additional removal is a inherent benefit of a wet collection system, but in the proposed control system a reagent will be added to the spray water to substantially increase removal of sulfur oxides. The reagent will be either calcium hydroxide or a double alkali system comprising an inner, recycle loop of sodium hydroxide and a regenerative circuit of calcium hydroxide. In either case the system discharge slurry will mostly contain an insoluble calcium sulfite/sulfate precipitate so that it can be disposed with particulate matter discharges and the water also reclaimed for process use.

Nitrogen oxides are contributed both by nitrogen contained within the fuel and, to some extent, chemical combination of nitrogen and oxygen contained

in air supplied to burn the fuel. Nitric oxide formation is a complex function of flame temperature/time characteristics in addition to the relative quantities of nitrogen and oxygen available to complete the reaction. Inasmuch as the dryer systems are designed for the purpose of direct air heating, an inherent control feature is a rapid quenching of the combustion gas temperature as soon as all the fuel is combusted. This temperature reduction helps to minimize nitric oxide generation. A more direct control technique will be purchase specification control of fuel nitrogen content to a maximum of 0.3 percent nitrogen by weight. Some removal is expected in the venturi-absorber control devices, possibly in the range of 10 to 20 percent, but engineering estimates of removal efficiency are not possible without experimental testing of prototype control devices by manufacturers of control equipment. Nitrogen oxides removal is a matter that has only just started to receive attention by much of the standard design or "package" wet scrubber manufacturing industry.

The relatively low temperature (230°F) at which phosphate rock is dried does not cause appreciable generation of gaseous fluoride, but it is recognized that relatively small quantities are produced. The presence of trace fluoride concentration is of chief concern for the selection of materials in control devices, e.g., potential for destruction of glass fabric filter materials. While the actual emission rate is generally considered negligible (EPA, 1978B), the proposed wet scrubber system design is optimized for collection of gaseous constituents and is expected to remove some of any gaseous fluoride that may be generated in the dryers.

3.3 System Selection - Fugitive Dust Control

The term dry rock is misleading in the respect that dry rock contains a nominal two percent moisture and is typically handled at temperatures ranging somewhat below 200°F to near the 230°F fluidized bed operating temperature. This remaining unbound two percent moisture continually evaporates from the rock during handling, storage, and loading operations and creates a problem both for material handling and associated fugitive dust collection systems. During cooler weather this moist air may condense in the system to produce blockage in the dust collection system ducts. One alternative is the addition of heat, but as discussed previously, the disadvantages are extra fuel requirements, generation of additional pollutants, e.g., sulfur dioxide, nitrogen oxides, carbon monoxide, and ash, and expansion of gas volumes which result in the need for larger capacity control devices. The need for installation of heating equipment is aptly illustrated by the experience of Gardinier at Fort Meade (CCI, 1979). Bag-houses were installed to control fugitive dust emissions from storage silos and silo loading facilities. The filter bags quickly plugged with mud and were destroyed. The result of that experience was a manufacturer's recommendation that air heating equipment be installed to cure the problem, but the operator considered the cost of air heating to be so great that the entire control system was abandoned.

The proposed system plans to overcome this operating problem with design improvements and the introduction of water sprays in collection system ducts (Toalster, B. and C. D. Turley, 1977). The duct spray systems insure against collection system blockage at relatively low energy cost and effectively provide a first stage removal of particulate matter within

the collection system. The combined flow of dust laden, moist gases, and spray liquid will pass through efficient wet scrubber systems to remove a high percentage of the remaining particulate matter before the gases are returned to the atmosphere through stacks. Again in this instance, moisture in the control system gases is an important factor constraining control system selection.

3.4 System Description - Fugitive Dust Control

Figures 3.4-1 and 3.4-2 are schematic layouts of the materials handling, dry rock storage and rail car loading operations. Fugitive dust control systems are proposed from the point of dry product discharge at the dryers and recovery cyclones to and including the point where product enters railroad hopper cars. Belts conveying product between intermediate transfer points will be fully enclosed to prevent wind erosion of dusts during handling. All transfer points, e.g., belt to belt, belt to hopper, etc., will be enclosed with hoods designed to prevent escape of fugitive dust by introducing proper rates of inflow air through all necessary openings in the hoods. Storage silos and loadout bins will be exhausted during loading operations to prevent any escape of fugitive dusts by air displacement. Specially designed loading spouts will be used at hopper car loading hatches with sufficient air inflow capacity to collect displaced air and to provide sufficient inflow air to prevent the escape of fugitive dusts from the hatch openings. All inflow air will be exhausted through fugitive dust collection system ducts and routed to air pollution control systems.

The fugitive dust collection and control systems will be centered at the dryers, storage silos, and railroad car loading facilities, and will

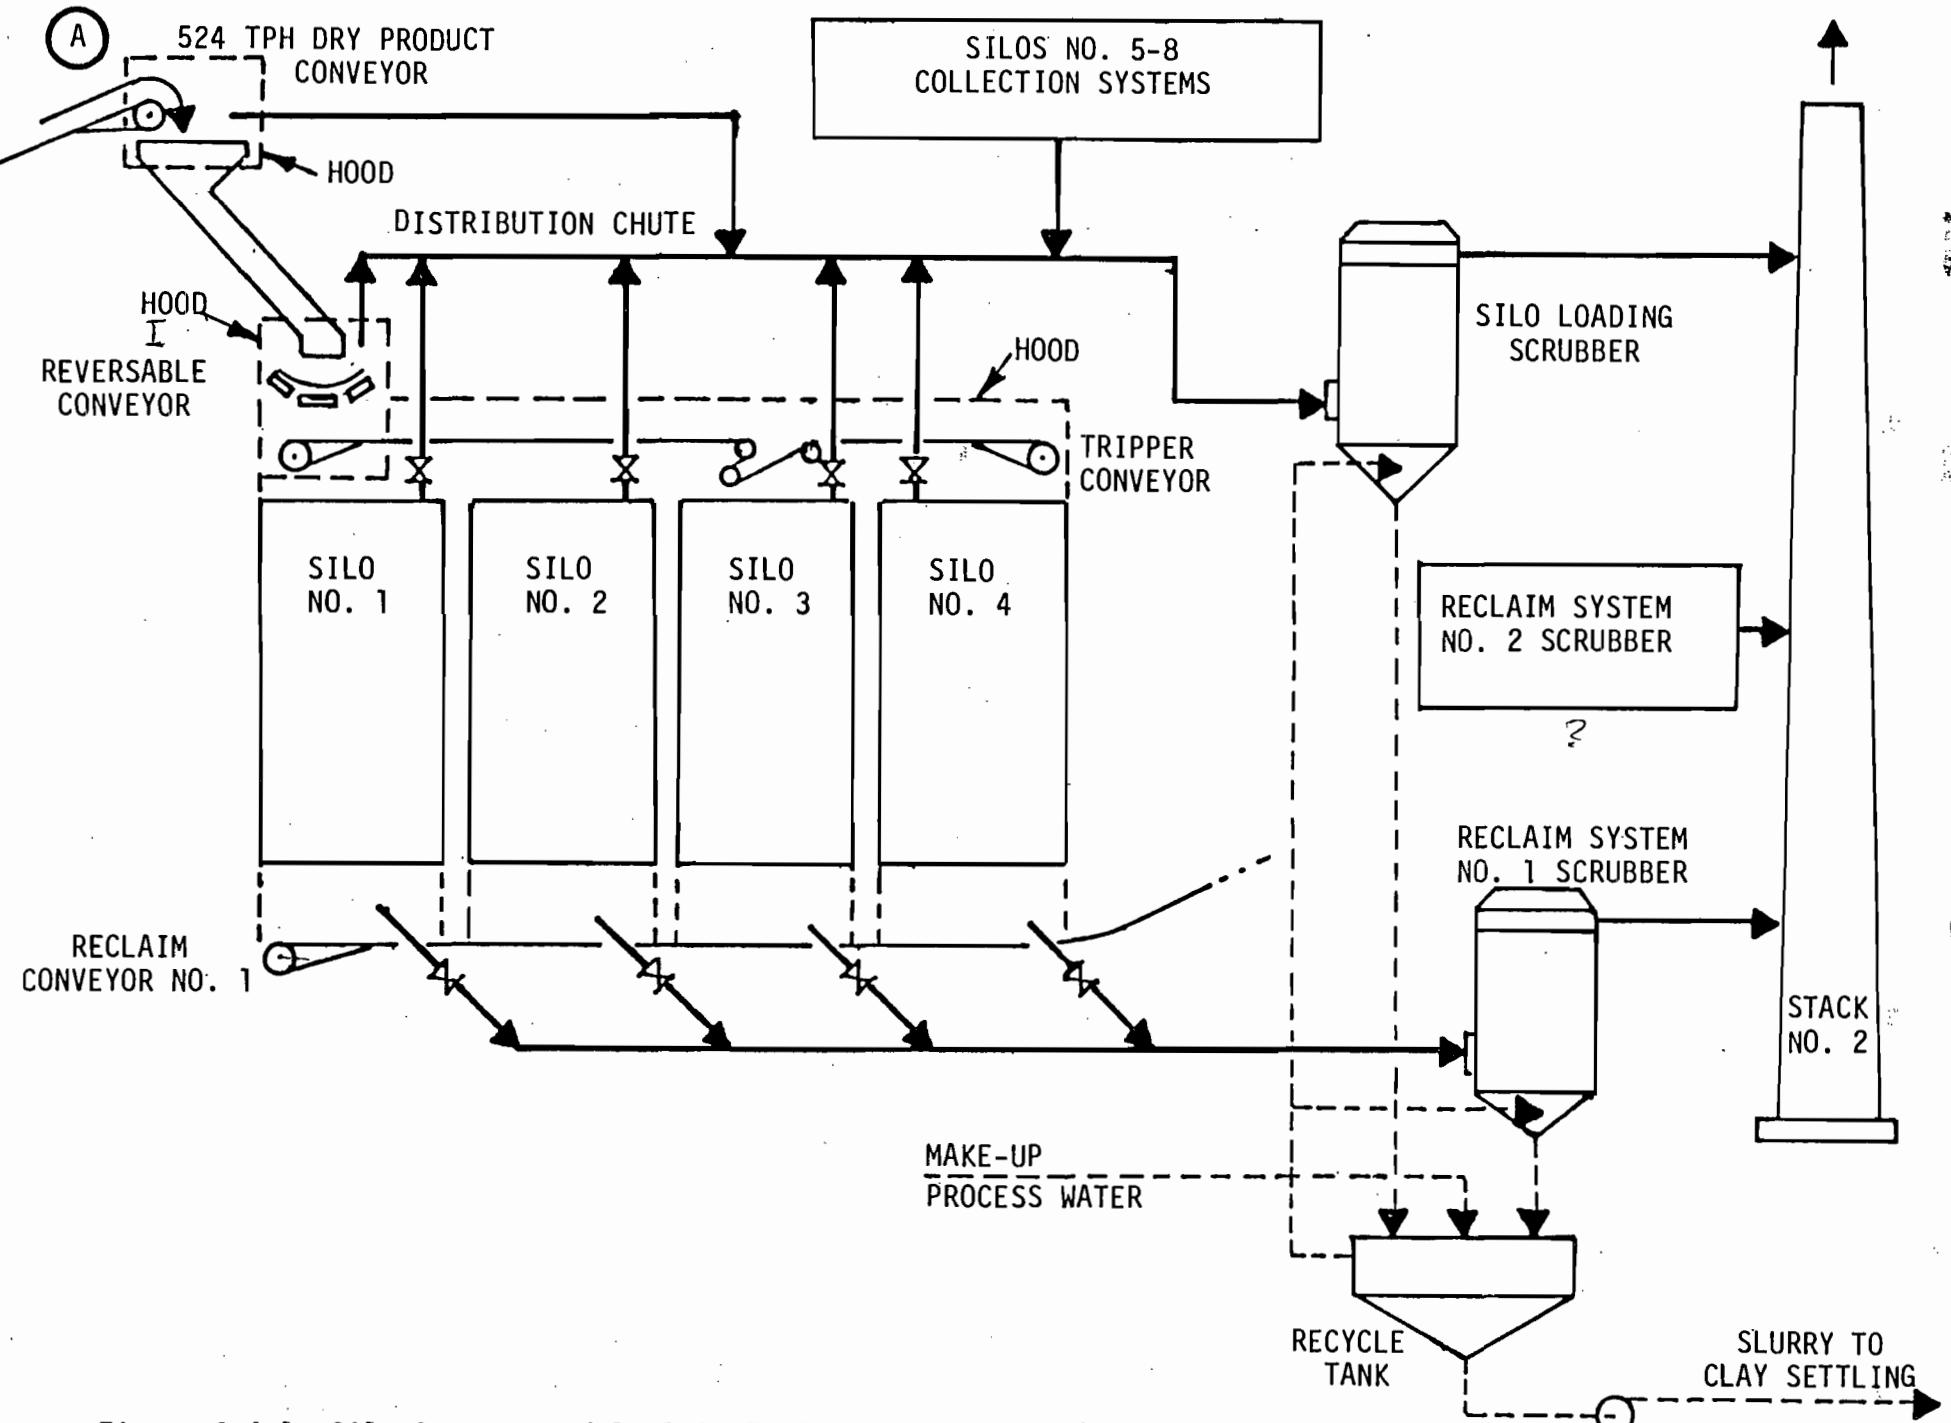


Figure 3.4-1 Silo Storage and Reclaim Fugitive Dust Control Systems

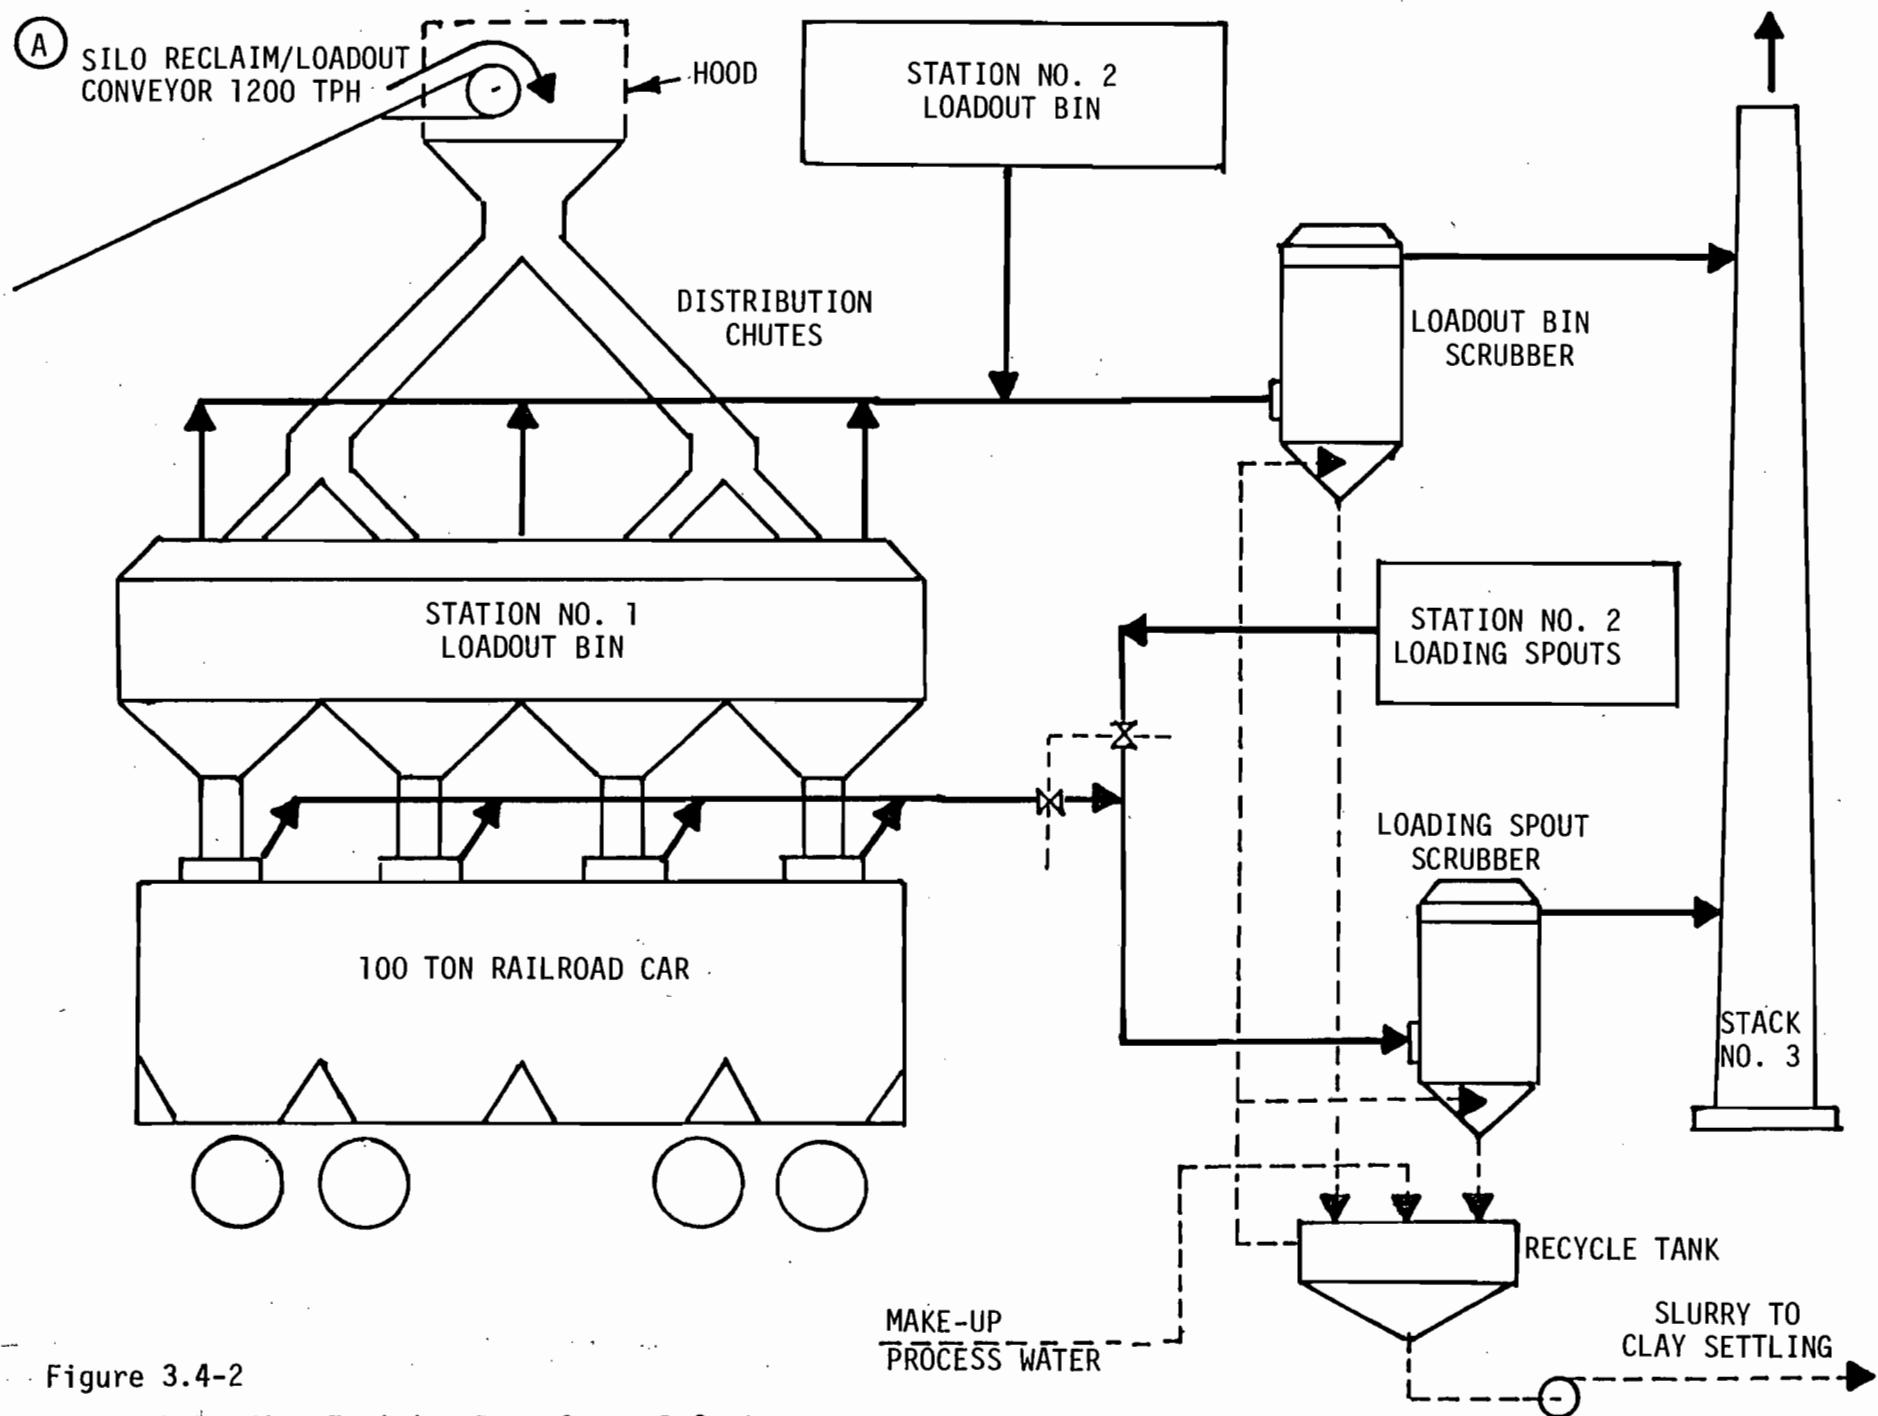


Figure 3.4-2

Dry Rock Loading Fugitive Dust Control System

comprise a total of six wet scrubbers serving various portions of the operations. Stacks will be located at each of the major locations to exhaust cleaned air back into the atmosphere. Emissions from the fugitive dust control system will be limited to fine phosphate rock and clay particles having characteristics identical to those described in the previous section. Where water use volumes are significant, recycle spray systems will be included both to conserve water use and to minimize water supply and discharge pump energy requirements. Discharge slurries of water and particles will join with discharges from the dryers for disposal to clay settling areas and for recovery of the process water component.

3.5 Control Technology-Package Boiler

A 100 horsepower boiler is required to generate steam for heating reagent and fuel oil storage tanks and primary potential emissions are sulfur dioxide and nitrogen oxides.

The proposed unit is a relatively small boiler and while combustion control techniques are recognized, e.g., low excess air, flue gas recirculation, etc., to control nitrogen oxide emissions, application of such technology appears impractical for reasons of physical size. Instead, the proposed control method is to use low sulfur distillate fuel oil. Since the chemically bound nitrogen in low sulfur distillate fuel oil is typically a very low value, this control method combined with the routine maintenance of proper burner combustion conditions should insure the lowest practical emission of nitrogen oxides.

3.6 Control Technology - Natural Fugitive Dust Emissions

Natural fugitive dust emissions may be expected to accompany land clearing, mining and land reclamation activities. A smaller component will be contri-

buted by relatively low volume vehicular travel over temporary, unpaved roadways which lead to these areas of activity.

Control of emissions during earthmoving operations is impractical for obvious reasons, but it is proposed that inactive, exposed soil areas will be provided with interim vegetative cover, e.g., seeded with grass, as soon as practical after mining is completed. Natural crusting of the soil surface combined with vegetative cover should minimize reentrainment of deposited fugitive dusts and tend to prevent appreciable saltation type movement to areas outside of the project boundaries. The approach to fugitive dust control on temporary mine access roadways will include water spraying during all periods when visible emissions become evident. Where practical, safe, and cost effective, dust suppressant or binder chemicals will be applied to more permanent roadway sections to maintain as near dust free surface conditions as such methods will permit.

4. EMISSION ESTIMATES

Daily estimates of temporary (construction) and plant operation (mining-related) emissions were prepared for the Development of Regional Impact/Application for Development Approval (DRI, 1978) and some of the estimates are reproduced in Table 4-A. As the facility design has evolved and improved since submission of the DRI, revisions and corrections were completed where necessary.

Significant changes were incorporated in the Mining and Processing Phase. The changes to mining estimates are the result of a decision to bury all vegetative matter. The previous approach envisioned burning a maximum of 5 percent vegetative matter during the land clearing operation and would have resulted in a major contribution to operating carbon monoxide emissions. Changes in the dryer emissions are a result of the application of newer technology and the influence of BACT in selection of control technology. The increase in nitrogen oxides is a refinement of the estimate based upon field measurements on a similar, existing fluosolids phosphate rock dryer. Reductions in the Transportation category relate to elimination of one railroad switching engine and reduction of the overall use factor. The reductions relate to a decision to use a cable car puller to position railroad cars at the two dry rock loading stations.

Plant construction estimates comprise several elements, each a major activity period within a span of two years. As the duration of the individual elements may be only six months to one year, all values taken together display a daily worst case representation with all activities overlapping at one point in time. The plant operation estimates were developed for a typical full activity period within the early years of the mining program.

Table 4-A Project Emissions (Pounds Per Day)

Phase/Pollutant	TSP	Fugitive Dust	HC	NO _x	SO ₂	CO	Gaseous Fluoride
Temporary/Construction							
Site Preparation	80	--	110	20	nil	660	--
Construction	<u>60</u>	<u>550^a</u>	<u>90</u>	<u>1,000</u>	<u>60</u>	<u>460</u>	--
	TOTAL 140	550^a	200	1,020	60	1,120	--
Operation/Mining and Processing							
Mining	10	850 ^a	--	156	77	50	--
Wet Rock Storage	--	1,350 ^{a,b}	--	--	--	--	--
Dryers	551	nil	37 ^c	1,819 ^d	206	185 ^c	1
Dry Rock Storage and Transport	279	nil	--	--	--	--	--
Transportation (auto/truck/R.R.)	<u>3</u>	<u>--</u>	<u>20</u>	<u>46</u>	<u>6</u>	<u>108</u>	--
	TOTAL 843	2,200^{a,b}	68^c	2,021	289	343^c	1

a Refer to text. Fugitive dust emissions include a substantial weight percent of coarse particulate matter (unlike dryer emissions) that will redeposit relatively close to the point of emission.

b Analysis of product particle size suggests methodology produces substantial overestimation (99.98% > 40 µm).

c Pollutant loadings generated by fuel combustion process for equivalent industrial boiler capacity. Reduced generation and/or removal may be expected in fluidized bed dryers and wet scrubbing devices.

d Based on field measurements conducted on a similar fluosolids dryer.

All values presented in Table 4-A, are best estimates based upon reasonable projections, assumptions and available computational methodologies. Where developed from projection methodologies, the individual estimates represent generalizations for similar applications under a fairly wide range of field conditions and, as such, may tend to overestimate or underestimate actual emissions for any one facility. However, taken as a group the estimates are considered to provide a best possible projection of construction and operation emissions.

Fugitive dust and TSP emissions are not directly comparable and are listed separately for that reason.

Fugitive dust emissions include a relatively large weight percentage of large diameter particulate that is not present in TSP emissions. A substantial portion of these emissions may be expected to redeposit to the ground surface relatively close to the point of emission and as the mine site encloses approximately 14,000 acres of land, much of the fugitive dust will return to undisturbed ground surface within the site. After deposition, the particulate will be subjected to various physical phenomena and exhibit resuspension characteristics not appreciably unlike natural soil particles. As such, the magnitude of these emissions may be misleading for a project of the proposed scope.

4.1 Temporary Phase Daily Emissions

The Plant Construction phase was divided into two subcategories to aid quantification and description of emissions.

Site Preparation - Site preparation includes emissions produced by land clearing operations and the limited open burning of vegetative matter. It is proposed that a maximum of five percent (5%) of the vegetative materials

will be burned and the balance disposed by burial. Estimates of combustion-related emissions were developed from factors provided in the AP-42 Compilation of Emissions Factors (EPA, 1973) and estimates of proposed land clearing rates developed from mining plans.

Construction - Physical construction activities will contribute fugitive dusts and fuel combustion emissions from construction equipment and vehicles. The fugitive dust emissions relate to a combination of vehicle and construction equipment movement and wind erosion of disturbed open ground surfaces. The tabulated value for fugitive dusts is based on AP-42 construction emission factors and typical acreages of active construction.

Fuel combustion emissions account for the balance of values tabulated under the construction subcategory. These emissions include automotive vehicle, construction equipment, and railroad contributions. They were estimated using AP-42 emission factors for automobiles, construction equipment, and railroad switching engines in combination with appropriate measures of utilization, i.e., vehicle miles traveled (VMT), projected fuel consumption, etc.

4.2 Plant Operation Phase Daily Emissions

Mining and processing operations were similarly divided into manageable subcategories for estimation purposes.

Mining - The mining operation requires land clearing and produces relatively large areas of disturbed soil surface. Since generalized fugitive dust estimation methodology for mined and partially reclaimed land has not been developed because of the specialized nature of the activity, alternative

estimation techniques were investigated. A factor complicating the determination of a fugitive dust contribution is the unavailability of data describing wind erosion emissions from exposed encrusted soil surfaces in contrast with naturally vegetated or agricultural land surfaces. Inasmuch as the dragline and reclamation operations may be considered a significant portion of such emissions and these activities are comparable to earthmoving associated with plant construction, the AP-42 factors for construction were applied to typical, in-process exposed ground areas.

The fuel combustion emission values tabulated under mining include emissions from earthmoving equipment at the mining and reclamation sites. Emission estimates for this equipment were developed from projections of fuel consumption and emission factors provided in AP-42. Since the draglines operate on electricity, they will not directly contribute fuel combustion emissions at the mine site.

A small 100 horsepower package industrial boiler is the only stationary pollutant source in the mining and ore beneficiation process. This boiler is required to generate steam for heating flotation reagents and fuel oil. Boiler emissions are estimated from AP-42 emission factors (EPA, 1973) and included under the mining category.

Wet Rock Storage - The matrix and phosphate rock is processed as a wet slurry throughout the beneficiation process so that the only significant potential for fugitive dust emissions is from the wet rock storage pile. These emissions relate primarily to wind erosion from the relatively dry surface of the pile. Material loaded onto the pile contains approximately thirteen percent (13%) moisture so that the stacking operation

is considered to contribute very slightly to the total emissions. The tabulated value for wet rock storage was prepared from AP-42 aggregate storage pile emission factors and typical tonnages processed through the wet rock storage cycle, however, the value is considered to be a substantial overestimation of storage emissions.

Rock Drying - The proposed two 262 Ton per hour (dry basis - 2 percent moisture) rock dryers are primary sources for emission of particulate matter. Each dryer will be equipped with a wet scrubbing device to control particulate emissions in conformance with an approved Best Available Control Technology (BACT) and Prevention of Significant Deterioration (PSD) application. Emissions tabulated in Tables 4-A and 4.2-A are computed from the allowable BACT emission rate, control equipment manufacturer design/performance data, and maximum operating time factors.

'It should be noted that in some instances the values listed are less than the values actually used in modeling air quality impact of the source. This difference relates to the inability of model input data requirements to accommodate daily and annual operating factors for actual plant activities.'
As such, some of the models tend to significantly overestimate air quality effects.

As detailed in the System Description Section, fuel oil is burned in the dryers to generate heated gas which is passed through the wet phosphate rock to remove moisture. The fuel contains sulfur which is mostly converted to sulfur dioxide during the process of combustion. As indicated in Section 3, it has been found that substantial quantities of the generated sulfur dioxide are removed from the combustion gases as they pass through

Table 4.2-A Particulate Matter Projected vs. Modeled Emission Rates

Description	Stack	MAXIMUM EMISSION RATES					MODEL EMISSION RATES					
		Gm/Sec	Lb/Hr	Lb/Day	Ton/Day	Ton/Yr	AQDM (Annual)	Ton/Day	Ton/Yr	Gm/Sec	Lb/Day	Ton/Yr
Dryers	1	2.889	22.93	550	0.275	85.36	0.234	85.36	2.889	550	100.43	85.36
Silo Storage and Reclaim	2	1.101	8.74	185	0.093	28.67	0.079	28.67	1.101	210	28.28	36.40
R.R. Car Loadout	3	0.728	5.77	92	0.046	< 11.55	0.031	11.55	0.728	139	25.31	11.54
Boiler	4	0.007	0.057	1.4	0.001	0.25	0.0001	0.25	0.007	1.4	0.25	0
TOTALS		4.725	37.50	828 +++	0.415	125.61 *****	0.344	125.61 *****	4.725	900 +++	154.27	133.30 *****

fluidized bed dryers and wet collection devices. The removals suggested that existing systems were frequently marginal with respect to an annual emission rate of 50 ton. As intended by the PSD regulation (F.R., 1978), the wet scrubbing system has been designed to specifically remove residual sulfur dioxide to a rate consistently below 32 ton per year. The controlled emissions represents a 96.5 percent reduction in comparison to the amount of sulfur dioxide that would be emitted if the same quantities of 1 percent sulfur fuel were burned in an industrial oil-fired boiler.

Fuel oil burned in the dryers contribute nitrogen oxide emissions in two ways. The fuel oil contains a small percentage of chemically bound nitrogen which is converted to nitric oxide during the combustion process. Air supplied to support combustion contains nitrogen and some of this nitrogen is also converted to nitric oxide. The contribution of nitrogen oxides was determined by AP-42 estimation methodology and field measurements performed on an existing fluosolids dryer of similar size and design. Measurements were undertaken to compare with emission estimates computed for industrial boilers of equivalent fuel (heat) input. Dryer design suggested potential for reduced generation and possibly some nitric oxide removal in the moist bed of phosphate rock. While such effect was not appreciable, the observed difference is suspected to relate to fairly rapid quenching of the flame temperatures in the dryer windbox and possibly trace reaction of nitric oxide with calcium carbonate present in the phosphate rock. However, an examination of sulfur dioxide and nitrogen oxide test results suggests that reaction with the limited calcium carbonate constituent in phosphate product is preferential for the more abundant and reactive sulfur dioxide that is present in the fluidizing gas stream.

The balance of the dryer emissions in Table 4-A were developed from AP-42 emission factors for industrial boilers of similar heat input. It should be noted that the use of boiler emission factors may produce some inaccuracies, but it is the best available estimation methodology.

Dry Rock Storage and Transfer - As described in greater detail in the fugitive dust control system description, potential fugitive dust emissions from dry rock will be controlled throughout the dry rock handling and storage process. Particulate matter emissions will be controlled with wet scrubbing devices in conformance with approved Best Available Control Technology (BACT) and Prevention of Significant Deterioration (PSD) applications. Emissions in Tables 4-A and 4.2-A are computed from the maximum allowable BACT emission rate, control equipment manufacturers design/performance data, and maximum operating time factors for the various operations included.

Transportation - Transportation emissions include all vehicular and railroad emissions related to mine operation. Estimates are based on daily vehicle miles traveled (VMT) on the mine site and switching engine fuel consumption. These estimates were combined with AP-42 emission factors to produce the tabulated values for fuel combustion emissions.

4.3 Plant Operation Emissions - Annual

Estimates of aggregate annual pollutant emissions for plant operation are displayed in Table 4.3-A. Estimates were developed from the emissions data used for preparation of Table 4-A and on expected annual operating factors for each of the activities included. Land clearing, reclamation, and railroad activities were assumed to be operational 250 days per year.

Table 4.3-A Estimated Annual Operating Emissions (tons per year)

ACTIVITY	TSP ^b	HC ^a	NO _x ^a	SO ₂ ^b	CO ^a	F _g ^b
Mining	1.3	1.6	20.4	13.5	6.4	---
Wet Rock Storage	---	---	---	---	---	---
Dryers	85.4	5.8 ^c	282.2	32.0	28.8 ^c	0.2
Dry Rock Storage and Transport	40.2	---	---	---	---	---
Transportation (auto/truck/R.R.)	0.4	3.1	6.3	0.8	18.9	---
TOTAL	127.3	10.5 ^c	308.9	46.3	54.1 ^c	0.2

a Potential Emission

b Controlled Emission

c Pollutant loading estimate based on AP-42 industrial boiler emission factors. Reduced generation, conversion and/or removal expected in fluidized bed dryer.

Vehicular activity was assumed operational 365 days per year. Dryer-related emissions were based upon maximum annual use supplied in construction permit applications (PERMITS, for each of the emitting facilities.



Fugitive Dust Emissions have been omitted from the annual estimates partly for reasons already discussed in Sections 2.2 and 4.0. Other than apparent reduced potential for air quality effect outside of mining site, fugitive emissions also receive different treatment in PSD regulations (F.R., 1978). While these emissions may qualify a source as a major emitting source (which is already established by stationary source emissions), there is a provision for their exclusion from the impact analysis until a satisfactory technical basis is established to accurately quantify the effects of these emissions.

5. PRECONSTRUCTION AIR QUALITY

Preconstruction air quality at the proposed project location was determined from measurements and for the case of suspended particulate, by modeling (estimation) methods in accordance with the Prevention of Significant Deterioration (PSD) regulations.

A one year measurement program commenced in the spring of 1977 and concluded in the summer of 1978 with the purpose of measuring preconstruction ambient concentrations of total suspended particulate matter (TSP), sulfur dioxide (SO_2), atmospheric fluorides (F_{atm}) and vegetative fluorides (F_{veg}). Measurement locations are indicated in Figure 5-1, and monitoring results are furnished in Appendix A.

Since the proposed emissions of particulate matter qualify the proposed activity as a major source requiring full PSD review, the regulations require determination of 1977 Baseline TSP concentrations. 1977 Baseline (preconstruction) concentrations are defined by regulation as the ambient concentration level reflecting actual air quality as of August 7, 1977, less any contributions from major stationary sources which commenced construction after January 6, 1975. The latter are charged against available PSD increment. A consequence of the definition is that the 1977 Baseline is an abstract quantity which although reflective of measured air quality could not be physically measured during the period preceding August 7, 1977. However, ambient measurement programs are also required by the PSD regulations to serve as a means to "track" or check the quality of modeling estimates and insure that the National Ambient Air Quality Standards (NAAQS) will not be exceeded in any given area.

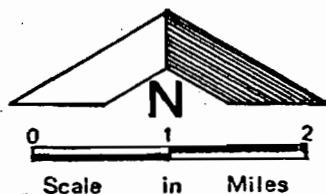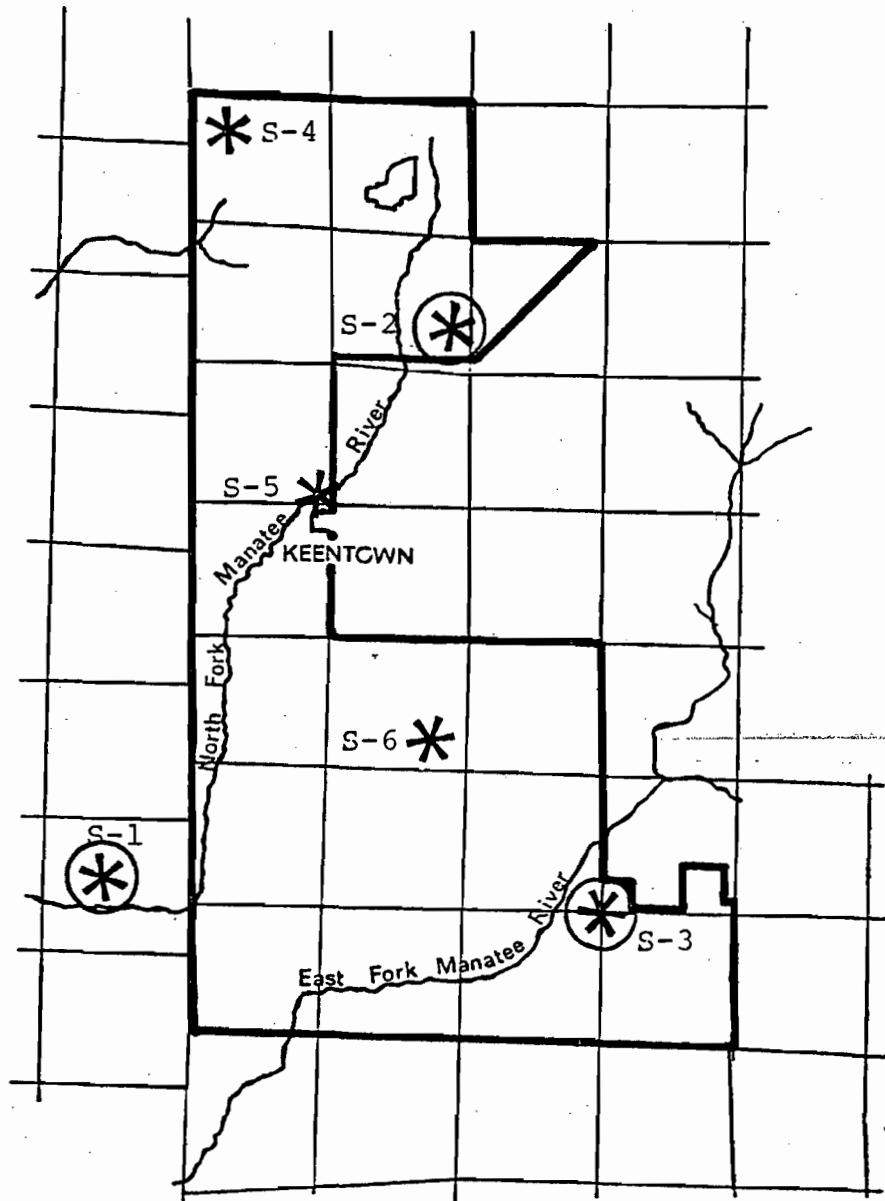

PRIMARY SITE $TSP_1, SO_2, F_{atm}, F_{veg}$

SECONDARY SITE F_{veg}

5.1 TSP Measurement Results

Measurements of suspended particulates were conducted at three locations in the general vicinity of the proposed mine site as displayed in Figure 5-1. All measurements were performed using High Volume samplers in accordance with the suspended particulate measurement reference method (40 CFR 50, Appendix B). Measurements were conducted on a six day interval corresponding to schedules observed by state and federal regulatory agencies.

Summary statistics for one year of concurrent measurements at the three monitoring locations are compared with applicable air quality standards in Table 5.1-A, below. The actual measurements and accompanying meteorological history are included in Appendix A. A maximum 24-hour observation of 122 micrograms per cubic meter and a maximum second highest observation of 110.4 micrograms per cubic meter occurred at Station 3. The second value compares with federal primary and state 24-hour ambient air quality standards of 260 and 150 micrograms per cubic meter, respectively. The highest annual geometric mean among the three stations was 29.2 micrograms per cubic meter. The federal primary and state annual standards are 75 and 60 micrograms per cubic meter, respectively.

Qualifications are included for some of the listed values as they were believed to result from extraordinary or coincidental occurrences, e.g., wind from a dusty dirt road, agricultural burning, et cetera. If Station 3 data were adjusted for these localized effects, comparability between statistics at all three sites would be somewhat improved. Lower values at Station 2 are believed to result from two effects — the site was most remote from localized dust producing activities, e.g., unpaved roadways, cultivated agricultural lands, etc., and problems with station

Table 5.1-A Annual TSP Summary for 1977-78

Station	Minimum 24-Hr Average	Maximum 24-Hr Average	Second Maximum 24-Hr Average	Annual Geometric Mean
S-1	9	95	84 ^a	25.1
S-2	6	44	41	20.0
S-3	12	122 ^b	110 ^c	29.2
NAAQS				
Primary			260	75
Secondary			150	60
Florida Standard			150	60

Note: Values in Micrograms per Cubic Meter

-
- a) Elevated value attributed to agricultural burning at numerous nearby locations, next second highest value = 54 micrograms per cubic meter.
 - b) Maximum value attributed to strong gusty winds predominantly from the direction of a nearby dirt road.
 - c) Next second highest value = 76 micrograms per cubic meter attributed to agricultural burning (see ^a), next second highest value = 64 micrograms per cubic meter.

operation interrupted the measurement sequence during some periods when high values were measured at Stations 1 and 3.

For the year of record, the measured annual geometric means suggest relatively low background concentrations. The Environmental Protection Agency (EPA, 1978) suggest assumption of 30 to 40 micrograms per cubic meter as background level for remote sources in areas where measurements have not been conducted. A remote source is considered one which has no other significant stationary sources within its air quality impact area.

A question of comparability between the computed annual geometric mean and background level deserves some consideration. Ideally, background levels are ambient concentrations which are not influenced by surrounding stationary source emissions, and from a modeling standpoint, a level to which external stationary source effects are added in order to compute an ambient concentration. Inasmuch as modeling indicates that surrounding sources do influence TSP concentrations at the proposed site, the annual geometric means include external stationary source effects and, hence, are a measure of ambient concentrations that are somewhat above true background levels. Consequently, it can be concluded that the annual ambient background levels are somewhat less than indicated by the measured geometric mean concentrations in Table 5.1-A, but that the geometric means offer a useful estimate of background. The statistical geometric means in Table 5.1-B, were selected for this purpose in order to be consistent with the determination of a 24-hour background value. The arithmetic average of the annual geometric means (statistical) was computed for the three monitoring stations and the result, 25 micrograms per cubic meter, judged to be a reasonable approximation of the annual background concentration for the proposed mine area.

The daily (24-hour average) measurements were conducted every sixth day so that the monitoring devices may not have operated on days when higher concentrations were present. Larson (EPA, 1971) provides a statistical methodology for projection of probable maximum 24-hour concentrations had the sampling been conducted each day of the year. Measurements at each of the three TSP monitoring stations were analyzed by this method (Figure 5.1-1 and Appendix B) and results are presented in Table 5.1-B. The goodness of fit of the data set to the regression line is measured by the coefficient of correlation r , which if perfect would equal unity. Correlation exceeded 0.97 in all cases.

The projected largest second highest value was 113.5 micrograms per cubic meter, however, deletion of the questionable measurement discussed above (Table 5.1-A) produces a highest, second highest projection of 110.5 micrograms per cubic meter which compares more favorably with projections at Stations 1 and 2. The arithmetic average of the three second highest projections, 84 micrograms per cubic meter, serves as an estimate of the short-term Baseline for the period of measurement. Since this period coincides quite favorably with the August 7, 1977 PSD date, this value may be considered as one possible estimate of the 1977 Baseline. The results suggest that the highest, second highest concentration was less than 100 micrograms per cubic meter in the general area of the proposed mine and while localized effects may occasionally be expected to produce higher levels, the data suggest that these occurrences may be associated with emissions of natural fugitive dust from unpaved roadways and routine or infrequent agricultural activities such as cultivating or burning.

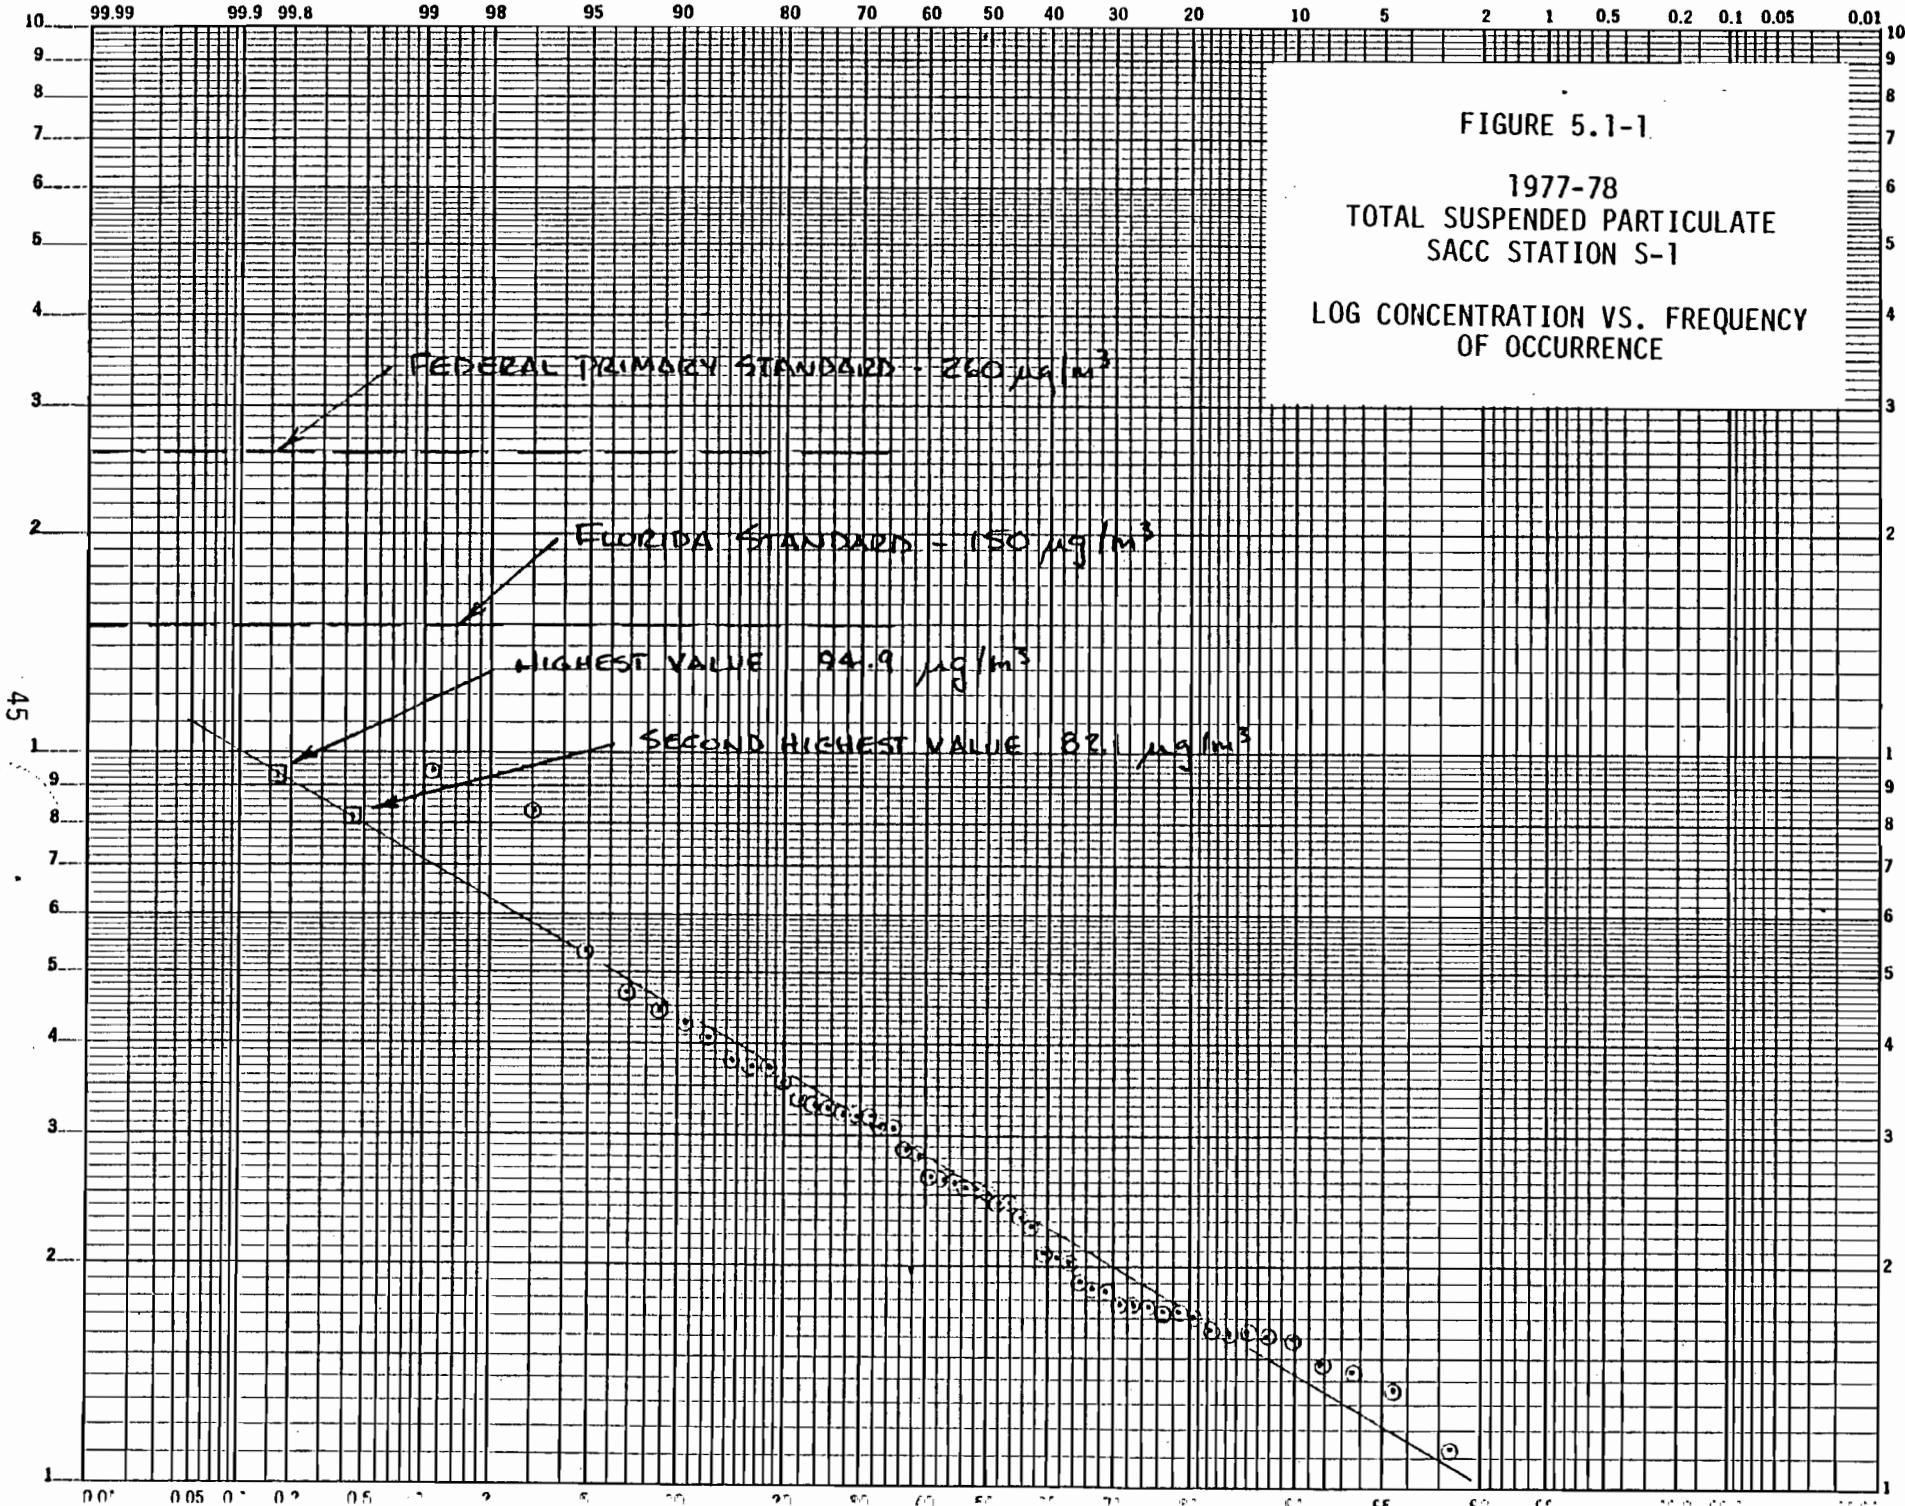


Table 5.1-B Log TSP Concentration - Frequency Estimates for 1977-78

Station	Correlation Coefficient "r"	Second Maximum 24-Hour Average	Annual Geometric Mean	Annual Arithmetic Mean
S-1	.98	82.1	25.2	27.9
S-2	.97	68.6	20.1	22.5
S-3	.98 (.99)	113.5 (100.5) ^a	28.6 (27.7) ^a	32.9 (31.3) ^a
Average		83.7	24.3	
NAAQS				
Primary		260	75	(None)
Secondary		150	60	(None)
Florida Standard		150	60	(None)

Note: Values in Micrograms per Cubic Meter

-
- a) Excluding measurement of 121.5 micrograms per cubic meter corresponding to gusty winds predominantly from the direction of a nearby dirt road.

Subsequent analysis of air quality impact requires a determination of short-term or 24-hour background in addition to the annual background concentration. Various opportunities are afforded for selection of a value, for example, one possibility is the maximum or average of all observations when the wind was primarily from a direction other than a known source, or a more simplified method is application of the EPA Guideline (EPA, 1978C) for remote sources which assumes that the background concentrations are uniform throughout the year and that the stated 30-40 micrograms per cubic meter range would apply to both annual and 24-hour averaging times. The first would be extremely laborious, and the second, a possible oversimplification for the case under consideration. One recent impact analysis (EPA, 1978B) selected the 95 percentile concentration as a best estimate of 24-hour background concentration. The choice is a complex one involving judgements concerning natural fugitive dust influences and a point along the log concentration-frequency plot (Figure 5.1-1) at which external stationary sources cease to influence TSP concentrations.

As displayed in the following table, analysis of the top 20 percent of data (excluding known instances of agricultural or fugitive dust influence) indicated that accompanying resultant daily wind directions were decidedly from one major source concentration — the Pinellas Hillsborough urban area. As these results do not conform with area wind roses, the predominance of northwesterly winds among highest concentrations is considered significant.

<u>Predominant Wind Direction/High Observations</u>					
<u>Wind Direction</u>	356-85	86-175	176-275	276-335	336-355
<u>Station</u>					
1	1	0	1	8	0
2	1	2	2	3	0
3	2	1	1	4	0

This analysis of ranked high concentrations suggested that the dependency between high observations and wind direction weakened considerably below 35-45 micrograms per cubic meter and that this range may be the threshold of the short-term background level. Generally following the percentile concentration procedure referenced above, statistically projected concentrations were determined for the 95th percentile, and the arithmetic mean for the three stations was determined as the 24-hour background concentration. The resultant value, 55 micrograms per cubic meter, was judged to be a conservative approximation that is consistent with the analysis of ranked high concentration occurrences and an accommodation for a myriad of small sources that could not be included in modeling exercises (and, therefore, assumed to contribute to the background).

5.2 Computed 1977 Baseline Determinations

Long-Term (Annual) Baseline - The long-term air quality effect of existing 1977 sources not charged against the allowable PSD increment were computed from actual emission rates using the AQDM computer code. The actual rates were determined from available state records or other published data which best approximated emissions for the year ending August 7, 1977. Meteorological input was represented by a five year period measured at

the Tampa National Weather Service (NWS) Station from 1969 through 1973. Specific locations examined were the point of maximum concentration that was determined in Section 6.1, Long-Term Effects, the property boundary concentrations in the four cardinal directions from the proposed source cluster, and the nearest population grouping — the settlement at Keentown (see Figure 5.2-1). The analysis also projected the baseline levels for a 15 by 15 kilometer grid enclosing the entire mine site to provide a graphic area representation of the 1977 Baseline.

The Baseline value at the point where the proposed source would be anticipated to have maximum effect was determined by addition of stationary source effects computed from AQDM to the annual background concentration determined in Section 5.1. The resultant estimate is $25 + 0.5 = 25.5$ micrograms per cubic meter. The property boundary Baseline estimates ranged from 25.5 to 25.6 micrograms per cubic meter, with the highest value, 25.6 micrograms per cubic meter, at the north property boundary. The estimated Baseline at Keentown is 25.6 micrograms per cubic meter. Annual Baseline values for other locations may be estimated from the graphical representation in Figure 5.2-1.

Short-Term (24-hour) Baselines - The short-term air quality effect of existing 1977 sources not charged against the allowable PSD increment were computed from actual emission rates using the PTMTP-W computer code. Emission rates for other sources were determined from available state records or other published data which best approximated emissions for the year ending August 7, 1977 (see Appendix C). Meteorological conditions which produced the highest, second highest concentrations at points of maximum effect in Section 6.1, Short-Term Effects were used to estimate Baseline values. As


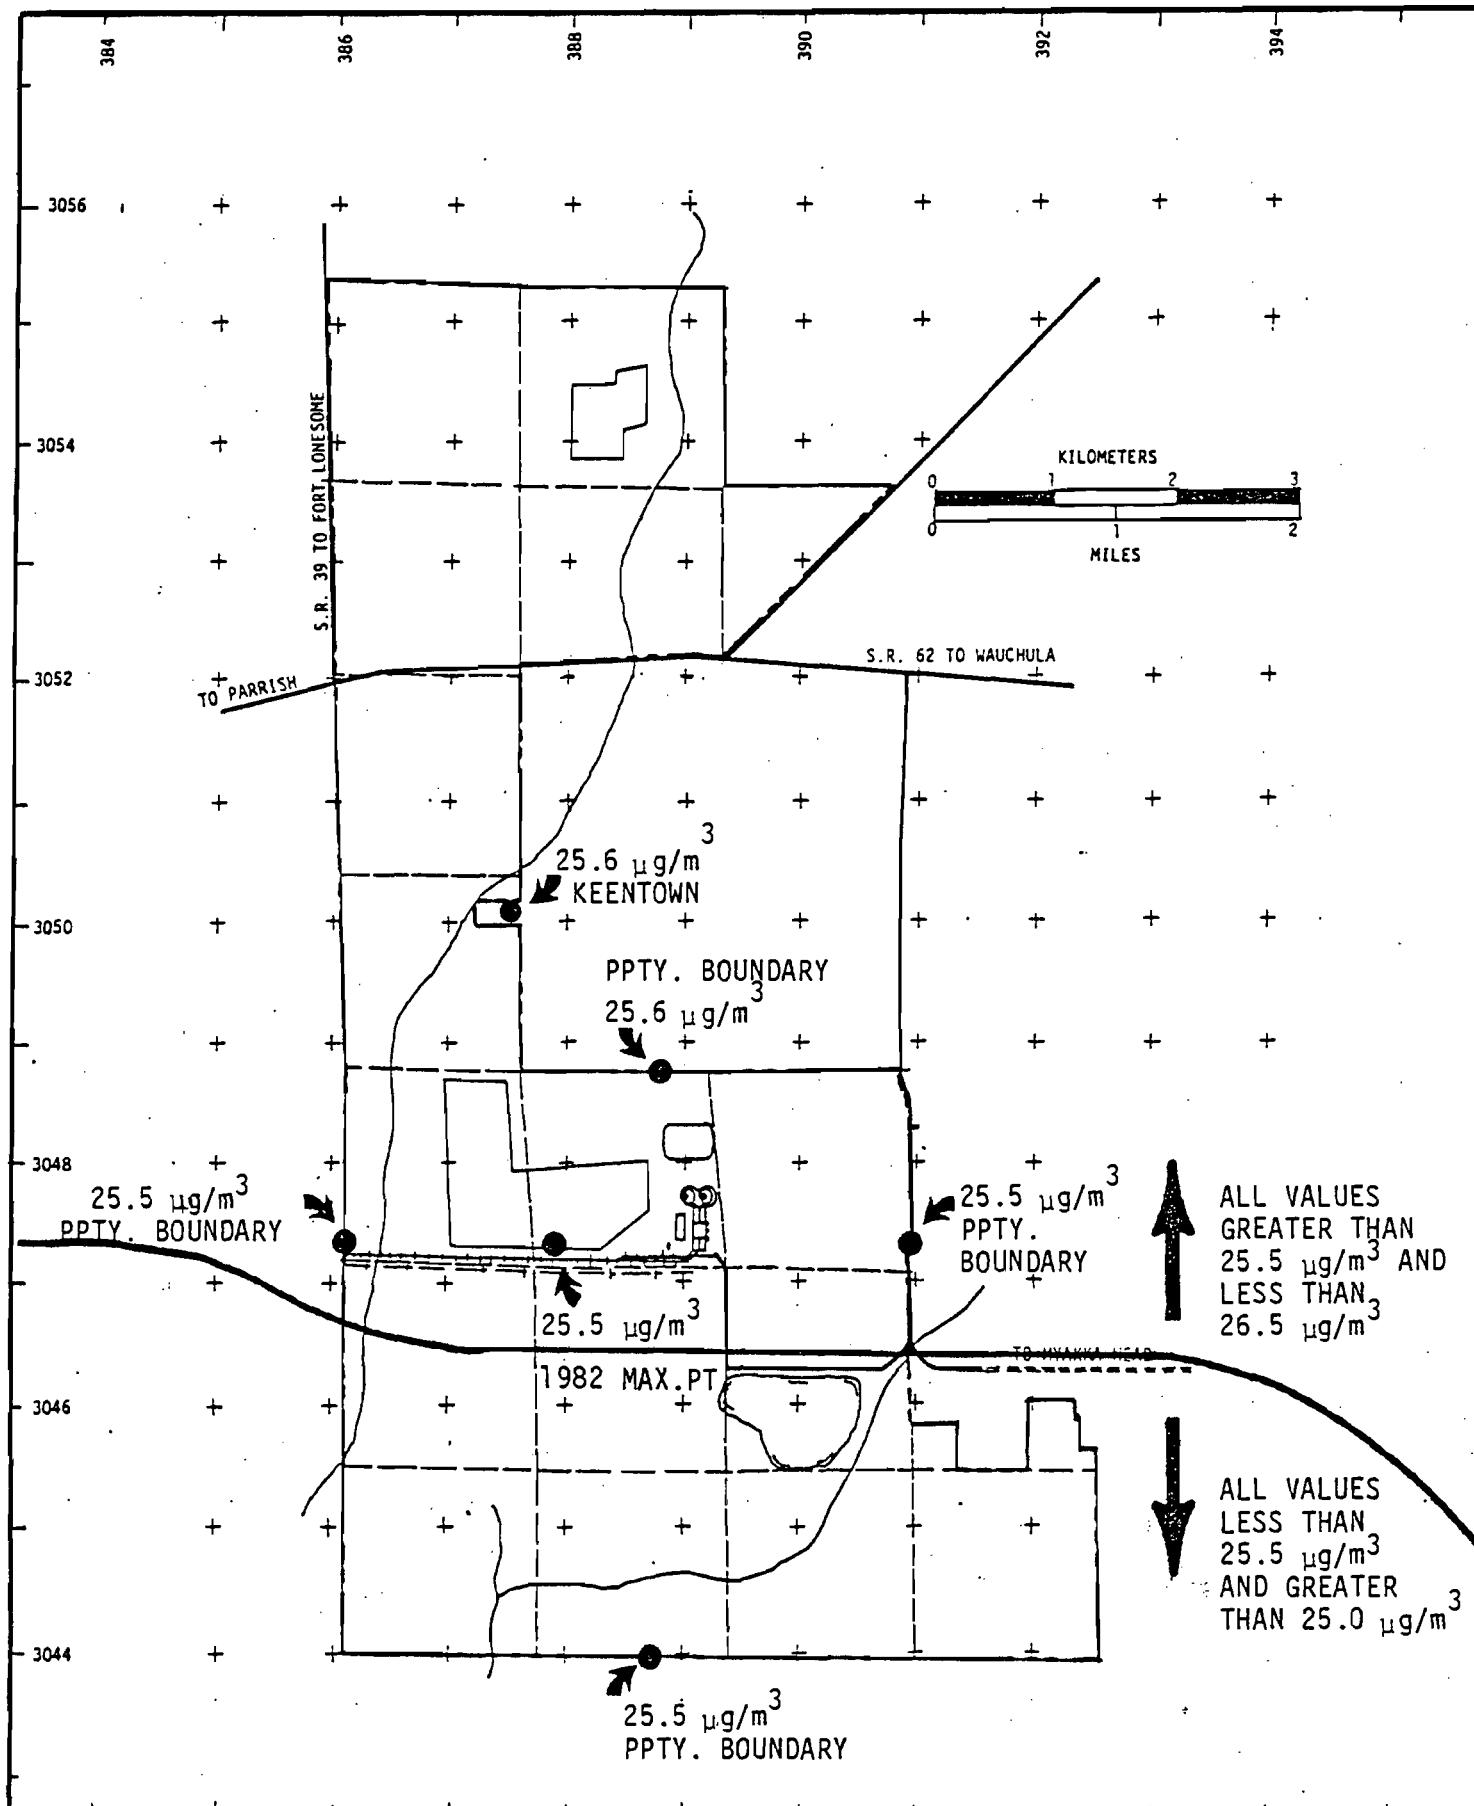


FIGURE 5.2 - 1
ANNUAL 1977 TOTAL SUSPENDED PARTICULATE BASELINE.



the short-term Baseline varies as a function of meteorology on any one day, only two baseline points were investigated -- the point of maximum effect irrespective of property boundaries and the maximum property boundary location (Figure 5.2-2).

The 1977 short-term Baseline values were determined by addition of stationary source effects computed from PTMTP-W to the 24-hour background concentration, 55 micrograms per cubic meter, determined in Section 5.1. The computed Baseline value at the point of maximum future source effect was determined to be (55 + 1.9) 56.9 micrograms per cubic meter. The Baseline value at worst effect property boundary location was estimated to be (55 + 1.8) 56.8 micrograms per cubic meter.

5.3 SO₂ Measurement Results

Measurements of SO₂ were conducted at three locations in the general vicinity of the proposed mine site as displayed in Figure 5-1. All measurements were performed using the federal reference (West Gaeke) method (40 CFR 50, Appendix A). The measurements were performed under required temperature-controlled conditions to avoid inaccuracies that characterized earlier use of this method, and were conducted on a six day interval concurrent with TSP measurements.

Summary statistics for one year of concurrent measurements are compared with applicable federal and state standards in Table 5.3-A. Actual measurements and accompanying meteorological history are provided in Appendix A. A maximum 24-hour average concentration of 164.4 micrograms per cubic meter was observed at Station 1 on a day when concentrations at other nearby sites ranged between 0 and 22 micrograms per cubic meter. The measurement is suspect and a likely product of an unidentifiable error.

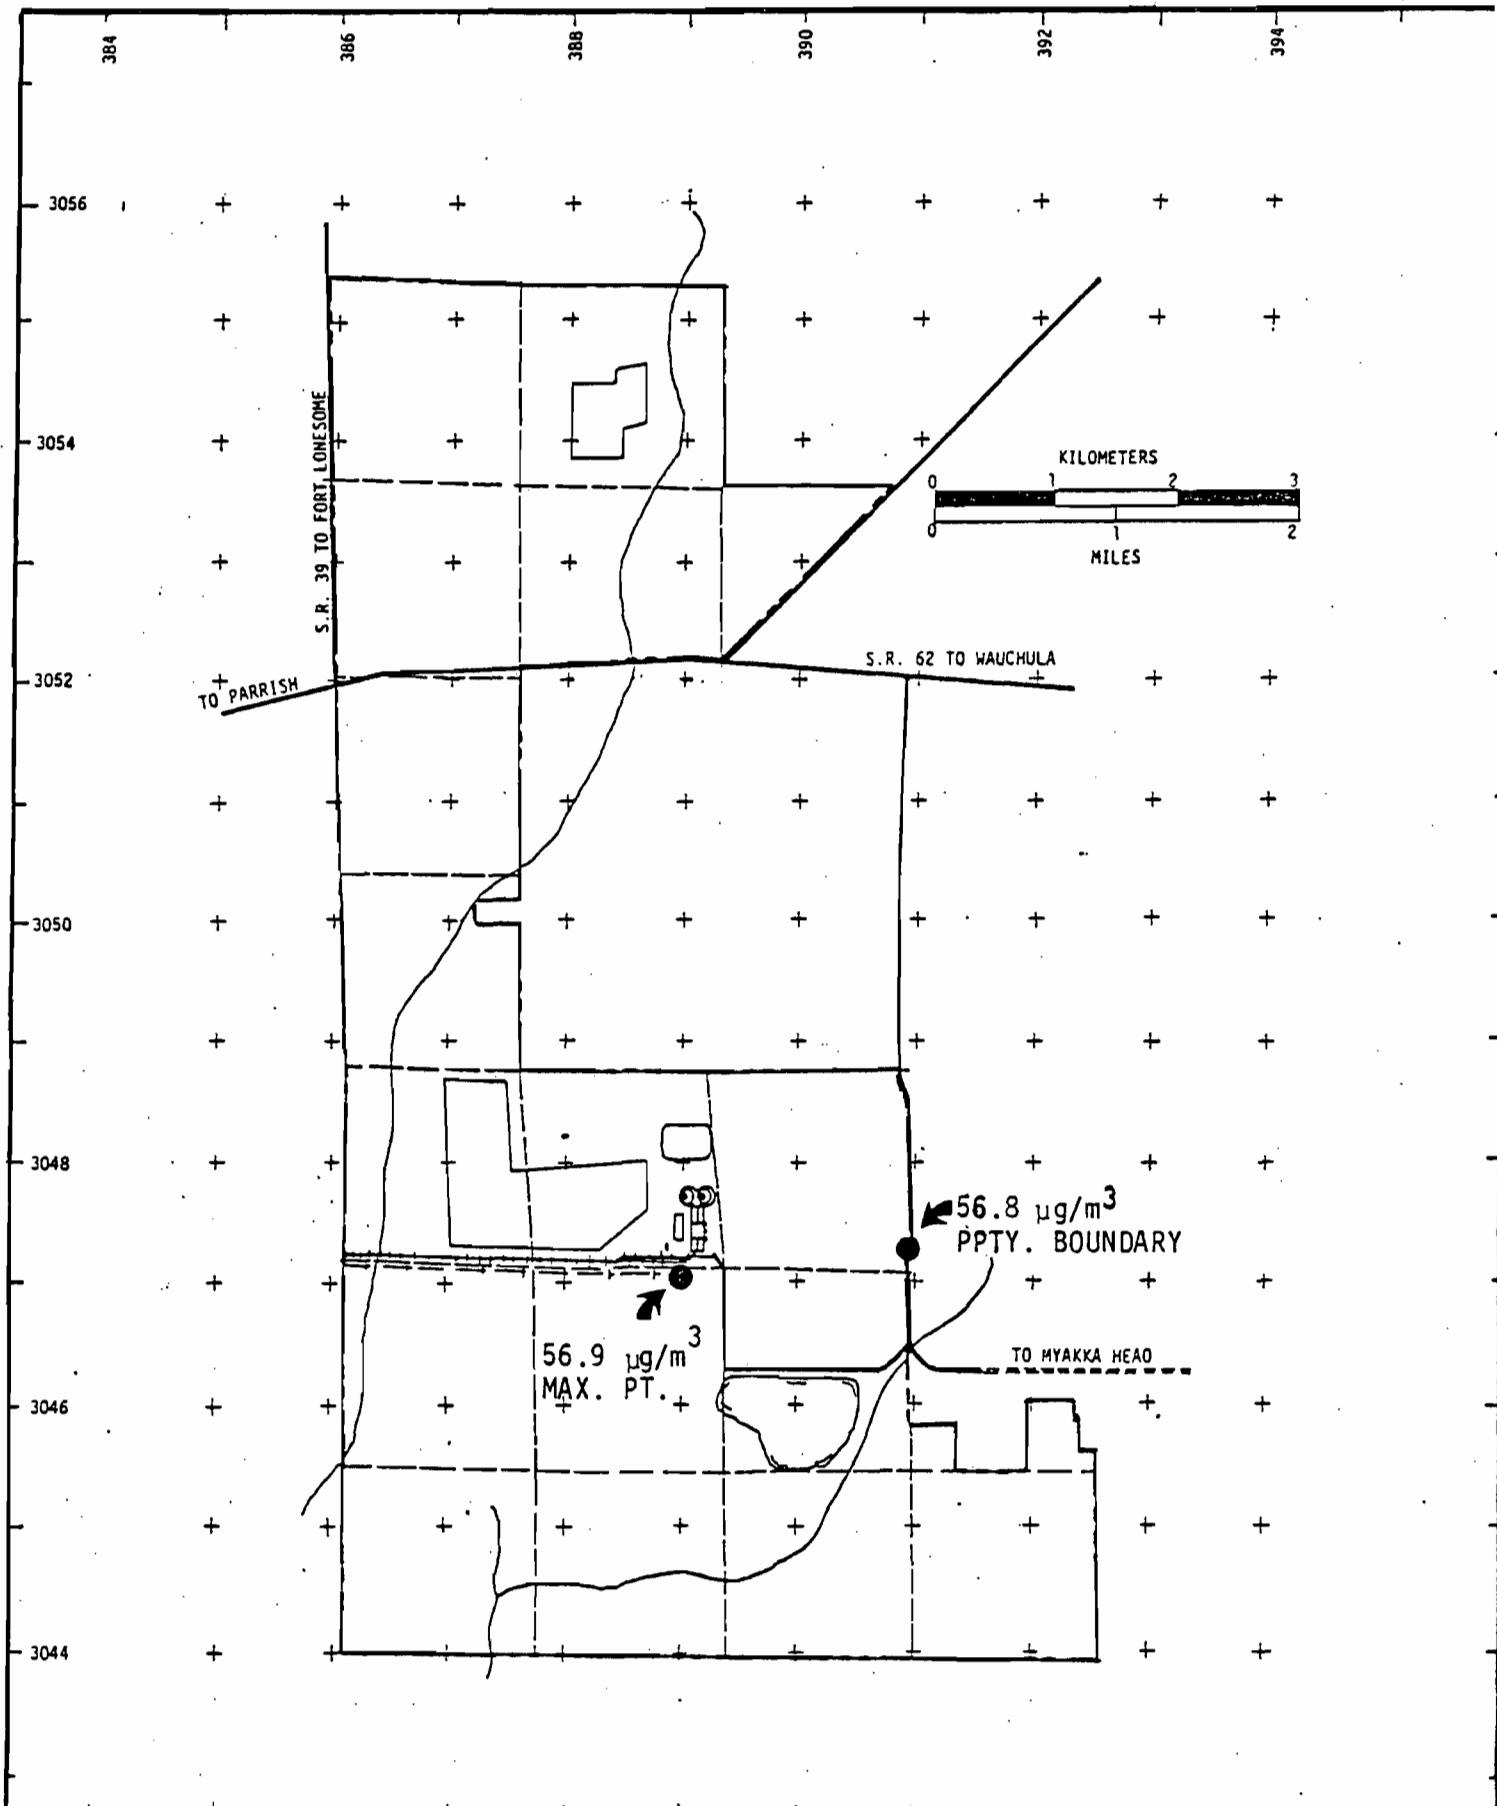


FIGURE 5.2 - 2
 SHORT-TERM (24 HOUR) 1977 TSP BASELINE AT LOCATIONS OF MAXIMUM PROPOSED
 SOURCE INFLUENCE



Table 5.3-A Annual SO₂ Summary for 1977-78

Station	Minimum 24-Hour Average	Maximum 24-Hour Average	Second Highest 24-Hour Average	Annual Arithmetic Mean
S-1	0	50.9 (164.4) ^a	43.3	11.6 (14.6) ^a
S-2	0	51.4	45.4	10.3
S-3	0	49.1	42.6	15.0

NAAQS

Primary	365	80
Secondary	260	60
Florida Standard	260	60

Note: Values in Micrograms per Cubic Meter

-
- a) Measurements at nearby monitoring sites ranged from 0 - 22.8 on 5/8/79. Inconsistent observation believed to be result of unidentifiable error.

The next highest 24-hour average concentration at Station 1 was 50.9 micrograms per cubic meter, a value more consistent with maxima of 51.4 and 49.1 micrograms per cubic meter at the other two stations. The maximum second highest value of 45.4 micrograms per cubic meter is about 20 percent of the applicable standards. The 24-hour federal primary and state standards are 365 and 260 micrograms per cubic meter, respectively. Excluding the suspect measurements discussed above, the highest annual arithmetic mean for the three stations was 13.7 micrograms per cubic meter which compares with federal primary and state annual standards of 80 and 60 micrograms per cubic meter, respectively.

The SO₂ data were also analyzed by statistical methods (see Appendix B) to project the probable second highest day of the year. Since a large majority of the measurements were below the 25 micrograms per cubic meter threshold of the federal reference method, analysis was performed only on the top ranking 30 percent of the measurements. The results are tabulated in Table 5.3-B.

The results indicate that the maximum second highest value for the measurement year was less than 80 micrograms per cubic meter. The federal primary and state standards are 365 and 260 micrograms per cubic meter, respectively.

It may be noted that the estimated annual arithmetic mean concentrations at each station are individually greater than the calculated values in Table 5.2-A. As indicated above, many of the observations are below measurement threshold of the reference method and when low level samples are analyzed in the laboratory, the procedure tends to underestimate actual SO₂ concentrations. The statistical estimation procedures were

Table 5.3-B Log SO₂ Concentration - Frequency Estimates for 1977-78

Station	Second Maximum 24-Hour Average	Annual Arithmetic Mean
S-1	75.8	12.3
S-2	79.8	12.5
S-3	64.5	18.3
Average	73.4	14.4
NAAQS		
Primary	365	80
Secondary	260	60
Florida Standard	260	60

Note: Values in Micrograms per Cubic Meter

confined to what were judged the most accurate or highest measurements in each set of data and while the resulting estimates of annual arithmetic mean rely on substantially fewer measurements to produce a result, they tend to eliminate an inherent analytical bias from the measured data. The average of the estimated annual means at the three stations, 15 micrograms per cubic meter, is probably the best available measure of annual SO₂ Baseline concentration for the period of measurement. This value is less than 25 percent of applicable federal primary and state standards of 80 and 60 micrograms per cubic meter, respectively.

The short-term Baseline should be a value reflecting the highest, second highest concentration for an annual period. The average of the projected highest, second highest values for the three stations was approximately 75 micrograms per cubic meter (Table 5.3-B). This value is less than 30 percent of federal primary and state standards of 365 and 260 micrograms per cubic meter, respectively.

5.4 Fluoride Measurement Results - Total Atmospheric

Measurements of total atmospheric fluoride (F_{atm}) were conducted at the three primary monitoring locations displayed in Figure 5-1. All measurements are expressed as water soluble or gaseous atomic fluoride (atomic weight = 19) and were performed in accordance with latest procedures acceptable to the Florida Department of Environmental Regulation (Florida State Board of Health, 1966). Reported values include both particulate and gaseous constituents, and soluble and insoluble fluoride substances. Sampling was conducted on a six day frequency concurrent with TSP and SO_2 measurements.

Summary statistics for one year of concurrent measurements are presented in Table 5.4-A below. Actual measurements and accompanying meteorological history are provided in Appendix A. Results are presented both in micrograms per cubic meter and parts per billion (ppb) for convenience. The ppb values were computed for an ambient temperature of 55°F which tends to overestimate the annual mean.

The maximum 24-hour average concentration, 4.9 ppb, was observed at Station 1 in February, 1978. The other maxima were observed in January, 1978. The Florida Department of Environmental Regulation proposed a fluoride regulation in 1976 (FDER, 1976) which if adopted would have imposed ambient standards for daily, monthly, and annual averaging times. The proposed standards are provided only for comparison purposes.

All of the measured averages were below the proposed standards with the exception of one 30 day average at Station 1. An agricultural application of fertilizer in the vicinity of this location may explain what otherwise appears as an anomalous occurrence.

Table 5.4-A Annual Total F_{atm} Summary for 1977-78

Station	Minimum 24-Hour Average	Maximum 24-Hour Average	Maximum 30-Day	Maximum 12-Month Average
S-1	0	3.97 (4.9)	2.25 (2.8)	0.57 (0.7)
S-2	0	2.20 (2.7)	1.48 (1.8)	0.42 (0.5)
S-3	0	3.17 (3.9)	1.13 (1.4)	0.43 (0.5)
FDER, 1976 Proposed Std.		(5.6) ^b	(1.8) ^b	(0.9) ^b

Note: Values in Micrograms per Cubic Meter and Parts per Billion
(ppb - Parenthesis)^a

a) ppb concentrations based on 60°F temperature.

b) Standard proposed, but not approved by FDER Commission (see text).

5.5 Fluoride Measurement Results - Total Vegetative

Measurements of total vegetative fluoride (F_{veg}) were conducted at the three primary and three secondary monitoring locations displayed in Figure 5-1. Measurements are expressed in terms of water soluble or gaseous atomic fluoride (Atomic Weight = 19) and were performed in accordance with latest procedures acceptable to the Florida Department of Environmental Regulation (Florida State Board of Health, 1966). Reported values include fluoride taken up in forage grasses and any soluble or insoluble fluoride included in particulate matter coating the vegetation surface. Sampling was conducted on a monthly frequency consistent with FDER practice.

The three highest measurements for each site are provided in Table 5.5-A. Complete data are included in Appendix A.

Close examination of high occurrences indicate that while there was a general tendency for higher values to appear during the same month throughout the six station network, there was also considerable variability between sites within any one month. The following ranges are descriptive of these differences:

<u>Month</u>	(parts per million)	
	<u>Minimum</u>	<u>Maximum</u>
September, 1977	4.9	110.6
February, 1978	7.6	47.5
March 1978	15.6	52.5

The measurement is a relatively coarse technique, quite dependent upon rainfall, vegetation species, biological state of the vegetation, e.g., dormancy, etc., and any recent carry-over from nearby fertilizer applications. Some of the variation may be traced to these effects

Table 5.5-A Maximum Observations - Total F_{veg}

	S-1	S-2	S-3	S-4	S-5	S-6
Highest	25.0	52.5	37.8	43.1	38.9	110.6
2nd Highest	19.0	47.5	29.5	39.1	26.1	49.0
3rd Highest	16.0	21.4	17.8	35.9	21.3	30.4

Note: Values in Parts per Million - ppm

and possibly to collection or analytical procedures. Whatever the reason, it appears advisable to consider averages of measurements rather than individual measurements on any one sampling day.

The highest monthly average for the six sites was 36.0 ppm observed in March, 1978. The highest 12-month average at any location was 28.2 ppm at Station 6. There was no spatial pattern to suggest a gradient from fertilizer manufacturing operations located to the north and northeast of the proposed project location. The average of all measurement stations for the year was 19.6 ppm.

The FDER proposed a standard for fluoride in forage grass in 1976, and if adopted, would have set 45 ppm (dry basis) as the maximum allowable average concentration for 12 consecutive months. This concentration was developed from experimental results published in scientific literature. None of the station 12-month averages exceeded 45 ppm.

The Manatee County Commission adopted air pollution regulations including fluoride standards. The county standard for grass is 30 ppm (dry basis), but no averaging time is specified. It is presumed that this rule was patterned after the proposed state regulation (12 month averaging period) inasmuch as the 30 ppm level was selected, in part, to protect existing lower levels determined by the annual averaging method. The twelve month station averages are also below the county 30 ppm standard and the average of all stations, or spatial average, is less than two-thirds of the Manatee County standard.

5.6 Area Nitrogen Dioxide Concentrations

The preconstruction monitoring programs were developed and reviewed with local/state environmental regulatory interests during a period when

primary concern was for the measured pollutants. At that point in time, interest in nitrogen oxides emissions were generally confined to very large sources, e.g., electric power generation stations. Low measured ambient levels also suggested relatively little benefit would be derived from additional measurements of nitrogen oxides, hence they were not undertaken as part of the preconstruction monitoring program.

Measurements conducted for the Manatee electric power generation station (ESE, 1974-78) at a site approximately half the distance between the power station and proposed development (6 miles) suggest that area nitrogen oxide concentrations are relatively low and changed very little over the four year period from 1974 to 1978. Yearly annual average concentrations measured at this site ranged from 8 to 10 micrograms per cubic meter compared with a federal and state annual standard of 100 micrograms per cubic meter.

A comparison of sulfur dioxide measurements at the FP&L nitrogen oxide measurement site with measurements conducted at the proposed mine site indicates an anomalous condition. Sulfur dioxide measurements at the nitrogen oxide site are somewhat lower than at the proposed mine site and the differences appear inconsistent with the relatively large distances between the measurement sites and major sources of sulfur dioxide emissions (see Appendix C). Since most of the measurements at both locations are well below the threshold sensitivity of the sulfur oxide federal reference procedure and the two measurement sets were analyzed by different procedures, one automated and the others by manual methods, analytical procedure may be the source of the observed difference. However, viewing the FP&L nitrogen oxide measurements with the perspective

of other available regional measurements, they do appear reasonably representative of the area in which the proposed mine would be located. This additional perspective of potential nitrogen oxide concentrations are provided by measurements conducted in Hillsborough County (HCEPC, 1977) and St. Petersburg (SPEAD, 1976). Measurements just outside of the heart of the Tampa industrial/port complex were typically below 40 micrograms per cubic meter and in a less industrialized rural area south of the city, levels generally ranged from 10 to 20 micrograms per cubic meter even though air quality in that area was influenced by one major electric power generation facility (TECO, Big Bend). Measurements adjacent to an industrialized area in northwest St. Petersburg (35 micrograms per cubic meter), although of somewhat limited duration, reflected a level comparable to concentrations at the perimeter of Tampa industrial center.

Finally, examination of annual total suspended particulate matter and sulfur dioxide at the proposed mine site indicated rather favorable margins with annual guideline criteria for remote areas (EPA, 1978C). It appears that relatively distant sources and source groups (see Appendix C) contribute effects on an infrequent cycle and do not appreciably influence annual average concentration statistics. On the basis of available information it was assumed that the remote source criteria for annual nitrogen dioxide concentration would also be satisfied and that the annual guideline level (20 micrograms per cubic meter) could be utilized as a conservative estimate of nitrogen dioxide baseline in the area of the proposed mine (see Section 5.1 for additional discussion relating annual background and baseline levels).

6. POST CONSTRUCTION AIR QUALITY

6.1 Total Suspended Particulate

Long-Term (Annual) Effects - Long-term annual air quality effects contributed by the proposed source and surrounding sources were computed from limiting source emission rates given in Section 4.0 and Appendix C using the AQDM computer code. Meteorological input was represented by a five year period measured at the Tampa National Weather Service (NWS) Station from 1969 through 1973. Specific locations examined were the point of maximum concentration, irrespective of property boundaries, the property boundary concentrations (cardinal directions) and the nearest population groupings at Keentown and Duette. Grid spacing at the maximum point was 0.5 kilometers. The analysis also projected 1982 concentrations on a 15 by 15 kilometer grid enclosing the entire mine site to provide a graphic area representation of overall effect during the first year of mine operation.

Proposed Source Effects: Effect of the proposed source at the point of maximum concentration (Figure 6.1-1) was estimated for maximum operations at the proposed mine. The projected annual effect was estimated to be 1.2 micrograms per cubic meter at the maximum point which is located approximately 1.7 kilometers within the west property boundary and approximately 0.8 kilometers due west of the source cluster.

Estimated effects of the proposed source at the closest property boundaries to the north, east, south, and west range from 0.1 to 0.5 micrograms per cubic meter. The source represents from 11 to 33 percent of the total annual area stationary source contribution at these locations, respectively.

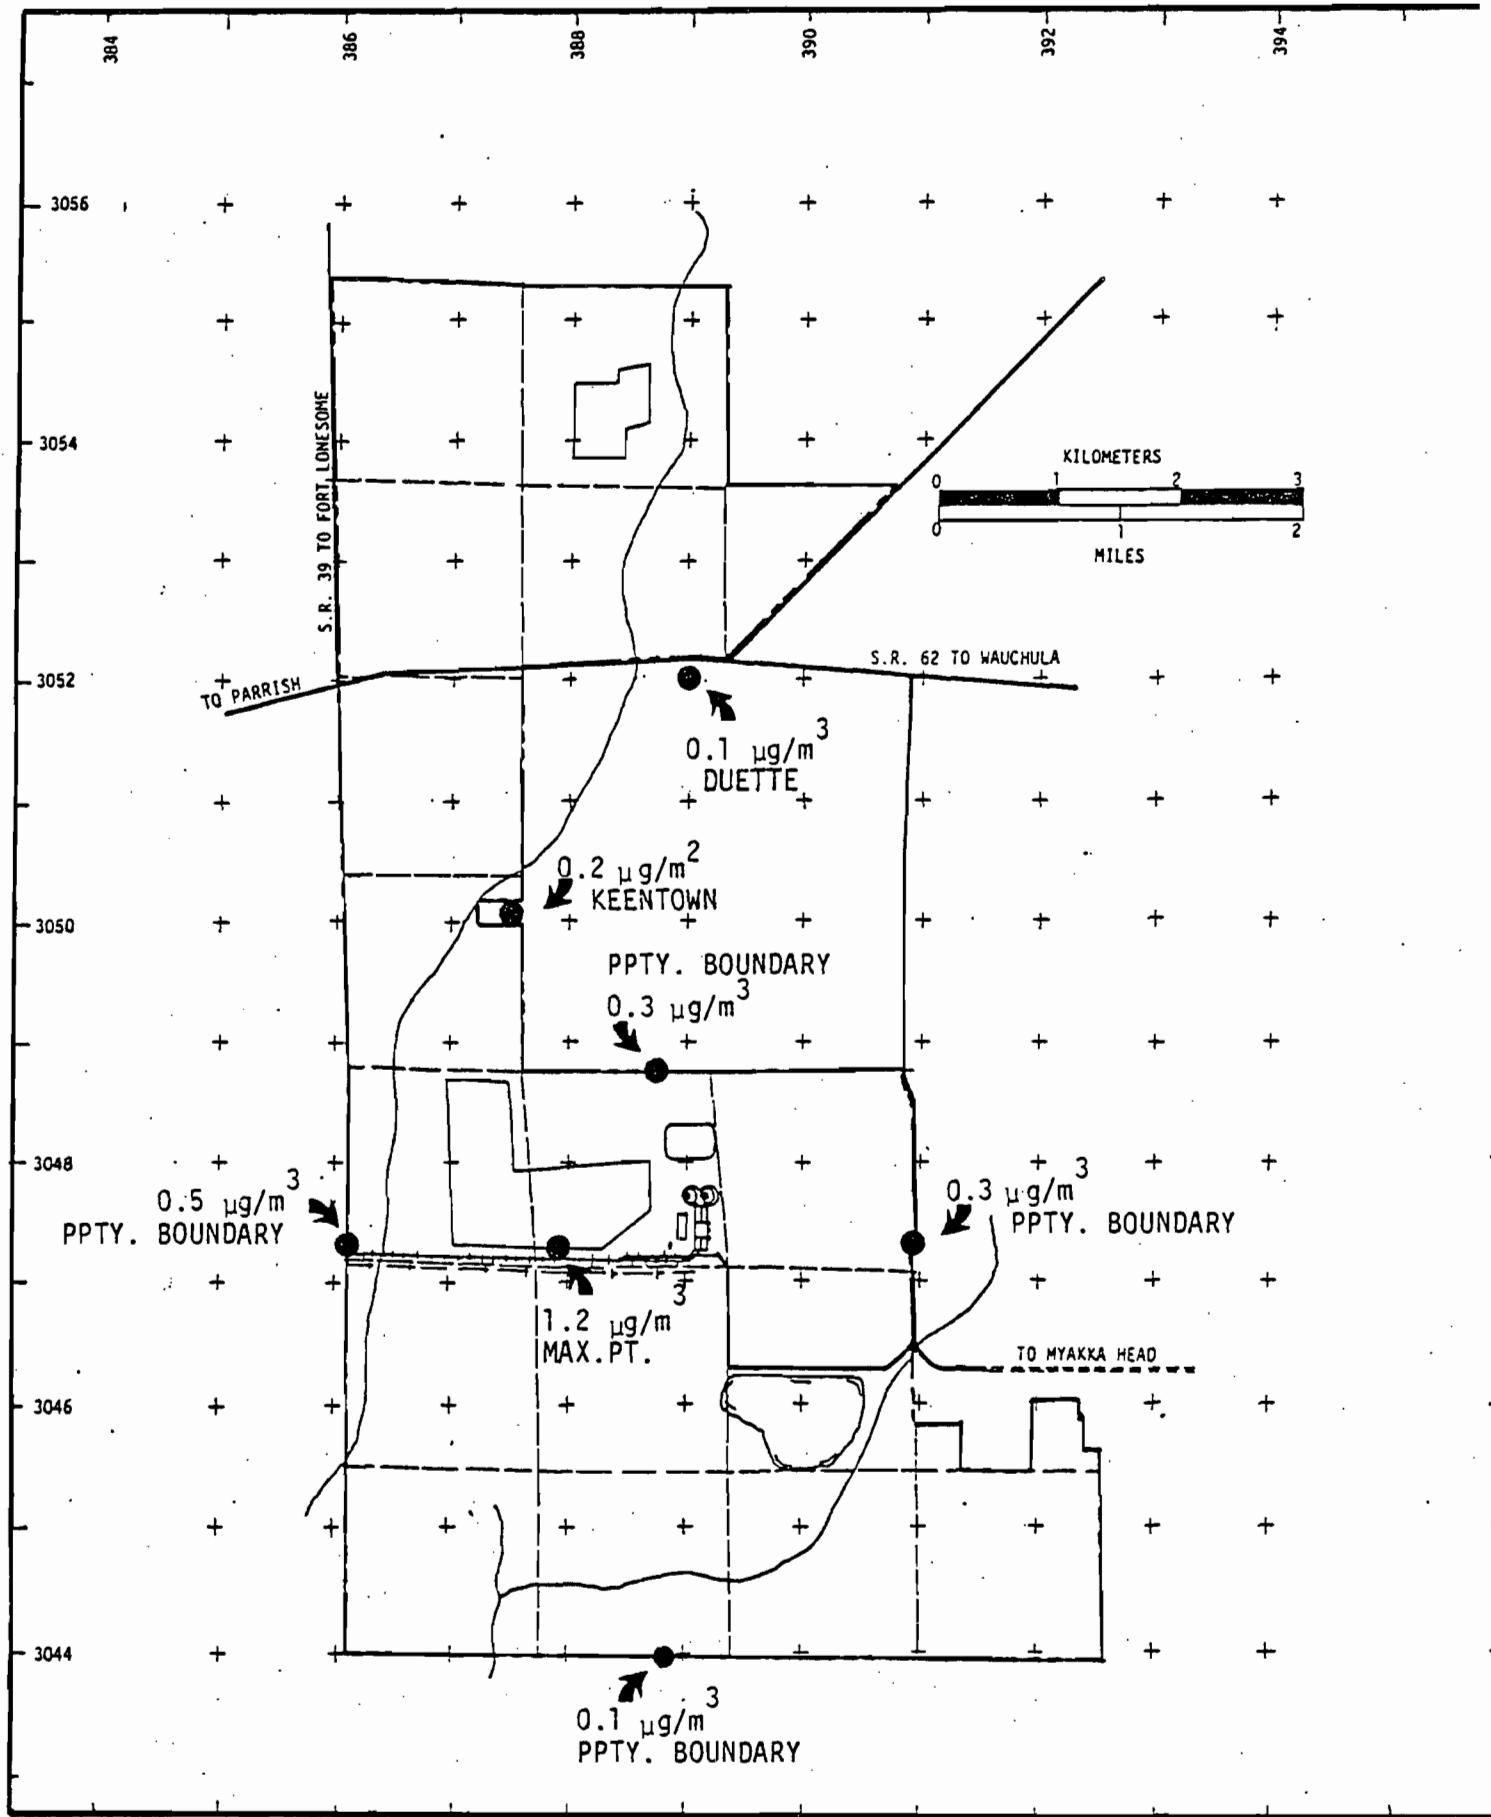


FIGURE 6.1 - 1
LONG TERM (ANNUAL) EFFECTS OF PROPOSED SOURCE PARTICULATE EMISSIONS.



The highest property boundary effect is to the west, which was estimated to be approximately 0.5 micrograms per cubic meter. The projected effect is quite small, and doubtlessly, would be difficult to detect for an annual period.

A projection of annual effect was also computed for the Keentown settlement and the general Duette (school) area. These source effects were determined to be slightly above 0.2 micrograms per cubic meter and approximately 0.1 micrograms per cubic meter. These effects are projected to represent 18 and 6 percent of the total annual area stationary source effect at these locations, respectively.

Increment Consuming Source Effects (PSD): Annual air quality effect of increment consuming sources was determined for maximum allowable annual emission rates of all sources, including the proposed source. A list of the increment consuming sources are included in Appendix C. These effects were computed at each of the locations examined in the previous section to determine conformance with the allowable annual PSD increment of 19 micrograms per cubic meter (Figure 6.1-2).

The annual effect of all increment consumers at the point of maximum effect was estimated to be 1.4 micrograms per cubic meter, about 8 percent of the increment. This value is almost 70 percent of the total stationary source effect at this point.

Estimated annual effects of increment consumers at the property boundaries range from 0.4 to 0.7 micrograms per cubic meter. These contributions represent 40 to 50 percent of the total stationary source effect at these locations, respectively. Effect at Keentown and Duette are 0.5 and 0.4 micrograms per cubic meter, respectively.

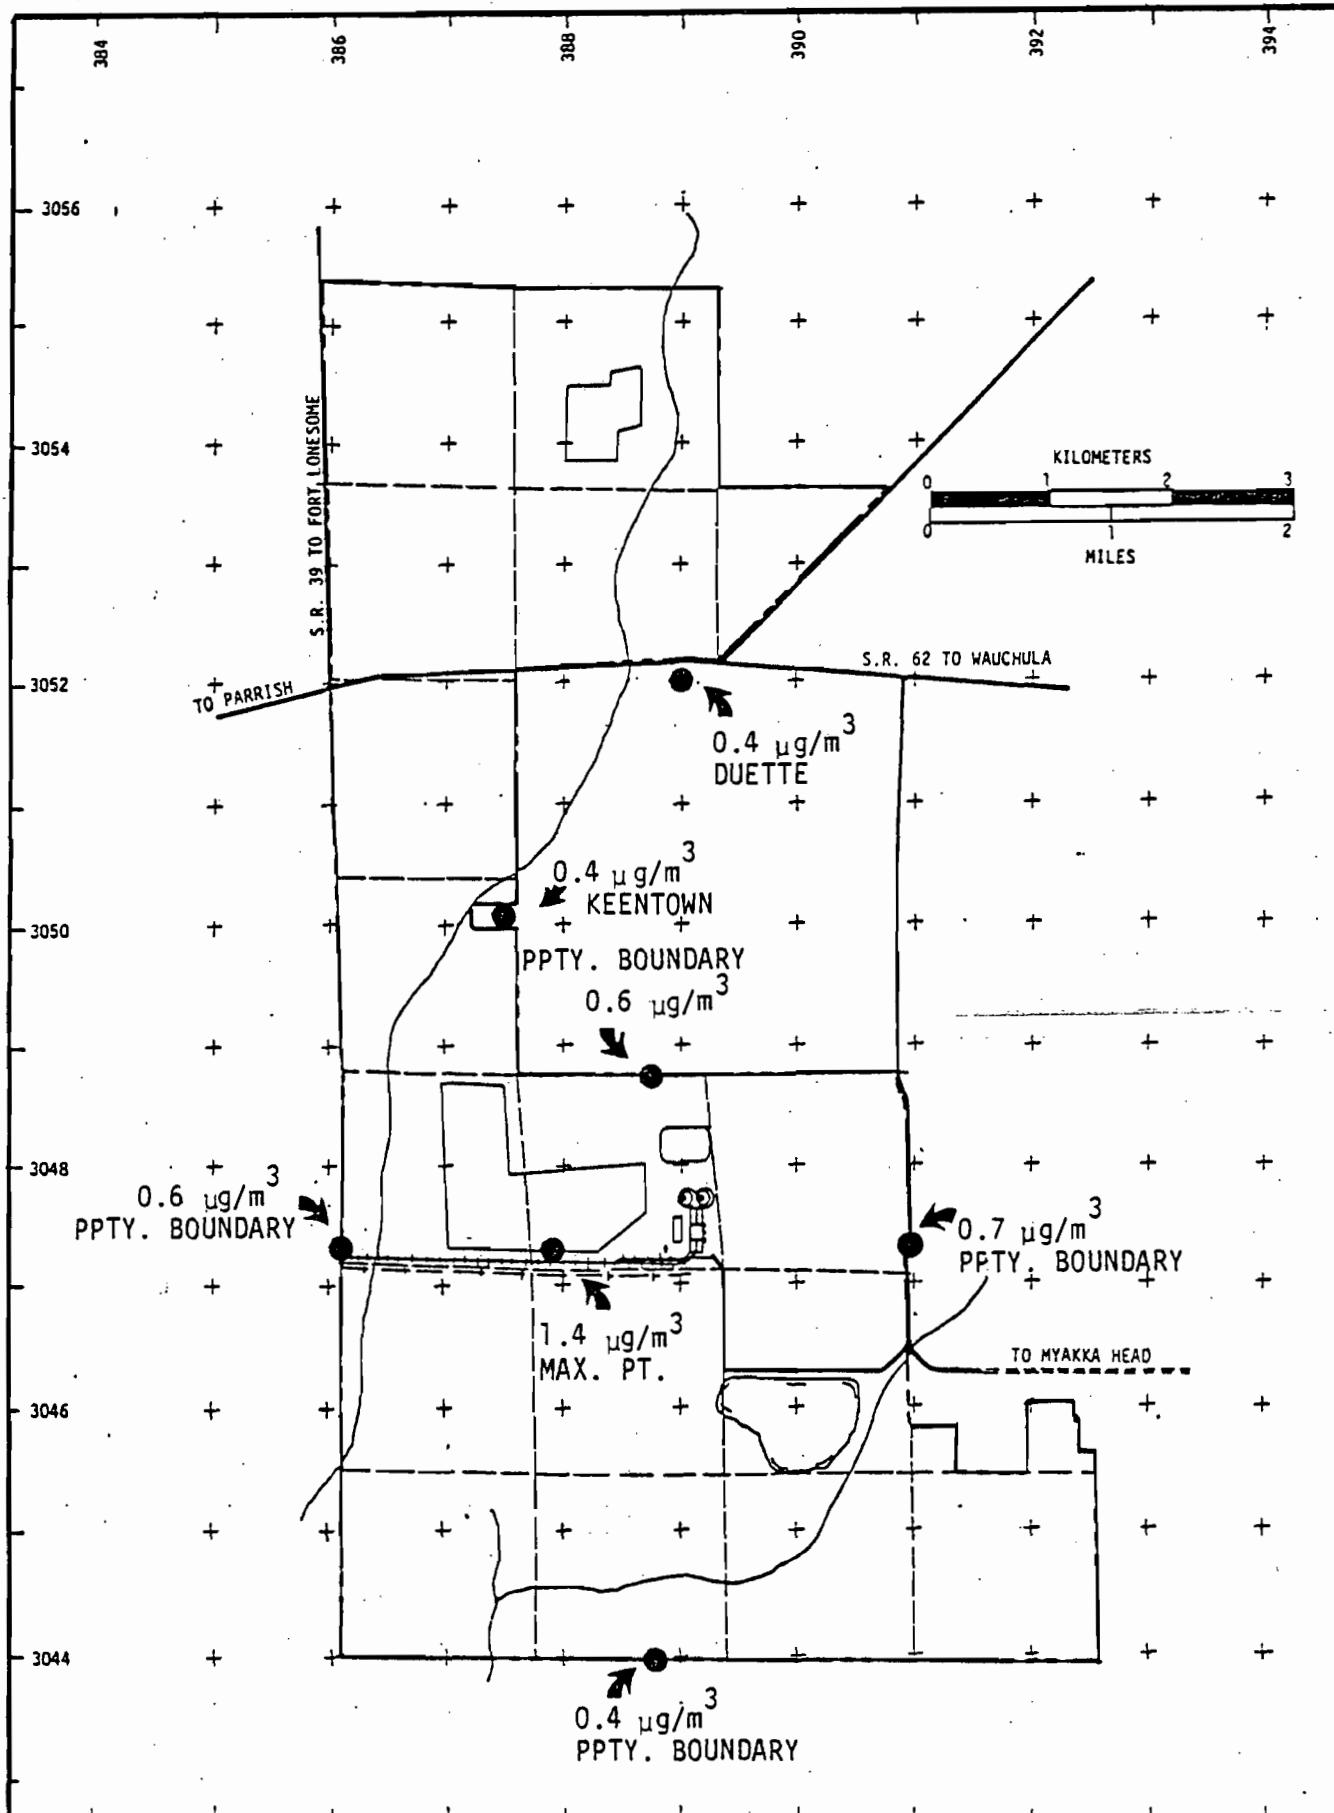


FIGURE 6.1 - 2
 LONG TERM (ANNUAL) EFFECTS OF INCREMENT CONSUMING SOURCE PARTICULATE EMISSIONS



Projected Annual Particulate Concentrations (1982): Projected annual effect of all stationary sources were added to the annual background concentration of 25 micrograms per cubic meter (developed in Section 5.1) as a means of determining conformance of the completed facility with State and primary National Ambient Air Quality Standards (NAAQS) of 60 and 75 micrograms per cubic meter, respectively.

The estimated annual (1982) geometric mean concentration at the maximum point is $25 + 2.1 = 27.1$ micrograms per cubic meter as shown in Figure 6.1-3. Estimated 1982 annual geometric means at the property boundaries range from 26.3 to 26.4 micrograms per cubic meter, with the highest value at the west property boundary. The estimated 1982 annual concentrations at Keentown and Duette (school) area are both 26.3 micrograms per cubic meter. A graphical representation of projected 1982 area geometric means is also provided in Figure 6.1-3. Except where otherwise noted the projected concentrations are somewhere between 25.5 and 26.6 micrograms per cubic meter in this figure, i.e., the AQDM analysis did not indicate values less than 0.5 micrograms per cubic meter within the area analyzed.

Short-Term (24-hour) Effects - Short-term air quality effects were computed from limiting source emission rates given in Section 4.0 using the PTMTP-W computer code and worst case (highest, second highest concentration) meteorology at the location of interest. The grid spacing was 0.1 kilometers. Worst case meteorology was determined from CRSTER computer code analysis of five years of hourly meteorological data (1970-1974) and was evaluated at distances approximating either the point of maximum impact, the nearest property boundary, and/or for distant upwind sources, whichever


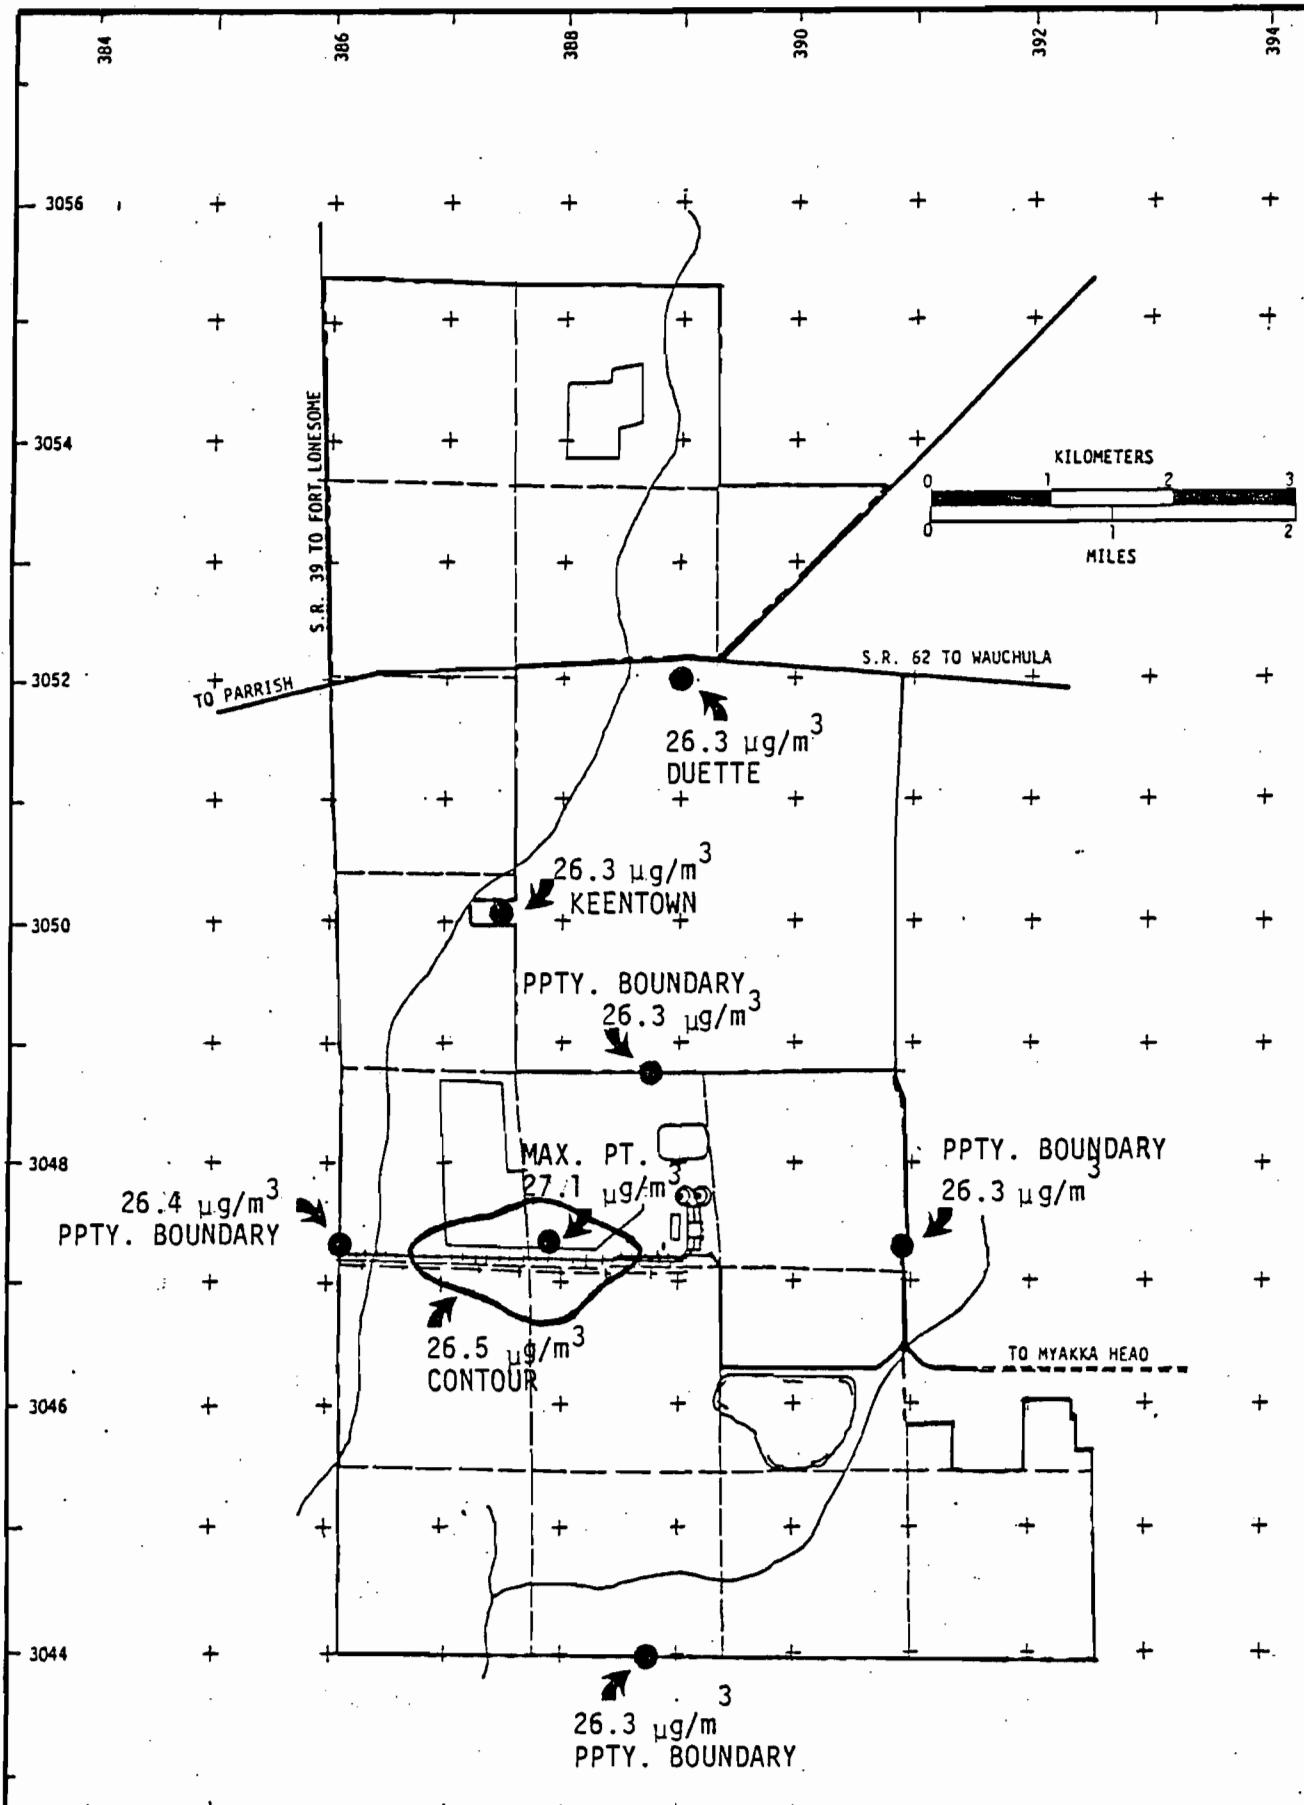


FIGURE 6.1 - 3
PROJECTED LONG TERM (ANNUAL) EFFECTS OF ALL STATIONARY SOURCE PARTICULATE EMISSIONS



produced maximum concentration at the point of interest. The effect of major upwind source groupings was treated by determination of a line of maximum impact through both the source grouping and proposed source.

This technique utilized CRSTER worst case meteorology for the sector of interest and PTMTP-W to locate the angle which upwind sources combined to produce worst effect in the vicinity of the proposed source.

Proposed Source Effect: Maximum effect of the proposed source at the point of maximum concentration was projected to be 12.8 micrograms per cubic meter at a point approximately 0.2 kilometers east of the source cluster and 2 kilometers inside (west) of the eastern property boundary (see Figure 6.1-4). The worst case (highest second highest) meteorology was Julian day 175 in 1972 for a CRSTER ring approximating the distance between the proposed source and maximum concentration location.

Effect of the proposed source was also evaluated for the worst case property boundary location by much the same procedure used to estimate maximum concentration. The projected maximum property line concentration was determined to be 8.1 micrograms per cubic meter on the east property boundary. The worst case (highest, second highest) meteorology was determined to be Julian day 174 in 1972 for a CRSTER ring approximating the distance between the proposed source and property boundary.

The estimated short-term effect of the proposed source on Keentown was estimated to be 4.7 micrograms per cubic meter. The worst case meteorology was determined to be Julian day 88 in 1973 for a CRSTER ring approximating the distance between the source and Keentown. This effect is unchanged for the following two levels of analysis inasmuch as there

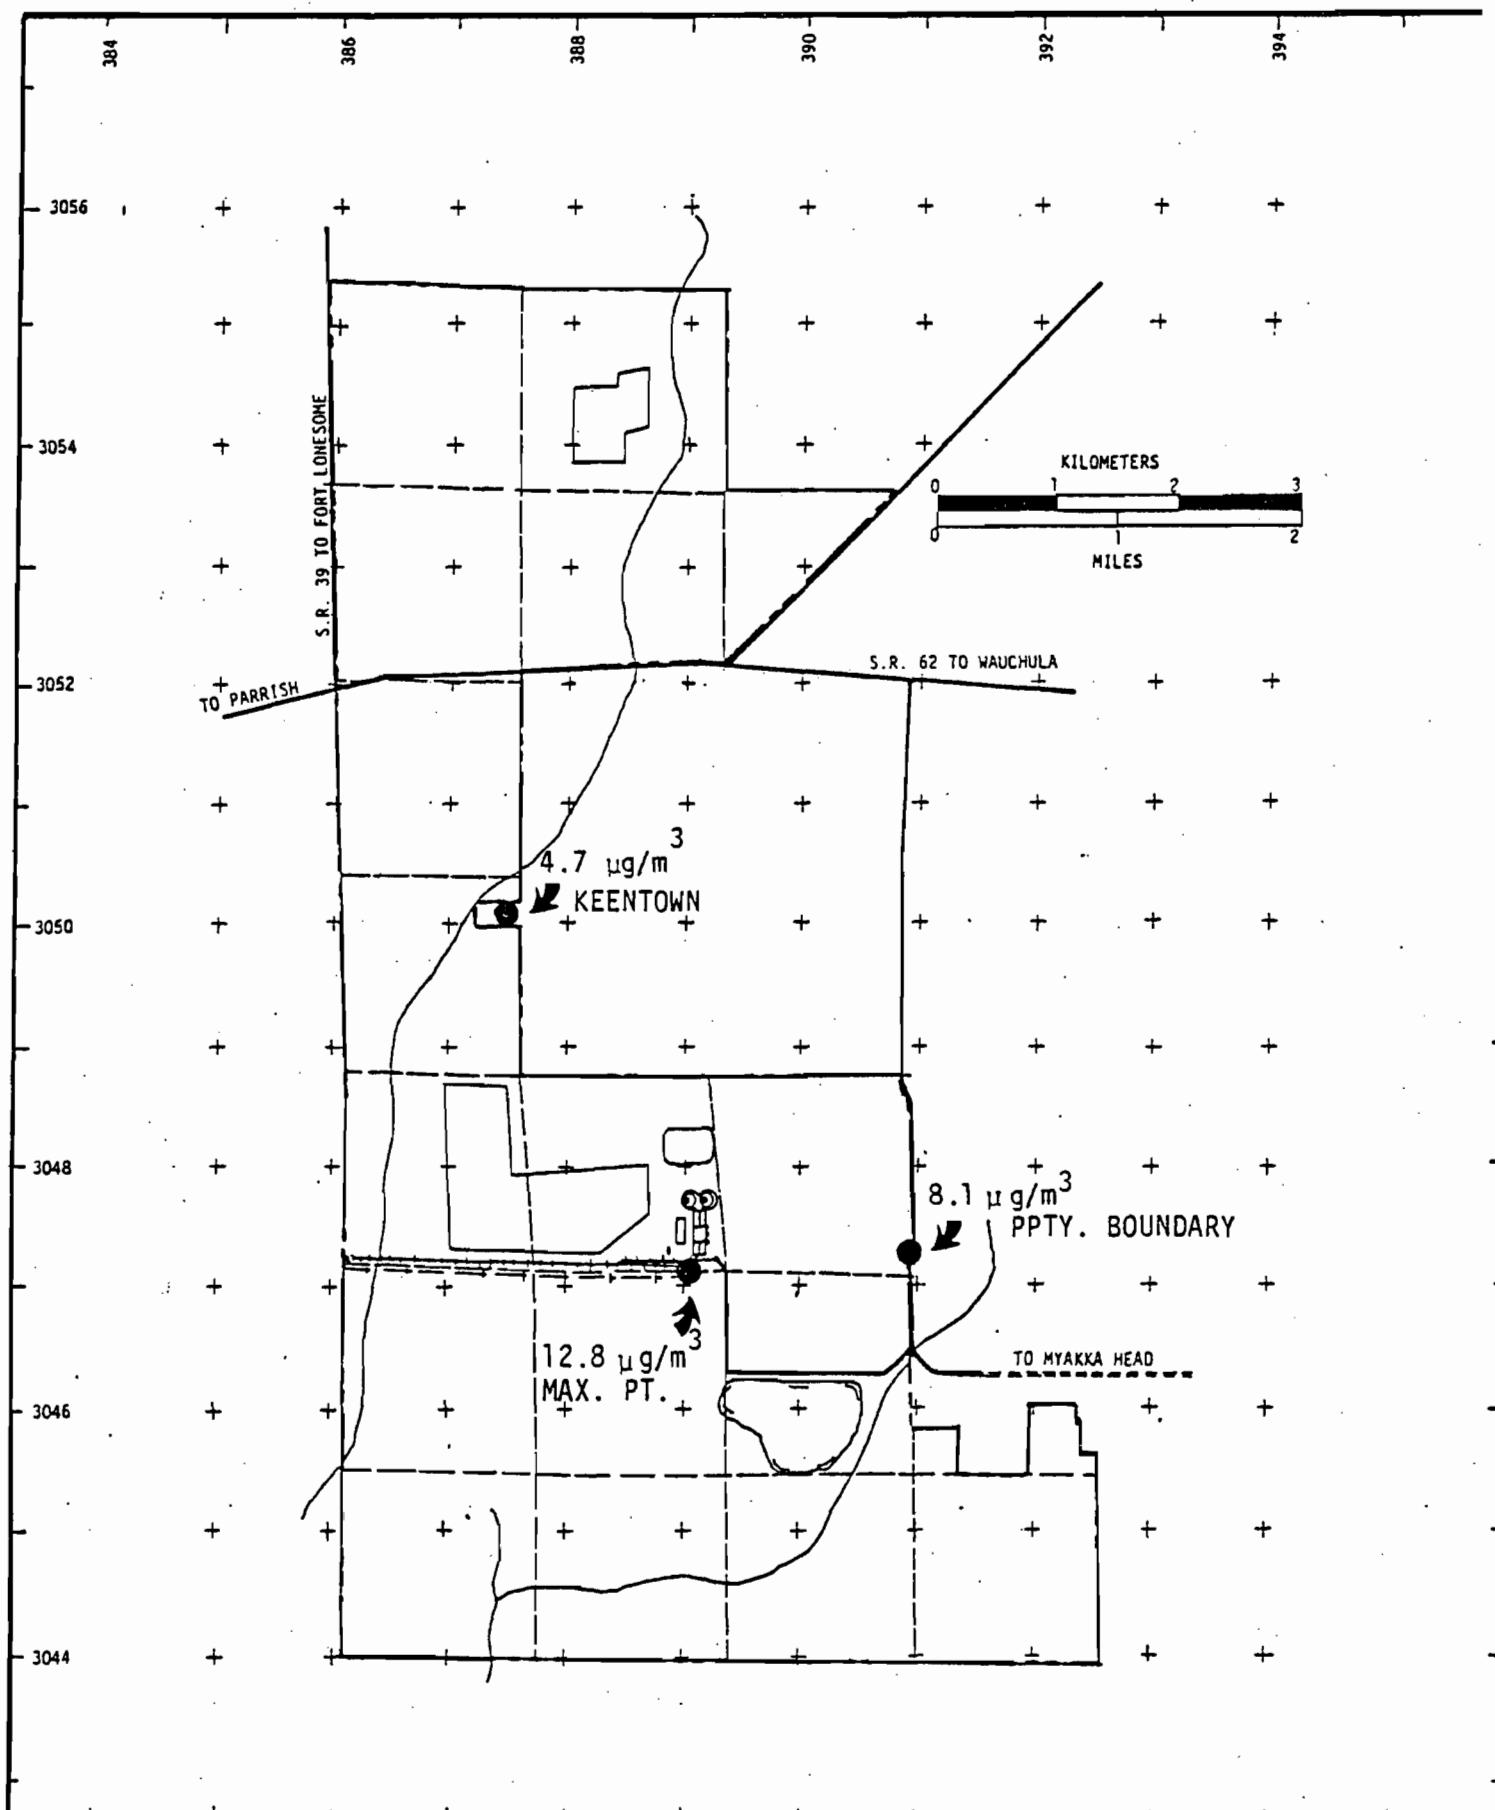


FIGURE 6.1 - 4
SHORT TERM (24 HOUR) EFFECTS OF PROPOSED SOURCE PARTICULATE EMISSIONS



were no significant sources located to the south of the proposed facility that would interact to produce higher concentrations at Keentown.

Increment Consuming Sources (PSD): Short-term air quality effects of increment consuming sources were determined from maximum allowable short-term emission rates as a means of determining conformance with the 24-hour PSD increment of 37 micrograms per cubic meter. A list of the increment consuming sources is included in Appendix C. These effects were examined for the worst case (highest, second highest), meteorological condition for the proposed source cluster or for upwind sources, either of which suggested generation of a maximum concentration (or both if there was any uncertainty). The analysis was performed for all major upwind increment consuming sources or source groupings to identify maximum ranking highest, second highest short-term concentrations for two locations irrespective of property boundaries and for two locations on property boundaries.

Short-term effects of all increment consumers at the worst two points of highest, second highest concentration were found to be 12.9 and 9.8 micrograms per cubic meter at locations shown in Figure 6.1-5. Increment consumption was therefore found to be 12.9 micrograms per cubic meter or 35 percent of the allowable 37 micrograms per cubic meter PSD increment at the point of maximum concentration. The maximum value (12.9 micrograms per cubic meter) was produced by interaction with sources to the west on Julian day 175 in 1972. For this case, the worst case wind vector was rotated to pass through the Manatee Energy source. The next highest value, 9.8 micrograms per cubic meter, was produced by interaction

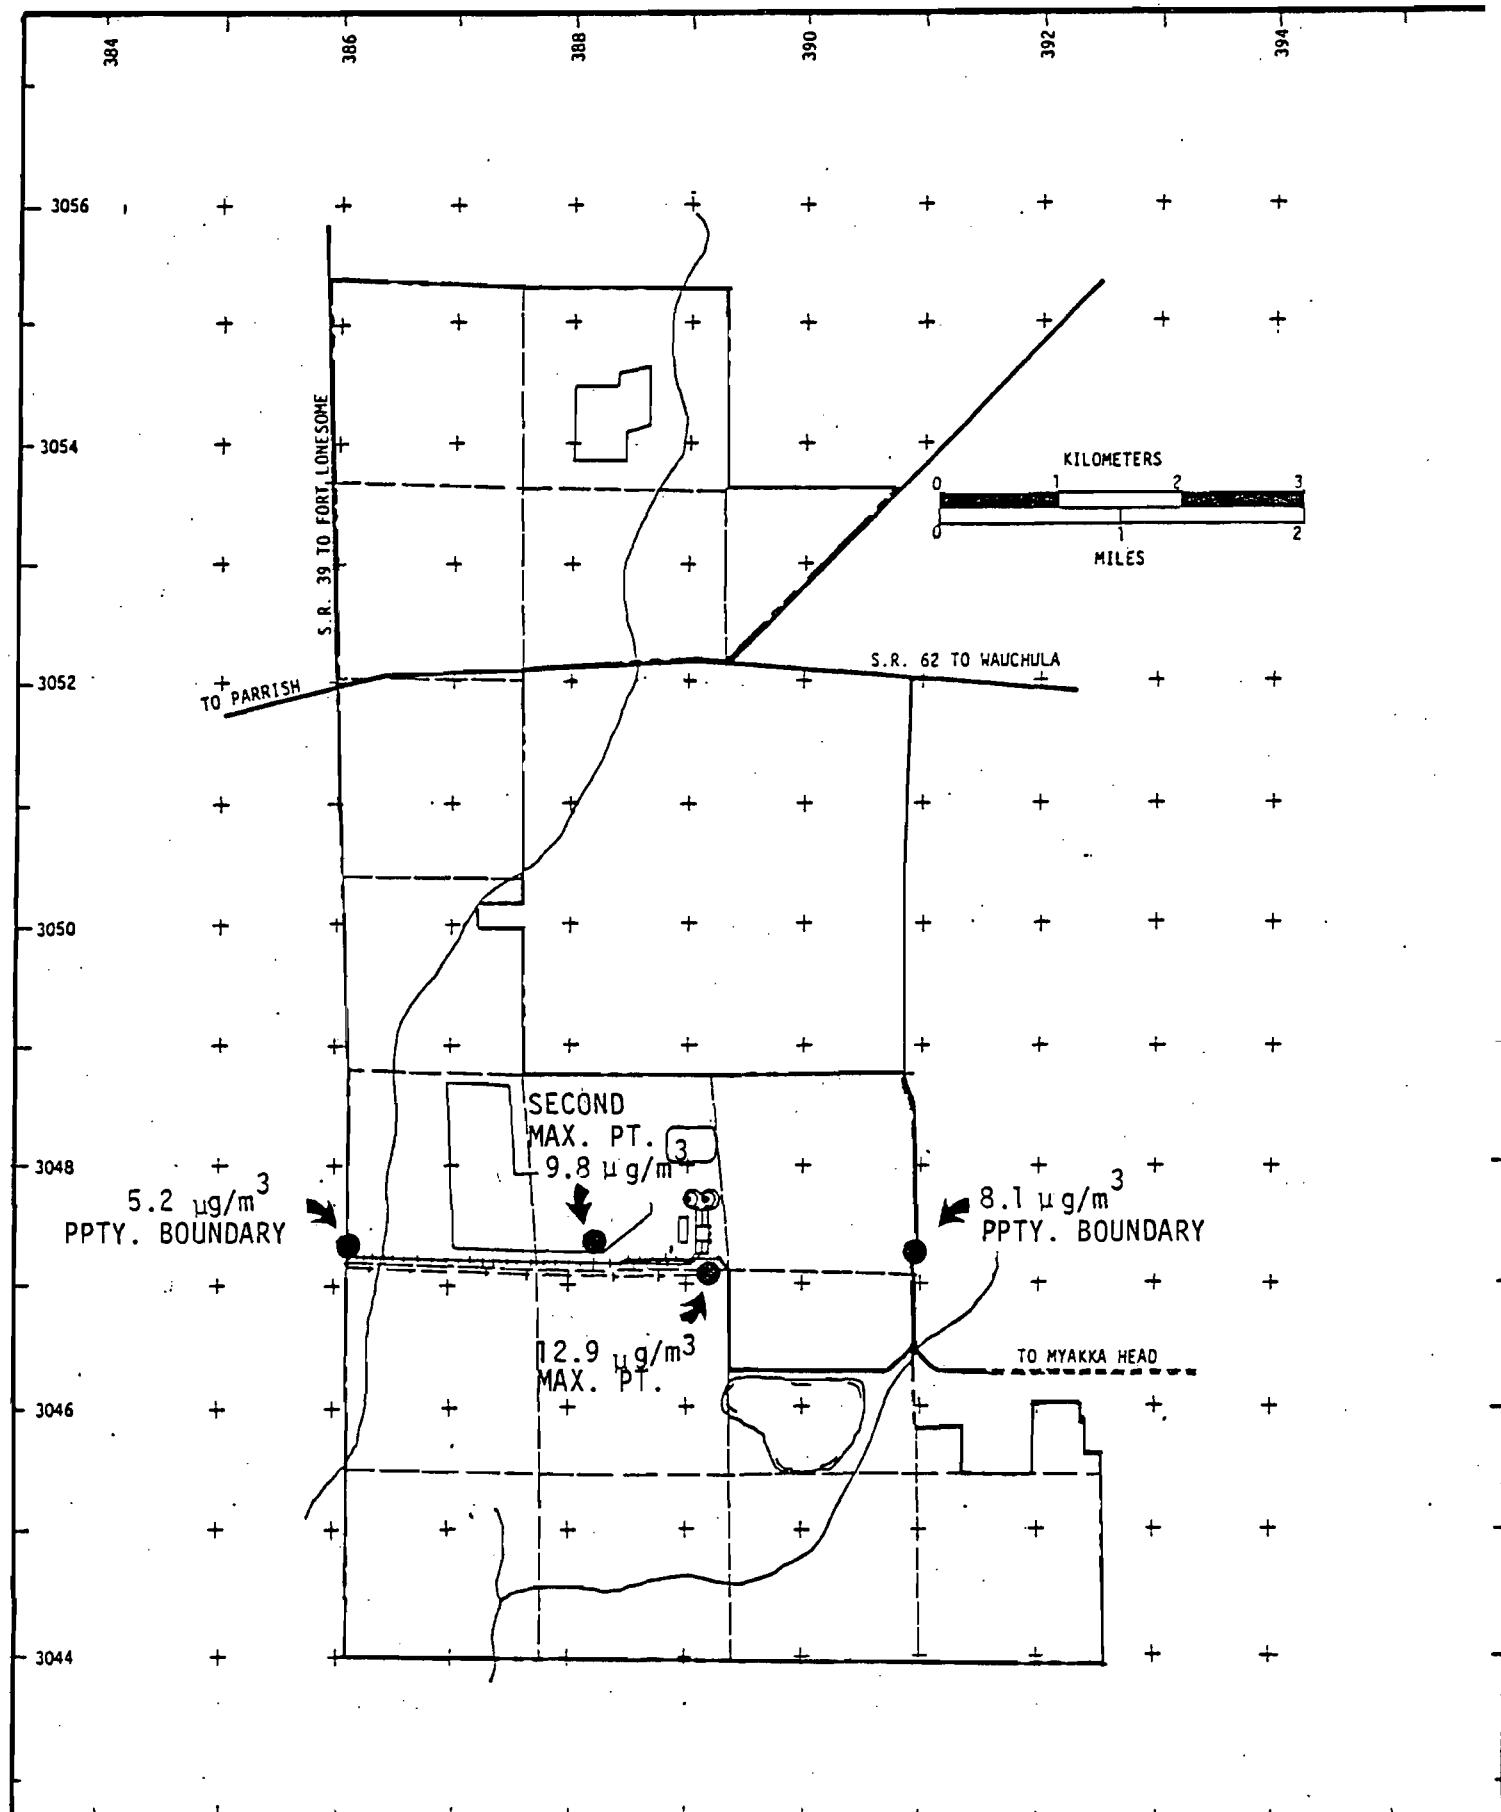


FIGURE 6.1 - 5
 SHORT TERM (24 HOUR) EFFECTS OF INCREMENT CONSUMING SOURCE PARTICULATE EMISSIONS.



interaction with sources from an easterly direction. This high value was produced by Julian day 138 in 1970. Both were determined by CRSTER rings approximating the distance from the source to the point of maximum impact.

The short-term effect of increment consumers at the worst two property boundary locations were found to be 8.1 and 5.2 micrograms per cubic meter. The worst value, 8.1 micrograms per cubic meter, was produced by Julian day 174 in 1972 and is less than 23 percent of the allowable PSD increment of 37 micrograms per cubic meter. Comparison with the above section shows that this is the same value and date of maximum effect for the source alone and indicates the upwind increment consumers have no appreciable effect for this case. The next ranking property boundary effect, 5.2 micrograms per cubic meter, was produced by the interaction of sources to the east on Julian day 121 in 1972. Both conditions were determined by CRSTER rings approximating the distance between the source and the property boundary.

Projected Short-Term Particulate Concentrations (1982): Projected short-term effects of all stationary sources were added to the short-term background value of 55 micrograms per cubic meter determined in Section 5.1 to produce an estimate of conformance with the State and National Primary Ambient Air Quality Standards (NAAQS) of 150 and 260 micrograms per cubic meter, respectively. The same methodology was employed as used in analysis of the increment consumers and all possible worst case conditions were evaluated.

The short-term 1982 effects of all sources at the points of maximum concentration were found to be 69.3 micrograms per cubic meter ($55 + 14.3$) and 65.2 micrograms per cubic meter ($55 + 10.2$) at the locations shown in Figure 6.1-6. The maximum 1982 levels projected on this basis are somewhat

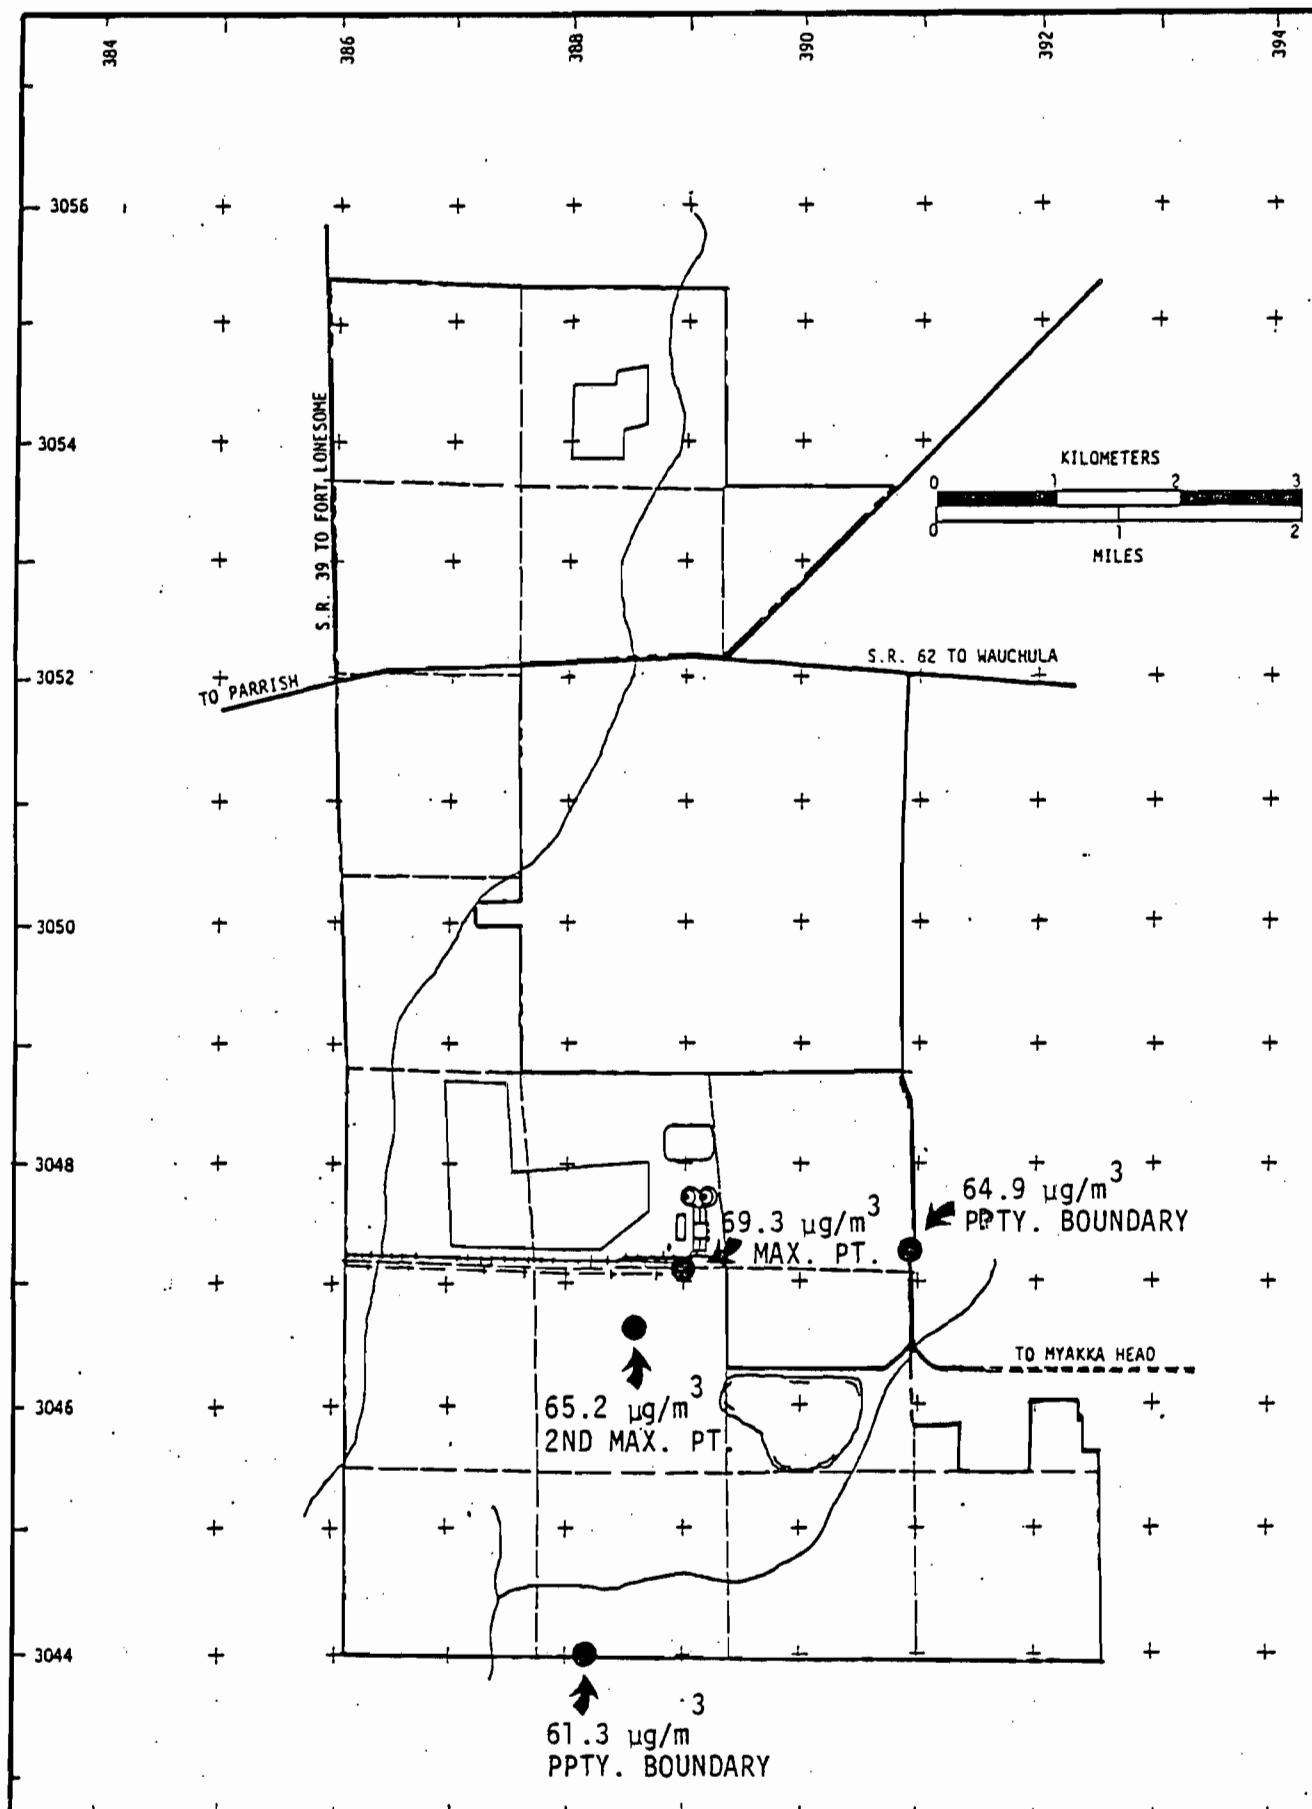


FIGURE 6.1 - 6
 PROJECTED SHORT TERM (24 HOUR) EFFECTS OF ALL STATIONARY SOURCE PARTICULATE EMISSIONS



lower than either of the statistical projections or measured values reported in Section 5.1, but these results must be compared with the estimated 1977 Baseline in Section 5.2 for proper perspective. All factors considered, the 1982 ambient air quality should remain less than two-thirds of the 150 micrograms per cubic meter ambient secondary (state) standard.

The maximum value, 69.3 micrograms per cubic meter, was produced by Julian day 175 in 1972 from a westerly direction. For this case the worst meteorology was rotated to pass through the Manatee Power Plant (FP&L). The next highest value, 65.2 micrograms per cubic meter was produced by interaction of sources to the northeast on Julian day 24 in 1973. Both effects were determined from CRSTER rings approximating the distance between the maximum point and the proposed source.

The short-term 1982 effects of all sources at the maximum property boundary locations were found to be 64.9 micrograms per cubic meter and 61.3 micrograms per cubic meter. The worst value, 64.9 micrograms per cubic meter, was produced by Julian day 174 in 1972 from a westerly direction and the next highest was produced by interaction with sources from a northeasterly direction on Julian day 24 in 1973. Both conditions were produced by CRSTER rings approximating distance between the source and the property boundary. The results indicate that the worst property boundary concentration will also be less than two-thirds of the state and federal secondary standard of 150 micrograms per cubic meter in 1982.

6.2 Sulfur Dioxide

Estimates of sulfur dioxide effect were developed from AQDM and CRSTER analyses used to evaluate nitrogen oxide and particulate matter effects, respectively.

Annual sulfur dioxide concentrations were computed by factoring the nitrogen oxide concentrations by the ratio of sulfur dioxide to nitrogen oxide emission rates. Short-term concentrations were computed with the PTMTP-W computer code using worst case CRSTER meteorology developed for the particulate matter analysis (Appendix E).

Long-Term (Annual) Effects of Proposed Source - Sulfur dioxide emissions from the boiler are a predominating factor determining maximum sulfur dioxide effect. The relatively short stack height and proximity to the north property boundary combine with the dryer emissions to produce an estimate of sulfur dioxide concentration of approximately 0.2 micrograms per cubic meter at the north property boundary. Analysis of available modeling results suggest that the point of maximum effect of stationary sources is close to the north property line and between the boundary and the source cluster. Addition of the non-stationary, area source effects was determined to increase the north property boundary value to approximately 0.3 micrograms per cubic meter. The results indicate that it would be highly unlikely for the proposed source to contribute to an exceedance of the allowable PSD increment. In fact, if all the existing sources were increment consumers, addition of the entire measured 1977 Baseline estimate of 15 micrograms per cubic meter (Section 5.3) to the proposed source would not exceed the PSD increment. Addition of the proposed source effects to the measured Baseline estimate also suggests that exceedance of the state and federal primary (NAAQS) standards of 60 and 80 micrograms per cubic meter, respectively, are not possible without other major source development in the immediate area of the proposed mine.

Short-Term (24-hour) Effects of the Proposed Source - The highest, second highest short-term concentration at the point of maximum effect

was determined to be 10.9 micrograms per cubic meter and the highest, second highest concentration at a property boundary was estimated to be 2.3 micrograms per cubic meter. Both effects were computed for points directly east of the source cluster by worst case meteorology on Julian days 175 and 174, respectively, of 1972. The effects compare with short-term 24-hour PSD increment criteria of 91 micrograms per cubic meter and suggest that it is unlikely that the proposed source would contribute an exceedance of the PSD allowable increments as there are no significant increment consumers upwind of the source under these conditions. As with annual effect, if all the existing sources were increment consumers, addition of the entire measured Baseline estimate of 75 micrograms per cubic meter (Section 5.3) to the proposed source would not exceed the PSD increment. Addition of the proposed source effects to the measured Baseline estimate also suggests that exceedance of the 24-hour state and federal primary standards of 260 and 365 micrograms per cubic meter, respectively, are not possible without other major source development in the immediate area.

6.3 Nitrogen Dioxide

Estimates of annual nitrogen dioxide effect were determined with the AQDM computer code. Non-stationary sources were treated as an area source equivalent in size to one year of mining activity. The area source assumed a hypothetical "worst case" condition of two reclamation crews operating on a single tract of land, a condition not likely to be encountered during actual mining operations. The purpose of the modeling effort was to test conformance with the one microgram per cubic meter annual average significance level for nitrogen dioxide and to evaluate any potential for exceedance of the NAAQS.

Long-Term Annual Effects of Proposed Source - Maximum annual effect of the two stationary sources is greatest, a value less than 1.0 micrograms per cubic meter, a short distance within the east property boundary. The two stationary sources have greatest property boundary effect, a value less than 0.5 micrograms per cubic meter, at a location east of the source cluster. Non-stationary source effects are projected to have greatest annual effect on the western perimeter of the area source, but relatively little reclamation activity will be conducted in the vicinity of the west property boundary. Non-stationary sources are projected to add approximately 0.4 micrograms per cubic meter at the east property boundary and yield a total source effect of approximately 0.9 micrograms per cubic meter. The analysis suggests that the stationary source property boundary effects will typically be less than 0.5 micrograms per cubic meter and the overall effect will be less than 1.0 micrograms per cubic meter when reclamation activities are conducted along the property boundary. The maximum concentration point is expected to occur within the property boundary, and the value and location will be dependent upon location of reclamation activities. It is possible that the maximum point concentration may slightly exceed 1.0 micrograms per cubic meter for one or two years when reclamation activities are in the immediate vicinity of the stationary source point of maximum concentration, but this condition will only be temporary.

Addition of the nitrogen dioxide source effects to the baseline assumption of 20 micrograms per cubic meter (Section 5.6) reveals a situation quite similar to sulfur dioxide effect — in that exceedance of the federal and state standards of 100 micrograms per cubic meter are not possible without other major source development in the immediate area of the proposed mine.

6.4 Effects on Soils and Vegetation

Pollutant emissions from the proposed facility include substances that are known to interact with the soil and vegetation. These substances may be in either particulate or gaseous form, and may have beneficial or adverse impact depending on physical, chemical, and other environmental factors. Pollutants having greatest potential for interaction are discussed as follows.

Sulfur Compounds - Sulfur will be released in both gaseous and particulate forms. The predominant gaseous release, sulfur dioxide, along with similar emissions from nearby stationary sources, will produce ambient concentrations that are well below state and secondary federal standards. The secondary standards were designed to protect both the public health and well-being. Insofar as damage to vegetation or soil would constitute an effect on public well being, the ambient air quality standard for sulfur dioxide insures against adverse effects.

It is anticipated that particulate matter emissions will contain minor amounts of chemically combined sulfur in oxidized form. As discussed in Section 3.2, there is evidence that constituents in phosphate rock, e.g., limestone, react with and oxidize sulfur dioxide generated in the (dryer) fuel combustion process, and result in the formation of sulfate compounds. While the compounds formed may have varying solubilities after depositing to the ground surface (soil system) their addition to typically alkaline central Florida soils would be somewhat similar in effect to agricultural applications of sulfur. Sulfur is frequently used to reduce soil alkalinity and improve agricultural productivity. Thus, nearby agricultural lands, e.g., citrus, grazing pasture, etc., most likely to experience any effect

at all, may be considered to derive slight benefit from minor additions of sulfur compounds.

Nitrogen Compounds - Nitrogen will be released to the atmosphere primarily in gaseous form as nitric oxide, but will react with other atmospheric pollutants, e.g., ozone, hydrocarbons, etc., fairly rapidly to form other pollutant species, e.g., nitrogen dioxide, peroxyacetyl nitrate, etc. Inasmuch as projected ambient concentrations are substantially below federal and state standards, direct damage to vegetation and soils by nitrogen oxides is extremely unlikely. Atmospheric nitrogen oxides are precursor pollutants which can contribute to the formation of photochemical smog. This effect is discussed in more detail under the topic of Visibility (Section 6.5).

Phosphate Compounds - While some ash will be contributed by fuel oil combustion, phosphate rock and clay dusts will predominate in the emissions of particulate matter from dry rock processing operations. The phosphate fraction is relatively less soluble and less available to soil than processed fertilizers, but this nutritive substance will be deposited and taken up into the soil system. While the effect may be so slight as to be unnoticeable, nearby agricultural lands may benefit slightly from the additions.

Fluorides - The drying temperatures are generally much too low to release gaseous fluoride from the rock, but the formation of minor amounts of fluoride gas and soluble compounds is expected. While the pollution control equipment is optimized for removal of both particulate matter and gaseous substances, some soluble and insoluble fluorides will be released. The relatively insoluble fluoride would predominate as a constituent of the phosphate rock dust. A portion of soluble component

will be present as a gas and the balance will be present in solid particulate form.

While there is some question as to whether fluoride is an essential nutrient in both vegetation and animals, any substantial addition to naturally occurring levels can be expected to contribute adverse effect. The best possible estimate of the total soluble and insoluble fluoride emission is a range of 10-15 pounds per day including less than one pound per day of gaseous fluoride (IMC, 1977). For comparison, a recent impact analysis for a fertilizer production facility (EPA, 1978) reported effects on livestock and vegetation corresponding to fluoride emissions of 379 pounds per day (exclusive of gypsum pond emissions for which the daily rate was estimated to be a value between limits of 40 and 4,000 pounds per day).

Cattle born and raised within a 5 mile radius of the fertilizer production source were reported to have been subjected to clinical examination. The examination indicated slight effect on a few teeth in less than one-third of the animals examined. Slight effect is described as slight mottling, i.e., horizontal striation of tooth enamel with no increase in normal wear (National Academy of Sciences, 1974). Reported vegetation surveys conducted over a four year period revealed only moderate tip necrosis in pine trees located on a cooling pond dike and no other significant effects in the vicinity of the source. Pine is among a select group of vegetation, e.g., Gladiolus, grape, sweet corn, tulip, etc., which are classed as most sensitive to fluoride. Examples of intermediate and resistant species are citrus and tomato, respectively (APCA, 1970). Based upon these reported findings, it is unlikely that significant adverse fluoride

effect could result from the relatively low emissions projected for the proposed facility.

Radioactive Substances - Phosphate rock and phosphatic clays contain radionuclides in somewhat greater concentrations than occur in natural surface soils. Dusts emitted from the drying storage and loading operations will contain radioactive components which will deposit to the ground surface in a somewhat predictable manner. The radiological section of this study examines airborne radionuclide transport from the source and discusses the effects in considerable detail. This section should be referred to for additional information.

6.5 Effects on Visibility

Visibility effects may result from a variety of phenomena. Each are briefly discussed below along with the potential relationship with or contribution from the proposed source.

Photochemical Smog - The precursors of photochemical smog are nitrogen oxides and reactive hydrocarbon species; and a surrogate index of the magnitude of the smog prevalence is the ozone concentration produced during periods of maximum sunlight intensity. Two visibility effects are associated with photochemical smog. One is a brownish appearing discoloration produced by absorption of light in the blue wavelength range by nitrogen dioxide. The second is obscuration of distant objects (light absorption and scattering) by submicron particles that are formed from gaseous pollutants in the atmosphere. The particles are formed through complex chemical reactions that are induced by the energy in sunlight (hence the term photochemical). The precursor chemical gases

are contributed by both natural and manmade sources. Nitrogen oxides are produced primarily by high temperature combustion of fuel, e.g., boilers and automotive vehicles. Hydrocarbons are released from the incomplete combustion of fuels, e.g., automotive engines and from fuel storage and transfer operations. Significant quantities of hydrocarbons are also contributed from natural marine and terrestrial sources, e.g., pinene from pine forests. Since some of the smog producing reactions are cyclic and can regenerate the nitrogen oxide precursors, the pollutant gases can travel relatively great distances from the point of emission and continue to generate smog effects in their path. Thus visibility effects due to smog formation may be produced by long distance importation of aged pollutants that are supplemented by local emissions from the affected area. This mechanism is suspected as a contributor to the smog incidence in the central Florida region.

As the proposed source will utilize fuel oil in the mining and rock drying processes and some of the fuel will undergo high temperature combustion, it will contribute to smog formation in relative proportion to all other contributions of precursor pollutants to the region.

Plumes - Gases discharged from an industrial stack may contain solid particulates, e.g., smoke, and/or droplets which condense from superheated vapors. This liquid and solid aerosol is highly concentrated at the exit point and it obscures visibility in a relatively well defined dispersion pattern departing from the source. Plumes can also contain fine submicron particulate matter which may induce a localized formation of fog (Charleson, 1978). To many individuals, the appearance of a plume is aesthetically unattractive, particularly when present in a scenic vista. In this case the landscape is not viewed as characteristically scenic,

so that the vapor plume should not particularly detract from aesthetic values. Further, the stack heights have been adjusted to lowest reasonable levels to reduce this effect to the greatest possible degree.

Emissions from the proposed source will be ducted to the atmosphere through stacks closely matching the height of other structures to minimize excessive plume height and visibility from long distances. The particulate emission concentrations controlled under new BACT requirements will be below levels generally considered observable by trained plume opacity observers (EPA, 1978B). However, the plumes will contain varying degrees of heated water vapor that will condense into droplets at the stack exit. The white plume having the appearance of steam will dissipate (evaporate) within a relatively short distance from the stack except during conditions of abnormally high relative humidity.

As the proposed facility will be located nearly 1-1/2 miles from the nearest public road, aerosol inducement of localized fog is considered relatively unlikely on nearby roadways.

Wind Entrained Dust - The mining operations will expose open soil surfaces which after rainfall will form surface crust and subsequently will be reclaimed with vegetative cover. Wind entrainment of soil is a function of particle size (weight) and attractive forces between particles which increase with decreasing particle diameter. Wind entrained particles tend to be sufficiently large that they nominally return to the surface within relatively short distances from the source. Similar to agricultural cultivation of crop lands, localized obscuration of vision may accompany mining activities during excessively windy conditions.

High Relative Humidity Haze and Fog - As large scale haze and fog may be induced by particulate (condensation nucleii) that are contributed by industrial, urban, and both natural terrestrial and maritime sources, the proposed source will contribute to haze and fog formation in relative proportion to all regional contributions of condensation nucleii.

6.6 Secondary Growth Effect.

Population growth and commercial activities are not expected to develop in the immediate area of the mine, but will tend to exhibit a diffuse pattern of relatively minor effects in remote areas. A combination of factors suggest against population and commercial development in the vicinity of the mine. First, the mine will employ a relatively small number of people and present land ownership and zoning strongly suggest that very few could relocate to the vicinity of the mine. This observation follows a general historical pattern that has shown that area mining has not contributed significantly to development of new aggregations of population and commercial activity. Increased energy utilization, e.g., electric power, is an industrial growth component for which impact has already been examined in considerable detail.

BIBLIOGRAPHY

- APCA, 1970 - Recognition of Air Pollution Injury to Vegetation: A Pictorial Atlas. Air Pollution Control Association, Pittsburgh, Pennsylvania 1970.
- BACTS, 1979 - Draft Best Available Control Technology Applications for: Phosphate Rock Dryers No. 1 and 2 with Wet Venturi-Absorbers (Stack No. 1), Dry Rock Storage Silos No. 1-8 with Wet Scrubbers (Stack No. 2) and Dry Rock Loading Stations No. 1 and 2 with Wet Scrubbers (Stack No. 3), Swift Agricultural Chemicals Corporation, August, 1979.
- CCI, 1979 - Personal conversation with Mr. Hubert Coulter, Superintendent of Drying and Shipping, Gardiner, Inc., Fort Meade, Florida, June 12, 1979.
- Charleson, 1978 - Charleson, R.J., et.al., Visibility Protection for Class I Areas: The Technical Basis, PB 288-842. Prepared for Council on Environmental Quality, Washington, D. C., August, 1978.
- DRI, 1978 - Development of Regional Impact filed with the Florida Division of State Planning, Department of Administration by Swift Agricultural Chemicals Corporation. April 17, 1978.
- EPA, 1971 - Larson, R.I., A Mathematical Model for Relating Air Quality Measurements to Air Quality Standards, AP-89, U.S. EPA, November, 1971.
- EPA, 1973 - Compilation of Air Pollutant Emission Factors (AP-42), 2nd Edition, thru Supplement 8, May, 1978.
- EPA, 1976 - Air Pollution Emission Test, EPA Report for Mobil Chemical, Nichols, Florida, No. 75-PRP-3, Engineering Science, Inc., January, 1976.
- EPA, 1977 - Guidelines for Air Quality Maintenance Planning and Analysis, Vol. 10 (Revised) Procedures for Evaluating Air Quality Impact of New Stationary Sources, EPA-450/4-77-001, October, 1977.
- EPA, 1978 - EIS, Occidental Chemical Company, Swift Creek Chemical Complex, Hamilton County, Florida, EPA 904/9-78-012, July, 1978.
- EPA, 1978A - Final Areawide Environmental Impact Statement, Central Florida Phosphate Industry, EPA 904/9-78-026(A), U.S. EPA, November, 1978.
- EPA, 1978B - Augenstein, D.M., Air Pollutant Control Techniques for Phosphate Rock Processing Industry, EPA 450/3-78-030, OAQPS Guideline Series, June, 1978.
- EPA, 1978C - Ambient Monitoring Guidelines for Prevention of Significant Deterioration (PSD), EPA 450/2-78-019, OAQPS Guideline Series, May, 1978.

BIBLIOGRAPHY

(Continued)

- ESE, 1975 - Manatee Plant Site Ambient Air Monitoring Program, Annual Report, Florida Power and Light Company, Manatee County, Florida, 1975.
- ESE, 1976 - Manatee Plant Site Ambient Air Monitoring Program, Annual Report, Florida Power and Light Company, Manatee County, Florida, 1976.
- ESE, 1977 - Manatee Plant Site Ambient Air Monitoring Program, Annual Report, Florida Power and Light Company, Manatee County, Florida, 1977.
- ESE, 1978 - Manatee Plant Site Ambient Air Monitoring Program, Annual Report, Florida Power and Light Company, Manatee County, Florida, 1978.
- F. R., 1978 - Prevention of Significant Air Quality Deterioration, Federal Register Vol 43, p. 26393, Monday, June 19, 1978.
- HEPC, 1977 - Environmental Quality: 1977 Hillsborough County, Florida, Hillsborough County Environmental Protection Commission, 1977.
- IMC, 1977 - Operating Permit for No. 2 Dryer at Noralyn Plant. A0-53-5147, State of Florida Department of Environmental Regulation, 1977.
- NAS, 1979 - Effects of Fluorides in Animals, National Academy of Sciences, Washington, D.C., 1974.
- PEDCo, 1976- Air Quality Modeling in Hillsborough, Pinellas, and Polk Counties, Florida, PEDCo Environmental Specialists, Inc. U.S. EPA Contract No. 68-02-1375, Region IV, July, 1976.
- PERMITS, 1979 - Draft Construction Permit Applications for: Phosphate Rock Dryers No. 1 and 2 with Wet Venturi-Absorbers (Stack No. 1), Dry Rock Storage Silos No. 1-8 with Wet Scrubbers (Stack No. 2), Dry Rock Loading Stations No. 1 and 2 with Wet Scrubbers (Stack No. 3), and 100 HP Boiler, Oil Fired (Stack No. 4). Swift Agricultural Chemicals Corporation, August, 1979.
- SACC, 1978 - Memorandum L.M. Davis to J. Davis, Subject: Stack Gas Test - Fluosolids Dryer, March 7, 1978.
- SPEAD, 1976 - City of St. Petersburg Environmental update, Environmental Affairs Department, St. Petersburg, December, 1976.
- Toalster, B. and C. D. Turley, 1977 - Dedicated Fugitive Dust Control for Ground Phosphate Rock Loading. Paper presented at Florida Section APCA, September 26, 1977.

INTERIM SUMMARY OF AMBIENT AIR QUALITY MONITORING
FOR SWIFT AGRICULTURAL CHEMICALS CORPORATION

MAY 19, 1977 - JULY 31, 1978

INTERIM SUMMARY
OF
AMBIENT AIR QUALITY MONITORING
FOR
SWIFT AGRICULTURAL CHEMICAL CORP.

May 19, 1977 - July 31, 1978

Submitted to: SWIFT AGRICULTURAL CHEMICALS CORP.
First Commercial Bank Building
410 Cortez Road West, Suite 275
Bradenton, Florida 33507

Submitted by: CONSERVATION CONSULTANTS, INC.
Post Office Box 35
Palmetto, Florida 33561

TABLE OF CONTENTS

	<u>Page</u>
SITE LOCATION DIAGRAM	1
ANNUAL DATA SUMMARIES	2
INCLUSIVE DATA SUMMARIES	3
ANNUAL VEGETATIVE FLUORIDE SUMMARY	4
ANNUAL WIND ROSE	5
AIR QUALITY DATA	6
COMPREHENSIVE LOCAL CLIMATOLOGICAL DATA	20

SWIFT AGRICULTURAL CHEMICAL CORP.

ANNUAL DATA SUMMARIES

(6/18/77 - 6/13/78)

Total Suspended Particulate (TSP - $\mu\text{g}/\text{m}^3$)

Station	Minimum	Maximum	Geometric Mean
S-1	9.0	95.3	26.3
S-2	6.4	72.6	20.6
S-3	11.9	121.5	29.2
FDER Standard	--	150	60

Sulfur Dioxide (SO_2 - $\mu\text{g}/\text{m}^3$)

Station	Minimum	Maximum	Arithmetic Mean
S-1	0.0	50.9 (164.4) ^a	11.6 (14.6) ^a
S-2	0.0	51.4	10.3
S-3	0.0	49.1	15.0
FDER Standard	---	260	60

Atmospheric Fluoride (F_{atm} - $\mu\text{g}/\text{m}^3$)

Station	Minimum	Maximum	Arithmetic Mean
S-1	0.00	3.97	.63
S-2	0.00	2.20	.42
S-3	0.02	3.17	.45

a - Includes questionable measurement of 164.4 on 5-8-78.

SWIFT AGRICULTURAL CHEMICAL CORP.

INCLUSIVE DATA SUMMARIES

(5/19/77 - 7/31/78)

Total Suspended Particulate (TSP - $\mu\text{g}/\text{m}^3$)

Station	Minimum	Maximum	Geometric Mean
S-1	9.0	95.3	25.3
S-2	6.4	72.6	23.2
S-3	8.9	121.5	28.4
FDER Standard	---	150	60

Sulfur Dioxide (SO_2 - $\mu\text{g}/\text{m}^3$)

Station	Minimum	Maximum	Arithmetic Mean
S-1	0.0	50.9 (164.4) ^a	11.3 (14.1) ^a
S-2	0.0	51.4	11.5
S-3	0.0	49.1	13.7
FDER Standard		260	60

Atmospheric Fluoride (F_{atm} - $\mu\text{g}/\text{m}^3$)

Station	Minimum	Maximum	Arithmetic Mean
S-1	0.00	3.97	0.57
S-2	0.00	2.20	0.42
S-3	0.00	3.17	0.43

a - Includes questionable measurement of 164.4 on 5-8-78.

SWIFT AGRICULTURAL CHEMICAL CORP.
 ANNUAL VEGETATIVE FLUORIDE SUMMARY
 $(F_{veg} - \text{ppm})$

Month \ Station	S-1	S-2	S-3	S-4	S-5	S-6
June, 1977	3.2	5.0	1.3	1.8	2.1	0.8
July, 1977	a	a	a	0.3	3.7	1.0
August, 1977	3.9	10.0	5.2	8.0	10.3	8.5
September, 1977	10.7	6.7	6.5	4.9	13.1	110.6
October, 1977	6.3	8.8	13.9	15.8	14.7	22.6
November, 1977	16.9	17.3	29.5	39.1	26.1	30.4
December, 1977	12.1	15.4	17.0	35.9	21.3	12.5
January, 1978	25.0	21.4	17.2	7.8	17.6	10.4
February, 1978	8.1	47.5	37.8	19.0	7.6	9.5
March, 1978	15.6	52.5	16.8	43.1	38.9	49.0
April, 1978	b	b	b	b	b	b
May, 1978	b	b	b	b	b	b
June, 1978	11.3	14.0	17.8	15.5	9.4	17.1
July, 1978	19.1	14.7	13.3	14.9	21.1	11.8

a - Insufficient sample available.

b - Sample not collected. Sampling continued two additional months to compensate for missing data.

Italicized Values are considered evidence of air pollution effect on vegetation as expressed in Manatee County Air Pollution Rules. Some elevated measurements are believed related to agricultural applications of fertilizer.

AIR QUALITY DATA

STATION 1: BILL PARRISH ROAD

<u>Date</u>	<u>TSP, $\mu\text{g}/\text{m}^3$</u>	<u>$\text{SO}_2, \mu\text{g}/\text{m}^3$</u>	<u>$F_{\text{atm}}, \mu\text{g}/\text{m}^3$</u>
5/19	9.1	10.5	0
5/25	21.4	-a-	.031
5/31	17.1	9.6	.064
6/06	11.0	3.6	.232
6/12	46.0	3.6	0
6/18	18.8	2.4	.159
6/24	79.0	5.4	.178
6/30	42.5	3.0	.754
7/06	16.0	12.0	.527
7/12	20.3	11.4	0
7/18	14.5	13.2	.309
7/24	17.8	11.3	.061
7/30	16.2	1.2	.003
8/05	13.7	13.2	0
8/11	16.4	8.6	.128
8/17	17.9	4.8	.060
8/23	-b-	7.5	.338
8/29	17.9	3.4	.195

-a- SO_2 Sampler malfunctioned

-b- Filter damaged in recovery

STATION S-1: BILL PARRISH ROAD

Date	TSP (ug/m ³)	SO ₂ (ug/m ³)	F _{atm} (ug/m ³)
9/04/77	9.0	8.3	.19
9/10/77	28.2	5.0	.05
9/16/77	25.7	7.0	.33
9/22/77	32.3	25.2	.02
9/28/77	17.5	14.0	1.27
10/04/77	37.4	13.8	.17
10/10/77	14.9	9.9	.24
10/16/77	38.0	14.3	.84
10/22/77	25.1	17.2	b
10/28/77	40.7	0.0	.78
11/04/77 ^a	71.4	1.2	.63
11/09/77	31.2	2.8	.26
11/15/77	23.3	6.8	.34
11/21/77	35.5	13.3	.52
11/27/77	25.6	29.4	.13

a Incorrectly set timer; sampled for 12 hours; not included in means.

b Accidental loss of sample solution.

STATION S-1: BILL PARRISH ROAD

<u>Sample Date</u>	<u>TSP ($\mu\text{g}/\text{m}^3$)</u>	<u>SO_2 ($\mu\text{g}/\text{m}^3$)</u>	<u>F_{atm} ($\mu\text{g}/\text{m}^3$)</u>
12-03-77	22.9	3.9	0.00
12-09-77	19.1	4.4	0.82
12-15-77	18.6	2.1	0.62
12-21-77	20.8	50.9	0.81
12-27-77	a	a	a
1-02-78	a	a	a
1-08-78	24.6	a	a
1-14-78	32.0	1.3	0.76
1-20-78	44.9	11.4	2.67
1-26-78	33.7	17.9	3.08
2-01-78	37.4	0.7	3.97
2-07-78	83.5 ^b	3.9	0.26
2-13-78	a	a	a
2-19-78	32.1	22.9	0.81
2-25-78	24.5	16.9	0.36

a - Data not available due to vandalism.

b - Elevated TSP level attributable to agricultural burning at numerous locations in the immediate vicinity.

STATION S-1: BILL PARRISH ROAD

<u>Sample Date</u>	<u>TSP ($\mu\text{g}/\text{m}^3$)</u>	<u>SO₂ ($\mu\text{g}/\text{m}^3$)</u>	<u>F_{atm} ($\mu\text{g}/\text{m}^3$)</u>
3/03/78	26.3	17.1	0.49
3/09/78	16.4	28.9	0.28
3/15/78	17.4	0.0	a
3/21/78	26.4	b	2.82
3/27/78	95.3 ^c	b	0.83
4/02/78	b	b	b
4/08/78	b	b	b
4/14/78	32.8	b	1.66
4/20/78	53.7	b	0.59
4/26/78	47.1	43.3	b
5/02/78	28.8	7.6	0.62
5/08/78	16.6	164.4 ^d	0.51
5/14/78	30.9	30.5	0.18
5/20/78	17.1	3.6	0.70
5/26/78	e	0.0	f
6/01/78	26.0	36.6	0.40
6/07/78	11.2	6.9	0.22
6/13/78	33.1	2.1	0.24
6/19/78	g	g	g
6/25/78	20.7	17.2	0.10

a - Operation error.

b - Data not available due to vandalism.

c - Similar high concentrations occurred at other nearby stations.

d - Measurements at nearby monitoring sites ranged from 0 to 22.8 on 5-8-78. Inconsistent measurement is believed to be the result of an unidentifiable error.

e - HiVol malfunctioned.

f - Sampling hose vibrated loose during sample run.

g - Sampling temporarily discontinued.

STATION 2: DUETTE

<u>Date</u>	<u>TSP, $\mu\text{g}/\text{m}^3$</u>	<u>$\text{SO}_2, \mu\text{g}/\text{m}^3$</u>	<u>$F_{\text{atm}}, \mu\text{g}/\text{m}^3$</u>
5/19 a	----	----	----
5/25 a	----	----	----
5/31 a	----	----	----
6/06 a	----	----	----
6/12 a	----	----	----
6/18	18.2	2.9	.015
6/24	72.6	10.6	.186
6/30	29.4	1.2	.161
7/06	17.9	7.2	.193
7/12	17.0	13.4	0
7/18	16.2	8.4	0
7/24	-b-	4.9	0
7/30	17.5	3.7	.043
8/05	12.1	8.4	0
8/11	16.6	3.9	.101
8/17	-c-	6.0	.095
8/23	10.3	14.4	.257
8/29	20.6	6.0	.230

-a- Electrical problems caused samplers to shutdown each day. The problem was finally traced to the circuit breaker box which was replaced.

-b- Filter damaged in recovery.

-c- Insect nest on filter.

STATION S-2: DUETTE

Date	TSP (ug/m ³)	SO ₂ (ug/m ³)	F _{atm} (ug/m ³)
9/04/77	a	a	a
9/10/77	30.5	4.6	.33
9/16/77	a	a	a
9/22/77	13.0	b	0.00
9/28/77	20.7	12.9	.18
10/04/77	a	a	a
10/10/77	15.2	24.8	.62
10/16/77	a	a	a
10/22/77	29.1	19.0	.50
10/28/77	39.1	0.0	.15
11/03/77	20.5	20.1	.31
11/09/77	31.2	4.7	.22
11/15/77	25.2	8.9	.51
11/21/77	34.8	34.6	.13
11/27/77	23.9	4.8	.20

a Problem with circuit breaker, new breaker installed.

b Accidental loss of sample solution.

STATION S-2: DUETTE

<u>Sample Date</u>	TSP ($\mu\text{g}/\text{m}^3$)	SO_2 ($\mu\text{g}/\text{m}^3$)	F_{atm} ($\mu\text{g}/\text{m}^3$)
12-03-77	25.8	4.1	0.07
12-09-77	16.0	16.9	0.80
12-15-77	21.8	3.2	0.52
12-21-77	21.2	51.4	0.37
12-27-77	a	2.5	0.68
1-02-78	b	b	b
1-08-78	b	1.2	0.80
1-14-78	b	0.6	0.49
1-20-78	b	0.0	0.93
1-26-78	43.9	4.4	2.20
2-01-78	b	b	b
2-07-78	a	4.6	1.09
2-13-78	b	b	b
2-19-78	6.4	35.1	1.29
2-25-78	c	c	c

a - HiVol malfunctioned.

b - Data not available due to vandalism.

c - Blown fuse in timer.

STATION S-2: DUETTE

<u>Sample Date</u>	<u>TSP ($\mu\text{g}/\text{m}^3$)</u>	<u>SO_2 ($\mu\text{g}/\text{m}^3$)</u>	<u>F_{atm} ($\mu\text{g}/\text{m}^3$)</u>
3/03/78	6.5	13.5	a
3/09/78	b	b	b
3/15/78	b	b	b
3/21/78	19.8	b	0.73
3/27/78	c	b	0.80
4/02/78	b	b	b
4/08/78	b	b	b
4/14/78	c	b	1.34
4/20/78	6.6	b	0.33
4/26/78	d	d	d
5/02/78	d	d	d
5/08/78	d	d	d
5/14/78	e	e	e
5/20/78	27.6	19.1	0.18
5/26/78	25.9	0.0	0.11
6/01/78	26.7	13.0	0.43
6/07/78	20.1	15.3	0.33
6/13/78	41.2	0.0	0.52
6/19/78	f	f	f
6/25/78	27.4	15.2	0.42
7/01/78	45.4	45.4	0.16

STATION S-2: DUETTE (Continued)

<u>Sample Date</u>	<u>TSP ($\mu\text{g}/\text{m}^3$)</u>	<u>SO_2 ($\mu\text{g}/\text{m}^3$)</u>	<u>F_{atm} ($\mu\text{g}/\text{m}^3$)</u>
7/07/78	23.1	23.1	1.00
7/13/78	20.9	7.6	0.73
7/19/78	18.1	10.1	0.24
7/25/78	43.7	16.6	0.16
7/31/78	23.5	10.4	0.48

- a - Operator error.
- b - Data not available due to vandalism.
- c - HiVol malfunctioned.
- d - Circuit breaker tripped.
- e - Timer malfunctioned.
- f - Sampling temporarily discontinued.

STATION 3: RAWLS ROAD

<u>Date</u>	<u>TSP, $\mu\text{g}/\text{m}^3$</u>	<u>$\text{SO}_2, \mu\text{g}/\text{m}^3$</u>	<u>$F_{\text{atm}}, \mu\text{g}/\text{m}^3$</u>
5/19	35.1	9.0	.152
5/25	23.7	1.4	.022
5/31	17.4	7.9	0
6/06	8.9	1.3	.231
6/12	59.6	3.5	.358
6/18	21.1	2.9	.097
6/24 ^a	----	----	----
6/30	31.1	2.0	.369
7/06	34.1	9.6	.019
7/12	14.6	6.5	.044
7/18 ^a	----	----	----
7/24 ^a	----	----	----
7/30 ^a	----	----	----
8/05 ^a	----	----	----
8/11 ^a	----	----	----
8/17 ^a	----	----	----
8/23	-b-	1.2	.243
8/29	17.5	9.6	.071

-a- Recurring electrical failures caused shocks to operators. Repeated inspections by the electrical contractor were necessary to identify and correct the problem.

-b- Hi-Vol malfunctioned.

STATION S-3: RAWLS ROAD

Date	TSP (ug/m ³)	SO ₂ (ug/m ³)	F _{atm} (ug/m ³)
9/04/77	11.9	24.6	.11
9/10/77	30.1	23.7	.10
9/16/77	25.5	9.2	.24
9/22/77	17.7	31.3	.04
9/28/77	21.5	49.1	.08
10/04/77	36.9	21.5	.22
10/10/77	19.5	9.2	.07
10/16/77	44.0	15.7	.30
10/22/77	24.8	8.7	.29
10/28/77	39.6	3.1	.33
11/03/77	20.3	25.1	.78
11/09/77	32.2	4.0	.42
11/15/77	28.3	37.3	.12
11/21/77	35.2	14.2	.36
11/27/77	25.5	40.2	.51

STATION S-3: RAWLS ROAD

<u>Sample Date</u>	<u>TSP ($\mu\text{g}/\text{m}^3$)</u>	<u>SO_2 ($\mu\text{g}/\text{m}^3$)</u>	<u>F_{atm} ($\mu\text{g}/\text{m}^3$)</u>
12-03-77	28.6	1.3	0.24
12-09-77	17.6	23.6	0.75
12-15-77	a	a	a
12-21-77	a	a	a
12-27-77	a	a	a
1-02-78	a	a	a
1-08-78	a	a	a
1-14-78	32.1	1.2	0.76
1-20-78	40.5	2.7	3.17
1-26-78	39.6	1.2	0.66
2-01-78	44.0	1.3	0.64
2-07-78	76.4b	2.9	0.43
2-13-78	c	c	c
2-19-78	30.5	6.0	0.61
2-25-78	24.7	25.9	0.65

a - Unable to service station due to flooding.

b - Elevated TSP level attributable to agricultural burning at numerous locations in the immediate vicinity.

c - Data not available due to vandalism.

STATION S-3: RAWLS ROAD

<u>Sample Date</u>	<u>TSP ($\mu\text{g}/\text{m}^3$)</u>	<u>SO_2 ($\mu\text{g}/\text{m}^3$)</u>	<u>F_{atm} ($\mu\text{g}/\text{m}^3$)</u>
3/03/78	27.1	16.8	0.56
3/09/78	14.3	42.6	0.38
3/15/78	15.8	0.0	1.02
3/21/78	110.4	a	0.90
3/27/78	b	a	0.76
4/02/78	a	a	a
4/08/78	a	a	a
4/14/78	61.7	a	0.33
4/20/78	63.5	a	0.54
4/26/78	121.5 ^c	21.9	0.89
5/02/78	30.5	28.5	0.30
5/08/78	19.8	2.7	0.32
5/14/78	45.3	19.3	0.09
5/20/78	22.4	24.6	0.11
5/26/78	25.9	0.0	0.22
6/01/78	23.4	19.6	0.21
6/07/78	12.9	22.7	1.03
6/13/78	d	d	d
6/19/78	e	e	e
6/25/78	21.7	8.4	0.56

a - Data not available due to vandalism.

b - HiVol malfunctioned.

c - Higher reading corresponds with moderately strong and gusty winds, predominantly from the direction of a nearby dirt road.

d - Timer malfunctioned.

e - Sampling temporarily discontinued.

COMPREHENSIVE LOCAL
CLIMATOLOGICAL DATA
TAMPA (AT RUSKIN), FLORIDA

Local Climatological Data



NAT WEATHER SERVICE MET OBSY
INTERNATIONAL AIRPORT

MONTHLY SUMMARY
Best Available Copy

LATITUDE 27° 58' N LONGITUDE 82° 32' W ELEVATION (GROUND) 19FT. STANDARD TIME USED: EASTERN WBAN #12242

DATE	TEMPERATURE °F					DEGREE DAYS BASE 65°			WEATHER TYPES ON DATES OF OCCURRENCE		SNOW- ICE PELLETS AT 07AM	PRECIPITATION	AVG. STATION	WIND			SUNSHINE	SAV. COOP. TEMP. & HUM.					
	MAXIMUM	MINIMUM	AVERAGE	DEPARTURE FROM NORMAL	AVERAGE DEW POINT	HEATING SEASON BEGINS WITH JULY 1	COLDING SEASON BEGINS WITH JAN. 1	8	1. FOG	2. HEAVY FOG	3. THUNDERSTORM	4. SNOW	5. HAIL	6. GLAZE	7. DUSTSTORM	8. SMOKE, HAZE	9. BLOWING SNOW	WIND DIR.	GREATEST WIND RATE				
1	2	3	4	5	6	7A	7B	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	
1	92	71	82	2	70	0	17	1				0								555	70	4	1
2	89	78	83	3	72	0	18	3				0								28	18	10	10
3	92	73	83	3	72	0	18	1 3				.06								230	14	437	53
4	88	72	80*	0	71	0	15	3				.44								155	21	155	4
5	90	71	81	1	70	0	16					0								20	13	34	22
6	90	74	82	2	72	0	17					0								566	60	56	7
7	89	77	83	3	73	0	18					0								282	34	7	7
8	91	75	83	3	70	0	18					0								581	70	9	9
9	90	78	84	3	72	0	19					0								734	68	68	6
10	93	73	83	2	71	0	18					0								703	64	22	11
11	92	73	83	2	73	0	18	1				0								573	70	3	11
12	98*	78	89	7	73	0	23	1				0								577	59	15	12
13	95	75	85	4	71	0	20					0								579	60	4	13
14	97	73	85	4	70	0	20					0								421	50	5	8
15	84	73	83	2	72	0	18	1 3				.06							630	63	6	15	
16	84	73	84	3	73	0	19	1 3				.06							407	48	5	16	
17	93	73	83	2	72	0	18	1 3				.06							50	5	7	17	
18	91	75	83	2	72	0	18	3				.06							310	37	12	18	
19	91	74	83	2	72	0	18					0							624	72	6	19	
20	92	77	85	4	72	0	20	3				0							636	63	6	20	
21	91	80	86	5	72	0	21	3				0							480	57	9	7	
22	92	76	84	3	73	0	19	3				0							52	7	6	21	
23	85	75	85	3	72	0	20	3				0							432	5	3	23	
24	97	78	87	5	72	0	22	3				0							645	77	3	5	
25	94	78	85	3	73	0	20	3				0							607	60	4	24	
26	95	80	88*	6	73	0	23					0							27	657	90	3	26
27	94	77	86	4	72	0	21					0							654	93	1	27	
28	95	73	84	2	89	0	19	1				0							28	610	73	1	28
29	94	71*	83	1	72	0	18	1 3				.05							499	59	8	4	
30	91	75	83	1	72	0	18	1 3				.10							273	33	9	7	
SUM	SUM	—————	—————	—————	—————	TOTAL	TOTAL	SUM	NUMBER OF DAYS	2.56	0	30.63	27	3.67	6.91	28	38	15439	24	170	158	158	
2779	2242	—————	—————	—————	—————	0	587	PRECIPITATION	INCHES	0								DATE:	15	15439	24	170	
Avg.	Avg.	Avg.	Avg.	Dep.	Dep.	0	587	PRECIPITATION	INCHES	0								DATE:	15	15439	24	170	
92.6	74.7	83.7	2.7	72	0	0	87	SNOW, ICE PELLETS	0.01 INCH	0	-3.83	—————	—————	—————	—————	—————	—————	DATE:	24937	62	5.7	5.3	
SEASONS TO DATE																							
NUMBER OF DAYS	TOTAL	TOTAL	1.0 INCH	0	GREATEST IN 24 HOURS AND DATES																		
MAX/MIN TEMP.	MINIMUM TEMP.	1011	1970	THUNDERSTORMS	15 PRECIPITATION INCHES	SNOW, ICE PELLETS																	
5 32	2 32	9	2 0	05P.	05P.	HEAVY FOG	C	.99	15	0								D	7				

* EXTREME FOR THE MONTH - LAST OCCURRENCE IF MORE THAN ONE.
 T TRACE AMOUNT
 + ALSO ON AN EARLIER DATE, OR DATES.
 HEAVY FOG - VISIBILITY 1/4 MILE OR LESS.
 FIGURES FOR WIND DIRECTIONS ARE TEN S OF DEGREES CLOCKWISE FROM TRUE NORTH. 00 = CALM.
 DATA IN COLS. 6 AND 12-15 ARE BASED ON 7.00

MORE OBSERVATIONS PER DAY AT 3-HOUR INTERVALS.
FASTEST MILE WIND SPEEDS ARE FASTEST OBSERVED
ONE-MINUTE VALUES WHEN DIRECTIONS ARE IN TENS
OF DEGREES. THE X WITH THE DIRECTION INDICATES
PEAK GUST SPEED.
ANY ERRORS DETECTED WILL BE CORRECTED AND
CHANGES IN SUMMARY DATA WILL BE ANNOUNCED IN
THE DAILY SUMMARY.

SUMMARY BY HOURS									
AVERAGES									
	SKY CLOUD HUND.	SUNSHINE INCH.	TEMPERATURE DEG. F.	PRESSURE IN.	WIND DIR. HR.	WIND MILE/H. HR.	WIND SPD. M.P.H. HR.	DIRECTION HR.	TEMP. HR.
30-00	77	73	72	30.03	N	8	4	N	4
30-01	76	73	72	30.01	N	8	4	N	8
30-02	74	73	72	30.02	N	8	4	N	1
30-03	73	73	72	30.03	N	8	4	N	8
30-04	87	73	72	30.04	N	8	4	N	8
30-05	81	77	73	30.05	N	8	4	N	8
30-06	77	73	72	30.06	N	8	4	N	8
30-07	75	73	71	30.07	N	8	4	N	8.7
30-08	79	73	72	30.08	N	8	4	N	8.7
30-09	76	73	71	30.09	N	8	4	N	8.3
30-10	74	73	71	30.10	N	8	4	N	8.1
30-11	71	73	71	30.11	N	8	4	N	8.1
30-12	72	73	71	30.12	N	8	4	N	8.1
30-13	73	73	71	30.13	N	8	4	N	8.1
30-14	74	73	71	30.14	N	8	4	N	8.1
30-15	75	73	71	30.15	N	8	4	N	8.1
30-16	76	73	71	30.16	N	8	4	N	8.1
30-17	77	73	71	30.17	N	8	4	N	8.1
30-18	78	73	71	30.18	N	8	4	N	8.1
30-19	79	73	71	30.19	N	8	4	N	8.1
30-20	80	73	71	30.20	N	8	4	N	8.1
30-21	81	73	71	30.21	N	8	4	N	8.1
30-22	82	73	71	30.22	N	8	4	N	8.1
30-23	83	73	71	30.23	N	8	4	N	8.1
30-24	84	73	71	30.24	N	8	4	N	8.1

HOURLY PRECIPITATION (WATER EQUIVALENT IN INCHES)

SUBSCRIPTION PRICE: \$2.55 PER YEAR. FOREIGN MAILING \$1.85 EXTRA. SINGLE COPY: 20 CENTS FOR MONTHLY ISSUE. 20 CENTS FOR ANNUAL SUMMARY. OTHER DATA IN RECORDS ON FILE CAN BE FURNISHED AT COST VIA MICROFILM, MICROFICHE, OR PAPER COPIES OF ORIGINAL RECORDS. MAKE CHECKS PAYABLE TO DEPARTMENT OF COMMERCE, NOAA, SEND PAYMENTS, ORDERS, AND INQUIRIES TO NATIONAL CLIMATIC CENTER, FEDERAL BUILDING, RALEIGH, NORTH CAROLINA 27601.

I CERTIFY THAT THIS IS AN OFFICIAL PUBLICATION OF THE NATIONAL OCEANIC AND ATMOSPHERIC ADMINISTRATION, AND IS COMPILED FROM RECORDS ON FILE AT THE NATIONAL CLIMATIC CENTER, ASHEVILLE, NORTH CAROLINA 28801.

noaa NATIONAL OCEANIC AND
ATMOSPHERIC ADMINISTRATION / ENVIRONMENTAL
DATA SERVICE

Daniel B. Mitchell
DIRECTOR, NATIONAL CLIMATIC CENTER

JULY 1977

Local Climatological Data

TAMPA, FLORIDA

NAT WEATHER SERVICE MET OBSY

INTERNATIONAL AIRPORT



MONTHLY SUMMARY
Best Available Copy

LATITUDE 27° 58' N LONGITUDE 82° 32' W ELEVATION (GROUND) 19 FT. STANDARD TIME USED: EASTERN LOAN #12942

- * EXTREME FOR THE MONTH - LAST OCCURRENCE IF MORE THAN ONE.
- T TRACE AMOUNT
- + ALSO ON AN EARLIER DATE, OR DATES.
- HEAVY FOG - VISIBILITY 1/4 MILE OR LESS.
- FIGURES FOR WIND DIRECTIONS ARE TENS OF DEGREES CLOCKWISE FROM TRUE NORTH. 00 = CALM.
DATA IN COLS. 6 AND 15-18 ARE BASED ON 7.00

MORE OBSERVATIONS PER DAY AT 3-HOUR INTERVALS.
FASTEST WIND SPEEDS ARE FASTEST OBSERVED
ONE-MINUTE VALUES WHEN DIRECTIONS ARE IN TENS
OF DEGREES. THE / WITH THE DIRECTION INDICATES
PEAK GUST SPEED.
ANY ERRORS DETECTED WILL BE CORRECTED AND
CHANGES IN SUMMARY DATA WILL BE ANNOTATED IN
THE ANNUAL SUMMARY.

PILOT REPORTED FUNNEL CLOUD NEAR RIVERVIEW AT 1550 EST ON JULY 3RD.
ST. PETERSBURG TOWER REPORTED FUNNEL CLOUD NE OF STATION AT 1325EST
ON JULY 8TH.
TOWER REPORTED FUNNEL CLOUD OVER MACDILL AFB AT 1535 EST ON JULY 9TH

HOURLY PRECIPITATION (WATER EQUIVALENT IN INCHES)

SUBSCRIPTION PRICE: \$2.55 PER YEAR. FOREIGN MAILING \$1.85 EXTRA. SINGLE COPY: 20 CENTS FOR MONTHLY ISSUE. 20 CENTS FOR ANNUAL SUMMARY. OTHER DATA IN RECORDS ON FILE CAN BE FURNISHED AT COST VIA MICROFILM, MICROFICHE, OR PAPER COPIES OF ORIGINAL RECORDS. MAKE CHECKS PAYABLE TO DEPARTMENT OF COMMERCE, NOAA, SEND PAYMENTS, ORDERS, AND INQUIRIES TO NATIONAL CLIMATIC CENTER, FEDERAL BUILDING, ASHEVILLE, NORTH CAROLINA 28801.

I CERTIFY THAT THIS IS AN OFFICIAL PUBLICATION OF THE NATIONAL OCEANIC AND ATMOSPHERIC ADMINISTRATION, AND IS COMPILED FROM RECORDS ON FILE AT THE NATIONAL CLIMATIC CENTER, ASHEVILLE, NORTH CAROLINA 28801.

noaa NATIONAL OCEANIC AND ATMOSPHERIC ADMINISTRATION / ENVIRONMENTAL DATA SERVICE

Daniel B. Mitchell
DIRECTOR, NATIONAL CLIMATIC CENTER

SEPTEMBER 1977
TAMPA, FLORIDA

NAT WEATHER SERVICE MET OBSY
INTERNATIONAL AIRPORT

Local Climatological Data



MONTHLY SUMMARY

Best Available Copy

LATITUDE 27° 58' N LONGITUDE 82° 32' W ELEVATION (GROUND) 1977 STANDARD TIME USED: EASTERN WBAN #12642

DATE	TEMPERATURE °F				DEGREE DAYS BASE 65°		WEATHER TYPES ON DATES OF OCCURRENCE	SNOW-ICE PELLETS OR ICE IN GROUND AT 07PM	PRECIPITATION PRECIPITATION	AVG-STATION PRESSURE	WINDS		SUNSHINE		SKY COVER TENTS									
	MINIMUM	AVERAGE	DEPARTURE FROM NORMAL	AVERAGE DEPTH POINT	NUMBER OF DAYS	INCHES					IN.	IN.	IN.	IN.	FEET	DIR.	FASTESEST MILE	DIR.	HRS.					
	1	2	3	4	5	6	7A	7B	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	
1	60	77	84	2	73	0	18			0	.21	30.22	11.8	12.1	22	09	400	52	7	6	1			
2	79	75	77 1/2	-5	72	0	12	1 3			.52	29.58	9.3	10.4	13	13	0	0	0	10	10	3	2	
3	84	73	79	-3	72	0	14	1			1.05	30.20	13	8.7	9.5	21	22	18	3	10	10	8	3	
4	59	74	82	0	75	0	17	23	8		.03	30.24	14	3.4	4.9	13	01	313	41	9	4	4	4	
5	90	74	82	0	74	0	17	1			.08	29.88	14	3.0	4.0	0	15	572	76	0	5	5	6	
6	92	76	84	2	75	0	19	1			.00	30.21	12	3.0	4.8	0	15	629	83	5	4	4	7	
7	91	76	85	3	76	0	20				.00	30.05	26	3.0	4.5	13	27	589	78	5	4	4	2	
8	91	78	85	3	75	0	20				.00	30.04	27	7.1	7.3	12	27	688	80	3	4	2	2	
9	91	78	85	3	75	0	20				.00	30.05	30	3.7	4.3	20		853	87	4	4	2	10	
10	91	76	84	2	74	0	19	1	8		.00	30.04	30	3.2	4.8	13	36	581	79	4	4	2	11	
11	94	72	83	2	73	0	19				.00	30.04	30	3.2	4.8	13	36	516	68	3	4	2	12	
12	92	73	83	2	73	0	18	3	0		.78	30.25	12	3.0	4.5	13	27	277	37	5	5	5	12	
13	91	76	84	3	74	0	19	1	0		.00	30.25	14	2.9	4.9	13	30	392	53	6	5	5	13	
14	92	78	85	4	74	0	20	1	0		.08	30.27	27	5.5	5.8	12	27	466	63	7	5	5	14	
15	92	77	85	4	74	0	20	3	0		.08	30.27	27	4.5	5.3	18	18	382	52	9	7	7	15	
16	92	77	85	4	74	0	20	3	0		.08	30.27	27	5.3	5.3	18	13	313	42	7	6	6	16	
17	91	73	82	1	74	0	17	3	0		.13	30.25	31	6.5	7.7	20	28	417	57	7	6	6	17	
18	91	73	82	1	73	0	17	1	3		1.23	30.25	31	4.7	5.2	20	28	393	53	6	6	6	18	
19	88	73	81	0	73	0	18	1	3		.07	29.35	12	1.9	2.2	0	0	467	62	7	6	6	19	
20	88	74	81	1	73	0	16	3	0		.07	29.35	12	1.9	2.2	0	0	178	24	9	8	8	20	
21	90	75	83	3	73	0	18	1	3		.00	29.97	15	2.5	3.0	23	10	276	38	9	8	8	21	
22	90	75	83	3	72	0	18	23	0		.00	29.58	25	4.5	4.5	16	14	321	44	7	7	7	22	
23	91	72	82	2	71	0	17	1	3		.00	29.98	19	3.3	3.3	13	27	422	58	5	7	6	23	
24	90	74	82	2	72	0	17	1	0		.07	29.65	10	1.5	1.5	9	34	374	52	7	6	6	24	
25	98	75	82	2	73	0	17	1	3		.10	29.92	23	2.3	2.7	9	08	249	34	9	9	9	25	
26	89	74	82	3	72	0	17	3	0		.15	29.92	25	1.5	4.8	14	36	252	35	9	9	9	26	
27	88	73	81	2	73	0	16	1	3		.07	29.94	31	2.3	2.8	0	18	433	60	5	4	4	27	
28	88	74	81	2	73	0	16	0	0		.00	29.94	31	1.8	2.3	12	29	466	65	5	5	5	28	
29	91	73	82	3	69	0	17	1	0		.00	29.93	32	1.8	2.3	12	33	636	88	3	4	4	29	
30	91	68	80	2	67	0	15	1	0		.00	29.95	18	5.9	5.9	14	35	606	89	2	1	1	30	
SUM	SUM						TOTAL	TOTAL			TOTAL	TOTAL	TOTAL	TOTAL	TOTAL	TOTAL	TOTAL	TOTAL	TOTAL	TOTAL	TOTAL	TOTAL	TOTAL	TOTAL
2665	2240						0	525																
Avg.	Avg.	Avg.	Avg.	Avg.	Avg.	Avg.	NUMBER OF DAYS	4.29																
89.8	74.7	82.3	1.5	73	0	52	PRECIPITATION	DEP. 1																
							0.01 INCH	12	-2.37															
							SEASON TO DATE																	
							SNOW-ICE PELLETS	> 1.0 INCH																
							TOTAL	TOTAL																
							THUNDERSTORMS	14																
							HEAVY FOG	2	1.39	2	3	1												
							CLEAR	4	PARTLY CLOUDY	17	SLIGHT	6												

EXTREME FOR THE MONTH - LAST OCCURRENCE IF MORE THAN ONE.
TRACE AMOUNT
ALSO ON AN EARLIER DATE, OR DATES.
HEAVY FOG - VISIBILITY 1/4 MILE OR LESS.
FIGURES FOR WIND DIRECTIONS ARE TENS OF DEGREES CLOCKWISE FROM TRUE NORTH. 00 = CALM.
DATA IN COLS. 6 AND 12-15 ARE BASED ON 7 OR

MORE OBSERVATIONS PER DAY AT 3-HOUR INTERVALS.
FASTEST MILE WIND SPEEDS ARE FASTEST OBSERVED ONE-MINUTE VALUES WHEN DIRECTIONS ARE IN TENS OF DEGREES. / WITH THE DIRECTION INDICATES PEAK GUST SPEED.
ANY ERRORS DETECTED WILL BE CORRECTED AND CHANGES IN SUMMARY DATA WILL BE ANNOTATED IN THE ANNUAL SUMMARY.

FLUDD CLOUD Began 1315 Ended 1325 EST ON SEPT. 20TH.

TIME	AVERAGES			RESULTANT WIND
	TEMPERATURE	RH	WIND DIR.	
16 MIN	77	74	78	86
16 MAX	75	73	79	88
MIDNIGHT	85	74	75	73
2 AM	85	78	76	73
4 AM	85	78	76	73
6 AM	87	77	73	65
8 AM	87	78	74	78
10 AM	87	77	72	76
12 PM	81	75	72	76
2 PM	79	73	73	63
4 PM	79	73	73	63
6 PM	79	73	73	63
8 PM	79	73	73	63
10 PM	79	73	73	63
12 AM	79	73	73	63

SUBSCRIPTION PRICE: \$2.55 PER YEAR. FOREIGN MAILING \$1.85 EXTRA. SINGLE COPY: 20 CENTS FOR MONTHLY ISSUE. 20 CENTS FOR ANNUAL SUMMARY. OTHER DATA IN RECORDS ON FILE CAN BE FURNISHED AT COST VIA MICROFILM, MICROFICHE, OR PAPER COPIES OF ORIGINAL RECORDS. MAKE CHECKS PAYABLE TO DEPARTMENT OF COMMERCE, NOAA, SEND PAYMENTS, ORDERS, AND INQUIRIES TO NATIONAL CLIMATIC CENTER, FEDERAL BUILDING, ASHEVILLE, NORTH CAROLINA 28801.

I CERTIFY THAT THIS IS AN OFFICIAL PUBLICATION OF THE NATIONAL OCEANIC AND ATMOSPHERIC ADMINISTRATION, AND IS COMPILED FROM RECORDS ON FILE AT THE NATIONAL CLIMATIC CENTER, ASHEVILLE, NORTH CAROLINA 28801.

noaa

NATIONAL OCEANIC AND
ATMOSPHERIC ADMINISTRATION / ENVIRONMENTAL
DATA SERVICE

Daniel B. Mitchell
DIRECTOR, NATIONAL CLIMATIC CENTER

NOVEMBER 1977
TAMPA, FLORIDA

Local Climatological Data

NAT WEATHER SERVICE MET OBSY
INTERNATIONAL AIRPORT

MONTHLY SUMMARY
Best Available Copy

The seal of the Department of Commerce, featuring an eagle with wings spread, perched atop a shield with a map of the United States. The shield is supported by two figures and rests on waves. The words "DEPARTMENT OF COMMERCE" are written in a circular border at the top, and "UNITED STATES OF AMERICA" are at the bottom.

LATITUDE 27° 58' N LONGITUDE 82° 32' W ELEVATION (GROUND) 19 FT. STANDARD TIME USED: EASTERN LEAD 61284

DEGREES FAH. WEATHER, TIDES, ETC.

* EXTREME FOR THE MONTH - LAST OCCURRENCE IF MORE THAN ONE.
† TRACE AMOUNT
+ ALSO ON AN EARLIER DATE, OR DATES.
HEAVY FOG - VISIBILITY 1/4 MILE OR LESS.
FIGURES FOR WIND DIRECTIONS ARE TENS OF DEGREES CLOSER TO TRUE NORTH. CO = CALIF.,
PACIFIC CO. 6-15, E 60-17-18 DEG. BASED ON

MORE OBSERVATIONS PER DAY AT 3-HOUR INTERVALS.
FASTEST WIND SPEEDS ARE FASTEST OBSERVED
ONE-MINUTE VALUES WHEN DIRECTIONS ARE IN TENS
OF DEGREES. THE X / WITH THE DIRECTION INDICATE
PEAK GUST SPEED.
ANY ERRORS DETECTED WILL BE CORRECTED AND
CHANGES IN SUMMARY DATA WILL BE ANNOTATED IN
THE DAILY SUMMARY.

SUMMARY BY HOURS									
AVERAGE									
MINUT	TEMP.	DEW PT.	HUMID	DIR.	SPD.	MINUT	TEMP.	DEW PT.	HUMID
HR	HR	HR	%	HR	M.P.H.	HR	HR	HR	%
00	30.04	62	60	57	6.2	08	30	30.04	59
01	30.04	61	59	56	6.2	07	30	30.04	56
02	30.06	60	58	56	6.7	07	30	30.06	55
03	30.05	54	54	52	5.4	07	30	30.05	52
04	30.05	75	58	55	6.7	06	30	30.05	55
05	30.02	75	55	52	6.7	10	30	30.02	52
06	30.02	67	53	52	5.4	12	30	30.02	52
07						13	30	30.02	51
08						14	30	30.02	51
09						15	30	30.02	51
10						16	30	30.02	51
11						17	30	30.02	51
12						18	30	30.02	51
13						19	30	30.02	51
14						20	30	30.02	51
15						21	30	30.02	51
16						22	30	30.02	51
17						23	30	30.02	51
18						24	30	30.02	51
19						25	30	30.02	51
20						26	30	30.02	51
21						27	30	30.02	51
22						28	30	30.02	51
23						29	30	30.02	51
24						30	30	30.02	51
25						31	30	30.02	51
26						32	30	30.02	51
27						33	30	30.02	51
28						34	30	30.02	51
29						35	30	30.02	51
30						36	30	30.02	51
31						37	30	30.02	51
32						38	30	30.02	51
33						39	30	30.02	51
34						40	30	30.02	51
35						41	30	30.02	51
36						42	30	30.02	51
37						43	30	30.02	51
38						44	30	30.02	51
39						45	30	30.02	51
40						46	30	30.02	51
41						47	30	30.02	51
42						48	30	30.02	51
43						49	30	30.02	51
44						50	30	30.02	51
45						51	30	30.02	51
46						52	30	30.02	51
47						53	30	30.02	51
48						54	30	30.02	51
49						55	30	30.02	51
50						56	30	30.02	51
51						57	30	30.02	51
52						58	30	30.02	51
53						59	30	30.02	51
54						60	30	30.02	51
55						61	30	30.02	51
56						62	30	30.02	51
57						63	30	30.02	51
58						64	30	30.02	51
59						65	30	30.02	51
60						66	30	30.02	51
61						67	30	30.02	51
62						68	30	30.02	51
63						69	30	30.02	51
64						70	30	30.02	51
65						71	30	30.02	51
66						72	30	30.02	51
67						73	30	30.02	51
68						74	30	30.02	51
69						75	30	30.02	51
70						76	30	30.02	51
71						77	30	30.02	51
72						78	30	30.02	51
73						79	30	30.02	51
74						80	30	30.02	51
75						81	30	30.02	51
76						82	30	30.02	51
77						83	30	30.02	51
78						84	30	30.02	51
79						85	30	30.02	51
80						86	30	30.02	51
81						87	30	30.02	51
82						88	30	30.02	51
83						89	30	30.02	51
84						90	30	30.02	51
85						91	30	30.02	51
86						92	30	30.02	51
87						93	30	30.02	51
88						94	30	30.02	51
89						95	30	30.02	51
90						96	30	30.02	51
91						97	30	30.02	51
92						98	30	30.02	51
93						99	30	30.02	51
94						100	30	30.02	51
95						101	30	30.02	51
96						102	30	30.02	51
97						103	30	30.02	51
98						104	30	30.02	51
99						105	30	30.02	51
100						106	30	30.02	51
101						107	30	30.02	51
102						108	30	30.02	51
103						109	30	30.02	51
104						110	30	30.02	51
105						111	30	30.02	51
106						112	30	30.02	51
107						113	30	30.02	51
108						114	30	30.02	51
109						115	30	30.02	51
110						116	30	30.02	51
111						117	30	30.02	51
112						118	30	30.02	51
113						119	30	30.02	51
114						120	30	30.02	51
115						121	30	30.02	51
116						122	30	30.02	51
117						123	30	30.02	51
118						124	30	30.02	51
119						125	30	30.02	51
120						126	30	30.02	51
121						127	30	30.02	51
122						128	30	30.02	51
123						129	30	30.02	51
124						130	30	30.02	51
125						131	30	30.02	51
126						132	30	30.02	51
127						133	30	30.02	51
128						134	30	30.02	51
129						135	30	30.02	51
130						136	30	30.02	51
131						137	30	30.02	51
132						138	30	30.02	51
133						139	30	30.02	51
134						140	30	30.02	51
135						141	30	30.02	51
136						142	30	30.02	51
137						143	30	30.02	51
138						144	30	30.02	51
139						145	30	30.02	51
140						146	30	30.02	51
141						147	30	30.02	51
142						148	30	30.02	51
143						149	30	30.02	51
144						150	30	30.02	51
145						151	30	30.02	51
146						152	30	30.02	51
147						153	30	30.02	51
148						154	30	30.02	51
149						155	30	30.02	51
150						156	30	30.02	51
151						157	30	30.02	51
152						158	30	30.02	51
153						159	30	30.02	51
154						160	30	30.02	51
155						161	30	30.02	51
156						162	30	30.02	51
157						163	30	30.02	51
158						164	30	30.02	51
159						165	30	30.02	51
160						166	30	30.02	51
161						167	30	30.02	51
162						168	30	30.02	51
163						169	30	30.02	51
164						170	30	30.02	51
165						171	30	30.02	51
166						172	30	30.02	51
167						173	30	30.02	51
168						174	30	30.02	51
169						175	30	30.02	51
170						176	30	30.02	51
171						177	30	30.02	51
172						178	30	30.02	51
173						179	30	30.02	51
174						180	30	30.02	51
175						181	30	30.02	51
176						182	30	30.02	51
177						183	30	30.02	51
178						184	30	30.02	51
179						185	30	30.02	51
180						186	30	30.02	51
181						187	30	30.02	51
182						188	30	30.02	51
183						189	30	30.02	51

HOURLY PRECIPITATION (WATER EQUIVALENT IN INCHES)

SUBSCRIPTION PRICE \$2.55 PER YEAR. FOREIGN MAILING \$1.85 EXTRA. SINGLE COPY 20 CENTS FOR MONTHLY ISSUES. 20 CENTS FOR ANNUAL SUMMARY. OTHER DATA IN RECORDS ON FILE CAN BE FURNISHED AT COST VIA MICROFILM, MICROFICHE, OR PAPER COPIES OF ORIGINAL RECORDS. MAKE CHECKS PAYABLE TO DEPARTMENT OF COMMERCE, NOAA, SEND PAYMENTS, ORDERS, AND INQUIRIES TO NATIONAL CLIMATIC CENTER, FEDERAL BUILDING, RALEIGH, NORTH CAROLINA 27601.

I CERTIFY THAT THIS IS AN OFFICIAL PUBLICATION OF THE NATIONAL OCEANIC AND ATMOSPHERIC ADMINISTRATION, AND IS COMPILED FROM RECORDS ON FILE AT THE NATIONAL CLIMATIC CENTER, ASHEVILLE, NORTH CAROLINA 28801.

noaa NATIONAL OCEANIC AND ATMOSPHERIC ADMINISTRATION / ENVIRONMENTAL DATA SERVICE

Daniel B. Mitchell
DIRECTOR, NATIONAL CLIMATIC CENTER

DECEMBER 1977
TAMPA, FLORIDA

NATIONAL WEATHER SERVICE MET OBSERVATION
INTERNATIONAL AIRPORT

Local Climatological Data



MONTHLY SUMMARY Best Available Copy

LATITUDE 27° 58' N LONGITUDE 82° 32' W ELEVATION (GROUND) 1987 STANDARD TIME USED: EASTERN I.D.N. #12942

TEMPERATURE °F			DEGREE DAYS BASE 65°			WEATHER TYPES ON DATES OF OCCURRENCE			SNOW- ICE PELLETS			PRECIPITATION			WIND			SUNSHINE				
MINIMUM	HIGH	AVERAGE	DEPARTURE FROM NORMAL	AVG	MAX	IN	OUT	IN	IN	OUT	IN	IN	IN	IN	IN	IN	IN	IN	IN	IN	IN	
1	2	3	4	5	6	7A	7B	8	9	10	11	12	13	14	15	16	17	18	19	20	21	
1	79	65	73	8	70	0	7	2														
2	67	58	63	0	51	0	0	1	.25	0	28.55	18	3.8	6.8	22	25	230	37	10	13	1	
3	73	52	63	-1	55	3	0	2	.40	0	30.02	22	6.2	9.0	10	19	103	16	3	3	4	
4	74	48	62	-1	53	0	0	1	.00	0	30.07	26	2.8	9.0	10	16	540	87	10	9	9	
5	78	66	72	9	67	4	0	1	.22	0	30.01	15	3.2	3.7	8	15	465	74	9	9	9	
6	74	48	61	-2	53	0	0	1	.00	0	29.83	18	10.3	10.8	19	19	307	49	10	4	4	
7	59	35	47	-18	22	18	0	1	.00	0	30.18	02	9.3	9.8	18	16	508	81	3	3	2	
8	73	38	56	-6	45	9	0	1	.78	0	30.19	10	7.8	9.8	14	15	546	97	1	1	1	
9	68	62	65	3	61	0	0	1	.00	0	30.32	03	11.8	12.1	14	01	7	1	10	7	7	
10	62	43	53	-8	38	12	0	1	.00	0	30.29	05	11.7	12.1	17	06	564	90	2	6	6	
11	69	41	56	-7	44	10	0	1	.00	0	30.23	07	6.5	9.2	15	11	525	84	10	11	11	
12	78	50	63	1	94	20	0	1	.00	0	30.14	09	6.8	6.9	14	19	314	50	10	10	10	
13	75	58	67	5	62	0	0	1	.00	0	29.56	17	7.9	8.8	14	19	264	47	10	10	10	
14	74	69	72	10	69	0	0	2	.04	0	29.07	04	4.8	6.8	12	35	155	17	10	10	10	
15	70	67	68	7	66	0	0	1	.00	0	29.02	22	9	3.5	7	27	167	27	10	10	10	
16	73	66	70	9	69	0	0	1	.00	0	29.97	20	2.5	4.0	10	17	67	11	10	10	10	
17	71	66	69	8	68	0	0	2	.00	0	29.89	32	7.2	9.9	22	35	508	82	10	10	10	
18	68	47	58	-3	51	0	0	1	.00	0	30.02	29	1.3	2.6	9	24	622	10	10	10	10	
19	68	43	56	-5	46	0	0	1	.00	0	30.01	18	4.6	5.6	10	19	573	92	10	10	10	
20	71	44	58	-3	51	7	0	1	.00	0	30.00	32	3.1	8.3	20	34	0	0	0	0	0	
21	86	47	57	-4	51	8	0	1	.29	0	30.30	01	6.8	9.8	19	35	493	79	7	7	7	
22	52	35	44	-17	35	21	0	1	.00	0	30.37	01	1.6	6.0	10	27	562	60	10	10	10	
23	59	31	45	-16	39	20	0	1	.00	0	30.19	13	3.0	4.8	7	20	474	78	8	8	8	
24	68	41	55	-6	46	10	0	1	.00	0	29.99	21	2.3	6.5	14	26	192	31	7	7	7	
25	69	53	61	0	58	4	0	1	.00	0	30.04	36	9.4	12.1	19	31	321	52	7	7	7	
26	57	37	47	-14	36	18	0	1	.00	0	30.23	01	9.6	9.9	21	27	573	93	1	1	1	
27	55	30*	43*	-18	25	22	0	1	.00	0	30.27	03	4.5	5.6	13	36	579	93	1	0	0	
28	60	33	47	-14	30	18	0	1	.00	0	30.25	07	7.9	9.1	19	39	557	89	2	3	29	
29	68	36	52	-8	38	13	0	1	.00	0	30.14	12	6.1	6.2	12	13	161	28	10	10	10	
30	69	55	62	2	58	3	0	1	.00	0	30.09	14	3.2	4.5	7	29	54	9	10	10	10	
31	70	60	65	5	53	0	0	2	T	0												
SUM	SUM					TOTAL	TOTAL				130.1	130.2										
2113	1924					222	35															
AVG.	AVG.																					
68.2	49.2																					
58.7	-2.9					53	-29															

- * EXTREME FOR THE MONTH - LAST OCCURRENCE IF MORE THAN ONE.
- T THREE AMOUNT
- + ALSO CH IN AN EARLIER DATE, OR DATES.
- HEAVY FOG - VISIBILITY 1/4 MILE OR LESS.
- FIGURES FOR WIND DIRECTIONS ARE TENS OF DEGREES CLOCKWISE FROM TRUE NORTH. DO = CALM. DATA IN COLS. 6 AND 12-15 ARE BASED ON 7 OR

MORE OBSERVATIONS PER DAY AT 3-HOUR INTERVALS.
FASTEST WIND SPEEDS ARE FASTEST OBSERVED
ONE-MINUTE VALUES WHEN DIRECTIONS ARE IN TENS
OF DEGREES. THE / WITH THE DIRECTION INDICATES
PEAK GUST SPEED.
ANY ERRORS DETECTED WILL BE CORRECTED AND
CHANGES IN SUMMARY DATA WILL BE ANNOTATED IN
THE ANNUAL SUMMARY

NUMBER OF DAYS	TOTAL			GREATEST IN 24 HRS AND DATES			GREATEST DEPTH IN GROUND OF SNOW, ICE PELLETS OR ICE AND DATE		
	1.0 INCH	1.0 INCH	1.0 INCH	SNOW, ICE PELLETS	ICE PELLETS	ICE	SNOW, ICE PELLETS	ICE PELLETS	ICE
MAIN TEMP.	293	3453		THUNDERSTORMS	2				
MIN TEMP.	432	432	20	DEP.	DEP.				
	0	2	0	HEAVY FOG	5	0			
	0	2	0	CLEAR	11	0			
	0	2	0	Partly Cloudy	15	0			

SUMMARY BY HOURS

HOUR	AVERAGES			RESULTANT WIND		
	TEMPERATURE	WIND DIRECTION	WIND INTENSITY	WIND INTENSITY	WIND DIRECTION	WIND INTENSITY
1	50.00	00	00	50	00	6.6
2	50.00	00	00	50	00	2.7
3	50.00	00	00	50	00	2.9
4	50.00	00	00	50	00	4.4
5	50.00	00	00	50	00	1.5
6	50.00	00	00	50	00	1.5
7	50.00	00	00	50	00	1.5
8	50.00	00	00	50	00	1.4
9	50.00	00	00	50	00	2.2
10	50.00	00	00	50	00	2.3
11	50.00	00	00	50	00	1.0
12	50.00	00	00	50	00	1.0
13	50.00	00	00	50	00	1.0
14	50.00	00	00	50	00	1.0
15	50.00	00	00	50	00	1.0
16	50.00	00	00	50	00	1.0
17	50.00	00	00	50	00	1.0
18	50.00	00	00	50	00	1.0
19	50.00	00	00	50	00	1.0
20	50.00	00	00	50	00	1.0
21	50.00	00	00	50	00	1.0
22	50.00	00	00	50	00	1.0
23	50.00	00	00	50	00	1.0
24	50.00	00	00	50	00	1.0
25	50.00	00	00	50	00	1.0
26	50.00	00	00	50	00	1.0
27	50.00	00	00	50	00	1.0
28	50.00	00	00	50	00	1.0
29	50.00	00	00	50	00	1.0
30	50.00	00	00	50	00	1.0
31	50.00	00	00	50	00	1.0

noaa

NATIONAL OCEANIC AND
ATMOSPHERIC ADMINISTRATION / ENVIRONMENTAL
DATA SERVICE

Daniel B. Mitchell
DIRECTOR, NATIONAL CLIMATIC CENTER
USECMM-NODC-ASHEVILLE 01/1979

I CERTIFY THAT THIS IS AN OFFICIAL PUBLICATION OF THE NATIONAL OCEANIC AND ATMOSPHERIC ADMINISTRATION AND IS COMPILED FROM RECORDS ON FILE AT THE NATIONAL CLIMATIC CENTER, ASHEVILLE, NORTH CAROLINA 28801.

JANUARY 1978
TAMPA, FLORIDA

NAT WEATHER SERVICE MET OBSY
INTERNATIONAL AIRPORT

Local Climatological Data



MONTHLY SUMMARY

Best Available Copy

LATITUDE 27° 58' N LONGITUDE 82° 32' W ELEVATION (AGL) 100 FT. 1978 STANDARD TIME USED: EASTERN ISON #12842

DATE	TEMPERATURE °F				DEGREE DAYS BASE 65°		WEATHER TYPES ON DATES OF OCCURRENCE	SNOW, ICE PELLETS OR GROUND OF DATE	PRECIPITATION	AVG. STATION PRESS.	WIND			SUNSHINE		SKY COVER TELENS						
	MORN	MIN	AVERAGE	DEPARTURE FROM NORMAL	HEATING SEASON BEGINS WITH JAN 1	COOLING SEASON BEGINS WITH JUN 1					WATER	SNOW	ICE	ELEV. FEET	MEASUREMENT DIR.	AVG. SPEED M.P.H.	FASTEST MILE	PERCENT OF POSSIBLE	SUNRISE TO SUNSET	10 MIDNIGHT TO MIDNIGHT	21 DATE	
1	2	3	4	5	6	7A	7B	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22
1	71	63	66	5	64	0	1	2	0	30.04	11	1.7	2.7	8	28	229	37	10	10	1		
2	64	54	59	-2	56	6	0	1	0	30.08	21	7.3	7.9	14	01	128	20	10	10	2		
3	60	42	51	-9	37	14	0		.02	30.21	23	7.4	7.6	14	03	497	80	7	6	3		
4	70	41	56	-4	43	1	9		0	30.32	25	9.3	9.8	16	07	564	90	1	1	4		
5	78	52	64	4	54	1	0		0	30.27	27	3.5	6.2	9	11	511	81	0	8	5		
6	75	58	67	7	57	0	2		0	30.13	24	6.6	7.1	15	15	510	81	0	8	6		
7	78	61	70*	10	60	0	5		0	30.10	15	5.9	6.3	12	16	497	79	0	7	7		
8	69	50	65	5	61	0	0		.83	29.91	16	10.4	10.6	26	29	0	0	10	9	6		
9	61	35	48	-12	40	17	0		1	30.10	31	13.5	15.2	23	31	564	90	3	3	9		
10	51	31	41	-19	23	24	0		0	30.32	23	8.2	8.9	15	36	558	89	5	5	10		
11	58	33	45	-15	19	20	0		0	30.34	23	7.8	8.1	15	C2	513	81	3	3	11		
12	70	40	55	-5	47	10	0		0	30.15	21	6.4	7.9	14	16	375	59	9	7	12		
13	67	54	61	1	56	4	0	1	3	29.84	27	4.3	9.1	21	27	380	60	10	10	13		
14	54	46	50	-10	42	15	0		0	29.94	33	11.5	11.8	20	33	394	82	7	9	14		
15	46	32	39*	-21	32	26	0		0	30.24	32	10.5	17	35	379	60	9	7	15			
16	66	29*	40	-12	39	17	0		0	30.26	11	6.1	7.5	12	15	573	90	8	5	16		
17	70	54	62	2	57	3	0	1	23	30.03	19	5.2	7.5	17	15	278	44	10	9	17		
18	71	50	61	1	55	4	0	2	0	30.08	19	5.2	5.6	15	09	582	88	4	5	18		
19	77	60	69	9	64	0	4	1	3	29.83	19	10.9	12.1	29	30	19	3	10	10	19		
20	60	49	55	-5	51	10	0		0	29.99	32	9.7	11.4	16	29	193	24	10	9	20		
21	53	40	47	-13	43	18	0		0	30.23	36	9.3	9.5	15	35	419	65	8	8	21		
22	61	38	50	-11	43	15	0		0	30.29	32	2.7	5.6	10	28	519	81	10	9	22		
23	73	50	62	1	55	3	0		0	30.26	26	7.2	7.8	12	05	384	60	9	8	23		
24	78	56	67	6	58	0	0	1	0	30.29	21	8.5	10.1	14	14	461	70	9	10	24		
25	76	61	69	0	64	0	4	1	0	29.78	19	10.8	12.9	21	28	553	86	4	7	25		
26	64	48	56	-5	45	9	0		0	30.03	28	14.5	15.1	21	30	584	90	2	3	26		
27	55	38	47	-14	28	18	0		0	30.24	36	7.6	8.2	15	02	533	83	10	7	27		
28	53	35	44	-17	31	21	0		0	30.26	35	7.5	8.2	18	33	583	90	5	5	28		
29	54	34	44	-17	28	21	0		0	30.30	33	7.7	8.9	16	35	618	95	0	0	29		
30	56	31	44	-17	23	21	0		0	30.31	22	6.6	6.8	14	36	605	93	1	3	30		
31	61	41	51	-10	33	14	1	0	0	30.25	22	2.9	4.9	10	03	210	32	8	9	31		

- * EXTREME FOR THE MONTH - LAST OCCURRENCE IF MORE OBSERVATIONS PER DAY AT 3-HOUR INTERVALS. MORE THAN ONE.
- T TRACE AMOUNT
- + ALSO ON AN EARLIER DATE, OR DATES. HEAVY FOG - VISIBILITY 1/4 MILE OR LESS. FIGURES FOR WIND DIRECTIONS ARE TENS OF DEGREES CLOCKWISE FROM TRUE NORTH. 00 = CALM. DATA IN COLS. 6 AND 12-15 ARE BASED ON 7 OR

MORE OBSERVATIONS PER DAY AT 3-HOUR INTERVALS. FASTEST MILE WIND SPEEDS ARE FASTEST OBSERVED ONE-MINUTE VALUES WHEN DIRECTIONS ARE IN TEENS OF DEGREES. THE / WITH THE DIRECTION INDICATES PEAK GUST SPEED. ANY ERRORS DETECTED WILL BE CORRECTED AND CHANGES IN SUMMARY DATA WILL BE ANNOTATED IN THE ANNUAL SUMMARY

LOCAL TIME	STATION	PRESSURE IN.	AVERAGES			RESULTANT WIND M.P.H.
			TEMPERATURE	R.H.	WIND DIR. M.P.H.	
01	7	30.13	51	49	46	8.4
04	7	30.12	50	48	45	8.8
07	7	30.14	49	47	44	8.4
10	7	30.19	55	50	45	72
13	7	30.13	51	54	46	60
16	7	30.10	62	54	45	59
19	7	30.12	55	51	46	74
22	6	30.14	52	49	46	81

HOURLY PRECIPITATION (WATER EQUIVALENT IN INCHES)

HR:	P. = HOUR ENDING AT											
	1	2	3	4	5	6	7	8	9	10	11	12
1												
2												
3												
4												
5												
6												
7												
8												
9												
10												
11												
12												
13												
14												
15												
16												
17												
18												
19												
20												
21												
22												
23												
24												
25												
26												
27												
28												
29												
30												
31												

SUBSCRIPTION PRICE: \$2.55 PER YEAR. FOREIGN MAILING \$1.85 EXTRA. SINGLE COPY 20 CENTS FOR MONTHLY ISSUE. 20 CENTS FOR ANNUAL SUMMARY. OTHER DATA IN RECORDS ON FILE CAN BE FURNISHED AT COST VIA MICROFILM, MICROFICHE, OR PAPER COPIES OF ORIGINAL RECORDS. MAKE CHECKS PAYABLE TO DEPARTMENT OF COMMERCE, NOAA, SEND PAYMENTS, ORDERS, AND INQUIRIES TO NATIONAL CLIMATIC CENTER, FEDERAL BUILDING, ASHEVILLE, NORTH CAROLINA 28801.

I CERTIFY THAT THIS IS AN OFFICIAL PUBLICATION OF THE NATIONAL OCEANIC AND ATMOSPHERIC ADMINISTRATION, AND IS COMPILED FROM RECORDS ON FILE AT THE NATIONAL CLIMATIC CENTER, ASHEVILLE, NORTH CAROLINA 28801.

noaa

NATIONAL OCEANIC AND
ATMOSPHERIC ADMINISTRATION / ENVIRONMENTAL
DATA SERVICE

Daniel B. Mitchell
DIRECTOR, NATIONAL CLIMATIC CENTER

FEBRUARY 1978

TAMPA, FLORIDA

NAT WEATHER SERVICE MET OBSY
INTERNATIONAL AIRPORT

Local Climatological Data



MONTHLY SUMMARY

Best Available Copy

LATITUDE 27° 58' N LONGITUDE 82° 32' W ELEVATION (GROUND) 19 FT. STANDARD TIME USED: EASTERN LEAP SE 12942

FEBRUARY 1978 TAMPA, FLORIDA

		TEMPERATURE °F		DEGREE DAYS BASE 65°		WEATHER TYPES ON DATES OF OCCURRENCE		SNOW- ICE PELLETS		PRECIPITATION		Ave. PRESS. IN.		WIND		SUNSHINE		SKY COVER TENTHS		
DAY	MONTH	MIN	MAX	HIGH	LOW	TYPE	DATES	INCHES	INCHES	INCHES	INCHES	INCHES	INCHES	INCHES	MPH	DIR	FASTEST MILE	NOON	1PM	2PM
1	2	58	65	52	-9	49	13	0	0	0	0	0	0	30.21	28	9.3	9.5	12	07	22
2	59	68	62	1	55	59	3	0	0	0	0	0	0	30.13	15	3.2	3.2	13	19	23
3	60	65	52	59	-2	55	6	0	0	0	0	0	0	30.14	02	7.3	9.3	12	26	25
4	61	64	53	-8	45	45	12	0	0	0	0	0	0	30.21	24	12.6	12.8	17	03	24
5	62	66	40	53	-8	39	12	0	0	0	0	0	0	30.17	01	8.8	9.8	15	33	35
6	63	51	34	43	-18	34	22	0	0	0	0	0	0	30.09	34	0.1	0.3	13	34	25
7	64	54	31	43	-18	24	22	0	0	0	0	0	0	30.10	73	5.1	7.1	13	25	32
8	65	51	40	51	-10	45	14	0	0	0	0	0	0	29.94	07	9.1	9.4	14	27	26
9	66	56	46	51	-10	50	14	0	0	0	0	0	0	29.82	26	8.8	9.8	16	23	25
10	67	58	40	49	-12	40	16	0	0	0	0	0	0	29.37	35	7.8	8.2	16	35	25
11	68	53	37	50	-11	37	15	0	0	0	0	0	0	30.05	23	2.6	3.7	13	27	23
12	69	57	53	-8	40	40	12	0	0	0	0	0	0	30.05	20	1.4	3.5	10	27	23
13	70	49	60	-2	55	55	5	1	0	0	0	0	0	29.93	19	7.9	9.5	16	19	24
14	71	65	43	54	-8	48	11	0	0	0	0	0	0	29.99	31	6.1	7.1	15	32	32
15	72	65	40	53	-9	44	12	0	0	0	0	0	0	33.58	25	3.1	3.3	12	24	24
16	73	65	53	59	-3	56	6	0	0	0	0	0	0	32.22	25	3.3	7.8	19	24	25
17	74	57	61	-1	60	4	0	0	0	0	0	0	0	30.02	29	4.0	4.5	9	14	14
18	75	58	65	3	62	0	0	0	0	0	0	0	0	29.84	28	1.2	0.9	21	30	26
19	76	53	54	-8	53	11	0	0	0	0	0	0	0	29.92	32	6.8	7.2	12	34	30
20	77	52	48	50	-12	48	15	0	0	0	0	0	0	30.08	28	7.1	8.3	21	33	31
21	78	65	46	56	-6	47	9	0	0	0	0	0	0	30.25	33	12.8	13.1	20	34	32
22	79	47	35	41	-21	30	24	0	0	0	0	0	0	32.18	25	7.3	7.8	18	27	26
23	80	61	31	46	-17	39	19	0	0	0	0	0	0	30.19	31	5.5	7.5	13	27	25
24	81	59	40	50	-13	38	15	0	0	0	0	0	0	30.14	25	3.7	3.5	14	25	23
25	82	66	36	51	-12	43	14	0	0	0	0	0	0	30.14	27	4.2	4.8	14	27	26
26	83	70	44	57	-6	51	8	0	0	0	0	0	0	30.12	28	4.0	4.8	13	27	25
27	84	70	47	59	-4	53	6	0	0	0	0	0	0	29.98	17	8.3	8.8	14	19	16
28	85	72	51	62	-1	56	3	0	0	0	0	0	0	0	0	0	0	0	0	0

* EXTREME FOR THE MONTH - LAST OCCURRENCE IF MORE THAN ONE.
 T TRACE AMOUNT.
 + ALSO ON AN EARLIER DATE, OR DATES.
 HEAVY FOG - VISIBILITY 1/4 MILE OR LESS.
 FIGURES FOR WIND DIRECTIONS ARE TENS OF DEGREES CLOCKWISE FROM TRUE NORTH. 00 = CALM.
 DATA IN COLS. 8 AND 12-15 ARE BASED ON 7 OR

MORE OBSERVATIONS PER DAY AT 3-HOUR INTERVALS.
 FASTEST MILE WIND SPEEDS ARE FASTEST OBSERVED ONE-MINUTE VALUES WHEN DIRECTIONS ARE IN TENS OF DEGREES. THE / WITH THE DIRECTION INDICATES PEAK GUST SPEED.
 ANY ERRORS DETECTED WILL BE CORRECTED AND CHANGES IN SUMMARY DATA WILL BE ANNOTATED IN THE ANNUAL SUMMARY.

SLN	SUM	TOTAL		TOTAL		TOTAL	TOTAL	TOTAL	TOTAL	TOTAL	TOTAL	AVERAGES	PERIODIC WIND
		1	2	3	4								
1750	1233			323	0	5.17	3	32.05	35	2.5	7.3	23134	8431
Avg.	Avg.	Avg.	Avg.	Avg.	Avg.	PRECIPITATION	INCHES	PRECIPITATION	INCHES	PRECIPITATION	INCHES	PRECIPITATION	INCHES
62.5	43.9	53.2	-8.6	45	147	> .01 INCH	1:	2.31	1:	2.31	1:	2.31	1:
						SEASON TO DATE		SNOW, ICE PELLETS		SNOW, ICE PELLETS		SNOW, ICE PELLETS	
						NUMBER OF DAYS		> 1.0 INCH		GREATEST IN 24 HOURS AND DATES		GREATEST DEPTH IN GROUND OF SNOW-ICE PELLETS OR ICE AND DATE	
						HIGH TEMP.	MIN TEMP.	THUNDERSTORMS	2	PRECIPITATION	SNOW, ICE PELLETS		
						MAXIMUM TEMP.	MINIMUM TEMP.	DEP.	DEP.	HEAVY FOG	2	2.02	17-19
						0	0	0	0	CLEAR	7	0	0
						0	2	0	0	Partly Cloudy	5	0	15

SUMMARY BY HOURS

HOUR	AVERAGE	AVERAGES											
		TEMPERATURE	WIND	WIND	WIND	WIND	WIND	WIND	WIND	WIND	WIND	WIND	WIND
00	50.07	5	30.07	46	47	47	48	49	49	49	49	49	49
01	50.07	6	30.08	47	47	48	49	49	49	49	49	49	49
02	50.07	7	30.08	54	54	54	54	54	54	54	54	54	54
03	50.07	8	30.07	60	53	54	54	54	54	54	54	54	54
04	50.07	9	30.07	51	54	54	54	54	54	54	54	54	54
05	50.07	10	30.07	52	54	54	54	54	54	54	54	54	54
06	50.07	11	30.07	53	54	54	54	54	54	54	54	54	54
07	50.07	12	30.07	60	53	54	54	54	54	54	54	54	54
08	50.07	13	30.07	51	54	54	54	54	54	54	54	54	54
09	50.07	14	30.07	52	54	54	54	54	54	54	54	54	54
10	50.07	15	30.07	53	54	54	54	54	54	54	54	54	54
11	50.07	16	30.07	54	54	54	54	54	54	54	54	54	54
12	50.07	17	30.07	55	54	54	54	54	54	54	54	54	54
13	50.07	18	30.07	56	54	54	54	54	54	54	54	54	54
14	50.07	19	30.07	57	54	54	54	54	54	54	54	54	54
15	50.07	20	30.07	58	54	54	54	54	54	54	54	54	54
16	50.07	21	30.07	59	54	54	54	54	54	54	54	54	54
17	50.07	22	30.07	60	54	54	54	54	54	54	54	54	54
18	50.07	23	30.07	61	54	54	54	54	54	54	54	54	54
19	50.07	24	30.07	62	54	54	54	54	54	54	54	54	54
20	50.07	25	30.07	63	54	54	54	54	54	54	54	54	54
21	50.07	26	30.07	64	54	54	54	54	54	54	54	54	54
22	50.07	27	30.07	65	54	54	54	54	54	54	54	54	54
23	50.07	28	30.07	66	54	54	54	54	54	54	54	54	54
24	50.07	29	30.07	67	54	54	54	54	54	54	54	54	54
25	50.07	30	30.07	68	54	54	54	54	54	54	54	54	54
26	50.07	31	30.07	69	54	54	54	54	54	54	54	54	54
27	50.07	32	30.07	70	54	54	54	54	54	54	54	54	54
28	50.07	33	30.07	71	54	54	54	54	54	54	54	54	54

SUBSCRIPTION PRICE: \$2.55 PER YEAR. FOREIGN MAILING \$1.85 EXTRA. SINGLE COPY 20 CENTS FOR MONTHLY ISSUE. 20 CENTS FOR ANNUAL SUMMARY. OTHER DATA IN RECORDS ON FILE CAN BE FURNISHED AT COST VIA MICROFILM, MICROFICHE, OR PAPER COPIES OF ORIGINAL RECORDS. MAKE CHECKS PAYABLE TO DEPARTMENT OF COMMERCE, NOAA. SEND PAYMENTS, ORDERS, AND INQUIRIES TO NATIONAL CLIMATIC CENTER, FEDERAL BUILDING, ASHEVILLE, NORTH CAROLINA 28801.

I CERTIFY THAT THIS IS AN OFFICIAL PUBLICATION OF THE NATIONAL OCEANIC AND ATMOSPHERIC ADMINISTRATION, AND IS COMPILED FROM RECORDS ON FILE

MARCH 1978
TAMPA, FLORIDA

NAT WEATHER SERVICE MET OBSY
INTERNATIONAL AIRPORT

Local Climatological Data

MONTHLY SUMMARY Best Available Copy

LATITUDE $27^{\circ} 58' N$ LONGITUDE $82^{\circ} 32' W$ ELEVATION (GROUND) 10FT. STANDARD TIME USED: EASTERN WMO #12942



DATE	TEMPERATURE °F			DEGREE DAYS BASE 65°			WEATHER TYPES OCCURRENCE	SNOW ON GROUND AT 0700H	PRECIPITATION	DRAFT STATION PRESSURE IN.	WIND				SUNSHINE	SKY COVER TENTHS	2100		
	HIGH	MINIMUM	AVERAGE	DEPARTURE FROM NORMAL	AVERAGE	INCHES					DIRECTION	INTENSITY	PELLETS OR ICE	WATER	SNOW IN.	ELEV. FEET	FASTEST MILE		
1	75	59	67	-4	62	0	2	0	T	0	29.96	29	6.4	8.6	15	26	289	42	7
2	76	54	65	1	58	0	1	0	0	C	29.98	13	5.4	7.4	13	35	38	5	0
3	70	50	65	1	62	0	0	1	0	B	29.70	17	5.5	5.5	17	35	0	10	10
4	60	41	51	-13	48	14	0	1	T	C	29.91	35	8.3	9.6	17	33	1	0	10
5	62	37	50	-14	34	15	0	0	0	D	30.21	26	8.3	7.5	13	01	702	100	0
6	71	39	55	-9	43	10	1	1	0	E	30.22	12	1.5	4.3	8	18	703	100	0
7	81	53	67	3	55	0	2	1	0	F	30.12	15	5.1	6.6	15	16	564	80	4
8	74	61	68	3	60	0	3	1	0	G	30.02	20	2.3	9.2	21	29	219	31	10
9	66	58	61	-1	58	4	0	1	0	H	29.86	20	2.3	9.2	21	29	107	7	0
10	60	54	57	-8	46	0	0	1	0	I	29.74	24	1.6	15.0	23	28	427	60	7
11	68	44	56	-9	47	9	0	1	0	J	29.50	18	4.5	4.9	14	17	856	92	1
12	74	47	61	-4	46	4	0	1	0	K	29.90	13	5.5	5.5	13	13	832	89	7
13	81	53	67	2	55	0	2	1	0	L	30.05	13	5.5	5.5	13	13	842	90	5
14	80	67	74	8	66	0	0	1	0	M	29.96	17	9.3	9.8	15	20	842	90	5
15	81	69	75	0	70	0	10	2	0	N	30.01	18	7.0	7.1	13	18	556	77	10
16	81	71	75	5	65	0	0	2	0	O	30.24	25	5.3	10.2	23	34	379	53	10
17	62	47	55	-11	35	10	0	0	0	P	30.28	35	11.6	12.4	23	34	575	80	6
18	69	44	57	-9	33	8	0	0	0	Q	30.42	22	8.9	7.5	15	01	887	92	9
19	73	49	59	-7	43	6	0	0	0	R	30.40	07	5.2	7.1	12	36	610	84	10
20	80	52	66	-1	52	0	1	7	0	S	30.27	09	4.3	5.3	12	15	665	91	5
21	81	62	72	5	59	0	0	0	0	T	30.11	17	2.4	7.8	13	25	834	87	6
22	80	55	68	1	59	0	3	2	0	U	30.04	34	5.4	6.3	15	36	807	83	5
23	80	59	70	3	60	0	5	2	0	V	30.01	31	3.9	6.3	12	30	835	87	2
24	84	80	72	5	63	0	7	1	0	W	29.99	18	1.7	6.9	16	27	651	89	3
25	83	65	74	5	64	0	9	1	0	X	29.99	22	3.9	5.2	14	24	830	86	6
26	81	71	73	3	63	0	6	1	0	Y	29.93	27	5.3	7.6	16	30	803	82	6
27	85	52	59	-8	46	8	0	0	0	Z	29.99	32	10.3	10.9	17	31	616	84	0
28	72	47	80	-8	46	5	0	0	0	A	30.08	32	4.5	5.5	16	27	878	91	1
29	70	51	65	-3	49	0	0	0	0	B	30.09	35	6.8	7.1	15	34	872	91	1
30	82	54	68	-1	52	0	3	0	0	C	30.10	33	4.2	6.5	15	27	877	91	2
31	84	53	59	0	52	0	4	1	0	D	30.14	10	5.3	6.3	12	10	879	91	4

* EXTREME FOR THE MONTH - LAST OCCURRENCE IF MORE THAN ONE.
 T TRACE AMOUNT
 * ALSO ON AN EARLIER DATE, OR DATES.
 HEAVY FOG - VISIBILITY 1/4 MILE OR LESS.
 FIGURES FOR WIND DIRECTIONS ARE TENS OF DEGREES CLOCKWISE FROM TRUE NORTH. 00 = CALM.
 DATA IN COLS. 8 AND 12-15 ARE BASED ON 7 OR

MORE OBSERVATIONS PER DAY AT 3-HOUR INTERVALS.
 FASTEST MILE WIND SPEEDS ARE FASTEST OBSERVED ONE-MINUTE VALUES WHEN DIRECTIONS ARE IN TENS OF DEGREES. THE / WITH THE DIRECTION INDICATES PEAK GUST SPEED.
 ANY ERRORS DETECTED WILL BE CORRECTED AND CHANGES IN SUMMARY DATA WILL BE ANNOTATED IN THE ANNUAL SUMMARY

NUMBER OF DAYS		TOTAL		TOTAL		TOTAL		TOTAL		AVERAGES		RESULTANT WIND	
MAXIMUM TEMP.	MINIMUM TEMP.	PRECIPITATION	THUNDERSTORMS	DEP. DEP.	ICE PELLETS	SNOW	ICE PELLETS	DEP. DEP.	ICE PELLETS OR ICE AND SNOW	PRECIPITATION	SNOW	ICE PELLETS OR ICE AND SNOW	DEP. DEP.
190 °	432 °	1.01	3	0	0	1035	97	0	0	0	0	0	0

HOURLY PRECIPITATION (WATER EQUIVALENT IN INCHES)

	1	2	3	4	5	6	7	8	9	10	11	12	
1													
2													
3													
4													
5													
6													
7													
8													
9													
10	.05	.11	.04	.01					.01	.03	.18	.50	
11	.02	T	.03	T						T			
12													
13													
14													
15													
16													
17													
18													
19													
20													
21													
22													
23													
24													
25													
26													
27													
28													
29													
30													
31													

SUBSCRIPTION PRICE: \$2.55 PER YEAR. FOREIGN MAILING \$1.85 EXTRA. SINGLE COPY: 20 CENTS FOR MONTHLY ISSUE. 20 CENTS FOR ANNUAL SUMMARY. OTHER DATA IN RECORDS ON FILE CAN BE FURNISHED AT COST VIA MICROFILM, MICROFICHE, OR PAPER COPIES OF ORIGINAL RECORDS. MAKE CHECKS PAYABLE TO DEPARTMENT OF COMMERCE, NOAA. SEND PAYMENTS, ORDERS, AND INQUIRIES TO NATIONAL CLIMATIC CENTER, FEDERAL BUILDING, ASHEVILLE, NORTH CAROLINA 28801.

I CERTIFY THAT THIS IS AN OFFICIAL PUBLICATION OF THE NATIONAL OCEANIC AND ATMOSPHERIC ADMINISTRATION, AND IS COMPILED FROM RECORDS ON FILE AT THE NATIONAL CLIMATIC CENTER, ASHEVILLE, NORTH CAROLINA 28801.

noaa

NATIONAL OCEANIC AND
ATMOSPHERIC ADMINISTRATION / ENVIRONMENTAL
DATA SERVICE

Daniel B. Mitchell
DIRECTOR, NATIONAL CLIMATIC CENTER
USCOMB--NOAA--ASHEVILLE 04/21/78 425

APRIL 1978
TAMPA, FLORIDA
NAT WEATHER SERVICE MET OBSY
INTERNATIONAL AIRPORT

Local Climatological Data

MONTHLY SUMMARY Best Available Copy

LATITUDE 27° 58' N LONGITUDE 82° 32' W ELEVATION (GROUND) 13 FT. STANDARD TIME USED: EASTERN HOUR 8:2942



DATE	TEMPERATURE °F					DEGREE DAYS BASE 65°		WEATHER TYPES ON DATES OF OCCURRENCE	SNOW-ICE FOLIAGE	PRECIPITATION	AVG. STATION PRESSURE	WIND						SUNSHINE	SKY COVER															
	HIGH	MINIMUM	AVERAGE	DEPARTURE FROM NORMAL	AVERAGE DEP. POINT	THAW SIGN WITHIN 24 HRS	COLD SIGN WITHIN 24 HRS					WIND DIRECTION	WIND SPEED	FASTEST WIND	MIN. WIND DIR.	MAX. WIND DIR.	MIN. WIND SPD.	MAX. WIND SPD.	WIND DIRECTION															
	1	2	3	4	5	6	7A	7B	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22											
1	83	52	68	-1	58	0	3																											
2	81	54	68	-1	58	0	3																											
3	88	54	71	1	58	0	6																											
4	85	58	71	1	61	1	8																											
5	84	63	74	4	63	0	9																											
6	86	63	75	5	63	0	10																											
7	85	65	75	5	62	0	10																											
8	87	58	73	2	60	0	8	1	9																									
9	87	61	74	3	60	0	9	4	6																									
10	85	52	73	2	60	0	9	4	6																									
11	95	59	77	6	65	12																												
12	86	68	78	7	68	13																												
13	66	74	80	0	72	15																												
14	84	67	76	4	68	11		13																										
15	85	66	76	4	63	11	1																											
16	88	61	75	3	56	10																												
17	87	66	77	5	62	12																												
18	85	71	78	5	68	13																												
19	80	71	76	3	70	11		13																										
20	78	59	69	-4	57	4																												
21	78	57	68	-5	54	3																												
22	84	55	70	-3	52	5																												
23	83	63	73	0	60	8																												
24	85	69	77	3	60	12																												
25	86	62	74	0	63	9																												
26	72	63	68	-6	55	3																												
27	71	55	63	-11	48	2																												
28	77	48	63	-11	50	2																												
29	79	53	66	-8	53	1																												
30	82	62	72	-3	80	0	7	1																										
SUM	SUM	SUM	SUM	SUM	SUM	TOTAL	TOTAL						TOTAL	TOTAL																				
2492	1845					4	232						NUMBER OF DAYS	941		30.02	17	5.1	7.7	23	29	30.02	19	137.112										
Avg.	Avg.	Avg.	Avg.	Avg.	Avg.								DEP.																					
93.11	61.5	72.3	0.3	60	-5	13																												
SEASON TO DATE																																		
NUMBER OF DAYS												TOTAL	TOTAL																					
MAXIMUM TEMP. MINIMUM TEMP.												1039	329																					
5 30 ° 4 32 ° 3 32 ° 2 0 °												DEP.	DEP.																					
HEAVY FOG												0.01	0.01																					
CLEAR 10 PART CLOUDS 14												0.001	0.001																					

N EXTREME FOR THE MONTH - LAST OCCURRENCE IF MORE THAN ONE.
 T TRACE AMOUNT
 + ALSO ON AN EARLIER DATE, OR DATES.
 HEAVY FOG - VISIBILITY 1/4 MILE OR LESS.
 FIGURES FOR WIND DIRECTIONS ARE TENS OF DEGREES CLOCKWISE FROM TRUE NORTH. 00 = CALM.
 DATA IN COLS. 6 AND 12-15 ARE BASED ON 7 OR

MORE OBSERVATIONS PER DAY AT 3-HOUR INTERVALS.
 FASTEST WIND SPEEDS ARE FASTEST OBSERVED ONE-MINUTE VALUES WHEN DIRECTIONS ARE IN TENS OF DEGREES. THE / WITH THE DIRECTION INDICATES PEAK GUST SPEED.
 ANY ERRORS DETECTED WILL BE CORRECTED AND CHANGES IN SUMMARY DATA WILL BE PROSTATED IN THE ANNUAL SUMMARY.

TIME	AVG. PRESSURE	AVG. WIND DIR.	AVERAGES		PEAK WINDS
			11 KTO	10 KTO	
01	30.02	67	59	51	5.0
04	30.00	64	62	59	4.8
07	30.04	64	62	59	4.8
10	30.03	75	67	61	5.5
13	30.03	81	68	63	10.8
16	29.98	82	69	59	9.7
19	29.99	75	65	59	9.7
22	30.03	69	64	51	5.8

HOURLY PRECIPITATION (WATER EQUIVALENT IN INCHES)

HOUR	A.M. HOUR ENDING AT											
	1	2	3	4	5	6	7	8	9	10	11	12
1	-	-	-	-	-	-	-	-	-	-	-	-
2	-	-	-	-	-	-	-	-	-	-	-	-
3	-	-	-	-	-	-	-	-	-	-	-	-
4	-	-	-	-	-	-	-	-	-	-	-	-
5	-	-	-	-	-	-	-	-	-	-	-	-
6	-	-	-	-	-	-	-	-	-	-	-	-
7	-	-	-	-	-	-	-	-	-	-	-	-
8	-	-	-	-	-	-	-	-	-	-	-	-
9	-	-	-	-	-	-	-	-	-	-	-	-
10	-	-	-	-	-	-	-	-	-	-	-	-
11	-	-	-	-	-	-	-	-	-	-	-	-
12	-	-	-	-	-	-	-	-	-	-	-	-
13	-	-	-	-	-	-	-	-	-	-	-	-
14	-	-	-	-	-	-	-	-	-	-	-	-
15	-	-	-	-	-	-	-	-	-	-	-	-
16	-	-	-	-	-	-	-	-	-	-	-	-
17	-	-	-	-	-	-	-	-	-	-	-	-
18	-	-	-	-	-	-	-	-	-	-	-	-
19	-	-	-	-	-	-	-	-	-	-	-	-
20	-	-	-	-	-	-	-	-	-	-	-	-
21	-	-	-	-	-	-	-	-	-	-	-	-
22	-	-	-	-	-	-	-	-	-	-	-	-
23	-	-	-	-	-	-	-	-	-	-	-	-
24	-	-	-	-	-	-	-	-	-	-	-	-
25	-	-	-	-	-	-	-	-	-	-	-	-
26	-	-	-	-	-	-	-	-	-	-	-	-
27	-	-	-	-	-	-	-	-	-	-	-	-
28	-	-	-	-	-	-	-	-	-	-	-	-
29	-	-	-	-	-	-	-	-	-	-	-	-
30	-	-	-	-	-	-	-	-	-	-	-	-

SUBSCRIPTION PRICE: \$2.55 PER YEAR, FOREIGN MAILING \$1.85 EXTRA. SINGLE COPY: 20 CENTS FOR MONTHLY ISSUE. 20 CENTS FOR ANNUAL SUMMARY. OTHER DATA IN RECORDS ON FILE CAN BE FURNISHED AT COST VIA MICROFILM, MICROFICHE, OR PAPER COPIES OF ORIGINAL RECORDS. PAYE CHECKS PAYABLE TO DEPARTMENT OF COMMERCE. NOAA, SEND PAYMENTS, ORDERS, AND INQUIRIES TO NATIONAL CLIMATIC CENTER, FEDERAL BUILDING, ASHEVILLE, NORTH CAROLINA 28801.

noaa

NATIONAL OCEANIC AND
ATMOSPHERIC ADMINISTRATION / ENVIRONMENTAL
DATA SERVICE

Daniel B. Mitchell
DIRECTOR, NATIONAL CLIMATIC CENTER

APRIL 1978

TAMPA, FLORIDA

માર્ચ ૧૯૭૩

TEMP., FLORIDA

NAT WEATHER SERVICE MET OBSY
INTERNATIONAL AIRPORT

Local Climatological Data



MONTHLY SUMMARY

Best Available Copy

LATITUDE 27° 58' N LONGITUDE 82° 32' W ELEVATION (GROUNDS) 19 FT. STANDARD TIME USED: EASTERN WOAN 812841

- EXTREME FOR THE MONTH - LAST OCCURRENCE IF MORE THAN ONE.
T TRACT AMOUNT
- ALSO ON AN EARLIER DATE, OR DATES.
HEAVY FOG - VISIBILITY 1/4 MILE OR LESS.
FIGURES FOR WIND DIRECTIONS ARE TENS OF DEGREES CLOCKWISE FROM TRUE NORTH. 00 = CALM.
DATA IN COLA, 6 PM, 12-16 DEC BASED ON 7-12

MORE OBSERVATIONS PER DAY AT 3-HOUR INTERVALS.
FASTEST WIND SPEEDS ARE FASTEST OBSERVED
ONE-MINUTE VALUES WHEN DIRECTIONS ARE IN TENS
OF DEGREES. THE / WITHIN THE DIRECTION INDICATES
PEAK GUST SPEED.
ANY ERRORS DETECTED WILL BE CORRECTED AND
CHANGES IN SUMMARY DATA WILL BE ANNOUNCED IN
THE ANNUAL SUMMARY.

SUMMARY BY HOURS										RESULTANT WIND	
AVERAGES										RESULTANT WIND	
HOUR	WIND DIR.	WIND SPD. M.P.H.	SUN GIVEN	STATION PRESSURE	TEMPERATURE		RELATIVE HUMIDITY %	WIND SPEED M.P.H.	DIRECTION SPD. M.P.H.		
					AIR °F	BULB °F					
01	N	4	28.95	74	70	68	82	6.1	12	2.5	
02	S	28.94	72	69	68	68	87	5.2	11	2.3	
03	S	28.99	72	70	69	69	97	5.9	11	2.3	
04	S	30.00	81	73	69	69	97	5.9	15	3.1	
05	S	29.97	86	74	68	57	9.9	25	22	2.6	
06	S	29.94	85	73	68	64	9.7	25	22	2.6	
07	S	29.94	81	72	68	67	7.5	27	1.7	2.0	
08	S	29.99	72	74	69	69	6.6	11	11	2.0	

HOURLY PRECIPITATION - WATER EQUIVALENT IN INCHES

SUBSCRIPTION PRICE: \$2.55 PER YEAR. FOREIGN MAILING \$1.85 EXTRA. SINGLE COPY: 20 CENTS FOR MONTHLY ISSUE. 20 CENTS FOR ANNUAL SUMMARY. OTHER DATA IN RECORDS ON FILE CAN BE FURNISHED AT COST VIA MICROFILM, MICROFICHE, OR PAPER COPIES OF ORIGINAL RECORDS. MAKE CHECKS PAYABLE TO DEPARTMENT OF COMMERCE, 4404A. SEND PAYMENTS, ORDERS, AND INQUIRIES TO NATIONAL CLIMATIC CENTER, FEDERAL BUILDING, ASHEVILLE, NORTH CAROLINA 28801.

I CERTIFY THAT THIS IS AN OFFICIAL PUBLICATION OF THE NATIONAL OCEANIC AND ATMOSPHERIC ADMINISTRATION, AND IS COMPILED FROM RECORDS ON FILE AT THE NATIONAL CLIMATIC CENTER, ASHEVILLE, NORTH CAROLINA 28801.

noaa

NATIONAL OCEANIC AND
ATMOSPHERIC ADMINISTRATION / ENVIRONMENTAL
DATA SERVICE

Daniel B. Mitchell
DIRECTOR, NATIONAL CLIMATIC CENTER

JUNE 1978

Local Climatological Data



www.w7.org.bn

NATIONAL WEATHER SERVICE MET UBSY

MONTHLY SUMMARY

Best Available Copy

LATITUDE 27° 58' N LONGITUDE 82° 32' W ELEVATION (GROUND) 198 FT. STANDARD TIME USED: EASTERN LOCAL #1294

- EXTREME FOR THE MONTH - LAST OCCURRENCE IF MORE THAN ONE.
- TRACE AMOUNT
- ALSO ON AN EARLIER DATE, OR DATES.
- HEAVY FOG - VISIBILITY 1/4 MILE OR LESS.
- FIGURES FOR WIND DIRECTIONS ARE TENS OF DEGREES CLOCKWISE FROM TRUE NORTH. OR = CALM.
- DATA IN COLS. 6 AND 12-15 ARE BASED ON 7 OR

FUNNEL CLOUD REPORTED BY PUBLIC 12 MILES SE AT 1334 ON THE 3RD.
ON THE 15TH THE CONTROL TOWER REPORTED A FUNNEL CLOUD 10 MILES
OVER TAMPA BAY. TORNADO REPORTED ON 29TH AT 1143 18 MILES SW
NEAR SEMINOLE.

MORE OBSERVATIONS PER DAY AT 3-HOUR INTERVALS.
FASTEST MILE WIND SPEED ARE FASTEST OBSERVED
ONE-MINUTE VALUES WHEN DIRECTIONS ARE IN TENS
OF DEGREES. THE / WITHIN THE DIRECTION INDICATES
PEAK GUST SPEED.
ANY ERRORS DETECTED WILL BE CORRECTED AND
CHANGES IN SUMMARY DATA WILL BE ANNOTATED IN
THE ANNUAL SUMMARY.

HOUR	LOCAL TIME	BEVERAGE						PERCENT WATER
		STATION PRESSURE IN.	AIR TEMP. IN.	HGT FEET	DIA PSI.	RELATIVE HUMIDITY	MIN. DPTL IN. P.H.P.	
01	6	30.04	78	74	72	82	4.4	11
04	9	30.02	75	73	72	82	4.4	3.2
07	12	30.04	77	74	72	82	9.9	4.3
10	15	30.05	85	77	72	82	9.9	3.4
12	17	30.04	88	77	72	82	9.9	2.1
15	20	30.01	87	77	72	82	9.9	2.1
18	23	30.02	84	76	72	82	7.0	1.0
21	23	30.06	89	74	72	82	25	

HOURLY PRECIPITATION (WATER EQUIVALENT IN INCHES)

SUBSCRIPTION PRICE: \$2.55 PER YEAR. FOREIGN MAILING 61.85 EXTRA. SINGLE COPY: 20 CENTS FOR MONTHLY ISSUE; 20 CENTS FOR ANNUAL SUMMARY. OTHER DATA IN RECORDS ON FILE CAN BE FURNISHED AT COST VIA MICROFILM, MICROFICHE, OR PAPER COPIES OF ORIGINAL RECORDS. PAY CHECKS PAYABLE TO DEPARTMENT OF COMMERCE, NOAA. SEND PAYMENTS, ORDERS, AND INQUIRIES TO NATIONAL CLIMATIC CENTER, FEDERAL BUILDING, ASHEVILLE, NORTH CAROLINA 28801.

I CERTIFY THAT THIS IS AN OFFICIAL PUBLICATION OF THE NATIONAL OCEANIC AND ATMOSPHERIC ADMINISTRATION, AND IS COMPILED FROM RECORDS ON FILE AT THE NATIONAL CLIMATIC CENTER, ASHEVILLE, NORTH CAROLINA 28801.

noaa NATIONAL OCEANIC AND
ATMOSPHERIC ADMINISTRATION

ENVIRONMENTAL
DATA SERVICES

Daniel B. Mitchell
DIRECTOR, NATIONAL CLIMATIC CENTER

USCIRMM--NOAA--ASHEVILLE

JULY 1978

Local Climatological Data

NAT WEATHER SERVICE MET OBSY
INTERNATIONAL AIRPORT

**MONTHLY SUMMARY
Best Available Copy**

LATITUDE 27° 58' N LONGITUDE 82° 32' W ELEVATION (GROUND) 19 FT. STANDARD TIME USED: EASTERN LOAN #12542

The seal of the Department of Commerce is circular. The outer ring contains the words "DEPARTMENT OF COMMERCE" at the top and "UNITED STATES OF AMERICA" at the bottom. Inside the ring is a shield featuring a balance scale, a sheaf of wheat, and a fish. A five-pointed star is positioned above the shield. A ribbon or scroll surrounds the bottom half of the shield.

- EXTREME FOR THE MONTH - LAST OCCURRENCE IF MORE THAN ONE.
- TRACE AMOUNT
- ALSO ON AN EARLIER DATE, OR DATES.
- HEAVY FOG - VISIBILITY 1/4 MILE OR LESS.
- FIGURES FOR WIND DIRECTIONS ARE TENS OF DEGREES COUNTERCLOCKWISE FROM TRUE NORTH. DO A CALCULATION IN COLS. 8 AND 12-15 ARE BASED ON 7 OR

MORE OBSERVATIONS PER DAY AT 3-HOUR INTERVALS.
FASTEST WIND SPEEDS ARE FASTEST OBSERVED
ONE-MINUTE VALUES WHEN DIRECTIONS ARE IN TENS
OF DEGREES. THE / WITH THE DIRECTIONS INDICATES
PEAK GUST SPEED.
ANY ERRORS DETECTED WILL BE CORRECTED AND
CHANGES IN SUMMARY DATA WILL BE INDICATED IN
THE ANNUAL SUMMARY.

FUNNEL CLOUDS REPORTED AT ST PETERSBURG ON JULY 4TH, AND WILSON ON JULY 7TH. TORNADO REPORTED BY PUBLIC AT 30TH & MEDICAL DRIVE AT 1410 ON JULY 12TH.

HOURLY PRECIPITATION (WATER EQUIVALENT IN INCHES)

SUBSCRIPTION PRICE: \$2.55 PER YEAR. FOREIGN MAILING \$1.85 EXTRA. SINGLE COPY: 25 CENTS FOR MONTHLY ISSUE; 20 CENTS FOR ANNUAL SUMMARY. OTHER DATA IN RECORDS ON FILE CAN BE FURNISHED AT COST VIA MICROFILM, MICROFICHE, OR PAPER COPIES OF ORIGINAL RECORDS. MAKE CHECKS PAYABLE TO DEPARTMENT OF COMMERCE, NOAA, SEND PAYMENTS, ORDERS, AND INQUIRIES TO NATIONAL CLIMATIC CENTER, FEDERAL BUILDING, ASHEVILLE, NORTH CAROLINA 28801.

I CERTIFY THAT THIS IS AN OFFICIAL PUBLICATION OF THE NATIONAL OCEANIC AND ATMOSPHERIC ADMINISTRATION, AND IS COMPILED FROM RECORDS ON FILE AT THE NATIONAL CLIMATIC CENTER, ASHEVILLE, NORTH CAROLINA 28801.

noaa

NATIONAL OCEANIC AND
ATMOSPHERIC ADMINISTRATION / ENVIRONMENTAL DATA AND
INFORMATION SERVICE

Daniel B. Mitchell
DIRECTOR, NATIONAL CLIMATIC CENTER

AUGUST 1978
TAMPA, FLORIDA

NAT WEATHER SERVICE MET OBSY
INTERNATIONAL AIRPORT

Local Climatological Data




MONTHLY SUMMARY Best Available Copy


LATITUDE 27° 58' N LONGITUDE 82° 32' W ELEVATION (GROUNDS) 19FT. STANDARD TIME USED: EASTERN ISON #12942


TIME	TEMPERATURE °F			DEGREE DAYS BASE 65°		WEATHER TYPES ON DATES OF OCCURRENCE	SNOW	ICE	PRECIPITATION	RPT. STATION	WIND						SUNSHINE	SKY COVER TENTS					
	HIGH	LOW	DEP.	DEPARTURE	MIN	MAX					DEP.	DEP.	DEP.	DEP.	DEP.	DEP.	DEP.	DEP.					
MONTH	MINIMUM	MAX	DEP.	DEPARTURE	MIN	MAX	DEP.	DEP.	DEP.	DEP.	DEP.	DEP.	DEP.	DEP.	DEP.	DEP.	DEP.	DEP.	DEP.				
1	2	3	4	5	6	7A	7B	7C	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22
1	82	74	78*	-4	73	0	13	13	.02	0	30.07	19	4.4	5.5	13	03	53	8	10	9	1		
2	86	72	79	-3	73	0	14	13	.8	.33	30.03	14	3.3	5.6	12	03	265	46	10	9	2		
3	85	73	80	-2	73	0	15	13	.8	T	30.01	14	3.1	5.0	12	18	623	77	6	7	3		
4	80	74	82	0	74	0	17	13	T	T	30.00	07	5.2	14	34	487	50	5	5	4			
5	80	73	82	0	73	0	17	13	.11	0	30.04	06	3.5	6.3	14	09	624	78	6	5	5		
6	91	75	83	1	75	0	18	13	.58	.08	30.08	13	4.5	5.8	21	12	554	69	8	5	6		
7	91	76	84	2	73	0	19	13	T	0	30.08	10	8.7	9.1	14	12	628	78	8	5	7		
8	94	76	85	3	74	0	20	3	T	0	30.09	10	5.1	6.5	15	22	525	67	7	6	8		
9	92	72*	82	0	73	0	17	13	1.18	0	30.09	13	3.8	7.3	25	19	617	77	7	7	9		
10	91	75	83	1	74	0	18	13	.0	0	30.06	11	2.6	6.0	17	15	581	73	7	5	10		
11	88	76	82	0	75	0	17	13	.08	0	30.05	19	4.2	7.3	10	24	624	70	10	9	11		
12	87	77	82	0	78	0	17	13	.07	0	30.08	17	4.7	9.2	10	24	237	30	9	9	12		
13	87	79	83	0	75	0	18	13	T	0	30.09	14	3.9	4.9	10	32	579	73	9	9	13		
14	91	75	83	0	75	0	18	13	0	0	30.10	03	1.7	5.3	12	22	639	81	4	4	14		
15	93	76	85	2	75	0	20	3	.86	0	30.12	14	3.8	7.8	23	09	680	84	4	5	15		
16	92	77	85	2	75	0	20	3	0	0	30.09	06	4.8	9.4	14	33	729	82	3	3	16		
17	91	73	82	-1	74	0	17	13	.21	0	30.08	22	7.6	8.6	20	16	649	86	6	7	17		
18	89	73	81	-2	74	0	18	13	0	0	30.05	24	1.6	5.3	12	22	561	72	7	7	18		
19	90	76	83	1	75	0	19	13	T	0	30.07	01	2.5	8.0	14	27	724	83	3	3	19		
20	91	78	84	2	74	0	19	13	0	0	30.07	36	2.8	4.8	12	27	649	83	4	21	20		
21	92	77	85	3	74	0	20	1	0	0	30.05	07	5.8	8.0	9	28	629	81	3	2	22		
22	93	76	85	3	74	0	20	1	.34	0	30.03	06	5.8	8.2	18	09	722	83	3	3	23		
23	92	77	85	3	73	0	20	1	.08	0	30.03	06	6.6	8.9	14	10	605	78	4	4	24		
24	91	75	83	1	71	0	18	13	.21	0	30.03	06	6.6	8.3	17	14	363	47	9	9	25		
25	90	75	83	1	72	0	18	13	T	0	30.03	11	5.1	6.6	10	15	464	60	3	4	27		
26	91	75	83	1	72	0	18	13	0	0	30.03	35	2.2	5.2	9	27	724	91	7	5	26		
27	94*	75	85*	3	73	0	20	1	0	0	30.05	05	2.3	5.5	7	14	464	60	2	3	28		
28	91	77	84	2	71	0	19	1	0	0	30.04	11	4.9	6.0	9	13	464	60	2	3	29		
29	92	75	84	2	73	0	19	1	.14	0	30.00	12	2.7	6.0	12	27	620	81	4	3	30		
30	92	75	84	2	74	0	19	1	.79	0	30.03	13	3.6	6.8	15	12	550	72	4	3	31		
31	91	75	83	1	74	0	19	1	.9	0	30.03	07	6.3	7.1	24	01	476	57	5	5	31		
32	84	54									1724	1 TOTAL	48	4.4	5.5	12	1	54	15				
2801	2329										5.97	0	30.05	10	2.9	5.2	21	16	1735	59	153		
Avg.	Avg.	Avg.	Avg.	Avg.	Avg.	Avg.	Avg.	Avg.	Avg.	Avg.	Avg.	Avg.	Avg.	Avg.	Avg.	Avg.	Avg.	Avg.	Avg.	Avg.	Avg.	Avg.	
80.4	75.1	82.8	0.6	74	0	24					15	-2.03											
SEASON TO DATE																					SUMMARY BY HOURS		
NUMBER OF DAYS																					AVERAGES		
MAX. HIGH TEMP.																					RESULTANT WIND		
MAX. MIN TEMP.																					HOUR		
TOTAL																					1		
TOTAL																					2		
TOTAL																					3		
TOTAL																					4		
TOTAL																					5		
TOTAL																					6		
TOTAL																					7		
TOTAL																					8		
TOTAL																					9		
TOTAL																					10		
TOTAL																					11		
TOTAL																					12		
TOTAL																					13		
TOTAL																					14		
TOTAL																					15		
TOTAL																					16		
TOTAL																					17		
TOTAL																							


APPENDIX B


STATISTICAL ANALYSIS OF TSP AND SO₂ MEASUREMENTS

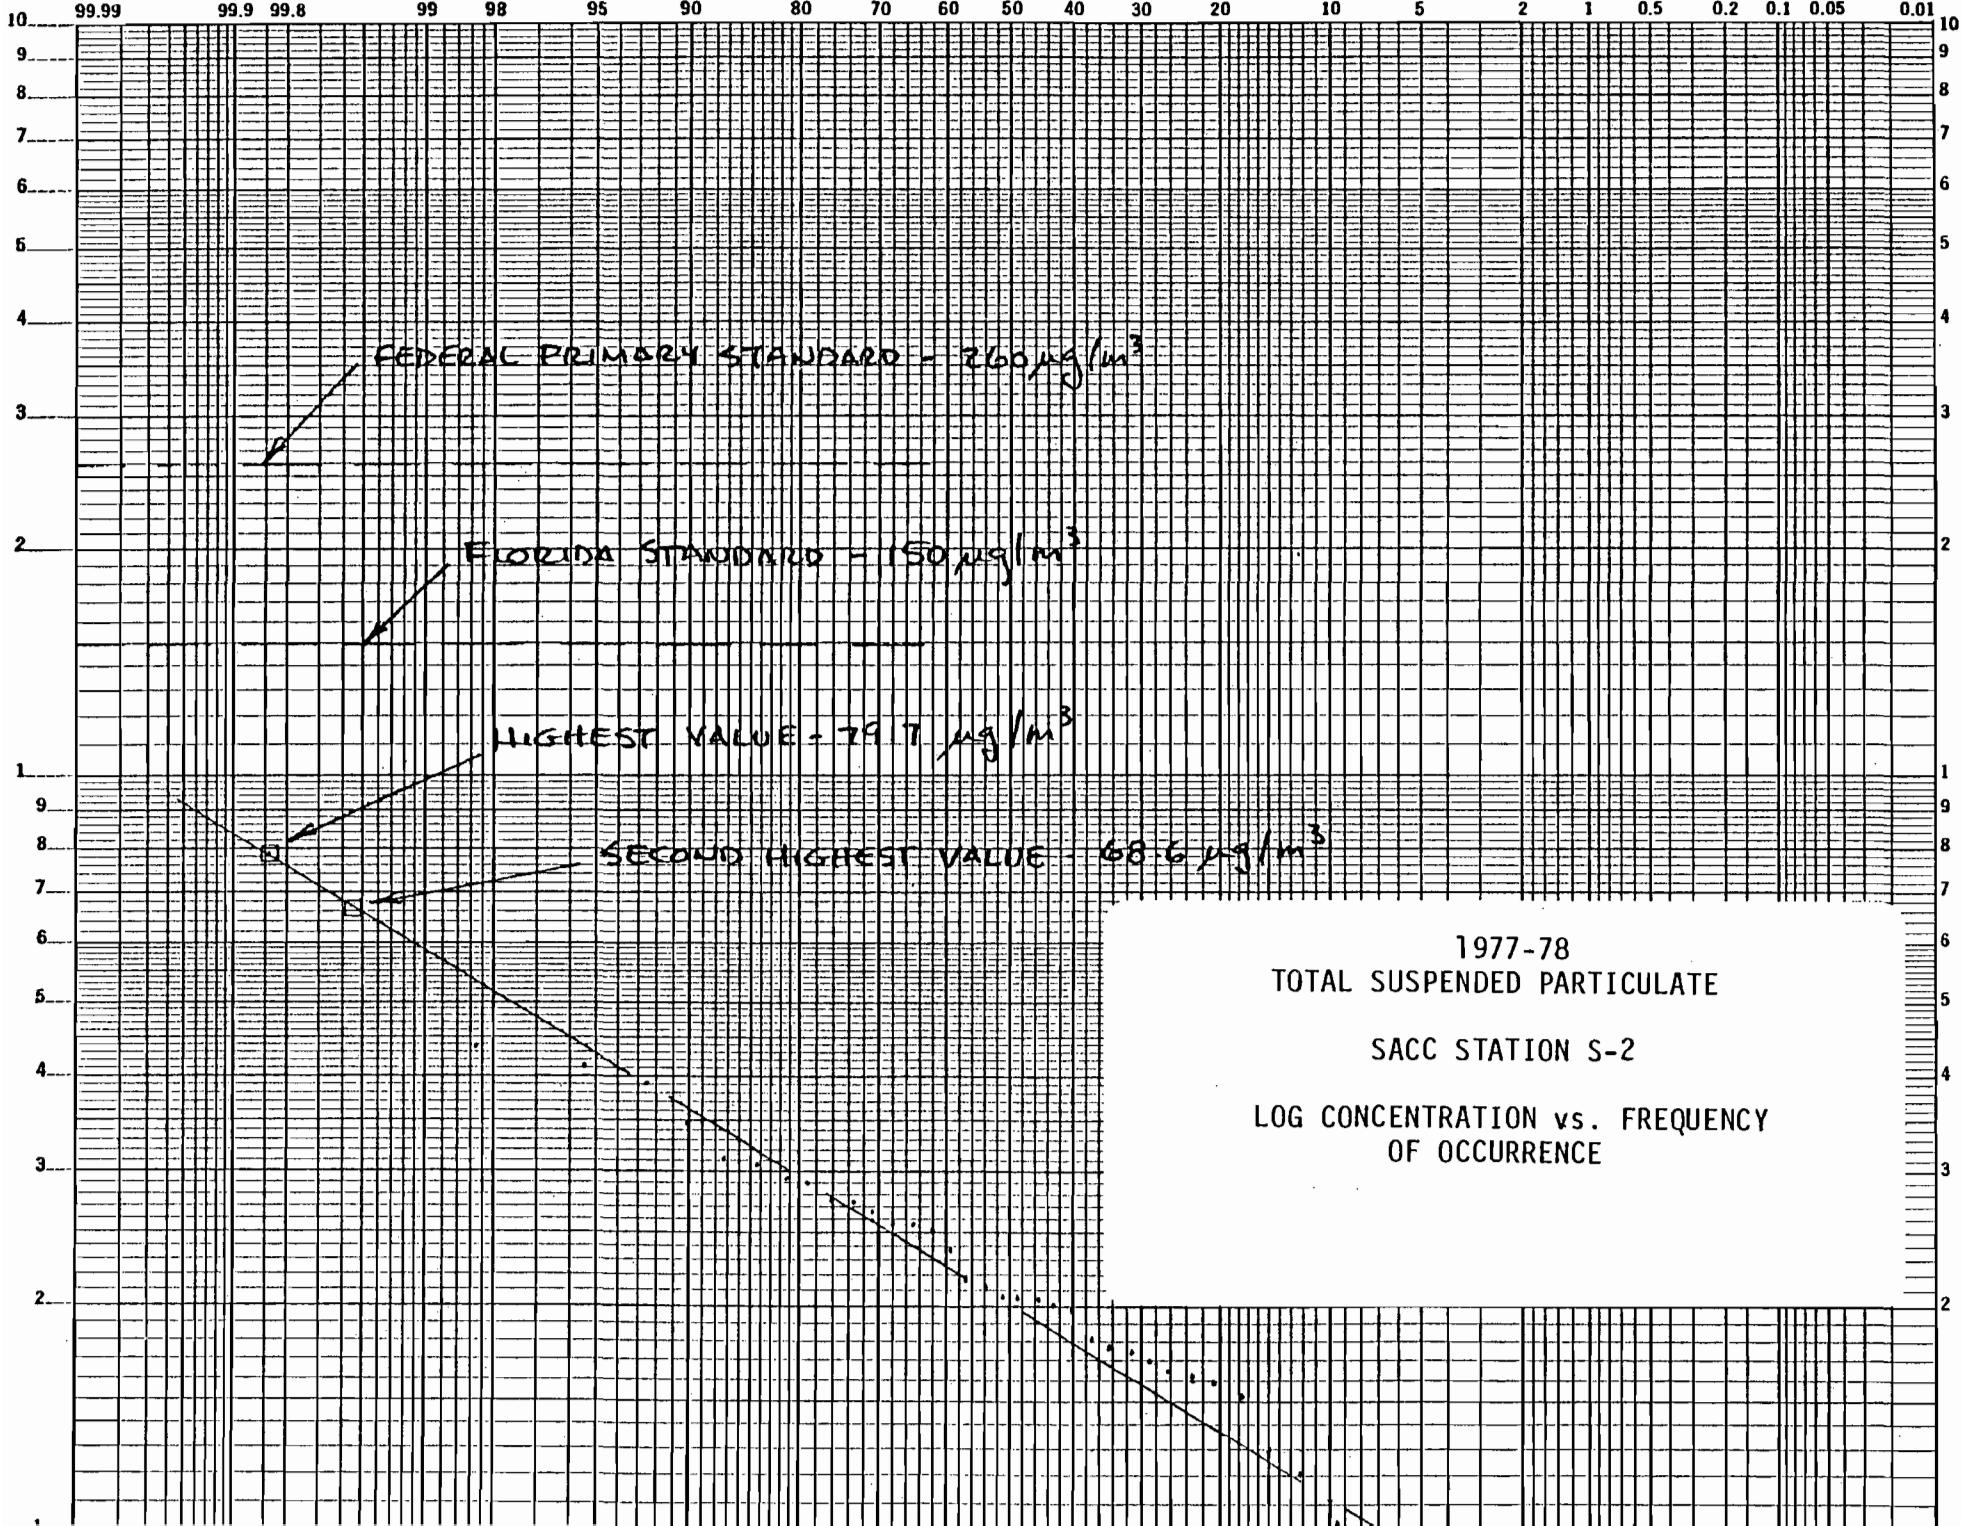


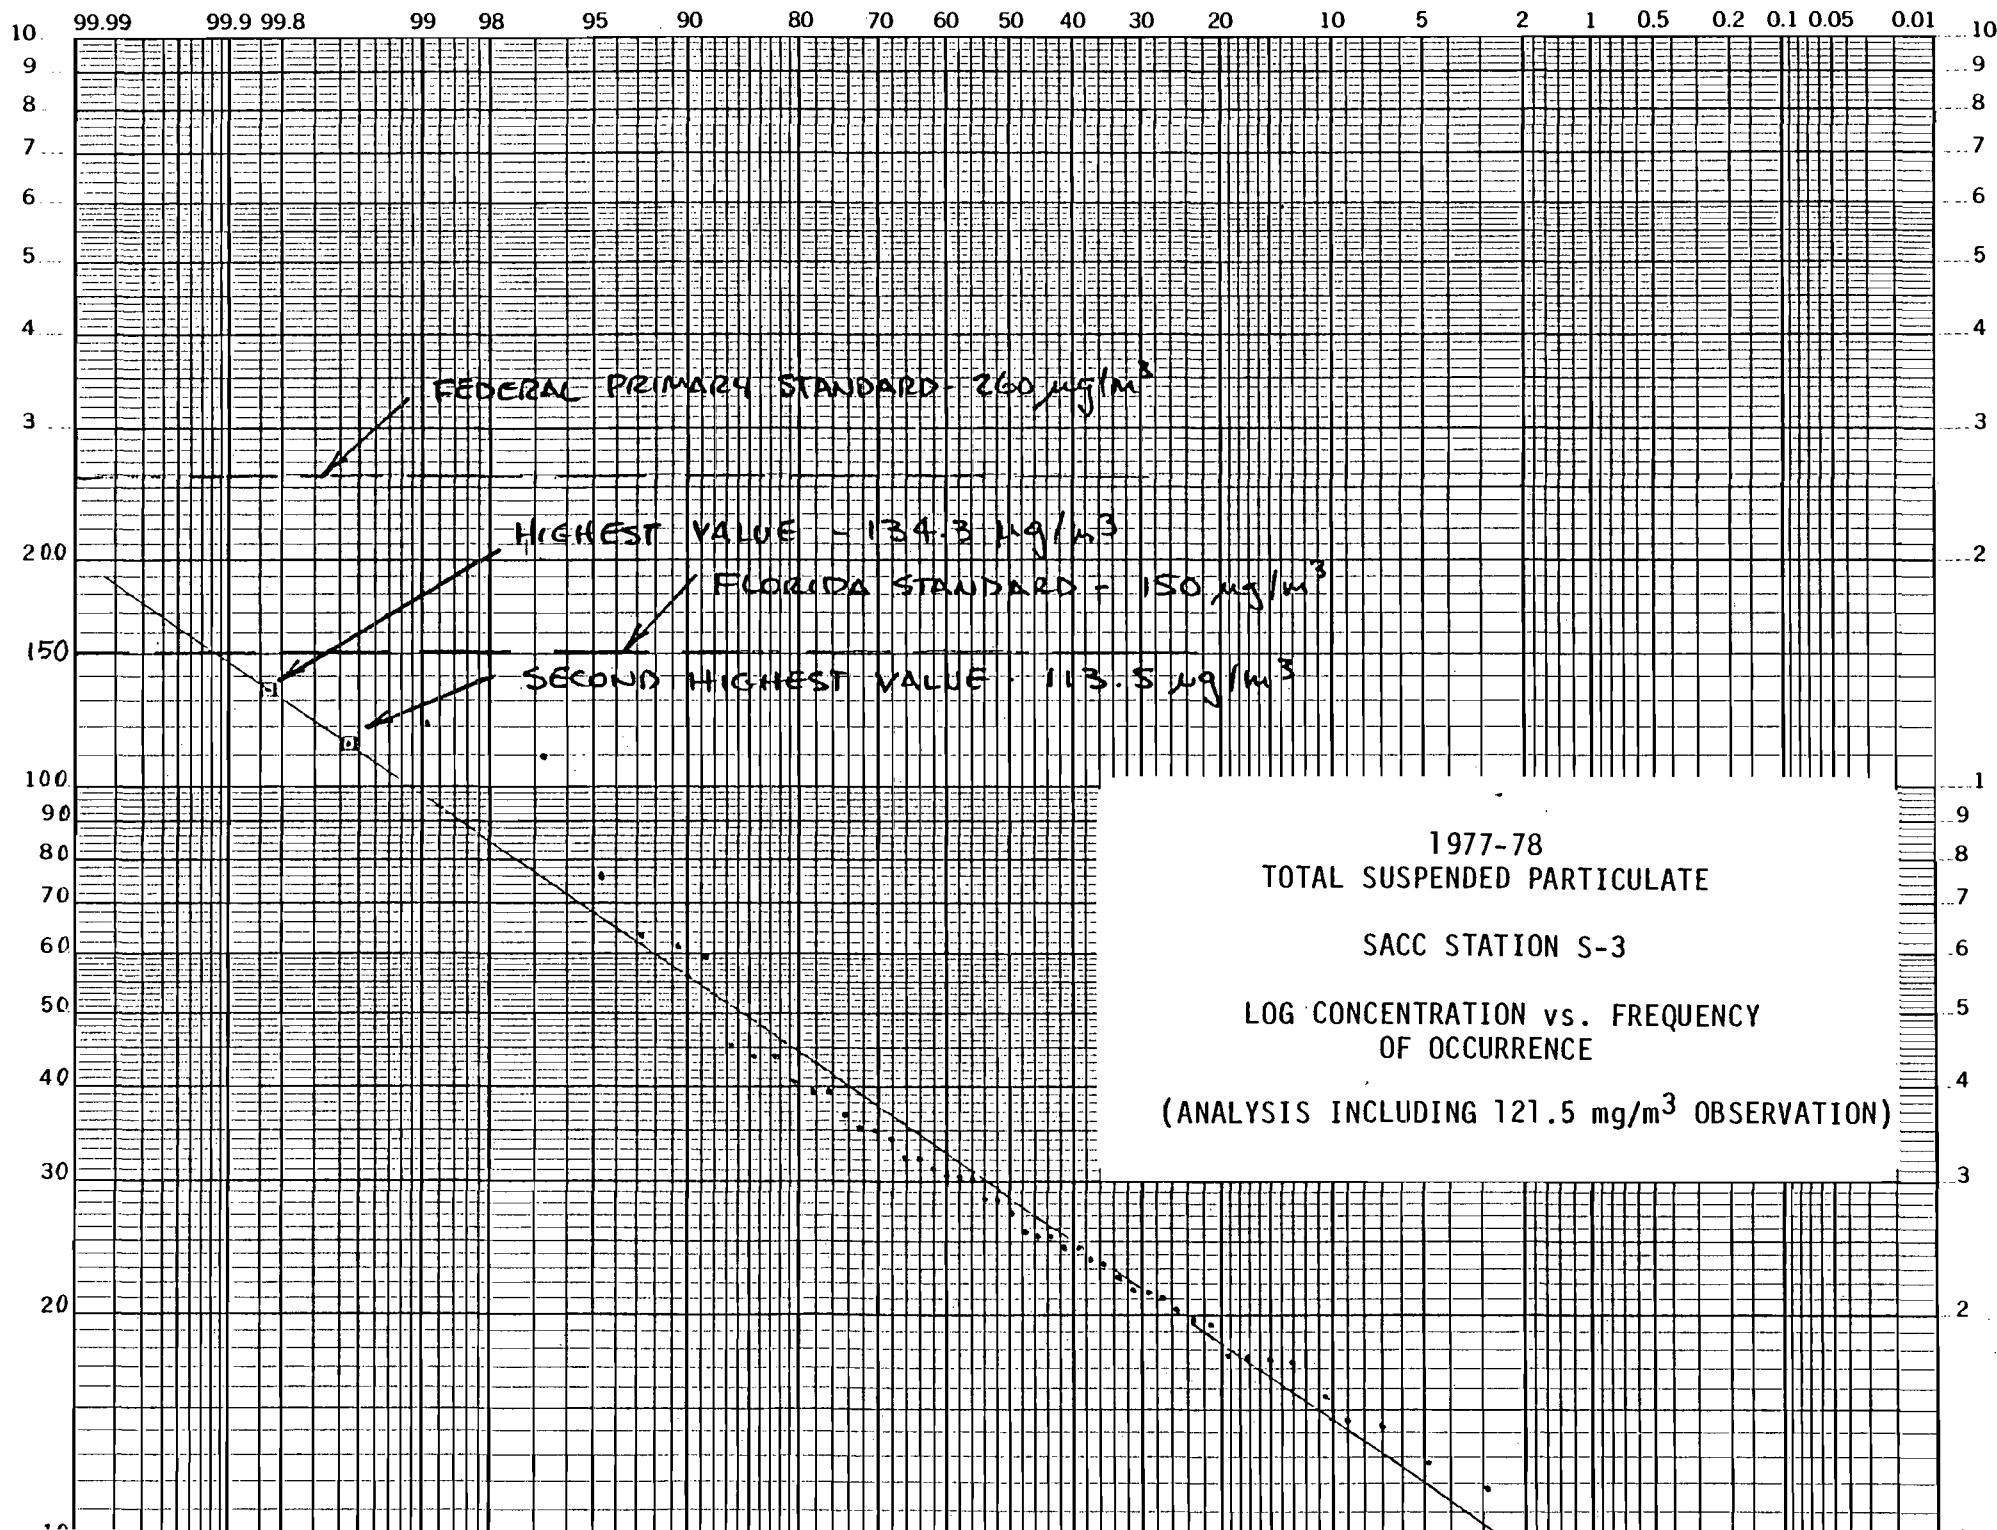

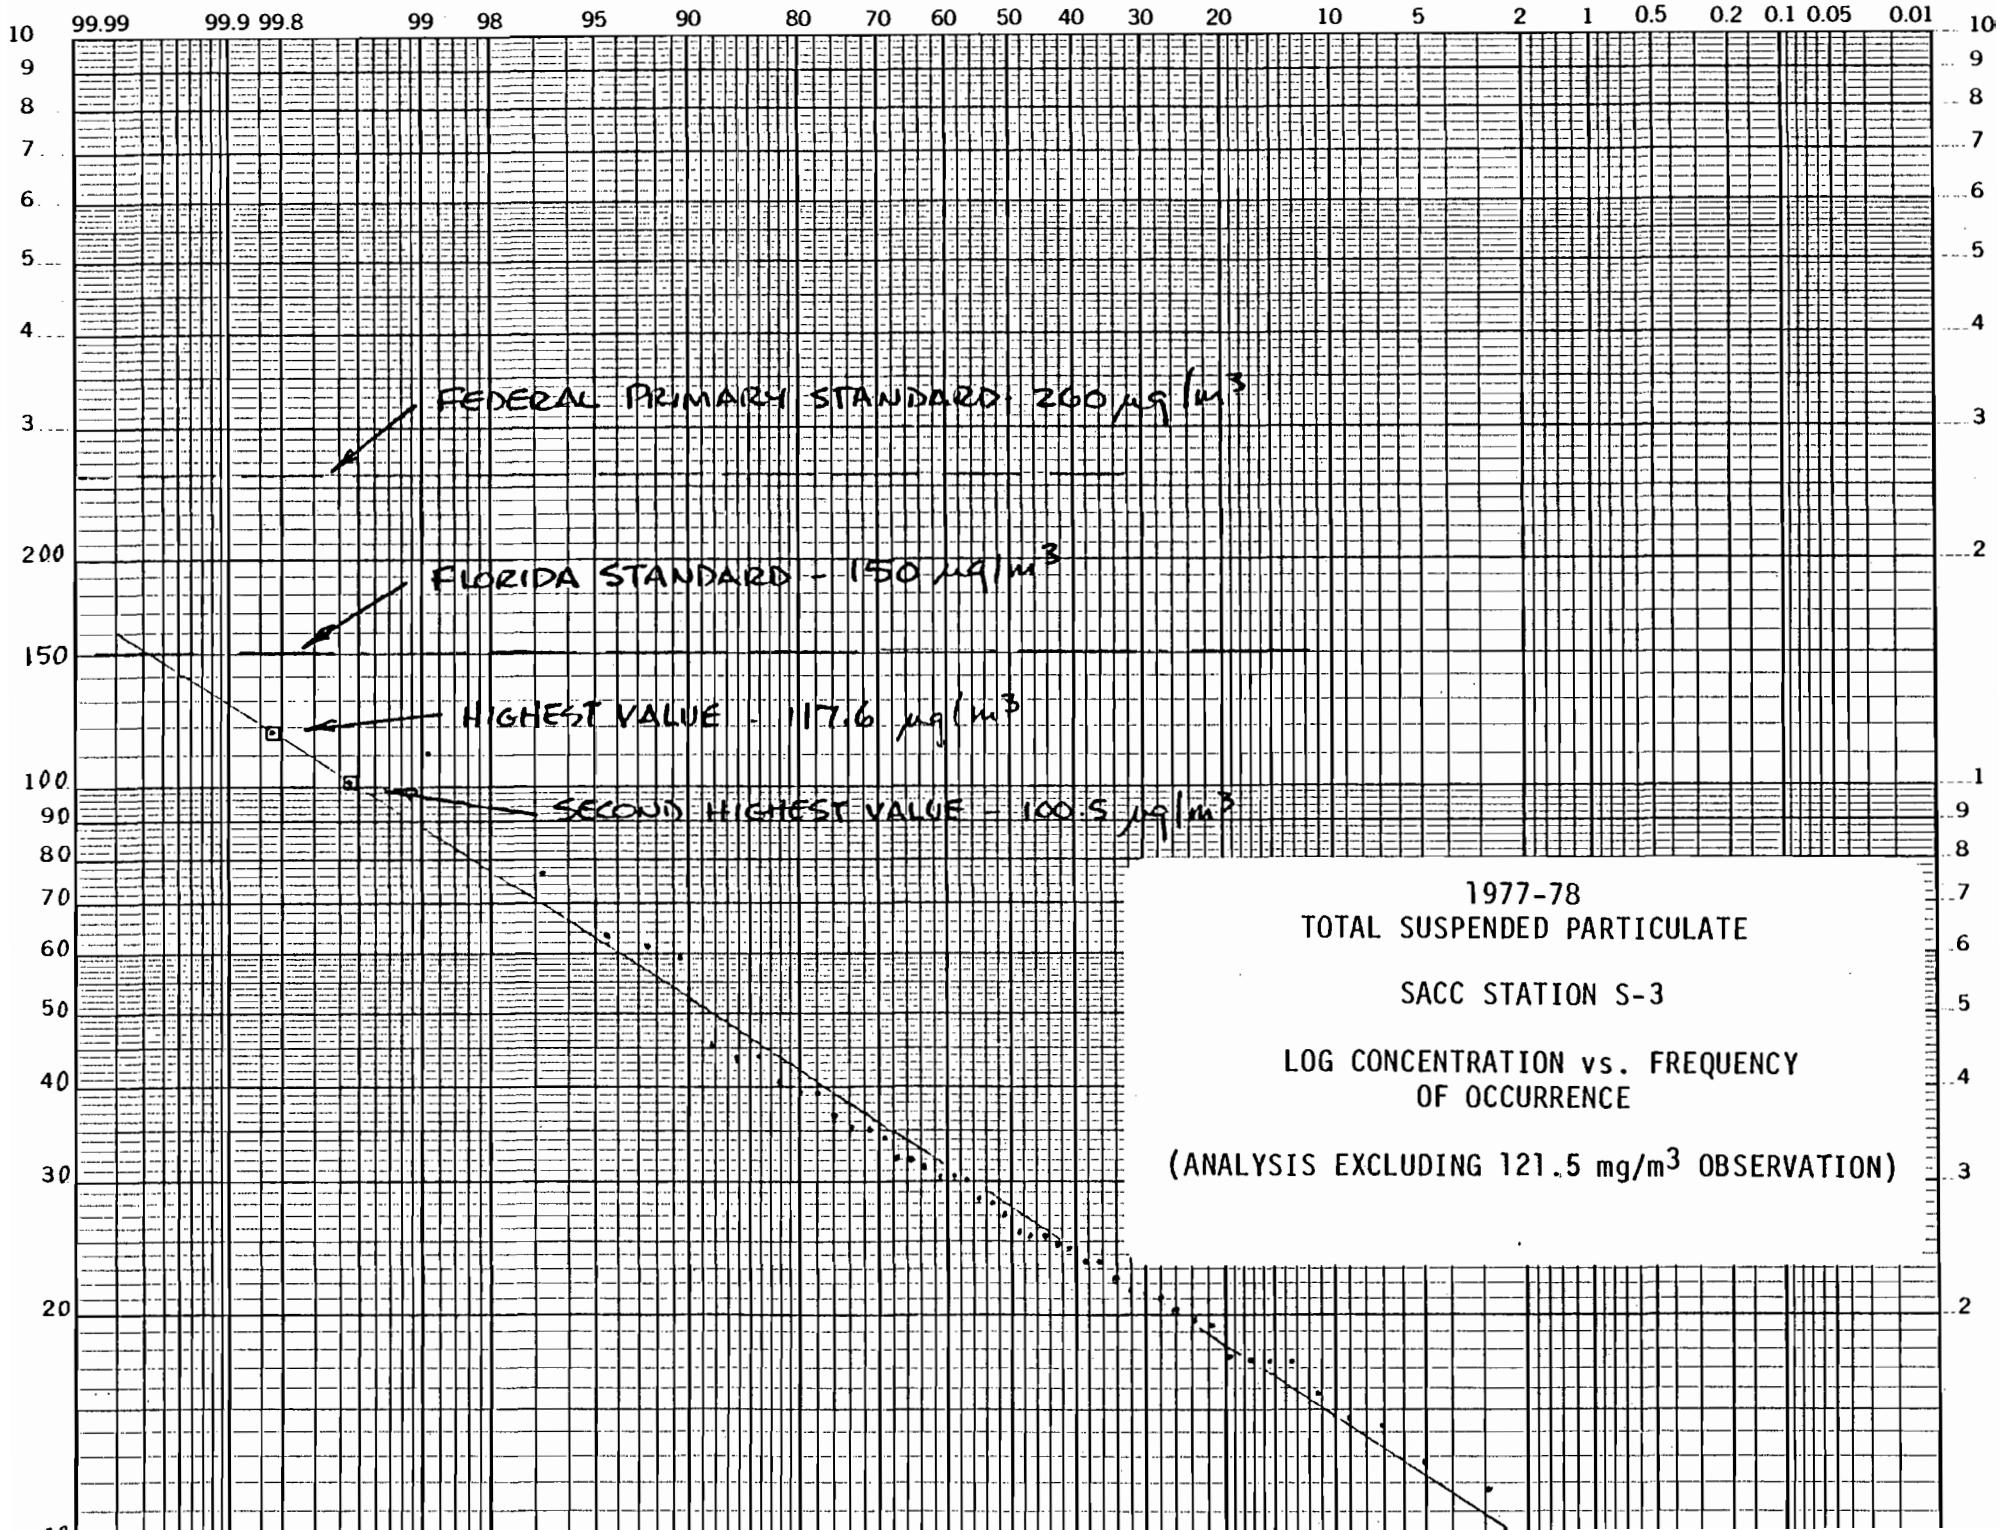

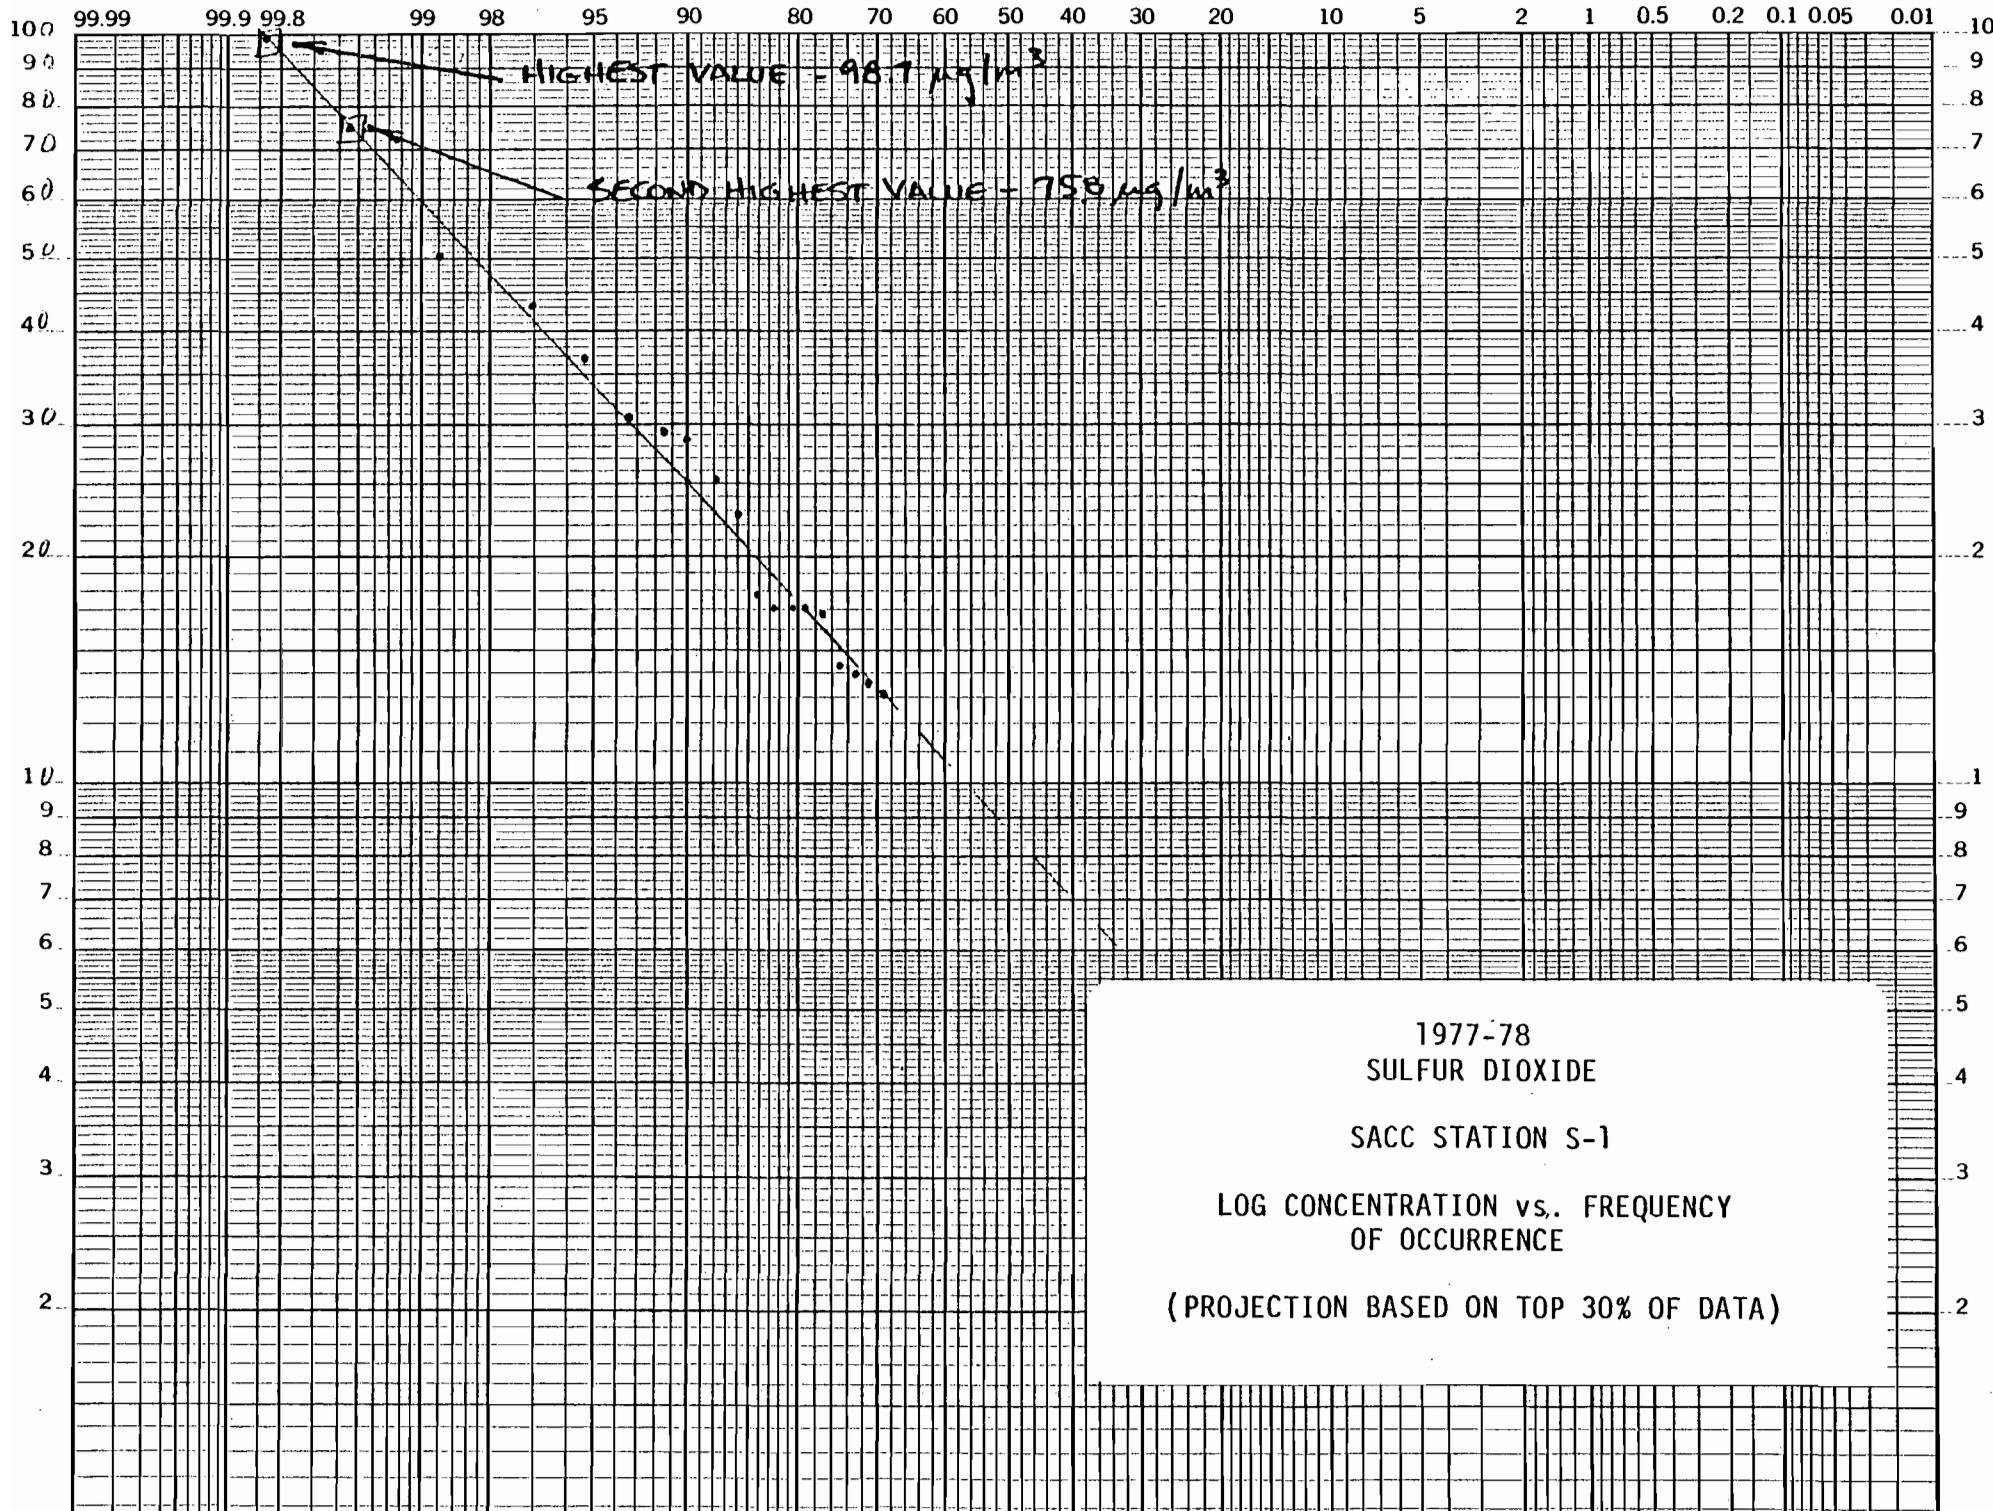

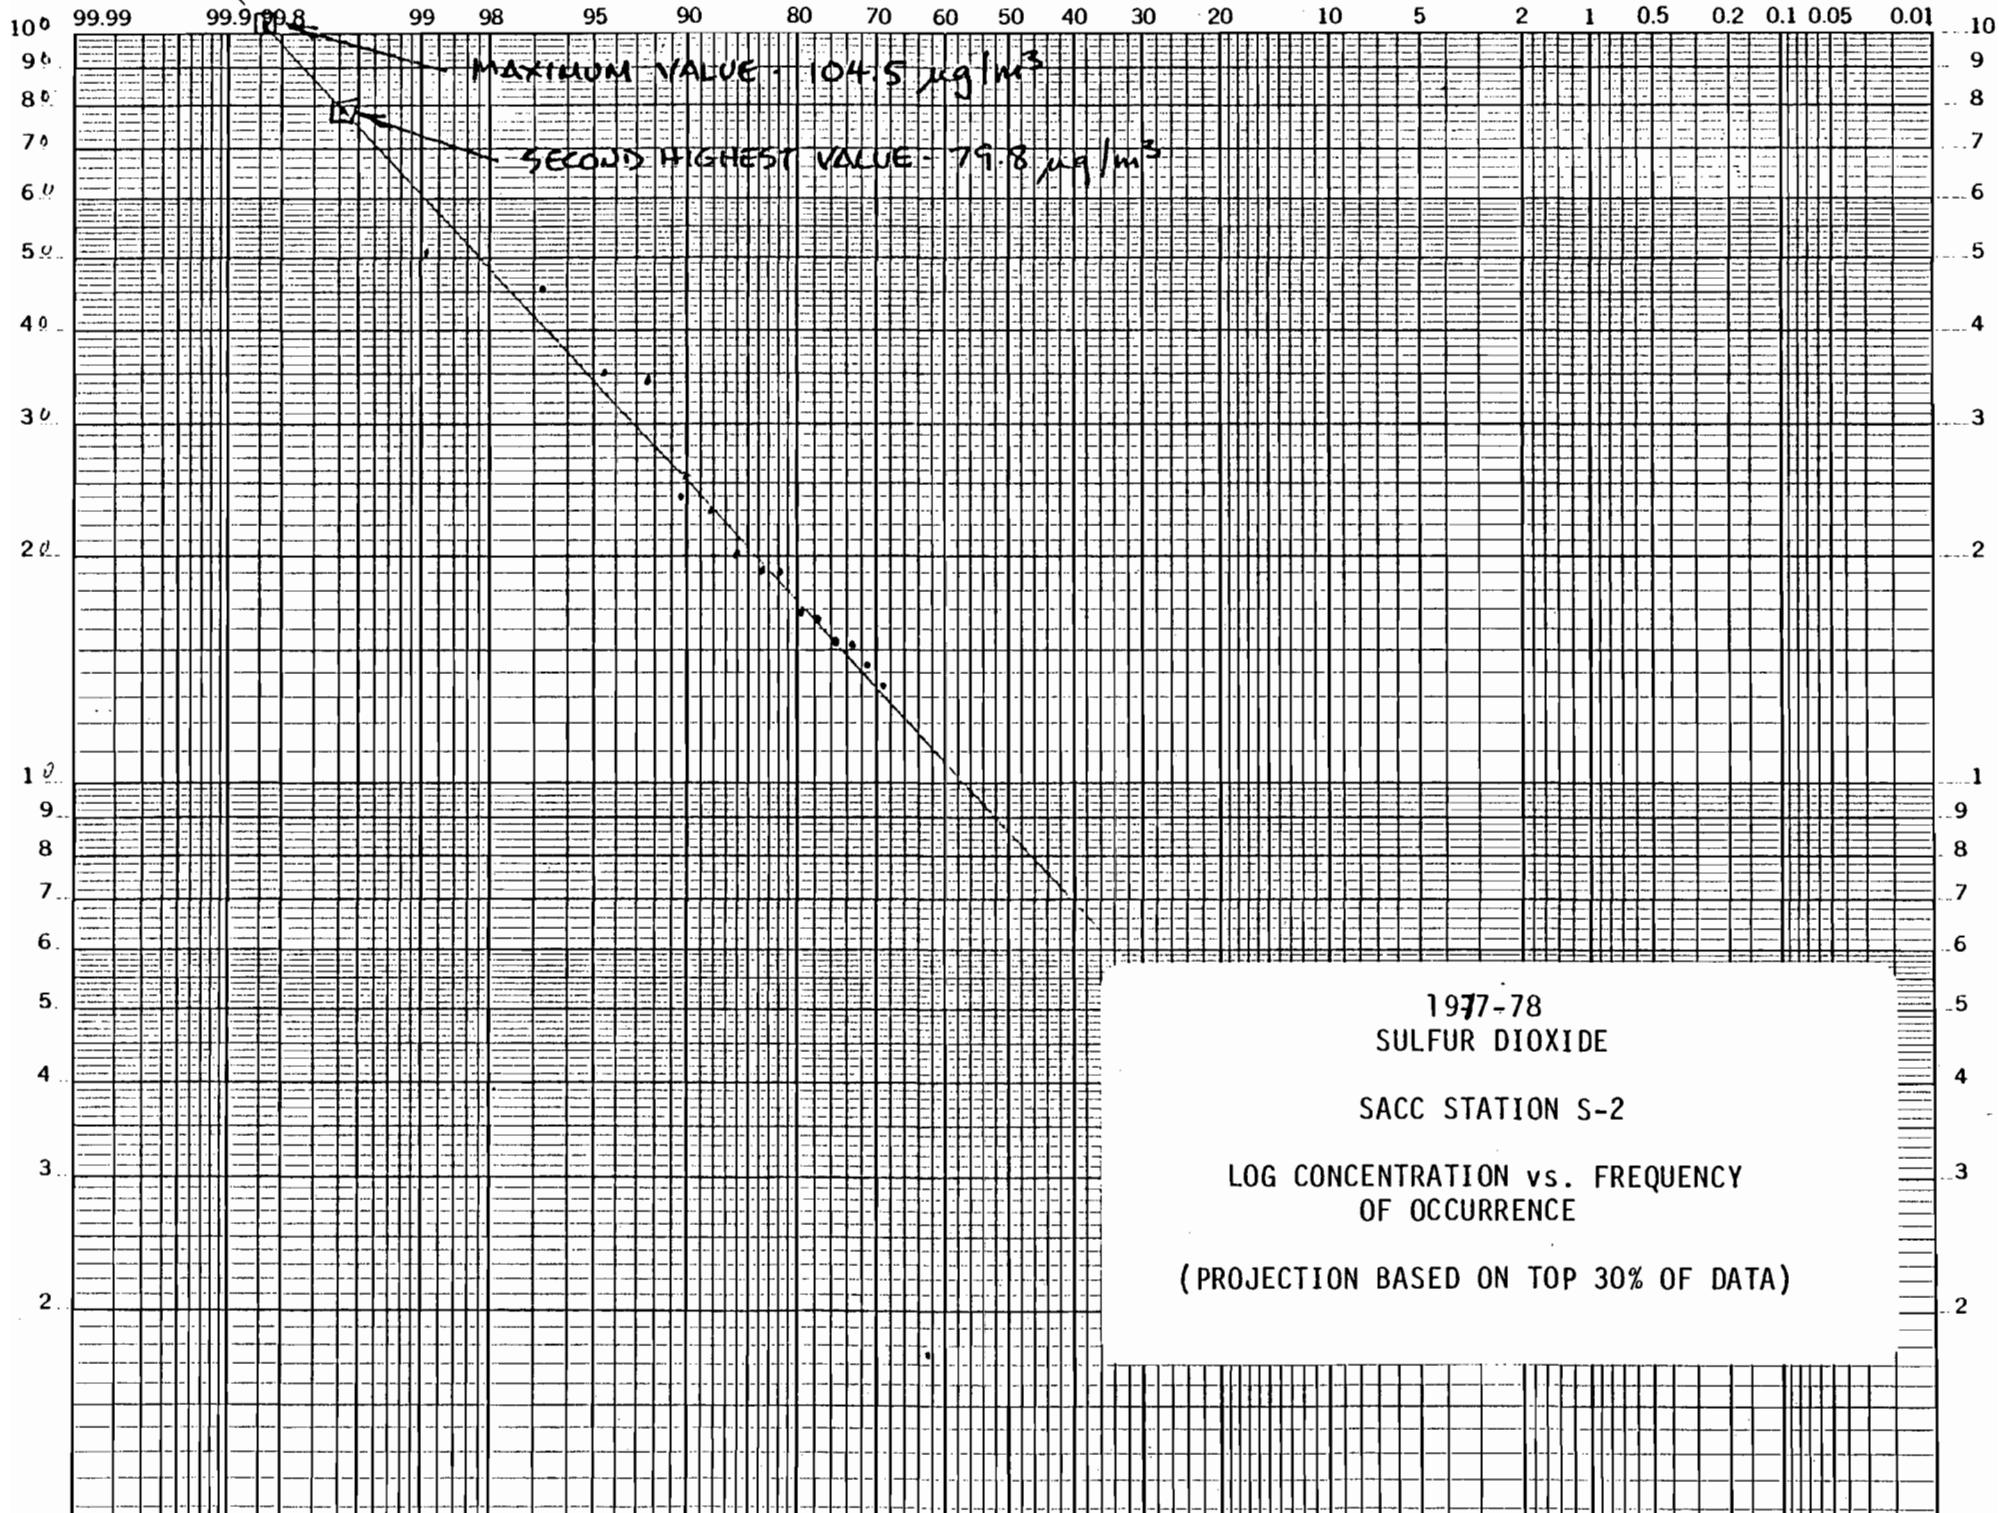

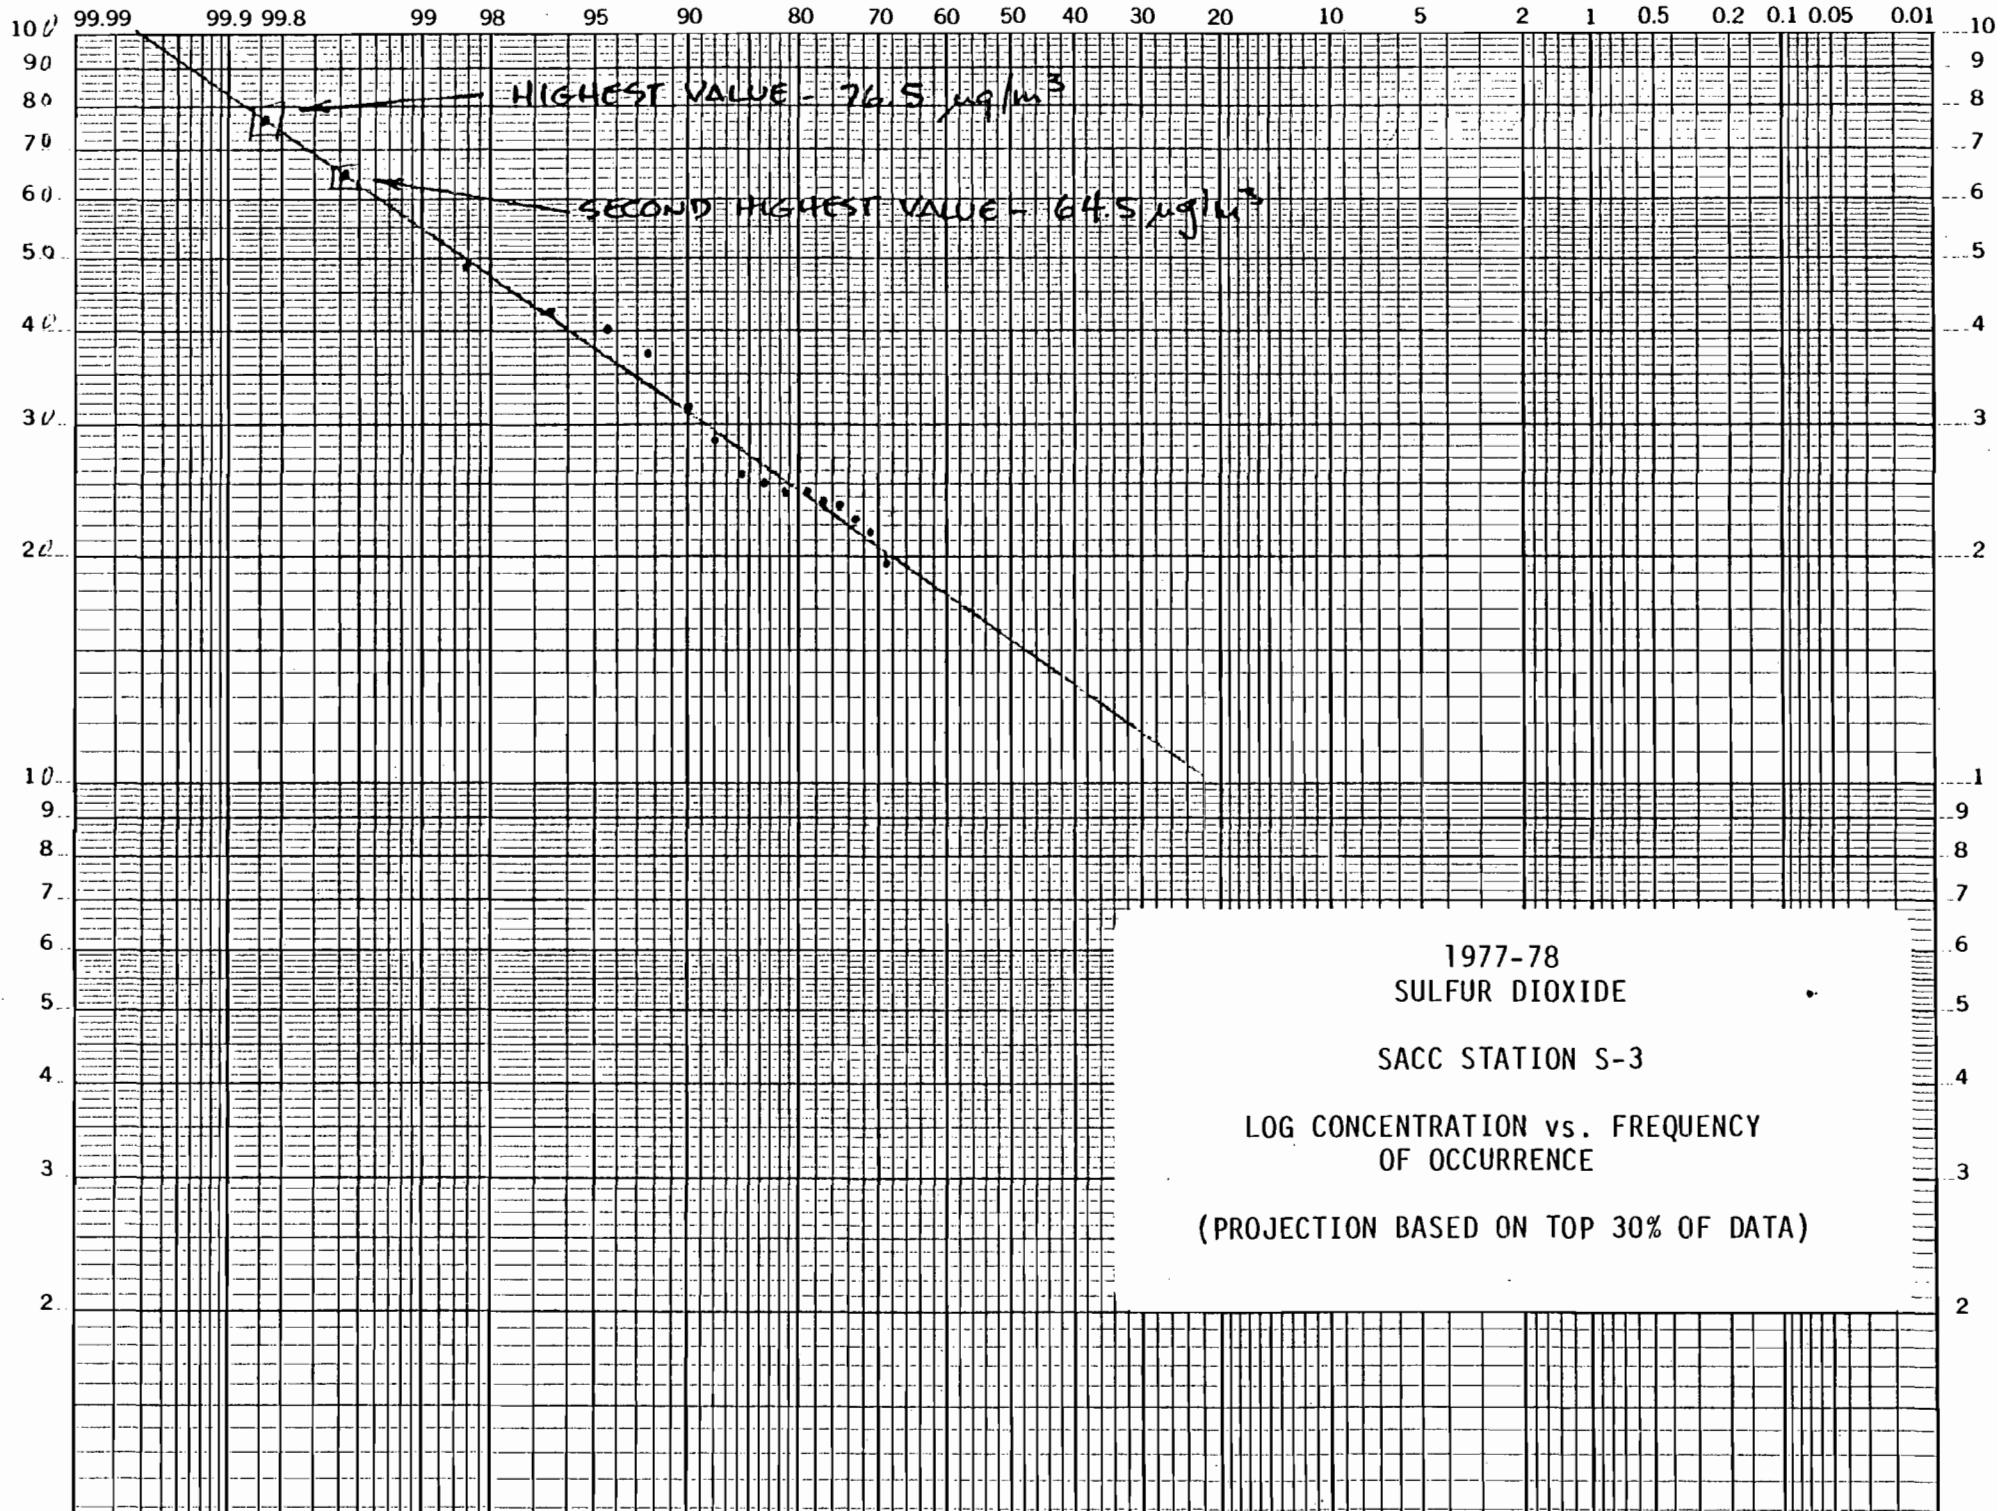

SOURCE INVENTORIES



JFS

CONSERVATION CONSULTANTS, INC.

POST OFFICE BOX 35 • PALMETTO, FLORIDA 33561

TELEPHONE 813-722-6668

Consultants in Environmental Biology and Engineering

June 28, 1979

Mr. Lewis H. Nagler
U.S. Environmental Protection Agency
Region IV
345 Courtland, N.E.
Atlanta, Georgia 30308

Re: SACC (Swift) Duette Mine EIS

Dear Mr. Nagler:

Enclosed is a diagram, summary listing and detailed listing of sources that Conservation Consultants Inc., has developed for use in the 1977 baseline and projected 1982 long term modeling efforts for the referenced project.

All sources within 30 kilometers of the proposed plant site and sources within 50 kilometers having total particulate emissions of 50 tons per year or greater have been included. The attached lists (1977, 1982) will be used for annual (AQDM) purposes unless further revisions are necessary. They were developed with power plants at 100 percent generation and the remaining sources on growth factors following the PEDCO methodology because of disparities between the process weight allowable and actual emissions.

It is understood that a more limited number of sources may be adequate for short term (24-hour) analysis with the PTMTP-W model. To simplify analysis we would propose the following:

- o All sources within + 45 degrees of 1 or 2 highest, second highest day wind angles, to a radius of 30 km.
- o All sources within 30 kilometers.
- o All power generation stations.
- o All seasonal operations (maximum daily rates).
- o All sources greater than 274 lb/day (50 TPY).

If you feel it would be worthwhile for the 30 to 50 kilometer range, we could compute composite sources, i.e., same volumetric flow, average temperature, average stack velocity, for the balance of smaller emissions at each source location.

We would appreciate your advise as soon as possible. You may call me or John Schatmeyer at (813) 722-6668.

Very truly yours,



Byron E. Nelson
Group Leader
Air Quality Section


Enclosure

cc: J. E. Davis, Swift
R. L. Rhodes, Esq, Holland & Knight
J. F. Schatmeyer, Ph.D., P.E., CCI
H. C. Robertson, CCI
A. Zimmer, EPA-Region IV

BEN/ts

47-1242

K-5 DRILLING TO THE INFERIOR LAYER
OF THE SEDIMENTARY ROCKS

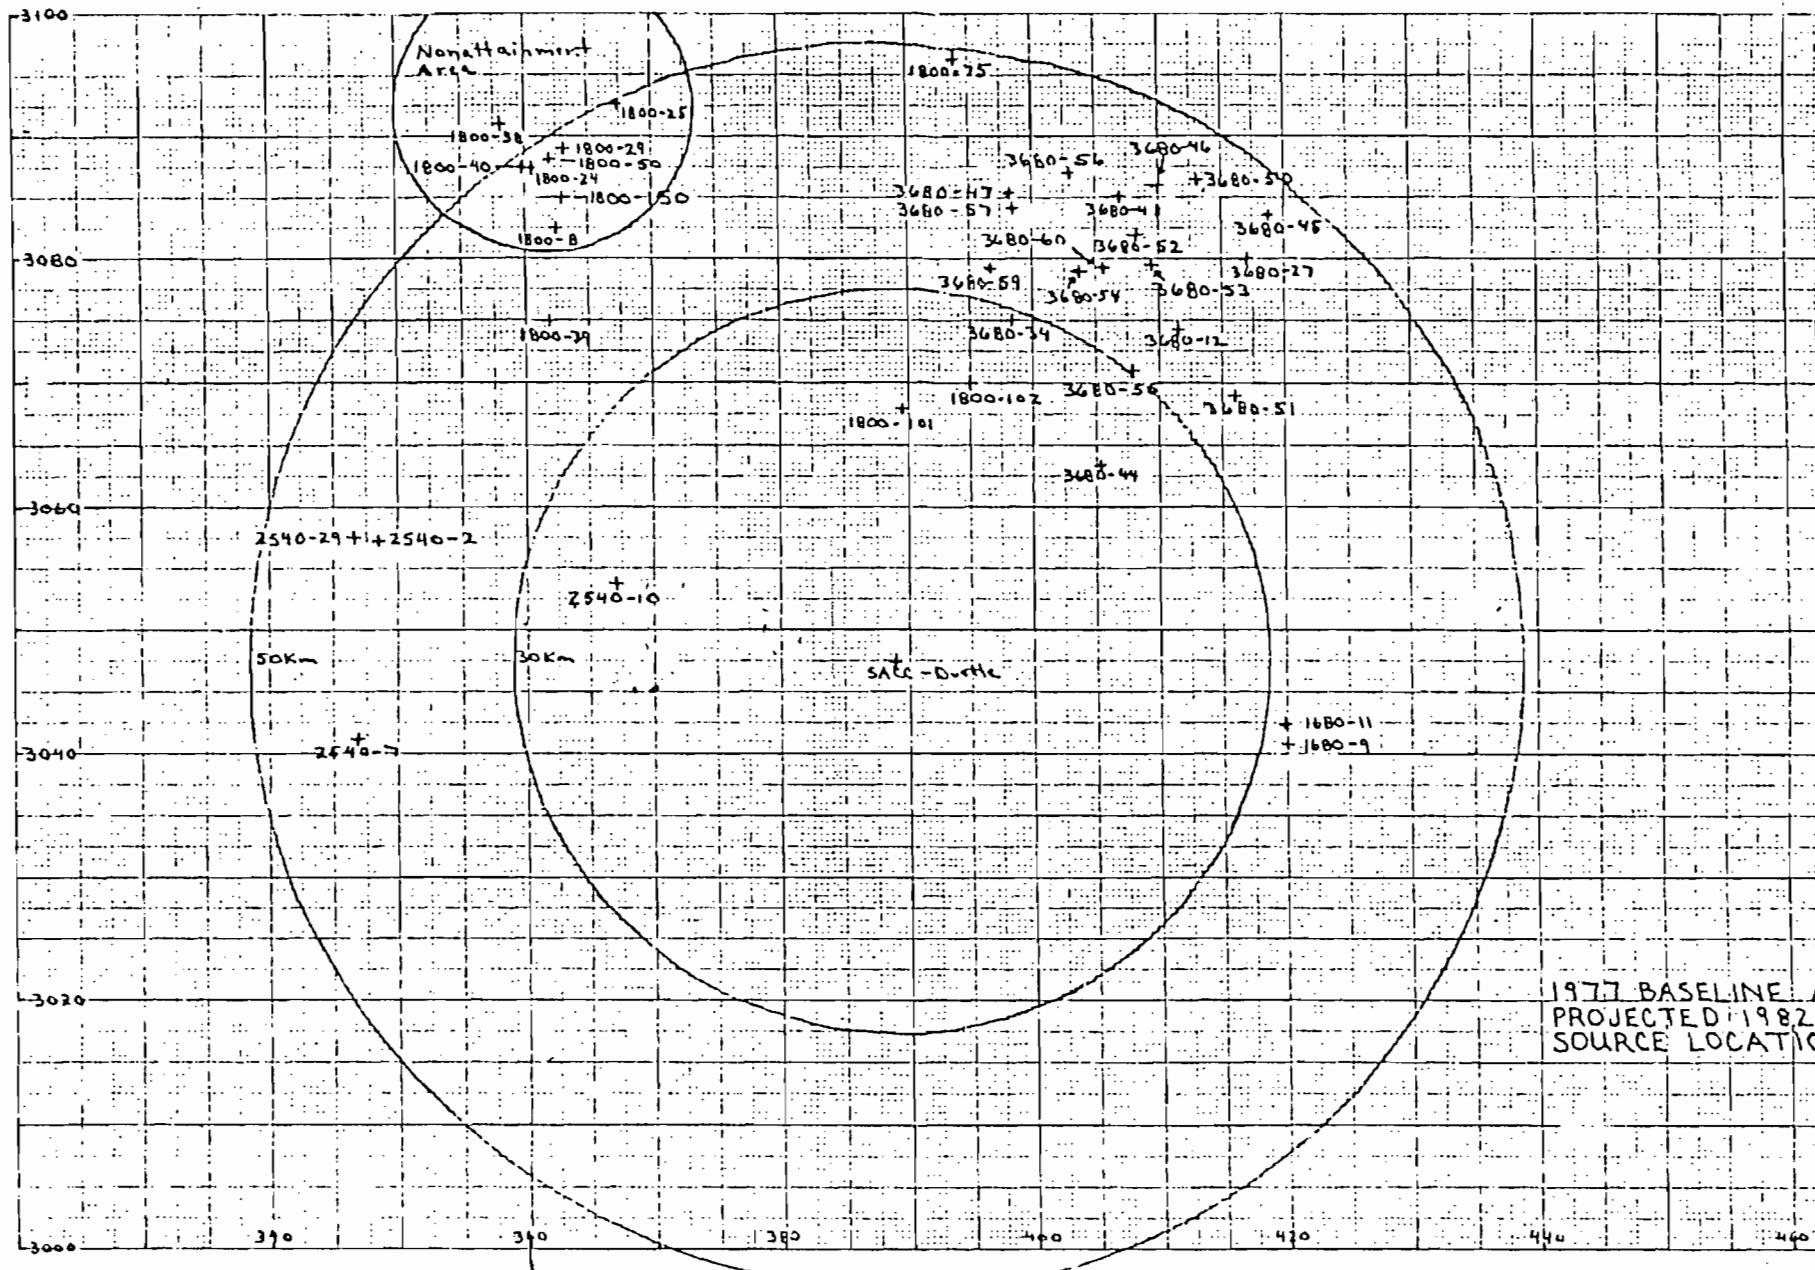

SACC Duette Mine
1977 Baseline and Projected 1982
Emissions Inventories

NEDS No. County - Plant	Source Name	Total Baseline 1977 Emissions (TPY)	Total Projected 1982 Emissions (TPY)
1800-8	Gardenier	450	582
1800-24	IMC - Port Sutton	150	150
1800-29	Nitram	55	148
1800-38	TECO - Hookers Point	255	1229
1800-39	TECO - Big Bend	2087	5393
1800-40	TECO - Gannon	1567	5683
1800-50	Chloride	-	77
1800-75	Borden - Plant City	109	109
1800-101	Brewster	102	129
1800-102	Borden - Big Four	-	265
1800-150	S.I. Lime	-	40
3680-12	Swift	97	97
3680-27	IMC - Noralyn	246	246
3680-34	IMC - Kingsford	110	110
3680-44	Gardinier - Ft. Meade	99	99
3680-45	Orange Co. of Florida	93	108
3680-46	W.R. Grace	370	435
3680-47	Mobil	281	272
3680-48	Royster	114	114
3680-50	U.S.S. Agrichem	19	201
3680-51	U.S.S. Agrichem	124	126
3680-52	C F	649	924
3680-53	Farmland	752	838

SACC Duette Mine
 1977 Baseline and Projected 1982
 Emissions Inventories
 (continued)

NEDS No. County - Plant	Source Name	Total Baseline 1977 Emissions (TPY)	Total Projected 1982 Emissions (TPY)
3680-54	Agrico - Pierce	214	214
3680-55	Agrico - S. Pierce	214	452
3680-56	IMC - Prairie	29	97
3680-57	Conserve Chem	350	1180
3680-59	IMC - New Wales	284	1964
3680-60	Electrophos	163	208
2540-2	Borden - Piney Point	94	122
2540-7	Tropicana	110	128
2540-10	FP&L - Willow Creek	4830	6880
2540-29	Manatee Energy	-	29
1680-9	City of Wauchula	70	70
1680-11	American Orange	-	54

CCI

CONSERVATION CONSULTANTS, INC.

POST OFFICE BOX 35 • PALMETTO, FLORIDA 33561

TELEPHONE 813-722-6668

Consultants in Environmental Biology and Engineering



June 4, 1979

Mr. Lewis H. Nagler
U.S. ENVIRONMENTAL PROTECTION AGENCY
Region IV
345 Courtland, N.E.
Atlanta, Georgia 30308

RE: SACC (Swift) Duette Mine EIS.

Dear Mr. Nagler:

Enclosed is a diagram and list of sources that Conservation Consultants, Inc. has determined to consume PSD increment for the referenced project. The chart is marked with 30 km and 50 km rings and the non-attainment area is also designated. We propose to use the above sources to model 24-hour and annual suspended particulate increment consumption within the next few days and would appreciate knowledge of any comment or questions you may have before proceeding.

Very truly yours,

Byron E. Nelson
Group Leader
Air Quality Section


/mc

Enclosures

cc: J. E. Davis, Swift
R. L. Rhodes, Esq., Holland & Knight
J. F. Schatzmeyer, Ph.D., P.E., CCI ✓
H. C. Robertson, CCI
A. Zimmer, EPA-Region IV

Reference No. 0200-013

47 1242

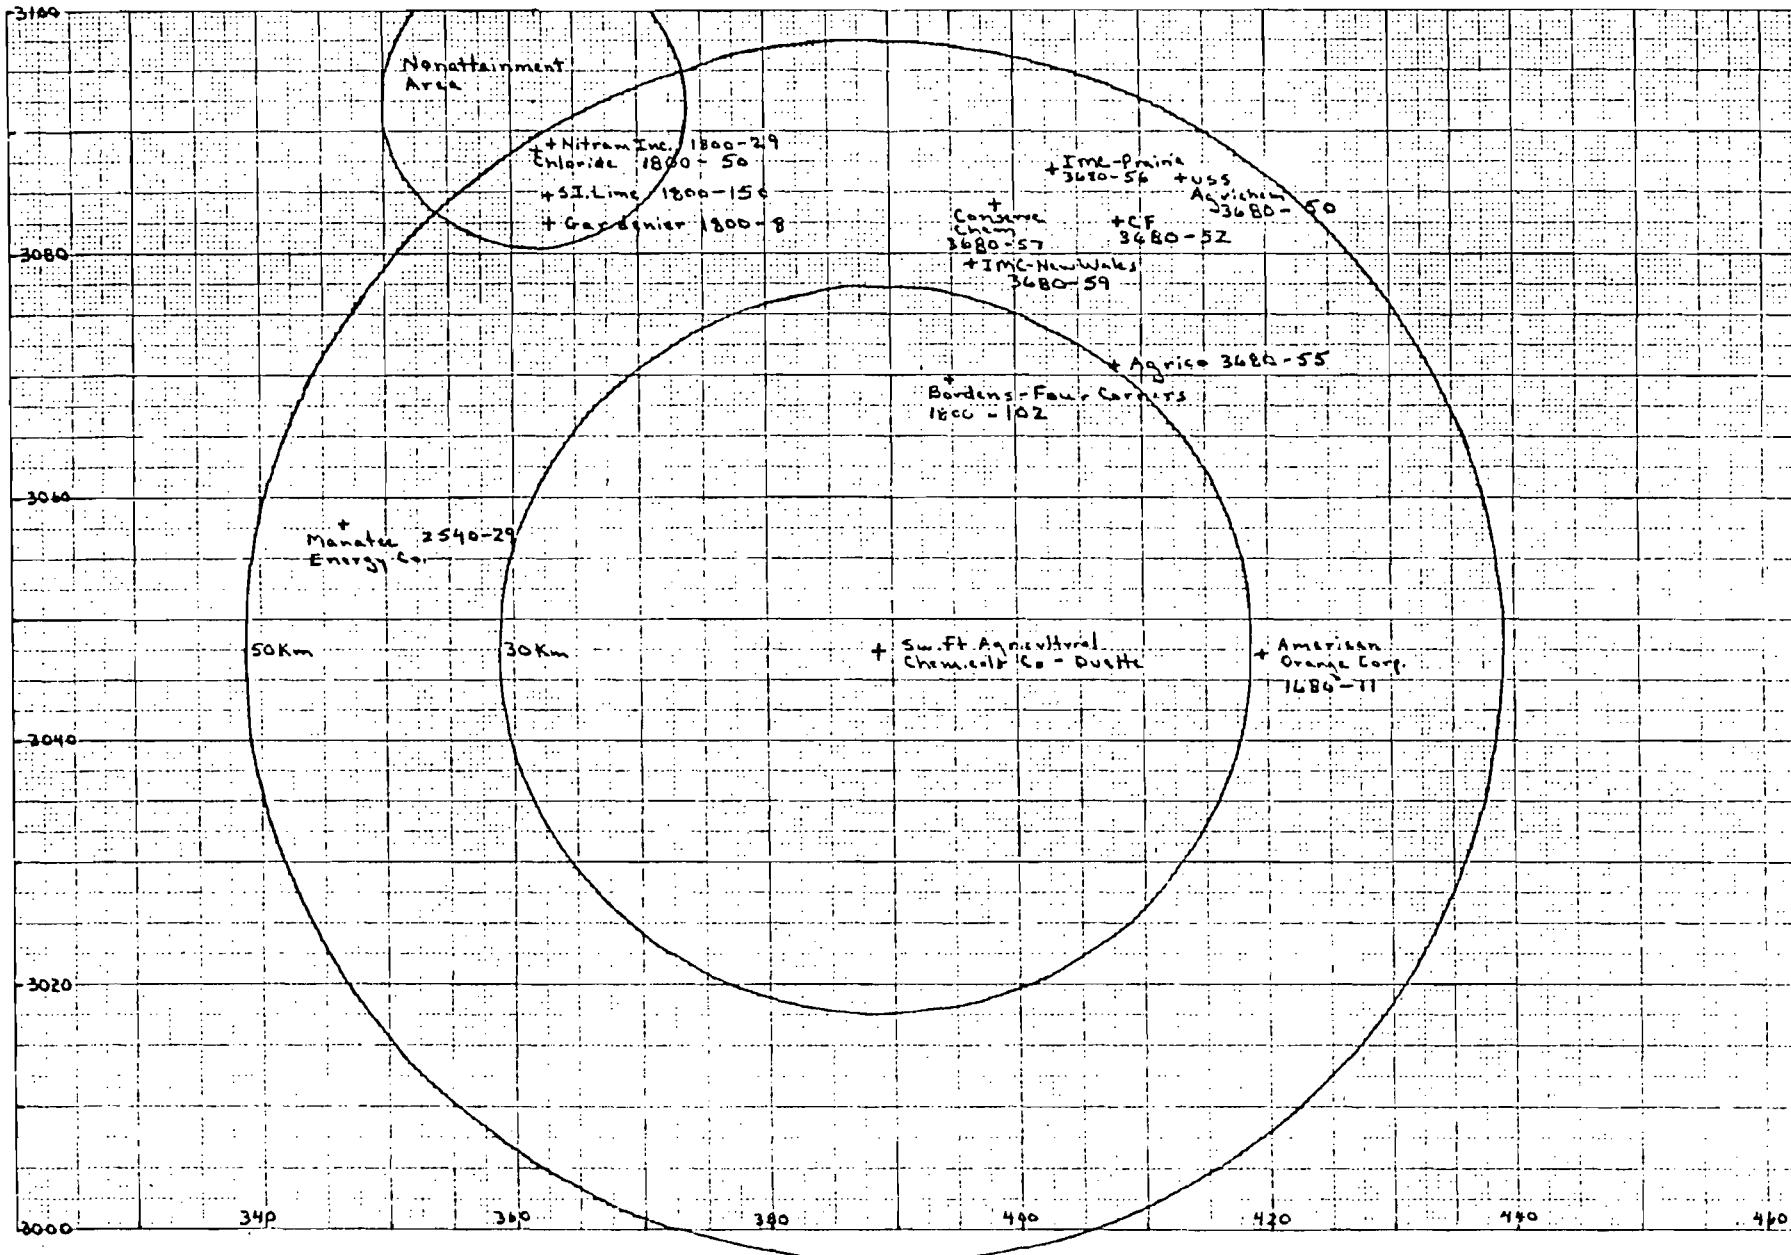

SACC INTERACTIVE SOURCE LIST

NEDS No.	Source Name	UTM Coordinates		Ht. (ft)	Diam. (ft)	Temp. °F	Flowrate (ACFM)	Allowed Particulates (lb/hr)	Operational Hours		
		Hours Day	Days Week	Weeks Year							
1800-102-1	Borden - Rock Dryer	394.7	3069.6	100	4.0	210	90,000	42.32	24	5	52
1800-102-2	Borden - Dry Rock Storage	394.7	3069.6	27	3.1	75	18,000	42.32	17.3	5	52
1800-102-3	Borden - Dry Rock Shipping	394.7	3069.6	26.5	1.1	70	18,000	50.44	5.8	5	52
1800-50-1	S.I. Lime - Bulk Terminal	362.9	3084.7	60	2.0	95	1,000	31.83	8	6	52
1800-8-44	Gardinier - Ammonia Phosphate Plant	362.9	3082.5	80	3.0	130	20,000	16.2	22	7	52
1800-8-45	Gardinier - Vessel Loading Facility	363.2	3082.3	3	2.3	72	16,000	40.0	24	1.5	52
1800-50-5	Chloride - Lead Oxide Transfer System	361.8	3088.3	40	1.5	125	5,500	12.88	24	5	50
1800-50-6	Chloride - Lead Oxide Kettle	361.8	3088.3	40	1.5	125	5,438	12.88	24	5	50
1800-29-6	Nitram, Inc. - Prill Tower No. 2	363.1	3089.0	200	22.6	90	150,000	27.28	16	7	50
3680-56-5	IMC Prairie - No. 4 Raymond	403.0	3087.0	65	2.0	140	6,300	19.2	24	5	52
3680-57-4	Conserv Chem. - Granulator	398.4	3084.2	211	3.2	180	35,000	30.98	24	7	52
3680-57-4	Conserv Chem. - Dryer	398.4	3084.2	201	3.52	140	44,000	31.41	24	7	52
3680-57-4	Conserv. Chem. - Sizing	398.4	3084.2	172	2.5	150	16,000	31.35	24	7	52
3680-52-15	C.F. - Phosphate Rock Unloader to Silos	408.2	3082.9	45.3	4.5	77	37,000	41.89	24	7	52
3680-55-23	Agrico - GTSP Production	407.9	3071.0	140	9.0	107	156,000	49.6	22	7	52

SACC INTERACTIVE SOURCE LIST (Continued)

NEDS No.	Source Name	UTM Coordinates		Ht. (ft)	Diam. (ft)	Temp. °F	Flowrate (ACFM)	Allowed Particulates (lb/hr)	Operational Hours		
		Hours Day	Days Week	Weeks Year							
3680-59-24	New Wales - Bag Collector AFI Shipping	396.7	3079.4	120	8.0	125	110,000	40.41	24	7	48
3680-59-25	New Wales - Limestone Storage	396.7	3079.4	50	1.0	80	4,000	33.33	24	7	48
3680-59-26	New Wales - Silica Storage	396.7	3079.4	18	1.0	77	1,500	14.99	24	7	52
3680-59-27	New Wales - Granulator Plant for AFI	396.7	3079.4	172	8.0	120	130,000	36.8	24	7	48
3680-59-28	New Wales - AFI Silos	396.7	3079.4	116	1.0	77	1,600	36.2	24	7	52
3680-59-29	New Wales - Railroad & Truck Shipping	396.7	3079.4	40	3.0	80	12,000	41.88	24	7	50
3680-59-30	New Wales - Soda Ash Unloading	396.7	3079.4	61	.66	77	1,500	16.76	8	7	50
3680-59-31	New Wales - Soda Ash Conveying	396.7	3079.4	45	1.0	77	1,500	15.00	8	7	50
3680-59-32	New Wales - A Kiln Cooler	396.7	3079.4	87	1.5	325	30,000	15.00	24	5	50
3680-59-33	New Wales - B Kiln Cooler	396.7	3079.4	87	1.5	325	30,000	15.00	24	7	50
3680-59-34	New Wales - Multifos Sizing	396.7	3079.4	17	1.25	225	10,000	23.00	24	7	50
3680-59-35	New Wales - Multifos Class. System	396.7	3079.4	57	1.25	175	6,000	18.44	24	7	50
3680-59-36	New Wales - Dryer & 2 Kilns	396.7	3079.4	172	4.5	100	43,000	18.41	24	7	50
3680-59-37	New Wales - DAP/MAP Loadout	396.7	3079.4	N/A	N/A	80	18,500	38.6	24	7	52
3680-59-38	New Wales - AFI Storage and Loading	396.7	3079.4	65	1.0	85	8,000	40.35	24	7	52

SACC INTERACTIVE SOURCE LIST (Continued)

NEDS No.	Source Name	UTM Coordinates		Ht. (ft)	Diam. (ft)	Temp. °F	Flowrate (ACFM)	Allowed Particulates (lb/hr)	Operational		Hours
		Day	Week						Day	Weeks	Year
3680-50-38	USS Agri-Chem. - DAP Facility	413.2	3086.3	133	7.0	90	110,000	34.35	24	7	52
3680-50-39	USS Agri-Chem. - DAP/MAP Storage & Loading	413.2	3086.3	74	2.0	80	30,000	43.12	4	7	52
2540-29-1	Manatee Energy - Splitter Boiler	346.6	3057.7	64	2.0	550	5,000	1.25	24	7	50
2540-29-1	Manatee Energy - Splitter Furnace	346.6	3057.7	100	3.0	550	9,100	5.75	24	7	50
1680-11-1	American Orange - Citrus Peel Dehydrator	419.8	3047.3	34.5	10.0	185	27,000	10.12	24	6	28
1680-11-2	American Orange - Citrus Pulp Dehydrator	419.8	3047.3	35.5	13.3	185	45,000	16.52	24	6	28

TSP MODELING DATA

METEOROLOGY INPUT

1620. 1943. 1863. 1863. 1863. 1941. 1943. 1917. 1839. 1824. 1917. 1910.
 533. 533. 533. 533. 533. 575. 733. 892. 1050. 1207. 1367. 1526.

| MAX HOURS | | | | MAX 24-HOUR | | | | |
|-----------|-------|---------------|-----------|--------------|------|---------------|-----------|--------------|
| DAY | RATIO | CONCENTRATION | DIRECTION | DISTANCE(KM) | HOUR | CONCENTRATION | DIRECTION | DISTANCE(KM) |
| 126 | 7.351 | 3.295955E-05 | 2 | 2.50 | 11 | 3.924530E-06 | 34 | 0.70 |

JYR = 70 TYP = 5 JDAY = 137.

1STAB = .5 .7 .6 .5 .5 .4 .3 .3 .3 .2 .2 .2 .3 .3 .4 .4 .4 .5 .6 .5 .6 .2 .1 .2 .6 .2 .6
 AWS = 1.0 1.0 2.6 2.1 2.6 2.6 2.6 4.5 5.1 4.1 4.1 3.6 3.6 5.7 4.1 6.7 6.2 5.1 4.6 3.1 2.6 2.1 2.6 2.6
 TEMP = 294. 293. 291. 293. 293. 293. 294. 297. 299. 300. 301. 302. 303. 304. 304. 303. 301. 300. 299. 297. 295. 295. 296. 295.
 AFV = 180. 180. 270. 270. 300. 300. 220. 340. 340. 310. 310. 10. 70. 80. 80. 80. 100. 130. 120. 130. 110. 90. 110. 160.
 AFVR = 195. 179. 270. 271. 296. 305. 291. 339. 337. 310. 311. 12. 74. 79. 83. 85. 98. 134. 120. 127. 115. 94. 107. 161.
 HLH1 = 1813. 1796. 1790. 1783. 1776. 57. 254. 471. 678. 936. 1093. 1300.
 1530. 1715. 1715. 1715. 1715. 1715. 1715. 1743. 1776. 1809. 1841. 1873.
 HLH2 = 221. 221. 221. 221. 221. 270. 451. 531. 812. 993. 1173. 1354.
 1534. 1715. 1715. 1715. 1715. 1715. 1715. 1439. 1119. 798. 479. 157.

MAX HOURLY MAX 24-HOUR

| DAY | RATIO | CONCENTRATION | DIRECTION | DISTANCE(KM) | HOUR | CONCENTRATION | DIRECTION | DISTANCE(KM) |
|-----|-------|---------------|-----------|--------------|------|---------------|-----------|--------------|
| 137 | 8.695 | 2.305693E-05 | 1 | 0.50 | 12 | 2.651780E-06 | 8 | 0.50 |

JYR=70 T40= 5 JD1Y=139.

1STAB = 6 6 7 7 6 5 4 4 3 4 3 3 3 3 4 4 4 4 4 4 4 4 4 4 4 4
 AWS = 2.5 1.0 1.0 1.0 2.1 2.5 3.1 3.6 2.6 6.2 5.1 5.7 5.7 5.7 6.2 6.7 6.7 7.7 6.2 5.7 6.2 5.1 4.1
 TEMP = 295. 294. 293. 293. 293. 295. 295. 295. 300. 303. 304. 305. 305. 305. 304. 304. 304. 303. 302. 300. 299. 298. 298.
 AFV1 = 170. 170. 170. 170. 240. 240. 250. 270. 290. 280. 270. 270. 280. 290. 290. 280. 270. 270. 270. 270. 270. 280
 AFV2 = 166. 173. 174. 172. 237. 276. 253. 268. 293. 295. 271. 271. 278. 292. 295. 285. 274. 277. 271. 273. 271. 266. 284
 HLHL = 1926. 1938. 1971. 2003. 2036. 79. 360. 642. 923. 1204. 1485. 1767.
 2048. 2329. 2329. 2329. 2329. 2329. 2300. 2257. 2211. 2199. 2165.
 HLH2 = 157. 157. 157. 157. 231. 673. 755. 1019. 1299. 1542. 1804.
 2057. 2329. 2329. 2329. 2329. 2329. 2300. 2257. 2211. 2199. 2165.

| MAX HOURS | | | | | MAX 24-HOUR | | | | |
|-----------|-------|---------------|-----------|--------------|-------------|---------------|-----------|--------------|--|
| DAY | RATIO | CONCENTRATION | DIRECTION | DISTANCE(KM) | HOUR | CONCENTRATION | DIRECTION | DISTANCE(KM) | |
| 138 | 4.175 | 2.164138E-05 | 29 | 0.50 | 9 | 5.183150E-06 | 27 | 0.90 | |

JYR=70 IYD= 5 JDAY=139.

ISTAR= 4 5 5 5 6 5 4 4 4 4 4 3 3 3 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 5 4
 AWS= 3.6 2.1 3.1 3.1 3.1 3.1 4.1 5.1 6.2 6.2 6.2 6.2 4.1 5.1 5.1 6.7 5.1 6.2 7.7 6.2 4.6 4.6 4.6 4.6 4.1 3.6
 TEMP= 297. 296. 295. 295. 295. 294. 295. 296. 299. 301. 303. 303. 304. 303. 304. 302. 301. 301. 299. 297. 297. 296. 295. 295.
 AFV= 270. 250. 260. 250. 260. 250. 250. 270. 290. 290. 270. 290. 300. 300. 260. 230. 240. 250. 260. 270. 250. 250. 260. 250. 260.
 AFVR= 269. 249. 264. 261. 250. 252. 253. 272. 286. 292. 275. 277. 298. 261. 228. 244. 248. 262. 275. 250. 252. 265. 248. 265.
 HLH1= 2123. 2098. 2046. 2031. 1997. 59. 263. 468. 672. 874. 1090. 1285.
 1489. 1693. 1693. 1693. 1693. 1693. 1714. 1760. 1765. 1791. 1816.
 HLH2= 2132. 1100. 1100. 1100. 1100. 1121. 1192. 1264. 1335. 1407. 1478. 1550.
 1621. 1693. 1693. 1693. 1693. 1693. 1714. 1740. 1765. 1732. 1816.

| MAX HOURLY | | | | MAX 24-HOUR | | |
|------------|--------------|------|---------------|-------------|--------------|--|
| SECTION | DISTANCE(KM) | HOUR | CONCENTRATION | DIRECTION | DISTANCE(KM) | |
| 30 | 0.70 | 13 | 2.725019E-06 | 25 | 1.50 | |

JYR=70 JMO= 5 JDAY=140.

547 4.316 3.466645E-05 29 0.50 14 8.031850E-06 29 0.50

JYR=72 IMO= 4 JDAY=120.

MAX HOURS

MAX 24-HOUR

DAY RATIO CONCENTRATION DIRECTION DISTANCE(KM) HOUR CONCENTRATION DIRECTION DISTANCE(KM)
120 8.326 3.843507E-05 30 0.50 16 4.616290E-06 30 0.50

JYR=72 MU= 4 JDAY=121.

```

;STAB= 4   4   4   4   4   4   6   6   4   3   4   4   4   4   4   4   4   4   4   4   4   4   4   4   4   4   4   4   4   4   4   4   4
AWS=  3.6  4.1  4.6  5.1  5.7  5.1  3.1  5.7  5.7  6.2  7.2  7.7  5.7  4.1  5.1  5.1  6.7  7.2  4.1  4.6  4.6  4.1  4.1  4.1
TEMP= 293. 293. 293. 293. 293. 292. 293. 294. 295. 297. 298. 300. 300. 300. 300. 300. 299. 298. 296. 295. 294. 293.
AFV=  260. 270. 260. 270. 280. 280. 270. 280. 290. 310. 280. 280. 310. 270. 280. 240. 280. 280. 300. 280. 260. 280. 260.
AFV=  260. 272. 264. 275. 281. 285. 266. 281. 294. 312. 281. 270. 313. 272. 282. 240. 276. 281. 281. 300. 278. 260. 277. 260.
HLH1= 1739. 1744. 1748. 1753. 1758. 1763. 1768. 1772. 1777. 1782. 1787. 1791.
1796. 1801. 1801. 1801. 1801. 1801. 1817. 1833. 1849. 1865. 1880.
HLH2= 1739. 1744. 1748. 1753. 1758. 1763. 1768. 1772. 1777. 1782. 1787. 1791.
1796. 1801. 1801. 1801. 1801. 1796. 1495. 1195. 894. 584. 293.

```

X A X H O U R L

M A X 2 4 - H C U R

DAY RATIO CONCENTRATION DIRECTION DISTANCE(KM) HOUR CONCENTRATION DIRECTION DISTANCE(KM)
121 4.419 4.232618E-05 27 0.30 14 9.578252E-06 28 0.80

JYR=72 IMU= 5 JDAY=122.

1843. 2102. 2102. 2102. 2102. 2102. 2094. 2086. 2078. 2071. 2063.
 293. 293. 293. 293. 316. 539. 763. 986. 1209. 1432. 1656.
 1379. 2102. 2102. 2102. 2102. 2102. 1763. 1427. 1091. 755. 419.

MAX HOURS

M A X 24 - H O U R

DAY RATIO CONCENTRATION DIRECTION DISTANCE (KM) HOUR CONCENTRATION DIRECTION DISTANCE (KM)

JYR=72 IMU= 5 JDAY=123

JYR=72 IMO= 6 JDAY=173.

ISTAB= 5 4
 AWS= 5.1 6.2 6.2 6.7 7.2 7.2 6.7 7.7 8.2 7.2 8.7 8.2 8.2 8.2 7.7 7.2 7.2 7.2 7.2 5.1 5.1 5.1 4.1 5.1 6.7
 TEMP= 299. 299. 299. 299. 299. 300. 300. 301. 301. 301. 302. 302. 303. 303. 303. 303. 303. 302. 302. 301. 301. 300. 300. 300. 300.
 AFV= 70. 60. 80. 70. 90. 80. 80. 90. 80. 80. 90. 90. 90. 90. 90. 90. 90. 90. 90. 90. 90. 90. 90. 90.
 AFVR= 67. 62. 85. 71. 88. 84. 83. 94. 83. 79. 93. 90. 93. 91. 95. 94. 90. 87. 93. 87. 89. 92. 94. 88.
 HLH1= 900. 948. 916. 885. 853. 822. 790. 758. 727. 695. 664. 632.
 601. 569. 569. 569. 569. 569. 592. 630. 669. 708. 746.
 HLH2= 1174. 948. 916. 885. 853. 822. 790. 758. 727. 695. 664. 632.
 601. 569. 569. 569. 569. 569. 592. 630. 669. 708. 746.

MAX HOURLY

MAX 24-HOUR

| DAY | RATIO | CONCENTRATION | DIRECTION | DISTANCE(KM) | HOUR | CONCENTRATION | DIRECTION | DISTANCE(KM) |
|-----|-------|---------------|-----------|--------------|------|---------------|-----------|--------------|
| 173 | 1.767 | 2.889287E-05 | 9 | 0.80 | 17 | 1.635223E-05 | 9 | 0.80 |

JYR=72 IMO= 6 JDAY=174.

ISTAB= 4
 AWS= 5.7 5.1 6.2 6.2 6.2 6.2 4.6 5.1 6.2 6.2 6.7 6.7 7.2 7.2 7.2 7.2 8.2 7.7 7.2 7.7 6.7 5.7 6.2 5.1 5.1 5.1
 TEMP= 300. 300. 300. 300. 300. 300. 300. 301. 301. 301. 302. 302. 303. 303. 303. 303. 303. 302. 302. 301. 300. 300. 300. 300.
 AFV= 80. 80. 90. 90. 90. 90. 90. 90. 90. 90. 100. 100. 100. 100. 100. 100. 90. 100. 90. 90. 90. 90. 90. 90. 80. 80.
 AFVR= 85. 82. 87. 93. 90. 88. 92. 95. 87. 92. 102. 99. 104. 100. 88. 103. 92. 91. 94. 93. 88. 91. 81. 78.
 HLH1= 785. 823. 862. 901. 939. 978. 1017. 1055. 1094. 1132. 1171. 1210.
 1248. 1287. 1287. 1287. 1287. 1287. 1292. 1300. 1308. 1316. 1324.
 HLH2= 785. 823. 862. 901. 939. 978. 1017. 1055. 1094. 1132. 1171. 1210.
 1248. 1287. 1287. 1287. 1287. 1287. 1292. 1300. 1308. 1316. 1324.

MAX HOURLY

MAX 24-HOUR

| DAY | RATIO | CONCENTRATION | DIRECTION | DISTANCE(KM) | HOUR | CONCENTRATION | DIRECTION | DISTANCE(KM) |
|-----|-------|---------------|-----------|--------------|------|---------------|-----------|--------------|
| 174 | 2.311 | 3.614677E-05 | 10 | 0.50 | 14 | 1.564334E-05 | 9 | 0.80 |

JYR=72 IMO= 6 JDAY=175.

ISTAB= 4 4 4 4 4 4 4 4 4 4 4 4 3 3 3 3 4 4 4 4 4 4 5 5 5 4 4
 AWS= 5.1 5.7 7.2 7.7 7.2 5.7 7.2 7.7 4.1 3.1 7.7 6.7 6.2 6.2 6.2 5.7 5.1 4.6 4.1 4.1 5.1 5.1 5.1 6.2
 TEMP= 300. 300. 300. 300. 300. 300. 300. 299. 300. 300. 301. 301. 302. 302. 303. 303. 303. 303. 302. 302. 301. 300. 300. 300.
 AFV= 90. 90. 90. 90. 90. 90. 100. 90. 90. 110. 90. 100. 100. 90. 90. 90. 100. 90. 90. 90. 90. 80. 80. 90. 90.
 AFVR= 94. 88. 92. 91. 93. 87. 105. 92. 106. 94. 98. 96. 87. 94. 89. 96. 88. 89. 86. 79. 81. 88. 76. 93.
 HLH1= 1332. 1340. 1348. 1356. 1364. 1372. 1380. 1388. 1396. 1404. 1412. 1420.
 1428. 1436. 1436. 1436. 1436. 1436. 1421. 1396. 1370. 1345. 1319.
 HLH2= 1332. 1340. 1348. 1356. 1364. 1372. 1380. 1388. 1396. 1404. 1412. 1420.
 1428. 1436. 1436. 1436. 1436. 1436. 1427. 1413. 1398. 1345. 1319.

MAX HOURLY

MAX 24-HOUR

| DAY | RATIO | CONCENTRATION | DIRECTION | DISTANCE(KM) | HOUR | CONCENTRATION | DIRECTION | DISTANCE(KM) |
|-----|-------|---------------|-----------|--------------|------|---------------|-----------|--------------|
| 175 | 2.069 | 3.300743E-05 | 9 | 0.50 | 13 | 1.595398E-05 | 9 | 0.50 |

JYR=72 IMO= 6 JDAY=176.

ISTAB= 4 4 4 4 4 4 4 4 4 4 4 4 3 3 3 3 4 4 4 4 4 5 6 6 6 5
 AWS= 5.7 4.6 5.1 6.2 6.2 6.7 5.1 5.1 5.7 5.1 5.7 5.7 5.7 5.7 7.2 6.7 7.2 5.1 3.1 5.1 3.1 2.1 2.1 3.1 4.1
 TEMP= 300. 300. 300. 300. 300. 299. 300. 300. 301. 301. 302. 302. 303. 303. 303. 303. 302. 299. 298. 299. 299. 299. 299.
 AFV= 93. 70. 80. 70. 90. 90. 90. 90. 100. 90. 100. 100. 100. 100. 100. 100. 90. 90. 90. 80. 90. 60. 80. 90. 60. 50. 50.
 AFVR= 93. 68. 77. 69. 87. 86. 89. 86. 100. 94. 96. 96. 104. 89. 86. 86. 58. 82. 86. 89. 65. 52. 51. 52.
 HLH1= 1294. 1263. 1243. 1217. 1192. 1166. 1141. 1115. 1090. 1064. 1039. 1013.
 988. 962. 962. 962. 962. 962. 952. 971. 988. 1004. 1020. 1037.
 HLH2= 1294. 1263. 1243. 1217. 1192. 1166. 1141. 1115. 1090. 1064. 1039. 1013.
 988. 962. 962. 962. 962. 962. 1024. 1130. 1237. 1343. 1450.

MAX HOURLY

MAX 24-HOUR

| DAY | RATIO | CONCENTRATION | DIRECTION | DISTANCE(KM) | HOUR | CONCENTRATION | DIRECTION | DISTANCE(KM) |
|-----|-------|---------------|-----------|--------------|------|---------------|-----------|--------------|
| 176 | 3.095 | 3.531094E-05 | 9 | 0.50 | 14 | 1.140874E-05 | 9 | 0.50 |

4FVR= 312. 321. 320. 334. 325. 332. 337. 342. 38. 4. 58. 133. 27. 87. 139. 9. 144. 126. 292. 127. 100. 173. 218. 693.
HLH1= 1310. 1277. 1243. 1209. 1175. 1141. 1107. 1073. 1039. 1005. 971. 937.
903. 869. 869. 869. 869. 867. 833. 799. 755. 731. 697. 663.
HLH2= 1310. 1277. 1243. 1209. 1175. 1141. 1107. 1073. 1039. 1005. 971. 937.
903. 869. 869. 869. 869. 866. 815. 763. 711. 659. 608. 556.

| MAX HOURLY | | | | | | MAX 24-HOUR | | |
|------------|--------|---------------|-----------|---------------|------|---------------|-----------|---------------|
| DAY | RATIO | CONCENTRATION | DIRECTION | DISTANCE (KM) | HOUR | CONCENTRATION | DIRECTION | DISTANCE (KM) |
| 22 | 11.530 | 3.49364E-05 | 13 | 0.50 | 17 | 3.02307E-06 | 32 | 0.50 |

JYR = 73 JAO = 1 JDAY = 23.

1STABE = 4 5 5 6 4
 145= 3.0 2.6 3.1 3.6 3.6 3.1 6.7 5.1 4.1 6.2 5.1 5.1 6.2 3.6 2.1 2.6 3.1 3.1 2.6 3.1 3.6 4.1 3.6 2.6
 TEMP= 289.
 AFV= 200. 230. 240. 250. 230. 230. 240. 250. 220. 240. 210. 230. 210. 240. 290. 240. 230. 260. 190. 200. 280. 210. 210. 270.
 AFVR= 200. 227. 240. 250. 229. 241. 249. 217. 245. 209. 226. 214. 240. 289. 240. 233. 262. 195. 204. 201. 277. 207. 207. 270.
 HLH1= 629. 595. 561. 527. 493. 459. 425. 391. 357. 323. 297. 255.
 221. 187.
 HLHZ= 629. 556. 556. 556. 527. 493. 459. 425. 391. 357. 323. 289. 255.

MAX HOURLY

| DAY | RATIO | CONCENTRATION | DIRECTION | DISTANCE(KM) | HOUR | CONCENTRATION | DIRECTION | DISTANCE(KM) |
|-----|-------|----------------------------|-----------|--------------|------|----------------------------|-----------|--------------|
| 23 | 6.892 | 4.121 \times 10 $^{-15}$ | 27 | 2.70 | 24 | 4.550 \times 10 $^{-16}$ | 26 | 2.70 |

MAX 24-HOUR

IXB-73 140-1-DAY-24-

1STHR= 4 4 4 4 4 4 4 4 4 4 4 3 4 4 4 4 4 4 4 4 5 4 5 6 5 5 6
 4S= 1.0 2.1 2.6 1.5 2.5 3.1 3.1 2.1 3.1 4.1 4.6 5.1 5.1 4.6 3.6 3.1 2.1 2.6 4.1 3.1 1.5 2.6 3.1 2.6
 TEMP= 289. 289. 289. 289. 289. 289. 289. 289. 290. 290. 294. 294. 294. 294. 296. 295. 294. 294. 292. 290. 299. 287. 286. 286.
 AFV= 270. 250. 200. 260. 210. 180. 210. 190. 200. 200. 210. 200. 200. 210. 220. 200. 180. 150. 160. 170. 180. 190. 190. 180.
 AEVR= 266. 249. 197. 254. 209. 182. 201. 193. 198. 204. 207. 198. 199. 207. 223. 198. 178. 152. 162. 172. 185. 195. 193. 179.
 HLHL= 401. 431. 462. 452. 523. 553. 594. 614. 645. 675. 706. 736.
 757. 797. 797. 797. 797. 796. 795. 794. 793. 792. 791.
 HLH2= 401. 431. 462. 492. 523. 553. 584. 614. 645. 675. 706. 736.
 757. 797. 797. 797. 797. 796. 795. 794. 793. 792. 791.

MAX-HOURLY MAX-24-HOUR

| DAY | RATIO | CONCENTRATION | DIRECTION | DISTANCE(KM) | HOUR | CONCENTRATION | DIRECTION | DISTANCE(KM) |
|-----|-------|---------------|-----------|--------------|------|---------------|-----------|--------------|
| 26 | 6.222 | 3.688E-05 | 18 | 1.72 | 17 | 3.882E-05 | 20 | 2.50 |

1YR=73 130:= 1 1DAY= 25

```

1STAB= 6   5   5   5   5   6   6   5   4   3   3   3   3   3   4   4   4   4   4   5   4   4   4   4   4   4
AWSE= 2.1  2.6  3.6  4.1  5.1  3.1  3.1  2.1  3.1  4.1  5.1  5.1  5.1  5.1  7.2  5.7  5.1  5.1  3.6  3.1  4.1  3.6  4.6  5.1  5.1
TEMP= 285.  285.  285.  284.  284.  284.  282.  282.  285.  286.  290.  291.  293.  294.  295.  295.  295.  293.  292.  291.  290.  290.  290.
AFV= 180.  190.  200.  220.  220.  240.  250.  250.  220.  250.  250.  250.  270.  280.  280.  270.  260.  250.  260.  260.  270.  270.  280.
AFVR= 180.  192.  204.  225.  221.  245.  246.  251.  224.  252.  251.  248.  273.  282.  292.  270.  256.  251.  261.  260.  258.  270.  257.  280.
HLH1= 700.  789.  788.  787.  786.  735.  104.  70.  104.  306.  423.  541.
                  659.  777.  777.  777.  777.  795.  813.  831.  848.  866.  884.
HLH2= 288.  288.  298.  288.  288.  288.  288.  288.  332.  406.  480.  555.  629.
                  303.  777.  777.  777.  777.  419.  613.  811.  919.  961.  995.

```

| MAX HOURLY | | | | | | | MAX 24-HOUR | | |
|------------|-------|---------------|-----------|--------------|------|---------------|-------------|--------------|--|
| DAY | RATIO | CONCENTRATION | DIRECTION | DISTANCE(KM) | HOUR | CONCENTRATION | DIRECTION | DISTANCE(KM) | |
| 25 | 5.801 | 3.382/326.25 | 25 | 1.55 | 10 | 5.801 | 25 | 1.55 | |

MAX = 73 [NO₂] & IDAY = 26

AFVR= 118. 125. 124. 128. 141. 140. 142. 154. 144. 113. 138. 161. 132. 130. 151. 111. 124. 123. 138. 145. 140. 140. 145. 243. 244.
HLHI= 869. 924. 979. 1034. 1090. 1145. 103. 315. 527. 739. 951. 1163.
1375. 1587. 1587. 1587. 1587. 1588. 1591. 1594. 1597. 1600. 1604.

HLH2= 869. 924. 1206. 1266. 1266. 1266. 1287. 1330. 1373. 1415. 1458. 1501.
1544. 1587. 1587. 1587. 1587. 1588. 1591. 946. 671. 395. 120.

MAX H O U R L Y

MAX 2 4 - H O U R

| DAY | RATIO | CONCENTRATION | DIRECTION | DISTANCE(KM) | HOUR | CONCENTRATION | DIRECTION | DISTANCE(KM) |
|-----|-------|---------------|-----------|--------------|------|---------------|-----------|--------------|
| 86 | 7.121 | 3.141249E-05 | 11 | 0.50 | 16 | 4.411521E-06 | 14 | 2.00 |

JYR=73 IM0= 3 JDAY= 87.

ISTAB= 6 7 6 5 6 5 4 3 4 4 3 3 3 3 4 3 4 4 4 5 4 4 4 4 4 4
AWS= 2.6 1.5 2.4 2.4 1.5 2.4 2.4 2.4 4.2 4.7 5.1 6.7 5.7 5.7 3.1 5.7 5.7 5.1 3.1 6.7 6.2 7.2 6.2 6.7
TEMP= 286. 286. 286. 286. 285. 286. 290. 293. 294. 296. 298. 298. 298. 299. 299. 299. 298. 297. 296. 295. 294. 293. 293.
AFV= 260. 300. 260. 160. 240. 260. 270. 240. 300. 270. 300. 310. 330. 330. 270. 260. 280. 290. 290. 280. 280. 310. 310.
AFVR= 260. 301. 265. 161. 240. 262. 271. 245. 301. 274. 296. 313. 334. 332. 272. 283. 278. 289. 295. 277. 283. 309. 306. 312.
HLHI= 1607. 1610. 1613. 1616. 1619. 1622. 111. 330. 550. 769. 989. 1208.
1428. 1647. 1647. 1647. 1647. 1637. 1604. 1572. 1539. 1507. 1475.
HLH2= 120. 120. 120. 120. 120. 223. 426. 630. 833. 1037. 1240.
1444. 1647. 1647. 1647. 1647. 1606. 1604. 1572. 1539. 1507. 1475.

MAX H O U R L Y

MAX 2 4 - H O U R

| DAY | RATIO | CONCENTRATION | DIRECTION | DISTANCE(KM) | HOUR | CONCENTRATION | DIRECTION | DISTANCE(KM) |
|-----|-------|---------------|-----------|--------------|------|---------------|-----------|--------------|
| 87 | 7.721 | 4.043883E-05 | 27 | 0.50 | 15 | 5.237709E-06 | 28 | 0.50 |

JYR=73 IM0= 3 JDAY= 88.

ISTAB= 4
AWS= 4.6 4.1 4.6 4.1 5.1 4.1 3.6 4.1 3.6 6.2 6.2 6.2 6.2 6.7 6.7 6.7 7.2 6.2 5.1 3.6 4.1 4.6 6.2 5.1 5.7
TEMP= 293. 293. 293. 292. 292. 291. 291. 292. 292. 292. 295. 294. 295. 295. 295. 297. 297. 298. 298. 298. 298. 297. 296. 296. 295.
AFV= 320. 310. 310. 310. 300. 300. 260. 270. 260. 290. 300. 310. 300. 310. 320. 320. 320. 320. 300. 310. 310. 320.
AFVR= 319. 314. 306. 307. 311. 299. 296. 257. 270. 261. 291. 294. 299. 306. 297. 308. 322. 317. 317. 319. 296. 315. 315. 321.
HLHI= 1442. 1410. 1378. 1345. 1313. 1280. 1248. 1216. 1183. 1151. 1118. 1086.
1053. 1021. 1021. 1021. 1021. 1030. 1059. 1089. 1118. 1147. 1177.
HLH2= 1442. 1410. 1378. 1345. 1313. 1280. 1248. 1216. 1183. 1151. 1118. 1086.
1053. 1021. 1021. 1021. 1021. 1030. 1059. 1069. 1118. 1147. 1177.

MAX H O U R L Y

MAX 2 4 - H O U R

| DAY | RATIO | CONCENTRATION | DIRECTION | DISTANCE(KM) | HOUR | CONCENTRATION | DIRECTION | DISTANCE(KM) |
|-----|-------|---------------|-----------|--------------|------|---------------|-----------|--------------|
| 88 | 3.918 | 3.623738E-05 | 32 | 0.50 | 20 | 9.249229E-06 | 32 | 0.50 |

JYR=73 IM0= 3 JDAY= 89.

ISTAB= 4 4 5 5 6 5 4 3 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4
AWS= 5.7 5.1 3.1 2.6 3.1 3.6 4.1 4.6 7.2 6.7 5.1 5.1 5.7 6.2 5.1 6.2 6.2 5.1 4.1 2.6 5.1 6.2 6.7 6.7
TEMP= 295. 294. 294. 293. 293. 293. 294. 296. 297. 299. 300. 301. 302. 302. 301. 301. 300. 298. 298. 298. 296. 296.
AFV= 330. 320. 320. 320. 290. 290. 300. 310. 330. 330. 340. 330. 310. 320. 330. 320. 310. 360. 20. 320. 300. 320. 310.
AFVR= 335. 319. 320. 321. 286. 295. 301. 299. 307. 330. 330. 342. 334. 309. 323. 335. 318. 314. 360. 17. 325. 304. 317. 311.
HLHI= 1206. 1235. 1264. 1294. 1323. 1352. 114. 325. 535. 745. 956. 1166.
1377. 1587. 1587. 1587. 1587. 1579. 1553. 1528. 1502. 1470. 1450.
HLH2= 1206. 1235. 444. 444. 444. 444. 526. 678. 829. 981. 1132. 1284.
1435. 1567.

MAX H O U R L Y

MAX 2 4 - H O U R

| DAY | RATIO | CONCENTRATION | DIRECTION | DISTANCE(KM) | HOUR | CONCENTRATION | DIRECTION | DISTANCE(KM) |
|-----|-------|---------------|-----------|--------------|------|---------------|-----------|--------------|
| 89 | 6.542 | 3.993542E-05 | 30 | 0.50 | 19 | 6.105276E-06 | 32 | 0.50 |

PTMTP-W INPUT/OUTPUT

Best Available Copy

All input data
 Input ref 24
 Add 1 row made in
 ref 24 and some extra
 receptors

DETERMINATION OF MAX PT FOR AAQS JYR72 JDAY175 ADJ THROUGH FP&L

0.

* * * S O U R C E S * * *

| NU | Q (G/SEC) | HP (MH) | TS (DEG-KL) | VS (M/SEC) | D (M) | VF (M**3/SEC) | R (KM) | S (KM) |
|-----|-----------|---------|-------------|------------|-------|---------------|---------|----------|
| 1. | 2.89 | 18.3 | 342.6 | 15.0 | 2.85 | 0.0 | 388.950 | 3047.280 |
| 2. | 1.10 | 38.1 | 311.5 | 30.0 | 1.02 | 0.0 | 388.720 | 3047.320 |
| 3. | 0.73 | 18.3 | 309.9 | 30.0 | 0.82 | 0.0 | 388.730 | 3047.180 |
| 4. | 0.01 | 12.2 | 505.4 | 7.6 | 0.31 | 0.0 | 389.180 | 3047.630 |
| 5. | 1.43 | 38.4 | 325.0 | 10.9 | 2.40 | 0.0 | 362.900 | 3082.500 |
| 6. | 2.04 | 24.4 | 328.0 | 14.3 | 0.90 | 0.0 | 362.900 | 3082.500 |
| 7. | 5.04 | 0.9 | 305.0 | 19.6 | 0.70 | 0.0 | 363.200 | 3082.300 |
| 8. | 2.85 | 19.8 | 349.0 | 11.3 | 2.40 | 0.0 | 360.100 | 3087.500 |
| 9. | 15.22 | 85.3 | 432.0 | 18.5 | 3.40 | 0.0 | 358.000 | 3091.000 |
| 10. | 10.36 | 85.3 | 443.0 | 7.4 | 3.70 | 0.0 | 358.000 | 3091.000 |
| 11. | 9.82 | 85.3 | 436.0 | 17.5 | 2.90 | 0.0 | 358.000 | 3091.000 |
| 12. | 103.37 | 149.3 | 422.0 | 28.7 | 7.30 | 0.0 | 361.900 | 3075.000 |
| 13. | 51.89 | 149.3 | 422.0 | 14.3 | 7.30 | 0.0 | 361.900 | 3075.000 |
| 14. | 18.05 | 93.3 | 421.0 | 24.8 | 3.00 | 0.0 | 360.000 | 3087.500 |
| 15. | 15.85 | 93.3 | 427.0 | 24.8 | 3.00 | 0.0 | 360.000 | 3087.500 |
| 16. | 20.17 | 93.3 | 403.0 | 27.5 | 3.20 | 0.0 | 360.000 | 3087.500 |
| 17. | 25.75 | 93.3 | 414.0 | 18.6 | 2.90 | 0.0 | 360.000 | 3087.500 |
| 18. | 28.81 | 93.3 | 415.0 | 21.1 | 4.40 | 0.0 | 360.000 | 3087.500 |
| 19. | 54.99 | 93.3 | 418.0 | 23.1 | 5.40 | 0.0 | 360.000 | 3087.500 |
| 20. | 3.25 | 12.2 | 325.0 | 15.7 | 0.50 | 0.0 | 361.800 | 3088.300 |
| 21. | 1.77 | 61.0 | 337.0 | 10.3 | 2.40 | 0.0 | 348.500 | 3057.300 |
| 22. | 2.64 | 29.0 | 333.0 | 20.0 | 0.90 | 0.0 | 346.800 | 3041.100 |
| 23. | 1.62 | 21.6 | 563.0 | 11.9 | 1.90 | 0.0 | 346.800 | 3041.100 |
| 24. | 99.04 | 152.1 | 425.0 | 20.7 | 7.90 | 0.0 | 367.100 | 3053.800 |
| 25. | 99.04 | 152.1 | 425.0 | 20.7 | 7.90 | 0.0 | 367.100 | 3053.800 |

* * * R E C E P T O R S * * *

| NO. | RREC(KM) | SREC(KM) | Z (M) |
|-------|----------|----------|--------|
| 1. | 389.000 | 3047.200 | 0.0 |
| 2. | 389.000 | 3047.100 | 0.0 |
| 3. | 389.100 | 3047.200 | 0.0 |
| 4. | 389.100 | 3047.100 | 0.0 |
| 5. | 389.200 | 3047.200 | 0.0 |
| 6. | 389.200 | 3047.100 | 0.0 |
| 7. | 389.300 | 3047.200 | 0.0 |
| 8. | 389.300 | 3047.100 | 0.0 |
| 9. | 389.300 | 3047.000 | 0.0 |
| 10. | 389.400 | 3047.100 | 0.0 |
| 11. | 389.400 | 3047.000 | 0.0 |
| 12. | 389.500 | 3047.100 | 0.0 |
| 13. | 389.500 | 3047.000 | 0.0 |
| 14. | 389.600 | 3047.100 | 0.0 |
| 15. | 389.600 | 3047.000 | 0.0 |
| 16. | 389.700 | 3047.100 | 0.0 |
| 17. | 389.700 | 3047.000 | 0.0 |
| 18. | 389.700 | 3046.900 | 0.0 |
| 19. | 389.800 | 3047.000 | 0.0 |
| 20. | 389.800 | 3046.900 | 0.0 |
| 21. | 389.900 | 3047.000 | 0.0 |
| 22. | 389.900 | 3046.900 | 0.0 |
| 23. | 390.000 | 3047.000 | 0.0 |
| X 24. | 390.000 | 3046.000 | 3248.0 |
| 25. | 390.100 | 3046.900 | 0.0 |
| 26. | 390.100 | 3046.800 | 0.0 |
| 27. | 390.200 | 3046.900 | 0.0 |

AVERAGE CONCENTRATIONS FOR 24 HOURS.

*** RECEPTOR NUMBER ***

| | 1. | 2. | 3. | 4. | 5. | 6. | 7. | 8. | 9. | 10. | 11. | 12. |
|---|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| SOURCE PARTIAL CONCENTRATIONS (G/M**3) | | | | | | | | | | | | |
| 1. | 1.229E-32 | 0.0 | 4.685E-10 | 2.334E-14 | 1.393E-07 | 7.082E-09 | 5.403E-07 | 2.772E-07 | 8.223E-09 | 1.198E-06 | 2.069E-07 | 2.428E-06 |
| 2. | 3.630F-07 | 1.408E-08 | 1.403E-06 | 3.122E-07 | 2.267E-06 | 1.135E-06 | 2.392E-06 | 2.605E-06 | 7.613E-07 | 3.669E-06 | 1.380E-06 | 3.926E-06 |
| 3. | 4.150E-07 | 1.178E-05 | 7.166E-07 | 1.057E-05 | 8.070E-07 | 6.585E-06 | 7.955E-07 | 4.066E-06 | 1.047E-05 | 2.793E-06 | 9.012E-06 | 2.164E-06 |
| 4. | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.388E-20 |
| 5. | 1.357E-26 | 1.001E-26 | 2.054E-26 | 1.485E-26 | 3.034E-26 | 2.197E-26 | 4.463E-26 | 3.237E-26 | 2.349E-26 | 4.758E-26 | 3.459E-26 | 6.969E-26 |
| 6. | 2.256E-26 | 1.628E-26 | 3.341E-26 | 2.415E-26 | 4.935E-26 | 3.574E-26 | 7.257E-26 | 5.264E-26 | 3.820E-26 | 7.738E-26 | 5.624E-26 | 1.133E-25 |
| 7. | 7.452E-26 | 5.357E-26 | 1.111E-25 | 8.001E-26 | 1.653E-25 | 1.192E-25 | 2.457E-25 | 1.768E-25 | 1.278E-25 | 2.616E-25 | 1.894E-25 | 3.858E-25 |
| 8. | 2.375E-28 | 1.745E-28 | 3.477E-28 | 2.559E-28 | 5.080E-28 | 3.743E-28 | 7.394E-28 | 5.456E-28 | 4.027E-28 | 7.937E-28 | 5.867E-28 | 1.151E-27 |
| 9. | 5.470E-29 | 4.074E-29 | 7.910E-29 | 5.899E-29 | 1.142E-28 | 8.528E-29 | 1.643E-28 | 1.228E-28 | 9.188E-29 | 1.767E-28 | 1.323E-28 | 2.535E-28 |
| 10. | 3.956E-29 | 2.947E-29 | 5.721E-29 | 4.266E-29 | 8.260E-29 | 6.167E-29 | 1.188E-28 | 8.882E-29 | 6.643E-29 | 1.277E-28 | 9.565E-29 | 1.832E-28 |
| 11. | 3.656E-29 | 2.723E-29 | 5.286E-29 | 3.942E-29 | 7.632E-29 | 5.699E-29 | 1.098E-28 | 8.209E-29 | 6.139E-29 | 1.181E-28 | 8.840E-29 | 1.694E-28 |
| 12. | 1.152E-14 | 9.357E-15 | 1.500E-14 | 1.180E-14 | 1.884E-14 | 1.484E-14 | 2.358E-14 | 1.862E-14 | 1.469E-14 | 2.331E-14 | 1.843E-14 | 2.911E-14 |
| 13. | 9.571E-15 | 7.512E-15 | 1.203E-14 | 9.457E-15 | 1.508E-14 | 1.188E-14 | 1.886E-14 | 1.488E-14 | 1.174E-14 | 1.861E-14 | 1.471E-14 | 2.320E-14 |
| 14. | 1.245E-27 | 9.167E-28 | 1.818E-27 | 1.340E-27 | 2.650E-27 | 1.956E-27 | 3.848E-27 | 2.844E-27 | 2.103E-27 | 4.127E-27 | 3.055E-27 | 5.971E-27 |
| 15. | 1.093E-27 | 8.046E-28 | 1.596E-27 | 1.177E-27 | 2.326E-27 | 1.717E-27 | 3.377E-27 | 2.496E-27 | 1.846E-27 | 3.622E-27 | 2.681E-27 | 5.241E-27 |
| 16. | 1.376E-27 | 1.013E-27 | 2.009E-27 | 1.481E-27 | 2.928E-27 | 2.161E-27 | 4.251E-27 | 3.142E-27 | 2.323E-27 | 4.559E-27 | 3.375E-27 | 6.597E-27 |
| 17. | 1.860E-27 | 1.369E-27 | 2.715E-27 | 2.001E-27 | 3.957E-27 | 2.920E-27 | 5.745E-27 | 4.246E-27 | 3.139E-27 | 6.160E-27 | 4.560E-27 | 8.913E-27 |
| 18. | 1.817E-27 | 1.337E-27 | 2.653E-27 | 1.956E-27 | 3.868E-27 | 2.855E-27 | 5.616E-27 | 4.152E-27 | 3.070E-27 | 6.025E-27 | 4.461E-27 | 8.720E-27 |
| 19. | 3.002E-27 | 2.211E-27 | 4.387E-27 | 3.234E-27 | 6.396E-27 | 4.722E-27 | 9.291E-27 | 6.869E-27 | 5.079E-27 | 9.971E-27 | 7.383E-27 | 1.443E-26 |
| 20. | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 21. | 4.055E-08 | 4.046E-08 | 4.043E-08 | 4.035E-08 | 4.030E-08 | 4.024E-08 | 4.018E-08 | 4.012E-08 | 4.003E-08 | 4.001E-08 | 3.992E-08 | 3.989E-08 |
| 22. | 1.524E-11 | 1.836E-11 | 1.559E-11 | 1.871E-11 | 1.590E-11 | 1.906E-11 | 1.620E-11 | 1.942E-11 | 2.320E-11 | 1.978E-11 | 2.362E-11 | 2.014E-11 |
| 23. | 9.811E-12 | 1.178E-11 | 1.000E-11 | 1.201E-11 | 1.020E-11 | 1.223E-11 | 1.040E-11 | 1.246E-11 | 1.489E-11 | 1.270E-11 | 1.516E-11 | 1.293E-11 |
| 24. | 1.235E-06 | 1.228E-06 | 1.236E-06 | 1.229E-06 | 1.236E-06 | 1.230E-06 | 1.235E-06 | 1.230E-06 | 1.223E-06 | 1.230E-06 | 1.223E-06 | 1.230E-06 |
| 25. | 1.235E-06 | 1.228E-06 | 1.236E-06 | 1.229E-06 | 1.236E-06 | 1.230E-06 | 1.235E-06 | 1.230E-06 | 1.223E-06 | 1.230E-06 | 1.223E-06 | 1.230E-06 |

TOTAL CONCENTRATION (G/M**3)

3.286E-06 1.429E-05 4.632E-06 1.338E-05 5.725E-06 1.023E-05 6.239E-06 9.448E-06 1.373E-05 1.016E-05 1.309E-05 1.102E-05

*** RECEPTOR NUMBER ***

13. 14. 15. 16. 17. 18. 19. 20. 21. 22. 23. 24.

| | 13. | 14. | 15. | 16. | 17. | 18. | 19. | 20. | 21. | 22. | 23. | 24. |
|---|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| SOURCE PARTIAL CONCENTRATIONS (G/M**3) | | | | | | | | | | | | |
| 1. | 8.543E-07 | 3.290E-06 | 2.121E-06 | 3.574E-06 | 3.663E-06 | 1.298E-06 | 4.836E-06 | 2.394E-06 | 5.401E-06 | 3.679E-06 | 5.319E-06 | 1.323E-13 |
| 2. | 2.408E-06 | 3.651E-06 | 3.268E-06 | 3.147E-06 | 3.636E-06 | 1.879E-06 | 3.590E-06 | 2.484E-06 | 3.330E-06 | 2.866E-06 | 2.975E-06 | 6.959E-11 |
| 3. | 6.956E-06 | 1.821E-06 | 5.149E-06 | 1.599E-06 | 3.785E-06 | 5.830E-06 | 2.856E-06 | 5.055E-06 | 2.237E-06 | 4.240E-06 | 1.829E-06 | 2.083E-09 |
| 4. | 3.363E-25 | 1.370E-14 | 2.494E-18 | 1.695E-11 | 3.599E-14 | 3.202E-17 | 1.162E-11 | 6.096E-14 | 3.647E-10 | 8.214E-12 | 2.569E-09 | 3.294E-29 |
| 5. | 5.075E-26 | 1.017E-25 | 7.415E-26 | 1.480E-25 | 1.081E-25 | 7.884E-26 | 1.569E-25 | 1.146E-25 | 2.272E-25 | 1.663E-25 | 3.280E-25 | 1.437E-26 |
| 6. | 8.252E-26 | 1.653E-25 | 1.206E-25 | 2.406E-25 | 1.757E-25 | 1.282E-25 | 2.551E-25 | 1.864E-25 | 3.694E-25 | 2.703E-25 | 5.332E-25 | 2.335E-26 |
| 7. | 2.798E-25 | 5.664E-25 | 4.115E-25 | 8.297E-25 | 6.038E-25 | 4.387E-25 | 8.820E-25 | 6.420E-25 | 1.286E-24 | 9.373E-25 | 1.868E-24 | 7.877E-26 |
| 8. | 8.522E-28 | 1.664E-27 | 1.233E-27 | 2.400E-27 | 1.781E-27 | 1.320E-27 | 2.563E-27 | 1.902E-27 | 3.682E-27 | 2.736E-27 | 5.274E-27 | 2.706E-28 |
| 9. | 1.900E-28 | 3.624E-28 | 2.720E-28 | 5.210E-28 | 3.887E-28 | 2.918E-28 | 5.576E-28 | 4.161E-28 | 7.931E-28 | 5.967E-28 | 1.125E-27 | 6.481E-29 |
| 10. | 1.374E-28 | 2.619E-28 | 1.966E-28 | 3.765E-28 | 2.809E-28 | 2.109E-28 | 4.029E-28 | 3.006E-28 | 5.730E-28 | 4.310E-28 | 8.128E-28 | 4.679E-29 |
| 11. | 1.270E-28 | 2.421E-28 | 1.817E-28 | 3.480E-28 | 2.597E-28 | 1.949E-28 | 3.724E-28 | 2.779E-28 | 5.297E-28 | 3.985E-28 | 7.514E-28 | 4.327E-29 |
| 12. | 2.305E-14 | 3.624E-14 | 2.875E-14 | 4.503E-14 | 3.579E-14 | 2.840E-14 | 4.443E-14 | 3.531E-14 | 5.504E-14 | 4.383E-14 | 6.802E-14 | 6.751E-15 |
| 13. | 1.837E-14 | 2.885E-14 | 2.288E-14 | 3.579E-14 | 2.844E-14 | 2.256E-14 | 3.526E-14 | 2.802E-14 | 4.362E-14 | 3.472E-14 | 5.383E-14 | 5.331E-15 |
| 14. | 4.426E-27 | 8.608E-27 | 6.389E-27 | 1.239E-26 | 9.207E-27 | 6.835E-27 | 1.322E-26 | 9.827E-27 | 1.894E-26 | 1.410E-26 | 2.707E-26 | 1.410E-27 |
| 15. | 3.885E-27 | 7.555E-27 | 5.608E-27 | 1.087E-26 | 8.082E-27 | 6.000E-27 | 1.160E-26 | 8.626E-27 | 1.663E-26 | 1.238E-26 | 2.376E-26 | 1.238E-27 |
| 16. | 4.890E-27 | 9.510E-27 | 7.059E-27 | 1.369E-26 | 1.017E-26 | 7.552E-27 | 1.460E-26 | 1.086E-26 | 2.093E-26 | 1.558E-26 | 2.991E-26 | 1.559E-27 |
| 17. | 6.606E-27 | 1.285E-26 | 9.536E-27 | 1.849E-26 | 1.374E-26 | 1.020E-26 | 1.972E-26 | 1.466E-26 | 2.826E-26 | 2.104E-26 | 4.038E-26 | 2.103E-27 |
| 18. | 6.464E-27 | 1.257E-26 | 9.333E-27 | 1.810E-26 | 1.345E-26 | 9.987E-27 | 1.931E-26 | 1.436E-26 | 2.768E-26 | 2.061E-26 | 3.956E-26 | 2.064E-27 |

19. 1.070E-26 2.082E-26 1.546E-26 2.997E-26 2.228E-26 1.655E-26 3.201E-26 2.380E-26 4.588E-26 3.417E-26 6.560E-26 3.426E-27
 20. 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0
 21. 3.981E-08 3.977E-08 3.970E-08 3.965E-08 3.959E-08 3.949E-08 3.948E-08 3.939E-08 3.936E-08 3.929E-08 3.925E-08 3.742E-08
 22. 2.403E-11 2.051E-11 2.446E-11 2.088E-11 2.488E-11 2.959E-11 2.532E-11 3.008E-11 2.575E-11 3.058E-11 2.619E-11 1.287E-10
 23. 1.543E-11 1.317E-11 1.570E-11 1.341E-11 1.597E-11 1.899E-11 1.625E-11 1.931E-11 1.653E-11 1.963E-11 1.682E-11 8.265E-11
 24. 1.224E-06 1.230E-06 1.224E-06 1.229E-06 1.224E-06 1.218E-06 1.224E-06 1.218E-06 1.224E-06 1.218E-06 1.224E-06 1.099E-06
 25. 1.224E-06 1.230E-06 1.224E-06 1.229E-06 1.224E-06 1.218E-06 1.224E-06 1.218E-06 1.224E-06 1.218E-06 1.224E-06 1.099E-06

TOTAL CONCENTRATION (G/M**3)

1.271E-05 1.126E-05 1.303E-05 1.082E-05 1.357E-05 1.148E-05 1.377E-05 1.241E-05 1.346E-05 1.326E-05 1.261E-05 2.237E-06

*** RECEPTOR NUMBER ***

25. 26. 27. 28. 29. 30.

SOURCE PARTIAL CONCENTRATIONS (G/M**3)

| | | | | | | |
|-----|-----------|-----------|-----------|-----------|-----------|-----------|
| 1. | 5.253E-06 | 3.131E-06 | 5.451E-06 | 3.971E-06 | 5.365E-06 | 4.575E-06 |
| 2. | 2.947E-06 | 2.203E-06 | 2.788E-06 | 2.395E-06 | 2.573E-06 | 2.452E-06 |
| 3. | 2.838E-06 | 3.687E-06 | 2.311E-06 | 3.291E-06 | 1.900E-06 | 2.888E-06 |
| 4. | 1.321E-09 | 1.082E-10 | 4.027E-09 | 7.236E-10 | 6.931E-09 | 2.371E-09 |
| 5. | 3.463E-25 | 2.541E-25 | 4.976E-25 | 3.657E-25 | 7.121E-25 | 5.243E-25 |
| 6. | 5.629E-25 | 4.131E-25 | 8.089E-25 | 5.945E-25 | 1.157E-24 | 8.523E-25 |
| 7. | 1.977E-24 | 1.445E-24 | 2.858E-24 | 2.093E-24 | 4.114E-24 | 3.018E-24 |
| 8. | 5.610E-27 | 4.180E-27 | 8.003E-27 | 5.971E-27 | 1.138E-26 | 8.498E-27 |
| 9. | 1.200E-27 | 9.045E-28 | 1.696E-27 | 1.280E-27 | 2.389E-27 | 1.805E-27 |
| 10. | 8.665E-28 | 6.532E-28 | 1.225E-27 | 9.243E-28 | 1.725E-27 | 1.303E-27 |
| 11. | 8.011E-28 | 6.039E-28 | 1.132E-27 | 8.546E-28 | 1.595E-27 | 1.205E-27 |
| 12. | 6.699E-14 | 5.347E-14 | 8.255E-14 | 6.601E-14 | 1.014E-13 | 8.126E-14 |
| 13. | 5.293E-14 | 4.224E-14 | 6.514E-14 | 5.208E-14 | 7.993E-14 | 6.402E-14 |
| 14. | 2.877E-26 | 2.147E-26 | 4.094E-26 | 3.059E-26 | 5.807E-26 | 4.345E-26 |
| 15. | 2.525E-26 | 1.884E-26 | 3.594E-26 | 2.685E-26 | 5.097E-26 | 3.814E-26 |
| 16. | 3.179E-26 | 2.372E-26 | 4.524E-26 | 3.381E-26 | 6.417E-26 | 4.801E-26 |
| 17. | 4.291E-26 | 3.202E-26 | 6.107E-26 | 4.563E-26 | 8.661E-26 | 6.480E-26 |
| 18. | 4.206E-26 | 3.139E-26 | 5.988E-26 | 4.474E-26 | 8.493E-26 | 6.355E-26 |
| 19. | 6.977E-26 | 5.207E-26 | 9.935E-26 | 7.425E-26 | 1.410E-25 | 1.055E-25 |
| 20. | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 21. | 3.907E-08 | 3.897E-08 | 3.896E-08 | 3.887E-08 | 3.885E-08 | 3.877E-08 |
| 22. | 3.159E-11 | 3.736E-11 | 3.210E-11 | 3.794E-11 | 3.262E-11 | 3.853E-11 |
| 23. | 2.028E-11 | 2.399E-11 | 2.061E-11 | 2.437E-11 | 2.095E-11 | 2.474E-11 |
| 24. | 1.218E-06 | 1.212E-06 | 1.218E-06 | 1.212E-06 | 1.218E-06 | 1.213E-06 |
| 25. | 1.218E-06 | 1.212E-06 | 1.218E-06 | 1.212E-06 | 1.218E-06 | 1.213E-06 |

TOTAL CONCENTRATION (G/M**3)

1.352E-05 1.148E-05 1.303E-05 1.212E-05 1.232E-05 1.238E-05

DETERMINATION OF MAX PT FOR AAQS JYR72 JDAY175 ADJ THRUUGH FPEL

Add'l run with extra
receivers (and corrected...24)

0.

*** SOURCES ***

| NO. | Q (G/SEC) | HP (M) | TS (DEG-K) | VS (M/SEC) | D(M) | VF (M**3/SEC) | R (KM) | S (KM) |
|-----|-----------|--------|------------|------------|------|---------------|---------|----------|
| 1. | 2.89 | 18.3 | 342.6 | 15.0 | 2.85 | 0.0 | 388.950 | 3047.280 |
| 2. | 1.10 | 38.1 | 311.5 | 30.0 | 1.02 | 0.0 | 388.720 | 3047.320 |
| 3. | 0.73 | 18.3 | 309.9 | 30.0 | 0.82 | 0.0 | 388.730 | 3047.180 |
| 4. | 0.01 | 12.2 | 505.4 | 7.6 | 0.31 | 0.0 | 389.180 | 3047.630 |
| 5. | 1.43 | 38.4 | 325.0 | 10.9 | 2.40 | 0.0 | 362.900 | 3082.500 |
| 6. | 2.04 | 24.4 | 328.0 | 14.3 | 0.90 | 0.0 | 362.900 | 3082.500 |
| 7. | 5.04 | 0.9 | 305.0 | 19.6 | 0.70 | 0.0 | 363.200 | 3082.300 |
| 8. | 2.85 | 19.8 | 349.0 | 11.3 | 2.40 | 0.0 | 360.100 | 3087.500 |
| 9. | 15.22 | 85.3 | 432.0 | 18.5 | 3.40 | 0.0 | 358.000 | 3091.000 |
| 10. | 10.36 | 85.3 | 443.0 | 7.4 | 3.70 | 0.0 | 358.000 | 3091.000 |
| 11. | 9.82 | 85.3 | 436.0 | 17.5 | 2.90 | 0.0 | 358.000 | 3091.000 |
| 12. | 103.37 | 149.3 | 422.0 | 28.7 | 7.30 | 0.0 | 361.900 | 3075.000 |
| 13. | 51.89 | 149.3 | 422.0 | 14.3 | 7.30 | 0.0 | 361.900 | 3075.000 |
| 14. | 18.05 | 93.3 | 427.0 | 24.8 | 3.00 | 0.0 | 360.000 | 3087.500 |
| 15. | 15.85 | 93.3 | 427.0 | 24.8 | 3.00 | 0.0 | 360.000 | 3087.500 |
| 16. | 20.17 | 93.3 | 403.0 | 27.5 | 3.20 | 0.0 | 360.000 | 3087.500 |
| 17. | 25.75 | 93.3 | 414.0 | 18.6 | 2.90 | 0.0 | 360.000 | 3087.500 |
| 18. | 28.81 | 93.3 | 415.0 | 21.1 | 4.40 | 0.0 | 360.000 | 3087.500 |
| 19. | 54.99 | 93.3 | 418.0 | 23.1 | 5.40 | 0.0 | 360.000 | 3087.500 |
| 20. | 3.25 | 12.2 | 325.0 | 15.7 | 0.50 | 0.0 | 361.800 | 3088.300 |
| 21. | 1.77 | 61.0 | 337.0 | 10.3 | 2.40 | 0.0 | 348.500 | 3057.300 |
| 22. | 2.64 | 29.0 | 333.0 | 20.0 | 0.90 | 0.0 | 346.800 | 3041.100 |
| 23. | 1.62 | 21.6 | 563.0 | 11.9 | 1.90 | 0.0 | 346.800 | 3041.100 |
| 24. | 99.04 | 152.1 | 425.0 | 20.7 | 7.90 | 0.0 | 367.100 | 3053.800 |
| 25. | 99.04 | 152.1 | 425.0 | 20.7 | 7.90 | 0.0 | 367.100 | 3053.800 |

*** RECEPATORS ***

| NO. | KREC(KM) | SREC(KM) | Z (M) |
|-----|----------|----------|-------|
| 1. | 390.000 | 3046.900 | 0.0 |
| 2. | 388.800 | 3047.100 | 0.0 |
| 3. | 388.900 | 3047.100 | 0.0 |
| 4. | 389.000 | 3047.000 | 0.0 |
| 5. | 389.100 | 3047.000 | 0.0 |
| 6. | 389.200 | 3047.000 | 0.0 |
| 7. | 389.300 | 3046.900 | 0.0 |
| 8. | 389.400 | 3046.900 | 0.0 |
| 9. | 389.500 | 3046.900 | 0.0 |
| 10. | 389.600 | 3046.900 | 0.0 |
| 11. | 389.700 | 3046.800 | 0.0 |
| 12. | 389.800 | 3046.800 | 0.0 |
| 13. | 389.900 | 3046.800 | 0.0 |
| 14. | 390.000 | 3046.800 | 0.0 |

*** METEOROLOGY ***

| NO. | THETA(DEG) | U (M/SEC) | KST | HL (M) | T (DEG-K) | P (MB) |
|-----|------------|-----------|-----|--------|-----------|--------|
| 1. | 289. | 5.1 | 14 | 1332. | 300.0 | 1013.0 |

*** RECEPTOR NUMBER ***

| 1. | 2. | 3. | 4. | 5. | 6. | 7. | 8. | 9. | 10. | 11. | 12. |
|----|----|----|----|----|----|----|----|----|-----|-----|-----|
|----|----|----|----|----|----|----|----|----|-----|-----|-----|

SOURCE PARTIAL CONCENTRATIONS (G/M**3)

| | | | | | | | | | | | | |
|----|-----------|-----|-----|-----|-----|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| 1. | 7.591E-06 | 0.0 | 0.0 | 0.0 | 0.0 | 3.768E-22 | 9.979E-20 | 2.285E-13 | 5.780E-10 | 4.713E-08 | 1.034E-08 | 1.666E-07 |
|----|-----------|-----|-----|-----|-----|-----------|-----------|-----------|-----------|-----------|-----------|-----------|

AVERAGE CONCENTRATIONS FOR 24 HOURS.

*** RECEPTOR NUMBER ***

1. 2. 3. 4. 5. 6. 7. 8. 9. 10. 11. 12.

4 SOURCE PARTIAL CONCENTRATIONS (G/M**3)

| | | | | | | | | | | | | | | |
|----|-----|-----------|-----------|-----------|------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| 5 | 1. | 4.672E-06 | 0.0 | 0.0 | 0.0 | 1.007E-21 | 2.051E-12 | 1.155E-11 | 8.781E-09 | 1.752E-07 | 6.188E-07 | 5.044E-07 | 9.365E-07 | |
| 6 | 2. | 2.997E-06 | 0.0 | 1.422E-13 | 6.658E-12 | 1.934E-08 | 3.338E-07 | 2.405E-07 | 6.544E-07 | 8.858E-07 | 1.254E-06 | 8.244E-07 | 1.040E-06 | |
| 7 | 3. | 3.485E-06 | 4.419E-12 | 2.166E-06 | 1.501E-06 | 4.429E-06 | 9.168E-06 | 3.054E-06 | 4.953E-06 | 6.281E-06 | 6.399E-06 | 3.789E-06 | 4.238E-06 | |
| 8 | 4. | 1.902E-10 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1.437E-30 | 2.690E-22 | 1.761E-20 | 1.622E-16 | |
| 9 | 5. | 2.405E-25 | 4.494E-27 | 6.719E-27 | 7.228E-27 | 1.074E-26 | 1.592E-26 | 1.702E-26 | 2.510E-26 | 3.689E-26 | 5.399E-26 | 5.748E-26 | 8.371E-26 | |
| 10 | 6. | 3.909E-25 | 7.310E-27 | 1.093E-26 | 1.175E-26 | 1.746E-26 | 2.589E-26 | 2.768E-26 | 4.082E-26 | 5.999E-26 | 8.779E-26 | 9.345E-26 | 1.361E-25 | |
| 11 | 7. | 1.364E-24 | 2.371E-26 | 3.570E-26 | 3.852E-26 | 5.763E-26 | 8.602E-26 | 9.224E-26 | 1.370E-25 | 2.026E-25 | 2.985E-25 | 3.187E-25 | 4.671E-25 | |
| 12 | 8. | 3.925E-27 | 7.980E-29 | 1.178E-28 | 1.274E-28 | 1.883E-28 | 2.759E-28 | 2.969E-28 | 4.331E-28 | 6.300E-28 | 9.129E-28 | 9.784E-28 | 1.412E-27 | |
| 13 | 9. | 8.475E-28 | 1.924E-29 | 2.803E-29 | 3.036E-29 | 4.401E-29 | 6.370E-29 | 6.864E-29 | 9.895E-29 | 1.423E-28 | 2.039E-28 | 2.189E-28 | 3.126E-28 | |
| 14 | 10. | 6.121E-28 | 1.392E-29 | 2.028E-29 | 2.196E-29 | 3.183E-29 | 4.606E-29 | 4.962E-29 | 7.153E-29 | 1.029E-28 | 1.474E-28 | 1.582E-28 | 2.258E-28 | |
| 15 | 11. | 5.659E-28 | 1.286E-29 | 1.874E-29 | 2.029E-29 | 2.941E-29 | 4.257E-29 | 4.586E-29 | 6.611E-29 | 9.507E-29 | 1.362E-28 | 1.462E-28 | 2.088E-28 | |
| 16 | 12. | 5.426E-14 | 5.834E-15 | 7.398E-15 | 7.342E-15 | 9.273E-15 | 1.169E-14 | 1.157E-14 | 1.454E-14 | 1.822E-14 | 2.277E-14 | 2.250E-14 | 2.803E-14 | |
| 17 | 13. | 4.293E-14 | 4.697E-15 | 5.948E-15 | 5.893E-15 | 7.433E-15 | 9.356E-15 | 9.245E-15 | 1.160E-14 | 1.452E-14 | 1.812E-14 | 1.788E-14 | 2.224E-14 | |
| 18 | 14. | 2.018E-26 | 4.210E-28 | 6.244E-28 | 6.745E-28 | 9.882E-28 | 1.444E-27 | 1.552E-27 | 2.259E-27 | 3.277E-27 | 4.737E-27 | 5.073E-27 | 7.303E-27 | |
| 19 | 15. | 1.771E-26 | 3.695E-28 | 5.481E-28 | 5.924E-28 | 8.674E-28 | 1.268E-27 | 1.363E-27 | 1.983E-27 | 2.877E-27 | 4.158E-27 | 4.453E-27 | 6.410E-27 | |
| 20 | 16. | 2.230E-26 | 4.650E-28 | 6.898E-28 | 7.456E-28 | 1.092E-27 | 1.595E-27 | 1.715E-27 | 2.496E-27 | 3.621E-27 | 5.234E-27 | 5.605E-27 | 8.069E-27 | |
| 21 | 17. | 3.010E-26 | 6.285E-28 | 9.326E-26 | 1.008E-27 | 1.475E-27 | 2.156E-27 | 2.318E-27 | 3.372E-27 | 4.892E-27 | 7.070E-27 | 7.570E-27 | 1.090E-26 | |
| 22 | 18. | 2.950E-26 | 6.138E-28 | 9.109E-28 | 9.848E-28 | 1.442E-27 | 2.108E-27 | 2.267E-27 | 3.299E-27 | 4.787E-27 | 6.921E-27 | 7.413E-27 | 1.067E-26 | |
| 23 | 19. | 4.892E-26 | 1.013E-27 | 1.505E-27 | 1.628E-27 | 2.385E-27 | 3.487E-27 | 3.751E-27 | 5.460E-27 | 7.927E-27 | 1.146E-26 | 1.228E-26 | 1.769E-26 | |
| 24 | 20. | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | |
| 25 | 21. | 3.918E-08 | 4.068E-08 | 4.057E-08 | 4.033E-08 | 4.023E-08 | 4.013E-08 | 3.989E-08 | 3.979E-08 | 3.970E-08 | 3.960E-08 | 3.936E-08 | 3.927E-08 | |
| 26 | 22. | 3.108E-11 | 1.768E-11 | 1.802E-11 | 1.2199E-11 | 2.199E-11 | 2.239E-11 | 2.279E-11 | 2.766E-11 | 2.813E-11 | 2.861E-11 | 2.910E-11 | 3.508E-11 | 3.564E-11 |
| 27 | 23. | 1.996E-11 | 1.134E-11 | 1.156E-11 | 1.411E-11 | 1.437E-11 | 1.463E-11 | 1.775E-11 | 1.806E-11 | 1.837E-11 | 1.868E-11 | 2.252E-11 | 2.288E-11 | |
| 28 | 24. | 1.218E-06 | 1.222E-06 | 1.227E-06 | 1.219E-06 | 1.221E-06 | 1.222E-06 | 1.214E-06 | 1.215E-06 | 1.216E-06 | 1.217E-06 | 1.209E-06 | 1.210E-06 | |
| 29 | 25. | 1.218E-06 | 1.222E-06 | 1.227E-06 | 1.219E-06 | 1.221E-06 | 1.222E-06 | 1.214E-06 | 1.215E-06 | 1.216E-06 | 1.217E-06 | 1.209E-06 | 1.210E-06 | |

TOTAL CONCENTRATION (G/M**3)

1.363E-05 2.493E-06 4.662E-06 3.980E-06 6.930E-06 1.199E-05 5.762E-06 8.086E-06 9.814E-06 1.075E-05 7.576E-06 8.675E-06

*** RECEPTOR NUMBER ***

13. 14.

41 SOURCE PARTIAL CONCENTRATIONS (G/M**3)

| | | | |
|----|-----|-----------|-----------|
| 42 | 1. | 1.445E-06 | 2.211E-06 |
| 43 | 2. | 1.434E-06 | 1.866E-06 |
| 44 | 3. | 4.264E-06 | 4.035E-06 |
| 45 | 4. | 8.459E-14 | 6.073E-12 |
| 46 | 5. | 1.216E-25 | 1.762E-25 |
| 47 | 6. | 1.978E-25 | 2.864E-25 |
| 48 | 7. | 6.831E-25 | 9.956E-25 |
| 49 | 8. | 2.033E-27 | 2.920E-27 |
| 50 | 9. | 4.455L-28 | 6.382L-28 |
| 51 | 10. | 3.219E-28 | 4.609E-28 |
| 52 | 11. | 2.976E-28 | 4.261E-28 |
| 53 | 12. | 3.486E-14 | 4.324E-14 |
| 54 | 13. | 2.761E-14 | 3.420E-14 |
| 55 | 14. | 1.049E-26 | 1.504E-26 |
| 56 | 15. | 9.210E-27 | 1.320E-26 |
| 57 | 16. | 1.159E-26 | 1.661E-26 |
| 58 | 17. | 1.565E-26 | 2.243E-26 |
| 59 | 18. | 1.534E-26 | 2.198E-26 |

19. 2.543E-26 3.646E-26
20. 0.0 0.0
21. 3.917E-08 3.907E-08
22. 3.621E-11 3.678E-11
23. 2.325E-11 2.362E-11
24. 1.211E-06 1.212E-06
25. 1.211E-06 1.212E-06

1
2
3 TOTAL CONCENTRATION (G/M**3)

4
5
6 9.604E-06 1.058E-05
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100

DETERMINATION OF PROP BDY CONC. FOR AADS JYR72 JUNY174 ADJ THROUGH FPL

0.

*** SOURCES ***

| NO | Q (G/SEC) | HF (M) | TS (DEG-K) | US (M/SEC) | V/M | WF(M**3/SEC) | P (KM) | S (KM) |
|-----|-----------|--------|------------|------------|------|--------------|---------|----------|
| 1. | 2.89 | 18.3 | 342.6 | 15.0 | 2.85 | 0.0 | 399.950 | 3047.290 |
| 2. | 1.10 | 38.1 | 311.5 | 30.0 | 1.02 | 0.0 | 388.720 | 3047.320 |
| 3. | 0.73 | 18.3 | 309.9 | 30.0 | 0.82 | 0.0 | 388.730 | 3047.180 |
| 4. | 0.00 | 12.2 | 505.4 | 7.6 | 0.31 | 0.0 | 389.180 | 3047.630 |
| 5. | 1.43 | 38.4 | 325.0 | 10.9 | 2.40 | 0.0 | 362.900 | 3082.500 |
| 6. | 2.04 | 24.4 | 328.0 | 14.3 | 0.90 | 0.0 | 362.900 | 3082.500 |
| 7. | 5.04 | 0.9 | 305.0 | 19.6 | 0.70 | 0.0 | 363.200 | 3082.300 |
| 8. | 2.85 | 19.8 | 349.0 | 11.3 | 2.40 | 0.0 | 360.100 | 3087.500 |
| 9. | 15.22 | 85.3 | 432.0 | 18.5 | 3.40 | 0.0 | 358.000 | 3091.000 |
| 10. | 10.36 | 85.3 | 443.0 | 7.4 | 3.70 | 0.0 | 358.000 | 3091.000 |
| 11. | 9.82 | 85.3 | 436.0 | 17.5 | 2.90 | 0.0 | 358.000 | 3091.000 |
| 12. | 103.37 | 149.3 | 422.0 | 28.7 | 7.30 | 0.0 | 361.900 | 3075.000 |
| 13. | 51.90 | 149.3 | 422.0 | 14.3 | 7.30 | 0.0 | 361.900 | 3075.000 |
| 14. | 18.06 | 93.3 | 427.0 | 24.8 | 3.00 | 0.0 | 360.000 | 3087.500 |
| 15. | 15.85 | 93.3 | 427.0 | 24.8 | 3.00 | 0.0 | 360.000 | 3087.500 |
| 16. | 20.17 | 93.3 | 403.0 | 27.5 | 3.20 | 0.0 | 360.000 | 3087.500 |
| 17. | 25.75 | 93.3 | 414.0 | 18.6 | 2.90 | 0.0 | 360.000 | 3087.500 |
| 18. | 28.81 | 93.3 | 415.0 | 21.1 | 4.40 | 0.0 | 360.000 | 3087.500 |
| 19. | 55.00 | 93.3 | 418.0 | 23.1 | 5.40 | 0.0 | 360.000 | 3087.500 |
| 20. | 3.25 | 12.2 | 325.0 | 15.7 | 0.50 | 0.0 | 361.800 | 3088.300 |
| 21. | 1.77 | 61.0 | 337.0 | 10.3 | 2.40 | 0.0 | 348.500 | 3057.300 |
| 22. | 2.64 | 29.0 | 333.0 | 20.0 | 0.90 | 0.0 | 346.800 | 3041.100 |
| 23. | 1.62 | 21.6 | 563.0 | 11.9 | 1.90 | 0.0 | 346.800 | 3041.100 |
| 24. | 99.04 | 152.1 | 425.0 | 20.7 | 7.90 | 0.0 | 367.100 | 3053.800 |
| 25. | 99.04 | 152.1 | 425.0 | 20.7 | 7.90 | 0.0 | 367.100 | 3053.800 |

*** RECEPATORS ***

| NO. | RREC(KM) | SREC(KM) | Z (M) |
|-----|----------|----------|-------|
| 1. | 390.880 | 3046.680 | 0.0 |
| 2. | 390.950 | 3046.870 | 0.0 |
| 3. | 390.950 | 3046.770 | 0.0 |
| 4. | 390.950 | 3046.670 | 0.0 |
| 5. | 390.950 | 3046.570 | 0.0 |
| 6. | 390.950 | 3046.470 | 0.0 |
| 7. | 391.050 | 3046.640 | 0.0 |

*** METEOROLOGY ***

| NO. | THETA(DEG) | U (M/SEC) | KST | HL (M) | T (DEG-K) | P (MB) |
|-----|------------|-----------|-----|--------|-----------|--------|
| 1. | 280. | 5.7 | 4 | 785. | 300.0 | 1013.0 |

*** RECEPTOR NUMBER ***

1. 2. 3. 4. 5. 6. 7.

SOURCE PARTIAL CONCENTRATIONS (G/M**3)

| | | | | | | | |
|-----|-----------|------------|-----------|-----------|-----------|-----------|-----------|
| 1. | 1.244E -6 | 8.144E -6 | 4.445E -6 | 1.423E -6 | 2.724E -7 | 3.195E -8 | 1.366E -6 |
| 2. | 7.563E -7 | 3.468E -6 | 2.102E -6 | 8.199E -7 | 2.085E -7 | 3.523E -8 | 7.616E -7 |
| 3. | 2.735E -6 | 3.261E -6 | 3.760E -6 | 2.702E -6 | 1.232E -6 | 3.632E -7 | 2.431E -6 |
| 4. | 2.720E-14 | -7.092E-11 | 2.995E-12 | 7.439E-14 | 1.097E-15 | 9.937E-18 | 1.467E-13 |
| 5.. | 0.000E | 0 -0.000E | 0 0.000E |

23. 4.846E-11 3.345E-11 4.098E-11 5.005E-11 6.100E-11 7.414E-11 5.404E-11
24. 1.373E-11 3.192E-11 2.138E-11 1.424E-11 9.409E-12 6.176E-12 1.406E-11
25. 1.373E-11 3.192E-11 2.138E-11 1.424E-11 9.409E-12 6.176E-12 1.406E-11

TOTAL CONCENTRATION (G/M**3)

9.514E -8 2.507E -6 6.125E -7 1.018E -7 1.120E -8 9.741E-10 8.197E -8

*** METEOROLOGY ***
NO. THETA(DEG) U (M/SEC) KST HL (M) T (DEG-K) P (MB)

AVERAGE CONCENTRATIONS FOR 24 HOURS.

*** RECEPTOR NUMBER ***

1. 2. 3. 4. 5. 6. 7.

SOURCE

PARTIAL CONCENTRATIONS (G/M**3)

1. 4.121E -6 3.479E -6 4.207E -6 4.089E -6 3.208E -6 2.250E -6 3.941E -6
2. 1.698E -6 1.339E -6 1.609E -6 1.645E -6 1.402E -6 1.019E -6 1.561E -6
3. 1.626E -6 9.124E -7 1.223E -6 1.534E -6 1.670E -6 1.515E -6 1.450E -6
4. 6.180E -9 1.101E -8 8.228E -9 6.436E -9 4.075E -9 1.911E -9 6.317E -9
5. 1.254E-21 2.081E-21 1.724E-21 1.429E-21 1.183E-21 9.796E-22 1.669E-21
6. 1.963E-21 3.257E-21 2.699E-21 2.237E-21 1.852E-21 1.533E-21 2.612E-21
7. 7.186E-21 1.200E-20 9.920E-21 8.205E-21 6.780E-21 5.601E-21 9.607E-21
8. 1.071E-22 1.743E-22 1.457E-22 1.218E-22 1.010E-22 8.507E-23 1.421E-22
9. 6.938E-23 1.110E-22 9.343E-23 7.867E-23 6.619E-23 5.569E-23 9.150E-23
10. 4.724E-23 7.558E-23 4.362E-23 5.357E-23 4.508E-23 3.792E-23 6.230E-23

Best Available Copy

| | | | | | | | |
|-----|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| 13. | 6.522E-14 | 9.481E-14 | 8.173E-14 | 7.045E-14 | 6.068E-14 | 5.224E-14 | 7.675E-14 |
| 14. | 6.140E-22 | 9.964E-22 | 8.337E-22 | 6.977E-22 | 5.834E-22 | 4.878E-22 | 8.129E-22 |
| 15. | 5.390E-22 | 8.746E-22 | 7.318E-22 | 6.124E-22 | 5.121E-22 | 4.282E-22 | 7.135E-22 |
| 16. | 6.859E-22 | 1.113E-21 | 9.312E-22 | 7.793E-22 | 6.517E-22 | 5.448E-22 | 9.079E-22 |
| 17. | 8.757E-22 | 1.421E-21 | 1.189E-21 | 9.949E-22 | 8.320E-22 | 6.956E-22 | 1.159E-21 |
| 18. | 9.796E-22 | 1.590E-21 | 1.330E-21 | 1.113E-21 | 9.308E-22 | 7.782E-22 | 1.297E-21 |
| 19. | 1.870E-21 | 3.035E-21 | 2.539E-21 | 2.125E-21 | 1.777E-21 | 1.486E-21 | 2.476E-21 |
| 20. | 6.424E-25 | 1.101E-24 | 9.048E-25 | 7.470E-25 | 6.149E-25 | 5.061E-25 | 8.972E-25 |
| 21. | 3.137E -8 | 3.078E -8 | 3.104E -8 | 3.128E -8 | 3.150E -8 | 3.172E -8 | 3.118E -8 |
| 22. | 3.159E-12 | 2.180E-12 | 2.671E-12 | 3.263E-12 | 3.978E-12 | 4.837E-12 | 3.523E-12 |
| 23. | 2.029E-12 | 1.400E-12 | 1.716E-12 | 2.096E-12 | 2.555E-12 | 3.107E-12 | 2.264E-12 |
| 24. | 1.187E -6 | 1.206E -6 | 1.198E -6 | 1.187E -6 | 1.174E -6 | 1.158E -6 | 1.186E -6 |
| 25. | 1.187E -6 | 1.206E -6 | 1.198E -6 | 1.187E -6 | 1.174E -6 | 1.158E -6 | 1.186E -6 |

TOTAL CONCENTRATION (G/M**3)

9.858E -6 8.184E -6 9.474E -6 9.683E -6 8.664E -6 7.134E -6 9.361E -6

Best Available Copy

DETERMINATION OF PROP EDY CONC FOR PFD JYR 72 MAY 174 ARJ. THROUGH MAN ENERGY

0.

*** SOURCE ***

| NO. | Q (G/SEC) | H _P (M) | T _S (DEG-K) | U _S (M/SEC) | B(M) | U _F (M**3/SEC) | R (KM) | S (KM) |
|-----|-----------|--------------------|------------------------|------------------------|------|---------------------------|---------|----------|
| 1. | 2.89 | 18.3 | 342.6 | 15.0 | 2.85 | 0.0 | 388.950 | 3017.280 |
| 2. | 1.10 | 38.1 | 311.5 | 30.0 | 1.02 | 0.0 | 399.720 | 3042.320 |
| 3. | 0.73 | 18.3 | 309.0 | 30.0 | 0.92 | 0.0 | 399.730 | 3042.180 |
| 4. | 0.00 | 12.2 | 505.4 | 7.6 | 0.31 | 0.0 | 399.180 | 3017.630 |
| 5. | 0.16 | 19.5 | 561.0 | 9.1 | 0.50 | 0.0 | 341.600 | 3057.700 |
| 6. | 0.73 | 30.5 | 561.0 | 4.5 | 0.90 | 0.0 | 342.900 | 3057.700 |
| 7. | 2.04 | 24.1 | 329.0 | 14.3 | 0.90 | 0.0 | 342.900 | 3082.500 |
| 8. | 5.04 | 9.9 | 305.0 | 19.4 | 0.70 | 0.0 | 342.900 | 3092.500 |
| 9. | 4.01 | 18.3 | 308.0 | 1.6 | 0.50 | 0.0 | 342.900 | 3094.700 |
| 10. | 3.25 | 12.2 | 325.0 | 15.7 | 0.50 | 0.0 | 341.600 | 3088.300 |
| 11. | 3.41 | 61.0 | 305.0 | 1.9 | 0.90 | 0.0 | 343.100 | 3089.000 |

*** RECEPTORS ***

| NO. | RREC(KM) | SREC(KM) | Z (M) |
|-----|----------|----------|-------|
| 1. | 390.900 | 3016.760 | 0.0 |
| 2. | 390.950 | 3016.940 | 0.0 |
| 3. | 390.950 | 3016.840 | 0.0 |
| 4. | 390.950 | 3016.740 | 0.0 |
| 5. | 390.950 | 3016.640 | 0.0 |
| 6. | 390.950 | 3016.540 | 0.0 |
| 7. | 391.050 | 3016.720 | 0.0 |

*** METEOROLOGY ***

| NO. | THETA(DEG) | U (M/SEC) | KST | H _L (M) | T (DEG-K) | P (MB) |
|-----|------------|-----------|-----|--------------------|-----------|--------|
| 1. | 278. | 5.7 | 4 | 785. | 300.0 | 1013.0 |

*** RECEPTOR NUMBER ***

| 1. | 2. | 3. | 4. | 5. | 6. | 7. |
|----|----|----|----|----|----|----|
|----|----|----|----|----|----|----|

SOURCE PARTIAL CONCENTRATIONS (G/M**3)

| | | | | | | | |
|-----|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| 1. | 1.490E-6 | 8.115E-6 | 4.326E-6 | 1.323E-6 | 2.381E-7 | 2.549E-9 | 1.389E-6 |
| 2. | 7.931E-7 | 3.287E-6 | 1.940E-6 | 7.034E-7 | 1.645E-7 | 2.498E-9 | 7.074E-7 |
| 3. | 2.811E-6 | 3.387E-6 | 3.748E-6 | 2.557E-6 | 1.096E-6 | 2.887E-7 | 2.889E-6 |
| 4. | 5.052E-14 | 6.939E-11 | 2.441E-12 | 5.598E-14 | 1.849E-16 | 4.944E-19 | 1.443E-13 |
| 5. | 8.223E-10 | 1.005E-9 | 9.055E-10 | 9.134E-10 | 7.287E-10 | 4.528E-10 | 9.140E-10 |
| 6. | 3.358E-9 | 4.106E-9 | 3.692E-9 | 3.222E-9 | 2.880E-9 | 2.444E-9 | 3.324E-9 |
| 7. | 0.000E 0 |
| 8. | 0.000E 0 |
| 9. | 0.000E 0 |
| 10. | 0.000E 0 |
| 11. | 0.000E 0 |

TOTAL CONCENTRATION (G/M**3)

| | | | | | | |
|----------|----------|----------|----------|----------|----------|----------|
| 5.101E-6 | 1.489E-5 | 1.002E-5 | 4.589E-4 | 1.507E-6 | 3.525E-7 | 4.490E-6 |
|----------|----------|----------|----------|----------|----------|----------|

*** METEOROLOGY ***

AVERAGE CONCENTRATIONS FOR 24 HOURS.

*** RECEPTOR NUMBER ***

1. 2. 3. 4. 5. 6. 7.

SOURCE PARTIAL CONCENTRATIONS (G/M**3)

| | | | | | | | |
|-----|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| 1. | 4.583E -6 | 3.647E -6 | 4.539E -6 | 4.459E -6 | 3.434E -6 | 2.328E -6 | 4.337E -6 |
| 2. | 1.819E -6 | 1.433E -6 | 1.750E -6 | 1.790E -6 | 1.495E -6 | 1.037E -6 | 1.704E -6 |
| 3. | 1.688E -6 | 9.503E -7 | 1.299E -6 | 1.663E -6 | 1.824E -6 | 1.429E -6 | 1.553E -6 |
| 4. | 6.610E -9 | 1.167E -8 | 8.450E -9 | 6.441E -9 | 3.893E -9 | 1.695E -9 | 6.477E -9 |
| 5. | 4.222E -9 | 4.195E -9 | 4.207E -9 | 4.214E -9 | 4.221E -9 | 4.224E -9 | 4.226E -9 |
| 6. | 1.724E -8 | 1.713E -8 | 1.719E -8 | 1.722E -8 | 1.724E -8 | 1.725E -8 | 1.726E -8 |
| 7. | 2.045E-23 | 3.345E-22 | 2.726E-22 | 2.207E-23 | 1.799E-23 | 1.417E-23 | 2.679E-23 |
| 8. | 9.769E-23 | 1.409E-22 | 1.302E-22 | 1.054E-22 | 9.540E-23 | 6.910E-23 | 1.280E-22 |
| 9. | 3.748E-25 | 6.316E-25 | 5.090E-25 | 4.091E-25 | 3.284E-25 | 2.639E-25 | 5.057E-25 |
| 10. | 2.256E-27 | 3.889E-27 | 3.210E-27 | 2.592E-27 | 2.078E-27 | 1.571E-27 | 3.225E-27 |
| 11. | 8.950E-30 | 1.579E-29 | 1.253E-29 | 9.950E-30 | 7.901E-30 | 6.249E-30 | 1.295E-29 |

TOTAL CONCENTRATION (G/M**3)

8.148E -6 8.064E -6 7.619E -6 7.940E -6 6.771E -6 5.017E -6 7.625E -6

DETERMINATION OF MAX PT FOR PSD JYR72 JDAY175 ADJ THROUGH MAN ENERGY

0.

* * * S O U R C E S * * *

| NO. | Q (G/SEC) | HP (M) | TS (DEG-K) | VS (M/SEC) | D(M) | VF(M**3/SEC) | R (KM) | S (KM) |
|-----|-----------|--------|------------|------------|------|--------------|---------|----------|
| 1. | 2.89 | 18.3 | 342.6 | 15.0 | 2.85 | 0.0 | 388.950 | 3047.280 |
| 2. | 1.10 | 38.1 | 311.5 | 30.0 | 1.02 | 0.0 | 388.720 | 3047.320 |
| 3. | 0.73 | 18.3 | 309.9 | 30.0 | 0.82 | 0.0 | 388.730 | 3047.180 |
| 4. | 0.01 | 12.2 | 505.4 | 7.6 | 0.31 | 0.0 | 389.180 | 3047.630 |
| 5. | 0.16 | 19.5 | 561.0 | 8.1 | 0.60 | 0.0 | 346.600 | 3057.700 |
| 6. | 0.72 | 30.5 | 561.0 | 6.5 | 0.90 | 0.0 | 346.600 | 3057.700 |
| 7. | 2.04 | 24.4 | 328.0 | 14.3 | 0.90 | 0.0 | 362.900 | 3082.500 |
| 8. | 5.04 | 0.9 | 305.0 | 19.6 | 0.70 | 0.0 | 362.900 | 3082.500 |
| 9. | 4.01 | 18.3 | 308.0 | 1.6 | 0.60 | 0.0 | 362.900 | 3082.700 |
| 10. | 3.25 | 12.2 | 325.0 | 15.7 | 0.50 | 0.0 | 361.800 | 3088.300 |
| 11. | 3.44 | 61.0 | 305.0 | 1.9 | 6.90 | 0.0 | 363.100 | 3089.000 |

* * * R E C E P T O R S * * *

| NO. | RREC(KM) | SKEC(KM) | Z (M) |
|-----|----------|----------|-------|
|-----|----------|----------|-------|

| | | | |
|-----|---------|----------|-----|
| 1. | 389.000 | 3047.200 | 0.0 |
| 2. | 389.000 | 3047.100 | 0.0 |
| 3. | 389.100 | 3047.200 | 0.0 |
| 4. | 389.100 | 3047.100 | 0.0 |
| 5. | 389.200 | 3047.200 | 0.0 |
| 6. | 389.200 | 3047.100 | 0.0 |
| 7. | 389.300 | 3047.200 | 0.0 |
| 8. | 389.300 | 3047.100 | 0.0 |
| 9. | 389.400 | 3047.200 | 0.0 |
| 10. | 389.400 | 3047.100 | 0.0 |
| 11. | 389.400 | 3047.000 | 0.0 |
| 12. | 389.500 | 3047.100 | 0.0 |
| 13. | 389.500 | 3047.000 | 0.0 |
| 14. | 389.600 | 3047.100 | 0.0 |
| 15. | 389.600 | 3047.000 | 0.0 |
| 16. | 389.700 | 3047.100 | 0.0 |
| 17. | 389.700 | 3047.000 | 0.0 |
| 18. | 389.800 | 3047.100 | 0.0 |
| 19. | 389.800 | 3047.000 | 0.0 |
| 20. | 389.900 | 3047.000 | 0.0 |
| 21. | 389.900 | 3046.900 | 0.0 |
| 22. | 390.000 | 3047.000 | 0.0 |
| 23. | 390.000 | 3046.900 | 0.0 |
| 24. | 390.100 | 3047.000 | 0.0 |
| 25. | 390.100 | 3046.900 | 0.0 |
| 26. | 390.200 | 3047.000 | 0.0 |
| 27. | 390.200 | 3046.900 | 0.0 |
| 28. | 390.200 | 3046.800 | 0.0 |
| 29. | 390.300 | 3046.900 | 0.0 |
| 30. | 390.300 | 3046.800 | 0.0 |

* * * M E T E O R O L O G Y * * *

| NO. | THETA(DEG) | U (M/SEC) | KST | HL (M) | T (DEG-K) | P (MB) |
|-----|------------|-----------|-----|--------|-----------|--------|
|-----|------------|-----------|-----|--------|-----------|--------|

| | | | | | | |
|----|------|-----|---|-------|-------|--------|
| 1. | 287. | 5.1 | 4 | 1332. | 300.0 | 1013.0 |
|----|------|-----|---|-------|-------|--------|

* * * R E C E P T O R N U M B E R * * *

| | | | | | | | | | | | |
|----|----|----|----|----|----|----|----|----|-----|-----|-----|
| 1. | 2. | 3. | 4. | 5. | 6. | 7. | 8. | 9. | 10. | 11. | 12. |
|----|----|----|----|----|----|----|----|----|-----|-----|-----|

SOURCE PARTIAL CONCENTRATIONS (G/M**3)

AVERAGE CONCENTRATIONS FOR 24 HOURS.

*** RECEPTOR NUMBER ***

1. 2. 3. 4. 5. 6. 7. 8. 9. 10. 11. 12.

SOURCE PARTIAL CONCENTRATIONS (G/M**3)

| | | | | | | | | | | | | |
|-----|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| 1. | 6.036E-35 | 0.0 | 2.717E-10 | 2.130E-15 | 1.325E-07 | 2.674E-09 | 6.066E-07 | 1.725E-07 | 1.032E-06 | 9.143E-07 | 1.173E-07 | 2.174E-06 |
| 2. | 2.589E-07 | 4.992E-09 | 1.255E-06 | 2.261E-07 | 2.417E-06 | 7.872E-07 | 2.928E-06 | 1.941E-06 | 2.839E-06 | 3.187E-06 | 9.901E-07 | 3.852E-06 |
| 3. | 6.936E-07 | 1.112E-05 | 1.077E-06 | 1.260E-05 | 1.158E-06 | 9.171E-06 | 1.129E-06 | 6.144E-06 | 1.074E-06 | 4.223E-06 | 9.149E-06 | 3.101E-06 |
| 4. | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.232E-26 | 0.0 | 0.0 | 3.035E-22 |
| 5. | 4.432E-09 | 4.402E-09 | 4.424E-09 | 4.394E-09 | 4.417E-09 | 4.386E-09 | 4.410E-09 | 4.378E-09 | 4.402E-09 | 4.371E-09 | 4.341E-09 | 4.363E-09 |
| 6. | 1.802E-08 | 1.790E-08 | 1.798E-08 | 1.787E-08 | 1.795E-08 | 1.783E-08 | 1.792E-08 | 1.780E-08 | 1.789E-08 | 1.777E-08 | 1.765E-08 | 1.773E-08 |
| 7. | 5.482E-30 | 3.794E-30 | 5.521E-30 | 5.908E-30 | 1.321E-29 | 9.174E-30 | 2.037E-29 | 1.418E-29 | 3.134E-29 | 2.185E-29 | 1.524E-29 | 3.356E-29 |
| 8. | 3.107E-29 | 2.150E-29 | 4.829E-29 | 3.348E-29 | 7.484E-29 | 5.199E-29 | 1.154E-28 | 8.034E-29 | 1.776E-28 | 1.238E-28 | 8.637E-29 | 1.902E-28 |
| 9. | 5.568E-30 | 3.849E-30 | 8.686E-30 | 6.015E-30 | 1.351E-29 | 9.375E-30 | 2.092E-29 | 1.454E-29 | 3.231E-29 | 2.250E-29 | 1.567E-29 | 3.467E-29 |
| 10. | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 11. | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

TOTAL CONCENTRATION (G/M**3)

9.749E-07 1.115E-05 2.354E-06 1.285E-05 3.730E-06 9.983E-06 4.686E-06 8.279E-06 4.967E-06 8.346E-06 1.028E-05 9.149E-06

*** RECEPTOR NUMBER ***

13. 14. 15. 16. 17. 18. 19. 20. 21. 22. 23. 24.

SOURCE PARTIAL CONCENTRATIONS (G/M**3)

| | | | | | | | | | | | | |
|-----|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| 1. | 5.698E-07 | 3.380E-06 | 1.473E-06 | 4.108E-06 | 2.827E-06 | 4.338E-06 | 4.179E-06 | 5.145E-06 | 2.610E-06 | 5.504E-06 | 3.626E-06 | 5.492E-06 |
| 2. | 1.656E-06 | 3.938E-06 | 2.497E-06 | 3.681E-06 | 3.114E-06 | 3.248E-06 | 3.369E-06 | 3.360E-06 | 2.220E-06 | 3.195E-06 | 2.541E-06 | 2.951E-06 |
| 3. | 7.825E-06 | 2.445E-06 | 6.328E-06 | 2.040E-06 | 4.994E-06 | 1.767E-06 | 3.939E-06 | 3.128E-06 | 4.620E-06 | 2.522E-06 | 4.049E-06 | 2.076E-06 |
| 4. | 8.030E-28 | 5.916E-16 | 3.639E-20 | 2.023E-12 | 1.760E-15 | 1.911E-10 | 1.321E-12 | 7.799E-11 | 8.919E-13 | 9.043E-10 | 3.635E-11 | 3.636E-09 |
| 5. | 4.333E-09 | 4.356E-09 | 4.325E-09 | 4.348E-09 | 4.318E-09 | 4.341E-09 | 4.310E-09 | 4.303E-09 | 4.274E-09 | 4.296E-09 | 4.266E-09 | 4.289E-09 |
| 6. | 1.762E-08 | 1.770E-08 | 1.759E-08 | 1.767E-08 | 1.755E-08 | 1.764E-08 | 1.752E-08 | 1.749E-08 | 1.738E-08 | 1.746E-08 | 1.735E-08 | 1.743E-08 |
| 7. | 2.345E-29 | 5.130E-29 | 3.591E-29 | 7.821E-29 | 5.485E-29 | 1.187E-28 | 8.339E-29 | 1.265E-28 | 8.887E-29 | 1.926E-28 | 1.355E-28 | 2.898E-28 |
| 8. | 1.329E-28 | 2.907E-28 | 2.035E-28 | 4.432E-28 | 3.108E-28 | 6.726E-28 | 4.725E-28 | 7.166E-28 | 5.035E-28 | 1.091E-27 | 7.680E-28 | 1.642E-27 |
| 9. | 2.420E-29 | 5.320E-29 | 3.719E-29 | 8.140E-29 | 5.701E-29 | 1.240E-28 | 8.699E-29 | 1.324E-28 | 9.291E-29 | 2.008E-28 | 1.412E-28 | 3.054E-28 |
| 10. | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 11. | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

TOTAL CONCENTRATION (G/M**3)

1.007E-05 9.785E-06 1.032E-05 9.851E-06 1.096E-05 9.375E-06 1.151E-05 1.166E-05 9.471E-06 1.124E-05 1.024E-05 1.054E-05

*** RECEPTOR NUMBER ***

25. 26. 27. 28. 29. 30.

SOURCE PARTIAL CONCENTRATIONS (G/M**3)

| | | | | | | |
|----|-----------|-----------|-----------|-----------|-----------|-----------|
| 1. | 4.450E-06 | 5.255E-06 | 4.981E-06 | 2.809E-06 | 5.229E-06 | 3.566E-06 |
| 2. | 2.684E-06 | 2.675E-06 | 2.699E-06 | 1.870E-06 | 2.619E-06 | 2.062E-06 |
| 3. | 3.500L-06 | 1.746E-06 | 2.997E-06 | 3.350E-06 | 2.555E-06 | 3.088E-06 |
| 4. | 3.996E-10 | 7.263E-09 | 1.792E-05 | 1.927E-10 | 4.264E-09 | 9.088E-10 |
| 5. | 4.259E-09 | 4.282E-09 | 4.252E-09 | 4.223E-09 | 4.245E-09 | 4.216E-09 |
| 6. | 1.732E-08 | 1.740E-08 | 1.728E-08 | 1.718E-08 | 1.725E-08 | 1.714E-08 |
| 7. | 2.043E-28 | 4.350E-28 | 3.073E-28 | 2.169E-28 | 4.600E-28 | 3.253E-28 |
| 8. | 1.158E-27 | 2.465E-27 | 1.741E-27 | 1.229E-27 | 2.606E-27 | 1.843E-27 |
| 9. | 2.135E-28 | 4.601E-28 | 3.246E-28 | 2.272E-28 | 4.876E-28 | 3.444E-28 |

CHECK MP USING 1977 BL JYR72 JDAY 175 ADJ THROUGH FP&L

0.

| *** SOURCES *** | | | | | | | | |
|-----------------|-----------|--------|------------|------------|-------|--------------|---------|----------|
| NO. | O (G/SEC) | HP (M) | TS (DEG-K) | VS (M/SEC) | D (M) | VF(M**3/SEC) | R (KM) | S (KM) |
| 1. | 1.43 | 38.4 | 325.0 | 10.9 | 2.40 | 0.0 | 362.900 | 3082.500 |
| 2. | 2.85 | 19.8 | 349.0 | 11.3 | 2.40 | 0.0 | 360.100 | 3087.500 |
| 3. | 0.72 | 65.3 | 402.0 | 9.6 | 3.40 | 0.0 | 358.000 | 3091.000 |
| 4. | 1.41 | 61.7 | 397.0 | 6.4 | 3.70 | 0.0 | 358.000 | 3091.000 |
| 5. | 4.23 | 85.3 | 402.0 | 9.6 | 3.40 | 0.0 | 358.000 | 3091.000 |
| 6. | 0.98 | 85.3 | 436.0 | 13.8 | 2.40 | 0.0 | 358.000 | 3091.000 |
| 7. | 44.57 | 149.3 | 405.0 | 19.1 | 7.30 | 0.0 | 361.900 | 3075.000 |
| 8. | 15.52 | 149.3 | 410.0 | 9.1 | 7.30 | 0.0 | 361.900 | 3075.000 |
| 9. | 4.57 | 93.3 | 427.0 | 14.7 | 3.00 | 0.0 | 360.000 | 3087.500 |
| 10. | 2.91 | 93.3 | 427.0 | 16.6 | 3.00 | 0.0 | 360.000 | 3087.500 |
| 11. | 5.56 | 93.3 | 381.0 | 18.7 | 3.20 | 0.0 | 360.000 | 3087.500 |
| 12. | 12.50 | 93.3 | 414.0 | 13.5 | 2.90 | 0.0 | 360.000 | 3087.500 |
| 13. | 13.44 | 93.3 | 415.0 | 15.1 | 4.40 | 0.0 | 360.000 | 3087.500 |
| 14. | 6.14 | 93.3 | 417.0 | 17.5 | 5.40 | 0.0 | 360.000 | 3087.500 |
| 15. | 1.30 | 61.0 | 337.0 | 10.3 | 2.40 | 0.0 | 346.500 | 3057.300 |
| 16. | 0.75 | 29.0 | 333.0 | 26.0 | 0.90 | 0.0 | 346.800 | 3041.100 |
| 17. | 1.35 | 21.6 | 563.0 | 11.9 | 1.90 | 0.0 | 346.800 | 3041.100 |
| 18. | 40.02 | 152.1 | 425.0 | 20.7 | 7.90 | 0.0 | 367.100 | 3053.800 |
| 19. | 99.04 | 152.1 | 425.0 | 20.7 | 7.90 | 0.0 | 367.100 | 3053.800 |

| *** REFLECTIONS *** | | |
|---------------------|----------|----------|
| NO. | KREC(KM) | SREC(KM) |
| 1. | 389.000 | 3047.100 |

| *** METEOROLOGY *** | | | | | |
|---------------------|------------|-----------|-----|--------|-----------|
| NO. | THETA(DEG) | U (M/SEC) | KST | HL (M) | T (DEG-K) |
| 1. | 289. | 5.1 | 4 | 1332. | 300.0 |

| *** RECEPTOR NUMBER *** | |
|-------------------------|--|
| 1. | |

| SOURCE | PARTIAL CONCENTRATIONS (G/M**3) |
|--------|---------------------------------|
| 1. | 0.0 |
| 2. | 0.0 |
| 3. | 0.0 |
| 4. | 0.0 |
| 5. | 0.0 |
| 6. | 0.0 |
| 7. | 0.0 |
| 8. | 0.0 |
| 9. | 0.0 |
| 10. | 0.0 |
| 11. | 0.0 |
| 12. | 0.0 |
| 13. | 0.0 |
| 14. | 0.0 |
| 15. | 1.490E-09 |
| 16. | 0.0 |
| 17. | 0.0 |
| 18. | 8.833E-07 |
| 19. | 2.186E-06 |

AVERAGE CONCENTRATIONS FOR 24 HOURS.

* * * R F C E P T O R N U M B E R * * *

1.

SOURCE PARTIAL CONCENTRATIONS (G/M³)

1. 1.001E-26
2. 1.745E-28
3. 2.080E-30
4. 4.154E-30
5. 1.215E-29
6. 2.760E-30
7. 5.870E-15
8. 2.742E-15
9. 2.449E-28
10. 1.544E-28
11. 2.969E-28
12. 6.808E-28
13. 6.634E-28
14. 2.693E-28
15. 3.107E-06
16. 5.193E-12
17. 1.010E-11
18. 4.963E-07
19. 1.228E-06

TOTAL CONCENTRATION (G/M³)

1.756E-06

CHECK PB USING 1977 BL JYR72 JDAY174 ADJ THROUGH FPCL

0.

| *** SOURCE S *** | | | | | | | | |
|------------------|-----------|--------|------------|------------|------|--------------|---------|----------|
| NO. | G (G/SEC) | HP (M) | TS (DEG-K) | VS (M/SEC) | D(M) | VF(M**3/SEC) | R (KM) | S (KM) |
| 1. | 1.43 | 38.4 | 325.0 | 10.9 | 2.40 | 0.0 | 362.900 | 3082.500 |
| 2. | 2.85 | 19.8 | 349.0 | 11.3 | 2.40 | 0.0 | 360.100 | 3087.500 |
| 3. | 0.72 | 85.3 | 402.0 | 9.6 | 3.40 | 0.0 | 358.000 | 3091.000 |
| 4. | 1.41 | 81.7 | 397.0 | 6.4 | 3.70 | 0.0 | 358.000 | 3091.000 |
| 5. | 4.23 | 85.3 | 402.0 | 9.6 | 3.40 | 0.0 | 358.000 | 3091.000 |
| 6. | 0.98 | 85.3 | 436.0 | 13.8 | 2.90 | 0.0 | 358.000 | 3091.000 |
| 7. | 44.57 | 149.3 | 405.0 | 19.1 | 7.30 | 0.0 | 361.900 | 3075.000 |
| 8. | 15.52 | 149.3 | 410.0 | 9.1 | 7.30 | 0.0 | 361.900 | 3075.000 |
| 9. | 4.57 | 93.3 | 427.0 | 14.7 | 3.00 | 0.0 | 360.000 | 3087.500 |
| 10. | 2.91 | 93.3 | 427.0 | 16.6 | 3.00 | 0.0 | 360.000 | 3087.500 |
| 11. | 5.56 | 93.3 | 381.0 | 18.7 | 3.20 | 0.0 | 360.000 | 3087.500 |
| 12. | 12.50 | 93.3 | 414.0 | 13.5 | 2.90 | 0.0 | 360.000 | 3087.500 |
| 13. | 13.44 | 93.3 | 415.0 | 15.1 | 4.40 | 0.0 | 360.000 | 3087.500 |
| 14. | 6.14 | 93.3 | 417.0 | 17.5 | 5.40 | 0.0 | 360.000 | 3087.500 |
| 15. | 1.36 | 61.0 | 337.0 | 10.3 | 2.40 | 0.0 | 348.500 | 3057.300 |
| 16. | 0.75 | 29.0 | 333.0 | 20.0 | 0.90 | 0.0 | 346.800 | 3041.100 |
| 17. | 1.39 | 21.6 | 563.0 | 11.9 | 1.90 | 0.0 | 346.800 | 3041.100 |
| 18. | 40.02 | 152.1 | 425.0 | 20.7 | 7.90 | 0.0 | 367.100 | 3053.800 |
| 19. | 99.04 | 152.1 | 425.0 | 20.7 | 7.90 | 0.0 | 367.100 | 3053.800 |

| *** REC F P T D K S *** | | | |
|-------------------------|----------|----------|-------|
| NU. | RRFC(KM) | SREC(KM) | Z (M) |
| 1. | 390.95C | 3046.670 | 0.0 |
| 2. | 390.88C | 3046.680 | 0.0 |

| *** METEOROLOGY *** | | | | | | |
|---------------------|------------|-----------|-----|--------|-----------|--------|
| NU. | THETA(DEG) | U (M/SEC) | KST | HL (M) | T (DEG-K) | P (MB) |
| 1. | 280. | 5.7 | 4 | 785. | 300.0 | 1013.0 |

| *** RECEPTOR NUMBER *** | | |
|-------------------------|----|--|
| 1. | 2. | |

| SOURCE | PARTIAL CONCENTRATIONS (G/M**3) | |
|--------|---------------------------------|--|
|--------|---------------------------------|--|

| | | |
|-----|-----------|-----------|
| 1. | 0.0 | 0.0 |
| 2. | 0.0 | 0.0 |
| 3. | 0.0 | 0.0 |
| 4. | 0.0 | 0.0 |
| 5. | 0.0 | 0.0 |
| 6. | 0.0 | 0.0 |
| 7. | 0.0 | 0.0 |
| 8. | 0.0 | 0.0 |
| 9. | 0.0 | 0.0 |
| 10. | 0.0 | 0.0 |
| 11. | 0.0 | 0.0 |
| 12. | 0.0 | 0.0 |
| 13. | 0.0 | 0.0 |
| 14. | 0.0 | 0.0 |
| 15. | 2.110E-08 | 2.104E-08 |
| 16. | 5.749E-18 | 5.435E-18 |
| 17. | 1.124E-17 | 1.063E-17 |
| 18. | 7.120E-08 | 6.998E-08 |
| 19. | 1.764E-07 | 1.732E-07 |

AVERAGE CONCENTRATIONS FOR 24 HOURS.

* * * R F C E P T O R N U M B E R * * *

1. 2.

SOURCE PARTIAL CONCENTRATIONS (G/M**3)

| | | |
|-----|-----------|-----------|
| 1. | 1.186E-19 | 1.056E-19 |
| 2. | 1.486E-20 | 1.325E-20 |
| 3. | 5.673E-22 | 5.069E-22 |
| 4. | 1.111E-21 | 9.930E-22 |
| 5. | 3.314E-21 | 2.961E-21 |
| 6. | 7.645E-22 | 6.831E-22 |
| 7. | 9.216E-13 | 8.624E-13 |
| 8. | 3.210E-13 | 3.004E-13 |
| 9. | 2.107E-20 | 1.879E-20 |
| 10. | 1.342E-20 | 1.197E-20 |
| 11. | 2.562E-20 | 2.285E-20 |
| 12. | 5.759E-20 | 5.137E-20 |
| 13. | 6.194E-20 | 5.526E-20 |
| 14. | 2.828E-20 | 2.523E-20 |
| 15. | 2.543E-08 | 2.551E-08 |
| 16. | 9.228E-13 | 8.935E-13 |
| 17. | 1.797E-12 | 1.740E-12 |
| 18. | 5.288E-07 | 5.238E-07 |
| 19. | 1.309E-06 | 1.309E-06 |

TOTAL CONCENTRATION (G/M**3)

1.863E-06 1.863E-06

DETERM MP CONC FOR 1/3 HE SOURCES AAQS YR 73JDAY 024 ADJ TO 014 DEG

0.

* * * S C O U R C E S * * *

| NO. | O (G/SEC) | HP (M) | TS (DEG-K) | VS (M/SEC) | D(M) | VF(M**3/SEC) | R (KM) | S (KM) |
|-----|-----------|--------|------------|------------|------|--------------|---------|----------|
| 1. | 1.21 | 46.3 | 309.0 | 19.0 | 1.80 | 0.0 | 393.800 | 3096.300 |
| 2. | 1.60 | 38.1 | 342.0 | 14.2 | 2.40 | 0.0 | 389.500 | 3067.900 |
| 3. | 1.88 | 38.1 | 344.0 | 20.2 | 2.40 | 0.0 | 389.500 | 3067.900 |
| 4. | 0.19 | 22.9 | 305.0 | 9.9 | 0.90 | 0.0 | 389.500 | 3067.900 |
| 5. | 0.04 | 22.9 | 305.0 | 8.5 | 1.20 | 0.0 | 389.500 | 3067.900 |
| 6. | 5.34 | 30.5 | 372.0 | 36.4 | 1.20 | 0.0 | 394.700 | 3069.600 |
| 7. | 5.34 | 8.2 | 305.0 | 12.1 | 0.90 | 0.0 | 394.700 | 3069.600 |
| 8. | 6.36 | 8.1 | 305.0 | 11.4 | 1.00 | 0.0 | 394.700 | 3069.600 |
| 9. | 2.30 | 18.9 | 339.0 | 37.0 | 1.30 | 0.0 | 415.200 | 3080.000 |
| 10. | 3.08 | 16.8 | 344.0 | 9.6 | 2.80 | 0.0 | 415.200 | 3080.000 |
| 11. | 0.89 | 18.3 | 305.0 | 20.8 | 0.70 | 0.0 | 398.300 | 3075.500 |
| 12. | 0.12 | 30.5 | 305.0 | 23.0 | 0.50 | 0.0 | 398.300 | 3075.500 |
| 13. | 1.99 | 32.3 | 305.0 | 15.8 | 2.10 | 0.0 | 398.300 | 3075.500 |
| 14. | 0.03 | 32.3 | 305.0 | 12.1 | 0.80 | 0.0 | 398.300 | 3075.500 |
| 15. | 0.15 | 10.7 | 305.0 | 10.3 | 0.80 | 0.0 | 398.300 | 3075.500 |
| 16. | 2.85 | 19.2 | 305.0 | 7.1 | 2.90 | 0.0 | 415.300 | 3063.300 |
| 17. | 2.94 | 27.1 | 348.0 | 11.3 | 0.90 | 0.0 | 418.700 | 3083.600 |
| 18. | 2.90 | 30.5 | 305.0 | 35.9 | 0.90 | 0.0 | 409.900 | 3086.900 |
| 19. | 1.87 | 24.4 | 327.0 | 11.7 | 0.50 | 0.0 | 398.400 | 3085.300 |
| 20. | 1.82 | 12.2 | 305.0 | 0.0 | 0.0 | 0.0 | 398.400 | 3085.300 |
| 21. | 3.11 | 61.0 | 305.0 | 10.6 | 2.10 | 0.0 | 406.900 | 3085.100 |
| 22. | 2.25 | 25.6 | 341.0 | 25.4 | 1.50 | 0.0 | 416.000 | 3065.000 |
| 23. | 4.38 | 36.6 | 305.0 | 11.3 | 1.50 | 0.0 | 408.300 | 3082.700 |
| 24. | 3.71 | 42.7 | 354.0 | 13.3 | 0.90 | 0.0 | 408.300 | 3082.700 |
| 25. | 3.71 | 42.7 | 329.0 | 8.7 | 1.80 | 0.0 | 408.300 | 3082.700 |

* * * R E C E P T C R S * * *

| NO. | RREC(KM) | SREC(KM) | Z (M) |
|-----|----------|----------|-------|
| 1. | 388.700 | 3047.100 | 0.0 |
| 2. | 388.800 | 3047.100 | 0.0 |
| 3. | 388.900 | 3047.100 | 0.0 |
| 4. | 388.700 | 3047.000 | 0.0 |
| 5. | 388.800 | 3047.000 | 0.0 |
| 6. | 388.700 | 3046.900 | 0.0 |
| 7. | 388.800 | 3046.900 | 0.0 |
| 8. | 388.600 | 3046.800 | 0.0 |
| 9. | 388.700 | 3046.800 | 0.0 |
| 10. | 388.800 | 3046.800 | 0.0 |
| 11. | 388.600 | 3046.700 | 0.0 |
| 12. | 388.700 | 3046.700 | 0.0 |
| 13. | 388.800 | 3046.700 | 0.0 |
| 14. | 388.600 | 3046.600 | 0.0 |
| 15. | 388.700 | 3046.600 | 0.0 |
| 16. | 388.600 | 3046.500 | 0.0 |
| 17. | 388.700 | 3046.500 | 0.0 |
| 18. | 388.500 | 3046.400 | 0.0 |
| 19. | 388.600 | 3046.400 | 0.0 |
| 20. | 388.700 | 3046.400 | 0.0 |
| 21. | 388.500 | 3046.300 | 0.0 |
| 22. | 388.600 | 3046.300 | 0.0 |
| 23. | 388.700 | 3046.300 | 0.0 |
| 24. | 388.500 | 3046.200 | 0.0 |
| 25. | 388.600 | 3046.200 | 0.0 |
| 26. | 388.500 | 3046.100 | 0.0 |
| 27. | 388.600 | 3046.100 | 0.0 |

28. 388.400 3046.000
29. 388.500 3046.000
30. 388.600 3046.000

* * * M E T E O R O L O G Y * * *

| NU. | T H L T A (DEG) | U (M/SEC) | KST | H L (M) | T (DEG-K) | P (MB) |
|-----|-----------------|-----------|-----|---------|-----------|--------|
|-----|-----------------|-----------|-----|---------|-----------|--------|

1. 80. 1.0 4 401. 289.0 1013.0

* * * RECEPTOR NUMBER * * *

1. _____ 2. _____ 3. _____ 4. _____ 5. _____ 6. _____ 7. _____ 8. _____ 9. _____ 10. _____ 11. _____ 12. _____

SOURCE PARTIAL CONCENTRATIONS (G/M³)

TOTAL CONCENTRATION (G/M³)

8-169E-21 6-081E-21 4-505E-21 4-750E-21 3-522E-21 2-74EE-21 2-030E-21 2-146E-21 1-583E-21 1-165E-21 1-239E-21 9-101E-22

* * * RECEPTOR NUMBER * * *

13. 14. 15. 16. 17. 18. 19. 20. 21. 22. 23. 24.

SOURCE PARTIAL CONCENTRATIONS (G/M***)

AVERAGE CONCENTRATIONS FOR 24 HOURS.

* * * R E C E P T O R N U M B E R * * *

| | 1. | 2. | 3. | 4. | 5. | 6. | 7. | 8. | 9. | 10. | 11. | 12. |
|--|----|----|----|----|----|----|----|----|----|-----|-----|-----|
|--|----|----|----|----|----|----|----|----|----|-----|-----|-----|

SOURCE PARTIAL CONCENTRATIONS (G/M**3)

| | | | | | | | | | | | | |
|-----|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| 1. | 1.936E-08 | 1.850E-08 | 1.764E-08 | 1.922E-08 | 1.836E-08 | 1.908E-08 | 1.823E-08 | 1.980E-08 | 1.895E-08 | 1.809E-08 | 1.966E-08 | 1.881E-08 |
| 2. | 1.700E-08 | 1.835E-08 | 2.107E-08 | 1.691E-08 | 1.831E-08 | 1.683E-08 | 1.826E-08 | 1.648E-08 | 1.675E-08 | 1.822E-08 | 1.635E-08 | 1.667E-08 |
| 3. | 1.758E-08 | 1.859E-08 | 2.092E-08 | 1.748E-08 | 1.854E-08 | 1.734E-08 | 1.848E-08 | 1.734E-08 | 1.730E-08 | 1.844E-08 | 1.720E-08 | 1.721E-08 |
| 4. | 4.203E-09 | 5.136E-09 | 6.548E-09 | 4.196E-09 | 5.135E-09 | 4.189E-09 | 5.134E-09 | 3.636E-09 | 4.183E-09 | 5.133E-09 | 3.621E-09 | 4.177E-09 |
| 5. | 9.110E-09 | 1.108E-09 | 1.407E-09 | 9.094E-10 | 1.108E-09 | 9.078E-10 | 1.107E-09 | 7.919E-10 | 9.063E-10 | 1.107E-C9 | 7.886E-10 | 9.049E-10 |
| 6. | 1.832E-07 | 1.939E-07 | 2.053E-07 | 1.847E-07 | 1.955E-07 | 1.863E-07 | 1.971E-07 | 1.775E-07 | 1.878E-07 | 1.987E-07 | 1.790E-07 | 1.894E-07 |
| 7. | 2.729F-07 | 2.896F-07 | 3.073F-07 | 2.753F-07 | 2.921E-07 | 2.777E-07 | 2.945E-07 | 2.641E-07 | 2.801E-07 | 2.970E-07 | 2.664E-07 | 2.824E-07 |
| 8. | 3.262E-07 | 3.461E-07 | 3.673E-07 | 3.291E-07 | 3.491E-07 | 3.319E-07 | 3.520E-07 | 3.157E-07 | 3.347E-07 | 3.550E-07 | 3.184E-07 | 3.376E-07 |
| 9. | 8.723E-09 | 8.985E-09 | 9.241E-09 | 8.896E-09 | 9.151E-09 | 9.062E-09 | 9.310E-09 | 8.973E-09 | 9.222E-09 | 9.461E-09 | 9.133E-09 | 9.373E-09 |
| 10. | 1.193E-08 | 1.229E-08 | 1.264F-08 | 1.217E-08 | 1.252E-08 | 1.240E-08 | 1.274E-08 | 1.228E-08 | 1.262E-08 | 1.294E-08 | 1.250E-08 | 1.282E-08 |
| 11. | 1.624F-08 | 1.612E-08 | 1.633E-08 | 1.611E-08 | 1.600E-08 | 1.598E-08 | 1.589E-08 | 1.598E-08 | 1.586E-C8 | 1.578E-08 | 1.586E-08 | 1.575E-08 |
| 12. | 1.853E-09 | 1.840E-09 | 1.830E-09 | 1.839E-09 | 1.826E-09 | 1.824E-09 | 1.813E-09 | 1.824E-09 | 1.811E-09 | 1.800E-09 | 1.810E-09 | 1.797E-09 |
| 13. | 3.097E-08 | 3.075E-08 | 3.058F-08 | 3.073E-08 | 3.052E-08 | 3.049E-08 | 3.031E-08 | 3.049E-08 | 3.027E-08 | 3.010E-08 | 3.025E-C8 | 3.005E-08 |
| 14. | 5.035E-10 | 4.998E-10 | 4.971F-10 | 4.995E-10 | 4.961E-10 | 4.956E-10 | 4.926E-10 | 4.956E-10 | 4.919E-10 | 4.892E-10 | 4.917E-10 | 4.883E-10 |
| 15. | 3.056E-09 | 3.034E-09 | 3.018E-09 | 3.032E-09 | 3.012E-09 | 3.009E-09 | 2.990E-09 | 3.008E-C9 | 2.986E-09 | 2.970E-09 | 2.984E-09 | 2.964E-09 |
| 16. | 1.020E-08 | 9.682F-09 | 9.175E-09 | 9.266E-09 | 8.775E-09 | 8.388E-09 | 7.926E-09 | 8.017E-09 | 7.569E-09 | 7.137E-09 | 7.230E-09 | 6.812E-09 |
| 17. | 7.347E-09 | 7.61CE-09 | 7.872E-09 | 7.532E-09 | 7.792E-09 | 7.714E-09 | 7.973E-09 | 7.636E-09 | 7.894E-09 | 8.149E-09 | 7.815E-09 | 8.070E-09 |
| 18. | 3.429E-09 | 3.711E-09 | 4.013E-09 | 3.560E-09 | 3.651E-09 | 3.696E-09 | 3.995E-09 | 3.547E-09 | 3.836E-09 | 4.143E-09 | 3.681E-C9 | 3.978E-09 |
| 19. | 3.797E-08 | 3.942E-08 | 4.091E-08 | 3.818E-08 | 3.944E-08 | 3.839E-08 | 3.985E-08 | 3.718E-08 | 3.861E-08 | 4.006E-08 | 3.739E-08 | 3.882E-08 |
| 20. | 4.409E-08 | 4.580E-08 | 4.756E-08 | 4.435E-08 | 4.605E-08 | 4.460E-08 | 4.631E-08 | 4.318E-08 | 4.485E-08 | 4.656E-08 | 4.343E-08 | 4.510E-08 |
| 21. | 1.343E-08 | 1.414E-08 | 1.486E-08 | 1.372E-08 | 1.443E-08 | 1.400E-08 | 1.471E-08 | 1.358E-08 | 1.429E-08 | 1.500E-08 | 1.386E-08 | 1.457E-08 |
| 22. | 1.316F-12 | 1.117E-12 | 9.467E-13 | 1.055E-12 | 8.951E-13 | 8.457E-13 | 7.173E-13 | 7.997E-13 | 6.783E-13 | 5.761E-13 | 6.423E-13 | 5.458E-13 |
| 23. | 3.433E-09 | 3.749E-09 | 4.097E-09 | 3.584E-09 | 3.914E-09 | 3.741E-09 | 4.086E-09 | 3.577E-09 | 3.906E-09 | 4.266E-09 | 3.733E-09 | 4.077E-09 |
| 24. | 2.789E-09 | 3.045E-09 | 3.327E-09 | 2.911E-09 | 3.179E-09 | 3.039E-C9 | 3.319E-C9 | 2.906E-09 | 3.173E-09 | 3.465E-09 | 3.033E-09 | 3.312E-09 |
| 25. | 2.777E-09 | 3.031E-09 | 3.312E-09 | 2.898E-09 | 3.165E-09 | 3.026E-09 | 3.304E-09 | 2.893E-09 | 3.159E-09 | 3.449E-09 | 3.019E-09 | 3.297E-09 |

TOTAL CONCENTRATION (G/M**3)

1.040E-06 1.095E-06 1.156E-06 1.047E-06 1.102E-06 1.054E-06 1.110E-06 1.011E-06 1.061E-06 1.117E-06 1.018E-06 1.068E-06

* * * R E C E P T O R N U M B E R * * *

| | 13. | 14. | 15. | 16. | 17. | 18. | 19. | 20. | 21. | 22. | 23. | 24. |
|--|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
|--|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|

SOURCE PARTIAL CONCENTRATIONS (G/M**3)

| | | | | | | | | | | | | |
|-----|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| 1. | 1.796E-08 | 1.952E-08 | 1.867E-08 | 1.938E-08 | 1.854E-08 | 2.008E-08 | 1.924E-08 | 1.840E-08 | 1.994E-08 | 1.910E-08 | 1.827E-08 | 1.980E-08 |
| 2. | 1.818E-08 | 1.623F-08 | 1.659F-08 | 1.611E-08 | 1.652E-08 | 1.657E-08 | 1.599E-08 | 1.641E-08 | 1.588E-08 | 1.638E-08 | 1.625E-08 | |
| 3. | 1.839E-08 | 1.707E-08 | 1.712E-08 | 1.693E-08 | 1.704E-08 | 1.768E-08 | 1.680E-C8 | 1.696E-08 | 1.750E-08 | 1.668E-C8 | 1.689E-C8 | 1.733E-08 |
| 4. | 5.132F-09 | 3.607E-09 | 4.172E-09 | 3.593E-09 | 4.167E-09 | 3.331E-09 | 3.581E-C9 | 4.162E-09 | 3.308E-09 | 3.568E-09 | 4.157E-09 | 3.287E-09 |
| 5. | 1.107F-09 | 7.854F-10 | 9.036F-10 | 7.824E-10 | 9.024E-10 | 7.288E-10 | 7.794E-10 | 9.013E-10 | 7.237E-10 | 7.766E-10 | 9.002E-10 | 7.189E-10 |
| 6. | 2.003E-07 | 1.805E-07 | 1.9C9E-07 | 1.820E-07 | 1.920E-07 | 1.735E-07 | 1.835E-07 | 1.940E-07 | 1.750E-07 | 1.850E-C7 | 1.955E-C7 | 1.764E-07 |
| 7. | 2.994E-07 | 2.686E-07 | 2.848E-07 | 2.709E-07 | 2.872E-07 | 2.579E-07 | 2.732E-07 | 2.895E-07 | 2.601E-07 | 2.755E-07 | 2.919E-07 | 2.623E-07 |
| 8. | 3.579E-07 | 3.211E-07 | 3.4C4E-07 | 3.238E-07 | 3.432E-07 | 3.082E-07 | 3.265E-07 | 3.461E-07 | 3.109E-07 | 3.293E-07 | 3.489E-07 | 3.135E-07 |
| 9. | 9.605E-09 | 9.286E-09 | 9.518E-09 | 9.431E-09 | 9.654E-09 | 9.345E-09 | 9.569E-09 | 9.782E-09 | 9.484E-09 | 9.698E-09 | 9.902E-09 | 9.614E-09 |
| 10. | 1.314E-08 | 1.271E-08 | 1.32CE-08 | 1.290E-08 | 1.321E-08 | 1.279E-08 | 1.309E-08 | 1.338E-08 | 1.298E-08 | 1.327E-08 | 1.355E-C8 | 1.316E-08 |
| 11. | 1.567E-08 | 1.573E-08 | 1.564E-08 | 1.553E-08 | 1.561E-08 | 1.550E-C8 | 1.543E-08 | 1.549E-08 | 1.539E-08 | 1.533E-08 | 1.538E-08 | |
| 12. | 1.789E-09 | 1.796E-09 | 1.785E-09 | 1.782E-09 | 1.772E-09 | 1.782E-09 | 1.769E-09 | 1.761E-09 | 1.768E-09 | 1.757E-09 | 1.749E-09 | 1.755E-09 |
| 13. | 2.990E-08 | 3.002E-08 | 2.984E-08 | 2.980E-08 | 2.963E-08 | 2.979E-08 | 2.956E-08 | 2.944E-08 | 2.956E-08 | 2.938E-08 | 2.925E-08 | 2.935E-08 |
| 14. | 4.859F-10 | 4.879F-10 | 4.849E-10 | 4.843E-10 | 4.815E-10 | 4.841E-10 | 4.808E-10 | 4.783E-10 | 4.804E-10 | 4.774E-10 | 4.753E-10 | 4.768E-10 |
| 15. | 2.950E-09 | 2.961F-09 | 2.943E-09 | 2.939E-09 | 2.923E-09 | 2.938E-09 | 2.918E-C9 | 2.904E-09 | 2.915E-09 | 2.897E-09 | 2.885E-09 | 2.894E-09 |
| 16. | 6.408E-09 | 6.499E-09 | 6.110E-09 | 5.826E-09 | 5.465E-09 | 5.553F-09 | 5.206E-09 | 4.872E-09 | 4.558E-09 | 4.638E-09 | 4.330E-09 | 4.414E-09 |
| 17. | 9.322E-09 | 7.991L-09 | 8.242E-09 | 8.163E-09 | 8.411E-09 | 8.084E-09 | 8.331E-09 | 8.575E-09 | 8.252E-09 | 8.495E-09 | 8.735E-09 | 8.416E-09 |
| 18. | 4.294E-09 | 3.819E-09 | 4.125E-09 | 3.961F-09 | 4.274E-09 | 3.804E-09 | 4.106E-09 | 4.428E-09 | 3.944E-09 | 4.254E-09 | 4.585E-09 | 4.088E-09 |

19. 4.027E-08 3.760E-08 3.903E-08 3.781E-08 3.924E-08 3.663E-08 3.802E-08 3.945E-08 3.684E-08 3.823E-08 3.965E-08 3.705E-08
 20. 4.681E-08 4.367E-08 4.535E-08 4.392E-08 4.559E-08 4.254E-08 4.416E-08 4.584E-08 4.278E-08 4.441E-08 4.608E-08 4.302E-08
 21. 1.528E-08 1.414E-08 1.485E-08 1.442E-08 1.513E-08 1.401E-08 1.470E-08 1.541E-08 1.428E-08 1.498E-08 1.569E-08 1.456E-08
 22. 4.652E-13 5.172E-13 4.413E-13 4.192E-13 3.602E-13 3.980E-13 3.429E-13 3.265E-13 2.850E-13 2.526E-13 2.726E-13
 23. 4.452E-09 3.897E-09 4.255E-09 4.067E-09 4.440E-09 3.888E-09 4.244E-09 4.632E-09 4.058E-09 4.427E-09 4.831E-09 4.233E-09
 24. 3.616E-09 3.165E-09 3.456E-09 3.303E-09 3.606E-09 3.159E-09 3.447E-09 3.762E-09 3.296E-09 3.596E-09 3.923E-09 3.438E-09
 25. 3.599E-09 3.151E-09 3.441E-09 3.289E-09 3.590E-09 3.145E-09 3.432E-09 3.745E-09 3.202E-09 3.580E-09 3.906E-09 3.423E-09

TOTAL CONCENTRATION (G/M**3)

1.125E-06 1.024E-06 1.076E-06 1.031E-06 1.083E-06 9.916E-07 1.038E-06 1.090E-06 9.981E-07 1.045E-06 1.098E-06 1.005E-06

*** RECEPTOR NUMBER ***

25. 26. 27. 28. 29. 30.

SOURCE PARTIAL CONCENTRATIONS (G/M**3)

1. 1.897E-08 1.966E-08 1.883E-08 2.034E-08 1.952E-08 1.870E-08
 2. 1.577E-08 1.609E-08 1.566E-08 1.721E-08 1.594E-08 1.556E-08
 3. 1.656E-08 1.716E-08 1.644E-08 1.855E-08 1.699E-08 1.633E-08
 4. 3.557E-09 3.266E-09 3.545E-09 3.221E-09 3.245E-09 3.535E-09
 5. 7.739E-10 7.141E-10 7.714E-10 7.074E-10 7.096E-10 7.689E-10
 6. 1.864E-07 1.779E-07 1.879E-07 1.697E-07 1.793E-07 1.894E-07
 7. 2.778E-07 2.645E-07 2.801E-07 2.519E-07 2.667E-07 2.823E-07
 8. 3.320E-07 3.161E-07 3.347E-07 3.011E-07 3.187E-07 3.375E-07
 9. 9.819E-09 9.736E-09 9.931E-09 9.654E-09 9.850E-09 1.003E-08
 10. 1.343E-08 1.332E-08 1.359E-08 1.321E-08 1.348E-08 1.373E-08
 11. 1.529F-08 1.526E-08 1.519E-08 1.525E-08 1.516E-08 1.509E-08
 12. 1.745E-09 1.742E-09 1.734E-09 1.741E-09 1.730E-09 1.723E-09
 13. 2.918E-08 2.913E-08 2.899L-08 2.912E-08 2.893E-08 2.881E-08
 14. 4.741E-10 4.734E-10 4.710E-10 4.731E-10 4.701E-10 4.680E-10
 15. 2.878E-09 2.873E-09 2.859E-09 2.871E-09 2.853E-09 2.841E-09
 16. 4.120E-09 3.918E-09 3.645E-09 3.727E-09 3.469E-09 3.223E-09
 17. 8.654F-09 8.576E-09 8.809E-09 8.497E-09 8.730E-09 8.958E-09
 18. 4.406E-09 4.235E-09 4.562E-09 4.069E-09 4.385E-09 4.720E-09
 19. 3.843E-08 3.725E-08 3.864E-08 3.609E-08 3.745E-08 3.884E-08
 20. 4.465E-08 4.326E-08 4.489E-08 4.191E-08 4.350E-08 4.513E-08
 21. 1.525E-08 1.483E-08 1.553E-08 1.442E-08 1.510E-08 1.580E-08
 22. 2.427E-13 2.332E-13 2.134E-13 2.245E-13 2.065E-13 1.957E-13
 23. 4.617E-09 4.415E-09 4.815E-09 4.221E-09 4.604E-09 5.018E-09
 24. 3.750E-09 3.587E-09 3.911E-09 3.429E-09 3.740E-09 4.076E-09
 25. 3.734E-09 3.571E-09 3.893E-09 3.414E-09 3.723E-09 4.057E-09

TOTAL CONCENTRATION (G/M**3)

1.052E-06 1.012E-06 1.059E-06 9.747E-07 1.018E-06 1.067E-06

DETERM MP CONG FOR 2/3 NE SOURCES AAQS YR 73JDAY 024 ADJ TO 014 DEG

0.

* * * S O U R C E S * * *

| NO. | G (G/SEC) | HP (M) | TS (DEG-K) | VS (M/SEC) | D(M) | VF(M**3/SEC) | R (KM) | S (KM) |
|-----|-----------|--------|------------|------------|------|--------------|---------|----------|
| 1. | 3.71 | 36.6 | 335.0 | 9.1 | 2.40 | 0.0 | 408.300 | 3082.800 |
| 2. | 2.06 | 36.6 | 333.0 | 14.7 | 2.30 | 0.0 | 408.300 | 3082.700 |
| 3. | 2.12 | 42.7 | 331.0 | 16.2 | 2.80 | 0.0 | 408.200 | 3082.700 |
| 4. | 2.60 | 39.3 | 356.0 | 8.8 | 1.20 | 0.0 | 409.500 | 3079.500 |
| 5. | 2.60 | 39.3 | 333.0 | 6.9 | 2.30 | 0.0 | 409.500 | 3079.500 |
| 6. | 5.61 | 50.3 | 305.0 | 40.6 | 0.70 | 0.0 | 409.500 | 3079.500 |
| 7. | 1.61 | 39.3 | 311.0 | 9.3 | 2.30 | 0.0 | 409.500 | 3079.500 |
| 8. | 1.52 | 39.9 | 305.0 | 10.8 | 2.40 | 0.0 | 409.500 | 3079.500 |
| 9. | 2.88 | 39.9 | 305.0 | 6.0 | 1.20 | 0.0 | 409.500 | 3079.500 |
| 10. | 4.07 | 15.2 | 353.0 | 16.5 | 0.50 | 0.0 | 409.500 | 3079.500 |
| 11. | 2.02 | 24.4 | 336.0 | 21.3 | 1.50 | 0.0 | 403.700 | 3079.000 |
| 12. | 2.84 | 9.1 | 305.0 | 111.0 | 0.30 | 0.0 | 407.900 | 3071.000 |
| 13. | 3.23 | 24.4 | 328.0 | 5.0 | 2.30 | 0.0 | 398.400 | 3084.200 |
| 14. | 1.81 | 49.5 | 305.0 | 16.3 | 1.80 | 0.0 | 398.400 | 3084.200 |
| 15. | 4.50 | 61.0 | 344.0 | 9.8 | 2.60 | 0.0 | 396.700 | 3079.400 |
| 16. | 1.71 | 61.0 | 344.0 | 9.8 | 2.60 | 0.0 | 396.700 | 3079.400 |
| 17. | 3.88 | 49.7 | 305.0 | 28.7 | 0.90 | 0.0 | 405.600 | 3079.400 |

* * * R E C E P T O R S * * *

| NO. | RREC(KM) | SREC(KM) | Z (M) |
|-----|----------|----------|-------|
|-----|----------|----------|-------|

| | | | |
|-----|---------|----------|-----|
| 1. | 388.700 | 3047.100 | 0.0 |
| 2. | 388.800 | 3047.100 | 0.0 |
| 3. | 388.900 | 3047.100 | 0.0 |
| 4. | 388.700 | 3047.000 | 0.0 |
| 5. | 388.800 | 3047.000 | 0.0 |
| 6. | 388.700 | 3046.900 | 0.0 |
| 7. | 388.800 | 3046.900 | 0.0 |
| 8. | 388.600 | 3046.800 | 0.0 |
| 9. | 388.700 | 3046.600 | 0.0 |
| 10. | 388.800 | 3046.600 | 0.0 |
| 11. | 388.600 | 3046.700 | 0.0 |
| 12. | 388.700 | 3046.700 | 0.0 |
| 13. | 388.800 | 3046.700 | 0.0 |
| 14. | 388.600 | 3046.600 | 0.0 |
| 15. | 388.700 | 3046.600 | 0.0 |
| 16. | 388.600 | 3046.500 | 0.0 |
| 17. | 388.700 | 3046.500 | 0.0 |
| 18. | 388.500 | 3046.400 | 0.0 |
| 19. | 388.600 | 3046.400 | 0.0 |
| 20. | 388.700 | 3046.400 | 0.0 |
| 21. | 388.500 | 3046.300 | 0.0 |
| 22. | 388.600 | 3046.300 | 0.0 |
| 23. | 388.700 | 3046.300 | 0.0 |
| 24. | 388.500 | 3046.200 | 0.0 |
| 25. | 388.600 | 3046.200 | 0.0 |
| 26. | 388.500 | 3046.100 | 0.0 |
| 27. | 388.600 | 3046.100 | 0.0 |
| 28. | 388.400 | 3046.000 | 0.0 |
| 29. | 388.500 | 3046.000 | 0.0 |
| 30. | 388.600 | 3046.000 | 0.0 |

* * * M E T E O R C L O G Y * * *

| NO. | THETA(DEG) | U (M/SEC) | KST | HL (M) | T (DEG-K) | P (MB) |
|-----|------------|-----------|-----|--------|-----------|--------|
| 1. | 80. | 1.0 | 4 | 401. | 299.0 | 1013.0 |

| SOURCE | PARTIAL CONCENTRATIONS (G/M**3) | | | | | | | |
|--------|---------------------------------|-----------|-----------|-----------|-----------|-----------|--|--|
| 1. | 4.003E-09 | 3.825E-09 | 4.173E-09 | 3.662E-09 | 3.991E-09 | 4.347E-09 | | |
| 2. | 2.110E-09 | 2.018E-09 | 2.200E-09 | 1.930E-09 | 2.105E-09 | 2.293E-09 | | |
| 3. | 2.230E-09 | 2.134E-09 | 2.324E-09 | 2.041E-09 | 2.224E-09 | 2.421E-09 | | |
| 4. | 2.228E-09 | 2.277E-09 | 2.115E-09 | 2.328E-09 | 2.163E-09 | 2.009E-09 | | |
| 5. | 2.215E-09 | 2.264E-09 | 2.103E-09 | 2.315E-09 | 2.150E-09 | 1.997E-09 | | |
| 6. | 4.523E-09 | 4.622E-09 | 4.294E-09 | 4.725E-09 | 4.390E-09 | 4.078E-09 | | |
| 7. | 1.379E-09 | 1.409E-09 | 1.309E-09 | 1.440E-09 | 1.338E-09 | 1.243E-09 | | |
| 8. | 1.303E-09 | 1.332E-09 | 1.237E-09 | 1.361E-09 | 1.265E-09 | 1.175E-09 | | |
| 9. | 2.476E-09 | 2.530E-09 | 2.350E-09 | 2.586E-09 | 2.403E-09 | 2.232E-09 | | |
| 10. | 4.480E-09 | 4.575E-09 | 4.253E-09 | 4.681E-09 | 4.348E-09 | 4.038E-09 | | |
| 11. | 1.866E-08 | 1.813E-08 | 1.897E-08 | 1.760E-08 | 1.844E-08 | 1.928E-08 | | |
| 12. | 2.411E-08 | 2.387E-08 | 2.433E-08 | 2.363E-08 | 2.410E-08 | 2.451E-08 | | |
| 13. | 6.180E-08 | 5.983L-08 | 6.217E-08 | 5.792E-08 | 6.019E-08 | 6.253E-08 | | |
| 14. | 2.865E-08 | 2.774E-08 | 2.881E-08 | 2.686E-08 | 2.791E-08 | 2.898E-08 | | |
| 15. | 9.530E-08 | 9.221E-08 | 9.577E-08 | 8.917E-08 | 9.268E-08 | 9.623E-08 | | |
| 16. | 3.629E-08 | 3.512L-08 | 3.647E-08 | 3.396E-08 | 3.530E-08 | 3.665E-08 | | |
| 17. | 1.006E-08 | 9.624E-09 | 1.043E-08 | 9.202E-09 | 9.982E-09 | 1.081E-08 | | |

TOTAL CONCENTRATION (G/M**3)

3.018E-07 2.935E-07 3.033E-07 2.854E-07 2.950E-07 3.048E-07

AVERAGE CONCENTRATIONS FOR 24 HOURS.

*** RECEPTOR NUMBER ***

1. 2. 3. 4. 5. 6. 7. 8. 9. 10. 11. 12.

SOURCE PARTIAL CONCENTRATIONS (G/M**3)

| | | | | | | | | | | | | |
|-----|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| 1. | 2.980E-09 | 3.254E-09 | 3.555E-09 | 3.111E-09 | 3.397E-09 | 3.248E-09 | 3.546E-09 | 3.105E-09 | 3.390E-09 | 3.701E-09 | 3.240E-09 | 3.538E-09 |
| 2. | 1.569E-09 | 1.713E-09 | 1.871E-09 | 1.638E-09 | 1.788E-09 | 1.710E-09 | 1.867E-09 | 1.635E-09 | 1.785E-09 | 1.949E-09 | 1.707E-09 | 1.863E-09 |
| 3. | 1.661E-09 | 1.814E-09 | 1.981E-09 | 1.734E-09 | 1.893E-09 | 1.810E-09 | 1.976E-09 | 1.731E-09 | 1.890E-09 | 2.062E-09 | 1.806E-09 | 1.972E-09 |
| 4. | 3.294E-09 | 3.068E-09 | 2.853E-09 | 3.131E-09 | 2.914E-09 | 2.975E-09 | 2.767E-09 | 3.037E-09 | 2.826E-09 | 2.627E-09 | 2.886E-09 | 2.684E-09 |
| 5. | 3.274E-09 | 3.050E-09 | 2.836E-09 | 3.113E-09 | 2.897E-09 | 2.957E-09 | 2.751E-09 | 3.019E-09 | 2.809E-09 | 2.611E-09 | 2.869E-09 | 2.668E-09 |
| 6. | 6.684E-09 | 6.222E-09 | 5.790E-09 | 6.354E-09 | 5.914E-09 | 6.038E-09 | 5.616E-09 | 6.163E-09 | 5.735E-09 | 5.331E-09 | 5.857E-09 | 5.446E-09 |
| 7. | 2.038E-09 | 1.898E-09 | 1.765E-09 | 1.937E-09 | 1.803E-09 | 1.841E-09 | 1.712E-09 | 1.879E-09 | 1.748E-09 | 1.625E-09 | 1.786E-09 | 1.660E-09 |
| 8. | 1.926E-09 | 1.794E-09 | 1.669E-09 | 1.831E-09 | 1.704E-09 | 1.740E-09 | 1.618E-09 | 1.776E-09 | 1.653E-09 | 1.536E-09 | 1.688E-09 | 1.569E-09 |
| 9. | 3.660E-09 | 3.409E-09 | 3.170E-09 | 3.480E-09 | 3.239E-09 | 3.306E-09 | 3.075E-09 | 3.375E-09 | 3.140E-09 | 2.919E-09 | 3.207E-09 | 2.982E-09 |
| 10. | 6.631E-09 | 6.175E-09 | 5.752E-09 | 6.303E-09 | 5.865E-09 | 5.988E-09 | 5.568E-09 | 6.112E-09 | 5.687E-09 | 5.285E-09 | 5.808E-09 | 5.400E-09 |
| 11. | 1.656E-08 | 1.744E-08 | 1.837E-08 | 1.691E-08 | 1.780E-08 | 1.725E-08 | 1.814E-08 | 1.670E-08 | 1.759E-08 | 1.847E-08 | 1.704E-08 | 1.792E-08 |
| 12. | 2.133E-08 | 2.211E-08 | 2.286E-08 | 2.182E-08 | 2.257E-08 | 2.229E-08 | 2.300E-08 | 2.201E-08 | 2.273E-08 | 2.340E-08 | 2.245E-08 | 2.313E-08 |
| 13. | 6.085E-08 | 6.328E-08 | 6.580E-08 | 6.123E-08 | 6.367E-08 | 6.160E-08 | 6.405E-08 | 5.960E-08 | 6.198E-08 | 6.443E-08 | 5.997E-08 | 6.235E-08 |
| 14. | 2.821E-08 | 2.933E-08 | 3.046E-08 | 2.838E-08 | 2.950E-08 | 2.855E-08 | 2.967E-08 | 2.764E-08 | 2.873E-08 | 2.985E-08 | 2.780E-08 | 2.890E-08 |
| 15. | 9.450E-08 | 9.829E-08 | 1.021E-07 | 9.502E-08 | 9.879E-08 | 9.553E-08 | 9.929E-08 | 9.233E-08 | 9.603E-08 | 9.978E-08 | 9.284E-08 | 9.653E-08 |
| 16. | 3.599E-08 | 3.743E-08 | 3.889E-08 | 3.619E-08 | 3.762E-08 | 3.638E-08 | 3.781E-08 | 3.516E-08 | 3.657E-08 | 3.800E-08 | 3.536E-08 | 3.676E-08 |
| 17. | 7.713E-09 | 8.424E-09 | 9.186E-09 | 8.036E-09 | 8.767E-09 | 8.368E-09 | 9.119E-09 | 7.984E-09 | 8.708E-09 | 9.478E-09 | 8.311E-09 | 9.054E-09 |

TOTAL CONCENTRATION (G/M**3)

2.989E-07 3.087E-07 3.190E-07 3.002E-07 3.101E-07 3.016E-07 3.116E-07 2.933E-07 3.030E-07 3.131E-07 2.946E-07 3.044E-07

*** RECEPTOR NUMBER ***

13. 14. 15. 16. 17. 18. 19. 20. 21. 22. 23. 24.

SOURCE PARTIAL CONCENTRATIONS (G/M**3)

| | | | | | | | | | | | | |
|-----|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| 1. | 3.861E-09 | 3.382E-09 | 3.692E-09 | 3.529E-09 | 3.851E-09 | 3.374E-09 | 3.681E-09 | 4.016E-09 | 3.521E-09 | 3.840E-09 | 4.187E-09 | 3.672E-09 |
| 2. | 2.034E-09 | 1.781E-09 | 1.944E-09 | 1.859E-09 | 2.029E-09 | 1.778E-09 | 1.940E-09 | 2.116E-09 | 1.855E-09 | 2.023E-09 | 2.207E-09 | 1.935E-09 |
| 3. | 2.151E-09 | 1.885E-09 | 2.057E-09 | 1.967E-09 | 2.146E-09 | 1.881E-09 | 2.052E-09 | 2.237E-09 | 1.962E-09 | 2.140E-09 | 2.332E-09 | 2.046E-09 |
| 4. | 2.493E-09 | 2.741E-09 | 2.548E-09 | 2.604E-09 | 2.419E-09 | 2.659E-09 | 2.472E-09 | 2.296E-09 | 2.525E-09 | 2.347E-09 | 2.179E-09 | 2.398E-09 |
| 5. | 2.479E-09 | 2.725E-09 | 2.533E-09 | 2.588E-09 | 2.405E-09 | 2.644E-09 | 2.458E-09 | 2.262E-09 | 2.511E-09 | 2.333E-09 | 2.166E-09 | 2.385E-09 |
| 6. | 5.060E-09 | 5.564E-09 | 5.171E-09 | 5.284E-09 | 4.909E-09 | 5.397E-09 | 5.017E-09 | 4.666E-09 | 5.126E-09 | 4.763E-09 | 4.423E-09 | 4.868E-09 |
| 7. | 1.543E-09 | 1.696E-09 | 1.576E-09 | 1.611E-09 | 1.496E-09 | 1.645E-09 | 1.529E-09 | 1.420E-09 | 1.563E-09 | 1.452E-09 | 1.348E-09 | 1.484E-09 |
| 8. | 1.458E-09 | 1.603E-09 | 1.490E-09 | 1.523E-09 | 1.414E-09 | 1.555E-09 | 1.446E-09 | 1.343E-09 | 1.477E-09 | 1.372E-09 | 1.274E-09 | 1.403E-09 |
| 9. | 2.771F-09 | 3.046E-09 | 2.831E-09 | 2.893E-09 | 2.688E-09 | 2.955E-09 | 2.747E-09 | 2.551E-09 | 2.806E-09 | 2.608E-09 | 2.421E-09 | 2.665E-09 |
| 10. | 5.016F-09 | 5.516E-09 | 5.125E-09 | 5.238E-09 | 4.865E-09 | 5.350E-09 | 4.972E-09 | 4.617E-09 | 5.080E-09 | 4.720E-09 | 4.381E-09 | 4.824E-09 |
| 11. | 1.880F-08 | 1.737E-08 | 1.825E-08 | 1.770E-08 | 1.857E-08 | 1.716E-08 | 1.803E-08 | 1.889E-08 | 1.749E-08 | 1.835E-08 | 1.921E-08 | 1.781E-08 |
| 12. | 2.376E-08 | 2.286E-08 | 2.349E-08 | 2.323E-08 | 2.382E-08 | 2.296E-08 | 2.356E-08 | 2.411E-08 | 2.330E-08 | 2.386E-08 | 2.436E-08 | 2.361E-08 |
| 13. | 6.481E-08 | 6.034E-08 | 6.273E-08 | 6.070E-08 | 6.310E-08 | 5.875E-08 | 6.107E-08 | 6.347E-08 | 5.911E-08 | 6.144E-08 | 6.384E-08 | 5.947E-08 |
| 14. | 3.002E-08 | 2.797E-08 | 2.927E-08 | 2.814E-08 | 2.924E-08 | 2.725E-08 | 2.831E-08 | 2.941E-08 | 2.741E-08 | 2.848E-08 | 2.958E-08 | 2.758E-08 |
| 15. | 1.003E-07 | 9.334E-08 | 9.722E-08 | 9.384E-08 | 9.751E-08 | 9.073E-08 | 9.433E-08 | 9.798E-08 | 9.123E-08 | 9.482E-08 | 9.846E-08 | 9.172E-08 |
| 16. | 3.818E-08 | 3.555E-08 | 3.655E-08 | 3.574E-08 | 3.713E-08 | 3.455E-08 | 3.592E-08 | 3.732E-08 | 3.474E-08 | 3.611E-08 | 3.750E-08 | 3.493E-08 |
| 17. | 9.844E-09 | 8.646E-09 | 9.409E-09 | 8.988E-09 | 9.770E-09 | 8.587E-09 | 9.339E-09 | 1.014E-08 | 8.926E-09 | 9.696E-09 | 1.051E-08 | 9.271E-09 |

TOTAL CONCENTRATION (G/M**3)

3.145E-07 2.960E-07 3.059E-07 2.974E-07 3.074E-07 2.892E-07 2.989E-07 3.089E-07 2.906E-07 3.003E-07 3.104E-07 2.921E-07

*** RECEPTOR NUMBER ***

25. 26. 27. 28. 29. 30.

DETEPM MP CINC FUR3 /3 NE SOURCES AAOS YR 73JDAY 024 ADJ TU 014 DEC /PSD

3.

*** SOURCES ***

| NO. | O (G/SEC) | HP (M) | TS (DEG-K) | VS (M/SEC) | D(M) | VF(M**3/SEC) | R (KM) | S (KM) |
|-----|-----------|--------|------------|------------|------|--------------|---------|----------|
| 1. | 4.33 | 40.5 | 305.0 | 14.5 | 2.10 | 0.0 | 413.200 | 3086.300 |
| 2. | 5.44 | 22.6 | 305.0 | 48.5 | 0.60 | 0.0 | 413.200 | 3086.300 |
| 3. | 5.28 | 13.8 | 305.0 | 11.8 | 1.40 | 0.0 | 408.200 | 3082.900 |
| 4. | 6.25 | 42.7 | 315.0 | 12.5 | 2.70 | 0.0 | 407.900 | 3071.000 |
| 5. | 2.42 | 19.8 | 333.0 | 10.2 | 0.60 | 0.0 | 403.000 | 3087.000 |
| 6. | 3.91 | 64.3 | 355.0 | 22.1 | 1.00 | 0.0 | 398.400 | 3084.200 |
| 7. | 3.96 | 61.3 | 333.0 | 23.0 | 1.10 | 0.0 | 398.400 | 3084.200 |
| 8. | 3.95 | 52.4 | 339.0 | 16.6 | 0.80 | 0.0 | 398.400 | 3084.200 |
| 9. | 5.10 | 36.6 | 325.0 | 11.1 | 2.40 | 0.0 | 396.700 | 3079.400 |
| 10. | 4.20 | 15.2 | 305.0 | 25.9 | 0.30 | 0.0 | 396.700 | 3079.400 |
| 11. | 1.89 | 5.5 | 305.0 | 9.7 | 0.30 | 0.0 | 396.700 | 3079.400 |
| 12. | 4.64 | 52.4 | 322.0 | 13.1 | 2.40 | 0.0 | 396.700 | 3079.400 |
| 13. | 4.56 | 35.4 | 305.0 | 10.3 | 0.30 | 0.0 | 396.700 | 3079.400 |
| 14. | 10.15 | 12.2 | 305.0 | 8.6 | 0.90 | 0.0 | 396.700 | 3079.400 |
| 15. | 2.11 | 18.6 | 305.0 | 22.3 | 0.20 | 0.0 | 396.700 | 3079.400 |
| 16. | 1.89 | 13.7 | 305.0 | 9.7 | 0.30 | 0.0 | 396.700 | 3079.400 |
| 17. | 3.78 | 26.5 | 436.0 | 86.2 | 0.50 | 0.0 | 396.700 | 3079.400 |
| 18. | 2.90 | 5.2 | 380.0 | 41.4 | 0.40 | 0.0 | 396.700 | 3079.400 |
| 19. | 2.32 | 17.4 | 352.0 | 24.8 | 0.40 | 0.0 | 396.700 | 3079.400 |
| 20. | 2.32 | 52.4 | 311.0 | 13.7 | 1.40 | 0.0 | 396.700 | 3079.400 |
| 21. | 5.09 | 19.8 | 305.0 | 51.7 | 0.30 | 0.0 | 396.700 | 3079.400 |
| 22. | 2.89 | 18.3 | 342.6 | 15.0 | 2.85 | 0.0 | 388.950 | 3047.280 |
| 23. | 1.10 | 38.1 | 309.3 | 30.0 | 1.02 | 0.0 | 388.720 | 3047.320 |
| 24. | 0.73 | 18.3 | 309.3 | 30.0 | 0.82 | 0.0 | 388.730 | 3047.180 |
| 25. | 0.01 | 12.2 | 505.4 | 7.6 | 0.31 | 0.0 | 389.180 | 3047.630 |

*** RECEPTORS ***

| NO. | RREC(KM) | SREC(KM) | Z (M) |
|-----|----------|----------|-------|
| 1. | 388.700 | 3047.100 | 0.0 |
| 2. | 389.800 | 3047.100 | 0.0 |
| 3. | 388.900 | 3047.100 | 0.0 |
| 4. | 388.700 | 3047.000 | 0.0 |
| 5. | 388.800 | 3047.000 | 0.0 |
| 6. | 388.700 | 3046.900 | 0.0 |
| 7. | 388.800 | 3046.900 | 0.0 |
| 8. | 388.600 | 3046.800 | 0.0 |
| 9. | 388.700 | 3046.800 | 0.0 |
| 10. | 388.800 | 3046.800 | 0.0 |
| 11. | 388.600 | 3046.700 | 0.0 |
| 12. | 388.700 | 3046.700 | 0.0 |
| 13. | 388.800 | 3046.700 | 0.0 |
| 14. | 388.600 | 3046.600 | 0.0 |
| 15. | 388.700 | 3046.600 | 0.0 |
| 16. | 388.600 | 3046.500 | 0.0 |
| 17. | 388.700 | 3046.500 | 0.0 |
| 18. | 388.500 | 3046.400 | 0.0 |
| 19. | 388.600 | 3046.400 | 0.0 |
| 20. | 388.700 | 3046.400 | 0.0 |
| 21. | 388.500 | 3046.300 | 0.0 |
| 22. | 388.600 | 3046.300 | 0.0 |
| 23. | 388.700 | 3046.300 | 0.0 |
| 24. | 388.500 | 3046.200 | 0.0 |
| 25. | 388.600 | 3046.200 | 0.0 |
| 26. | 388.500 | 3046.100 | 0.0 |
| 27. | 388.600 | 3046.100 | 0.0 |
| 28. | 388.400 | 3046.000 | 0.0 |
| 29. | 388.500 | 3046.000 | 0.0 |
| 30. | 388.600 | 3046.000 | 0.0 |

| | | | | | | | | | | | | |
|-----|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| 19. | 7.695E-08 | 7.131E-08 | 7.430E-08 | 7.171E-08 | 7.469E-08 | 6.920E-08 | 7.211E-08 | 7.509E-08 | 6.960E-08 | 7.250E-08 | 7.548E-08 | 6.999E-08 |
| 20. | 5.650E-08 | 5.249E-08 | 5.442E-08 | 5.277E-08 | 5.484E-08 | 5.098E-08 | 5.306E-08 | 5.517E-08 | 5.126E-08 | 5.333E-08 | 5.544E-08 | 5.154E-08 |
| 21. | 1.632E-07 | 1.512E-07 | 1.576E-07 | 1.521E-07 | 1.584E-07 | 1.468E-07 | 1.529E-07 | 1.593E-07 | 1.476E-07 | 1.538E-07 | 1.601E-07 | 1.485E-07 |
| 22. | 1.898E-07 | 2.535E-07 | 4.473E-07 | 4.583E-07 | 5.360E-07 | 3.133E-07 | 6.369E-07 | 6.194E-07 | 5.049E-07 | 7.564E-07 | 7.057E-07 | 6.778E-07 |
| 23. | 2.901E-07 | 1.323E-06 | 2.139E-07 | 1.314E-06 | 2.685E-07 | 2.049E-06 | 1.236E-06 | 3.065E-07 | 2.126E-06 | 1.125E-06 | 3.274E-07 | 2.066E-06 |
| 24. | 1.432E-06 | 5.530E-06 | 1.130E-06 | 5.093E-06 | 1.059E-06 | 3.655E-06 | 4.374E-06 | 9.698E-07 | 3.819E-06 | 3.674E-06 | 8.779E-07 | 3.831E-06 |
| 25. | 2.710E-06 | 4.747E-09 | 1.566E-08 | 7.769E-09 | 1.869E-08 | 3.923E-09 | 1.128E-08 | 1.916E-08 | 6.131E-09 | 1.360E-08 | 1.845E-08 | 8.554E-09 |

TOTAL CONCENTRATION (G/M**3)

| | | | | | | | | | | | |
|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| 3.839E-06 | 8.878E-06 | 3.644E-06 | 8.650E-06 | 3.729E-06 | 7.739E-06 | 8.044E-06 | 3.772E-06 | 8.183E-06 | 7.365E-06 | 3.796E-06 | 8.320E-06 |
|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|

*** RECEPTOR NUMBER ***

| | | | | | |
|-----|-----|-----|-----|-----|-----|
| 25. | 26. | 27. | 28. | 29. | 30. |
|-----|-----|-----|-----|-----|-----|

SOURCE PARTIAL CONCENTRATIONS (G/M**3)

| | | | | | | |
|-----|-----------|-----------|-----------|-----------|-----------|-----------|
| 1. | 1.815E-09 | 1.849E-09 | 1.740E-09 | 1.885E-09 | 1.772E-09 | 1.669E-09 |
| 2. | 2.657E-09 | 2.708E-09 | 2.546E-09 | 2.761E-09 | 2.594E-09 | 2.443E-09 |
| 3. | 8.386E-09 | 8.02CE-09 | 8.733E-09 | 7.669F-09 | 8.354E-09 | 9.091E-09 |
| 4. | 3.485E-08 | 3.450E-08 | 3.517E-08 | 3.416E-08 | 3.483E-08 | 3.543E-08 |
| 5. | 2.667E-08 | 2.674E-08 | 2.648E-08 | 2.682E-08 | 2.656E-08 | 2.629E-08 |
| 6. | 5.693E-08 | 5.515E-08 | 5.726E-08 | 5.342E-08 | 5.548E-08 | 5.759E-08 |
| 7. | 5.868E-08 | 5.684E-08 | 5.922E-08 | 5.506E-08 | 5.718E-08 | 5.936E-08 |
| 8. | 6.183E-08 | 5.988E-08 | 6.219E-08 | 5.798E-08 | 6.023E-08 | 6.255E-08 |
| 9. | 1.279E-07 | 1.237E-07 | 1.286E-07 | 1.195F-07 | 1.243E-07 | 1.292E-07 |
| 10. | 1.368E-07 | 1.320E-07 | 1.375E-07 | 1.274E-07 | 1.328E-07 | 1.382E-07 |
| 11. | 7.966E-08 | 7.698E-08 | 8.010E-08 | 7.416E-08 | 7.731E-08 | 8.053E-08 |
| 12. | 1.045E-07 | 1.011E-07 | 1.051E-07 | 9.775E-08 | 1.016E-07 | 1.056E-07 |
| 13. | 1.191E-07 | 1.150E-07 | 1.197E-07 | 1.110E-07 | 1.156E-07 | 1.203E-07 |
| 14. | 3.490E-07 | 3.369E-07 | 3.505E-07 | 3.252E-07 | 3.388E-07 | 3.528E-07 |
| 15. | 6.535E-08 | 6.309E-08 | 6.570E-08 | 6.089E-08 | 6.344E-08 | 6.604E-08 |
| 16. | 6.326E-08 | 6.107E-08 | 6.360E-08 | 5.893E-08 | 6.141E-08 | 6.394E-08 |
| 17. | 1.037E-07 | 1.002L-07 | 1.042E-07 | 9.677E-08 | 1.007E-07 | 1.047E-07 |
| 18. | 1.234E-07 | 1.191F-07 | 1.240E-07 | 1.149E-07 | 1.198E-07 | 1.247E-07 |
| 19. | 7.289E-08 | 7.039E-08 | 7.328E-08 | 6.794E-08 | 7.077E-08 | 7.366E-08 |
| 20. | 5.361E-08 | 5.182E-08 | 5.388E-08 | 5.007E-08 | 5.210E-08 | 5.415E-08 |
| 21. | 1.546E-07 | 1.493E-07 | 1.554E-07 | 1.441E-07 | 1.501E-07 | 1.562E-07 |
| 22. | 8.253E-07 | 8.028E-07 | 8.832E-07 | 6.485E-07 | 8.821E-07 | 9.386E-07 |
| 23. | 9.960E-07 | 1.943E-06 | 8.845E-07 | 1.874E-06 | 1.793E-06 | 7.894E-07 |
| 24. | 3.076F-06 | 3.694F-06 | 2.564F-06 | 2.464E-06 | 3.462E-06 | 2.149E-06 |
| 25. | 1.438F-08 | 1.032E-08 | 1.414E-08 | 6.713E-09 | 1.115E-08 | 1.355E-08 |

TOTAL CONCENTRATION (G/M**3)

| | | | | | |
|-----------|-----------|-----------|-----------|-----------|-----------|
| 6.717E-06 | 8.196E-06 | 6.161E-06 | 6.681E-06 | 7.903E-06 | 5.715E-06 |
|-----------|-----------|-----------|-----------|-----------|-----------|

DETERM PBCONG FOR 1/3 NE SOURCES AAQS YR 73JDAY 024 ADJ TO 014 DEG

0.

* * * S O U R C E S * * *

| NO. | O (G/SEC) | HP (M) | TS (DEG-K) | VS (M/SEC) | D(M) | VF(M**3/SEC) | R (KMI) | S (KMI) |
|-----|-----------|--------|------------|------------|------|--------------|---------|----------|
| 1. | 1.21 | 46.3 | 309.0 | 19.0 | 1.80 | 0.0 | 393.800 | 3096.300 |
| 2. | 1.60 | 38.1 | 342.0 | 14.2 | 2.40 | 0.0 | 389.500 | 3067.900 |
| 3. | 1.88 | 38.1 | 344.0 | 20.2 | 2.40 | 0.0 | 389.500 | 3067.900 |
| 4. | 0.19 | 22.9 | 305.0 | 9.9 | 0.90 | 0.0 | 389.500 | 3067.900 |
| 5. | 0.04 | 22.9 | 305.0 | 8.5 | 1.20 | 0.0 | 389.500 | 3067.900 |
| 6. | 5.34 | 30.5 | 372.0 | 36.4 | 1.20 | 0.0 | 394.700 | 3069.600 |
| 7. | 5.34 | 8.2 | 305.0 | 12.1 | 0.90 | 0.0 | 394.700 | 3069.600 |
| 8. | 6.36 | 8.1 | 305.0 | 11.4 | 1.00 | 0.0 | 394.700 | 3069.600 |
| 9. | 2.30 | 18.9 | 339.0 | 37.0 | 1.30 | 0.0 | 415.200 | 308C.000 |
| 10. | 3.08 | 16.8 | 344.0 | 9.6 | 2.80 | 0.0 | 415.200 | 3080.000 |
| 11. | 0.89 | 18.3 | 305.0 | 20.8 | 0.70 | 0.0 | 398.300 | 3075.500 |
| 12. | 0.12 | 30.5 | 305.0 | 23.0 | 0.50 | 0.0 | 398.300 | 3075.500 |
| 13. | 1.99 | 32.3 | 305.0 | 15.8 | 2.10 | 0.0 | 398.300 | 3075.500 |
| 14. | 0.03 | 32.3 | 305.0 | 12.1 | 0.80 | 0.0 | 398.300 | 3075.500 |
| 15. | 0.15 | 10.7 | 305.0 | 10.3 | 0.80 | 0.0 | 398.300 | 3075.500 |
| 16. | 2.85 | 19.2 | 305.0 | 7.1 | 2.90 | 0.0 | 415.300 | 3063.300 |
| 17. | 2.94 | 27.1 | 348.0 | 11.3 | 0.90 | 0.0 | 418.700 | 3083.600 |
| 18. | 2.90 | 30.5 | 305.0 | 35.9 | 0.90 | 0.0 | 409.900 | 3086.900 |
| 19. | 1.87 | 24.4 | 327.0 | 11.7 | 0.50 | 0.0 | 398.400 | 3085.300 |
| 20. | 1.82 | 12.2 | 305.0 | 0.0 | 0.0 | 0.0 | 398.400 | 3085.300 |
| 21. | 3.11 | 61.0 | 305.0 | 10.6 | 2.10 | 0.0 | 406.900 | 3085.100 |
| 22. | 2.25 | 25.6 | 341.0 | 25.4 | 1.50 | 0.0 | 416.000 | 3069.000 |
| 23. | 4.38 | 36.6 | 305.0 | 11.3 | 1.50 | 0.0 | 408.300 | 3082.700 |
| 24. | 3.71 | 42.7 | 354.0 | 13.3 | 0.90 | 0.0 | 408.300 | 3082.700 |
| 25. | 3.71 | 42.7 | 329.0 | 8.7 | 1.80 | 0.0 | 408.300 | 3082.700 |

* * * R E C E P T O R S * * *

| NO. | RREC(KM) | SREC(KM) | Z (M) |
|-----|----------|----------|-------|
| 1. | 387.400 | 3043.900 | 0.0 |
| 2. | 387.500 | 3043.900 | 0.0 |
| 3. | 387.600 | 3043.900 | 0.0 |
| 4. | 387.700 | 3073.900 | 0.0 |
| 5. | 387.800 | 3043.900 | 0.0 |
| 6. | 387.900 | 3043.900 | 0.0 |
| 7. | 388.000 | 3043.900 | 0.0 |
| 8. | 388.100 | 3043.900 | 0.0 |
| 9. | 388.200 | 3043.900 | 0.0 |
| 10. | 388.300 | 3043.900 | 0.0 |
| 11. | 388.400 | 3043.900 | 0.0 |
| 12. | 388.500 | 3043.900 | 0.0 |
| 13. | 387.400 | 3043.800 | 0.0 |
| 14. | 387.500 | 3043.800 | 0.0 |
| 15. | 387.600 | 3043.800 | 0.0 |
| 16. | 387.700 | 3043.800 | 0.0 |
| 17. | 387.800 | 3043.800 | 0.0 |
| 18. | 387.900 | 3043.800 | 0.0 |
| 19. | 388.000 | 3043.800 | 0.0 |
| 20. | 388.100 | 3043.800 | 0.0 |
| 21. | 388.200 | 3043.800 | 0.0 |
| 22. | 388.300 | 3043.800 | 0.0 |
| 23. | 388.400 | 3043.800 | 0.0 |
| 24. | 388.500 | 3043.800 | 0.0 |

* * * M E T E C R C L O G Y * * *

| NO. | THETA(DEG) | U (M/SEC) | KST | HL (M) | T (DEG-K) | P (MB) |
|-----|------------|-----------|-----|--------|-----------|--------|
|-----|------------|-----------|-----|--------|-----------|--------|

AVERAGE CONCENTRATIONS FOR 24 HOURS.

* * * RECEPTOR NUMBER * * *

| | 1. | 2. | 3. | 4. | 5. | 6. | 7. | 8. | 9. | 10. | 11. | 12. |
|--|----|----|----|----|----|----|----|----|----|-----|-----|-----|
|--|----|----|----|----|----|----|----|----|----|-----|-----|-----|

SOURCE PARTIAL CONCENTRATIONS (G/M**3)

| | | | | | | | | | | | | |
|-----|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| 1. | 2.471E-08 | 2.407E-08 | 2.341E-08 | 3.594E-08 | 2.204E-08 | 2.132E-08 | 2.059E-08 | 1.985E-08 | 1.911E-08 | 1.835E-08 | 1.760E-08 | 1.684E-08 |
| 2. | 4.524E-08 | 4.040E-08 | 3.586E-08 | 0.0 | 2.776E-08 | 2.427E-08 | 2.120E-08 | 1.858E-08 | 1.645E-08 | 1.485E-08 | 1.386E-08 | 1.355E-08 |
| 3. | 5.014E-08 | 4.475E-08 | 3.968E-08 | 0.0 | 3.066E-08 | 2.677E-08 | 2.333E-08 | 2.039E-08 | 1.797E-08 | 1.611E-08 | 1.488E-08 | 1.434E-08 |
| 4. | 7.670E-09 | 6.667E-09 | 5.914E-09 | 0.0 | 4.581E-09 | 4.017E-09 | 3.536E-09 | 3.150E-09 | 2.873E-09 | 2.729E-09 | 2.746E-09 | 2.957E-09 |
| 5. | 1.651E-09 | 1.473E-09 | 1.307E-09 | 0.0 | 1.012E-09 | 8.878E-10 | 7.811E-10 | 6.951E-10 | 6.330E-10 | 5.997E-10 | 6.010E-10 | 6.444E-10 |
| 6. | 1.203E-07 | 1.254E-07 | 1.321E-07 | 0.0 | 1.460E-07 | 1.537E-07 | 1.618E-07 | 1.703E-07 | 1.792E-07 | 1.883E-07 | 1.977E-07 | 2.073E-07 |
| 7. | 1.762E-07 | 1.847E-07 | 1.940E-07 | 0.0 | 2.151E-07 | 2.269E-07 | 2.393E-07 | 2.524E-07 | 2.661E-07 | 2.803E-07 | 2.951E-07 | 3.103E-07 |
| 8. | 2.106E-07 | 2.208E-07 | 2.319E-07 | 0.0 | 2.571E-07 | 2.712E-07 | 2.860E-07 | 3.017E-07 | 3.181E-07 | 3.351E-07 | 3.527E-07 | 3.709E-07 |
| 9. | 9.820F-09 | 9.918E-09 | 1.000E-08 | 4.273E-08 | 1.013E-08 | 1.017E-08 | 1.019E-08 | 1.020E-08 | 1.020E-08 | 1.016E-08 | 1.014E-08 | 1.009E-08 |
| 10. | 1.344E-08 | 1.358E-08 | 1.369E-08 | 5.293E-08 | 1.388E-08 | 1.392E-08 | 1.395E-08 | 1.397E-08 | 1.396E-08 | 1.393E-08 | 1.388E-08 | 1.381E-08 |
| 11. | 1.412E-08 | 1.399E-08 | 1.386E-08 | 1.002E-07 | 1.366E-08 | 1.359E-08 | 1.355E-08 | 1.354E-08 | 1.357E-08 | 1.364E-08 | 1.374E-08 | 1.390E-08 |
| 12. | 1.613E-09 | 1.597E-09 | 1.583E-09 | 1.138E-08 | 1.560E-09 | 1.552E-09 | 1.547E-09 | 1.546E-09 | 1.549E-09 | 1.556E-09 | 1.568E-09 | 1.586E-09 |
| 13. | 2.699F-08 | 2.672E-08 | 2.648E-08 | 1.495E-07 | 2.610E-08 | 2.597E-08 | 2.590E-08 | 2.588E-08 | 2.593E-08 | 2.604E-08 | 2.624E-08 | 2.653E-08 |
| 14. | 4.383E-10 | 4.340E-10 | 4.301E-10 | 3.062E-09 | 4.238E-10 | 4.217E-10 | 4.204E-10 | 4.202E-10 | 4.209E-10 | 4.229E-10 | 4.261E-10 | 4.308E-10 |
| 15. | 2.657E-09 | 2.631E-09 | 2.608E-09 | 1.923E-08 | 2.570E-09 | 2.558E-09 | 2.554E-09 | 2.554E-09 | 2.557E-09 | 2.587E-09 | 2.616E-09 | |
| 16. | 4.735E-10 | 4.283E-10 | 3.868E-10 | 0.0 | 3.137E-10 | 2.818E-10 | 2.526E-10 | 2.261E-10 | 2.019E-10 | 1.800E-10 | 1.622E-10 | 1.422E-10 |
| 17. | 9.190E-09 | 9.357E-09 | 9.516E-09 | 4.575E-08 | 9.808E-09 | 9.939E-09 | 1.006E-08 | 1.017E-08 | 1.027E-08 | 1.035E-08 | 1.043E-08 | 1.049E-08 |
| 18. | 4.025E-09 | 4.321E-09 | 4.633E-09 | 2.093E-08 | 5.309E-09 | 5.674E-09 | 6.057E-09 | 6.456E-09 | 6.874E-09 | 7.309E-09 | 7.763E-09 | 8.234E-09 |
| 19. | 2.820E-08 | 2.924E-08 | 3.032E-08 | 3.990E-09 | 3.259E-08 | 3.378E-08 | 3.499E-08 | 3.623E-08 | 3.750E-08 | 3.879E-08 | 4.010E-08 | 4.142E-08 |
| 20. | 3.270E-08 | 3.391E-08 | 3.517E-08 | 4.658E-09 | 3.782E-08 | 3.921E-08 | 4.064E-08 | 4.209E-08 | 4.358E-08 | 4.510E-08 | 4.664E-08 | 4.821E-08 |
| 21. | 1.335E-08 | 1.396E-08 | 1.458E-08 | 2.351E-08 | 1.583E-08 | 1.646E-08 | 1.709E-08 | 1.771E-08 | 1.834E-08 | 1.895E-08 | 1.956E-08 | 2.016E-08 |
| 22. | 5.813E-13 | 6.927E-13 | 8.252E-13 | 5.250E-20 | 1.170E-12 | 1.393E-12 | 1.656E-12 | 1.966E-12 | 2.332E-12 | 2.763E-12 | 3.271E-12 | 3.868E-12 |
| 23. | 4.279E-09 | 4.647E-09 | 5.042E-09 | 5.008E-08 | 5.923E-09 | 6.411E-09 | 6.930E-09 | 7.482E-09 | 8.068E-09 | 8.687E-09 | 9.343E-09 | 1.003E-08 |
| 24. | 3.477E-09 | 3.776E-09 | 4.097E-09 | 4.015E-08 | 4.812E-09 | 5.207E-09 | 5.629E-09 | 6.076E-09 | 6.552E-09 | 7.055E-09 | 7.587E-09 | 8.147E-09 |
| 25. | 3.462E-09 | 3.760E-09 | 4.080E-09 | 3.933E-08 | 4.791E-09 | 5.185E-09 | 5.605E-09 | 6.050E-09 | 6.524E-09 | 7.024E-09 | 7.553E-09 | 8.111E-09 |

TOTAL CONCENTRATION (G/M**3)

| | | | | | | | | | | | |
|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| 8.046E-07 | 8.210E-07 | 8.406E-07 | 6.434E-07 | 8.898E-07 | 9.193E-07 | 9.520E-07 | 9.877E-07 | 1.026E-06 | 1.068E-06 | 1.113E-06 | 1.161E-06 |
|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|

* * * RECEPTOR NUMBER * * *

| | 13. | 14. | 15. | 16. | 17. | 18. | 19. | 20. | 21. | 22. | 23. | 24. |
|--|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
|--|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|

SOURCE PARTIAL CONCENTRATIONS (G/M**3)

| | | | | | | | | | | | | |
|-----|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| 1. | 2.457E-08 | 2.394E-08 | 2.328E-08 | 2.260E-08 | 2.190E-08 | 2.119E-08 | 2.046E-08 | 1.972E-08 | 1.898E-08 | 1.823E-08 | 1.748E-08 | 1.672E-08 |
| 2. | 4.456E-08 | 3.979E-08 | 3.531E-08 | 3.115E-08 | 2.734E-08 | 2.391E-08 | 2.089E-08 | 1.833E-08 | 1.624E-08 | 1.469E-08 | 1.374E-08 | 1.347E-08 |
| 3. | 4.939E-08 | 4.407E-08 | 3.908E-08 | 3.444E-08 | 3.020E-08 | 2.637E-08 | 2.300E-08 | 2.012E-08 | 1.774E-08 | 1.594E-08 | 1.475E-08 | 1.425E-08 |
| 4. | 7.352E-09 | 6.501E-09 | 5.819E-09 | 5.131E-09 | 4.508E-09 | 3.956E-09 | 3.485E-09 | 3.108E-09 | 2.841E-09 | 2.706E-09 | 2.730E-09 | 2.948E-09 |
| 5. | 1.625E-09 | 1.450E-09 | 1.192E-09 | 1.266E-09 | 1.134E-09 | 9.964E-10 | 8.742E-10 | 7.697E-10 | 6.859E-10 | 6.258E-10 | 5.944E-10 | 5.975E-10 |
| 6. | 1.211E-07 | 1.268E-07 | 1.331E-07 | 1.399E-07 | 1.471E-07 | 1.549E-07 | 1.630E-07 | 1.715E-07 | 1.804E-07 | 1.895E-07 | 1.989E-07 | 2.084E-07 |
| 7. | 1.774E-07 | 1.860E-07 | 1.955E-07 | 2.058E-07 | 2.168E-07 | 2.287E-07 | 2.412E-07 | 2.543E-07 | 2.680E-07 | 2.823E-07 | 2.970E-07 | 3.122E-07 |
| 8. | 2.120E-07 | 2.223E-07 | 2.337E-07 | 2.460E-07 | 2.592E-07 | 2.733E-07 | 2.883E-07 | 3.039E-07 | 3.203E-07 | 3.374E-07 | 3.550E-07 | 3.731E-07 |
| 9. | 9.859F-09 | 9.946E-09 | 1.002E-08 | 1.008E-08 | 1.012E-08 | 1.015E-08 | 1.016E-08 | 1.016E-08 | 1.015E-08 | 1.011E-08 | 1.007E-08 | 1.000E-08 |
| 10. | 1.350E-08 | 1.361E-08 | 1.371E-08 | 1.379E-08 | 1.385E-08 | 1.389E-08 | 1.391E-08 | 1.391E-08 | 1.389E-08 | 1.384E-08 | 1.378E-08 | 1.369E-08 |
| 11. | 1.401E-08 | 1.338E-08 | 1.375E-08 | 1.365E-08 | 1.357E-08 | 1.351E-08 | 1.348E-08 | 1.348E-08 | 1.352E-08 | 1.360E-08 | 1.372E-08 | 1.388E-08 |
| 12. | 1.600E-09 | 1.585E-09 | 1.571E-09 | 1.559E-09 | 1.549E-09 | 1.543E-09 | 1.539E-09 | 1.539E-09 | 1.543E-09 | 1.552E-09 | 1.565E-09 | 1.584E-09 |
| 13. | 2.677E-08 | 2.652E-08 | 2.629E-08 | 2.609E-08 | 2.593E-08 | 2.582E-08 | 2.576E-08 | 2.576E-08 | 2.583E-08 | 2.597E-08 | 2.619E-08 | 2.650E-08 |
| 14. | 4.348E-10 | 4.306E-10 | 4.248E-10 | 4.236E-10 | 4.210E-10 | 4.192E-10 | 4.182E-10 | 4.182E-10 | 4.194E-10 | 4.217E-10 | 4.253E-10 | 4.304E-10 |
| 15. | 2.036E-05 | 2.610E-09 | 2.588E-09 | 2.569E-09 | 2.553E-09 | 2.542E-09 | 2.537E-09 | 2.538E-09 | 2.545E-09 | 2.559E-09 | 2.582E-09 | 2.614E-09 |
| 16. | 4.049E-10 | 3.654E-10 | 3.293E-10 | 2.962E-10 | 2.660E-10 | 2.384E-10 | 2.132E-10 | 1.904E-10 | 1.697E-10 | 1.510E-10 | 1.340E-10 | 1.187E-10 |
| 17. | 9.289E-09 | 9.450E-09 | 9.610E-09 | 9.743E-09 | 9.876E-09 | 9.998E-09 | 1.011E-08 | 1.021E-08 | 1.030E-08 | 1.038E-08 | 1.044E-08 | 1.049E-08 |
| 18. | 4.162E-09 | 4.464E-09 | 4.783E-09 | 5.120E-09 | 5.473E-09 | 5.845E-09 | 6.235E-09 | 6.641E-09 | 7.066E-09 | 7.507E-09 | 7.967E-09 | 8.445E-09 |

19. 2.837E-08 2.942E-08 3.050E-08 3.162E-08 3.277E-08 3.396E-08 3.518E-08 3.642E-08 3.768E-08 3.897E-08 4.027E-08 4.160E-08
20. 3.289E-08 3.411E-08 3.538E-08 3.669E-08 3.804E-08 3.943E-08 4.085E-08 4.231E-08 4.380E-08 4.531E-08 4.685E-08 4.842E-08
21. 1.359E-08 1.420E-08 1.482E-08 1.544E-08 1.607E-08 1.669E-08 1.732E-08 1.794E-08 1.856E-08 1.917E-08 1.977E-08 2.036E-08
22. 6.905E-13 8.320E-13 9.903E-13 1.179E-12 1.401E-12 1.665E-12 1.976E-12 2.342E-12 2.774E-12 3.281E-12 3.877E-12 4.576E-12
23. 4.452E-09 4.833E-09 5.242E-09 5.681E-09 6.149E-09 6.650E-09 7.184E-09 7.749E-09 8.349E-09 8.982E-09 9.652E-09 1.036E-08
24. 3.618E-09 3.927E-09 4.258E-09 4.615E-09 4.995E-09 5.402E-09 5.834E-09 6.293E-09 6.780E-09 7.294E-09 7.837E-09 8.409E-09
25. 3.603E-09 3.911E-09 4.241E-09 4.595E-09 4.974E-09 5.379E-09 5.809E-09 6.266E-09 6.751E-09 7.262E-09 7.803E-09 8.372E-09

1
2 TOTAL CONCENTRATION (G/M*3)
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
509
510
511
512
513
514
515
516
517
518
519
519
520
521
522
523
524
525
526
527
528
529
529
530
531
532
533
534
535
536
537
538
539
539
540
541
542
543
544
545
546
547
548
549
549
550
551
552
553
554
555
556
557
558
559
559
560
561
562
563
564
565
566
567
568
569
569
570
571
572
573
574
575
576
577
578
579
579
580
581
582
583
584
585
586
587
588
589
589
590
591
592
593
594
595
596
597
598
599
599
600
601
602
603
604
605
606
607
608
609
609
610
611
612
613
614
615
616
617
618
619
619
620
621
622
623
624
625
626
627
628
629
629
630
631
632
633
634
635
636
637
638
639
639
640
641
642
643
644
645
646
647
648
649
649
650
651
652
653
654
655
656
657
658
659
659
660
661
662
663
664
665
666
667
668
669
669
670
671
672
673
674
675
676
677
678
679
679
680
681
682
683
684
685
686
687
688
689
689
690
691
692
693
694
695
696
697
698
699
699
700
701
702
703
704
705
706
707
708
709
709
710
711
712
713
714
715
716
717
718
719
719
720
721
722
723
724
725
726
727
728
729
729
730
731
732
733
734
735
736
737
738
739
739
740
741
742
743
744
745
746
747
748
749
749
750
751
752
753
754
755
756
757
758
759
759
760
761
762
763
764
765
766
767
768
769
769
770
771
772
773
774
775
776
777
778
779
779
780
781
782
783
784
785
786
787
788
789
789
790
791
792
793
794
795
796
797
798
799
799
800
801
802
803
804
805
806
807
808
809
809
810
811
812
813
814
815
816
817
818
819
819
820
821
822
823
824
825
826
827
828
829
829
830
831
832
833
834
835
836
837
838
839
839
840
841
842
843
844
845
846
847
848
849
849
850
851
852
853
854
855
856
857
858
859
859
860
861
862
863
864
865
866
867
868
869
869
870
871
872
873
874
875
876
877
878
879
879
880
881
882
883
884
885
886
887
888
889
889
890
891
892
893
894
895
896
897
898
899
899
900
901
902
903
904
905
906
907
908
909
909
910
911
912
913
914
915
916
917
918
919
919
920
921
922
923
924
925
926
927
928
929
929
930
931
932
933
934
935
936
937
938
939
939
940
941
942
943
944
945
946
947
948
949
949
950
951
952
953
954
955
956
957
958
959
959
960
961
962
963
964
965
966
967
968
969
969
970
971
972
973
974
975
976
977
978
979
979
980
981
982
983
984
985
986
987
988
989
989
990
991
992
993
994
995
996
997
998
999
999
1000

DETERM PB CONC FOR 2/3 NE SOURCES AAQS YR 73JDAY 024 ADJ TO 014 DEG

0.

* * * S C U R C E S * * *

| NO. | Q (G/SEC) | HP (M) | TS (DEG-K) | VS (M/SEC) | D(M) | VF (M**3/SEC) | R (KM) | S (KM) |
|-----|-----------|--------|------------|------------|------|---------------|--------|--------|
|-----|-----------|--------|------------|------------|------|---------------|--------|--------|

| | | | | | | | | |
|-----|------|------|-------|-------|------|-----|---------|----------|
| 1. | 3.71 | 36.6 | 335.0 | 9.1 | 2.40 | 0.0 | 408.300 | 3082.800 |
| 2. | 2.06 | 36.6 | 333.0 | 14.7 | 2.30 | 0.0 | 408.300 | 3082.700 |
| 3. | 2.12 | 42.7 | 331.0 | 16.2 | 2.80 | 0.0 | 408.200 | 3082.700 |
| 4. | 2.60 | 39.3 | 356.0 | 8.8 | 1.20 | 0.0 | 409.500 | 3079.500 |
| 5. | 2.60 | 39.3 | 333.0 | 6.9 | 2.30 | 0.0 | 409.500 | 3079.500 |
| 6. | 5.61 | 50.3 | 305.0 | 40.6 | 0.70 | 0.0 | 409.500 | 3079.500 |
| 7. | 1.61 | 39.3 | 311.0 | 9.3 | 2.30 | 0.0 | 409.500 | 3079.500 |
| 8. | 1.52 | 39.9 | 305.0 | 10.8 | 2.40 | 0.0 | 409.500 | 3079.500 |
| 9. | 2.88 | 39.9 | 305.0 | 6.0 | 1.20 | 0.0 | 409.500 | 3079.500 |
| 10. | 4.07 | 15.2 | 353.0 | 16.5 | 0.50 | 0.0 | 409.500 | 3079.500 |
| 11. | 2.02 | 24.4 | 336.0 | 21.3 | 1.50 | 0.0 | 403.700 | 3079.000 |
| 12. | 2.84 | 9.1 | 305.0 | 111.0 | 0.30 | 0.0 | 407.900 | 3071.000 |
| 13. | 3.23 | 24.4 | 328.0 | 5.0 | 2.30 | 0.0 | 398.400 | 3084.200 |
| 14. | 1.81 | 49.5 | 305.0 | 16.3 | 1.80 | 0.0 | 398.400 | 3084.200 |
| 15. | 4.50 | 61.0 | 344.0 | 5.8 | 2.60 | 0.0 | 396.700 | 3079.400 |
| 16. | 1.71 | 61.0 | 344.0 | 9.8 | 2.60 | 0.0 | 396.700 | 3079.400 |
| 17. | 3.88 | 49.7 | 305.0 | 28.7 | 0.90 | 0.0 | 405.600 | 3079.400 |

* * * R E C E P T C R S * * *

| NO. | KREC(KM) | SREC(KM) | Z (M) |
|-----|----------|----------|-------|
|-----|----------|----------|-------|

| | | | |
|-----|---------|----------|-----|
| 1. | 387.400 | 3043.900 | 0.0 |
| 2. | 387.500 | 3043.900 | 0.0 |
| 3. | 387.600 | 3043.900 | 0.0 |
| 4. | 387.700 | 3073.900 | 0.0 |
| 5. | 387.800 | 3043.900 | 0.0 |
| 6. | 387.900 | 3043.900 | 0.0 |
| 7. | 388.000 | 3043.900 | 0.0 |
| 8. | 388.100 | 3043.900 | 0.0 |
| 9. | 388.200 | 3043.900 | 0.0 |
| 10. | 388.300 | 3043.900 | 0.0 |
| 11. | 388.400 | 3043.900 | 0.0 |
| 12. | 388.500 | 3043.900 | 0.0 |
| 13. | 387.400 | 3043.800 | 0.0 |
| 14. | 387.500 | 3043.800 | 0.0 |
| 15. | 387.600 | 3043.800 | 0.0 |
| 16. | 387.700 | 3043.800 | 0.0 |
| 17. | 387.800 | 3043.800 | 0.0 |
| 18. | 387.900 | 3043.800 | 0.0 |
| 19. | 388.000 | 3043.800 | 0.0 |
| 20. | 388.100 | 3043.800 | 0.0 |
| 21. | 388.200 | 3043.800 | 0.0 |
| 22. | 388.300 | 3043.800 | 0.0 |
| 23. | 388.400 | 3043.800 | 0.0 |
| 24. | 388.500 | 3043.800 | 0.0 |

* * * M E T E O R O L O G Y * * *

| NO. | THETA(DEG) | U (M/SEC) | KST | HL (M) | T (DEG-K) | P (MB) |
|-----|------------|-----------|-----|--------|-----------|--------|
|-----|------------|-----------|-----|--------|-----------|--------|

| | | | | | | |
|----|-----|-----|---|------|-------|--------|
| 1. | 80. | 1.0 | 4 | 401. | 289.0 | 1013.0 |
|----|-----|-----|---|------|-------|--------|

* * * R E C E P T O R N U M B E R * * *

| 1. | 2. | 3. | 4. | 5. | 6. | 7. | 8. | 9. | 10. | 11. | 12. |
|----|----|----|----|----|----|----|----|----|-----|-----|-----|
|----|----|----|----|----|----|----|----|----|-----|-----|-----|

SOURCE PARTIAL CONCENTRATIONS (G/M**3)

AVERAGE CONCENTRATIONS FOR 24 HOURS.

*** RECEPTOR NUMBER ***

1. 2. 3. 4. 5. 6. 7. 8. 9. 10. 11. 12.

SOURCE PARTIAL CONCENTRATIONS (G/M**3)

1. 3.707E-09 4.024E-09 4.363E-09 3.932E-08 5.118E-09 5.534E-09 5.977E-09 6.447E-09 6.946E-09 7.472E-09 8.029E-09 8.614E-09
 2. 1.960E-09 2.128E-09 2.309E-09 2.049E-08 2.711E-09 2.934E-09 3.171E-09 3.423E-09 3.690E-09 3.973E-09 4.273E-09 4.588E-09
 3. 2.067E-09 2.242E-09 2.430E-09 1.834E-08 2.847E-09 3.077E-09 3.321E-09 3.580E-09 3.854E-09 4.143E-09 4.449E-09 4.770E-09
 4. 1.659E-09 1.547E-09 1.445E-09 5.228E-08 1.268E-09 1.194E-09 1.130E-09 1.076E-09 1.031E-09 9.965E-10 9.717E-10 9.570E-10
 5. 1.650E-09 1.539E-09 1.437E-09 4.900E-08 1.261E-09 1.168E-09 1.124E-09 1.070E-09 1.026E-09 9.910E-10 9.662E-10 9.515E-10
 6. 3.369E-09 3.141E-09 2.934E-09 1.082E-07 2.577E-09 2.427E-09 2.297E-09 2.187E-09 2.097E-09 2.027E-09 1.977E-09 1.947E-09
 7. 1.027E-09 9.572E-10 8.938E-10 3.148E-08 7.847E-10 7.390E-10 6.992E-10 6.656E-10 6.379E-10 6.163E-10 6.009E-10 5.917E-10
 8. 9.702E-10 9.047E-10 8.448E-10 2.987E-08 7.416E-10 6.984E-10 6.608E-10 6.290E-10 6.028E-10 5.825E-10 5.679E-10 5.592E-10
 9. 1.843E-09 1.718E-09 1.604E-09 6.042E-08 1.409E-09 1.327E-09 1.255E-09 1.195E-09 1.145E-09 1.107E-09 1.079E-09 1.036E-09
 10. 3.331E-09 3.104E-09 2.898E-09 1.101E-07 2.541E-09 2.392E-09 2.261E-09 2.151E-09 2.060E-09 1.989E-09 1.938E-09 1.907E-09
 11. 1.594E-08 1.667E-08 1.741E-08 7.250E-08 1.886E-08 1.957E-08 2.028E-08 2.096E-08 2.163E-08 2.228E-08 2.290E-08 2.350E-08
 12. 2.280E-08 2.288E-08 2.289E-08 1.154E-16 2.275E-08 2.259E-08 2.238E-08 2.211E-08 2.178E-08 2.140E-08 2.098E-08 2.050E-08
 13. 6.530E-08 4.695E-08 4.869E-08 5.885E-10 5.240E-08 5.437E-08 5.641E-08 5.850E-08 6.066E-08 6.287E-08 6.512E-08 6.742E-08
 14. 2.106E-08 2.182E-08 2.262E-08 2.674E-10 2.433E-08 2.523E-08 2.617E-08 2.713E-08 2.812E-08 2.913E-08 3.016E-08 3.121E-08
 15. 6.794E-08 7.069E-08 7.352E-08 4.860E-08 7.941E-08 8.245E-08 8.554E-08 8.865E-08 9.180E-08 9.495E-08 9.812E-08 1.013E-07
 16. 2.588E-08 2.692E-08 2.800E-08 1.851E-08 3.024E-08 3.140E-08 3.258E-08 3.376E-08 3.496E-08 3.616E-08 3.737E-08 3.857E-08
 17. 8.874E-09 9.577E-09 1.032E-08 1.108E-07 1.191E-08 1.276E-08 1.366E-08 1.458E-08 1.554E-08 1.653E-08 1.755E-08 1.861E-08

TOTAL CONCENTRATION (G/M**3)

2.294E-07 2.368E-07 2.446E-07 7.706E-07 2.612E-07 2.699E-07 2.789E-07 2.881E-07 2.976E-07 3.072E-07 3.170E-07 3.270E-07

*** RECEPTOR NUMBER ***

13. 14. 15. 16. 17. 18. 19. 20. 21. 22. 23. 24.

SOURCE PARTIAL CONCENTRATIONS (G/M**3)

1. 3.857E-09 4.184E-09 4.534E-09 4.910E-09 5.310E-09 5.738E-09 6.193E-09 6.674E-09 7.184E-09 7.722E-09 8.290E-09 8.887E-09
 2. 2.039E-09 2.213E-09 2.400E-09 2.600E-09 2.814E-09 3.043E-09 3.287E-09 3.545E-09 3.819E-09 4.1C8E-09 4.414E-09 4.736E-09
 3. 2.150E-09 2.331E-09 2.525E-09 2.732E-09 2.953E-09 3.189E-09 3.440E-09 3.705E-09 3.985E-09 4.280E-09 4.592E-09 4.919E-09
 4. 1.580E-09 1.475E-09 1.379E-09 1.292E-09 1.215E-09 1.148E-09 1.090E-09 1.042E-09 1.003E-09 9.747E-10 9.560E-10 9.474E-10
 5. 1.572E-09 1.467E-09 1.371E-09 1.285E-09 1.209E-09 1.142E-09 1.084E-09 1.036E-09 9.978E-10 9.693E-10 9.506E-10 9.420E-10
 6. 3.208E-09 2.995E-09 2.800E-09 2.625E-09 2.469E-09 2.333E-09 2.216E-09 2.118E-09 2.040E-09 1.983E-09 1.945E-09 1.928E-09
 7. 9.777E-10 9.124E-10 8.531E-10 7.995E-10 7.519E-10 7.101E-10 6.743E-10 6.444E-10 6.206E-10 6.028E-10 5.912E-10 5.868E-10
 8. 9.240E-10 8.623E-10 8.063E-10 7.556E-10 7.106E-10 6.711E-10 6.372E-10 6.090E-10 5.865E-10 5.697E-10 5.587E-10 5.536E-10
 9. 1.755E-09 1.638E-09 1.531E-09 1.435E-09 1.350E-09 1.275E-09 1.211E-09 1.157E-09 1.114E-09 1.083E-09 1.062E-09 1.052E-09
 10. 3.171E-09 2.958E-09 2.765E-09 2.590E-09 2.434E-09 2.297E-09 2.180E-09 2.082E-09 2.003E-09 1.944E-09 1.905E-09 1.887E-09
 11. 1.621E-09 1.694E-08 1.767E-08 1.839E-08 1.911E-08 1.981E-08 2.051E-08 2.118E-08 2.184E-08 2.247E-08 2.308E-08 2.366E-08
 12. 2.275E-08 2.277E-08 2.275E-08 2.266E-08 2.252E-08 2.232E-08 2.207E-08 2.176E-08 2.140E-08 2.099E-08 2.053E-08 2.003E-08
 13. 4.556E-08 4.723E-08 4.898E-08 5.081E-08 5.271E-08 5.469E-08 5.673E-08 5.883E-08 6.099E-08 6.319E-08 6.545E-08 6.775E-08
 14. 2.118E-08 2.195E-08 2.275E-08 2.359E-08 2.447E-08 2.533E-08 2.632E-08 2.728E-08 2.827E-08 2.928E-08 3.031E-08 3.135E-08
 15. 6.837E-08 7.112E-08 7.396E-08 7.687E-08 7.984E-08 8.288E-08 8.595E-08 8.906E-08 9.219E-08 9.532E-08 9.847E-08 1.016E-07
 16. 2.604E-08 2.709E-08 2.817E-08 2.92EE-08 3.041E-08 3.156E-08 3.273E-08 3.392E-08 3.511E-08 3.630E-08 3.750E-08 3.870E-08
 17. 9.186E-09 9.904E-09 1.066E-08 1.145E-08 1.228E-08 1.315E-08 1.405E-08 1.498E-08 1.595E-08 1.695E-08 1.798E-08 1.904E-08

TOTAL CONCENTRATION (G/M**3)

2.305E-07 2.380E-07 2.459E-07 2.541E-07 2.626E-07 2.713E-07 2.804E-07 2.896E-07 2.991E-07 3.087E-07 3.186E-07 3.286E-07

DETERM PB CUNC FOR 3/3 NE SOURCES AAQS YR 73JDAY 024 ADJ TO 014 DEG /PSD

0.

*** SOURCES ***

| NO. | O (IG/SEC) | HP (M) | TS (DEG-K) | VS (M/SEC) | D(M) | VF(M**3/SEC) | R (KM) | S (KM) |
|-----|------------|--------|------------|------------|------|--------------|---------|----------|
| 1. | 4.33 | 40.5 | 305.0 | 14.5 | 2.10 | 0.0 | 413.200 | 3086.300 |
| 2. | 5.44 | 22.6 | 305.0 | 48.5 | 0.60 | 0.0 | 413.200 | 3086.300 |
| 3. | 5.28 | 13.8 | 305.0 | 11.8 | 1.40 | 0.0 | 408.200 | 3082.900 |
| 4. | 6.25 | 42.7 | 315.0 | 12.5 | 2.70 | 0.0 | 407.900 | 3071.000 |
| 5. | 2.42 | 19.8 | 333.0 | 10.2 | 0.60 | 0.0 | 403.000 | 3087.000 |
| 6. | 3.91 | 64.3 | 355.0 | 22.1 | 1.00 | 0.0 | 398.400 | 3084.200 |
| 7. | 3.96 | 61.3 | 333.0 | 23.0 | 1.10 | 0.0 | 398.400 | 3084.200 |
| 8. | 3.95 | 52.4 | 339.0 | 16.6 | 0.80 | 0.0 | 398.400 | 3084.200 |
| 9. | 5.10 | 36.6 | 325.0 | 11.1 | 2.40 | 0.0 | 396.700 | 3079.400 |
| 10. | 4.20 | 15.2 | 305.0 | 25.9 | 0.30 | 0.0 | 396.700 | 3079.400 |
| 11. | 1.89 | 5.5 | 305.0 | 9.7 | 0.30 | 0.0 | 396.700 | 3079.400 |
| 12. | 4.64 | 52.4 | 322.0 | 13.1 | 2.40 | 0.0 | 396.700 | 3079.400 |
| 13. | 4.56 | 35.4 | 305.0 | 10.3 | 0.30 | 0.0 | 396.700 | 3079.400 |
| 14. | 10.15 | 12.2 | 305.0 | 8.6 | 0.90 | 0.0 | 396.700 | 3079.400 |
| 15. | 2.11 | 18.6 | 305.0 | 22.3 | 0.20 | 0.0 | 396.700 | 3079.400 |
| 16. | 1.89 | 13.7 | 305.0 | 9.7 | 0.30 | 0.0 | 396.700 | 3079.400 |
| 17. | 3.78 | 26.5 | 436.0 | 86.2 | 0.50 | 0.0 | 396.700 | 3079.400 |
| 18. | 2.90 | 5.2 | 380.0 | 41.4 | 0.40 | 0.0 | 396.700 | 3079.400 |
| 19. | 2.32 | 17.4 | 352.0 | 24.8 | 0.40 | 0.0 | 396.700 | 3079.400 |
| 20. | 2.32 | 52.4 | 311.0 | 13.7 | 1.40 | 0.0 | 396.700 | 3079.400 |
| 21. | 5.09 | 19.8 | 305.0 | 51.7 | 0.30 | 0.0 | 396.700 | 3079.400 |
| 22. | 2.89 | 18.3 | 342.6 | 15.0 | 2.85 | 0.0 | 388.95C | 3047.280 |
| 23. | 1.10 | 38.1 | 309.3 | 30.0 | 1.02 | 0.0 | 388.720 | 3047.320 |
| 24. | 0.73 | 18.3 | 309.3 | 30.0 | 0.82 | 0.0 | 388.730 | 3047.180 |
| 25. | 0.01 | 12.2 | 505.4 | 7.6 | 0.31 | 0.0 | 389.180 | 3047.630 |

*** RECEP'TORS ***

| NO. | RREC(KM) | SREC(KM) | Z (M) |
|-----|----------|----------|-------|
| 1. | 387.40C | 3043.900 | 0.0 |
| 2. | 387.50C | 3043.900 | 0.0 |
| 3. | 387.60C | 3043.900 | 0.0 |
| 4. | 387.70C | 3073.900 | 0.0 |
| 5. | 387.80C | 3043.900 | 0.0 |
| 6. | 387.90C | 3043.900 | 0.0 |
| 7. | 388.00C | 3043.900 | 0.0 |
| 8. | 388.10C | 3043.900 | 0.0 |
| 9. | 388.20C | 3043.900 | 0.0 |
| 10. | 388.30C | 3043.900 | 0.0 |
| 11. | 388.40C | 3043.900 | 0.0 |
| 12. | 388.50C | 3043.900 | 0.0 |
| 13. | 387.40C | 3043.800 | 0.0 |
| 14. | 387.50C | 3043.800 | 0.0 |
| 15. | 387.60C | 3043.800 | 0.0 |
| 16. | 387.70C | 3043.800 | 0.0 |
| 17. | 387.80C | 3043.800 | 0.0 |
| 18. | 387.90C | 3043.800 | 0.0 |
| 19. | 388.00C | 3043.800 | 0.0 |
| 20. | 388.100 | 3043.800 | 0.0 |
| 21. | 388.200 | 3043.800 | 0.0 |
| 22. | 388.30C | 3043.800 | 0.0 |
| 23. | 388.40C | 3043.800 | 0.0 |
| 24. | 388.50C | 3043.800 | 0.0 |

*** METEOROLOGY ***

NO. THETA(DEC) U (M/SEC) KST HL (M) T (DEG-K) P (MB)

AVERAGE CONCENTRATIONS FOR 24 HOURS.

* * * RECEPTOR NUMBER * * *

| | 1. | 2. | 3. | 4. | 5. | 6. | 7. | 8. | 9. | 10. | 11. | 12. |
|--|----|----|----|----|----|----|----|----|----|-----|-----|-----|
|--|----|----|----|----|----|----|----|----|----|-----|-----|-----|

SOURCE PARTIAL CONCENTRATIONS (G/M**3)

| | | | | | | | | | | | | |
|-----|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| 1. | 1.439E-09 | 1.364E-09 | 1.299E-09 | 4.053E-08 | 1.193E-09 | 1.154E-09 | 1.122E-09 | 1.100E-09 | 1.087E-09 | 1.082E-09 | 1.087E-09 | 1.100E-09 |
| 2. | 2.104E-09 | 1.994E-09 | 1.898E-09 | 7.275E-08 | 1.742E-09 | 1.683E-09 | 1.637E-09 | 1.603E-09 | 1.583E-09 | 1.576E-09 | 1.582E-09 | 1.601E-09 |
| 3. | 7.702E-09 | 8.351E-09 | 9.046E-09 | 8.189E-08 | 1.058E-08 | 1.142E-08 | 1.232E-08 | 1.326E-08 | 1.426E-08 | 1.531E-08 | 1.642E-08 | 1.758E-08 |
| 4. | 3.305E-08 | 3.315E-08 | 3.317E-08 | 1.244E-16 | 3.296E-08 | 3.273E-08 | 3.241E-08 | 3.202E-08 | 3.155E-08 | 3.100E-08 | 3.038E-08 | 2.969E-08 |
| 5. | 2.557E-08 | 2.534E-08 | 2.510E-08 | 3.015E-12 | 2.462E-08 | 2.438E-08 | 2.414E-08 | 2.391E-08 | 2.368E-08 | 2.346E-08 | 2.326E-08 | 2.306E-08 |
| 6. | 4.196E-08 | 4.347E-08 | 4.505E-08 | 5.117E-10 | 4.843E-08 | 5.022E-08 | 5.207E-08 | 5.397E-08 | 5.592E-08 | 5.791E-08 | 5.994E-08 | 6.200E-08 |
| 7. | 4.322E-08 | 4.477E-08 | 4.641E-08 | 5.324E-10 | 4.990E-08 | 5.175E-08 | 5.366E-08 | 5.562E-08 | 5.763E-08 | 5.968E-08 | 6.178E-08 | 6.390E-08 |
| 8. | 4.543E-08 | 4.708E-08 | 4.880E-08 | 5.751E-10 | 5.250E-08 | 5.445E-08 | 5.648E-08 | 5.856E-08 | 6.069E-08 | 6.288E-08 | 6.510E-08 | 6.737E-08 |
| 9. | 9.051E-08 | 9.422E-08 | 9.806E-08 | 7.678E-08 | 1.061E-07 | 1.102E-07 | 1.145E-07 | 1.187E-07 | 1.231E-07 | 1.275E-07 | 1.319E-07 | 1.363E-07 |
| 10. | 9.581E-09 | 9.903E-09 | 1.040E-07 | 9.833E-08 | 1.127E-07 | 1.173E-07 | 1.219E-07 | 1.267E-07 | 1.315E-07 | 1.364E-07 | 1.414E-07 | 1.465E-07 |
| 11. | 5.564E-08 | 5.808E-08 | 6.043E-08 | 5.744E-08 | 6.556E-08 | 6.824E-08 | 7.099E-08 | 7.379E-08 | 7.666E-08 | 7.957E-08 | 8.254E-08 | 8.556E-08 |
| 12. | 7.425E-08 | 7.728E-08 | 8.039E-08 | 5.925E-08 | 8.689E-08 | 9.025E-08 | 9.367E-08 | 9.712E-08 | 1.006E-07 | 1.041E-07 | 1.077E-07 | 1.112E-07 |
| 13. | 8.369E-08 | 8.718E-08 | 9.078E-08 | 8.422E-08 | 9.832E-08 | 1.022E-07 | 1.063E-07 | 1.103E-07 | 1.145E-07 | 1.187E-07 | 1.229E-07 | 1.272E-07 |
| 14. | 2.444E-07 | 2.547E-07 | 2.653E-07 | 2.504E-07 | 2.876E-07 | 2.993E-07 | 3.112E-07 | 3.233E-07 | 3.357E-07 | 3.482E-07 | 3.610E-07 | 3.739E-07 |
| 15. | 4.580E-08 | 4.772E-08 | 4.970E-08 | 4.695E-08 | 5.387E-08 | 5.604E-08 | 5.826E-08 | 6.053E-08 | 6.283E-08 | 6.517E-08 | 6.755E-08 | 6.996E-08 |
| 16. | 4.429E-08 | 4.615E-08 | 4.808E-08 | 4.556E-08 | 5.212E-08 | 5.423E-08 | 5.639E-08 | 5.859E-08 | 6.084E-08 | 6.311E-08 | 6.543E-08 | 6.778E-08 |
| 17. | 7.318E-08 | 7.622E-08 | 7.932E-08 | 6.302L-08 | 8.584E-08 | 8.923E-08 | 9.268E-08 | 9.619E-08 | 9.975E-08 | 1.033E-07 | 1.070E-07 | 1.106E-07 |
| 18. | 8.630E-08 | 8.994E-08 | 9.370E-08 | 8.664E-08 | 1.016E-07 | 1.058E-07 | 1.100E-07 | 1.143E-07 | 1.187E-07 | 1.232E-07 | 1.278E-07 | 1.324E-07 |
| 19. | 5.113E-08 | 5.326E-08 | 5.548E-08 | 5.186E-08 | 6.012E-08 | 6.254E-08 | 6.501E-08 | 6.752E-08 | 7.009E-08 | 7.269E-08 | 7.532E-08 | 7.799E-08 |
| 20. | 3.790E-08 | 3.946E-08 | 4.107E-08 | 3.517E-08 | 4.443E-08 | 4.616E-09 | 4.793E-08 | 4.973E-08 | 5.154E-08 | 5.337E-08 | 5.522E-08 | 5.707E-08 |
| 21. | 1.084E-07 | 1.130E-07 | 1.177E-07 | 1.106E-07 | 1.275E-07 | 1.326E-07 | 1.379E-07 | 1.432E-07 | 1.486E-07 | 1.542E-07 | 1.597E-07 | 1.654E-07 |
| 22. | 3.609E-07 | 4.842E-07 | 5.893E-07 | 0.0 | 7.182E-07 | 7.910E-07 | 9.129E-07 | 1.074E-06 | 1.225E-06 | 1.300E-06 | 1.238E-06 | 1.007E-06 |
| 23. | 3.806E-07 | 3.991E-07 | 4.256E-07 | 0.0 | 6.140E-07 | 7.681E-07 | 9.054E-07 | 9.696E-07 | 9.148E-07 | 7.350E-07 | 4.902E-07 | 2.780E-07 |
| 24. | 3.519E-07 | 3.808E-07 | 3.999E-07 | 0.0 | 5.458E-07 | 7.077E-07 | 8.973E-07 | 1.054E-06 | 1.096E-06 | 9.565E-07 | 6.705E-07 | 3.818E-07 |
| 25. | 1.800E-09 | 2.431E-09 | 2.976E-09 | 0.0 | 3.511E-09 | 3.644E-09 | 3.982E-09 | 4.755E-09 | 6.053E-09 | 7.768E-09 | 9.640E-09 | 1.115E-08 |

TOTAL CONCENTRATION (G/M**3)

2.387E-06 2.609E-06 2.812E-06 4.271E-06 3.386E-06 3.832E-06 4.340E-06 4.783E-06 4.983E-06 4.801E-06 4.273E-06 3.606E-06

* * * RECEPTOR NUMBER * * *

| | 13. | 14. | 15. | 16. | 17. | 18. | 19. | 20. | 21. | 22. | 23. | 24. |
|--|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
|--|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|

SOURCE PARTIAL CONCENTRATIONS (G/M**3)

| | | | | | | | | | | | | |
|-----|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| 1. | 1.386E-09 | 1.317E-09 | 1.257E-09 | 1.206E-09 | 1.163E-09 | 1.128E-09 | 1.102E-09 | 1.085E-09 | 1.077E-09 | 1.078E-09 | 1.088E-09 | 1.107E-09 |
| 2. | 2.026E-09 | 1.925E-09 | 1.836E-09 | 1.760E-09 | 1.697E-09 | 1.646E-09 | 1.607E-09 | 1.582E-09 | 1.569E-09 | 1.569E-09 | 1.583E-09 | 1.611E-09 |
| 3. | 8.005E-09 | 8.675E-09 | 9.390E-09 | 1.015E-08 | 1.097E-08 | 1.183E-08 | 1.274E-08 | 1.371E-08 | 1.473E-08 | 1.580E-08 | 1.693E-08 | 1.811E-08 |
| 4. | 3.297E-08 | 3.301E-08 | 3.296E-08 | 3.284E-08 | 3.263E-08 | 3.234E-08 | 3.197E-08 | 3.152E-08 | 3.100E-08 | 3.041E-08 | 2.974E-08 | 2.901E-08 |
| 5. | 2.540E-08 | 2.517E-08 | 2.494E-08 | 2.470E-08 | 2.446E-08 | 2.422E-08 | 2.398E-08 | 2.375E-08 | 2.353E-08 | 2.331E-08 | 2.311E-08 | 2.292E-08 |
| 6. | 4.220E-08 | 4.372E-08 | 4.532E-08 | 4.698E-08 | 4.872E-08 | 5.051E-08 | 5.237E-08 | 5.427E-08 | 5.622E-08 | 5.820E-08 | 6.023E-08 | 6.228E-08 |
| 7. | 4.347E-08 | 4.504E-08 | 4.663E-08 | 4.840E-08 | 5.019E-08 | 5.205E-08 | 5.396E-08 | 5.592E-08 | 5.793E-08 | 5.999E-08 | 6.208E-08 | 6.420E-08 |
| 8. | 4.570E-08 | 4.736E-08 | 4.904E-08 | 5.091E-08 | 5.281E-08 | 5.477E-08 | 5.680E-08 | 5.88EE-08 | 6.102E-08 | 6.320E-08 | 6.542E-08 | 6.769E-08 |
| 9. | 9.108E-08 | 9.481E-08 | 9.865E-08 | 1.026E-07 | 1.067E-07 | 1.108E-07 | 1.150E-07 | 1.193E-07 | 1.236E-07 | 1.280E-07 | 1.324E-07 | 1.368E-07 |
| 10. | 9.643E-08 | 1.005E-07 | 1.046E-07 | 1.089E-07 | 1.134E-07 | 1.179E-07 | 1.226E-07 | 1.273E-07 | 1.321E-07 | 1.370E-07 | 1.420E-07 | 1.470E-07 |
| 11. | 5.601E-08 | 5.837E-08 | 6.081E-08 | 6.334E-08 | 6.595E-08 | 6.863E-08 | 7.137E-08 | 7.417E-08 | 7.703E-08 | 7.993E-08 | 8.290E-08 | 8.590E-08 |
| 12. | 7.472E-08 | 7.775E-08 | 8.087E-08 | 8.409E-08 | 8.737E-08 | 9.073E-08 | 9.413E-08 | 9.757E-08 | 1.010E-07 | 1.045E-07 | 1.081E-07 | 1.116E-07 |
| 13. | 8.423E-08 | 8.772E-08 | 9.133E-08 | 9.506E-08 | 9.898E-08 | 1.028E-07 | 1.068E-07 | 1.109E-07 | 1.150E-07 | 1.192E-07 | 1.234E-07 | 1.277E-07 |
| 14. | 2.460E-07 | 2.563E-07 | 2.670L-07 | 2.780E-07 | 2.893E-07 | 3.009E-07 | 3.128E-07 | 3.249E-07 | 3.372E-07 | 3.497E-07 | 3.625E-07 | 3.753E-07 |
| 15. | 4.609E-08 | 4.802E-08 | 5.001E-08 | 5.207E-08 | 5.414E-08 | 5.635E-08 | 5.857E-08 | 6.083E-08 | 6.313E-08 | 6.546E-08 | 6.783E-08 | 7.023E-08 |
| 16. | 4.458E-08 | 4.644E-08 | 4.837E-08 | 5.037E-08 | 5.242E-08 | 5.453E-08 | 5.669E-08 | 5.888E-08 | 6.112E-08 | 6.339E-08 | 6.570E-08 | 6.804E-08 |
| 17. | 7.365E-09 | 7.668E-08 | 7.980E-08 | 8.302E-08 | 8.633E-08 | 8.971E-08 | 9.315E-08 | 9.665E-08 | 1.002E-07 | 1.038E-07 | 1.074E-07 | 1.110E-07 |
| 18. | 8.686E-09 | 9.051E-08 | 9.429E-08 | 9.820E-08 | 1.022E-07 | 1.063E-07 | 1.106E-07 | 1.149E-07 | 1.193E-07 | 1.238E-07 | 1.283E-07 | 1.329E-07 |

19. 5.145E-08 5.360E-08 5.582E-08 5.811E-08 6.046E-08 6.288E-08 6.535E-08 6.786E-08 7.041E-08 7.300E-08 7.563E-08 7.829E-08
20. 3.814E-08 3.971E-08 4.131E-08 4.297E-08 4.467E-08 4.641E-08 4.817E-08 4.996E-08 5.177E-08 5.359E-08 5.543E-08 5.727E-08
21. 1.091E-07 1.137E-07 1.184E-07 1.232E-07 1.282E-07 1.334E-07 1.386E-07 1.439E-07 1.493E-07 1.548E-07 1.604E-07 1.660E-07
22. 4.087E-07 5.213E-07 6.049E-07 6.687E-07 7.216E-07 8.045E-07 9.375E-07 1.099E-06 1.238E-06 1.295E-06 1.213E-06 9.696E-07
23. 3.738E-07 3.897E-07 4.237E-07 5.023E-07 6.287E-07 7.759E-07 8.969E-07 9.415E-07 8.715E-07 6.891E-07 4.555E-07 2.597E-07
24. 3.500E-07 3.699E-07 3.910E-07 4.467E-07 5.588E-07 7.212E-07 8.984E-07 1.032E-06 1.047E-06 8.925E-07 6.159E-07 3.514E-07
25. 2.009E-09 2.581E-09 3.024E-09 3.283E-09 3.405E-09 3.563E-09 3.988E-09 4.855E-09 6.195E-09 7.872E-09 9.613E-09 1.089E-08

5 TOTAL CONCENTRATION (G/M**3)

6 2.434E-06 2.634E-06 2.830E-06 3.078E-06 3.425E-06 3.875E-06 4.365E-06 4.766E-06 4.912E-06 4.694E-06 4.166E-06 3.527E-06

PETERBA MP LUNG EUR

SOURCES PSD YR 70JDAY 138 ADJ TO 090 DEG

2

* * * S C U R C E S * *

NO Q (G/SEC) HP (H) TS (DEG-K) VS (M/SEC) D(M) VF(M**3/SEC) R (KM) S (KMH)

| | | | | | | | | |
|----|------|------|-------|------|------|-----|---------|----------|
| 1. | 2.89 | 18.3 | 342.6 | 15.0 | 2.85 | 0.0 | 388.950 | 3047.280 |
| 2. | 1.10 | 38.1 | 308.9 | 30.0 | 1.02 | 0.0 | 388.720 | 3047.320 |
| 3. | 0.73 | 18.3 | 309.3 | 30.0 | 0.82 | 0.0 | 388.730 | 3047.180 |
| 4. | 0.01 | 12.2 | 509.4 | 7.6 | 0.31 | 0.0 | 389.180 | 3047.630 |
| 5. | 1.28 | 10.5 | 358.0 | 1.7 | 3.00 | 0.0 | 419.800 | 3047.300 |
| 6. | 2.08 | 10.8 | 358.0 | 1.6 | 4.10 | 0.0 | 419.800 | 3047.300 |

* * * RECEPTORS * *

NO. RREC(KM) SREC(KM) Z (M)

| | | | |
|-----|---------|----------|-----|
| 1. | 388.600 | 3047.300 | 0.0 |
| 2. | 388.600 | 3047.200 | 0.0 |
| 3. | 388.500 | 3047.350 | 0.0 |
| 4. | 388.500 | 3047.250 | 0.0 |
| 5. | 388.500 | 3047.150 | 0.0 |
| 6. | 388.400 | 3047.300 | 0.0 |
| 7. | 388.400 | 3047.200 | 0.0 |
| 8. | 388.300 | 3047.350 | 0.0 |
| 9. | 388.300 | 3047.250 | 0.0 |
| 10. | 388.300 | 3047.150 | 0.0 |
| 11. | 388.200 | 3047.300 | 0.0 |
| 12. | 388.200 | 3047.200 | 0.0 |
| 13. | 388.10C | 3047.350 | 0.0 |
| 14. | 388.10C | 3047.250 | 0.0 |
| 15. | 388.10C | 3047.150 | 0.0 |
| 16. | 388.00C | 3047.300 | 0.0 |
| 17. | 388.00C | 3047.200 | 0.0 |
| 18. | 387.90C | 3047.350 | 0.0 |
| 19. | 387.90C | 3047.250 | 0.0 |
| 20. | 387.90C | 3047.150 | 0.0 |
| 21. | 387.800 | 3047.300 | 0.0 |
| 22. | 387.800 | 3047.200 | 0.0 |
| 23. | 387.700 | 3047.350 | 0.0 |
| 24. | 387.700 | 3047.250 | 0.0 |
| 25. | 387.70C | 3047.150 | 0.0 |
| 26. | 387.60C | 3047.300 | 0.0 |
| 27. | 387.600 | 3047.200 | 0.0 |
| 28. | 387.50C | 3047.350 | 0.0 |
| 29. | 387.500 | 3047.250 | 0.0 |
| 30. | 387.500 | 3047.150 | 0.0 |

*** METEOROLOGY ***

NO. THETA (DEG) U (M/SEC) KST HL (H) T (DEG-K) P (MB)

1. 346. 2.6 6 1906. 295.0 1013.0

* * * R F C E P T C R N U M B E R * * *

1. 2. 3. 4. 5. 6. 7. 8. 9. 10. 11. 12.

SOURCE PARTIAL CONCENTRATIONS (G/M**3)

1. 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0
2. 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0
3. 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0
4. 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0

AVERAGE CONCENTRATIONS FOR 24 HOURS.

*** RECEPTOR NUMBER ***

| 1. | 2. | 3. | 4. | 5. | 6. | 7. | 8. | 9. | 10. | 11. | 12. | |
|--------|---------------------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| SOURCE | PARTIAL CONCENTRATIONS (G/M**3) | | | | | | | | | | | |
| 1. | 6.147E-07 | 2.985E-08 | 1.497E-06 | 7.384E-07 | 1.631E-08 | 2.159E-06 | 4.387E-07 | 2.818E-06 | 1.797E-06 | 2.015E-07 | 3.141E-06 | 1.125E-06 |
| 2. | 1.729E-10 | 1.944E-25 | 4.084E-07 | 4.210E-09 | 1.473E-15 | 8.040E-07 | 8.989E-09 | 1.991E-06 | 3.714E-07 | 3.627E-08 | 1.936E-06 | 2.050E-07 |
| 3. | 1.060E-08 | 2.674E-06 | 2.313E-07 | 4.629E-06 | 2.509E-06 | 4.100E-06 | 8.644E-06 | 3.068E-06 | 5.468E-06 | 5.769E-06 | 4.416E-06 | 6.939E-06 |
| 4. | 1.355E-09 | 1.314E-09 | 6.526E-09 | 1.332E-09 | 4.628E-09 | 4.293E-09 | 1.170E-09 | 1.155E-08 | 2.967E-09 | 9.842E-10 | 9.097E-09 | 2.128E-09 |
| 5. | 3.419E-08 | 3.411E-08 | 3.407E-08 | 3.398E-08 | 3.390E-08 | 3.386E-08 | 3.378E-08 | 3.375E-08 | 3.367E-08 | 3.359E-08 | 3.355E-08 | 3.347E-08 |
| 6. | 5.522E-08 | 5.508E-08 | 5.503E-08 | 5.489E-08 | 5.476E-08 | 5.470E-08 | 5.457E-08 | 5.451E-08 | 5.438E-08 | 5.425E-08 | 5.419E-08 | 5.406E-08 |

TOTAL CONCENTRATION (G/M**3)

7.162E-07 2.795E-06 2.232E-06 5.462E-06 2.619E-06 7.157E-06 9.181E-06 7.977E-06 7.727E-06 6.095E-06 9.591E-06 8.359E-06

*** RECEPTOR NUMBER ***

| 13. | 14. | 15. | 16. | 17. | 18. | 19. | 20. | 21. | 22. | 23. | 24. | |
|--------|---------------------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| SOURCE | PARTIAL CONCENTRATIONS (G/M**3) | | | | | | | | | | | |
| 1. | 3.492E-06 | 2.548E-06 | 6.130E-07 | 3.543E-06 | 1.751E-06 | 3.668E-06 | 2.885E-06 | 1.075E-06 | 3.487E-06 | 2.081E-06 | 3.522E-06 | 2.886E-06 |
| 2. | 2.626E-06 | 1.135E-06 | 2.735E-07 | 2.417E-06 | 5.373E-07 | 2.639E-06 | 1.622E-06 | 3.384E-07 | 2.377E-06 | 8.930E-07 | 2.391E-06 | 1.736E-06 |
| 3. | 3.550E-06 | 4.565E-06 | 5.027E-06 | 3.132E-06 | 5.047E-06 | 2.550E-06 | 3.822E-06 | 3.869E-06 | 2.729E-06 | 3.734E-06 | 2.016E-06 | 3.115E-06 |
| 4. | 7.650E-09 | 7.109E-09 | 1.589E-09 | 7.461E-09 | 5.524E-09 | 4.446E-09 | 6.908E-09 | 4.311E-09 | 4.544E-09 | 6.164E-09 | 3.427E-09 | 4.684E-09 |
| 5. | 3.343E-08 | 3.335E-08 | 3.327E-08 | 3.324E-08 | 3.316E-08 | 3.312E-08 | 3.304E-08 | 3.297E-08 | 3.293E-08 | 3.285E-08 | 3.282E-08 | 3.274E-08 |
| 6. | 5.400E-08 | 5.387E-08 | 5.374E-08 | 5.368E-08 | 5.356E-08 | 5.350E-08 | 5.337E-08 | 5.325E-08 | 5.319E-08 | 5.306E-08 | 5.301E-08 | 5.288E-08 |

TOTAL CONCENTRATION (G/M**3)

9.764E-06 8.346E-06 6.002E-06 9.186E-06 7.427E-06 8.949E-06 8.423E-06 5.373E-06 8.684E-06 6.800E-06 8.018E-06 7.827E-06

*** RECEPTOR NUMBER ***

| 25. | 26. | 27. | 28. | 29. | 30. |
|-----|-----|-----|-----|-----|-----|
|-----|-----|-----|-----|-----|-----|

SOURCE PARTIAL CONCENTRATIONS (G/M**3)

| | | | | | | |
|----|-----------|-----------|-----------|-----------|-----------|-----------|
| 1. | 1.399E-06 | 3.2d5E-06 | 2.209E-06 | 3.303E-06 | 2.784E-06 | 1.600E-06 |
| 2. | 4.746E-07 | 2.125E-06 | 1.085E-06 | 2.074E-06 | 1.644E-06 | 6.261E-07 |
| 3. | 2.973E-06 | 2.456E-06 | 2.873E-06 | 1.856E-06 | 2.542E-06 | 2.371E-06 |
| 4. | 5.368E-09 | 2.973E-09 | 4.689E-09 | 3.469E-09 | 2.967E-09 | 4.540E-09 |
| 5. | 3.266E-08 | 3.262E-08 | 3.255E-08 | 3.251E-08 | 3.244E-08 | 3.237E-08 |
| 6. | 5.276E-08 | 5.270E-08 | 5.258E-08 | 5.252E-08 | 5.240E-08 | 5.228E-08 |

TOTAL CONCENTRATION (G/M**3)

4.942E-06 7.055E-06 6.256E-06 7.321E-06 7.058E-06 4.686E-06

DETERM PR CNG FOR

E SOURCES PSD YR 72JCAY 121 ADJ TO 090 DEG

0.

*** SOURCE S ***

| NU | Q (G/SEC) | HP (M) | TS (DEG-K) | VS (M/SEC) | D(M) | VF(M**3/SEC) | R (KM) | S (KM) |
|----|-----------|--------|------------|------------|------|--------------|---------|----------|
| 1. | 2.09 | 18.3 | 342.6 | 15.0 | 2.85 | 0.0 | 388.950 | 3047.280 |
| 2. | 1.1C | 38.1 | 308.9 | 30.0 | 1.02 | 0.0 | 388.720 | 3047.220 |
| 3. | 0.73 | 18.3 | 309.3 | 30.0 | 0.82 | 0.0 | 388.730 | 3047.180 |
| 4. | 0.01 | 12.2 | 505.4 | 7.6 | 0.31 | 0.0 | 389.180 | 3047.630 |
| 5. | 1.2P | 10.5 | 358.0 | 1.7 | 3.00 | 0.0 | 419.800 | 3047.300 |
| 6. | 2.08 | 10.8 | 358.0 | 1.6 | 4.10 | 0.0 | 419.800 | 3047.300 |

*** RECEPTORS ***

| NO. | RREC(KM) | SREC(KM) | Z (M) |
|-----|----------|----------|-------|
| 1. | 386.200 | 3048.000 | 0.0 |
| 2. | 386.200 | 3047.900 | 0.0 |
| 3. | 386.200 | 3047.800 | 0.0 |
| 4. | 386.200 | 3047.700 | 0.0 |
| 5. | 386.200 | 3047.600 | 0.0 |
| 6. | 386.200 | 3047.500 | 0.0 |
| 7. | 386.200 | 3047.400 | 0.0 |
| 8. | 386.200 | 3047.300 | 0.0 |
| 9. | 386.200 | 3047.200 | 0.0 |
| 10. | 386.200 | 3047.100 | 0.0 |
| 11. | 386.200 | 3047.000 | 0.0 |
| 12. | 386.200 | 3046.900 | 0.0 |
| 13. | 386.200 | 3046.800 | 0.0 |
| 14. | 386.200 | 3046.700 | 0.0 |
| 15. | 386.200 | 3046.600 | 0.0 |
| 16. | 386.100 | 3046.000 | 0.0 |
| 17. | 386.100 | 3047.900 | 0.0 |
| 18. | 386.100 | 3047.800 | 0.0 |
| 19. | 386.100 | 3047.700 | 0.0 |
| 20. | 386.100 | 3047.600 | 0.0 |
| 21. | 386.100 | 3047.500 | 0.0 |
| 22. | 386.100 | 3047.400 | 0.0 |
| 23. | 386.100 | 3047.300 | 0.0 |
| 24. | 386.100 | 3047.200 | 0.0 |
| 25. | 386.100 | 3047.100 | 0.0 |
| 26. | 386.100 | 3047.000 | 0.0 |
| 27. | 386.100 | 3046.900 | 0.0 |
| 28. | 386.100 | 3046.800 | 0.0 |
| 29. | 386.100 | 3046.700 | 0.0 |
| 30. | 386.100 | 3046.600 | 0.0 |

*** METEOROLOGY ***

| NU. | THETA(DEG) | U (M/SEC) | KST | HL (M) | T (DEG-K) | P (MB) |
|-----|------------|-----------|-----|--------|-----------|--------|
| 1. | 70. | 3.6 | 4 | 1739. | 293.0 | 1013.0 |

*** RECEPTOR NUMBER ***

| 1. | 2. | 3. | 4. | 5. | 6. | 7. | 8. | 9. | 10. | 11. | 12. |
|----|----|----|----|----|----|----|----|----|-----|-----|-----|
|----|----|----|----|----|----|----|----|----|-----|-----|-----|

SOURCE PARTIAL CONCENTRATIONS (G/M**3)

| | | | | | | | | | | | | |
|----|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| 1. | 0.0 | 0.0 | 2.237E-25 | 1.733E-22 | 6.868E-20 | 1.415E-17 | 1.621E-15 | 1.059E-13 | 4.060E-12 | 9.607E-11 | 1.426E-09 | 1.384E-08 |
| 2. | 0.0 | 0.0 | 3.759E-25 | 4.625E-22 | 2.599E-19 | 6.851E-17 | 9.173E-15 | 6.456E-13 | 2.478E-11 | 5.504E-10 | 7.241E-09 | 5.919E-08 |
| 3. | 0.0 | 0.0 | 0.0 | 2.044E-26 | 3.424E-23 | 2.491E-20 | 8.617E-18 | 1.471E-15 | 1.288E-13 | 6.196E-12 | 1.675E-10 | 2.692E-09 |
| 4. | 1.150E-22 | 1.943E-20 | 1.935E-18 | 1.161E-16 | 4.414E-15 | 1.073E-13 | 1.741E-12 | 1.912E-11 | 1.449E-10 | 7.821E-10 | 3.040E-09 | 8.729E-09 |

AVERAGE CONCENTRATIONS FOR 24 HOURS.

*** RECEPTOR NUMBER ***

1. 2. 3. 4. 5. 6. 7. 8. 9. 10. 11. 12.

SOURCE PARTIAL CONCENTRATIONS (G/M**3)

| | | | | | | | | | | | | |
|----|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| 1. | 1.609E-07 | 1.553E-07 | 2.148E-07 | 3.937E-07 | 7.783E-07 | 1.393E-06 | 2.082E-06 | 2.530E-06 | 2.520E-06 | 2.089E-06 | 1.498E-06 | 1.024E-06 |
| 2. | 7.395E-08 | 6.685E-08 | 1.004E-07 | 2.046E-07 | 4.255E-07 | 7.604E-07 | 1.090E-06 | 1.234E-06 | 1.129E-06 | 8.683E-07 | 6.276E-07 | 4.992E-07 |
| 3. | 1.808E-07 | 9.959E-08 | 5.983E-08 | 7.180E-08 | 1.433E-07 | 3.172E-07 | 6.358E-07 | 1.048E-06 | 1.360E-06 | 1.386E-06 | 1.114E-06 | 7.556E-07 |
| 4. | 2.840E-09 | 5.313E-09 | 8.686E-09 | 1.192E-08 | 1.363E-08 | 1.292E-08 | 1.010E-08 | 6.909E-09 | 4.859E-09 | 4.055E-09 | 4.054E-09 | 4.534E-09 |
| 5. | 6.612E-08 | 6.755E-08 | 6.888E-08 | 7.008E-08 | 7.118E-08 | 7.217E-08 | 7.306E-08 | 7.385E-08 | 7.454E-08 | 7.513E-08 | 7.563E-08 | 7.603E-08 |
| 6. | 1.062E-07 | 1.084E-07 | 1.106E-07 | 1.125E-07 | 1.142E-07 | 1.158E-07 | 1.172E-07 | 1.185E-07 | 1.195E-07 | 1.205E-07 | 1.213E-07 | 1.219E-07 |

TOTAL CONCENTRATION (G/M**3)

5.908E-07 5.030E-07 5.631E-07 8.645E-07 1.546E-06 2.671E-06 4.008E-06 5.011E-06 5.208E-06 4.543E-06 3.440E-06 2.481E-06

*** RECEPTOR NUMBER ***

13. 14. 15. 16. 17. 18. 19. 20. 21. 22. 23. 24.

SOURCE PARTIAL CONCENTRATIONS (G/M**3)

| | | | | | | | | | | | | |
|----|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| 1. | 7.516E-07 | 6.493E-07 | 6.684E-07 | 1.465E-07 | 1.531E-07 | 2.251E-07 | 4.184E-07 | 8.083E-07 | 1.404E-06 | 2.052E-06 | 2.470E-06 | 2.469E-06 |
| 2. | 4.747E-07 | 5.109E-07 | 5.729E-07 | 6.476E-08 | 6.574E-08 | 1.059E-07 | 2.159E-07 | 4.343E-07 | 7.507E-07 | 1.054E-06 | 1.187E-06 | 1.096E-06 |
| 3. | 5.314E-07 | 4.613E-07 | 4.852E-07 | 1.476E-07 | 7.834E-08 | 5.435E-08 | 7.472E-08 | 1.522E-07 | 3.268E-07 | 6.310E-07 | 1.011E-06 | 1.293E-06 |
| 4. | 5.505E-09 | 6.972E-09 | 7.999E-09 | 2.913E-09 | 5.298E-09 | 8.451E-09 | 1.142E-08 | 1.299E-08 | 1.240E-08 | 9.857E-09 | 6.850E-09 | 4.798E-09 |
| 5. | 7.634E-08 | 7.653E-08 | 7.662E-08 | 6.588E-08 | 6.730E-08 | 6.861E-08 | 6.981E-08 | 7.090E-08 | 7.188E-08 | 7.276E-08 | 7.354E-08 | 7.423E-08 |
| 6. | 1.224E-07 | 1.227E-07 | 1.228E-07 | 1.058E-07 | 1.080E-07 | 1.101E-07 | 1.120E-07 | 1.138E-07 | 1.153E-07 | 1.167E-07 | 1.180E-07 | 1.190E-07 |

TOTAL CONCENTRATION (G/M**3)

1.962E-06 1.82EE-06 1.934E-06 5.334E-07 4.779E-07 5.725E-07 9.022E-07 1.593E-06 2.681E-06 3.936E-06 4.866E-06 5.056E-06

*** RECEPTOR NUMBER ***

25. 26. 27. 28. 29. 30.

SOURCE PARTIAL CONCENTRATIONS (G/M**3)

| | | | | | | |
|----|-----------|-----------|-----------|-----------|-----------|-----------|
| 1. | 2.074E-06 | 1.513E-06 | 1.044E-06 | 7.629E-07 | 6.442E-07 | 6.443E-07 |
| 2. | 8.552E-07 | 6.212E-07 | 4.862E-07 | 4.495E-07 | 4.755E-07 | 5.302E-07 |
| 3. | 1.322E-06 | 1.081E-06 | 7.463E-07 | 5.207E-07 | 4.376E-07 | 4.469E-07 |
| 4. | 3.905E-09 | 3.798E-09 | 4.158E-09 | 4.924E-09 | 6.194E-09 | 7.451E-09 |
| 5. | 7.482E-08 | 7.532E-08 | 7.572E-08 | 7.602E-08 | 7.622E-08 | 7.630E-08 |
| 6. | 1.200E-07 | 1.206E-07 | 1.214E-07 | 1.219E-07 | 1.222E-07 | 1.223E-07 |

TOTAL CONCENTRATION (G/M**3)

4.449E-06 3.415E-06 2.478E-06 1.936E-06 1.762E-06 1.827E-06

DETERM KEENTOWN CONC PSD/AARS JYR73 JDAY88 ADJ THRU KEENTOWN (TO 154 DEG)

0.

*** SOURCES ***

| NO. | Q (G/SEC) | H _P (M) | T _S (DEG-K) | V _S (M/SEC) | D (M) | V _F (M**3/SEC) | R (KM) | S (KM) |
|-----|-----------|--------------------|------------------------|------------------------|-------|---------------------------|---------|----------|
| 1. | 2.89 | 18.3 | 342.6 | 15.0 | 2.85 | 0.0 | 388.950 | 3047.280 |
| 2. | 1.10 | 38.1 | 305.5 | 30.0 | 1.02 | 0.0 | 388.720 | 3047.320 |
| 3. | 0.73 | 18.3 | 305.3 | 30.0 | 0.82 | 0.0 | 388.730 | 3047.180 |
| 4. | 0.00 | 12.2 | 505.4 | 7.6 | 0.31 | 0.0 | 389.180 | 3047.630 |

*** RECEPATORS ***

| NO. | RREC(KM) | SREC(KM) | Z (M) |
|-----|----------|----------|-------|
| 1. | 387.500 | 3049.000 | 0.0 |
| 2. | 387.600 | 3049.000 | 0.0 |
| 3. | 387.700 | 3049.000 | 0.0 |

*** METEOROLOGY ***

| NO. | THETA(DEG) | U (M/SEC) | KST | HL (M) | T (DEG-K) | P (MB) |
|-----|------------|-----------|-----|--------|-----------|--------|
| 1. | 153. | 4.6 | 4 | 1442. | 293.0 | 1013.0 |

*** RECEPTOR NUMBER ***

1. 2. 3.

SOURCE PARTIAL CONCENTRATIONS (G/M**3)

| | | | |
|----|-----------|-----------|-----------|
| 1. | 7.830E -9 | 5.667E -8 | 3.085E -7 |
| 2. | 2.328E -7 | 9.571E -7 | 2.681E -6 |
| 3. | 7.237E -7 | 2.062E -6 | 4.071E -6 |
| 4. | 3.044E-18 | 1.371E-16 | 5.132E-15 |

TOTAL CONCENTRATION (G/M**3)

9.643E -7 3.075E -6 7.061E -6

*** METEOROLOGY ***

| NO. | THETA(DEG) | U (M/SEC) | KST | HL (M) | T (DEG-K) | P (MB) |
|-----|------------|-----------|-----|--------|-----------|--------|
| 2. | 148. | 4.1 | 4 | 1410. | 293.0 | 1013.0 |

*** RECEPTOR NUMBER ***

1. 2. 3.

SOURCE PARTIAL CONCENTRATIONS (G/M**3)

| | | | |
|----|-----------|-----------|-----------|
| 1. | 4.808E -7 | 1.463E -6 | 3.321E -6 |
| 2. | 3.025E -6 | 5.080E -6 | 5.691E -6 |
| 3. | 4.566E -6 | 5.543E -6 | 4.552E -6 |
| 4. | 4.371E-14 | 6.871E-13 | 9.065E-12 |

TOTAL CONCENTRATION (G/M**3)

8.071E -6 1.209E -5 1.356E -5

AVERAGE CONCENTRATIONS FOR 24 HOURS.

RECEPATOR NUMBER

1. 2. 3.

SOURCE PARTIAL CONCENTRATIONS (G/M**3)

| | | | |
|----|-----------|-----------|-----------|
| 1. | 1.378E -6 | 1.529E -6 | 1.624E -6 |
| 2. | 1.025E -6 | 1.222E -6 | 1.521E -6 |
| 3. | 1.094E -6 | 1.358E -6 | 1.572E -6 |
| 4. | 1.197E -8 | 1.318E -8 | 1.252E -8 |

TOTAL CONCENTRATION (G/M**3)

3.509E -6 4.122E -6 4.729E -6

APPENDIX E

SO₂ & NO_X MODELING DATA

JYR=74 IMO=12 JDAY=343.

| | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|---|
| ISTAB= | 7 | 7 | 7 | 6 | 5 | 5 | 5 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 5 | 6 | 5 | 5 | 6 | 6 | 6 |
| AWS= | 1.0 | 1.0 | 1.0 | 5.1 | 4.1 | 3.6 | 4.1 | 4.6 | 3.6 | 5.7 | 7.2 | 7.2 | 6.7 | 7.2 | 7.2 | 6.7 | 6.7 | 4.1 | 2.6 | 2.6 | 3.1 | 1.0 | 2.1 | 2.1 | |
| TEMP= | 285. | 282. | 283. | 283. | 281. | 282. | 282. | 283. | 285. | 286. | 287. | 286. | 286. | 287. | 286. | 286. | 283. | 281. | 282. | 283. | 281. | 280. | 280. | | |
| AFV= | 230. | 230. | 230. | 200. | 180. | 180. | 200. | 190. | 190. | 180. | 160. | 140. | 140. | 160. | 150. | 150. | 150. | 150. | 140. | 170. | 170. | 210. | 210. | | |
| AFVR= | 233. | 232. | 232. | 201. | 164. | 177. | 196. | 189. | 201. | 192. | 180. | 159. | 141. | 145. | 165. | 153. | 162. | 154. | 154. | 144. | 171. | 175. | 207. | 207. | |
| HLH1= | 809. | 803. | 797. | 791. | 784. | 778. | 772. | 83. | 190. | 298. | 406. | 514. | | | | | | | | | | | | | |
| | 621. | 729. | 729. | 729. | 732. | 739. | 746. | 753. | 760. | 767. | 774. | | | | | | | | | | | | | | |
| HLH2= | 548. | 548. | 548. | 548. | 548. | 548. | 548. | 569. | 595. | 622. | 649. | 676. | | | | | | | | | | | | | |
| | 702. | 729. | 729. | 729. | 729. | 688. | 603. | 518. | 433. | 348. | 263. | 176. | | | | | | | | | | | | | |

MAX H O U R L Y

| DAY | RATIO | CONCENTRATION | DIRECTION | DISTANCE(KM) | HOUR | CONCENTRATION | DIRECTION | DISTANCE(KM) |
|-----|--------|---------------|-----------|--------------|------|---------------|-----------|--------------|
| 343 | 10.313 | 2.423761E-05 | 20 | 0.80 | 9 | 2.350203E-06 | 16 | 0.80 |

JYR=74 IMO=12 JDAY=344.

| | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|---|
| ISTAB= | 7 | 7 | 6 | 6 | 5 | 6 | 7 | 6 | 5 | 4 | 3 | 2 | 2 | 3 | 3 | 3 | 4 | 5 | 6 | 6 | 5 | 5 | 5 | 4 |
| AWS= | 1.0 | 1.0 | 2.1 | 3.1 | 3.6 | 3.1 | 1.0 | 3.6 | 4.1 | 4.6 | 3.6 | 3.6 | 4.1 | 3.6 | 3.6 | 3.1 | 2.1 | 2.6 | 3.1 | 2.1 | 2.1 | 3.1 | 3.6 | |
| TEMP= | 278. | 277. | 278. | 277. | 278. | 277. | 276. | 277. | 280. | 283. | 286. | 287. | 289. | 290. | 291. | 291. | 289. | 285. | 283. | 281. | 281. | 282. | 283. | |
| AFV= | 210. | 210. | 180. | 203. | 180. | 200. | 200. | 190. | 220. | 210. | 220. | 230. | 160. | 220. | 200. | 240. | 240. | 220. | 230. | 170. | 210. | 250. | 250. | |
| AFVR= | 214. | 215. | 176. | 197. | 185. | 203. | 202. | 193. | 222. | 206. | 223. | 226. | 156. | 220. | 205. | 241. | 238. | 221. | 228. | 167. | 210. | 246. | 254. | |
| HLH1= | 781. | 788. | 795. | 802. | 809. | 816. | 822. | 97. | 226. | 355. | 484. | 613. | | | | | | | | | | | | |
| | 742. | 871. | 871. | 871. | 880. | 899. | 919. | 938. | 957. | 976. | 996. | | | | | | | | | | | | | |
| HLH2= | 178. | 178. | 178. | 178. | 178. | 178. | 178. | 255. | 358. | 461. | 563. | 666. | | | | | | | | | | | | |
| | 768. | 871. | 871. | 871. | 871. | 819. | 711. | 602. | 494. | 385. | 277. | 996. | | | | | | | | | | | | |

MAX H O U R L Y

| DAY | RATIO | CONCENTRATION | DIRECTION | DISTANCE(KM) | HOUR | CONCENTRATION | DIRECTION | DISTANCE(KM) |
|-----|-------|---------------|-----------|--------------|------|---------------|-----------|--------------|
| 344 | 9.524 | 3.684574E-05 | 24 | 0.30 | 16 | 3.868619E-06 | 22 | 0.30 |

JYR=74 IMO=12 JDAY=345.

| | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|------|------|------|------|------|------|------|------|------|------|------|------|-----|
| ISTAB= | 5 | 5 | 5 | 6 | 6 | 6 | 6 | 5 | 4 | 3 | 3 | 3 | 3 | 3 | 4 | 4 | 3 | 3 | 4 | 5 | 6 | 5 | 6 | 6 |
| AWS= | 2.6 | 3.6 | 2.1 | 2.6 | 3.1 | 2.6 | 2.1 | 3.6 | 3.6 | 4.6 | 4.6 | 4.6 | 4.1 | 4.6 | 4.1 | 2.1 | 1.0 | 3.1 | 2.6 | 2.6 | 4.6 | 2.1 | 2.1 | 2.6 |
| TE4P= | 284. | 284. | 283. | 283. | 283. | 283. | 283. | 285. | 290. | 293. | 294. | 294. | 295. | 296. | 295. | 296. | 291. | 291. | 290. | 289. | 289. | 285. | | |
| AFV= | 270. | 270. | 240. | 270. | 240. | 270. | 250. | 250. | 270. | 310. | 300. | 320. | 300. | 290. | 70. | 70. | 10. | 10. | 340. | 330. | 310. | 310. | 290. | |
| AFVR= | 271. | 268. | 240. | 272. | 245. | 240. | 273. | 252. | 249. | 271. | 310. | 300. | 318. | 301. | 286. | 72. | 67. | 14. | 13. | 344. | 335. | 311. | 315. | |
| HLH1= | 1015. | 1034. | 1053. | 1073. | 1092. | 1111. | 1130. | 140. | 327. | 515. | 702. | 890. | | | | | | | | | | | | |
| | 1077. | 1265. | 1265. | 1265. | 1264. | 1262. | 1259. | 1257. | 1255. | 1252. | 1250. | | | | | | | | | | | | | |
| HLH2= | 168. | 168. | 168. | 168. | 168. | 168. | 168. | 289. | 452. | 614. | 777. | 940. | | | | | | | | | | | | |
| | 1102. | 1265. | 1265. | 1265. | 1264. | 1012. | 841. | 669. | 498. | 326. | 155. | | | | | | | | | | | | | |

MAX H O U R L Y

| DAY | RATIO | CONCENTRATION | DIRECTION | DISTANCE(KM) | HOUR | CONCENTRATION | DIRECTION | DISTANCE(KM) |
|-----|--------|---------------|-----------|--------------|------|---------------|-----------|--------------|
| 345 | 13.256 | 6.503299E-05 | 7 | 0.50 | 17 | 4.905849E-06 | 7 | 0.50 |

JYR=74 IMO=12 JDAY=346.

| | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| ISTAB= | 6 | 5 | 5 | 5 | 6 | 5 | 5 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 |
| AWS= | 2.6 | 4.1 | 4.1 | 4.1 | 3.1 | 3.1 | 2.1 | 3.1 | 5.1 | 5.1 | 6.2 | 6.2 | 5.1 | 6.7 | 5.1 | 4.1 | 3.6 | 3.1 | 2.1 | 3.6 | 8.7 | 4.1 | 4.6 | 2.6 |

DETERM EMP SOZ COUN FOR SACC JYR72 JDAY175 AND THRU MAN ENERGY

J.

* * * S C U R L E S * * *

| NU. | Q (G/SEC) | HP (M) | TS (DEG-K) | VS (M/SEC) | D(M) | VF(M**3/SEC) | R (KM) | S (KM) |
|-----|-----------|--------|------------|------------|------|--------------|---------|----------|
| 1. | 1.06 | 18.3 | 342.6 | 15.0 | 2.85 | 0.0 | 388.950 | 3047.280 |
| 2. | 0.14 | 18.3 | 304.9 | 30.0 | 0.82 | 0.0 | 388.730 | 3047.180 |
| 3. | 0.35 | 12.2 | 505.4 | 7.6 | 0.31 | 0.0 | 389.180 | 3047.630 |

* * * R E C E P T O R S * * *

| NU. | RRLC(KM) | SREC(KM) | Z (M) |
|-----|----------|----------|-------|
| 1. | 389.500 | 3047.600 | 0.0 |
| 2. | 389.500 | 3047.500 | 0.0 |
| 3. | 389.500 | 3047.400 | 0.0 |
| 4. | 389.600 | 3047.600 | 0.0 |
| 5. | 389.600 | 3047.500 | 0.0 |
| 6. | 389.600 | 3047.400 | 0.0 |
| 7. | 389.700 | 3047.500 | 0.0 |
| 8. | 389.700 | 3047.400 | 0.0 |
| 9. | 389.700 | 3047.300 | 0.0 |
| 10. | 389.800 | 3047.500 | 0.0 |
| 11. | 389.800 | 3047.400 | 0.0 |
| 12. | 389.800 | 3047.300 | 0.0 |
| 13. | 389.900 | 3047.500 | 0.0 |
| 14. | 389.900 | 3047.400 | 0.0 |
| 15. | 389.900 | 3047.300 | 0.0 |
| 16. | 390.000 | 3047.400 | 0.0 |
| 17. | 390.000 | 3047.300 | 0.0 |
| 18. | 390.000 | 3047.200 | 0.0 |
| 19. | 390.100 | 3047.400 | 0.0 |
| 20. | 390.100 | 3047.300 | 0.0 |
| 21. | 390.100 | 3047.200 | 0.0 |
| 22. | 390.100 | 3047.100 | 0.0 |
| 23. | 390.200 | 3047.400 | 0.0 |
| 24. | 390.200 | 3047.300 | 0.0 |
| 25. | 390.200 | 3047.200 | 0.0 |
| 26. | 390.200 | 3047.100 | 0.0 |
| 27. | 390.300 | 3047.300 | 0.0 |
| 28. | 390.300 | 3047.200 | 0.0 |
| 29. | 390.300 | 3047.100 | 0.0 |
| 30. | 390.300 | 3047.000 | 0.0 |

AVERAGE CONCENTRATIONS FOR 24 HOURS.

*** RECEPTOR NUMBER ***

1. 2. 3. 4. 5. 6. 7. 8. 9. 10. 11. 12.

SOURCE PARTIAL CONCENTRATIONS (G/M**3)

| | | | | | | | | | | | | |
|----|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| 1. | 2.773E-20 | 2.800E-14 | 3.419E-10 | 3.015E-17 | 1.450E-12 | 2.035E-09 | 2.500E-11 | 7.028E-09 | 8.851E-08 | 1.870E-10 | 1.646E-08 | 1.162E-07 |
| 2. | 1.296E-19 | 1.582E-14 | 9.789E-11 | 2.713E-17 | 3.735E-13 | 3.984E-10 | 3.555E-12 | 1.055E-09 | 3.472E-08 | 1.856E-11 | 2.121E-09 | 3.909E-08 |
| 3. | 5.054E-06 | 7.111E-06 | 3.822E-07 | 3.134E-06 | 1.089E-05 | 1.459E-06 | 9.293E-06 | 2.626E-06 | 5.963E-07 | 6.831E-06 | 4.374E-06 | 9.239E-07 |

TOTAL CONCENTRATION (G/M**3)

5.054E-06 7.111E-06 3.822E-07 3.134E-06 1.089E-05 1.461E-06 9.293E-06 2.634E-06 7.196E-07 6.831E-06 4.393E-06 1.079E-06

*** RECEPTOR NUMBER ***

13. 14. 15. 16. 17. 18. 19. 20. 21. 22. 23. 24.

SOURCE PARTIAL CONCENTRATIONS (G/M**3)

| | | | | | | | | | | | | |
|----|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| 1. | 7.913E-10 | 2.985E-08 | 1.434E-07 | 4.444E-08 | 1.454E-07 | 4.257E-07 | 5.825E-08 | 1.796E-07 | 3.597E-07 | 1.274E-06 | 7.137E-08 | 1.924E-07 |
| 2. | 6.405E-11 | 3.547E-09 | 4.222E-08 | 5.205E-09 | 4.430E-08 | 1.636E-07 | 6.950E-09 | 4.558E-08 | 1.533E-07 | 2.835E-07 | 8.677E-09 | 4.627E-08 |
| 3. | 4.842E-10 | 5.043E-06 | 1.367E-06 | 4.756E-06 | 2.037E-06 | 6.184E-07 | 4.129E-06 | 2.632E-06 | 7.808E-07 | 3.989E-07 | 3.476E-06 | 2.880E-06 |

TOTAL CONCENTRATION (G/M**3)

4.843E-06 5.076E-06 1.493E-06 4.605E-06 2.246E-06 1.208E-06 4.194E-06 2.857E-06 1.334E-06 1.959E-06 3.556E-06 3.118E-06

*** RECEPTOR NUMBER ***

25. 26. 27. 28. 29. 30.

SOURCE PARTIAL CONCENTRATIONS (G/M**3)

| | | | | | | |
|----|-----------|-----------|-----------|-----------|-----------|-----------|
| 1. | 3.820E-07 | 1.114E-06 | 2.031E-07 | 3.707E-07 | 9.725E-07 | 1.863E-06 |
| 2. | 1.437E-07 | 2.543E-07 | 4.652E-08 | 1.349E-07 | 2.384E-07 | 3.110E-07 |
| 3. | 1.134E-06 | 4.462E-07 | 2.844E-06 | 1.524E-06 | 5.316E-07 | 3.169E-07 |

TOTAL CONCENTRATION (G/M**3)

1.659E-06 1.819E-06 3.094E-06 2.029E-06 1.742E-06 2.493E-06

DETERM CPH SJ2 CODE FOR SACC JYR72 JDAY174 NO WD ADJ

0.

* * * S C U R C F S * * *

| NO | Q (G/SEC) | HP (M) | TS (DEG-K) | VS (M/SEC) | D(M) | VF(M**3/SEC) | R (KM) | S (KM) |
|----|-----------|--------|------------|------------|------|--------------|---------|----------|
| 1. | 1.0E | 18.3 | 342.6 | 15.0 | 2.65 | 0.0 | 388.950 | 3047.260 |
| 2. | 0.14 | 18.3 | 306.9 | 30.0 | 0.82 | 0.0 | 388.730 | 3047.180 |
| 3. | 0.35 | 12.2 | 505.4 | 7.6 | 0.31 | 0.0 | 389.180 | 3047.630 |

* * * R E C F P T C F S * * *

| NO. | RREC(KM) | SREC(KM) | Z (M) |
|-----|----------|----------|-------|
|-----|----------|----------|-------|

| | | | |
|-----|---------|----------|-----|
| 1. | 391.000 | 3047.000 | 0.0 |
| 2. | 391.000 | 3047.700 | 0.0 |
| 3. | 391.000 | 3047.600 | 0.0 |
| 4. | 391.000 | 3047.500 | 0.0 |
| 5. | 391.000 | 3047.400 | 0.0 |
| 6. | 391.000 | 3047.300 | 0.0 |
| 7. | 391.000 | 3047.200 | 0.0 |
| 8. | 391.000 | 3047.100 | 0.0 |
| 9. | 391.000 | 3047.000 | 0.0 |
| 10. | 391.100 | 3047.700 | 0.0 |
| 11. | 391.100 | 3047.500 | 0.0 |
| 12. | 391.100 | 3047.300 | 0.0 |
| 13. | 391.100 | 3047.100 | 0.0 |
| 14. | 389.200 | 3047.300 | 0.0 |
| 15. | 389.400 | 3047.600 | 0.0 |
| 16. | 389.400 | 3047.200 | 0.0 |
| 17. | 389.600 | 3047.700 | 0.0 |
| 18. | 389.600 | 3047.500 | 0.0 |
| 19. | 389.600 | 3047.300 | 0.0 |
| 20. | 389.800 | 3047.600 | 0.0 |
| 21. | 389.800 | 3047.400 | 0.0 |
| 22. | 389.800 | 3047.200 | 0.0 |
| 23. | 390.000 | 3047.700 | 0.0 |
| 24. | 390.000 | 3047.500 | 0.0 |
| 25. | 390.000 | 3047.300 | 0.0 |
| 26. | 390.200 | 3047.600 | 0.0 |
| 27. | 390.200 | 3047.400 | 0.0 |
| 28. | 390.200 | 3047.200 | 0.0 |
| 29. | 390.400 | 3047.700 | 0.0 |
| 30. | 390.400 | 3047.500 | 0.0 |

AVERAGE CONCENTRATIONS FOR 24 HOURS.

RECEPATOR NUMBER

1. 2. 3. 4. 5. 6. 7. 8. 9. 10. 11. 12.

SOURCE PARTIAL CONCENTRATIONS (G/M**3)

| | | | | | | | | | | | | |
|----|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| 1. | 2.083E-07 | 3.168E-07 | 4.339E-07 | 7.109E-07 | 1.223E-06 | 1.613E-06 | 1.631E-06 | 1.326E-06 | 8.546E-07 | 3.370E-07 | 7.330E-07 | 1.562E-06 |
| 2. | 5.164E-08 | 1.014E-07 | 1.484E-07 | 1.649E-07 | 2.076E-07 | 3.049E-07 | 3.703E-07 | 3.645E-07 | 3.068E-07 | 1.076E-07 | 1.575E-07 | 2.907E-07 |
| 3. | 8.867E-07 | 1.356E-06 | 1.515E-06 | 1.293E-06 | 8.319E-07 | 4.290E-07 | 2.990E-07 | 2.629E-07 | 1.613E-07 | 1.264E-06 | 1.213E-06 | 4.378E-07 |

TOTAL CONCENTRATION (G/M**3)

1.147E-06 1.774E-06 2.097E-06 2.169E-06 2.262E-06 2.347E-06 2.300E-06 1.953E-06 1.323E-06 1.709E-06 2.103E-06 2.291E-06

RECEPATOR NUMBER

13. 14. 15. 16. 17. 18. 19. 20. 21. 22. 23. 24.

SOURCE PARTIAL CONCENTRATIONS (G/M**3)

| | | | | | | | | | | | | |
|----|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| 1. | 1.311E-06 | 2.342E-08 | 1.287E-14 | 2.394E-07 | 3.945E-13 | 2.302E-08 | 9.755E-07 | 2.242E-08 | 4.3C1E-07 | 1.483E-06 | 1.612E-08 | 2.268E-07 |
| 2. | 3.425E-07 | 3.050E-07 | 2.831E-12 | 1.780E-06 | 5.910E-12 | 3.532E-08 | 5.269E-07 | 1.408E-08 | 2.852E-07 | 1.040E-06 | 6.515E-09 | 1.497E-07 |
| 3. | 2.558E-07 | 0.0 | 1.016E-05 | 0.0 | 2.797E-06 | 1.964E-06 | 1.589E-13 | 7.187E-06 | 6.079E-07 | 6.442E-12 | 3.046E-06 | 2.083E-06 |

TOTAL CONCENTRATION (G/M**3)

1.909E-06 3.284E-07 1.016E-05 2.019E-06 2.797E-06 2.023E-06 1.502E-06 7.223E-06 1.323E-06 2.524E-06 3.068E-06 2.459E-06

RECEPATOR NUMBER

25. 26. 27. 28. 29. 30.

SOURCE PARTIAL CONCENTRATIONS (G/M**3)

| | | | | | | |
|----|-----------|-----------|-----------|-----------|-----------|-----------|
| 1. | 1.858E-06 | 1.842E-07 | 9.587E-07 | 1.918E-06 | 1.412E-07 | 4.570E-07 |
| 2. | 4.859E-07 | 7.619E-08 | 2.798E-07 | 6.864E-07 | 4.083E-08 | 2.047E-07 |
| 3. | 2.217E-07 | 3.556E-06 | 7.920E-07 | 9.944E-08 | 2.168E-06 | 1.888E-06 |

TOTAL CONCENTRATION (G/M**3)

2.566E-06 3.816E-06 2.031E-06 2.704E-06 2.350E-06 2.549E-06

DETERM VPB S02 CONC FOR SACC JYR74 JJAY341

D.

* * * S U R F C L S * * *

| NO. | Q (L/SEC) | HP (ft) | TS (DEG-K) | VS (M/SIC) | DM (ft) | VF(M+S3/SEC) | R (KM) | S (KM) |
|-----|-----------|---------|------------|------------|---------|--------------|---------|----------|
| 1. | 1.08 | 18.3 | 342.6 | 15.0 | 2.85 | 0.0 | 388.950 | 3047.280 |
| 2. | 0.14 | 18.3 | 304.9 | 30.0 | 0.82 | 0.0 | 388.730 | 3047.180 |
| 3. | 0.35 | 12.2 | 505.4 | 7.6 | 0.31 | 0.0 | 369.180 | 3047.630 |

* * * R F C E P T O K S * * *

| NO. | RRFC(KM) | SRFC(KM) | Z (M) |
|-----|----------|----------|-------|
| 1. | 388.500 | 3048.700 | 0.0 |
| 2. | 388.600 | 3048.700 | 0.0 |
| 3. | 388.700 | 3048.700 | 0.0 |
| 4. | 388.800 | 3048.700 | 0.0 |
| 5. | 388.900 | 3048.700 | 0.0 |
| 6. | 389.000 | 3048.700 | 0.0 |
| 7. | 389.100 | 3048.700 | 0.0 |
| 8. | 389.200 | 3048.700 | 0.0 |
| 9. | 389.300 | 3048.700 | 0.0 |
| 10. | 389.400 | 3048.700 | 0.0 |
| 11. | 389.500 | 3048.700 | 0.0 |
| 12. | 389.600 | 3048.700 | 0.0 |
| 13. | 389.700 | 3048.700 | 0.0 |
| 14. | 389.800 | 3048.700 | 0.0 |
| 15. | 389.900 | 3048.700 | 0.0 |
| 16. | 389.000 | 3048.800 | 0.0 |
| 17. | 389.100 | 3048.800 | 0.0 |
| 18. | 389.200 | 3048.800 | 0.0 |
| 19. | 389.300 | 3048.800 | 0.0 |
| 20. | 389.400 | 3048.800 | 0.0 |
| 21. | 389.500 | 3048.800 | 0.0 |
| 22. | 389.600 | 3048.800 | 0.0 |
| 23. | 389.700 | 3048.800 | 0.0 |
| 24. | 389.800 | 3048.800 | 0.0 |
| 25. | 389.900 | 3047.800 | 0.0 |
| 26. | 388.700 | 3047.700 | 0.0 |
| 27. | 388.900 | 3047.700 | 0.0 |
| 28. | 389.100 | 3047.700 | 0.0 |
| 29. | 389.800 | 3047.500 | 0.0 |
| 30. | 389.000 | 3047.500 | 0.0 |

AVERAGE CONCENTRATIONS FOR 24 HOURS.

RECEP.T.R. NUMBER

1. 2. 3. 4. 5. 6. 7. 8. 9. 10. 11. 12.

SOURCE PARTIAL CONCENTRATIONS (G/M**3)

| | | | | | | | | | | | | |
|----|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| 1. | 1.295E-07 | 1.573E-07 | 1.842E-07 | 3.343E-07 | 5.055E-07 | 5.754E-07 | 4.365E-07 | 1.393E-07 | 2.040E-08 | 1.193E-09 | 2.761E-11 | 6.028E-07 |
| 2. | 1.221E-07 | 2.446E-07 | 3.858E-07 | 3.791E-07 | 2.329E-07 | 7.929E-08 | 1.309E-08 | 9.641E-10 | 3.147E-11 | 4.505E-13 | 2.907E-15 | 9.020E-08 |
| 3. | 5.745E-08 | 1.576E-07 | 2.271E-07 | 4.231E-07 | 7.450E-07 | 6.086E-07 | 1.416E-06 | 2.075E-06 | 1.207E-06 | 2.263E-07 | 1.010E-06 | 5.604E-07 |

TOTAL CONCENTRATION (G/M**3)

3.050E-07 5.545E-07 7.971E-07 1.136E-06 1.483E-06 1.263E-06 1.836E-06 2.215E-06 1.228E-06 2.275E-07 1.012E-08 1.253E-06

RECEP.T.R. NUMBER

13. 14. 15. 16. 17. 18. 19. 20. 21. 22. 23. 24.

SOURCE PARTIAL CONCENTRATIONS (G/M**3)

| | | | | | | | | | | | | |
|----|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| 1. | 4.501E-07 | 1.200E-22 | 6.356E-08 | 4.384E-07 | 1.987E-07 | 1.635E-08 | 2.785E-07 | 9.651E-08 | 1.036E-05 | 9.594E-08 | 8.181E-08 | 2.222E-09 |
| 2. | 1.091E-08 | 6.418E-29 | 1.324E-10 | 3.775E-08 | 5.324E-07 | 5.137E-12 | 1.290E-08 | 6.323E-07 | 1.772E-14 | 1.488E-09 | 5.623E-08 | 3.725E-14 |
| 3. | 1.310E-06 | 7.832E-22 | 2.831E-06 | 1.168E-06 | 2.597E-07 | 4.116E-06 | 1.527E-06 | 6.347E-07 | 6.279E-06 | 9.502E-07 | 1.457E-06 | 3.174E-06 |

TOTAL CONCENTRATION (G/M**3)

1.779E-06 9.033E-22 2.895E-06 1.044E-06 9.908E-07 4.132E-06 1.810E-06 1.364E-06 6.280E-06 1.048E-06 1.595E-06 3.177E-06

RECEP.T.R. NUMBER

25. 26. 27. 28. 29. 30.

SOURCE PARTIAL CONCENTRATIONS (G/M**3)

| | | | | | | |
|----|-----------|-----------|-----------|-----------|-----------|-----------|
| 1. | 8.013E-09 | 7.275E-09 | 1.011E-08 | 5.371E-13 | 2.616E-11 | 1.435E-17 |
| 2. | 1.076E-11 | 1.042E-06 | 3.626E-09 | 7.599E-21 | 1.351E-07 | 2.055E-25 |
| 3. | 1.967E-06 | 4.024E-07 | 4.078E-08 | 3.072E-07 | 4.443E-09 | 3.334E-33 |

TOTAL CONCENTRATION (G/M**3)

1.975E-06 1.531E-06 5.451E-08 3.072E-07 1.396E-07 1.435E-17

Best Available Copy

TALL DUETTE NINE NITROGEN OXIDE EMISSIONS 1969-1970 STAR NET DATA

SOURCE DATA

ANNUAL SOURCE EMISSION RATE STACK DATA

| SOURCE NUMBER | SOURCE LOCATION (KILIMETERS) | SOURCE AREA SQUARE | ANNUAL SOURCE EMISSION RATE (TONS/DAY) | H1 | DIAM | VEL | TEMP | | |
|---------------|------------------------------|--------------------|--|-----|-------|------|------|------|------|
| 1 | 266.9 | 2047.3 | 0.0 | 0.0 | 0.773 | 16.2 | 2.4 | 15.0 | 342° |
| 2 | 265.4 | 2047.6 | 0.0 | 0.0 | 0.008 | 16.2 | 0.3 | 1.6 | 505° |
| 4 | 215.3 | 2047.3 | 0.04 | 0.0 | 0.005 | 1.0 | 0.0 | 0.0 | 0. |
| 5 | 266.4 | 2047.5 | 0.14 | 0.0 | 0.004 | 0.0 | 0.0 | 0.0 | 0. |
| 7 | 267.1 | 2047.5 | 0.14 | 0.0 | 0.004 | 0.0 | 0.0 | 0.0 | 0. |
| 8 | 266.4 | 2047.1 | 0.14 | 0.0 | 0.004 | 0.0 | 0.0 | 0.0 | 0. |
| 10 | 217.1 | 2047.5 | 0.14 | 0.0 | 0.004 | 0.0 | 0.0 | 0.0 | 0. |
| 11 | 266.4 | 2047.1 | 0.14 | 0.0 | 0.004 | 0.0 | 0.0 | 0.0 | 0. |

Best Available Copy

SACO DUETTE MINE NITROGEN OXIDE EMISSIONS 1969-1972 STAR NET DATA

RECEIVER DATA

LOCATIONS TO BE USED AS RECEIVERS IN ADDITION TO THE 152 RECTANGULAR GRID LOCATIONS

| RECEIVER
NUMBER | X-COORDINATE
EXTREMES | Y-COORDINATE
EXTREMES |
|--------------------|--------------------------|--------------------------|
| 193 | 386.2 | 3047.5 |
| 194 | 391.0 | 3047.5 |
| 195 | 389.3 | 3048.7 |
| 196 | 389.1 | 3048.9 |
| 197 | 367.4 | 3047.5 |

Best Available Copy

SACI DUETTE FINE NITROGEN OXIDE EMISSIONS 1966-1972 STAR MET DATA

SOURCE CONTRIBUTIONS TO FIVE SELECTED RECEPTORS

ANNUAL - PARTICULATES

MICROGRAMS PER CUBIC METER

| SOURCE | RELATIVE | RECEPTOR | RECEPTOR | RECEPTOR | RELATIVE |
|--------|----------|----------|----------|----------|----------|
| 1 | 22.01 | 14.93 | 165.02 | 60.01 | 45.34 |
| 2 | 1.59 | 4.07 | 10.80 | 2.95 | 4.54 |
| 3 | 3.04 | 3.49 | 7.45 | 5.61 | 5.62 |
| 4 | 0.65 | 2.56 | 4.62 | 2.07 | 2.22 |
| 5 | 7.05 | 0.42 | 0.41 | 0.51 | 2.24 |
| 6 | 5.17 | 0.48 | 1.12 | 0.54 | 3.57 |
| 7 | 0.61 | 0.28 | 1.66 | 0.50 | 2.54 |
| 8 | 17.00 | 0.48 | 0.74 | 1.00 | 2.72 |
| 9 | 0.41 | 0.54 | 0.75 | 1.01 | 4.74 |
| 10 | 5.12 | 0.62 | 0.74 | 1.06 | 5.01 |
| 11 | 7.02 | 0.40 | 0.50 | 1.01 | 1.41 |
| 12 | 4.62 | 0.47 | 0.58 | 1.17 | 2.61 |
| 13 | 3.20 | 0.51 | 0.70 | 1.22 | 5.42 |
| BACK | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| TOTAL | 100.0 | 100.0 | 100.0 | 100.0 | 100.0 |