NOTICE OF FINAL PERMIT REVISION

In the Matter of an Application for Permit Revision by:

Robert Bergstrom FINAL Permit Revision No.: 1070014-004-AV Plant General Manager Florida Power and Light Company Putnam Plant 392 U.S. Highway 17 South East Palatka, Florida 32131

Enclosed is FINAL Permit Revision Number 1070014-004-AV for the operation of the Florida Power and Light Company Putnam Plant located at 392 U.S. Highway 17 South, East Palatka, Putnam County, issued pursuant to Chapter 403, Florida Statutes (F.S.).

Any party to this order (permit revision) has the right to seek judicial review of the permit revision pursuant to Section 120.68, F.S., by the filing of a Notice of Appeal pursuant to Rule 9.110, Florida Rules of Appellate Procedure, with the Clerk of the permitting authority in the Legal Office; and by filing a copy of the Notice of Appeal accompanied by the applicable filing fees with the appropriate District Court of Appeal. The Notice of Appeal must be filed within 30 (thirty) days from the date this Notice is filed with the Clerk of the permitting authority.

Executed in Tallahassee, Florida.

STATE OF FLORIDA DEPARTMENT OF ENVIRONMENTAL PROTECTION

Putnam Plant

C. H. Fancy, P.E

Chief

Bureau of Air Regulation

FINAL Permit Revision No.: 1070014-004-AV

Page 2 of 2

CERTIFICATE OF SERVICE

The undersigned duly designated deputy agency clerk hereby certifies that this NOTICE OF FINAL PERMIT REVISION (including the FINAL permit revision) and all copies were sent by certified mail before the close of business on $\frac{6}{20}$ to the person(s) listed or as otherwise noted:

Robert Bergstrom, Florida Power and Light Company

In addition, the undersigned duly designated deputy agency clerk hereby certifies that copies of this NOTICE OF FINAL PERMIT REVISION (including the Statement of Basis) were sent by U.S. mail on the same date to the person(s) listed or as otherwise noted:

Richard G. Piper, Florida Power and Light Company Kennard F. Kosky, P.E., Golder Associates, Inc.

In addition, the undersigned duly designated deputy agency clerk hereby certifies that copies of this NOTICE OF FINAL PERMIT REVISION (including the FINAL Title V operation permit revision package) were sent by INTERNET E-mail on the same date to the person(s) listed:

Chris Kirts, P.E., DEP, Northeast District Office Hamilton S. Oven, Jr., P.E., DEP, Siting Coordination Office Gregg Worley, U.S. EPA, Region 4 Elizabeth Bartlett, U.S. EPA, Region 4

Clerk Stamp

FILING AND ACKNOWLEDGMENT FILED, on this date, pursuant to Section 120.52(7), Florida Statutes, with the designated agency Clerk, receipt of which is hereby acknowledged.

lerk)

the reverse side?	SENDER: Complete items 1 and/or 2 for additional services. Complete items 3, 4a, and 4b. Print your name and address on the reverse of this form so that we card to you. Attach this form to the front of the mailpiece, or on the back if space permit. Write "Return Receipt Requested" on the mailpiece below the article The Return Receipt will show to whom the article was delivered and delivered.	does not number.		s (for an ee's Address 3 d Delivery 3
ted on	3. Article Addressed to: Mr. Robert Bergstrom		212 837	
ADDRESS complet	Plant General Manager Florida Power and Light Company Putnam Plant 392 U.S. Highway 17 South East Palatka, Florida 32131	4b. Service Register Express Return Re 7. Date of D	ed Mail ceipt for Merchandise	XXI Certified Insured COD
Is your RETURN	5. Received By: (Print Name) 6. Signature: (Addressed or Agent) PS form 3811, De saint	8. Addresse and fee i	ee's Address (Only s paid)	if requested

Z 094 212 837

US Postal Service **Receipt for Certified Mail**

No Insurance Coverage Provided.

Do not use for International Mail (See reverse) Sent to Robert Bergstrom Mr. Stoge & Number . Highway 17 South Post Office, State, & ZIP Code East Palatka, 32131 \$ Postage Certified Fee Special Delivery Fee Restricted Delivery Fee Return Receipt Showing to Whom & Date Delivered

Return Receipt Showing to Whom Date, & Addressee's Address Return Receipt Showing to Whom Date, & Addressee's Address TOTAL Postage & Fees

STATEMENT OF BASIS

Title V FINAL Permit Revision No.: 1070014-004-AV
Florida Power and Light Company
Putnam Plant
Putnam County

This facility was issued an initial Final Title V Air Operation Permit (Permit No. 1070014-001-AV) on June 17, 1998. An administrative permit correction (Project No. 1070014-002-AV) to Permit No. 1070014-001-AV was issued on July 27, 1998. The Department issued Air Construction (AC) Permit No. 1070014-003-AC on July 20, 1999. The AC permit described the existing facility that was approved through Power Plant Certification No. PA 74-01 and allowed installation of inlet foggers on the four 70 MW Westinghouse Model 501B5A combined cycle combustion turbine-electrical generators (Emissions units 003 through 006). The inlet foggers reduce the turbine inlet air temperature, which improves the heat rate and increases power due to the cooler/denser inlet air.

This Title V Permit Revision incorporates the new inlet fogger conditions from Permit No. 1070014-003-AC into the Title V Air Operation Permit. This revision is issued under the provisions of Chapter 403, Florida Statutes (F.S.), and Florida Administrative Code (F.A.C.) Chapters 62-4, 62-210, 62-213, and 62-214. The above named permittee is hereby authorized to perform the work or operate the facility shown on the application and approved drawing(s), plans, and other documents, attached hereto or on file with the permitting authority, in accordance with the terms and conditions of this permit revision.

The facility consists of four combustion turbines, each with an associated heat recovery steam generator equipped with duct burners, an auxiliary boiler, and unregulated emissions units. Each combustion turbine is a Westinghouse unit rated at 70 MW generating capacity (at 85 degrees F ambient temperature), with a maximum heat input for natural gas and fuel oil of 968.3 mmBtu/hr and 910.6 mmBtu/hr, respectively. The duct burners for each HRSG are rated at a maximum heat input of 250 mmBtu/hr, and are fired with natural gas and number 2 fuel oil. The auxiliary boiler is manufactured by VA-Power and has a maximum heat input for natural gas and number 2 fuel oil of 16.275 mmBtu/hr and 14.28 mmBtu/hr, respectively.

Revisions to the Initial Final Title V Permit No. 1070014-001-AV for the Florida Power and Light Company Putnam Plant are described below.

1. The following information is hereby added to Subsection C., Relevant Documents:

These documents are on file with the permitting authority:
Initial Title V Air Operation Permit issued June 17, 1998.
Administrative Permit Correction to Initial Title V Air Operation Permit issued July 27, 1998.
Title V Permit Revision Application received September 28, 1999.

2. The permitting note under the list of emissions units for Section III., Subsection A. is hereby changed as follows:

FROM:

{Permitting notes: These emissions units are regulated under Rule 62-210.300, F.A.C., Permits Required and Power Plant Siting Certification No. PA 74-01 ordered 10/16/74, and the modified conditions of PA 74-01 modified 5/20/80, 3/15/84, 7/16/91 and 5/28/92.....}

TO:

{Permitting notes: These emissions units are regulated under Acid Rain, Phase II; Rule 62-210.300, F.A.C., Permits Required; Power Plant Siting Certification No. PA 74-01 ordered 10/16/74, and the modified conditions of PA 74-01 modified 5/20/80, 3/15/84, 7/16/91 and 5/28/92; and, Air Construction Permit No. 1070014-003-AC....}

3. Specific Condition A.3. (Subsection A., Emission Units -003 to -006, Combustion Turbines) is hereby changed as follows:

FROM:

A.3. <u>Methods of Operation - Fuels</u>. The combustion turbines shall only be fired with number 2 or number 6 fuel oil or with natural gas. [Rule 62-213.410, F.A.C.; and, PPSC PA 74-01 condition 1.B.(i)]

TO:

- A.3. Methods of Operation.
- a. <u>Fuels</u>. The combustion turbines shall only be fired with number 2 or number 6 fuel oil or with natural gas.
- b. <u>Inlet Foggers</u>. The four inlet foggers installed at the compressor inlet to each of the four combined cycle combustion turbines may operate up to 40,960 degree F-hours per year in aggregate (average 10,240 degree F-hours per unit per year).

The permittee shall monitor both the hours of operation for the inlet foggers and the degrees of cooling afforded by the inlet foggers. Computation of the degree-hour will be performed as follows:

Degree-hours = # hours inlet fogger operating time X degrees F of cooling

Degrees of Cooling shall be calculated by subtracting the fogged compressor inlet air temperature from the unfogged compressor inlet temperature (upstream of the fogger). The above calculation shall be performed for each hour of fogger operation. Calculation records shall be maintained on the plant site and made available for inspection upon request.

For each hour of oil operation on any combustion turbine during a calendar year, the allowable aggregate total inlet fogger operating degree-hour shall be reduced by 1.27 degree F-hours. [Rule 62-213.410, F.A.C.; PPSC PA 74-01 condition 1.B.(i); and, 1070014-003-AC]

- 4. Appendix TV-1, Title V Conditions, is hereby updated to Appendix TV-3. Appendix TV-3 incorporates Rule changes promulgated since the Initial Title V Air Operation Permit was issued. All references to TV-1 are changed to TV-3 as follows:
 - a. Placard Page

FROM:

Referenced attachments made a part of this permit revision:

Appendix U-1, List of Unregulated Emissions Units and/or Activities Appendix I-1, List of Insignificant Emissions Units and/or Activities Appendix T, Heat Input vs. Ambient Temperature Curves Appendix TV-1, Title V Conditions (version dated 12/02/97)

TO:

Referenced attachments made a part of this permit revision:

Appendix U-1, List of Unregulated Emissions Units and/or Activities Appendix I-1, List of Insignificant Emissions Units and/or Activities Appendix T, Heat Input vs. Ambient Temperature Curves Appendix TV-3, Title V Conditions (version dated 04/30/99)

b. Section II. Facility-Wide Conditions.

FROM:

1. APPENDIX TV-1, TITLE V CONDITIONS, is a part of this permit.

{Permitting note: APPENDIX TV-1, TITLE V CONDITIONS, is distributed to the permittee only. Other persons requesting copies of these conditions shall be provided a copy when requested or otherwise appropriate.}

TO:

1. APPENDIX TV-3, TITLE V CONDITIONS, is a part of this permit.

{Permitting note: APPENDIX TV-3, TITLE V CONDITIONS, is distributed to the permittee only. Other persons requesting copies of these conditions shall be provided a copy when requested or otherwise appropriate.}

FROM:

10. Statement of Compliance. The annual statement of compliance pursuant to Rule 62-213.440(3), F.A.C., shall be submitted within 60 (sixty) days after the end of the calendar year.

{See condition No. 51., Appendix TV-1, Title V Conditions} [Rule 62-214.420(11), F.A.C.]

TO:

10. Statement of Compliance. The annual statement of compliance pursuant to Rule 62-213.440(3), F.A.C., shall be submitted within 60 (sixty) days after the end of the calendar year. {See condition No. 51., Appendix TV-3, Title V Conditions}

[Rule 62-214.420(11), F.A.C.]

{Permitting Note: The annual statement of compliance must reflect the facility's operation and compliance prior to a "Permit Revision's effective date" and the facility's operation and compliance including and after a "Permit Revision's effective date".}

5. Facility-Wide Condition 4. is hereby changed to the "revised" Risk Management Plan language as follows:

FROM:

- 4. <u>Prevention of Accidental Releases (Section 112(r) of CAA)</u>. If required by 40 CFR 68, the permittee shall submit to the implementing agency:
 - a. a risk management plan (RMP) when, and if, such requirement becomes applicable; and
- b. certification forms and/or RMPs according to the promulgated rule schedule. [40 CFR 68]

TO:

- 4. Prevention of Accidental Releases (Section 112(r) of CAA).
- a. The permittee shall submit its Risk Management Plan (RMP) to the Chemical Emergency Preparedness and Prevention Office (CEPPO) RMP Reporting Center when, and if, such requirement becomes applicable; and
- b. The permittee shall submit to the permitting authority Title V certification forms or a compliance schedule in accordance with Rule 62-213.440(2), F.A.C. [40 CFR 68]
- 6. Facility-Wide Condition 11. is hereby divided into two conditions and updated with "new" DEP and EPA information as follows:

FROM:

11. The permittee shall submit all compliance related notifications and reports required of this permit to the Department's Northeast District office:

Department of Environmental Protection, Northeast District Office

Air Section

7825 Baymeadows Way, Suite 200B

Jacksonville, FL 32256-7590

Telephone: 904/448-4310 Fax: 904/448-4363

Any reports, data, notifications, certifications and requests required to be sent to the United States Environmental Protection Agency, Region 4, should be sent to:

United States Environmental Protection Agency, Region 4

Air, Pesticides & Toxics Management Division

Operating Permits Section

61 Forsyth Street

Atlanta, GA 30303

Phone: 404/562-9099 Fax: 404/562-9095

TO:

11. The permittee shall submit all compliance related notifications and reports required of this permit to the Department's Northeast District office:

Department of Environmental Protection, Northeast District Office

Air Section

7825 Baymeadows Way, Suite 200B Jacksonville, FL 32256-7590

Telephone: 904/448-4300 Fax: 904/448-4363

12. Any reports, data, notifications, certifications and requests required to be sent to the United States Environmental Protection Agency, Region 4, should be sent to:

United States Environmental Protection Agency, Region 4
Air, Pesticides & Toxics Management Division
Air & EPCRA Enforcement Branch
Air Enforcement Section
61 Forsyth Street
Atlanta, GA 30303

Phone: 404/562-9155 Fax: 404/562-9163 or 404/562-9164

Florida Power & Light Company
Putnam Plant
Facility ID No.: 1070014
Putnam County

Title V Air Operation Permit Revision FINAL Permit Revision No.: 1070014-004-AV

Permitting Authority:

State of Florida
Department of Environmental Protection
Division of Air Resources Management
Bureau of Air Regulation
Title V Section

Mail Station #5505 2600 Blair Stone Road Tallahassee, Florida 32399-2400 Telephone: 850/488-0114 Fax: 850/922-6979

Title V Air Operation Permit Revision FINAL Permit Revision No.: 1070014-004-AV

Table of Contents

Section	Page Number
Placard Page	1
I. Facility Information	2 - 3
A. Facility Description.	
B. Summary of Emissions Unit ID No(s). and Brief Description(s).	
C. Relevant Documents.	
II. Facility-wide Conditions	4 - 5
III. Emissions Units and Conditions	
A. Emissions Unit 003 - 006, Combustion Turbines	6 - 9
B. Emissions Unit 007 - 010, HRSG Duct burners	
C. Emissions Unit 011, Auxiliary Boiler	
D. Common Conditions	
E. NSPS Common Conditions	23 - 28
IV. Acid Rain Part	
A. Acid Rain, Phase II	29 - 30
Attachments	end



Department of Environmental Protection

Jeb Bush Governor Twin Towers Office Building 2600 Blair Stone Road Tallahassee, Florida 32399-2400

David B. Struhs Secretary

Permittee:

Florida Power & Light 392 U.S. Highway 17 South East Palatka, FL FINAL Permit Revision No.: 1070014-004-AV

Facility ID No.: 1070014 SIC Nos.: 49, 4911

Project: Title V Air Operation Permit Revision

This permit revision is for the operation of the Putnam Plant. This facility is located at US 17 South, East Palatka, Putnam County; UTM Coordinates: Zone 17, 443368.85 km East and 3277807.32 km North; Latitude: 29° 37' 44" North and Longitude: 81° 35' 6" West.

STATEMENT OF BASIS: This Title V air operation permit revision is issued under the provisions of Chapter 403, Florida Statutes (F.S.), and Florida Administrative Code (F.A.C.) Chapters 62-4, 62-210, 62-213, and 62-214. The above named permittee is hereby authorized to perform the work or operate the facility shown on the application and approved drawing(s), plans, and other documents, attached hereto or on file with the permitting authority, in accordance with the terms and conditions of this permit.

Referenced attachments made a part of this permit revision:

Appendix U-1, List of Unregulated Emissions Units and/or Activities Appendix I-1, List of Insignificant Emissions Units and/or Activities Appendix T, Heat Input vs. Ambient Temperature Curves Appendix TV-3, Title V Conditions (version dated 04/30/99) Appendix SS-1, Stack Sampling Facilities (version dated 10/07/96) Table 297.310-1, Calibration Schedule (version dated 10/07/96) Figure 1 - Summary Report-Gaseous and Opacity Excess Emission and Monitoring System Performance Report (version dated 7/96) Phase II Acid Rain Application/Compliance Plan received 12/6/95

Title V/IV Permit Effective Date: January 1, 1999 Permit Revision Effective Date: April 10, 2000 Renewal Application Due Date: July 5, 2003

Expiration Date: December 31, 2003

for

Howard L. Rhodes, Director Division of Air Resources Management

HLR/sms/wa

FINAL Permit Revision No.: 1070014-004-AV

Facility ID No.: 1070014

Section I. Facility Information.

Subsection A. Facility Description.

The facility consists of four combustion turbines, each with an associated inlet fogger and heat recovery steam generator equipped with duct burners, an auxiliary boiler, and unregulated emissions units. Each combustion turbine is a Westinghouse unit rated at 70 MW generating capacity (at 85 degrees F ambient temperature), with a maximum heat input for natural gas and fuel oil of 968.3 mmBtu/hr and 910.6 mmBtu/hr, respectively. The duct burners for each HRSG are rated at a maximum heat input of 250 mmBtu/hr, and are fired with natural gas and number 2 fuel oil. The auxiliary boiler is manufactured by VA-Power and has a maximum heat input for natural gas and number 2 fuel oil of 16.275 mmBtu/hr and 14.28 mmBtu/hr, respectively.

Also included in this permit are miscellaneous unregulated/insignificant emissions units and/or activities.

Based on the initial Title V permit application received June 12, 1996 and the Title V permit revision application received September 28, 1999, this facility is a major source of hazardous air pollutants (HAPs).

Subsection B. Summary of Emissions Unit ID Nos. and Brief Descriptions.

E.U. ID		
No.	Brief Description	
003	Combustion Turbine for Combined Cycle Heat Recovery Steam Generator, HRSG11.	
004	Combustion Turbine for Combined Cycle Heat Recovery Steam Generator, HRSG12.	
005	Combustion Turbine for Combined Cycle Heat Recovery Steam Generator, HRSG21.	
006	Combustion Turbine for Combined Cycle Heat Recovery Steam Generator, HRSG22.	
007	Duct burners for Combined Cycle Heat Recovery Steam Generator, HRSG11.	
008	Duct burners for Combined Cycle Heat Recovery Steam Generator, HRSG12.	
009	Duct burners for Combined Cycle Heat Recovery Steam Generator, HRSG21.	
010	Duct burners for Combined Cycle Heat Recovery Steam Generator, HRSG22.	
011	Auxiliary Boiler.	

{Note: The above emissions unit grouping accommodates the acid rain grouping.}

Unregulated Emissions Units and/or Activities		
012	2 Emergency Diesel Generator, Miscellaneous Mobile Equipment and Internal	
	Combustion Engines	
013	Painting of Plant Equipment and Non-halogenated Solvent Cleaning Operations	

Florida Power & Light Company Putnam Plant Page 3 of 30 FINAL Permit Revision No.: 1070014-004-AV

Facility ID No.: 1070014

Please reference the Permit No., Facility ID No., and appropriate Emissions Unit(s) ID No(s). on all correspondence, test report submittals, applications, etc.

Subsection C. Relevant Documents.

The documents listed below are not a part of this permit; however, they are specifically related to this permitting action.

These documents are provided to the permittee for information purposes only:

Appendix A-1, Abbreviations, Acronyms, Citations, and Identification Numbers

Appendix H-1, Permit History/ID Number Changes

Table 1-1, Summary of Air Pollutant Standards and Terms

Table 2-1, Summary of Compliance Requirements

These documents are on file with the permitting authority:

Initial Title V Permit Application received June 12, 1996.

Additional Information Request dated May 13, 1997.

Additional Information Response received August 15, 1997.

Letter dated August 26, 1997, changing the Responsible Official.

DEP Letter to US EPA Region 4 dated March 10, 1998

US EPA Region 4 letter to DEP received March 25, 1998

Initial Title V Air Operation Permit issued June 17, 1998.

Administrative Permit Correction to Initial Title V Air Operation Permit issued July 27, 1998.

Title V Permit Revision Application received September 28, 1999.

Florida Power & Light Company Putnam Plant Page 4 of 30 FINAL Permit Revision No.: 1070014-004-AV

Facility ID No.: 1070014

Section II. Facility-wide Conditions.

The following conditions apply facility-wide:

1. APPENDIX TV-3, TITLE V CONDITIONS, is a part of this permit. {Permitting note: APPENDIX TV-3, TITLE V CONDITIONS, is distributed to the permittee only. Other persons requesting copies of these conditions shall be provided a copy when requested or otherwise appropriate.}

- **2.** Not Federally Enforceable. General Pollutant Emission Limiting Standards. Objectionable Odor Prohibited. The permittee shall not cause, suffer, allow, or permit the discharge of air pollutants which cause or contribute to an objectionable odor. [Rule 62-296.320(2), F.A.C.]
- 3. General Particulate Emission Limiting Standards. General Visible Emissions Standard. Except for emissions units that are subject to a particulate matter or opacity limit set forth or established by rule and reflected by conditions in this permit, no person shall cause, let, permit, suffer or allow to be discharged into the atmosphere the emissions of air pollutants from any activity, the density of which is equal to or greater than that designated as Number 1 on the Ringelmann Chart (20 percent opacity). EPA Method 9 is the method of compliance pursuant to Chapter 62-297, F.A.C.
 [Rule 62-296.320(4)(b)1. & 4, F.A.C.]
- 4. Prevention of Accidental Releases (Section 112(r) of CAA).
- a. The permittee shall submit its Risk Management Plan (RMP) to the Chemical Emergency Preparedness and Prevention Office (CEPPO) RMP Reporting Center when, and if, such requirement becomes applicable; and
- b. The permittee shall submit to the permitting authority Title V certification forms or a compliance schedule in accordance with Rule 62-213.440(2), F.A.C. [40 CFR 68]
- 5. <u>Unregulated Emissions Units and/or Activities.</u> Appendix U-1, List of Unregulated Emissions Units and/or Activities, is a part of this permit. [Rule 62-213.440(1), F.A.C.]
- 6. <u>Insignificant Emissions Units and/or Activities.</u> Appendix I-1, List of Insignificant Emissions Units and/or Activities, is a part of this permit. [Rules 62-213.440(1), 62-213.430(6), and 62-4.040(1)(b), F.A.C.]
- 7. Not Federally Enforceable. General Pollutant Emission Limiting Standards. Volatile Organic Compounds (VOC) Emissions or Organic Solvents (OS) Emissions. The permittee shall allow no person to store, pump, handle, process, load, unload or use in any process or installation, volatile organic compounds (VOC) or organic solvents (OS) without applying known and existing vapor emission control devices or systems deemed necessary and ordered by the Department. The owner or operator shall:
 - a. Tightly cover or close all VOC or OS containers when they are not in use.
 - b. Tightly cover all open tanks which contain VOC or OS when they are not in use.
 - c. Maintain all pipes, valves, fittings, etc., which handle VOC or OS in good operating condition
 - d. Immediately confine and clean up VOC or OS spills and make sure wastes are placed in closed containers for reuse, recycling or proper disposal.

[Rule 62-296.320(1)(a), F.A.C.; Proposed by applicant in the initial Title V permit application received June 12, 1996]

Florida Power & Light Company Putnam Plant Page 5 of 30 FINAL Permit Revision No.: 1070014-004-AV

Facility ID No.: 1070014

8. Not Federally Enforceable. No person shall cause, let, permit, suffer or allow the emissions of unconfined particulate matter from any activity without taking reasonable precautions to prevent such emissions. Reasonable precautions to prevent emissions of unconfined particulate matter at this facility include:

- a. The facility constructs temporary sandblasting enclosures when necessary, in order to perform sandblasting on fixed plant equipment.
- b. Maintenance of paved areas as needed.
- c. Regular mowing of grass and care of vegetation.
- d. Limiting access to plant property by unnecessary vehicles.
- e. Bagged chemical products are stored in weather-tight buildings until they are used.
- f. Spills of powdered chemical products are cleaned up as soon as practicable.
- g. Vehicles are restricted to slow speeds on the plant site.

[Rule 62-296.320(4)(c)2., F.A.C.; Proposed by applicant in the initial Title V permit application received June 12, 1996]

- 9. When appropriate, any recording, monitoring or reporting requirements that are time-specific shall be in accordance with the effective date of this permit, which defines day one. [Rule 62-213.440, F.A.C.]
- 10. Statement of Compliance. The annual statement of compliance pursuant to Rule 62-213.440(3), F.A.C., shall be submitted within 60 (sixty) days after the end of the calendar year. {See condition No. 51., Appendix TV-3, Title V Conditions} [Rule 62-214.420(11), F.A.C.]

{Permitting note: The statement must reflect the facility's operation and compliance prior to a "Permit Revision's effective date" and the facility's operation and compliance including and after a "Permit Revision's effective date".}

11. The permittee shall submit all compliance related notifications and reports required of this permit to the Department's Northeast District office:

Department of Environmental Protection, Northeast District Office Air Section

7825 Baymeadows Way, Suite 200B Jacksonville, FL 32256-7590

Telephone: 904/448-4300 Fax: 904/448-4363

12. Any reports, data, notifications, certifications and requests required to be sent to the United States Environmental Protection Agency, Region 4, should be sent to:

United States Environmental Protection Agency, Region 4
Air, Pesticides & Toxics Management Division
Air & EPCRA Enforcement Branch
Air Enforcement Section
61 Forsyth Street
Atlanta, GA 30303

Phone: 404/562-9155 Fax: 404/562-9163 or 404/562-9164

{Note: In this permit, citation of "PPSC PA 74-01" shall refer to Power Plant Siting Certification PA 74-01, ordered 10/16/74 and modified 5/20/80, 3/15/84, 7/16/91 and 5/28/92}

FINAL Permit Revision No.: 1070014-004-AV

Facility ID No.: 1070014

Section III. Emissions Units and Conditions.

Subsection A. This section addresses the following emissions units.

003	Combustion Turbine for Combined Cycle Heat Recovery Steam Generator,		
,	HRSG11. This emissions unit consists of a Westinghouse combustion turbine,		
	rated at 70 MW generating capacity (at 85 degrees F ambient temperature). Heat		
Į.	input for this unit may vary at different ambient temperatures in accordance with		
ļ			
	input for natural gas or fuel oil at 85 degrees F ambient temperature is 968.3		
	mmBtu/hr and 910.6 mmBtu/hr, respectively.)		
004	Combustion Turbine for Combined Cycle Heat Recovery Steam Generator,		
	HRSG12. This emissions unit consists of a Westinghouse combustion turbine,		
	rated at 70 MW generating capacity (at 85 degrees F ambient temperature). Heat		
input for this unit may vary at different ambient temperatures in according to the sunit may vary at different ambient temperatures in according to the sunit may vary at different ambient temperatures in according to the sunit may vary at different ambient temperatures in according to the sunit may vary at different ambient temperatures in according to the sunit may vary at different ambient temperatures in according to the sunit may vary at different ambient temperatures in according to the sunit may vary at different ambient temperatures in according to the sunit may vary at different ambient temperatures in according to the sunit may vary at different ambient temperatures in according to the sunit may vary at different ambient temperatures in according to the sunit may vary at different ambient temperatures in according to the sunit may vary at different ambient temperatures in according to the sunit may vary at different ambient temperatures in according to the sunit may vary at different ambient temperatures in according to the sunit may vary at different ambient temperatures in according to the sunit may vary at different ambient temperatures are sunit may be according to the sunit			
	the curves attached as Appendix T of this permit. (As an example, maximum heat		
	input for natural gas or fuel oil at 85 degrees F ambient temperature is 968.3		
	mmBtu/hr and 910.6 mmBtu/hr, respectively.)		
005 Combustion Turbine for Combined Cycle Heat Recovery Steam Gener			
	HRSG21. This emissions unit consists of a Westinghouse combustion turbine,		
	rated at 70 MW generating capacity (at 85 degrees F ambient temperature). Heat		
	input for this unit may vary at different ambient temperatures in accordance with		
	the curves attached as Appendix T of this permit. (As an example, maximum		
	input for natural gas or fuel oil at 85 degrees F ambient temperature is 968.3		
	mmBtu/hr and 910.6 mmBtu/hr, respectively.)		
006	Combustion Turbine for Combined Cycle Heat Recovery Steam Generator,		
	HRSG22. This emissions unit consists of a Westinghouse combustion turbine,		
	rated at 70 MW generating capacity (at 85 degrees F ambient temperature). Heat		
	input for this unit may vary at different ambient temperatures in accordance with		
	the curves attached as Appendix T of this permit. (As an example, maximum heat		
	input for natural gas or fuel oil at 85 degrees F ambient temperature is 968.3		
	mmBtu/hr and 910.6 mmBtu/hr, respectively.)		

{Permitting notes: These emissions units are regulated under Acid Rain, Phase II; Rule 62-210.300, F.A.C., Permits Required; Power Plant Siting Certification No. PA 74-01 ordered 10/16/74, and the modified conditions of PA 74-01 modified 5/20/80, 3/15/84, 7/16/91 and 5/28/92; and, Air Construction Permit No. 1070014-003-AC. Based on information submitted by the applicant in the Title V application, these emissions units are not subject to 40 CFR 60, Subpart GG, Standards of Performance for New Stationary Gas Turbines. Each combustion turbine is exhausted through a heat recovery steam generator. Inlet foggers installed at the compressor inlet to each of the four CTs reduce the turbine inlet air temperature. The temperature reduction improves the heat rate and increases power due to the cooler/denser inlet air. Emissions units 003 and 004 began commercial operation in 1978. Emissions units 005 and 006 began commercial operation in 1977.}

The following specific conditions apply to the emissions units listed above:

٦

FINAL Permit Revision No.: 1070014-004-AV

Facility ID No.: 1070014

Essential Potential to Emit (PTE) Parameters

A.1. Permitted Capacity. The maximum operation heat input rates are as follows:

Unit No.	mmBtu/hr Heat Input	Fuel Type
003, 004, 005, 006	(a)	Natural Gas
	(a)	Fuel Oil

a Heat input is limited at any given ambient temperature in accordance with the curves attached as Appendix T of this permit.

{Note: As an example, maximum heat input for natural gas or fuel oil at 85 degrees F ambient temperature is 968.3 mmBtu/hr and 910.6 mmBtu/hr, respectively.}

{Permitting note: The heat input limitations have been placed in each permit to identify the capacity of each unit for the purposes of confirming that emissions testing is conducted within 90 to 100 percent of the unit's rated capacity (or to limit future operation to 110 percent of the test load), to establish appropriate emission limits and to aid in determining future rule applicability.}

[Rules 62-4.160(2) and 62-210.200(PTE), F.A.C.]

A.2. Emissions Unit Operating Rate Limitation After Testing. See specific condition **D.9.** [Rule 62-297.310(2), F.A.C.]

A.3. Methods of Operation.

- a. <u>Fuels</u>. The combustion turbines shall only be fired with number 2 or number 6 fuel oil or with natural gas.
- b. <u>Inlet Foggers</u>. The four inlet foggers installed at the compressor inlet to each of the four combined cycle combustion turbines may operate up to 40,960 degree F-hours per year in aggregate (average 10,240 degree F-hours per unit per year).

The permittee shall monitor both the hours of operation for the inlet foggers and the degrees of cooling afforded by the inlet foggers. Computation of the degree-hour will be performed as follows:

Degree-hours = # hours inlet fogger operating time X degrees F of cooling

Degrees of Cooling shall be calculated by subtracting the fogged compressor inlet air temperature from the unfogged compressor inlet temperature (upstream of the fogger). The above calculation shall be performed for each hour of fogger operation. Calculation records shall be maintained on the plant site and made available for inspection upon request.

For each hour of oil operation on any combustion turbine during a calendar year, the allowable aggregate total inlet fogger operating degree-hour shall be reduced by 1.27 degree F-hours. [Rule 62-213.410, F.A.C.; PPSC PA 74-01 condition 1.B.(i); and, 1070014-003-AC]

Florida Power & Light Company Putnam Plant Page 8 of 30 FINAL Permit Revision No.: 1070014-004-AV

Facility ID No.: 1070014

Emission Limitations and Standards

A.4. Sulfur Dioxide - Sulfur Content. The fuel oil sulfur content shall not exceed 0.7 percent by weight. See specific condition **A.6**.

[Rules 62-4.070(3) and 62-213.440, F.A.C., and PPSC PA 74-01 condition 1.B.(i)]

A.5. <u>Visible Emissions</u>. Visible emissions shall not exceed 20% opacity, except for one 6-minute period per hour during which opacity shall not exceed 27%. [Rules 62-4.070(3) and 62-213.440, F.A.C., and PPSC PA 74-01 condition 1.B.(ii)]

Test Methods and Procedures

A.6. Sulfur Dioxide - Sulfur Content. The permittee shall demonstrate compliance with the liquid fuel sulfur limit by means of a fuel analysis provided by the vendor upon each fuel delivery. See specific conditions **A.4.** and **A.7**. [Rules 62-213.440 and 62-296.406(3), F.A.C.]

A.7. Fuel Sampling & Analysis - Sulfur. The fuel sulfur content, percent by weight, for liquid fuels shall be evaluated using either ASTM D2622-94, ASTM D4294-90(95), ASTM D1552-95, ASTM D1266-91, or both ASTM D4057-88 and ASTM D129-95 (or latest editions). [Rules 62-4.070(3), 62-213.440 and 62-297.440, F.A.C.]

A.8. <u>Visible Emissions</u>. The permittee shall demonstrate compliance with the visible emissions limit by DEP Method 9. See specific condition **D.6.** [Rules 62-4.070(3) and 62-213.440, F.A.C.]

Monitoring of Operations

A.9. Annual Tests Required - VE. Except as provided in specific conditions **D.4** through **D.5** of this permit, emission testing for visible emissions shall be performed annually, no later than September 30th of each year, except for units that are not operating because of scheduled maintenance outages and emergency repairs, which will be tested within thirty days of returning to service.

[Rules 62-4.070(3) and 62-213.440, F.A.C.]

A.10. Wind Restriction and Monitoring. The owner or operator shall burn fuel oil containing no more than 0.50% sulfur (by weight) when sustained winds exceed 20 miles per hour for any continuous period of three hours or longer. The owner or operator shall measure wind velocity and direction, using recognized methods and procedures, at hourly intervals in the plant vicinity, only for those hours during which any combustion turbine at the plant burns fuel oil containing more than 0.50% sulfur (by weight). The owner or operator shall quarterly report wind data, or shall report that no fuel oil containing more than 0.50% sulfur (by weight) was burned, no later than the thirtieth day following the end of each calendar quarter. [PPSC PA 74-01, condition 2]

Florida Power & Light Company Putnam Plant Page 9 of 30 FINAL Permit Revision No.: 1070014-004-AV

Facility ID No.: 1070014

Excess Emissions

A.11. Excess emissions resulting from malfunction shall be permitted provided that best operational practices to minimize emissions are adhered to and the duration of excess emissions shall be minimized but in no case exceed two hours in any 24 hour period unless specifically authorized by the Department for longer duration.

[Rule 62-210.700(1), F.A.C.]

A.12. Excess emissions resulting from startup or shutdown shall be permitted provided that best operational practices to minimize emissions are adhered to and the duration of excess emissions shall be minimized.

[Rule 62-210.700(2), F.A.C.]

Common Conditions

A.13. These emissions units are also subject to conditions D.1 through D.13 contained in Subsection D. Common Conditions.

FINAL Permit Revision No.: 1070014-004-AV

Facility ID No.: 1070014

Subsection B. This section addresses the following emissions units.

007	Duct burners for Combined Cycle Heat Recovery Steam Generator, HRSG11. This		
	emissions unit consists of duct burners for one heat recovery steam generator. Each		
	HRSG is associated with one combustion turbine. Each HRSG's duct burners have		
	a maximum heat input for natural gas or number 2 fuel oil of 250 mmBtu/hr.		
008	Duct burners for Combined Cycle Heat Recovery Steam Generator, HRSG12. This		
	emissions unit consists of duct burners for one heat recovery steam generator. Each		
	HRSG is associated with one combustion turbine. Each HRSG's duct burners have		
	a maximum heat input for natural gas or number 2 fuel oil of 250 mmBtu/hr.		
009	Duct burners for Combined Cycle Heat Recovery Steam Generator, HRSG21. This		
	emissions unit consists of duct burners for one heat recovery steam generator. Each		
	HRSG is associated with one combustion turbine. Each HRSG's duct burners have		
	a maximum heat input for natural gas or number 2 fuel oil of 250 mmBtu/hr.		
010	Duct burners for Combined Cycle Heat Recovery Steam Generator, HRSG22. This		
	emissions unit consists of duct burners for one heat recovery steam generator. Each		
	HRSG is associated with one combustion turbine. Each HRSG's duct burners have		
	a maximum heat input for natural gas or number 2 fuel oil of 250 mmBtu/hr.		

{Permitting notes: These emissions units are regulated under Rule 62-210.300, F.A.C., Permits Required and Power Plant Siting Certification No. PA 74-01 ordered 10/16/74, and the modified conditions of PA 74-01 modified 5/20/80, 3/15/84, 7/16/91 and 5/28/92. These emissions units are subject to 40 CFR 60, Subpart Db, Standards of Performance for Industrial-Commercial-Institutional Steam Generating Units. Each heat recovery steam generator has two stacks that exhaust emissions from the associated combustion turbine and the duct burners. Emissions units 007 and 008 began commercial operation in 1978. Emissions units 009 and 010 began commercial operation in 1977.}

The following specific conditions apply to the emissions units listed above:

Essential Potential to Emit (PTE) Parameters

B.1. Permitted Capacity. The maximum operation heat input rates are as follows:

Unit No.	mmBtu/hr Heat Input	Fuel Type
007, 008, 009, 010	250	Natural Gas
	250	Fuel Oil

[Rules 62-4.160(2) and 62-210.200(PTE), F.A.C.]

{Permitting note: The heat input limitations have been placed in each permit to identify the capacity of each unit for the purposes of confirming that emissions testing is conducted within 90 to 100 percent of the unit's rated capacity (or to limit future operation to 110 percent of the test load), to establish appropriate emission limits and to aid in determining future rule applicability.}

B.2. Emissions Unit Operating Rate Limitation After Testing. See specific condition **D.9.** [Rule 62-297.310(2), F.A.C.]

Florida Power & Light Company Putnam Plant Page 11 of 30 FINAL Permit Revision No.: 1070014-004-AV

Facility ID No.: 1070014

B.3. Methods of Operation - Fuels. The duct burners shall only be fired with number 2 fuel oil or with natural gas.

[Rule 62-213.410, F.A.C., PPSC PA 74-01 condition 1.C.(i)]

Emission Limitations and Standards

B.4. Sulfur Dioxide - Sulfur Content. The fuel oil sulfur content shall not exceed 0.5 percent by weight. See specific condition **B.7**.

[Rules 62-4.070(3) and 62-213.440, F.A.C., PPSC PA 74-01 condition 1.C.(i), and 40 CFR 60.42b]

- **B.5.** <u>Visible Emissions</u>. Visible emissions shall not exceed 20% opacity (6-minute average), except for one 6-minute period per hour during which opacity shall not exceed 27%. The opacity standards apply at all times, except during periods of startup, shutdown or malfunction. [Rules 62-4.070(3) and 62-213.440, F.A.C., PPSC PA 74-01 condition 1.C.(ii)(a), and 40 CFR 60.43b and 60.46b(a)]
- **B.6.** Nitrogen Oxides. Nitrogen oxide emissions (expressed as NO₂) shall not exceed 0.20 lb/mmBtu while burning natural gas and distillate oil. The nitrogen oxide standards apply at all times including periods of startup, shutdown, or malfunction.

 [40 CFR 60.44b and PPSC PA 74-01 (modification of 5/28/92)]

Test Methods and Procedures

B.7. Sulfur Dioxide - Sulfur Content. The permittee shall demonstrate compliance with the liquid fuel sulfur limit by maintaining fuel receipts as described in 40 CFR 60.49b(r). See specific conditions **B.4.** and **B.14**.

[Rules 62-213.440 and 62-296.406(3), F.A.C., and 40 CFR 60.42b]

- **B.8.** <u>VE Test Methods</u>. To determine compliance with the opacity limits, the owner or operator shall conduct tests using EPA Method 9. [40 CFR 60.46b(d)(7)]
- **B.9.** Test Methods For Nitrogen Oxides. Compliance with the nitrogen oxides emission limit shall be determined through testing using EPA reference methods 7E and 3A, of 40 CFR part 60 appendix A.

[40 CFR 60.46b, PPSC PA 74-01 (modification of 5/28/92)]

{Note: PPSC PA 74-01 (modification of 5/28/92) allows use of EPA methods 7E and 3A instead of EPA method 20.}

Monitoring of Operations

B.10. Emission Tests Required - VE and NOx. Except as provided in specific conditions **D.4** through **D.5** of this permit, emission testing shall be conducted as follows: Emission testing for visible emissions shall be performed annually. Emission testing for nitrogen oxides shall be performed prior to renewal, except that an annual test for nitrogen oxides shall be performed each year that fuel oil is fired in these units for more than 400 hours. Testing shall be completed no later than September 30th of each year required, except for units that are not operating

Florida Power & Light Company Putnam Plant Page 12 of 30 FINAL Permit Revision No.: 1070014-004-AV

Facility ID No.: 1070014

because of scheduled maintenance outages and emergency repairs, which will be tested within thirty days of returning to service.

[Rules 62-4.070(3) and 62-213.440, F.A.C.]

B.11. Emission Monitoring For VE. Prior to burning fuel oil in these emissions units, the owner or operator shall install, calibrate, maintain, and operate a continuous monitoring system for measuring the opacity of emissions discharged to the atmosphere and record the output of the system. This system shall thenceforth be operated whenever fuel oil is burned in these emissions units.

[40 CFR 60.48b(a)]

B.12. CEMS Required by Power Plant Siting. The owner or operator shall maintain a continuous emission monitoring system (CEMS) for opacity and nitrogen oxides on one of the paired stacks for each combined cycle unit.

{The PPSC requires monitors on one stack each of CT/HRSG 1x and 2x, for a total of two stacks that must be monitored. The owner currently operates opacity monitors to satisfy the PPSC requirement to operate the CEMS for opacity. The NOx monitors installed and maintained pursuant to 40 CFR 75 satisfy the PPSC requirement to operate the CEMS for NOx.} [Rule 62-213.440, F.A.C., PPSC PA 74-01 condition 4]

Reporting And Record Keeping Requirements

B.13. Pursuant to 40 CFR 60.49b Reporting And Record Keeping Requirements.

The owner or operator of an affected facility shall record and maintain records of the amounts of each fuel combusted during each day and calculate the annual capacity factor individually for distillate oil and natural gas for each calendar quarter. The annual capacity factor is determined on a 12-month rolling average basis with a new annual capacity factor calculated at the end of each calendar month.

The owner or operator shall maintain records of opacity (required by NSPS whenever fuel oil is burned in these emissions units. See condition B.11 of this permit).

The owner or operator shall maintain records of the following information for each steam generating unit operating day:

- (1) Calendar date.
- (2) The average hourly nitrogen oxides emission rates (expressed as NO2) (lb/million Btu heat input) measured or predicted.
- (3) The 30-day average nitrogen oxides emission rates (lb/million Btu heat input) calculated at the end of each steam generating unit operating day from the measured or predicted hourly nitrogen oxide emission rates for the preceding 30 steam generating unit operating days.
- (4) Identification of the steam generating unit operating days when the calculated 30-day average nitrogen oxides emission rates are in excess of the nitrogen oxides emissions standards under 40 CFR 60.44b, with the reasons for such excess emissions as well as a description of corrective actions taken.

Florida Power & Light Company Putnam Plant Page 13 of 30 FINAL Permit Revision No.: 1070014-004-AV

Facility ID No.: 1070014

(5) Identification of the steam generating unit operating days for which pollutant data have not been obtained, including reasons for not obtaining sufficient data and a description of corrective actions taken.

- (6) Identification of the times when emission data have been excluded from the calculation of average emission rates and the reasons for excluding data.
- (7) Identification of "F" factor used for calculations, method of determination, and type of fuel combusted.

The owner or operator is required to submit excess emission reports for any calendar quarter during which there are excess emissions from the affected facility. If there are no excess emissions during the calendar quarter, the owner or operator shall submit a report semiannually stating that no excess emissions occurred during the semiannual reporting period. For the purpose of the opacity limitation, excess emissions are defined as all 6-minute periods during which the average opacity exceeds the opacity standards.

[40 CFR 60.49b(d), (f), (g)(1)-(7) and (h)]

B.14. Fuel Receipts Required. The owner or operator of an affected facility who elects to demonstrate that the affected facility combusts only very low sulfur oil shall obtain and maintain at the affected facility fuel receipts from the fuel supplier which certify that the oil meets the definition of distillate oil as defined in 40 CFR 60.41b:

<u>Distillate oil</u> means fuel oils that contain 0.05 weight percent nitrogen or less and comply with the specifications for fuel oil numbers 1 and 2, as defined by the American Society of Testing and Materials in ASTM D396-78, Standard Specifications for Fuel Oils (incorporated by reference-see 40 CFR 60.17).

<u>Very low sulfur oil</u> means an oil that contains no more than 0.5 weight percent sulfur or that, when combusted without sulfur dioxide emission control, has a sulfur dioxide emission rate equal to or less than 215 ng/J (0.5 lb/million Btu) heat input.

For the purposes of this section, the oil need not meet the fuel nitrogen content specification in the definition of distillate oil. Quarterly reports shall be submitted to the Department certifying that only very low sulfur oil meeting this definition was combusted in the affected facility during the preceding quarter.

[40 CFR 60.45b, 60.47b and 60.49b(r)]

Common Conditions

- **B.15.** These emissions units are also subject to conditions **D.1** through **D.13** contained in **Subsection D. Common Conditions.**
- **B.16.** These emissions units are also subject to conditions **E.1** through **E.5** contained in **Subsection E. NSPS Common Conditions**, except as specified in that section.

Florida Power & Light Company Putnam Plant Page 14 of 30 FINAL Permit Revision No.: 1070014-004-AV

Facility ID No.: 1070014

Subsection C. This section addresses the following emissions unit.

011	This emissions unit consists of an auxiliary boiler is manufactured by VA-Power	
	with a maximum heat input for natural gas and number 2 fuel oil of 16.275	
<u>L</u>	mmBtu/hr and 14.28 mmBtu/hr, respectively.	

{Permitting notes: This emissions unit is regulated under Rule 62-210.300, F.A.C., Permits Required. This emissions unit is subject to 40 CFR 60, Subpart Dc, Standards of Performance for Small Industrial-Commercial-Institutional Steam Generating Units. Emissions unit 011 began commercial operation in 1993. The unit was previously regulated under Power Plant Siting Certification No. PA 74-01 ordered 10/16/74, and the modified conditions of PA 74-01 modified 5/20/80, 3/15/84, 7/16/91 and 5/28/92. However, the only applicable condition was in conflict with the NSPS and has been superseded by this permit.}

The following specific conditions apply to the emissions unit listed above:

Essential Potential to Emit (PTE) Parameters

C.1. Permitted Capacity. The maximum operation heat input rates are as follows:

Unit No.	mmBtu/hr Heat Input	Fuel Type
011	16.275	Natural Gas
	14.28	Number 2 Fuel Oil

[Rules 62-4.160(2) and 62-210.200(PTE), F.A.C.]

C.2. Emissions Unit Operating Rate Limitation After Testing. See specific condition D.9. [Rule 62-297.310(2), F.A.C.]

C.3. <u>Methods of Operation - Fuels</u>. The auxiliary boiler shall only be fired with number 2 fuel oil or with natural gas. [Rule 62-213.410, F.A.C.]

Emission Limitations and Standards

C.4. Pursuant to 40 CFR 60.42c Standard For Sulfur Dioxide.

The owner or operator shall not combust oil in the affected facility that contains greater than 0.5 weight percent sulfur. Compliance with the fuel oil sulfur limit shall be determined based on a certification from the fuel supplier, as described under 40 CFR 60.48c(f)(1) (see specific condition C.7.). The fuel oil sulfur limit applies at all times, including periods of startup, shutdown, and malfunction.

[40 CFR 60.42c(d), (h), (i) and (j)]

Florida Power & Light Company Putnam Plant Page 15 of 30 FINAL Permit Revision No.: 1070014-004-AV

Facility ID No.: 1070014

Monitoring of Operations

C.5. Emission Monitoring For Sulfur Dioxide.

As an alternative to operating a CEMS at the outlet of the steam generating unit, the owner or operator shall determine the average SO₂ emission rate by sampling the fuel prior to combustion. Fuel sampling shall be conducted as follows:

As an alternative fuel sampling procedure for affected facilities combusting oil, oil samples may be collected from the fuel tank for each steam generating unit immediately after the fuel tank is filled and before any oil is combusted. The owner or operator of the affected facility shall analyze the oil sample to determine the sulfur content of the oil. If a partially empty fuel tank is refilled, a new sample and analysis of the fuel in the tank would be required upon filling. Results of the fuel analysis taken after each new shipment of oil is received shall be used as the daily value when calculating the 30-day rolling average until the next shipment is received. If the fuel analysis shows that the sulfur content in the fuel tank is greater than 0.5 weight percent sulfur, the owner or operator shall ensure that the sulfur content of subsequent oil shipments is low enough to cause the 30-day rolling average sulfur content to be 0.5 weight percent sulfur or less.

[40 CFR 60.46c(d)(2)]

Reporting And Record Keeping Requirements

C.6. Pursuant to 40 CFR 60.48c Reporting And Record Keeping Requirements.

For any period in which fuel oil is combusted, the owner or operator shall submit quarterly reports to the Department. Each subsequent quarterly report shall be postmarked by the 30th day following the end of the reporting period.

The owner or operator shall keep records and submit quarterly reports including the following information related to the combustion of fuel oil, as applicable.

- (1) Calendar dates covered in the reporting period.
- (2) Each 30-day average SO₂ emission rate (lb/million Btu), or 30-day average sulfur content (weight percent), calculated during the reporting period, ending with the last 30-day period in the quarter; reasons for any noncompliance with the emission standards; and a description of corrective actions taken.
- (3) Each 30-day average percent of potential SO₂ emission rate calculated during the reporting period, ending with the last 30-day period in the quarter; reasons for any noncompliance with the emission standards; and a description of corrective actions taken
- (4) Identification of any steam generating unit operating days for which SO₂ or diluent (oxygen or carbon dioxide) data have not been obtained by an approved method for at least 75 percent of the operating hours; justification for not obtaining sufficient data; and a description of corrective actions taken.
- (5) Identification of any times when emissions data have been excluded from the calculation of average emission rates; justification for excluding data; and a description of corrective actions taken if data have been excluded for periods other than those during which oil was not combusted in the steam generating unit.

Florida Power & Light Company Putnam Plant Page 16 of 30 FINAL Permit Revision No.: 1070014-004-AV

Facility ID No.: 1070014

(6) Identification of the F factor used in calculations, method of determination, and type of fuel combusted.

- (7) Identification of whether averages have been obtained based on CEMS rather than manual sampling methods.
- (11) If fuel supplier certification is used to demonstrate compliance, records of fuel supplier certification as described under paragraph (f)(1) of this section, as applicable. In addition to records of fuel supplier certifications, the quarterly report shall include a certified statement signed by the owner or operator of the affected facility that the records of fuel supplier certifications submitted represent all of the fuel combusted during the quarter.

[40 CFR 60.48c(d), (e)(1)-(7) and (e)(11)]

- C.7. <u>Fuel Supplier Certification and Fuel Records</u>. The owner or operator shall maintain records of fuel supplier certification. Fuel supplier certification shall include the following information:
 - (i) The name of the oil supplier; and
 - (ii) A statement from the oil supplier that the oil complies with the specifications under the definition of distillate oil:

<u>Distillate oil</u> means fuel oil that complies with the specifications for fuel oil numbers 1 or 2, as defined by the American Society for Testing and Materials in ASTM D396-78, "Standard Specification for Fuel Oils" (incorporated by reference-see 40 CFR 60.17).

The owner or operator of each affected facility shall record and maintain records of the amounts of each fuel combusted during each day.

[40 CFR 60.48c(f)(1) and (g)]

Common Conditions

- C.8. These emissions units are also subject to conditions D.1 through D.13 contained in Subsection D. Common Conditions.
- C.9. These emissions units are also subject to conditions E.1 through E.5 contained in Subsection E. NSPS Common Conditions, except as specified in that section.

Florida Power & Light Company Putnam Plant Page 17 of 30 FINAL Permit Revision No.: 1070014-004-AV

Facility ID No.: 1070014

Subsection D. Common Conditions.

E.U. ID No.	
	Brief Description
003, 004, 005, 006	Combustion turbines for combined cycle heat recovery steam generators, HRSG11 through HRSG22.
007, 008, 009, 010	Duct burners for combined cycle heat recovery steam generators, HRSG11 through HRSG22.
011	Auxiliary boiler manufactured by VA-Power.

The following conditions apply to the emissions units listed above:

Essential Potential to Emit (PTE) Parameters

D.1. Hours of Operation. The emissions units may operate continuously, i.e., 8,760 hours/year. [Rule 62-210.200(PTE), F.A.C.]

Emission Limitations and Standards

{Permitting note: Table 1-1, Summary of Air Pollutant Standards and Terms, summarizes information for convenience purposes only. This table does not supersede any of the terms or conditions of this permit.}

D.2. Excess emissions which are caused entirely or in part by poor maintenance, poor operation, or any other equipment or process failure which may reasonably be prevented during startup, shutdown or malfunction shall be prohibited. [Rule 62-210.700(4), F.A.C.]

Monitoring of Operations

D.3. Determination of Process Variables.

- (a) Required Equipment. The owner or operator of an emissions unit for which compliance tests are required shall install, operate, and maintain equipment or instruments necessary to determine process variables, such as process weight input or heat input, when such data are needed in conjunction with emissions data to determine the compliance of the emissions unit with applicable emission limiting standards.
- (b) Accuracy of Equipment. Equipment or instruments used to directly or indirectly determine process variables, including devices such as belt scales, weight hoppers, flow meters, and tank scales, shall be calibrated and adjusted to indicate the true value of the parameter being measured with sufficient accuracy to allow the applicable process variable to be determined within 10% of its true value.

[Rule 62-297.310(5), F.A.C.]

D.4. Frequency of Compliance Tests. The following provisions apply only to those emissions units that are subject to an emissions limiting standard for which compliance testing is required. {Note: The provisions of this condition are numbered according to the rule. Provisions of the rule which are not applicable to this facility have been omitted, but the numbering of the rule has been preserved.}

Florida Power & Light Company Putnam Plant Page 18 of 30 FINAL Permit Revision No.: 1070014-004-AV

Facility ID No.: 1070014

(a) General Compliance Testing.

3. The owner or operator of an emissions unit that is subject to any emission limiting standard shall conduct a compliance test that demonstrates compliance with the applicable emission limiting standard prior to obtaining a renewed operation permit. Emissions units that are required to conduct an annual compliance test may submit the most recent annual compliance test to satisfy the requirements of this provision. In renewing an air operation permit pursuant to Rule 62-210.300(2)(a)3.b., c., or d., F.A.C., the Department shall not require submission of emission compliance test results for any emissions unit that, during the year prior to renewal:

- a. Did not operate; or
- b. In the case of a fuel burning emissions unit, burned liquid fuel for a total of no more than 400 hours.
- 4. During each federal fiscal year (October 1 -- September 30), unless otherwise specified by rule, order, or permit, the owner or operator of each emissions unit shall have a formal compliance test conducted for:
 - a. Visible emissions, if there is an applicable standard;
 - b. Each of the following pollutants, if there is an applicable standard, and if the emissions unit emits or has the potential to emit: 5 tons per year or more of lead or lead compounds measured as elemental lead; 30 tons per year or more of acrylonitrile; or 100 tons per year or more of any other regulated air pollutant; and
- 8. Any combustion turbine that does not operate for more than 400 hours per year shall conduct a visible emissions compliance test once per each five-year period, coinciding with the term of its air operation permit.
- 9. The owner or operator shall notify the Department, at least 15 days prior to the date on which each formal compliance test is to begin, of the date, time, and place of each such test, and the test contact person who will be responsible for coordinating and having such test conducted for the owner or operator.
- (b) <u>Special Compliance Tests</u>. When the Department, after investigation, has good reason (such as complaints, increased visible emissions or questionable maintenance of control equipment) to believe that any applicable emission standard contained in a Department rule or in a permit issued pursuant to those rules is being violated, it may require the owner or operator of the emissions unit to conduct compliance tests which identify the nature and quantity of pollutant emissions from the emissions unit and to provide a report on the results of said tests to the Department.
- (c) <u>Waiver of Compliance Test Requirements</u>. If the owner or operator of an emissions unit that is subject to a compliance test requirement demonstrates to the Department, pursuant to the procedure established in Rule 62-297.620, F.A.C., that the compliance of the emissions unit with an applicable weight emission limiting standard can be adequately determined by means other than the designated test procedure, such as specifying a surrogate standard of no visible emissions for particulate matter sources equipped with a bag house or specifying a fuel analysis for sulfur dioxide emissions, the Department shall waive the compliance test requirements for such emissions units and order that the alternate means of determining compliance be used, provided, however, the provisions of Rule 62-297.310(7)(b), F.A.C., shall apply. [Rule 62-297.310(7), F.A.C., SIP Approved]
- **D.5.** When VE Tests Not Required. By this permit, annual emissions compliance testing for visible emissions is not required for these emissions units while burning:
 - a. only gaseous fuel(s); or

Florida Power & Light Company Putnam Plant Page 19 of 30 FINAL Permit Revision No.: 1070014-004-AV

Facility ID No.: 1070014

b. gaseous fuel(s) in combination with any amount of liquid fuel(s) for less than 400 hours per year; or

c. only liquid fuel(s) for less than 400 hours per year.

[Rule 62-4.070(3), F.A.C.]

Test Methods and Procedures

{Permitting Note: The attached Table 2-1, Summary of Compliance Requirements, summarizes information for convenience purposes only. This table does not supersede any of the terms or conditions of this permit.}

D.6. <u>DEP Method 9</u>. The provisions of EPA Method 9 (40 CFR 60, Appendix A) are adopted by reference with the following exceptions:

- 1. EPA Method 9, Section 2.4, Recording Observations. Opacity observations shall be made and recorded by a certified observer at sequential fifteen second intervals during the required period of observation.
- 2. EPA Method 9, Section 2.5, Data Reduction. For a set of observations to be acceptable, the observer shall have made and recorded, or verified the recording of, at least 90 percent of the possible individual observations during the required observation period. For single-valued opacity standards (e.g., 20 percent opacity), the test result shall be the highest valid six-minute average for the set of observations taken. For multiple-valued opacity standards (e.g., 20 percent opacity, except that an opacity of 40 percent is permissible for not more than two minutes per hour) opacity shall be computed as follows:
 - a. For the basic part of the standard (i.e., 20 percent opacity) the opacity shall be determined as specified above for a single-valued opacity standard.
 - b. For the short-term average part of the standard, opacity shall be the highest valid short-term average (i.e., two-minute, three-minute average) for the set of observations taken.

In order to be valid, any required average (i.e., a six-minute or two-minute average) shall be based on all of the valid observations in the sequential subset of observations selected, and the selected subset shall contain at least 90 percent of the observations possible for the required averaging time. Each required average shall be calculated by summing the opacity value of each of the valid observations in the appropriate subset, dividing this sum by the number of valid observations in the subset, and rounding the result to the nearest whole number. The number of missing observations in the subset shall be indicated in parenthesis after the subset average value.

[Rule 62-297.401, F.A.C.]

D.7. Required Number of Test Runs. For mass emission limitations, a compliance test shall consist of three complete and separate determinations of the total air pollutant emission rate through the test section of the stack or duct and three complete and separate determinations of any applicable process variables corresponding to the three distinct time periods during which the stack emission rate was measured provided, however, that three complete and separate determinations shall not be required if the process variables are not subject to variation during a compliance test, or if three determinations are not necessary in order to calculate the unit's emission rate. The three required test runs shall be completed within one consecutive five day period. In the event that a sample is lost or one of the three runs must be discontinued because of circumstances beyond the control of the owner or operator, and a valid third run cannot be

Florida Power & Light Company Putnam Plant Page 20 of 30

FINAL Permit Revision No.: 1070014-004-AV

Facility ID No.: 1070014

obtained within the five day period allowed for the test, the Secretary or his or her designee may accept the results of the two complete runs as proof of compliance, provided that the arithmetic mean of the results of the two complete runs is at least 20 percent below the allowable emission limiting standards.

[Rule 62-297.310(1), F.A.C.]

- **D.8.** Calculation of Emission Rate. The indicated emission rate or concentration shall be the arithmetic average of the emission rate or concentration determined by each of the separate test runs unless otherwise specified in a particular test method or applicable rule. [Rule 62-297.310(3), F.A.C.]
- D.9. Operating Rate During Testing. Testing of emissions shall be conducted with each emissions unit operation at permitted capacity, which is defined as 90 to 100 percent of the maximum operation rate allowed by the permit. For emissions units 003, 004, 005 and 006, the maximum heat input (permitted capacity) at any given ambient temperature shall be as described by the curves attached as Appendix T of this permit. If it is impracticable to test at permitted capacity, an emissions unit may be tested at less than the minimum permitted capacity; in this case, subsequent emissions unit operation is limited to 110 percent of the test load until a new test is conducted. Once the emissions unit is so limited, operation at higher capacities is allowed for no more than 15 consecutive days for the purpose of additional compliance testing to regain the authority to operate at the permitted capacity.

[Rules 62-297.310(2) & (2)(b), F.A.C.]

D.10. Applicable Test Procedures.

(a) Required Sampling Time.

- 1. Unless otherwise specified in the applicable rule, the required sampling time for each test run shall be no less than one hour and no greater than four hours, and the sampling time at each sampling point shall be of equal intervals of at least two minutes.
- 2. Opacity Compliance Tests. When either EPA Method 9 or DEP Method 9 is specified as the applicable opacity test method, the required minimum period of observation for a compliance test shall be sixty (60) minutes for emissions units which emit or have the potential to emit 100 tons per year or more of particulate matter, and thirty (30) minutes for emissions units which have potential emissions less than 100 tons per year of particulate matter and are not subject to a multiple-valued opacity standard. The opacity test observation period shall include the period during which the highest opacity emissions can reasonably be expected to occur. Exceptions to these requirements are as follows:
 - c. The minimum observation period for opacity tests conducted by employees or agents of the Department to verify the day-to-day continuing compliance of a unit or activity with an applicable opacity standard shall be twelve minutes:
- (b) Minimum Sample Volume. Unless otherwise specified in the applicable rule, the minimum sample volume per run shall be 25 dry standard cubic feet.
- (d) Calibration of Sampling Equipment. Calibration of the sampling train equipment shall be conducted in accordance with the schedule shown in Table 297.310-1. [Rule 62-297.310(4), F.A.C.]
- D.11. Required Stack Sampling Facilities. When a mass emissions stack test is required, the permittee shall comply with the requirements contained in Appendix SS-1, Stack Sampling

Florida Power & Light Company Putnam Plant Page 21 of 30 FINAL Permit Revision No.: 1070014-004-AV

Facility ID No.: 1070014

Facilities, attached to this permit. [Rule 62-297.310(6), F.A.C.]

Record Keeping and Reporting Requirements

D.12. Malfunctions - Notification. In the case of excess emissions resulting from malfunctions, each owner or operator shall notify the DEP Northeast District's Air Section in accordance with Rule 62-4.130, F.A.C. A full written report on the malfunctions shall be submitted in a quarterly report, if requested by the DEP Northeast District's Air Section.

[Rule 62-210.700(6), F.A.C.]

D.13. Test Reports.

- (a) The owner or operator of an emissions unit for which a compliance test is required shall file a report with the DEP Northeast District's Air Section on the results of each such test.
- (b) The required test report shall be filed with the DEP Northeast District's Air Section as soon as practical but no later than 45 days after the last sampling run of each test is completed.
- (c) The test report shall provide sufficient detail on the emissions unit tested and the test procedures used to allow the DEP Northeast District's Air Section to determine if the test was properly conducted and the test results properly computed. As a minimum, the test report, other than for an EPA or DEP Method 9 test, shall provide the following information:
 - 1. The type, location, and designation of the emissions unit tested.
 - 2. The facility at which the emissions unit is located.
 - 3. The owner or operator of the emissions unit.
 - 4. The normal type and amount of fuels used and materials processed, and the types and amounts of fuels used and material processed during each test run.
 - 5. The means, raw data and computations used to determine the amount of fuels used and materials processed, if necessary to determine compliance with an applicable emission limiting standard.
 - 6. The type of air pollution control devices installed on the emissions unit, their general condition, their normal operating parameters (pressure drops, total operating current and GPM scrubber water), and their operating parameters during each test run.
 - 7. A sketch of the duct within 8 stack diameters upstream and 2 stack diameters downstream of the sampling ports, including the distance to any upstream and downstream bends or other flow disturbances.
 - 8. The date, starting time and duration of each sampling run.
 - 9. The test procedures used, including any alternative procedures authorized pursuant to Rule 62-297.620, F.A.C. Where optional procedures are authorized in this chapter, indicate which option was used.
 - 10. The number of points sampled and configuration and location of the sampling plane.
 - 11. For each sampling point for each run, the dry gas meter reading, velocity head, pressure drop across the stack, temperatures, average meter temperatures and sample time per point.
 - 12. The type, manufacturer and configuration of the sampling equipment used.
 - 13. Data related to the required calibration of the test equipment.
 - 14. Data on the identification, processing and weights of all filters used.
 - 15. Data on the types and amounts of any chemical solutions used.
 - 16. Data on the amount of pollutant collected from each sampling probe, the filters, and the impingers, are reported separately for the compliance test.

Florida Power & Light Company Putnam Plant Page 22 of 30 FINAL Permit Revision No.: 1070014-004-AV

Facility ID No.: 1070014

17. The names of individuals who furnished the process variable data, conducted the test, analyzed the samples and prepared the report.

- 18. All measured and calculated data required to be determined by each applicable test procedure for each run.
- 19. The detailed calculations for one run that relate the collected data to the calculated emission rate.
- 20. The applicable emission standard, and the resulting maximum allowable emission rate for the emissions unit, plus the test result in the same form and unit of measure.
- 21. A certification that, to the knowledge of the owner or his authorized agent, all data submitted are true and correct. When a compliance test is conducted for the Department or its agent, the person who conducts the test shall provide the certification with respect to the test procedures used. The owner or his authorized agent shall certify that all data required and provided to the person conducting the test are true and correct to his knowledge.

[Rules 62-213.440 and 62-297.310(8), F.A.C.]

Florida Power & Light Company Putnam Plant Page 23 of 30 FINAL Permit Revision No.: 1070014-004-AV

Facility ID No.: 1070014

Subsection E. NSPS Common Conditions.

E.U. ID No.	
	Brief Description
007, 008, 009,	Duct burners for combined cycle heat recovery steam generators, HRSG11
010	through HRSG22.
011	Auxiliary boiler manufactured by VA-Power.

{Note: The emissions units above are subject to the following conditions from 40 CFR 60 Subpart A, General Provisions. For the purposes of Rule 62-204.800(7), F.A.C., the definitions contained in the various provisions of 40 CFR 60, shall apply except that the term "Administrator" when used in 40 CFR 60, shall mean the Secretary or the Secretary's designee. The 40 CFR 60 term "owner and operator," means "permittee" in this permit.}

The following conditions apply to the NSPS emissions units listed above:

E.1. Pursuant to 40 CFR 60.7 Notification And Record Keeping.

- (a) Any owner or operator subject to the provisions of this part shall furnish the Administrator written notification as follows:
- (4) A notification of <u>any physical or operational change</u> to an existing facility which may increase the emission rate of any air pollutant to which a standard applies, unless that change is specifically exempted under an applicable subpart or in 40 CFR 60.14(e). This notice shall be postmarked 60 days or as soon as practicable before the change is commenced and shall include information describing the precise nature of the change, present and proposed emission control systems, productive capacity of the facility before and after the change, and the expected completion date of the change. The Administrator may request additional relevant information subsequent to this notice.
- (b) The owner or operator subject to the provisions of this part shall maintain records of the occurrence and duration of any startup, shutdown, or malfunction in the operation of an affected facility; any malfunction of the air pollution control equipment; or any periods during which a continuous monitoring system or monitoring device is inoperative.
- (c) (This section applies to emissions units 007, 008, 009, and 010 only in the event they are fired with fuel oil. This section does not apply to emissions unit 011.) The owner or operator required to install a continuous monitoring system (CMS) or monitoring device shall submit an excess emissions and monitoring systems performance report (excess emissions are defined in applicable subparts) and/or a summary report form (see 40 CFR 60.7(d)) to the Administrator semiannually, except when: more frequent reporting is specifically required by an applicable subpart; or the CMS data are to be used directly for compliance determination, in which case quarterly reports shall be submitted; or the Administrator, on a case-by-case basis, determines that more frequent reporting is necessary to accurately assess the compliance status of the source. All reports shall be postmarked by the 30th day following the end of each calendar half (or quarter, as appropriate). Written reports of excess emissions shall include the following information:
- (1) The magnitude of excess emissions computed in accordance with 40 CFR 60.13(h), any conversion factor(s) used, and the date and time of commencement and completion of each time period of excess emissions. The process operating time during the reporting period.

Florida Power & Light Company Putnam Plant Page 24 of 30 FINAL Permit Revision No.: 1070014-004-AV

Facility ID No.: 1070014

(2) Specific identification of each period of excess emissions that occurs during startups, shutdowns, and malfunctions of the affected facility. The nature and cause of any malfunction (if known), the corrective action taken or preventative measures adopted.

- (3) The date and time identifying each period during which the continuous monitoring system was inoperative except for zero and span checks and the nature of the system repairs or adjustments.
- (4) When no excess emissions have occurred or the continuous monitoring system(s) have not been inoperative, repaired, or adjusted, such information shall be stated in the report.
- (d) The summary report form shall contain the information and be in the format shown in Figure 1 unless otherwise specified by the Administrator. One summary report form shall be submitted for each pollutant monitored at each affected facility.
- (1) If the total duration of excess emissions for the reporting period is less than 1 percent of the total operating time for the reporting period and CMS downtime for the reporting period is less than 5 percent of the total operating time for the reporting period, only the summary report form shall be submitted and the excess emission report described in 40 CFR 60.7(c) need not be submitted unless requested by the Administrator.
- (2) If the total duration of excess emissions for the reporting period is 1 percent or greater of the total operating time for the reporting period or the total CMS downtime for the reporting period is 5 percent or greater of the total operating time for the reporting period, the summary report form and the excess emission report described in 40 CFR 60.7(c) shall both be submitted.

[See Attached Figure 1-Summary Report-Gaseous and Opacity Excess Emission and Monitoring System Performance]

- (e)(1) Notwithstanding the frequency of reporting requirements specified in paragraph (c) of this section, an owner or operator who is required by an applicable subpart to submit excess emissions and monitoring systems performance reports (and summary reports) on a quarterly (or more frequent) basis may reduce the frequency of reporting for that standard to semiannual if the following conditions are met:
- (i) For one full year (e.g., four quarterly or twelve monthly reporting periods) the affected facility's excess emissions and monitoring systems reports submitted to comply with a standard under this part continually demonstrate that the facility is in compliance with the applicable standard:
- (ii) The owner or operator continues to comply with all recordkeeping and monitoring requirements specified in this subpart and the applicable standard; and
- (iii) The Administrator does not object to reduced frequency of reporting for the affected facility, as provided in paragraph (e)(2) of this section.
- (2) The frequency of reporting of excess emissions and monitoring systems performance (and summary) reports may be reduced only after the owner or operator notifies the Administrator in writing of his or her intention to make such a change and the Administrator does not object to the intended change. In deciding whether to approve a reduced frequency of reporting, the Administrator may review information concerning the source's entire previous performance history during the required recordkeeping period prior to the intended change, including performance test results, monitoring data, and evaluations of an owner or operator's conformance with operation and maintenance requirements. Such information may be used by the Administrator to make a judgment about the source's potential for noncompliance in the future. If the Administrator disapproves the owner or operator's request to reduce the frequency of reporting, the Administrator will notify the owner or operator in writing within 45 days after

Florida Power & Light Company Putnam Plant Page 25 of 30 FINAL Permit Revision No.: 1070014-004-AV

Facility ID No.: 1070014

receiving notice of the owner or operator's intention. The notification from the Administrator to the owner or operator will specify the grounds on which the disapproval is based. In the absence of a notice of disapproval within 45 days, approval is automatically granted.

- (3) As soon as monitoring data indicate that the affected facility is not in compliance with any emission limitation or operating parameter specified in the applicable standard, the frequency of reporting shall revert to the frequency specified in the applicable standard, and the owner or operator shall submit an excess emissions and monitoring systems performance report (and summary report, if required) at the next appropriate reporting period following the noncomplying event. After demonstrating compliance with the applicable standard for another full year, the owner or operator may again request approval from the Administrator to reduce the frequency of reporting for that standard as provided for in paragraphs (e)(1) and (e)(2) of this section.
- (f) The owner or operator subject to the provisions of this part shall maintain a file of all measurements, including continuous monitoring system, monitoring device, and performance testing measurements; all continuous monitoring system performance evaluations; all continuous monitoring system or monitoring device calibration checks; adjustments and maintenance performed on these systems or devices; and all other information required by this part recorded in a permanent form suitable for inspection. The file shall be retained for at least <u>five</u> years following the date of such measurements, maintenance, reports, and records.

 [40 CFR 60.7 and Rule 62-213.440(1)(b)2.b., F.A.C.]

E.2. Pursuant to 40 CFR 60.8 Performance Tests.

- (b) Performance tests shall be conducted and data reduced in accordance with the test methods and procedures contained in each applicable subpart, except as otherwise authorized by an approved alternative method.
- (c) Performance tests shall be conducted under such conditions as the Administrator shall specify to the plant operator based on representative performance of the affected facility. The owner or operator shall make available to the Administrator such records as may be necessary to determine the conditions of the performance tests. Operations during periods of startup, shutdown, and malfunction shall not constitute representative conditions for the purpose of a performance test nor shall emissions in excess of the level of the applicable emission limit during periods of startup, shutdown, and malfunction be considered a violation of the applicable emission limit unless otherwise specified in the applicable standard.
- (f) Unless otherwise specified in the applicable subpart, each performance test shall consist of three separate runs using the applicable test method. Each run shall be conducted for the time and under the conditions specified in the applicable standard. For the purpose of determining compliance with an applicable standard, the arithmetic means of results of the three runs shall apply. In the event that a sample is accidentally lost or conditions occur in which one of the three runs must be discontinued because of forced shutdown, failure of an irreplaceable portion of the sample train, extreme meteorological conditions, or other circumstances, beyond the owner or operator's control, compliance may, upon the Administrator's approval, be determined using the arithmetic mean of the results of the two other runs.

 [40 CFR 60.8]

Florida Power & Light Company Putnam Plant Page 26 of 30 FINAL Permit Revision No.: 1070014-004-AV

Facility ID No.: 1070014

E.3. Pursuant to 40 CFR 60.11 Compliance With Standards And Maintenance Requirements.

- (a) Compliance with standards in this part, other than opacity standards, shall be determined only by performance tests established by 40 CFR 60.8, unless otherwise specified in the applicable standard.
- (b) Compliance with opacity standards in this part shall be determined by conducting observations in accordance with Reference Method 9 in appendix A of this part, any alternative method that is approved by the Administrator, or as provided in 40 CFR 60.11(e)(5).
- (c) The opacity standards set forth in this part shall apply at all times except during periods of startup, shutdown, malfunction, and as otherwise provided in the applicable standard.
- (d) At all times, including periods of startup, shutdown, and malfunction, owners and operators shall, to the extent practicable, maintain and operate any affected facility including associated air pollution control equipment in a manner consistent with good air pollution control practice for minimizing emissions. Determination of whether acceptable operating and maintenance procedures are being used will be based on information available to the Administrator which may include, but is not limited to, monitoring results, opacity observations, review of operating and maintenance procedures, and inspection of the source.
- (5) (This paragraph applies to emissions units 007, 008, 009, and 010 only in the event they are fired with fuel oil. This paragraph does not apply to emissions unit 011.) The owner or operator of an affected facility subject to an opacity standard may submit, for compliance purposes, continuous opacity monitoring system (COMS) data results produced during any performance test required under 40 CFR 60.8 in lieu of Method 9 observation data. If an owner or operator elects to submit COMS data for compliance with the opacity standard, he shall notify the Administrator of that decision, in writing, at least 30 days before any performance test required under 40 CFR 60.8 is conducted. Once the owner or operator of an affected facility has notified the Administrator to that effect, the COMS data results will be used to determine opacity compliance during subsequent tests required under 40 CFR 60.8 until the owner or operator notifies the Administrator, in writing, to the contrary. For the purpose of determining compliance with the opacity standard during a performance test required under 40 CFR 60.8 using COMS data, the minimum total time of COMS data collection shall be averages of all 6-minute continuous periods within the duration of the mass emission performance test. Results of the COMS opacity determinations shall be submitted along with the results of the performance test required under 60.8. The owner or operator of an affected facility using a COMS for compliance purposes is responsible for demonstrating that the COMS meets the requirements specified in 40 CFR 60.13(c), that the COMS has been properly maintained and operated, and that the resulting data have not been altered in any way. If COMS data results are submitted for compliance with the opacity standard for a period of time during which Method 9 data indicates noncompliance, the Method 9 data will be used to determine opacity compliance. [40 CFR 60.11]

E.4. Pursuant to 40 CFR 60.12 Circumvention.

No owner or operator subject to the provisions of this part shall build, erect, install, or use any article, machine, equipment or process, the use of which conceals an emission which would otherwise constitute a violation of an applicable standard. Such concealment includes, but is not limited to, the use of gaseous diluents to achieve compliance with an opacity standard or with a

Florida Power & Light Company Putnam Plant Page 27 of 30 FINAL Permit Revision No.: 1070014-004-AV

Facility ID No.: 1070014

standard which is based on the concentration of a pollutant in the gases discharged to the atmosphere.

[40 CFR 60.12]

E.5. <u>Pursuant to 40 CFR 60.13 Monitoring Requirements</u>. (This condition applies to emissions units 007, 008, 009, and 010 only in the event they are fired with fuel oil. This condition does not apply to emissions unit 011.)

- (a) For the purposes of this section, all continuous monitoring systems required under applicable subparts shall be subject to the provisions of this section upon promulgation of performance specifications for continuous monitoring systems under appendix B of 40 CFR 60 and, if the continuous monitoring system is used to demonstrate compliance with emission limits on a continuous basis, appendix F to 40 CFR 60, unless otherwise specified in an applicable subpart or by the Administrator. Appendix F is applicable December 4, 1987.
- (c) If the owner or operator of an affected facility elects to submit continuous opacity monitoring system (COMS) data for compliance with the opacity standard as provided under 40 CFR 60.11(e)(5), he/she shall conduct a performance evaluation of the COMS as specified in Performance Specification 1, appendix B, of 40 CFR 60 before the performance test required under 40 CFR 60.8 is conducted. Otherwise, the owner or operator of an affected facility shall conduct a performance evaluation of the COMS or continuous emission monitoring system (CEMS) during any performance test required under 40 CFR 60.8 or within 30 days thereafter in accordance with the applicable performance specification in appendix B of 40 CFR 60. The owner or operator of an affected facility shall conduct COMS or CEMS performance evaluations at such other times as may be required by the Administrator under section 114 of the Act.
- (1) The owner or operator of an affected facility using a COMS to determine opacity compliance during any performance test required under 40 CFR 60.8 and as described in 40 CFR 60.11(e)(5), shall furnish the Administrator two or, upon request, more copies of a written report of the results of the COMS performance evaluation described in 40 CFR 60.13(c) at least 10 days before the performance test required under 40 CFR 60.8 is conducted.
- (2) Except as provided in 40 CFR 60.13(c)(1), the owner or operator of an affected facility shall furnish the Administrator within 60 days of completion two or, upon request, more copies of a written report of the results of the performance evaluation.
- (d)(1) Owners and operators of all continuous emission monitoring systems installed in accordance with the provisions of this part shall check the zero (or low-level value between 0 and 20 percent of span value) and span (50 to 100 percent of span value) calibration drifts at least once daily in accordance with a written procedure. The zero and span shall, as a minimum, be adjusted whenever the 24-hour zero drift or 24-hour span drift exceeds two times the limits of the applicable performance specifications in appendix B. The system must allow the amount of excess zero and span drift measured at the 24-hour interval checks to be recorded and quantified, whenever specified. For continuous monitoring systems measuring opacity of emissions, the optical surfaces exposed to the effluent gases shall be cleaned prior to performing the zero and span drift adjustments except that for systems using automatic zero adjustments. The optical surfaces shall be cleaned when the cumulative automatic zero compensation exceeds 4 percent opacity.
- (2) Unless otherwise approved by the Administrator, the following procedures shall be followed for continuous monitoring systems measuring opacity of emissions. Minimum procedures shall include a method for producing a simulated zero opacity condition and an upscale (span) opacity condition using a certified neutral density filter or other related technique

Florida Power & Light Company Putnam Plant Page 28 of 30 FINAL Permit Revision No.: 1070014-004-AV

Facility ID No.: 1070014

to produce a known obscuration of the light beam. Such procedures shall provide a system check of the analyzer internal optical surfaces and all electronic circuitry including the lamp and photo detector assembly.

- (e) Except for system breakdowns, repairs, calibration checks, and zero and span adjustments required under 40 CFR 60.13(d), all continuous monitoring systems shall be in continuous operation and shall meet minimum frequency of operation requirements as follows:
- (1) All continuous monitoring systems referenced by 40 CFR 60.13(c) for measuring opacity of emissions shall complete a minimum of one cycle of sampling and analyzing for each successive 10-second period and one cycle of data recording for each successive 6-minute period.
- (2) All continuous monitoring systems referenced by 40 CFR 60.13(c) for measuring emissions, except opacity, shall complete a minimum of one cycle of operation (sampling, analyzing, and data recording) for each successive 15-minute period.
- (f) All continuous monitoring systems or monitoring devices shall be installed such that representative measurements of emissions or process parameters from the affected facility are obtained. Additional procedures for location of continuous monitoring systems contained in the applicable Performance Specifications of appendix B of 40 CFR 60 shall be used.
- (g) When the effluents from a single affected facility or two or more affected facilities subject to the same emission standards are combined before being released to the atmosphere, the owner or operator may install applicable continuous monitoring systems on each effluent or on the combined effluent. When the affected facilities are not subject to the same emission standards, separate continuous monitoring systems shall be installed on each effluent. When the effluent from one affected facility is released to the atmosphere through more than one point, the owner or operator shall install an applicable continuous monitoring system on each separate effluent unless the installation of fewer systems is approved by the Administrator. When more than one continuous monitoring system is used to measure the emissions from one affected facility (e.g., multiple breechings, multiple outlets), the owner or operator shall report the results as required from each continuous monitoring system.
- (h) Owners or operators of all continuous monitoring systems for measurement of opacity shall reduce all data to 6-minute averages and for continuous monitoring systems other than opacity to 1-hour averages for time periods as defined in 40 CFR 60.2. Six-minute opacity averages shall be calculated from 36 or more data points equally spaced over each 6-minute period. For continuous monitoring systems other than opacity, 1-hour averages shall be computed from four or more data points equally spaced over each 1-hour period. Data recorder during periods of continuous monitoring system breakdowns, repairs, calibration checks, and zero and span adjustments shall not be included in the data averages computed under this paragraph. An arithmetic or integrated average of all data may be used. The data may be recorded in reduced or non reduced form (e.g., ppm pollutant and percent O2 or ng/J of pollutant). All excess emissions shall be converted into units of the standard using the applicable conversion procedures specified in subparts. After conversion into units of the standard, the data may be rounded to the same number of significant digits as used in the applicable subparts to specify the emission limit (e.g., rounded to the nearest 1 percent opacity).

[40 CFR 60.13]

Florida Power & Light Company Putnam Plant Page 29 of 30 FINAL Permit Revision No.: 1070014-004-AV

Facility ID No.: 1070014

Section IV. This section is the Acid Rain Part.

Operated by: Florida Power and Light Company

ORIS code: 6246

Subsection A. This subsection addresses Acid Rain, Phase II.

The emissions units listed below are regulated under Acid Rain, Phase II.

E.U. ID	
No.	Brief Description
003 & 007	Combined Cycle Heat Recovery Steam Generator, HRSG11
004 & 008	Combined Cycle Heat Recovery Steam Generator, HRSG12
005 & 009	Combined Cycle Heat Recovery Steam Generator, HRSG21
006 & 010	Combined Cycle Heat Recovery Steam Generator, HRSG22

A.1. The Phase II permit application(s) submitted for this facility, as approved by the Department, is a part of this permit. The owners and operators of these Phase II acid rain unit(s) must comply with the standard requirements and special provisions set forth in the application(s) listed below:

a. DEP Form No. 62-210.900(1)(a), dated 07/01/95. [Chapter 62-213, F.A.C. and Rule 62-214.320, F.A.C.]

A.2. Sulfur dioxide (SO₂) allowance allocations for each Acid Rain unit are as follows:

E.U. ID No.	EPA ID	Year	2000	2001	2002	2003
003 & 007	HRSG11	SO2 allowances, under Table 2 or 3 of 40 CFR Part 73	1629*	1629*	1629*	1629*
004 & 008	HRSG12	SO2 allowances, under Table 2 or 3 of 40 CFR Part 73	1629*	1629*	1629*	1629*

Florida Power & Light Company Putnam Plant Page 30 of 30 FINAL Permit Revision No.: 1070014-004-AV Facility ID No.: 1070014

E.U. ID No.	EPA ID	Year	2000	2001	2002	2003
005 &	HRSG21	SO2	2000	2001		
009	IMOGZI	allowances,				
		under Table	1555*	1555*	1555*	1555*
		2 or 3 of 40				
		CFR Part 73				
006 &	HRSG22	SO2				
010		allowances,				
		under Table	1555*	1555*	1555*	1555*
		2 or 3 of 40				l
		CFR Part 73				

- * The number of allowances held by an Acid Rain source in a unit account may differ from the number allocated by the US EPA under Table 2 or 3 of 40 CFR 73.
- A.3. Emission Allowances. Emissions from sources subject to the Federal Acid Rain Program (Title IV) shall not exceed any allowances that the source lawfully holds under the Federal Acid Rain Program. Allowances shall not be used to demonstrate compliance with a non-Title IV applicable requirement of the Act.
 - 1. No permit revision shall be required for increase in emissions that are authorized by allowances acquired pursuant to the Federal Acid Rain Program, provided that such increases do not require a permit revision pursuant to Rule 62-213.400(3), F.A.C.
 - 2. No limit shall be placed on the number of allowances held by the source under the Federal Acid Rain Program.
- 3. Allowances shall be accounted for under the Federal Acid Rain Program. [Rule 62-213.440(1)(c), F.A.C.]
- **A.4.** Fast-Track Revisions of Acid Rain Parts. Those Acid Rain sources making a change described at Rule 62-214.370(4), F.A.C., may request such change as provided in Rule 62-213.413, Fast-Track Revisions of Acid Rain Parts. [Rule 62-213.413, F.A.C.]
- A.5. Comments, notes, and justifications: None

Appendix A-1, Abbreviations, Acronyms, Citations, and Identification Numbers (version dated 02/05/97)

Abbreviations and Acronyms:

°F: Degrees Fahrenheit

BACT: Best Available Control Technology

CFR: Code of Federal Regulations

DEP: State of Florida, Department of Environmental Protection

DARM: Division of Air Resource Management

EPA: United States Environmental Protection Agency

F.A.C.: Florida Administrative Code

F.S.: Florida Statute

ISO: International Standards Organization

LAT: Latitude LONG: Longitude

MMBtu: million British thermal units

MW: Megawatt

ORIS: Office of Regulatory Information Systems

SOA: Specific Operating Agreement **UTM**: Universal Transverse Mercator

Citations:

The following examples illustrate the methods used in this permit to abbreviate and cite the references of rules, regulations, guidance memorandums, permit numbers, and ID numbers.

Code of Federal Regulations:

Example: [40 CFR 60.334]

Where: 40 reference to Title 40

CFR reference to Code of Federal Regulations

reference to Part 60

60.334 reference to Regulation 60.334

Florida Administrative Code (F.A.C.) Rules:

Example: [Rule 62-213, F.A.C.]

Where: 62 reference to Title 62

62-213 reference to Chapter 62-213

62-213.205 reference to Rule 62-213.205, F.A.C.

ISO: International Standards Organization refers to those conditions at 288 degrees K, 60 percent relative humidity, and 101.3 kilopascals pressure.

Appendix A-1, Abbreviations, Acronyms, Citations, and Identification Numbers (continued)

Identification Numbers:

Facility Identification (ID) Number:

Example: Facility ID No.: 1050221

Where:

105 = 3-digit number code identifying the facility is located in Polk County

0221 = 4-digit number assigned by state database.

Permit Numbers:

Example: 1050221-002-AV, or

1050221-001-AC

Where:

AC = Air Construction Permit

AV = Air Operation Permit (Title V Source)

105 = 3-digit number code identifying the facility is located in Polk County

0221 = 4-digit number assigned by permit tracking database

001 or 002 = 3-digit sequential project number assigned by permit tracking

database

Example: PSD-FL-185

PA95-01

AC53-208321

Where:

PSD= Prevention of Significant Deterioration Permit

PA = Power Plant Siting Act Permit

AC = old Air Construction Permit numbering

Facility ID No.: 1070014

Appendix U-1, List of Unregulated Emissions Units and/or Activities

<u>Unregulated Emissions Units and/or Activities</u>. An emissions unit which emits no "emissions-limited pollutant" and which is subject to no unit-specific work practice standard, though it may be subject to regulations applied on a facility-wide basis (e.g., unconfined emissions, odor, general opacity) or to regulations that require only that it be able to prove exemption from unit-specific emissions or work practice standards.

The below listed emissions units and/or activities are neither 'regulated emissions units' nor 'insignificant emissions units'.

E.U. ID	
No.	Brief Description of Emissions Units and/or Activity
012	Emergency Diesel Generator, Miscellaneous Mobile Equipment and Internal Combustion Engines
013	Painting of Plant Equipment and Non-halogenated Solvent Cleaning Operations

Facility ID No.: 1070014

Appendix I-1, List of Insignificant Emissions Units and/or Activities

The facilities, emissions units, or pollutant-emitting activities listed in Rule 62-210.300(3)(a), F.A.C., Categorical Exemptions, are exempt from the permitting requirements of Chapters 62-210 and 62-4, F.A.C.; provided, however, that exempt emissions units shall be subject to any applicable emission limiting standards and the emissions from exempt emissions units or activities shall be considered in determining the potential emissions of the facility containing such emissions units. Emissions units and pollutant-emitting activities exempt from permitting under Rule 62-210.300(3)(a), F.A.C., shall not be exempt from the permitting requirements of Chapter 62-213, F.A.C., if they are contained within a Title V source; however, such emissions units and activities shall be considered insignificant for Title V purposes provided they also meet the criteria of Rule 62-213.430(6)(b), F.A.C. No emissions unit shall be entitled to an exemption from permitting under Rule 62.210.300(3)(a), F.A.C., if its emissions, in combination with the emissions of other units and activities at the facility, would cause the facility to emit or have the potential to emit any pollutant in such amount as to make the facility a Title V source.

The below listed emissions units and/or activities are considered insignificant pursuant to Rule 62-213.430(6), F.A.C.

	Brief Description of Emissions Units and/or Activities
1.	Gas metering area relief valves.
	Hydrazine mixing tank and relief valves.
	Fuel oil storage tanks and related equipment.
4.	Lube oil tank vents and extraction vents.
5.	Oil/water separators and related equipment.
6.	Sandblasting facility.
7.	Fire protection equipment.
8.	Miscellaneous Mobile Vehicle Operations (cars, light trucks, heavy-duty trucks, backhoes, tractors, forklifts, cranes, etc.)

Facility ID No.: 1070014

Appendix H-1, Permit History/ID Number Changes

Permit History (for tracking purposes):

E.U.			Issue	Expiration	Extended	Revised
ID No.	Description	Permit No.	Date	Date	Date ^{1, 2}	Dates
003 - 006	Combustion Turbines	PPS PA74-01	10/16/74			5/20/80
	for Combined Cycle					3/15/84
	Heat Recovery Steam					7/16/91
	Generators			1		5/28/92
		1070014-001-AV	6/17/98	12/31/03		7/27/98
		1070014-002-AV	7/27/98	12/31/03		
		1070014-003-AC	7/20/99	7/20/04		
007-010	Duct Burners for	PPS PA74-01	10/16/74			5/20/80
	Combined Cycle Heat					3/15/84
	Recovery Steam		_			7/16/91
	Generators					5/28/92
		1070014-001-AV	6/17/98	12/31/03		7/27/98
		1070014-002-AV	7/27/98	12/31/03		
011	Auxiliary Boiler	PPS PA74-01	10/16/74			5/20/80
						3/15/84
						7/16/91
						5/28/92
		1070014-001-AV	6/17/98	12/31/03		7/27/98
		1070014-002-AV	7/27/98	12/31/03		

ID Number Changes (for tracking purposes):

From: Facility ID No.: 31JAX540014

To: Facility ID No.: 1070014

Notes:

2 - AC permit(s) automatic extension(s) in Rule 62-213.420(1)(a)4., F.A.C., effective 03/20/96. {Rule 62-213.420(1)(b)2., F.A.C., effective 03/20/96, allows Title V Sources to operate under existing valid permits}

^{1 -} AO permit(s) automatic extension(s) in Rule 62-210.300(2)(a)3.a., F.A.C., effective 03/21/96.

Facility ID No.: 1070014

Appendix S Permit Summary Tables

Table 1-1, Summary of Air Pollutant Emission Standards

This table summarizes information for convenience purposes only. This table does not supersede any of the terms or conditions of this permit.

Emissions Unit	Brief Description
003	Combustion Turbine for Combined Cycle Heat Recovery Steam Generator, HRSG11. The maximum heat input at 85 degrees
	F ambient temperature for natural gas and fuel oil is 968.3 mmBtu/hr and 910.6 mmBtu/hr, respectively.
004	Combustion Turbine for Combined Cycle Heat Recovery Steam Generator, HRSG12. The maximum heat input at 85 degrees
	F ambient temperature for natural gas and fuel oil is 968.3 mmBtu/hr and 910.6 mmBtu/hr, respectively.
005	Combustion Turbine for Combined Cycle Heat Recovery Steam Generator, HRSG21. The maximum heat input at 85 degrees
	F ambient temperature for natural gas and fuel oil is 968.3 mmBtu/hr and 910.6 mmBtu/hr, respectively.
006	Combustion Turbine for Combined Cycle Heat Recovery Steam Generator, HRSG22. The maximum heat input at 85 degrees
	F ambient temperature for natural gas and fuel oil is 968.3 mmBtu/hr and 910.6 mmBtu/hr, respectively.

			Allowable Emissions			Equivalent Emissions ¹			
Pollutant	Fuel(s)	Hours per Year	Standard(s)	lbs./hour	TPY	lbs./hour	TPY	Regulatory Citations	See Permit Condition(s)
SO ₂	Oil	8760	0.7 % S (by weight)			699	3060	PPSC PA 74-01 condition 1.B.(i)	A.4.
VE	Oil or Natural Gas	8760	20% opacity (27% for one 6-minute period per hour)			•		PPSC PA 74-01 condition 1.B.(ii)	A.5.
SO ₂	Oil	8760	0.50% sulfur (by weight) when sustained winds exceed 20 miles per hour for any continuous period of three hours or longer			see above	see . above	PPSC PA 74-01, condition 2	A.10.

Facility ID No.: 1070014

Appendix S Permit Summary Tables

Table 1-1, Summary of Air Pollutant Emission Standards Continued

This table summarizes information for convenience purposes only. This table does not supersede any of the terms or conditions of this permit.

Emissions Unit	Brief Description
007	Duct burners for Combined Cycle Heat Recovery Steam Generator, HRSG11. The maximum heat input is 250 mmBtu/hr.
008	Duct burners for Combined Cycle Heat Recovery Steam Generator, HRSG12. The maximum heat input is 250 mmBtu/hr.
009	Duct burners for Combined Cycle Heat Recovery Steam Generator, HRSG21. The maximum heat input is 250 mmBtu/hr.
010	Duct burners for Combined Cycle Heat Recovery Steam Generator, HRSG22. The maximum heat input is 250 mmBtu/hr.

F			Allowable Emissions			Equivalent Emissions ¹			
Pollutant	Fuel(s)	Hours per Year	Standard(s)	lbs./hour	TPY	lbs./hour	TPY	Regulatory Citations	See Permit Condition(s)
SO ₂	Oil	8760	0.5 % S by weight			126	550	PPSC PA 74-01 condition 1.C.(i), and 40 CFR 60.42b	B.4.
VE	Oil or Natural Gas	8760	20% opacity (27% for one 6-minute period per hour)					PPSC PA 74-01 condition 1.C.(ii)(a), and 40 CFR 60.43b and 60.46b(a)	B.5.
NOx	Oil or Natural Gas	8760	0.20 lb/mmBtu			50	219	40 CFR 60.44b, PPSC PA 74-01 (modification of 5/28/92)	B.6.

Facility ID No.: 1070014

Appendix S Permit Summary Tables

Table 1-1, Summary of Air Pollutant Emission Standards Continued

This table summarizes information for convenience purposes only. This table does not supersede any of the terms or conditions of this permit.

Emissions Unit	Brief Description
011	Auxiliary boiler with a maximum heat input for natural gas and number 2 fuel oil of 16.275 mmBtu/hr and 14.28 mmBtu/hr,
	respectively.

			Allowable Emissions			Equivalent Emissions ¹			
Pollutant	Fuel(s)	Hours per Year	Standard(s)	lbs./hour	TPY	lbs./hour	TPY	Regulatory Citations	See Permit Condition(s)
SO ₂	Oil	8760	0.5 % S by weight			126	550	40 CFR 60.42c(d), (h), (i) and (j)	C.4.

Notes:

¹ The "Equivalent Emissions" listed are for informational purposes only.

Facility ID No.: 1070014

Appendix S Permit Summary Tables

Table 2-1, Summary of Compliance Requirements

This table summarizes information for convenience purposes only. This table does not supersede any of the terms or conditions of this permit.

Emissions Unit	Brief Description
003	Combustion Turbine for Combined Cycle Heat Recovery Steam Generator, HRSG11. The maximum heat input at 85 degrees
	F ambient temperature for natural gas and fuel oil is 968.3 mmBtu/hr and 910.6 mmBtu/hr, respectively.
004	Combustion Turbine for Combined Cycle Heat Recovery Steam Generator, HRSG12. The maximum heat input at 85 degrees F
	ambient temperature for natural gas and fuel oil is 968.3 mmBtu/hr and 910.6 mmBtu/hr, respectively.
005	Combustion Turbine for Combined Cycle Heat Recovery Steam Generator, HRSG21. The maximum heat input at 85 degrees F
	ambient temperature for natural gas and fuel oil is 968.3 mmBtu/hr and 910.6 mmBtu/hr, respectively.
006	Combustion Turbine for Combined Cycle Heat Recovery Steam Generator, HRSG22. The maximum heat input at 85 degrees F
	ambient temperature for natural gas and fuel oil is 968.3 mmBtu/hr and 910.6 mmBtu/hr, respectively

Pollutant or Parameter	Fuel(s)	Compliance Method	Testing Frequency	Frequency Base Date ¹	Minimum Compliance Test Duration	CMS ²	See Permit Condition(s)
SO ₂	Oil	Fuel analysis, the fuel sulfur content, percent by weight, for liquid fuels shall be evaluated using either ASTM D2622-94, ASTM D4294-90(95), ASTM D1552-95, ASTM D1266-91, or both ASTM D4057-88 and ASTM D129-95 (or latest ed.)	Upon each fuel delivery	Upon each fuel delivery	Duration	No	A.6. & A.7.
VE	Oil or Natural Gas	DEP Method 9	Annual	September 30	One hour	No	A.8., A.9.
SO ₂	Oil	Measure wind velocity and direction, at hourly intervals in the plant vicinity, only for those hours during which any combustion turbine at the plant burns fuel oil containing more than 0.50wt% sulfur	As required			No	A.10.

Facility ID No.: 1070014

Appendix S Permit Summary Tables

Table 2-1, Summary of Compliance Requirements Continued

This table summarizes information for convenience purposes only. This table does not supersede any of the terms or conditions of this permit.

Emissions Unit	Brief Description
007	Duct burners for Combined Cycle Heat Recovery Steam Generator, HRSG11. The maximum heat input is 250 mmBtu/hr.
008	Duct burners for Combined Cycle Heat Recovery Steam Generator, HRSG12. The maximum heat input is 250 mmBtu/hr
009	Duct burners for Combined Cycle Heat Recovery Steam Generator, HRSG21. The maximum heat input is 250 mmBtu/hr.
010	Duct burners for Combined Cycle Heat Recovery Steam Generator, HRSG22. The maximum heat input is 250 mmBtu/hr.

Pollutant or Parameter	Fuel(s)	Compliance Method	Testing Frequency	Frequency Base Date ¹	Minimum Compliance Test Duration	CMS ²	See Permit Condition(s)
SO ₂	Oil	Maintain fuel receipts as described in 40 CFR 60.49b(r).	Fuel supplier certification		· · · · · · · · · · · · · · · · · · ·	No	B.7., B.14.
VE	Oil or Natural Gas	EPA Method 9	Annual	September 30	One hour	Yes, when burning fuel oil	B.8, B.10. & B.11.
NOx	Oil or Natural Gas	EPA reference methods 7E and 3A, of 40 CFR part 60 Appendix A	Annual	September 30	3 hours	No	B.9. & B.10.

Facility ID No.: 1070014

Appendix S **Permit Summary Tables**

Table 2-1, Summary of Compliance Requirements Continued

This table summarizes information for convenience purposes only. This table does not supersede any of the terms or conditions of this permit.

Emissions Unit	Brief Description
011	Auxiliary boiler with a maximum heat input for natural gas and number 2 fuel oil of 16.275 mmBtu/hr and 14.28 mmBtu/hr, respectively.

Pollutant or Parameter	Fuel(s)	Compliance Method	Testing Frequency	Frequency Base Date ¹	Minimum Compliance Test Duration	CMS ²	See Permit Condition(s)
SO ₂	Oil 	Certification from the fuel supplier, as described under 40 CFR 60.48c(f)(1).	Fuel supplier certification			No	C.4. & C.7.

Notes:

¹ Frequency base date established for planning purposes only; see Rule 62-297.310, F.A.C. ² CMS = continuous monitoring system

Appendix TV-3, the Title V Core Conditions, has been provided only to the applicant. The most recent version of these conditions may be obtained from the Department's Internet Web site at:


http://www.dep.state.fl.us/air/


If you do not have access to the Internet and would like a copy of Appendix TV, please contact Wendy Alexander, Department of Environmental Protection, Division of Air Resources Management, Bureau of Air Regulation, Mail Station 5505, 2600 Blair Stone Road, Tallahassee, FL 32399-2400, 850/488-0114.

An electronic version of this permit is also available from the Department's Internet Web site above.

Appendix T, Heat Input vs. Ambient Temperature Curves for Natural Gas and Distillate Oil Firing

Putnam Plant Unit 1 or 2
Heat Input Variation With Amblent Temperature

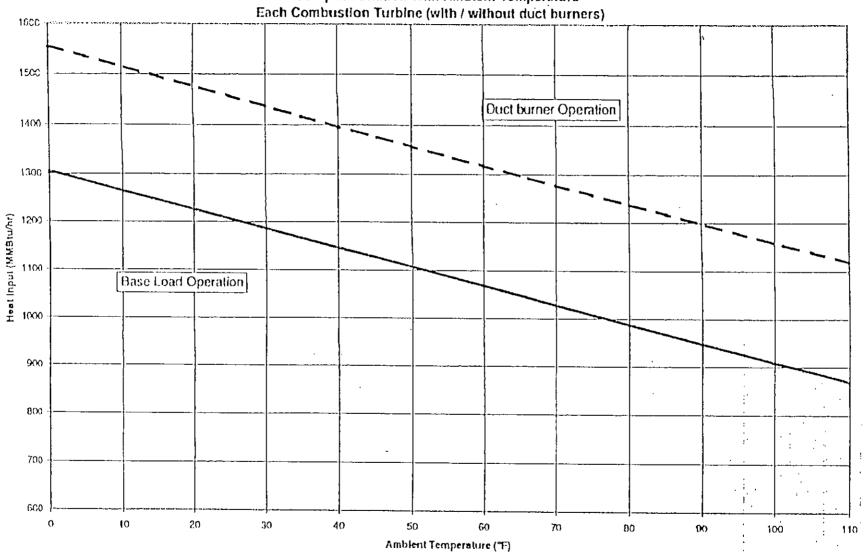

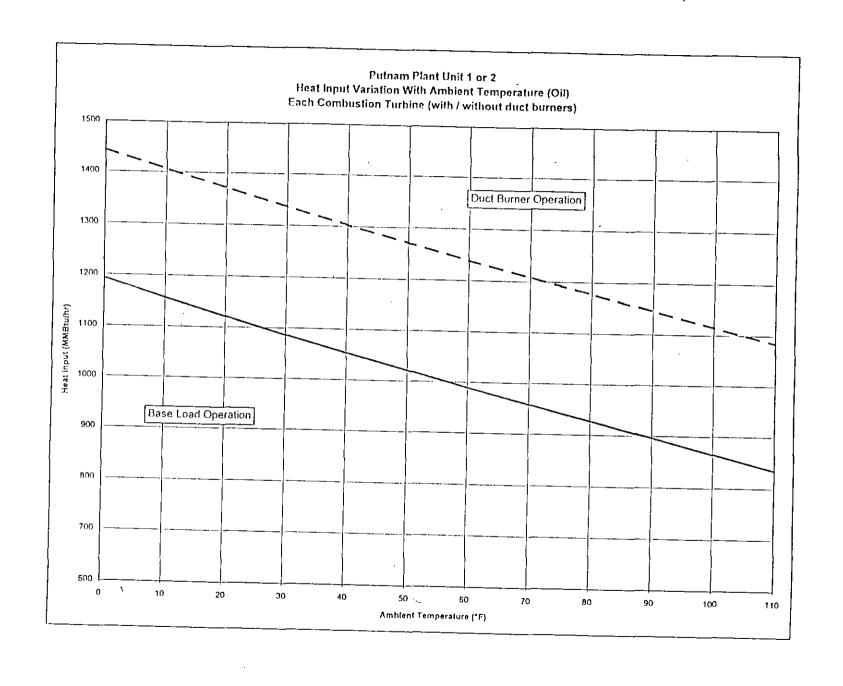

[Note: This attachment includes "canned conditions" developed from the "Title V Core List."]

{Permitting note: APPENDIX TV-3, TITLE V CONDITIONS, is distributed to the permittee only. Other persons requesting copies of these conditions shall be provided one copy when requested or otherwise appropriate.}

Chapter 62-4, F.A.C.

1. Not federally enforceable. General Prohibition. Any stationary installation which will reasonably be expected to be a source of pollution shall not be operated, maintained, or modified without the appropriate and valid permits issued by the Department, unless the source is exempted by Department rule. The Department may issue a permit only after it receives reasonable assurance that the installation will not cause pollution in violation of any of the provisions of Chapter 403, F.S., or the rules promulgated thereunder. A permitted installation may only be operated, maintained, constructed, expanded or modified in a manner that is consistent with the terms of the permit.

[Rule 62-4.030, Florida Administrative Code (F.A.C.); Section 403.087, Florida Statute (F.S.)]

- 2. Not federally enforceable. Procedure to Obtain Permits: Application.
- (1) Any person desiring to obtain a permit from the Department shall apply on forms prescribed by the Department and shall submit such additional information as the Department by law may require.
- (2) All applications and supporting documents shall be filed in quadruplicate with the Department.
- (3) To ensure protection of public health, safety, and welfare, any construction, modification, or operation of an installation which may be a source of pollution shall be in accordance with sound professional engineering practices pursuant to Chapter 471, F.S. All applications for a Department permit shall be certified by a professional engineer registered in the State of Florida except when the application is for renewal of an air pollution operation permit at a minor facility as defined in Rule 62-210.200, F.A.C., or where professional engineering is not required by Chapter 471, F.S. Where required by Chapter 471 or 492, F.S., applicable portions of permit applications and supporting documents which are submitted to the Department for public record shall be signed and sealed by the professional(s) who prepared or approved them.
- (4) Processing fees for air construction permits shall be in accordance with Rule 62-4.050(4), F.A.C.
- (5)(a) To be considered by the Department, each application must be accompanied by the proper processing fee. The fee shall be paid by check, payable to the Department of Environmental Protection. The fee is non-refundable except as provided in Section 120.60, F.S., and in this section.
 - (c) Upon receipt of the proper application fee, the permit processing time requirements of Sections 120.60(2) and 403.0876, F.S., shall begin.
 - (d) If the applicant does not submit the required fee within ten days of receipt of written notification, the Department shall either return the unprocessed application or arrange with the applicant for the pick up of the application.
 - (e) If an applicant submits an application fee in excess of the required fee, the permit processing time requirements of Sections 120.60(2) and 403.0876, F.S., shall begin upon receipt, and the Department shall refund to the applicant the amount received in excess of the required fee.
- (6) Any substantial modification to a complete application shall require an additional processing fee determined pursuant to the schedule set forth in Rule 62-4.050, F.A.C., and shall restart the time requirements of Sections 120.60 and 403.0876, F.S. For purposes of this Subsection, the term "substantial modification" shall mean a modification which is reasonably expected to lead to substantially different environmental impacts which require a detailed review.
- (7) Modifications to existing permits proposed by the permittee which require substantial changes in the existing permit or require substantial evaluation by the Department of potential impacts of the proposed modifications shall require the same fee as a new application.

[Rule 62-4.050, F.A.C.]

3. Standards for Issuing or Denving Permits. Except as provided at Rule 62-213.460, F.A.C., the issuance of a permit does not relieve any person from complying with the requirements of Chapter 403, F.S., or Department rules. [Rule 62-4.070(7), F.A.C.]

4. Modification of Permit Conditions.

- (1) For good cause and after notice and an administrative hearing, if requested, the Department may require the permittee to conform to new or additional conditions. The Department shall allow the permittee a reasonable time to conform to the new or additional conditions and on application of the permittee the Department may grant additional time. For the purpose of this section, good cause shall include, but not be limited to, any of the following: (also, see Condition No. 38)
 - (a) A showing that an improvement in effluent or emission quality or quantity can be accomplished because of technological advances without unreasonable hardship.
 - (b) A showing that a higher degree of treatment is necessary to effect the intent and purpose of Chapter 403, F.S.
 - (c) A showing of any change in the environment or surrounding conditions that requires a modification to conform to applicable air or water quality standards.
 - (e) Adoption or revision of Florida Statutes, rules, or standards which require the modification of a permit condition for compliance.
- (2) A permittee may request a modification of a permit by applying to the Department.
- (3) A permittee may request that a permit be extended as a modification of the permit. Such a request must be submitted to the Department in writing before the expiration of the permit. Upon timely submittal of a request for extension, unless the permit automatically expires by statute or rule, the permit will remain in effect until final agency action is taken on the request. For construction permits, an extension shall be granted if the applicant can demonstrate reasonable assurances that, upon completion, the extended permit will comply with the standards and conditions required by applicable regulation. For all other permits, an extension shall be granted if the applicant can demonstrate reasonable assurances that the extended permit will comply with the standards and conditions applicable to the original permit. A permit for which the permit application fee was prorated in accordance with Rule 62-4.050(4)(1), F.A.C., shall not be extended. In no event shall a permit be extended or remain in effect longer than the time limits established by statute or rule.

[Rule 62-4.080, F.A.C.]

5. Renewals. Prior to one hundred eighty (180) days before the expiration of a permit issued pursuant to Chapter 62-213, F.A.C., the permittee shall apply for a renewal of a permit using forms incorporated by reference in the specific rule chapter for that kind of permit. A renewal application shall be timely and sufficient. If the application is submitted prior to 180 days before expiration of the permit, it will be considered timely and sufficient. If the renewal application is submitted at a later date, it will not be considered timely and sufficient unless it is submitted and made complete prior to the expiration of the operation permit. When the application for renewal is timely and sufficient, the existing permit shall remain in effect until the renewal application has been finally acted upon by the Department or, if there is court review of the Department's final agency action, until a later date is required by Section 120.60, F.S., provided that, for renewal of a permit issued pursuant to Chapter 62-213, F.A.C., the applicant complies with the requirements of Rules 62-213.420(1)(b)3, and 4., F.A.C. [Rule 62-4.090(1), F.A.C.]

6. Suspension and Revocation.

- (1) Permits shall be effective until suspended, revoked, surrendered, or expired and shall be subject to the provisions of Chapter 403, F.S., and rules of the Department.
- (2) Failure to comply with pollution control laws and rules shall be grounds for suspension or revocation.
- (3) A permit issued pursuant to Chapter 62-4, F.A.C., shall not become a vested property right in the permittee. The Department may revoke any permit issued by it if it finds that the permit holder or the permit holder's agent:
 - (a) Submitted false or inaccurate information in application or operational reports.
 - (b) Has violated law, Department orders, rules or permit conditions.
 - (c) Has failed to submit operational reports or other information required by Department rules.
 - (d) Has refused lawful inspection under Section 403.091, F.S.

[Rule 62-4.100, F.A.C.]

7. Not federally enforceable. <u>Financial Responsibility</u>. The Department may require an applicant to submit proof of financial responsibility and may require the applicant to post an appropriate bond to guarantee compliance with the law and Department rules. [Rule 62-4.110, F.A.C.]

8. Transfer of Permits.

- (1) Within 30 days after the sale or legal transfer of a permitted facility, an "Application for Transfer of Permit" (DEP Form 62-1.201(1)) must be submitted to the Department. This form must be completed with the notarized signatures of both the permittee and the proposed new permittee.
- (2) The Department shall approve the transfer of a permit unless it determines that the proposed new permittee cannot provide reasonable assurances that conditions of the permit will be met. The determination shall be limited solely to the ability of the new permittee to comply with the conditions of the existing permit, and it shall not concern the adequacy of these permit conditions. If the Department proposes to deny the transfer, it shall provide both the permittee and the proposed new permittee a written objection to such transfer together with notice of a right to request a Chapter 120, F.S., proceeding on such determination.
- (3) Within 30 days of receiving a properly completed Application for Transfer of Permit form, the Department shall issue a final determination. The Department may toll the time for making a determination on the transfer by notifying both the permittee and the proposed new permittee that additional information is required to adequately review the transfer request. Such notification shall be served within 30 days of receipt of an Application for Transfer of Permit form, completed pursuant to Rule 62-4.120(1), F.A.C. If the Department fails to take action to approve or deny the transfer within 30 days of receipt of the completed Application for Transfer of Permit form, or within 30 days of receipt of the last item of timely requested additional information, the transfer shall be deemed approved.
- (4) The permittee is encouraged to apply for a permit transfer prior to the sale or legal transfer of a permitted facility. However, the transfer shall not be effective prior to the sale or legal transfer.
- (5) Until this transfer is approved by the Department, the permittee and any other person constructing, operating, or maintaining the permitted facility shall be liable for compliance with the terms of the permit. The permittee transferring the permit shall remain liable for corrective actions that may be required as a result of any violations occurring prior to the sale or legal transfer of the facility.

[Rule 62-4.120, F.A.C.]

9. Plant Operation-Problems. If the permittee is temporarily unable to comply with any of the conditions of the permit due to breakdown of equipment or destruction by hazard of fire, wind or by other cause, the permittee shall immediately notify the Department. Notification shall include pertinent information as to the cause of the problem, and what steps are being taken to correct the problem and to prevent its recurrence, and where applicable, the owner's intent toward reconstruction of destroyed facilities. Such notification does not release the permittee from any liability for failure to comply with Department rules. (also, see Condition No. 10)

[Rule 62-4.130, F.A.C.]

- 10. For purposes of notification to the Department pursuant to Condition No. 9, Condition No. 12(8), and Rule 62-4.130, F.A.C.. Plant Operation-Problems. "immediately" shall mean the same day, if during a workday (i.e., 8:00 a.m. 5:00 p.m.), or the first business day after the incident, excluding weekends and holidays; and, for purposes of 40 CFR 70.6(a)(3)(iii)(B), "prompt" shall have the same meaning as "immediately". [also, see Conditions Nos. 9 and 12(8)]
 [40 CFR 70.6(a)(3)(iii)(B)]
- 11. Not federally enforceable. Review. Failure to request a hearing within 14 days of receipt of notice of proposed or final agency action on a permit application or as otherwise required in Chapter 62-103, F.A.C., shall be deemed a waiver of the right to an administrative hearing.

[Rule 62-4.150, F.A.C.]

- 12. Permit Conditions. All permits issued by the Department shall include the following general conditions:
- (1) The terms, conditions, requirements, limitations and restrictions set forth in this permit, are "permit conditions" and are binding and enforceable pursuant to Sections 403.141, 403.727, or 403.859 through 403.861, F.S. The permittee is placed on notice that the Department will review this permit periodically and may initiate enforcement action for any violation of these conditions.
- (2) This permit is valid only for the specific processes and operations applied for and indicated in the approved drawings or exhibits. Any unauthorized deviation from the approved drawings, exhibits, specifications, or conditions of this permit may constitute grounds for revocation and enforcement action by the Department.
- (3) As provided in subsections 403.087(6) and 403.722(5), F.S., the issuance of this permit does not convey any vested rights or any exclusive privileges. Neither does it authorize any injury to public or private property or any invasion of personal rights, nor any infringement of federal, state, or local laws or regulations. This permit is not a waiver of or approval of any other Department permit that may be required for other aspects of the total project which are not addressed in this permit.

- (4) This permit conveys no title to land or water, does not constitute State recognition or acknowledgment of title, and does not constitute authority for the use of submerged lands unless herein provided and the necessary title or leasehold interests have been obtained from the State. Only the Trustees of the Internal Improvement Trust Fund may express State opinion as to title.
- (5) This permit does not relieve the permittee from liability for harm or injury to human health or welfare, animal, or plant life, or property caused by the construction or operation of this permitted source, or from penalties therefore; nor does it allow the permittee to cause pollution in contravention of F.S. and Department rules, unless specifically authorized by an order from the Department.
- (6) The permittee shall properly operate and maintain the facility and systems of treatment and control (and related appurtenances) that are installed and used by the permittee to achieve compliance with the conditions of this permit, as required by Department rules. This provision includes the operation of backup or auxiliary facilities or similar systems when necessary to achieve compliance with the conditions of the permit and when required by Department rules.
- (7) The permittee, by accepting this permit, specifically agrees to allow authorized Department personnel, upon presentation of credentials or other documents as may be required by law and at reasonable times, access to the premises where the permitted activity is located or conducted to:
 - (a) Have access to and copy any records that must be kept under conditions of the permit;
 - (b) Inspect the facility, equipment, practices, or operations regulated or required under this permit; and,
 - (c) Sample or monitor any substances or parameters at any location reasonable necessary to assure compliance with this permit or Department rules. Reasonable time may depend on the nature of the concern being investigated.
- (8) If, for any reason, the permittee does not comply with or will be unable to comply with any condition or limitation specified in this permit, the permittee shall immediately provide the Department with the following information: (also, see Condition No. 10)
 - (a) A description of and cause of noncompliance; and,
 - (b) The period of noncompliance, including dates and times; or, if not corrected, the anticipated time the noncompliance is expected to continue, and steps being taken to reduce, eliminate, and prevent recurrence of the noncompliance. The permittee shall be responsible for any and all damages which may result and may be subject to enforcement action by the Department for penalties or for revocation of this permit.
- (9) In accepting this permit, the permittee understands and agrees that all records, notes, monitoring data and other information relating to the construction or operation of this permitted source which are submitted to the Department may be used by the Department as evidence in any enforcement case involving the permitted source arising under the F.S. or Department rules, except where such use is prescribed by Sections 403.111 and 403.73, F.S. Such evidence shall only be used to the extent it is consistent with the Florida Rules of Civil Procedure and appropriate evidentiary rules.
- (10) The permittee agrees to comply with changes in Department rules and F.S. after a reasonable time for compliance; provided, however, the permittee does not waive any other rights granted by F.S. or Department rules.
- (11) This permit is transferable only upon Department approval in accordance with Rule 62-4.120, F.A.C., as applicable. The permittee shall be liable for any non-compliance of the permitted activity until the transfer is approved by the Department.
- (12) This permit or a copy thereof shall be kept at the work site of the permitted activity.
- (14) The permittee shall comply with the following:
 - (a) Upon request, the permittee shall furnish all records and plans required under Department rules. During enforcement actions, the retention period for all records will be extended automatically unless otherwise stipulated by the Department.
 - (b) The permittee shall hold at the facility or other location designated by this permit records of all monitoring information (including all calibration and maintenance records and all original strip chart recordings for continuous monitoring instrumentation) required by the permit, copies of all reports required by this permit, and records of all data used to complete the application for this permit. These materials shall be retained at least five (5) years from the date of the sample, measurement, report, or application unless otherwise specified by Department rule.
 - (c) Records of monitoring information shall include:
 - 1. the date, exact place, and time of sampling or measurements;
 - 2. the person responsible for performing the sampling or measurements;
 - 3. the dates analyses were performed;
 - 4. the person responsible for performing the analyses;
 - 5. the analytical techniques or methods used; and,
 - 6. the results of such analyses.
- (15) When requested by the Department, the permittee shall within a reasonable time furnish any information required by law which is needed to determine compliance with the permit. If the permittee becomes aware the relevant facts were not submitted or were incorrect in the permit application or in any report to the Department, such facts or information shall be corrected promptly. [Rules 62-4.160 and 62-213.440(1)(b), F.A.C.]

13. Construction Permits.

- (1) No person shall construct any installation or facility which will reasonably be expected to be a source of air or water pollution without first applying for and receiving a construction permit from the Department unless exempted by statute or Department rule. In addition to the requirements of Chapter 62-4, F.A.C., applicants for a Department Construction Permit shall submit the following as applicable:
 - (a) A completed application on forms furnished by the Department.
 - (b) An engineering report covering:
 - 1. plant description and operations,
 - 2. types and quantities of all waste material to be generated whether liquid, gaseous or solid.
 - 3. proposed waste control facilities.
 - 4. the treatment objectives,
 - 5. the design criteria on which the control facilities are based, and.
 - 6. other information deemed relevant.

Design criteria submitted pursuant to Rule 62-4.210(1)(b)5., F.A.C., shall be based on the results of laboratory and pilot-plant scale studies whenever such studies are warranted. The design efficiencies of the proposed waste treatment facilities and the quantities and types of pollutants in the treated effluents or emissions shall be indicated. Work of this nature shall be subject to the requirements of Chapter 471, F.S. Where confidential records are involved, certain information may be kept confidential pursuant to Section 403.111, F.S.

- (c) The owners' written guarantee to meet the design criteria as accepted by the Department and to abide by Chapter 403, F.S. and the rules of the Department as to the quantities and types of materials to be discharged from the installation. The owner may be required to post an appropriate bond or other equivalent evidence of financial responsibility to guarantee compliance with such conditions in instances where the owner's financial resources are inadequate or proposed control facilities are experimental in nature.
- (2) The construction permit may contain conditions and an expiration date as determined by the Secretary or the Secretary's
- (3) When the Department issues a permit to construct, the permittee shall be allowed a period of time, specified in the permit, to construct, and to operate and test to determine compliance with Chapter 403, F.S., and the rules of the Department and, where applicable, to apply for and receive an operation permit. The Department may require tests and evaluations of the treatment facilities by the permittee at his/her expense.

[Rule 62-4.210, F.A.C.]

14. Not federally enforceable. Operation Permit for New Sources. To properly apply for an operation permit for new sources, the applicant shall submit certification that construction was completed noting any deviations from the conditions in the construction permit and test results where appropriate. [Rule 62-4.220, F.A.C.]

Chapters 28-106 and 62-110, F.A.C.

- 15. Public Notice, Public Participation, and Proposed Agency Action. The permittee shall comply with all of the requirements for public notice, public participation, and proposed agency action pursuant to Rule 62-110.106 and Rule 62-210.350, F.A.C. [Rules 62-110.106, 62-210.350 and 62-213.430(1)(b), F.A.C.]
- 16. Administrative Hearing. The permittee shall comply with all of the requirements for a petition for administrative hearing or waiver of right to administrative proceeding pursuant to Rules 28-106.201, 28-106.301 and 62-110.106, F.A.C. [Rules 28-106.201, 28-106.301 and 62-110.106, , F.A.C.]

Chapter 62-204, F.A.C.

17. Asbestos. This permit does not authorize any demolition or renovation of the facility or its parts or components which involves asbestos removal. This permit does not constitute a waiver of any of the requirements of Chapter 62-257, F.A.C., and 40 CFR Part 61, Subpart M, National Emission Standard for Asbestos, adopted and incorporated by reference in Rule 62-204,800, F.A.C. Compliance with Chapter 62-257, F.A.C., and 40 CFR 61, Subpart M. Section 61.145, is required for any asbestos demolition or renovation at the source.

[40 CFR 61; Rule 62-204.800, F.A.C., and, Chapter 62-257, F.A.C.]

Chapter 62-210, F.A.C.

- 18. <u>Permits Required.</u> The owner of operator of any emissions unit which emits or can reasonably be expected to emit any air pollutant shall obtain an appropriate permit from the Department prior to beginning construction, modification, or initial or continued operation of the emissions unit unless exempted pursuant to Department rule or statute. All emissions limitations, controls, and other requirements imposed by such permits shall be at least as stringent as any applicable limitations and requirements contained in or enforceable under the State Implementation Plan (SIP) or that are otherwise federally enforceable. Except as provided at Rule 62-213.460, F.A.C., issuance of a permit does not relieve the owner or operator of an emissions unit from complying with any applicable requirements, any emission limiting standards or other requirements of the air pollution rules of the Department or any other such requirements under federal, state, or local law.
- (1) Air Construction Permits.
 - (a) Unless exempt from permitting pursuant to Rule 62-210.300(3)(a) or (b), F.A.C., or Rule 62-4.040, F.A.C., an air construction permit shall be obtained by the owner or operator of any proposed new or modified facility or emissions unit prior to the beginning of construction or modification, in accordance with all applicable provisions of this chapter, Chapter 62-212, F.A.C., and Chapter 62-4, F.A.C. Except as provided under Rule 62-213.415, F.A.C., the owner or operator of any facility seeking to create or change an air emissions bubble shall obtain an air construction permit in accordance with all the applicable provisions of this chapter, Chapter 62-212, F.A.C., and Chapter 62-4, F.A.C. The construction permit shall be issued for a period of time sufficient to allow construction or modification of the facility or emissions unit and operation while the new or modified facility or emissions unit is conducting tests or otherwise demonstrating initial compliance with the conditions of the construction permit.
 - (b) Notwithstanding the expiration of an air construction permit, all limitations and requirements of such permit that are applicable to the design and operation of the permitted facility or emissions unit shall remain in effect until the facility or emissions unit is permanently shut down, except for any such limitation or requirement that is obsolete by its nature (such as a requirement for initial compliance testing) or any such limitation or requirement that is changed in accordance with the provisions of Rule 62-210.300(1)(b)1., F.A.C. Either the applicant or the Department can propose that certain conditions be considered obsolete. Any conditions or language in an air construction permit that are included for informational purposes only, if they are transferred to the air operation permit, shall be transferred for informational purposes only and shall not become enforceable conditions unless voluntarily agreed to by the permittee or otherwise required under Department rules.
 - 1. Except for those limitations or requirements that are obsolete, all limitations and requirements of an air construction permit shall be included and identified in any air operation permit for the facility or emissions unit. The limitations and requirements included in the air operation permit can be changed, and thereby superseded, through the issuance of an air construction permit, federally enforceable state air operation permit, federally enforceable air general permit, or Title V air operation permit; provided, however, that:
 - a. Any change that would constitute an administrative correction may be made pursuant to Rule 62-210.360, F.A.C.;
 - b. Any change that would constitute a modification, as defined at Rule 62-210.200, F.A.C., shall be accomplished only through the issuance of an air construction permit; and
 - c. Any change in a permit limitation or requirement that originates from a permit issued pursuant to 40 CFR 52.21, Rule 62-204.800(10)(d)2., F.A.C., Rule 62-212.400, F.A.C., Rule 62-212.500, F.A.C., or any former codification of Rule 62-212.400 or 62-212.500, F.A.C., shall be accomplished only through the issuance of a new or revised air construction permit under Rule 62-204.800(10)(d)2., F.A.C., 62-212.400 or 62-212.500, F.A.C., as appropriate.
 - 2. The force and effect of any change in a permit limitation or requirement made in accordance with the provisions of Rule 62-210.300(1)(b)1. F.A.C., shall be the same as if such change were made to the original air construction permit.

 3. Nothing in Rule 62-210.300(1)(b), F.A.C., shall be construed as to allow operation of a facility or emissions unit
 - without a valid air operation permit.
- (2) Air Operation Permits. Upon expiration of the air operation permit for any existing facility or emissions unit, subsequent to construction or modification and demonstration of initial compliance with the conditions of the construction permit for any new or modified facility or emissions unit, or as otherwise provided in Chapter 62-210 or Chapter 62-213, the owner or operator of such facility or emissions unit shall obtain a renewal air operation permit, an initial air operation permit, or an administrative correction or revision of an existing air operation permit, whichever is appropriate, in accordance with all applicable provisions of Chapter 62-210, Chapter 62-213, and Chapter 62-4, F.A.C.
 - (a) Minimum Requirements for All Air Operation Permits. At a minimum, a permit issued pursuant to this subsection shall:
 - 1. Specify the manner, nature, volume and frequency of the emissions permitted, and the applicable emission limiting standards or performance standards, if any;
 - 2. Require proper operation and maintenance of any pollution control equipment by qualified personnel, where applicable in accordance with the provisions of any operation and maintenance plan required by the air pollution rules of the Department.

- 3. Contain an effective date stated in the permit which shall not be earlier than the date final action is taken on the application and be issued for a period, beginning on the effective date, as provided below.
 - a. The operation permit for an emissions unit which is in compliance with all applicable rules and in operational condition, and which the owner or operator intends to continue operating, shall be issued or renewed for a five-year period, except that, for Title V sources subject to Rule 62-213.420(1)(a)1., F.A.C., operation permits shall be extended until 60 days after the due date for submittal of the facility's Title V permit application as specified in Rule 62-213.420(1)(a)1., F.A.C.
 - b. Except as provided in Rule 62-210.300(2)(a)3.d., F.A.C., the operation permit for an emissions unit which has been shut down for six months or more prior to the expiration date of the current operation permit, shall be renewed for a period not to exceed five years from the date of shutdown, even if the emissions unit is not maintained in operational condition, provided:
 - (i) the owner or operator of the emissions unit demonstrates to the Department that the emissions unit may need to be reactivated and used, or that it is the owner's or operator's intent to apply to the Department for a permit to construct a new emissions unit at the facility before the end of the extension period; and,
 - (ii) the owner or operator of the emissions unit agrees to and is legally prohibited from providing the allowable emission permitted by the renewed permit as an emissions offset to any other person under Rule 62-212.500, F.A.C.; and,
 - (iii) the emissions unit was operating in compliance with all applicable rules as of the time the source was shut down.
 - c. Except as provided in Rule 62-210.300(2)(a)3.d., F.A.C., the operation permit for an emissions unit which has been shut down for five years or more prior to the expiration date of the current operation permit shall be renewed for a maximum period not to exceed ten years from the date of shutdown, even if the emissions unit is not maintained in operational condition, provided the conditions given in Rule 62-210.300(2)(a)3.b., F.A.C., are met and the owner or operator demonstrates to the Department that failure to renew the permit would constitute a hardship, which may include economic hardship.
 - d. The operation permit for an electric utility generating unit on cold standby or long-term reserve shutdown shall be renewed for a five-year period, and additional five-year periods, even if the unit is not maintained in operational condition, provided the conditions given in Rules 62-210.300(2)(a)3.b.(i) through (iii), F.A.C., are met.
- 4. In the case of an emissions unit permitted pursuant to Rules 62-210.300(2)(a)3.b., c., and d., F.A.C., include reasonable notification and compliance testing requirements for reactivation of such emissions unit and provide that the owner or operator demonstrate to the Department prior to reactivation that such reactivation would not constitute reconstruction pursuant to Rule 62-204.800(7), F.A.C.

[Rules 62-210.300(1) & (2), F.A.C.]

- 19. Not federally enforceable. Notification of Startup. The owner or operator of any emissions unit or facility which has a valid air operation permit and which has been shut down more than one (1) year, shall notify the Department in writing of the intent to start up such emissions unit or facility, a minimum of sixty (60) days prior to the intended startup date.
 - (a) The notification shall include the planned startup date, anticipated emission rates or pollutants released, changes to processes or control devices which will result in changes to emission rates, and any other conditions which may differ from the valid outstanding operation permit.
 - (b) If, due to an emergency, a startup date is not known 60 days prior thereto, the owner shall notify the Department as soon as possible after the date of such startup is ascertained.

[Rule 62-210.300(5), F.A.C.]

20. Emissions Unit Reclassification.

(a) Any emissions unit whose operation permit has been revoked as provided for in Chapter 62-4, F.A.C., shall be deemed permanently shut down for purposes of Rule 62-212.500, F.A.C. Any emissions unit whose permit to operate has expired without timely renewal or transfer may be deemed permanently shut down, provided, however, that no such emissions unit shall be deemed permanently shut down if, within 20 days after receipt of written notice from the Department, the emissions unit owner or operator demonstrates that the permit expiration resulted from inadvertent failure to comply with the requirements of Rule 62-4.090, F.A.C., and that the owner or operator intends to continue the emissions unit in operation, and either submits an application for an air operation permit or complies with permit transfer requirements, if applicable.

(b) If the owner or operator of an emissions unit which is so permanently shut down, applies to the Department for a permit to reactivate or operate such emissions unit, the emissions unit will be reviewed and permitted as a new emissions unit. [Rule 62-210.300(6), F.A.C.]

21. Public Notice and Comment.

- (1) Public Notice of Proposed Agency Action.
 - (a) A notice of proposed agency action on permit application, where the proposed agency action is to issue the permit, shall be published by any applicant for:
 - 1. An air construction permit;
 - 2. An air operation permit, permit renewal or permit revision subject to Rule 62-210.300(2)(b), F.A.C., (i.e., a FESOP), except as provided in Rule 62-210.300(2)(b)1.b., F.A.C.; or
 - 3. An air operation permit, permit renewal, or permit revision subject to Chapter 62-213, F.A.C., except those permit revisions meeting the requirements of Rule 62-213.412(1), F.A.C.
 - (b) The notice required by Rule 62-210.350(1)(a), F.A.C., shall be published in accordance with all otherwise applicable provisions of Rule 62-110.106, F.A.C. A public notice under Rule 62-210.350(1)(a)1., F.A.C., for an air construction permit may be combined with any required public notice under Rule 62-210.350(1)(a)2. or 3., F.A.C., for air operation permits. If such notices are combined, the public notice must comply with the requirements for both notices.
 - (c) Except as otherwise provided at Rules 62-210.350(2) and (5), F.A.C., each notice of intent to issue an air construction permit shall provide a 14-day period for submittal of public comments.
- (2) Additional Public Notice Requirements for Emissions Units Subject to Prevention of Significant Deterioration or Nonattainment Area Preconstruction Review.
 - (a) Before taking final agency action on a construction permit application for any proposed new or modified facility or emissions unit subject to the preconstruction review requirements of Rule 62-212.400 or 62-212.500, F.A.C., the Department shall comply with all applicable provisions of Rule 62-110.106, F.A.C., and provide an opportunity for public comment which shall include as a minimum the following:
 - 1. A complete file available for public inspection in at least one location in the district affected which includes the information submitted by the owner or operator, exclusive of confidential records under Section 403.111, F.S., and the Department's analysis of the effect of the proposed construction or modification on ambient air quality, including the Department's preliminary determination of whether the permit should be approved or disapproved;
 - 2. A 30-day period for submittal of public comments; and.
 - 3. A notice, by advertisement in a newspaper of general circulation in the county affected, specifying the nature and location of the proposed facility or emissions unit, whether BACT or LAER has been determined, the degree of PSD increment consumption expected, if applicable, and the location of the information specified in paragraph 1, above; and notifying the public of the opportunity for submitting comments and requesting a public hearing.
 - (b) The notice provided for in Rule 62-210.350(2)(a)3., F.A.C., shall be prepared by the Department and published by the applicant in accordance with all applicable provisions of Rule 62-110.106, F.A.C., except that the applicant shall cause the notice to be published no later than thirty (30) days prior to final agency action.
 - (c) A copy of the notice provided for in Rule 62-210.350(2)(a)3., F.A.C., shall also be sent by the Department to the Regional Office of the U. S. Environmental Protection Agency and to all other state and local officials or agencies having cognizance over the location of such new or modified facility or emissions unit, including local air pollution control agencies, chief executives of city or county government, regional land use planning agencies, and any other state. Federal Land Manager, or Indian Governing Body whose lands may be affected by emissions from the new or modified facility or emissions unit.
 - (d) A copy of the notice provided for in Rule 62-210.350(2)(a)3., F A.C., shall be displayed in the appropriate district, branch and local program offices.
 - (e) An opportunity for public hearing shall be provided in accordance with Chapter 120, F.S., and Rule 62-110.106, F.A.C.
 - (f) Any public comments received shall be made available for public inspection in the location where the information specified in Rule 62-210.350(2)(a)1., F.A.C., is available and shall be considered by the Department in making a final determination to approve or deny the permit.
 - (g) The final determination shall be made available for public inspection at the same location where the information specified in Rule 62-210.350(2)(a)1.. F.A.C., was made available.

- (h) For a proposed new or modified emissions unit which would be located within 100 kilometers of any Federal Class I area or whose emissions may affect any Federal Class I area, and which would be subject to the preconstruction review requirements of Rule 62-212.400, F.A.C., or Rule 62-212.500, F.A.C.:
 - I. The Department shall mail or transmit to the Administrator a copy of the initial application for an air construction permit and notice of every action related to the consideration of the permit application.
 - 2. The Department shall mail or transmit to the Federal Land Manager of each affected Class I area a copy of any written notice of intent to apply for an air construction permit; the initial application for an air construction permit, including all required analyses and demonstrations; any subsequently submitted information related to the application; the preliminary determination and notice of proposed agency action on the permit application; and any petition for an administrative hearing regarding the application or the Department's proposed action. Each such document shall be mailed or transmitted to the Federal Land Manager within fourteen (14) days after its receipt by the Department.
- (3) Additional Public Notice Requirements for Facilities Subject to Operation Permits for Title V Sources.
 - (a) Before taking final agency action to issue a new, renewed, or revised air operation permit subject to Chapter 62-213, F.A.C., the Department shall comply with all applicable provisions of Rule 62-110.106, F.A.C., and provide an opportunity for public comment which shall include as a minimum the following:
 - 1. A complete file available for public inspection in at least one location in the district affected which includes the information submitted by the owner or operator, exclusive of confidential records under Section 403.111, F.S.; and,
 - 2. A 30-day period for submittal of public comments.
 - (b) The notice provided for in Rule 62-210.350(3)(a), F.A.C., shall be prepared by the Department and published by the applicant in accordance with all applicable provisions of Rule 62-110.106, F.A.C., except that the applicant shall cause the notice to be published no later than thirty (30) days prior to final agency action.
 - (c) The notice shall identify:
 - 1. The facility;
 - 2. The name and address of the office at which processing of the permit occurs;
 - 3. The activity or activities involved in the permit action;
 - 4. The emissions change involved in any permit revision;
 - 5. The name, address, and telephone number of a Department representative from whom interested persons may obtain additional information, including copies of the permit draft, the application, and all relevant supporting materials, including any permit application, compliance plan, permit, monitoring report, and compliance statement required pursuant to Chapter 62-213, F.A.C. (except for information entitled to confidential treatment pursuant to Section 403.111, F.S.), and all other materials available to the Department that are relevant to the permit decision;
 - 6. A brief description of the comment procedures required by Rule 62-210.350(3), F.A.C.;
 - 7. The time and place of any hearing that may be held, including a statement of procedure to request a hearing (unless a hearing has already been scheduled); and,
 - 8. The procedures by which persons may petition the Administrator to object to the issuance of the proposed permit after expiration of the Administrator's 45-day review period.

[Rule 62-210.350, F.A.C.]

22. Administrative Permit Corrections.

- (1) A facility owner shall notify the Department by letter of minor corrections to information contained in a permit. Such notifications shall include:
 - (a) Typographical errors noted in the permit;
 - (b) Name, address or phone number change from that in the permit;
 - (c) A change requiring more frequent monitoring or reporting by the permittee;
 - (d) Changes listed at 40 CFR 72.83(a)(1), (2), (6), (9) and (10), hereby adopted and incorporated by reference, to Title V sources subject to emissions limitations or reductions pursuant to 42 USC ss. 7651-76510;
 - (e) Changes listed at 40 CFR 72.83(a)(11), hereby adopted and incorporated by reference, to Title V sources subject to emissions limitations or reductions pursuant to 42 USC ss. 7651-76510, provided the notification is accompanied by a copy of any EPA determination concerning the similarity of the change to those listed at Rule 62-210.360(1)(d), F.A.C.; and
 - (f) Any other similar minor administrative change at the source.
- (2) Upon receipt of any such notification the Department shall within 60 days correct the permit and provide a corrected copy to the owner.
- (3) After first notifying the owner, the Department shall correct any permit in which it discovers errors of the types listed at Rule 62-210.360(1)(a) and (b), F.A.C., and provide a corrected copy to the owner.
- (4) For Title V source permits, other than general permits, a copy of the corrected permit shall be provided to EPA and any approved local air program in the county where the facility or any part of the facility is located.

(5) The Department shall incorporate requirements resulting from issuance of a new or revised construction permit into an existing Title V source permit, if the construction permit or permit revision incorporates requirements of federally enforceable preconstruction review, and if the applicant requests at the time of application that all of the requirements of Rule 62-213.430(1), F.A.C., be complied with in conjunction with the processing of the construction permit application.

[Rule 62-210.360, F.A.C.]

- 23. Reports.
- (3) Annual Operating Report for Air Pollutant Emitting Facility.
 - (a) The Annual Operating Report for Air Pollutant Emitting Facility (DEP Form No. 62-210.900(5)) shall be completed each year.
 - (c) The annual operating report shall be submitted to the appropriate Department District or Department approved local air pollution control program office by March 1 of the following year unless otherwise indicated by permit condition or Department request.

[Rule 62-210.370(3), F.A.C.]

- 24. <u>Circumvention</u>. No person shall circumvent any air pollution control device, or allow the emission of air pollutants without the applicable air pollution control device operating properly.

 [Rule 62-210.650, F.A.C.]
- 25. Forms and Instructions. The forms used by the Department in the stationary source control program are adopted and incorporated by reference in this section. The forms are listed by rule number, which is also the form number, with the subject, title and effective date. Forms 62-210.900(1),(3),(4) and (5), F.A.C., including instructions, are available from the Department as hard-copy documents or executable files on computer diskettes. Copies of forms (hard-copy or diskette) may be obtained by writing to the Department of Environmental Protection, Division of Air Resources Management, 2600 Blair Stone Road, Tallahassee, Florida 32399-2400. Notwithstanding the requirement of Rule 62-4.050(2), F.A.C., to file application forms in quadruplicate, if an air permit application is submitted using the Department's electronic application form, only one copy of the diskette and signature pages is required to be submitted.
- (1) Application for Air Permit Title V Source, Form and Instructions (Effective 2-11-99).
 - (a) Acid Rain Part (Phase II), Form and Instructions (Effective 7-1-95).
 - 1. Repowering Extension Plan, Form and Instructions (Effective 7-1-95).
 - 2. New Unit Exemption, Form and Instructions (Effective 7-1-95).
 - 3. Retired Unit Exemption, Form and Instructions (Effective 7-1-95).
 - 4. Phase II NOx Compliance Plan, Form and Instructions (Effective 1-6-98).
 - 5. Phase II NOx Averaging Plan, Form (Effective 1-6-98).
 - (b) Reserved.
- (5) Annual Operating Report for Air Pollutant Emitting Facility, Form and Instructions (Effective 2-11-99). [Rule 62-210.900, F.A.C.]

Chapter 62-213, F.A.C.

26. <u>Annual Emissions Fee.</u> Each Title V source permitted to operate in Florida must pay between January 15 and March 1 of each year, upon written notice from the Department, an annual emissions fee in accordance with Rule 62-213.205, F.A.C., and the appropriate form and associated instructions.

[Rules 62-213.205 and 62-213.900(1), F.A.C.]

27. <u>Annual Emissions Fee.</u> Failure to pay timely any required annual emissions fee, penalty, or interest constitutes grounds for permit revocation pursuant to Rule 62-4.100, F.A.C.

[Rule 62-213.205(1)(g), F.A.C.]

- 28. <u>Annual Emissions Fee.</u> Any documentation of actual hours of operation, actual material or heat input, actual production amount, or actual emissions used to calculate the annual emissions fee shall be retained by the owner for a minimum of five (5) years and shall be made available to the Department upon request. [Rule 62-213.205(1)(j), F.A.C.]
- 29. <u>Annual Emissions Fee.</u> A completed DEP Form 62-213.900(1), F.A.C., "Major Air Pollution Source Annual Emissions Fee Form", must be submitted by the responsible official with the annual emissions fee. [Rule 62-213.205(1)(k), F.A.C.]

- 30. Air Operation Permit Fees. After December 31, 1992, no permit application processing fee, renewal fee, modification fee or amendment fee is required for an operation permit for a Title V source.

 [Rule 62-213.205(4), F.A.C.]
- 31. Permits and Permit Revisions Required. All Title V sources are subject to the permit requirements of Chapter 62-213, F.A.C.
- (1) No Title V source may operate except in compliance with Chapter 62-213, F.A.C.
- (2) Except as provided in Rule 62-213.410, F.A.C., no source with a permit issued under the provisions of this chapter shall make any changes in its operation without first applying for and receiving a permit revision if the change meets any of the following:
 - (a) Constitutes a modification;
 - (b) Violates any applicable requirement;
 - (c) Exceeds the allowable emissions of any air pollutant from any unit within the source;
 - (d) Contravenes any permit term or condition for monitoring, testing, recordkeeping, reporting or of a compliance certification requirement:
 - (e) Requires a case-by-case determination of an emission limitation or other standard or a source specific determination of ambient impacts, or a visibility or increment analysis under the provisions of Chapters 62-212 or 62-296, F.A.C.;
 - (f) Violates a permit term or condition which the source has assumed for which there is no corresponding underlying applicable requirement to which the source would otherwise be subject;
 - (g) Results in the trading of emissions among units within a source except as specifically authorized pursuant to Rule 62-213.415, F.A.C.
 - (h) Results in the change of location of any relocatable facility identified as a Title V source pursuant to paragraph (a)-(e), (g) or (h) of the definition of "major source of air pollution" at Rule 62-210.200, F.A.C
 - (i) Constitutes a change at an Acid Rain Source under the provisions of 40 CFR 72.81(a)(1),(2),or (3),(b)(1) or (b)(3), hereby incorporated by reference;
 - (j) Constitutes a change in a repowering plan, nitrogen oxides averaging plan, or nitrogen oxides compliance deadline extension at an Acid Rain Source.
- (k) Is a request for exemption pursuant to Rule 62-214.340, F.A.C. [Rule 62-213.400(1) & (2), F.A.C.]
- 32. <u>Changes Without Permit Revision</u>. Title V sources having a valid permit issued pursuant to Chapter 62-213, F.A.C., may make the following changes without permit revision, provided that sources shall maintain source logs or records to verify periods of operation in each alternative method of operation:
- (1) Permitted sources may change among those alternative methods of operation allowed by the source's permit as provided by the terms of the permit;
- (2) Permitted sources may implement the terms or conditions of a new or revised construction permit if;
 - (a) The application for construction permit complied with the requirements of Rule 62-213.420(3) and (4), F.A.C.;
 - (b) The terms or conditions were subject to federally enforceable preconstruction review pursuant to Chapter 62-212, F.A.C.; and,
 - (c) The new or revised construction permit was issued after the Department and the applicant complied with all the requirements of Rule 62-213.430(1), F.A.C.;
- (3) A permitted source may implement operating changes after the source submits any forms required by any applicable requirement and provides the Department and EPA with at least 7 days written notice prior to implementation. The source and the Department shall attach each notice to the relevant permit;
 - (a) The written notice shall include the date on which the change will occur, and a description of the change within the permitted source, the pollutants emitted and any change in emissions, and any term or condition becoming applicable or no longer applicable as a result of the change;
 - (b) The permit shield described in Rule 62-213.460, F.A.C., shall not apply to such changes;
- (4) Permitted sources may implement changes involving modes of operation only in accordance with Rule 62-213.415, F.A.C. [Rule 62-213.410, F.A.C.]
- 33. Immediate Implementation Pending Revision Process.
- (1) Those permitted Title V sources making any change that constitutes a modification pursuant to the definition of modification at Rule 62-210.200, F.A.C., but which would not constitute a modification pursuant to 42 USC 7412(a) or to 40 CFR 52.01, 60.2, or 61.15, adopted and incorporated by reference at Rule 62-204.800, F.A.C., may implement such change prior to final issuance of a permit revision in accordance with this section, provided the change:
 - (a) Does not violate any applicable requirement:
 - (b) Does not contravene any permit term or condition for monitoring, testing, recordkeeping or reporting, or any compliance certification requirement;

- (c) Does not require or change a case-by-case determination of an emission limitation or other standard, or a source-specific determination of ambient impacts, or a visibility or increment analysis under the provisions of Chapter 62-212 or 62-296. F.A.C.:
- (d) Does not seek to establish or change a permit term or condition for which there is no corresponding underlying applicable requirement and that the source has assumed to avoid an applicable requirement to which the source would otherwise be subject including any federally enforceable emissions cap or federally enforceable alternative emissions limit.
- (2) A Title V source may immediately implement such changes after they have been incorporated into the terms and conditions of a new or revised construction permit issued pursuant to Chapter 62-212, F.A.C., and after the source provides to EPA, the Department, each affected state and any approved local air program having geographic jurisdiction over the source, a copy of the source's application for operation permit revision. The Title V source may conform its application for construction permit to include all information required by Rule 62-213.420, F.A.C., in lieu of submitting separate application forms.
- (3) The Department shall process the application for operation permit revision in accordance with the provisions of Chapter 62-213, F.A.C., except that the Department shall issue a draft permit revision or a determination to deny the revision within 60 days of receipt of a complete application for operation permit revision or, if the Title V source has submitted a construction permit application conforming to the requirements of Rule 62-213.420, F.A.C., the Department shall issue a draft permit or a determination to deny the revision at the same time the Department issues its determination on issuance or denial of the construction permit application. The Department shall not take final action until all the requirements of Rule 62-213.430(1)(a), (c), (d), and (e), F.A.C., have been complied with.
- (4) Pending final action on the operation permit revision application, the source shall implement the changes in accordance with the terms and conditions of the source's new or revised construction permit.
- (5) The permit shield described in Rule 62-213.460, F.A.C., shall not apply to such changes until after the Department takes final action to issue the operation permit revision.
- (6) If the Department denies the source's application for operation permit revision, the source shall cease implementation of the proposed changes.

[Rule 62-213.412, F.A.C.]

34. Permit Applications.

- (1) Duty to Apply. For each Title V source, the owner or operator shall submit a timely and complete permit application in compliance with the requirements of Rules 62-213.420, 62-4.050(1) & (2), and 62-210.900, F.A.C.
 - (a) Timely Application.
 - 3. For purposes of permit renewal, a timely application is one that is submitted in accordance with Rule 62-4.090, F.A.C.
 - (b) Complete Application.
 - 1. Any applicant for a Title V permit, permit revision or permit renewal must submit an application on DEP Form No. 62-210.900(1), which must include all the information specified by Rule 62-213.420(3), F.A.C., except that an application for permit revision must contain only that information related to the proposed change. The applicant shall include information concerning fugitive emissions and stack emissions in the application. Each application for permit permit revision or permit renewal shall be certified by a responsible official in accordance with Rule 62-213.420(4), F.A.C.
 - 2. For those applicants submitting initial permit applications pursuant to Rule 62-213.420(1)(a)1., F.A.C., a complete application shall be an application that substantially addresses all the information required by the application form number 62-210.900(1), and such applications shall be deemed complete within sixty days of receipt of a signed and certified application unless the Department notifies the applicant of incompleteness within that time. For all other applicants, the applications shall be deemed complete sixty days after receipt, unless the Department, within sixty days after receipt of a signed application for permit, permit revision or permit renewal, requests additional documentation or information needed to process the application. An applicant making timely and complete application for permit, or timely application for permit renewal as described by Rule 62-4.090(1), F.A.C., shall continue to operate the source under the authority and provisions of any existing valid permit or Florida Electrical Power Plant Siting Certification, provided the applicant complies with all the provisions of Rules 62-213.420(1)(b)3, and 4, F.A.C. Failure of the Department to request additional information within sixty days of receipt of a properly signed application shall not impair the Department's ability to request additional information pursuant to Rules 62-213.420(1)(b)3, and 4, F.A.C.

3. For those permit applications submitted pursuant to the provisions of Rule 62-213.420(1)(a)1., F.A.C., the Department shall notify the applicant if the Department becomes aware at any time during processing of the application that the application contains incorrect or incomplete information. The applicant shall submit the corrected or supplementary information to the Department within ninety days unless the applicant has requested and been granted additional time to submit the information. Failure of an applicant to submit corrected or supplementary information requested by the Department within ninety days or such additional time as requested and granted shall render the application incomplete. 4. For all applications other than those addressed at Rule 62-213.420(1)(b)3., F.A.C., should the Department become aware, during processing of any application that the application contains incorrect information, or should the Department become aware, as a result of comment from an affected State, an approved local air program, EPA, or the public that additional information is needed to evaluate the application, the Department shall notify the applicant within 30 days. When an applicant becomes aware that an application contains incorrect or incomplete information, the applicant shall submit the corrected or supplementary information to the Department. If the Department notifies an applicant that corrected or supplementary information is necessary to process the permit, and requests a response, the applicant shall provide the information to the Department within ninety days of the Department request unless the applicant has requested and been granted additional time to submit the information or, the applicant shall, within ninety days, submit a written request that the Department process the application without the information. Failure of an applicant to submit corrected or supplementary information requested by the Department within ninety days, or such additional time as requested and granted, or to demand in writing within ninety days that the application be processed without the information shall render the application incomplete. Nothing in this section shall limit any other remedies available to the Department.

[Rules 62-213.420(1)(a)3. and 62-213.420(1)(b)1., 2., 3. & 4., F.A.C.]

35. <u>Confidential Information</u>. Whenever an applicant submits information under a claim of confidentiality pursuant to Section 403.111, F.S., the applicant shall also submit a copy of all such information and claim directly to EPA. (also, see Condition No. 50.)

[Rule 62-213.420(2), F.A.C.]

- 36. Standard Application Form and Required Information. Applications shall be submitted under Chapter 62-213, F.A.C., on forms provided by the Department and adopted by reference in Rule 62-210.900(1), F.A.C. The information as described in Rule 62-210.900(1), F.A.C., shall be included for the Title V source and each emissions unit. An application must include information sufficient to determine all applicable requirements for the Title V source and each emissions unit and to evaluate a fee amount pursuant to Rule 62-213.205, F.A.C.
 [Rule 62-213.420(3), F.A.C.]
- 37. <u>Certification by Responsible Official (RO)</u>. In addition to the professional engineering certification required for applications by Rule 62-4.050(3), F.A.C., any application form, report, compliance statement, compliance plan and compliance schedule submitted pursuant to Chapter 62-213, F.A.C., shall contain a certification signed by a responsible official that, based on information and belief formed after reasonable inquiry, the statements and information in the document are true, accurate, and complete. [Rule 62-213.420(4), F.A.C.]
- 38. a. Permit Renewal and Expiration. Permits being renewed are subject to the same requirements that apply to permit issuance at the time of application for renewal. Permit renewal applications shall contain that information identified in Rules 62-210.900(1) and 62-213.420(3), F.A.C. Unless a Title V source submits a timely application for permit renewal in accordance with the requirements of Rule 62-4.090(1), F.A.C., the existing permit shall expire and the source's right to operate shall terminate.

- b. <u>Permit Revision Procedures.</u> Permit revisions shall meet all requirements of Chapter 62-213. F.A.C., including those for content of applications, public participation, review by approved local programs and affected states, and review by EPA, as they apply to permit issuance and renewal, except that permit revisions for those activities implemented pursuant to Rule 62-213.412, F.A.C., need not meet the requirements of Rule 62-213.430(1)(b), F.A.C. The Department shall require permit revision in accordance with the provisions of Rule 62-4.080, F.A.C., and 40 CFR 70.7(f), whenever any source becomes subject to any condition listed at 40 CFR 70.7(f)(1), hereby adopted and incorporated by reference. The below requirements from 40 CFR 70.7(f) are adopted and incorporated by reference in Rule 62-213.430(4), F.A.C.:
- o 40 CFR 70.7(f): Reopening for Cause. (also, see Condition No. 4)
- (1) This section contains provisions from 40 CFR 70.7(f) that specify the conditions under which a Title V permit shall be reopened prior to the expiration of the permit. A Title V permit shall be reopened and revised under any of the following circumstances:
 - (i) Additional applicable requirements under the Act become applicable to a major Part 70 source with a remaining permit term of 3 or more years. Such a reopening shall be completed not later than 18 months after promulgation of the applicable requirement. No such reopening is required if the effective date of the requirement is later than the date on which the permit is due to expire, unless the original permit or any of its terms and conditions has been extended pursuant to 40 CFR 70.4(b)(10)(i) or (ii).
 - (ii) Additional requirements (including excess emissions requirements) become applicable to an affected source under the acid rain program. Upon approved by the Administrator, excess emissions offset plans shall be deemed to be incorporated into the permit.
 - (iii) The permitting authority or EPA determines that the permit contains a material mistake or that inaccurate statements were made in establishing the emissions standards or other terms or conditions of the permit.
 - (iv) The Administrator or the permitting authority determines that the permit must be revised or revoked to assure compliance with the applicable requirements.
- (2) Proceedings to reopen and issue a permit shall follow the same procedures as apply to initial permit issuance and shall affect only those parts of the permit for which cause to reopen exists. Such reopening shall be made as expeditiously as practicable.
- (3) Reopenings under 40 CFR 70.7(f)(1) shall not be initiated before a notice of such intent is provided to the Part 70 source by the permitting authority at least 30 days in advance of the date that the permit is to be reopened, except that the permitting authority may provide a shorter time period in the case of an emergency.

[Rules 62-213.430(3) & (4), F.A.C.; and, 40 CFR 70.7(f)]

39. Insignificant Emissions Units or Pollutant-Emitting Activities.

- (a) All requests for determination of insignificant emissions units or activities made pursuant to Rule 62-213.420(3)(m), F.A.C., shall be processed in conjunction with the permit, permit renewal or permit revision application submitted pursuant to Chapter 62-213, F.A.C. Insignificant emissions units or activities shall be approved by the Department consistent with the provisions of Rule 62-4.040(1)(b), F.A.C. Emissions units or activities which are added to a Title V source after issuance of a permit under Chapter 62-213, F.A.C., shall be incorporated into the permit at its next renewal, provided such emissions units or activities have been exempted from the requirement to obtain an air construction permit and also qualify as insignificant pursuant to Rule 62-213.430(6), F.A.C.
- (b) An emissions unit or activity shall be considered insignificant if:
 - 1. Such unit or activity would be subject to no unit-specific applicable requirement;
 - 2. Such unit or activity, in combination with other units or activities proposed as insignificant, would not cause the facility to exceed any major source threshold(s) as defined in Rule 62-213.420(3)(c)1., F.A.C., unless it is acknowledged in the permit application that such units or activities would cause the facility to exceed such threshold(s); and
 - 3. Such unit or activity would not emit or have the potential to emit:
 - a. 500 pounds per year or more of lead and lead compounds expressed as lead:
 - b. 1,000 pounds per year or more of any hazardous air pollutant;
 - c. 2.500 pounds per year or more of total hazardous air pollutants; or
 - d. 5.0 tons per year or more of any other regulated pollutant.

[Rule 62-213.430(6), F.A.C.]

40. <u>Permit Duration</u>. Operation permits for Title V sources may not be extended as provided in Rule 62-4.080(3), F.A.C., if such extension will result in a permit term greater than five (5) years. [Rule 62-213.440(1)(a), F.A.C.]

- 41. <u>Monitoring Information</u>. All records of monitoring information shall specify the date, place, and time of sampling or measurement and the operating conditions at the time of sampling or measurement, the date(s) analyses were performed, the company or entity that performed the analyses, the analytical techniques or methods used, and the results of such analyses. [Rule 62-213.440(1)(b)2.a., F.A.C.]
- 42. Retention of Records. Retention of records of all monitoring data and support information shall be for a period of at least 5 years from the date of the monitoring sample, measurement, report, or application. Support information includes all calibration and maintenance records and all original strip-chart recordings for continuous monitoring instrumentation, and copies of all reports required by the permit.

[Rule 62-213.440(1)(b)2.b., F.A.C.]

- 43. Monitoring Reports. The permittee shall submit reports of any required monitoring at least every six (6) months. All instances of deviations from permit requirements must be clearly identified in such reports.

 [Rule 62-213.440(1)(b)3.a., F.A.C.]
- 44. <u>Deviation from Permit Requirements Reports</u>. The permittee shall report in accordance with the requirements of Rules 62-210.700(6) and 62-4.130, F.A.C., any deviations from permit requirements, including those attributable to upset conditions as defined in the permit. Reports shall include the probable cause of such deviations, and any corrective actions or preventive measures taken.

[Rule 62-213.440(1)(b)3.b., F.A.C.]

- 45. Reports. All reports shall be accompanied by a certification by a responsible official, pursuant to Rule 62-213.420(4), F.A.C. [Rule 62-213.440(1)(b)3.c, F.A.C.]
- 46. If any portion of the final permit is invalidated, the remainder of the permit shall remain in effect. [Rule 62-213.440(1)(d)1., F.A.C.]
- 47. It shall not be a defense for a permittee in an enforcement action that maintaining compliance with any permit condition would necessitate halting of or reduction of the source activity.

 [Rule 62-213.440(1)(d)3., F.A.C.]
- 48. A Title V source shall comply with all the terms and conditions of the existing permit until the Department has taken final action on any permit renewal or any requested permit revision, except as provided at Rule 62-213.412(2), F.A.C. [Rule 62-213.440(1)(d)4., F.A.C.]
- 49. A situation arising from sudden and unforeseeable events beyond the control of the source which causes an exceedance of a technology-based emissions limitation because of unavoidable increases in emissions attributable to the situation and which requires immediate corrective action to restore normal operation, shall be an affirmative defense to an enforcement action in accordance with the provisions and requirements of 40 CFR 70.6(g)(2) and (3), hereby adopted and incorporated by reference.

 [Rule 62-213.440(1)(d)5., F.A.C.]
- 50. <u>Confidentiality Claims.</u> Any permittee may claim confidentiality of any data or other information by complying with Rule 62-213.420(2), F.A.C. (also, see Condition No. 35.) [Rule 62-213.440(1)(d)6., F.A.C.]

- 51. Statement of Compliance. The permittee shall submit a statement of compliance with all terms and conditions of the permit. Such statements shall be submitted to the Department and EPA annually, or more frequently if specified by Rule 62-213.440(2), F.A.C., or by any other applicable requirement. Such statements shall be accompanied by a certification in accordance with Rule 62-213.420(4), F.A.C. The statement of compliance shall include all the provisions of 40 CFR 70.6(c)(5)(iii), incorporated by reference at Rule 62-204.800, F.A.C.
- o 40 CFR 70.6(c)(5)(iii). The compliance certification shall include all of the following (provided that the identification of applicable information may cross-reference the permit or previous reports, as applicable):
 - (A) The identification of each term or condition of the permit that is the basis of the certification,
 - (B) The identification of the method(s) or other means used by the owner or operator for determining the compliance status with each term and condition during the certification period, and whether such methods or other means provide continuous or intermittent data. Such methods and other means shall include, at a minimum, the methods and means required under 40 CFR 70.6(a)(3). If necessary, the owner or operator also shall identify any other material information that must be included in the certification to comply with section 113(c)(2) of the Act, which prohibits knowingly making a false certification or omitting material information:
 - (C) The status of compliance with the terms and conditions of the permit for the period covered by the certification, based on the method or means designated in paragraph (c)(5)(iii)(B) of this section. The certification shall identify each deviation and take it into account in the compliance certification. The certification shall also identify as possible exceptions to compliance any periods during which compliance is required and in which an excursion or exceedance as defined under part 64 of this chapter occurred, and
 - (D) Such other facts as the permitting authority may require to determine the compliance status of the source.

The statement shall be accompanied by a certification by a responsible official, in accordance with Rule 62-213.420(4), F.A.C. The responsible official may treat compliance with all other applicable requirements as a surrogate for compliance with Rule 62-296.320(2), Objectionable Odor Prohibited.

[Rule 62-213.440(3), F.A.C.]

52. <u>Permit Shield.</u> Except as provided in Chapter 62-213, F.A.C., compliance with the terms and conditions of a permit issued pursuant to Chapter 62-213, F.A.C., shall be deemed compliance with any applicable requirements in effect as of the date of permit issuance, provided that the source included such applicable requirements in the permit application. Nothing in Rule 62-213.460, F.A.C., or in any permit shall alter or affect the ability of EPA or the Department to deal with an emergency, the liability of an owner or operator of a source for any violation of applicable requirements prior to or at the time of permit issuance, or the requirements of the Federal Acid Rain Program.

{Permitting note: The permit shield is not in effect until the effective date of the permit.} [Rule 62-213.460, F.A.C.]

- 53. Forms and Instructions. The forms used by the Department in the Title V source operation program are adopted and incorporated by reference in Rule 62-213.900, F.A.C. The form is listed by rule number, which is also the form number, and with the subject, title, and effective date. Copies of forms may be obtained by writing to the Department of Environmental Protection, Division of Air Resources Management, 2600 Blair Stone Road, Tallahassee, Florida 32399-2400, or by contacting the appropriate permitting authority.
- (1) Major Air Pollution Source Annual Emissions Fee (AEF) Form. [Rule 62-213.900(1), F.A.C.]

Chapter 62-256, F.A.C.

54. Not federally enforceable. Open Burning. This permit does not authorize any open burning nor does it constitute any waiver of the requirements of Chapter 62-256, F.A.C. Source shall comply with Chapter 62-256, F.A.C., for any open burning at the source.

[Chapter 62-256, F.A.C.]

Chapter 62-281, F.A.C.

- 55. <u>Refrigerant Requirements</u>. Any facility having refrigeration equipment, including air conditioning equipment, which uses a Class I or II substance (listed at 40 CFR 82. Subpart A. Appendices A and B), and any facility which maintains, services, or repairs motor vehicles using a Class I or Class II substance as refrigerant must comply with all requirements of 40 CFR 82. Subparts B and F, and with Rule 62-281.100, F.A.C. Those requirements include the following restrictions:
- (1) Any facility having any refrigeration equipment normally containing 50 (fifty) pounds of refrigerant, or more, must keep servicing records documenting the date and type of all service and the quantity of any refrigerant added pursuant to 40 CFR 82.166;

- (2) No person repairing or servicing a motor vehicle may perform any service on a motor vehicle air conditioner (MVAC) involving the refrigerant for such air conditioner unless the person has been properly trained and certified as provided at 40 CFR 82.34 and 40 CFR 82.40, and properly uses equipment approved pursuant to 40 CFR 82.36 and 40 CFR 82.38, and complies with 40 CFR 82.42;
- (3) No person may sell or distribute, or offer for sale or distribution, any substance listed as a Class I or Class II substance at 40 CFR 82, Subpart A, Appendices A and B, except in compliance with Rule 62-281,100, F.A.C., and 40 CFR 82,34(b), 40 CFR 82,42, and/or 40 CFR 82,166;
- (4) No person maintaining, servicing, repairing, or disposing of appliances may knowingly vent or otherwise release into the atmosphere any Class I or Class II substance used as a refrigerant in such equipment and no other person may open appliances (except MVACs as defined at 40 CFR 82.152) for service, maintenance or repair unless the person has been properly trained and certified pursuant to 40 CFR 82.161 and unless the person uses equipment certified for that type of appliance pursuant to 40 CFR 82.158 and unless the person observes the practices set forth at 40 CFR 82.156 and 40 CFR 82.166;
- (5) No person may dispose of appliances (except small appliances, as defined at 40 CFR 82.152) without using equipment certified for that type of appliance pursuant to 40 CFR 82.158 and without observing the practices set forth at 40 CFR 82.156 and 40 CFR 82.166;
- (6) No person may recover refrigerant from small appliances, MVACs and MVAC-like appliances (as defined at 40 CFR 82.152), except in compliance with the requirements of 40 CFR 82, Subpart F.
- [40 CFR 82; and, Chapter 62-281, F.A.C. (Chapter 62-281, F.A.C., is not federally enforceable)]

Chapter 62-296, F.A.C.

- 56. <u>Industrial. Commercial. and Municipal Open Burning Prohibited</u>. Open burning in connection with industrial, commercial, or municipal operations is prohibited, except when:
 - (a) Open burning is determined by the Department to be the only feasible method of operation and is authorized by an air permit issued pursuant to Chapter 62-210 or 62-213, F.A.C.; or
 - (b) An emergency exists which requires immediate action to protect human health and safety; or
 - (c) A county or municipality would use a portable air curtain incinerator to burn yard trash generated by a hurricane, tornado, fire or other disaster and the air curtain incinerator would otherwise be operated in accordance with the permitting exemption criteria of Rule 62-210.300(3), F.A.C.

[Rule 62-296.320(3), F.A.C.]

57. Unconfined Emissions of Particulate Matter.

(4)(c)1. No person shall cause, let, permit, suffer or allow the emissions of unconfined particulate matter from any emissions unit whatsoever, including, but not limited to, vehicular movement, transportation of materials, construction, alteration, demolition or wrecking, or industrially related activities such as loading, unloading, storing or handling, without taking reasonable precautions to prevent such emission.

- 3. Reasonable precautions may include, but shall not be limited to the following:
 - a. Paving and maintenance of roads, parking areas and yards.
 - b. Application of water or chemicals to control emissions from such activities as demolition of buildings, grading roads, construction, and land clearing.
 - c. Application of asphalt, water, oil, chemicals or other dust suppressants to unpaved roads, yards, open stock piles and similar emissions units.
 - d. Removal of particulate matter from roads and other paved areas under the control of the owner or operator of the emissions unit to prevent reentrainment, and from buildings or work areas to prevent particulate from becoming airborne.
 - e. Landscaping or planting of vegetation.
 - f. Use of hoods, fans, filters, and similar equipment to contain, capture and/or vent particulate matter.
 - g. Confining abrasive blasting where possible.
 - h. Enclosure or covering of conveyor systems.
- 4. In determining what constitutes reasonable precautions for a particular facility, the Department shall consider the cost of the control technique or work practice, the environmental impacts of the technique or practice, and the degree of reduction of emissions expected from a particular technique or practice.

[Rules 62-296.320(4)(c)1., 3., & 4. F.A.C.]

[electronic file name: tv-3.doc]

APPENDIX SS-1, STACK SAMPLING FACILITIES (version dated 10/07/96)

Stack Sampling Facilities Provided by the Owner of an Emissions Unit. This section describes the minimum requirements for stack sampling facilities that are necessary to sample point emissions units. Sampling facilities include sampling ports, work platforms, access to work platforms, electrical power, and sampling equipment support. Emissions units must provide these facilities at their expense. All stack sampling facilities must meet any Occupational Safety and Health Administration (OSHA) Safety and Health Standards described in 29 CFR Part 1910, Subparts D and E.

(a) Permanent Test Facilities. The owner or operator of an emissions unit for which a compliance test, other than a visible emissions test, is required on at least an annual basis,

shall install and maintain permanent stack sampling facilities.

(b) Temporary Test Facilities. The owner or operator of an emissions unit that is not required to conduct a compliance test on at least an annual basis may use permanent or temporary stack sampling facilities. If the owner chooses to use temporary sampling facilities on an emissions unit, and the Department elects to test the unit, such temporary facilities shall be installed on the emissions unit within 5 days of a request by the Department and remain on the emissions unit until the test is completed.

(c) Sampling Ports.

1. All sampling ports shall have a minimum inside diameter of 3 inches.

2. The ports shall be capable of being sealed when not in use.

3. The sampling ports shall be located in the stack at least 2 stack diameters or equivalent diameters downstream and at least 0.5 stack diameter or equivalent diameter

upstream from any fan, bend, constriction or other flow disturbance.

- 4. For emissions units for which a complete application to construct has been filed prior to December 1, 1980, at least two sampling ports, 90 degrees apart, shall be installed at each sampling location on all circular stacks that have an outside diameter of 15 feet or less. For stacks with a larger diameter, four sampling ports, each 90 degrees apart, shall be installed. For emissions units for which a complete application to construct is filed on or after December 1, 1980, at least two sampling ports, 90 degrees apart, shall be installed at each sampling location on all circular stacks that have an outside diameter of 10 feet or less. For stacks with larger diameters, four sampling ports, each 90 degrees apart, shall be installed. On horizontal circular ducts, the ports shall be located so that the probe can enter the stack vertically, horizontally or at a 45 degree angle.
- 5. On rectangular ducts, the cross sectional area shall be divided into the number of equal areas in accordance with EPA Method 1. Sampling ports shall be provided which allow access to each sampling point. The ports shall be located so that the probe can be inserted perpendicular to the gas flow.

(d) Work Platforms.

- 1. Minimum size of the working platform shall be 24 square feet in area. Platforms shall be at least 3 feet wide.
- 2. On circular stacks with 2 sampling ports, the platform shall extend at least 110 degrees around the stack.

3. On circular stacks with more than two sampling ports, the work platform shall

extend 360 degrees around the stack.

4. All platforms shall be equipped with an adequate safety rail (ropes are not acceptable), toeboard, and hinged floor-opening cover if ladder access is used to reach the platform. The safety rail directly in line with the sampling ports shall be removable so that no obstruction exists in an area 14 inches below each sample port and 6 inches on either side of the sampling port.

(e) Access to Work Platform.

APPENDIX SS-1, STACK SAMPLING FACILITIES (version dated 10/07/96) (continued)

- 1. Ladders to the work platform exceeding 15 feet in length shall have safety cages or fall arresters with a minimum of 3 compatible safety belts available for use by sampling personnel.
- 2. Walkways over free-fall areas shall be equipped with safety rails and toeboards. (f) Electrical Power.
- 1. A minimum of two 120-volt AC, 20-amp outlets shall be provided at the sampling platform within 20 feet of each sampling port.
- 2. If extension cords are used to provide the electrical power, they shall be kept on the plant's property and be available immediately upon request by sampling personnel.

 (g) Sampling Equipment Support.
- 1. A three-quarter inch eyebolt and an angle bracket shall be attached directly above each port on vertical stacks and above each row of sampling ports on the sides of horizontal ducts.
- a. The bracket shall be a standard 3 inch x 3 inch x one-quarter inch equal-legs bracket which is 1 and one-half inches wide. A hole that is one-half inch in diameter shall be drilled through the exact center of the horizontal portion of the bracket. The horizontal portion of the bracket shall be located 14 inches above the centerline of the sampling port.
- b. A three-eighth inch bolt which protrudes 2 inches from the stack may be substituted for the required bracket. The bolt shall be located 15 and one-half inches above the centerline of the sampling port.
- c. The three-quarter inch eyebolt shall be capable of supporting a 500 pound working load. For stacks that are less than 12 feet in diameter, the eyebolt shall be located 48 inches above the horizontal portion of the angle bracket. For stacks that are greater than or equal to 12 feet in diameter, the eyebolt shall be located 60 inches above the horizontal portion of the angle bracket. If the eyebolt is more than 120 inches above the platform, a length of chain shall be attached to it to bring the free end of the chain to within safe reach from the platform.
- 2. A complete monorail or dualrail arrangement may be substituted for the eyebolt and bracket.
- 3. When the sample ports are located in the top of a horizontal duct, a frame shall be provided above the port to allow the sample probe to be secured during the test. [Rule 62-297.310(6), F.A.C.]

TABLE 297.310-1 CALIBRATION SCHEDULE (version dated 10/07/96)

Note: This table is refere	nced in Rule 62-297.310, F.A.C.]		
ІТЕМ	MINIMUM CALIBRATION FREQUENCY	REFERENCE INSTRUMENT	TOLERANCE
Liquid in glass thermometer	Annually	ASTM Hg in glass ref. thermometer or equivalent, or thermometric points	+/-2%
Bimetallic thermometer	Quarterly	Calib. liq. in glass thermometer	5 degrees F
Thermocouple Barometer	Annually Monthly	ASTM Hg in glass ref. thermometer, NBS calibrated reference and potentiometer Hg barometer or	5 degrees F
Burometer	Monuny	NOAA station	+/-1% scale
Pitot Tube	When required or when damaged	By construction or measurements in wind tunnel D greater than 16" and standard pitot tube	See EPA Method 2, Fig. 2-2 & 2-3
Probe Nozzles	Before each test or when nicked, dented, or corroded	Micrometer	+/-0.001" mean of at least three readings Max. deviation between readings .004"
Dry Gas Meter and Orifice Meter	1. Full Scale: When received, When 5% change observed, Annually 2. One Point: Semiannually	Spirometer or calibrated wet test or dry gas test meter	2%
	Check after each test series	Comparison check	5%

[electronic file name: 297310-1.doc]

FIGURE 1--SUMMARY REPORT--GASEOUS AND OPACITY EXCESS EMISSION AND MONITORING SYSTEM PERFORMANCE

[Note: This form is referenced in 40 CFR 60.7, Subpart A-General Provisi	ons]
Pollutant (Circle One): SO ₂ NO _X TRS H ₂ S	CO Opacity
Reporting period dates: From	to
Company:	
Emission Limitation:	
Address:	•
Monitor Manufacturer:	
•	<u>.</u>
Date of Latest CMS Certification or Audit:	
Process Unit(s) Description:	
Total source operating time in reporting period 1:	
Emission data summary	CMS performance summary 1
1. Duration of excess emissions in reporting period due to: a. Startup/shutdown b. Control equipment problems c. Process problems d. Other known causes e. Unknown causes 3. Total duration of excess emissions x (100) / [Total source operating time]	a. Monitor equipment malfunctions b. Non-Monitor equipment malfunctions c. Quality assurance calibration d. Other known causes e. Unknown causes 2. Total CMS Downtime 3. [Total CMS Downtime] x (100) / [Total source operating time] // % ² ord all times in hours. emissions is 1 percent or greater of the total operating time or otal operating time, both the summary report form and the all be submitted.
	·
Name:	
Signature:	Date:
Title:	·

Phase II Permit Application

Page 1

For more information, see instructions and refer to 40 CFR 72.30 and 72.31 and Chapter 214, F.A.C. This submission is: - New Revised						
Putnam Plant	FL	6246 ORIS Code				

STEP 1 Identify the source by plant name, State, and DRIS code from NADB

Enter the boiler ID# from NADB for each affected unit, and indicate whether a repowering plan is being submitted for the unit by entering "yes" or "no" at column c. For new units, enter the requested information in columns d and e

Compliance Plan Boiler 10# Unit Will New Units New Units Hold Allow- Plan ances in Accordance with 40 CFR Commence Monitor 72.9(c)(1) Operation Date Certification Deadline N/A N/A HRSG11 Yes N/A N/A N/A N/A HRSG12 Yes N/A N/A N/A HRSG21 Yes N/A HRSG22 N/A Yes Yes Yes Yes

STEP 3 Check the box if the response in column c of Step 2 is "Yes" for any unit

For each unit that will be repowered, the Repowering Extension Plan form is included and the Repowering Technology Petition form has been submitted or will be submitted by June 1, 1997.

STEP 4 Read the standard requirements and certification, enter the name of the designated representative, and sign and data

Standard Requirements

Permit Requirements.

- [1] The designated representative of each Acid Rain source and each Acid Rain unit at the source shah; (i) Submit a complete Acid Rain part application (including a compliance plan) under 40 CFR part 72. Rules 62-214,320 and 330, F.A.C. in accordance with the deadlines specified in Rule 62-214,320 F.A.C.; and
 - (ii) Submit in a timely manner any supplemental information that the permitting authority determines is necessary in order to review an Acid Rain part application and issue or deny an Acid Rain permit
- [2] The owners and operators of each Acid Rain source and each Acid Rain unit at the source shall; (i) Operate the unit in compliance with a complete Acid Rain part application or a superseding Acid Rain part issued by the permitting authority; and (ii) Have an Acid Rain Part.

Monitoring Requirements.

- (1) The owners and operators and, to the extent applicable, designated representative of each Acid Rain source and each Acid Rain unit at the source shall comply with the monitoring requirements as provided in 40 CFR part 75, and Rula 62-214,425, F.A.C.
- (2) The emissions measurements recorded and reported in accordance with 40 CFR peri 75 shall be used to determine compliance by the unit with the Acid Rain emissions limitations and envisions reduction requirements for suffur dioxide and nitrogen oxides under the Acid Rain Program.
- 12. The requirements of 40 CFR part 75 shall not affect the responsibility of the owners and operators to monitor emissions of other poliutants or other emissions characteristics at the unit under other applicable requirements of the Act and other provisions of the operating permit for the source.

Sutter Dioxide Requirements.

- (1) The owners and operators of each source and each Acid Rain unit at the source shall; (i) hold allowances, as of the allowance transfer deadline, in the unit's compliance subaccount lafter deductions under 40 CFR 73.34(c)) not less than the total annual emissions of sulfur dioxide for the previous calendar year from the unit; and (iii Comply with the applicable Acid Rain amissions limitations for suffur dioxide,
- (2) Each ton of sulfur dioxide emitted in excess of the Acid Rain emissions limitations for sulfur dioxide shall constitute a separate violation of the Act.
- (3) An Acid Rain unit shall be subject to the requirements under paragraph (1) of the sulfur dioxide requirements as follows:
 - (i) Starting January 1, 2000, an Acid Rain unit under 40 CFR 72,6(a)(2); or
 - (ii) Starting on the later of January 1, 2000 or the gaadline for monitor certification under 40 OFR part 75, an Acid Rain unit under 40 CFR 72.6(a)(3).
- (4) Allowances shall be held in, deducted from, or transferred among Allowance Tracking System accounts in accordance with the Acid Rain Program.
- (5) An allowence shall not be deducted in order to comply with the requirements under paragraph (3)(i) of the sulfur dioxide requirements phor to the calandar year for which the allowance was allocated. (6) An allowance allocated by the Administrator under the Acid Rain Program is a limited authorization to emit sulfur dioxide in accordance with the Acid Rain Program. No provision of the Acid Rain Program, the Acid Rain permit application, the Acid Rain permit, or the written exemption under 40 CFR 72.7 and I.E and no provision of law shall be construed to limit the authority of the United States to terminate or firmit such authorization.
- (7) An allowance allocated by the Administrator under the Adic Rain Program does not constitute a property right.

Nitrogen Oxides Requirements. The owners and operators of the source and each Acid Rain unit at the source shall comply with the applicable Acid hain emissions limitation for hitrogen oxides.

Excess Emissions Requirements,

- 11. The designated representative of an Acid Rain unit that has excess emissions in any desender year shall submit a proposed offset plan, as required under 40 CFR part TT.

 (2) The dwiners and operators of an Acid Rain unit that has excess emissions in any calendar year shall
- (i) Fay without demand the penalty required, and pay upon demand the interest on that penalty, as required by 40 CFR part 77; and
- iii Comply with the terms of an approved offset plan, as required by 40 CFR pain 77.

Recordicepting and Reporting Requirements,

- (1) Unless otherwise provided, the owners and operators of the source and each Acid Rain unit at the source shall keep on site at the source each of the following occuments for a period of 5 years from the date the document is creeted. This period may be extended for cause, at any time prior to the end of S years, in writing by the Administrator or permitting authority?
 - (i) The certificate of representation for the designated representative for the source and each Acid Rain unit at the source and all documents that demonstrate the truth of the statements in the conflicate of representation, in accordance with Rule 62-214.350, F.A.C.; provided that the centificate and documents shall be retained on site at the source beyond such 5-year pendd until such occuments are superseded pecause of the supmission of a new certificate of representation changing the designated representative:
 - All emissions monitoring information, in accordance with 40 CFR part 75;
 - Copies of all reports, compliance certifications, and other submissions and all reports made or recurred under the Apid Rain Program; and

Recordkeeping and Reporting Requirements (cont.)

(iv) Copies of all documents used to complete an Acid Rain part application and any other submission under the Acid Rain Program or to demonstrate compliance with the requirements of the Acid Rain Program.

(2) The designated representative of an Acid Rain source and each Acid Rain unit at the source shall submit the reports and compliance cardifications required under the Acid Rain Program, including those under 40 CFR pert 72 subpart I and 40 CFR part 75.

Liability.

(1) Any person who knowingly violates any requirement or prohibition of the Acid Rain Program, a complete Acid Rain part application, an Acid Rain part, or a written examption under 40 CFR 72.7 or 72.2. including any requirement for the payment of any penalty owed to the United States, shall be subject to enforcement pursuant to section 113(c) of the Act.

(2) Any person who knowingly makes a false, material statement in any record, submission, or report under the Acid Rain Program shall be subject to criminal enforcement pursuant to section 113(c) of the Act and 18 U.S.C. 1001.

(3) No permit revision shall excuss any violation of the requirements of the Acid Rain Program that occurs prior to the date that the revision takes effect.

(4) Each Acid Rain source and each Acid Rain unit shall meet the requirements of the Acid Rain Program. (5) Any provision of the Acid Rain Program that applies to an Acid Rain source findleding a provision applicable to the designated rapresentative of an Acid Rain source) shall also apply to the owners and operators of such source and of the Acid Rain units at the source.

(6) Any provision of the Acid Rain Program that applies to an Acid Rain unit finduding a provision applicable to the designated representative of an Acid Rain unit) shall also apply to the owners and operators of such unit. Except as provided under 40 CFR 72.44 (Phase II repowaring extension plans), and except with regard to the requirements applicable to units with a common stack under 40 CFR part 75 (including 40 CFR 75.16, 75.17, and 75.18), the owners and operators and the designated representative of one Acid Rain unit shall not be liable for any violation by any other Acid Rain unit of which they are not owners or operators or the designated representative and that is located at a source of which they are not owners or operators or the designated representative.

(7) Each violation of a provision of 40 CFR parts 72, 73, 75, 77, and 78 by an Acid Rain source or Acid

Rain unit, or by an owner or operator or designated representative of such source or unit, shall be a

reparate violation of the Act.

Effect on Other Authorities. No provision of the Acid Rain Program, an Acid Rain part application, an Acid Rain part, or a written exemption under 40 CFR 72.7 or 72.8 shall be construed as:

(1) Except as expressly provided in title IV of the Act, exempting or excluding the owners and operators and, to the extent applicable, the designated representative of an Acid Rain source or Acid Rain unit from compliance with any other provision of the Act, including the provisions of title I of the Act relating to applicable National Ambient Air Quality Standards or State Implementation Plans;

(2) Limiting the number of allowances a unit can hold; provided, that the number of allowances held by the unit shall not affect the source's obligation to comply with any other provisions of the Act

(3) Requiring a change of any kind in any State law regulating electric utility rates and charges, affecting any State law regarding such State regulation, or limiting such State regulation, including any prudence review requirements under such State law;

(4) Modifying the Federal Power Act or affecting the authority of the Federal Energy Regulatory Commission under the Federal Power Act; or,

(5) Interlaining with ar impairing any program for competitive bidding for power supply in a State in which such program is established.

Certification

I am authorized to make this submission on behalf of the owners and operators of the Acid Rain source or Acid Rain units for which the submission is made. I certify under penalty of law that I have personally examined, and am familiar with, the statements and information submitted in this document and all its attachments. Based on my inquiry of those individuals with primary responsibility for obtaining the information, I certify that the statements and information are to the best of my knowledge and belief true, accurate, and complete. I am aware that there are significant penalties for submitting false statements and information or omitting required statements and information, including the possibility of line or imprisonment. (There are no attachments to this document)

Name	¥illiam M. Reichel	
Signature	Willin M. Reich	Dete 12/4/95

Enter the source AIRS and EINDS identification	AIRS	
-numbers, if known		
	FINDS	

DEP Form No. 62-210.900(1)(a) - Form Effective: 7-1-95

MEMO

T 5.9 red -

TO:

Howard L. Rhodes

FROM:

Clair H. Fancy

DATE:

June 5, 2000

SUBJECT:

FINAL Permit Revision No.: 1070014-004-AV

Florida Power and Light Company

Putnam Plant

An initial Title V air operation permit, 1070014-001-AV, went final on June 17, 1998 and effective on January 1, 1999 for this facility.

The subject of this permit revision to the initial Title V air operation permit is to incorporate new inlet fogger conditions from Air Construction Permit No. 1070014-003-AC into the Title V Air Operation Permit. No emissions increases will result from this permit revision.

The PROPOSED Title V permit revision was sent to EPA on February 15. No comments were received from EPA by day 55 (April 10). Therefore, the FINAL permit revision is being issued unchanged from the PROPOSED.

I recommend this permit revision for your signature.

Attachment

CHF/ss/wa