

Florida Department of Environmental Protection

Memorandum

TO: Joseph Kahn
THRU: Trina Vielhauer
FROM: A.A. Linero
Teresa Heron *TH*
DATE: April 18, 2007
SUBJECT: DEP File Nos. 0250020-018-AV
Titan Pennsuco Facility
Title V Permit Renewal

Attached is the Final Title V Air Operation Permit Renewal for the Titan Pennsuco Facility in Medley, Miami-Dade County. The facility is operated by Tarmac America LLC which is an affiliate of Titan Florida Pennsuco and Titan America. The Renewal incorporates all of the changes since the original permit effective on October 26, 2000 including applicability of 40CFR63, Subpart LLL Major Source Provisions, the cement plant modernization and any permits issued for the aggregate, block, and ready mix plants.

This renewal permitting action recognizes all the intended revisions stated in the REVISED DRAFT Title V Permit No. 0250020-013-AV distributed on September 28, 2004 (now withdrawn) such as the shutdown of Kilns and Coolers No. 1 & 2, the slag dryer, the cement dust insufflation system and their support equipment. The office of General Counsel closed this file on March 30, 2007.

We also included a Compliance Plan. The purpose of the Compliance Plan is to set appropriate requirements and milestones for Titan to apply for the required air construction permits for the second concrete batch ready mix plant, the final equipment configuration (refer to Table I) of the Aggregate Plant, and to complete the 106th Avenue improvement project that is a requirement of the Facility Dust Improvement Plan.

We recommend your approval and signature of this permit renewal.

AAL/th

Attachments

NOTICE OF FINAL TITLE V AIR OPERATION PERMIT

In the Matter of an
Application for Air Permit by:

Mr. Hardy Johnson, President Tarmac America, LLC 445 Fairway Drive Deerfield Beach, Florida 33441	DEP File No. 0250020-018-AV Title V Operation Permit Renewal Titan Pennsuco Facility Miami-Dade County, Florida
--	--

Enclosed is the FINAL Permit, No. 0250020-018-AV. The purpose is for the renewal of the Title V Air Operation Permit 0250020-009-AV and its revisions. The facility is located in Miami-Dade County, Florida. This permit renewal is issued pursuant to Chapter 403, Florida Statutes (F.S.). No comments were received from Region 4, U.S. EPA.

Any party to this order (permit) has the right to seek judicial review of the permit pursuant to Section 120.68, F.S., by the filing of a Notice of Appeal pursuant to Rule 9.110, Florida Rules of Appellate Procedure, with the Clerk of the Department in the Legal Office; and, by filing a copy of the Notice of Appeal accompanied by the applicable filing fees with the appropriate District Court of Appeal. The Notice of Appeal must be filed within 30 (thirty) days from the date this Notice is filed with the Clerk of the Department.

Executed in Tallahassee, Florida.



Trina L. Vielhauer, Chief
Bureau of Air Regulation

TLV/aal/th

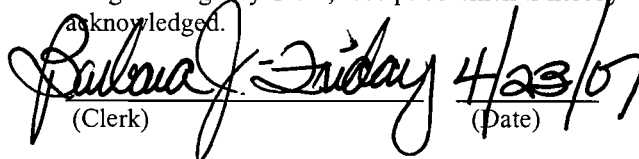
CERTIFICATE OF SERVICE

The undersigned duly designated deputy agency clerk hereby certifies that this NOTICE OF FINAL PERMIT (including the FINAL permit) and all copies were sent electronically (with Received Receipt) before the close of business on 4/23/07 to the person(s) listed below:

Hardy Johnson, Tarmac America, LLC hjohnson@titanamerica.com
David A. Buff, P.E., Golder Associates Inc. dbuff@golder.com
Terry Lancaster, Titan America, LLC tlancaster@titanamerica.com
Patrick Wong, Miami-Dade County DERM wongP@miamidade.gov
Darrel Graziani, DEP SED darrell.graziani@dep.state.fl.us
Barbara Friday, DEP-BAR barbara.friday@dep.state.fl.us (for posting with Region 4, U.S. EPA)

Clerk Stamp

FILING AND ACKNOWLEDGMENT FILED, on this date, pursuant to Section 120.52(7), Florida Statutes, with the designated agency Clerk, receipt of which is hereby acknowledged.


(Clerk) 4/23/07 (Date)

FINAL Determination

Title V Air Operation Permit Revision
FINAL Permit No.: 0250020-018-AV
Tarmac America LLC
Titan Pennsuco Facility
Page 1 of 1

I. Comment.

No comments were received from the USEPA during their 45 day review period of the PROPOSED Permit.

II. Conclusion.

In conclusion, the permitting authority hereby issues the FINAL Permit.

STATEMENT OF BASIS

Tarmac America, LLC
Titan America Pennsuco Complex
Facility ID No.: 0250020
Medley, Miami-Dade County

FINAL Title V Operation Permit Renewal
DEP File No.: 0250020-018-AV

This Title V Air Operation Permit Renewal, No. 0250020-018-AV is issued under the provisions of Chapter 403, Florida Statutes (F.S.), and Florida Administrative Code (F.A.C.) Chapters 62-4, 62-210 and 62-213. The above named permittee is hereby authorized to operate the facility shown on the application and approved drawing(s), plans, and other documents, attached hereto or on file with the permitting authority, in accordance with the terms and conditions of this permit.

The purpose of this permit is for the renewal of the Title V Air Operation Permit No. 0250020-011-AV. This permit will incorporate the terms and conditions of the air construction permit 0250020-016-AC for the modernized dry process Portland Cement Plant, the cement plant production increase Permit 0250020-017-AC/PSD-FL-360 along with the permit modifications contained in Permit 0250020-019-AC/PSD-FL-360A and the air construction permit 0250020-014-AC for the Concrete Block Plant (E.U. 024). This permit will also include a Compliance Assurance Monitoring Plan (Appendix CAM attached) and a Compliance Plan (Appendix CP-1 attached) as described below. It also reaffirms the applicability of the major provisions of 40CFR63, Subpart LLL, National Emission Standards from the Portland Cement Manufacturing Industry as a new kiln at a brownfield facility.

This renewal permitting action recognizes all the intended revisions stated in the REVISED DRAFT Title V Permit No. 0250020-013-AV distributed on September 28, 2004 (now withdrawn) such as the shutdown of Kilns and Coolers No. 1 & 2, the slag dryer, the cement dust insufflation system and their support equipment.

This FINAL Title V Operation Permit Renewal is in a completely different format compared with the original Title V Permit 0250020-009-AV (0250020-002-AV) and the permit revision 0250020-011-AV.

PRESENT DESCRIPTION OF THE FACILITY

Tarmac America LLC operates the Titan America Pennsuco Complex in Medley, Miami-Dade County. The facility consists of:

- A dry process portland cement plant that primarily uses coal and petroleum coke as fuels and limestone and aggregate supplied from the Aggregate Plant and is permitted to produce 2,190,000 TPY of clinker and is capable of producing approximately 2,400,000 TPY of portland cement;
- An aggregate plant permitted to process 14,560,000 tons per year (TPY) of raw material from on-site limestone quarry and shipments received from other sources;
- Two 130 cubic yards per hour (244 tons per hour) concrete batch ready mix plants; and
- One 5,500 blocks per hour concrete block plant.

CEMENT PLANT DESCRIPTION

Following is a more detailed description of the cement plant within the facility. The portland cement plant includes the following main components:

- An 8-acre, 95-foot high "A-frame" raw materials storage building (MSB);

- Raw material and fuel piles stored outside and inside of the MSB. The piles consist of blended limestone, alumina source (e.g. bauxite), iron source (e.g. mill scale), high lime limestone, coal, and petroleum coke;
- Materials handling equipment including bridge reclaimers, stackers, belt conveyors, conveyor from the MSB to the raw mill, control system/analyzer, etc.;
- An F.L. Smidth nominal 400 dry tons per hour (TPH) Model 52/4 Raw mill and F.L. Smidth nominal 15,000 ton blending silo;
- An F.L. Smidth Rotax kiln that is 65 meters long and 5 meters in diameter;
- An F.L. Smidth 5-stage "Low NO_x" in-line calciner (ILC) with sequenced fuel and air introduction and meal staging;
- An F.L. Smidth 4x5 cross bar clinker cooler;
- An F.L. Smidth Airtec ten-compartment baghouse with 690 bags per compartment;
- An F.L. Smidth nominal 35 TPH coal (and petroleum coke) mill;
- Six finish mills including a new F.L. Smidth finish mill; and
- Cement storage, truck/rail loadout and packhouse.

KEY PERMITS RELATED TO CHANGES AT THE FACILITY AND CEMENT PLANT

The air construction permits related to the modernization of the cement plant are listed below. They are the primary basis for the changes between the Initial Title V Operation Permit and this Title V Operation Permit Renewal.

- Construction Permit 0250020-008-AC issued October 21, 1999: Initial authorization.
- Construction Permit 0250020-010-AC issued May 1, 2001: Reauthorization as a larger project after purchase by Titan. Update netting.
- Construction Permit 0250020-012-AC issued January 25, 2002: Increase hours of operation for the Aggregate Plant and replace hourly and daily production limits with monthly and yearly limits. These changes and others were incorporated into a Title V Operation Permit Revision No. 0250020-011-AV dated March 26, 2002.
- Construction Permit 0250020-014-AC issued September 20, 2002: Construction of 5,500 blocks per hour concrete block plant that replaced two smaller block plants.
- Construction Permit 0250020-016-AC issued May 31, 2005: Keep Finish Mill 1 and upgrade Finish Mill No. 3. Update netting calculations.
- Construction Permit 0250020-017-AC issued December 2, 2005: Increase production. PSD Review for CO (2 lb/ton clinker). New emission limits of 2.17 NO_x and 0.50 lb SO₂/ton clinker. Establish Fugitive Emissions Control Plan. Update netting calculations.
- Construction Permit 0250020-019-AC issued October 13, 2006: Reactivate Finish Mill 2 as a backup when any other Finishing Mill is unavailable. Update netting calculations.

COMPLIANCE ASSURANCE MONITORING (CAM) PLAN

The facility is subject to a particulate matter Compliance Assurance Monitoring Plan (CAM) for the main air pollution particulate control device (APCD) and stack for the kiln/cooler/raw mill/coal mill system.

The combined exhaust from raw mill, clinker cooler, kiln and coal mill is processed through a series of cyclones and then the large baghouse prior to exiting the main stack. That baghouse has a capacity greater than 500,000 actual cubic feet per minute. All dust from those cyclones and the baghouse

constitute the feed to pyroprocessing. Particulate emissions from the main stack are subject to at least four emissions limiting standards including:

- A visible emissions limitation of 10 percent opacity;
- The total of the NESHAP/MACT (40CFR63, Subpart LLL) particulate emission limit of 0.4 lb/ton of feed. This is comprised of 0.3 and 0.1 lb/ton feed for the kiln and clinker cooler respectively;
- The guaranteed specification from the supplier of 0.125 lb/ton of feed; and
- The permitted PSD avoidance limits of 0.063 and 0.053 lb/ton of feed for PM and PM₁₀ respectively.

The initial compliance tests conducted in November 2004 indicated PM emissions of 0.021 and 0.028 lb/ton feed with the raw mill up and down respectively. Typical observer-based visible emissions and COMS readings were zero.

Compliance tests conducted in December 2005 indicated PM emissions of 0.037 lb/ton of feed (70% of the PM₁₀ limit) with the raw mill up and concurrent COMS-based readings averaging 3%.

For reference, the permitted process limits equate to approximately 3,650,000 tons per year of feed. The permitted emission limits are roughly 100 TPY. Therefore the overall particulate collection efficiency of collection devices including cyclones following the raw mill and the main baghouse is on the order of 99.997%. Assuming that the main baghouse collects approximately 5% of all feed after initial milling (and collection by the cyclones), then that device would have to operate at an efficiency of approximately 99.95%.

While all of the function of the cyclones and much of the function of the baghouse is for the purpose of collecting the feed needed for the process, the Department believes that the baghouse must be operated to achieve greater PM/PM₁₀ collection than necessary solely for process purposes. In other words, the Department believes that if the equipment were designed solely as a process component, emissions would be in excess of the permitted emissions limits. Therefore, a CAM plan applies.

This argument is further buttressed by the fact that the PM/PM₁₀ emission limits are the lowest of any kiln known to the Department that is located in the United States. The equipment will be operated at emission limits less than guaranteed by the supplier to insure that PSD is not triggered by all of the projects related to the recent plant modernization. Therefore, it is important to insure continuous compliance with the PM/PM₁₀ limitations through a CAM Plan.

A CAM Plan has been included in the FINAL Title V Operation Permit Renewal as Appendix CAM and is based on action plans that are triggered by COMS opacity measurements greater than 5%. Because of the relatively short period of operation to-date and the relatively good performance (as indicated by PM/PM₁₀ and opacity measurements), the Department did not consider other possible indicators that may be related to the function of the baghouse such as differential pressure drop. The Department may re-examine the indicators based on the frequency of excursions in the future.

It is possible that in the future other process variables may be identified and used in conjunction with opacity for this kiln/cooler/raw mill/coal mill system particulate control device within this Compliance Plan. These variables might include differential baghouse pressure drop or fan amperage.

Control Equipment not subject to CAM

The product clinker and interground additions (such as gypsum) are processed in the finish mills. All resulting material (the fine cement product) is swept and recovered in the filtration devices. The obvious purpose of those devices (baghouses) is to recover the product. Therefore, they are not subject to a CAM Plan.

COMPLIANCE PLAN

The purpose of the Compliance Plan (Appendix CP-1 attached) is to set appropriate requirements and milestones for Titan to apply for the required air construction permits for the second concrete batch ready mix plant, the final equipment configuration (refer to Table I) of the Aggregate Plant, and to complete the 106th Avenue improvement project that is a requirement of the Facility Dust Improvement Plan.

Specifically:

- The concrete batch ready mix portion of the facility contains two rather than one plant. The second plant was added in 2003 to support construction of the cement plant modernization project. They intended to move the plant to Hollywood once construction of the new kiln line was complete. However they sold the property in Hollywood and now wish to keep the plant at the Pennsuco facility.
- The Aggregate Plant contains numerous emissions points. Some were not accurately noted in the preliminary DRAFT documents although the listing is based on records provided by Titan and a Table appended to an earlier Air Construction Permit.
- Operation of the Concrete Block Plant is limited to 6,240 hours per year. Titan wishes to be able to operate the plant 8,760 hours per year.

Titan also advised the Department that the 106th Avenue improvements under the Facility Dust Improvement Plan have not yet been completed.

The Department advised Titan that the three main items they identified require air construction permits. Titan agreed to submit applications to DERM for the necessary permits. The Department advised Titan and DERM that a Compliance Plan, requiring that Titan obtain permits for the first two items, will be made a part of the FINAL Title V Operation Permit Renewal.

HAZARDOUS AIR POLLUTANTS (HAPS) AND UNREGULATED EMISSIONS UNITS

Based on the Title V Air Operation Permit Renewal application received April 28, 2005 this facility is a major source of hazardous air pollutants (HAPs). Also included in this Title V permit are miscellaneous unregulated emissions units and/or activities.

FINAL Determination

Title V Air Operation Permit Revision
FINAL Permit No.: 0250020-018-AV
Tarmac America LLC
Titan Pennsuco Facility
Page 1 of 1

I. Comment.

No comments were received from the USEPA during their 45 day review period of the PROPOSED Permit.

II. Conclusion.

In conclusion, the permitting authority hereby issues the FINAL Permit.



Florida Department of Environmental Protection

Bob Martinez Center
2600 Blair Stone Road
Tallahassee, Florida 32399-2400

Charlie Crist
Governor

Jeff Kottkamp
Lt. Governor

Michael W. Sole
Secretary

Permittee:

Mr. Hardy Johnson, President
Tarmac America, Inc
455 Fairway Drive
Deerfield Beach, Florida 33441

FINAL Permit No.: 0250020-018-AV

Facility ID No.: 0250020

SIC Nos.: 3241, 3271, 3273, 1422, 1442

Project: Title V Air Operation Permit Renewal

PERMITTING ACTION: This permitting action is for the renewal of the Titan America Pennsuco Title V Operation Permit No. 0250020-009-AV and its revisions. The key changes since the Initial Title V Operation Permit are explained in a separate and more detailed Statement of Basis that accompanies this permit. This facility is located at 11000 NW 121 Way, Medley, Miami-Dade County. UTM Coordinates: Zone 17, 562.8 km East and 2861.7 km North; Latitude: 25° 52' 30" North and Longitude: 80° 22' 30" West.

This Title V Air Operation Permit Renewal is issued under the provisions of Chapter 403, Florida Statutes (F.S.), and Florida Administrative Code (F.A.C.) Chapters 62-4, 62-204, 62-210, 62-212 and 62-213, 62-296, and 62-297. The above named permittee is hereby authorized to operate the facility shown on the application and approved drawing(s), plans, and other documents, attached hereto or on file with the permitting authority, in accordance with the terms and conditions of this permit.

A detailed Statement of Basis is attached for informational purposes. The following attachments are made a part of this permit:

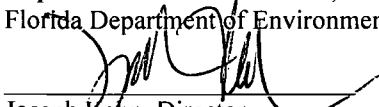
Appendix A:	40 CFR 60, Subpart A, General Provisions - Standards of Performance for New Stationary Sources (NSPS)
Appendix A-1:	40 CFR 63, Subpart A, General Provisions - National Emissions Standards for Hazardous Air Pollutants for Source Categories (NESHAP)
Appendix CAM:	Compliance Assurance Monitoring
Appendix CG:	Common and General Conditions
Appendix CP-1:	Compliance Plan
Appendix CF:	Citation Format
Appendix F:	40 CFR 60, Subpart F - Standards of Performance for Portland Cement Plants
Appendix H-1:	Permit History (<i>for information purpose</i>)
Appendix LLL:	40 CFR 63, Subpart LLL - National Emissions Standards for Hazardous Air Pollutants from the Portland Cement Manufacturing Industry - Major Sources
Appendix OOO:	40 CFR 60, Subpart OOO - Standards of Performance for Nonmetallic Mineral Processing Plants.
Appendix U-1:	List of Unregulated Emission Units and/or Activities
Appendix SS-1:	Stack Sampling Facilities
Appendix TV-6:	Title V Conditions
Appendix Y:	40 CFR 60, Subpart Y - Standards of Performance for Coal Preparation Plants
Table 297.310-1:	Calibration Schedule
Figure 1:	Summary Report: Gaseous and Opacity Excess Emissions and Monitoring System Performance
Table 1:	Summary of Air Pollutant Standards for the Nonmetallic Mineral Processing Plant

Effective Date: October 26, 2005

Renewal Application Due Date: April 25, 2010

Expiration Date: October 25, 2010

Florida Department of Environmental Protection


Joseph Kann, Director

Division of Air Resource Management

Tarmac America, LLC
Titan America Pennsuco Complex
11000 NW 121 Way
Medley, Florida 33178
Facility ID No. 0250020
Miami-Dade County

FINAL Title V Air Operation Permit No. 0250020-018-AV



Permitting Authority:

State of Florida
Department of Environmental Protection
Division of Air Resources Management
Bureau of Air Regulation
Mail Station #5505
2600 Blair Stone Road
Tallahassee, Florida 32399-2400

Telephone: 850/488-0114

Fax: 850/921-9533

Compliance Authority:

Miami-Dade County
Department of Environmental Resources Management
Air Facilities Section
33 SW 2nd Avenue, Suite 900
Miami, Florida 33150-1540
Telephone: (305) 372-6925
Fax: (305) 372-6954

Table of Contents

Section	Page Numbers
PLACARD PAGE	3
I. FACILITY INFORMATION	4
Subsection A. Facility Description	4
Subsection B. Emissions Unit ID No(s). and Brief Description(s)	4
Subsection C. Relevant Documents	5
Subsection D. Shutdown Operations	5
II. FACILITY WIDE CONDITIONS	6
III. EMISSIONS UNIT (S) SPECIFIC CONDITIONS	
Subsection A. Cement Plant Raw Material Handling System	8
Subsection B. Cement Plant Pyroprocessing and Raw Mill System	10
Subsection C. Cement Plant Clinker Handling & Storage System	18
Subsection D. Cement Plant Finish Mill System	20
Subsection E. Cement Plant Product Storage and Packhouse/Loadout System	23
Subsection F. Cement Plant Coal Handling System	25
Subsection G. Facility Fugitive Emissions	27
Subsection H. Aggregate Plant Operation	29
Subsection I. Concrete Block Plant Operation	32
Subsection J. Concrete Batch Ready Mix Plants Operation	34
IV. FACILITY COMMON AND GENERAL CONDITIONS	35
List of Appendices made part of this Permit (attached)	3

Section I. Facility Information

Subsection A. Facility Description.

Titan America (through various subsidiaries or affiliates) operates the Pennsuco Facility in Medley, Miami-Dade County, Florida. The facility consists of a portland cement plant, an aggregate plant, two batch "ready-mix" concrete plants, and a cement block plant.

The portland cement plant has an allowable production rate of 2,190,000 TPY of clinker and is capable of producing approximately 2,400,000 TPY of cement. It includes fuel and raw material storage, feed bins, a coal mill, a dry process pyroprocessing line, transfer equipment, finish mills, clinker and cement silos, and product packaging and load out facilities.

The aggregate plant consists of a quarry, crushers, decks, bins, screens, transfer equipment and piles. It is permitted to process 14,560,000 tons per year (TPY) of raw material from the on-site limestone quarry and shipments received from other sources. A portion is consumed in the adjacent cement plant while the remainder is supplied to other users.

Two concrete "ready-mix" plants include batching, cement and fly ash silos, additive tanks, racks, stackers, hoppers and truck loadouts.

The concrete block plant includes aggregate and cement storage silos, mixers, curing kilns, mold shop storage and loadout. It operates at about 50 cubic yards per hours and makes about 5,500 blocks per hour.

Pollution control equipment for the block and ready-mix plants consists of baghouses on storage silos and key process steps and reasonable precautions to control fugitive dust. Pollution prevention measurements for the aggregate plant consist of reasonable precautions to control fugitive dust.

Pollution control equipment for the cement plant consists of a common fabric filter system (baghouse) for particulate emissions (PM/PM₁₀) from the kiln, raw mill, coal mill and cooler; absorption of sulfur compounds and metals into the product; combustion controls for volatile organic compounds (VOC) and carbon monoxide (CO); indirect firing, multiple burn points, and a Low NO_x calciner for NO_x; and baghouses for particulate emissions from other process emission units.

Subsection B. Emissions Unit ID Nos. and Brief Descriptions per ARMS Database.

ARMS Emissions Unit No.	Brief Description of Facility Emissions Units
010	Finish Mill System: Finish Mill No. 1
011	Finish Mill System: Finish Mill No. 2
012	Finish Mill System: Finish Mill No. 3
013	Finish Mill System: Finish Mill No. 4
030	Finish Mill System: Finish Mill No. 6
014	Cement Handling System: Cement Storage Silos. 1 through 12
015	Cement Handling System: Cement Distribution, Rail and Truck Loadout
016	Cement Handling System: Cement Packhouse
022	Nonmetallic Mineral Processing Plant Equipment and Operations at Aggregate Plant Subject to 40 CFR 60, Subpart OOO
023	Nonmetallic Mineral Processing Plant Equipment and Operations at Aggregate Plant NOT Subject to 40 CFR 60, Subpart OOO
024	Concrete Block Plant
025	Two Concrete Batch Ready Mix Plants
026	Coal Handling System
027	Clinker Handling and Storage System
028	Pyroprocessing/Raw Mill System
029	Raw Material Handling System
031	Unregulated Emissions Units and/or Activities: Fugitive Emissions

Section I. Facility Information

The Department has determined that this facility is a major source of hazardous air pollutants (HAPs). Please reference the Permit No., Facility ID No., and appropriate Emissions Unit(s) ID No(s) on all correspondence, test report submittals, applications, etc.

Subsection C. Relevant Documents

The documents listed below are not a part of this permit; however, they are specifically related to this permitting action.

1. FINAL Title V Air Operation Permit 0250020-009-AV. Effective Date: October 26, 2000.
2. Air Construction Permit 0250020-010-AC to modernize cement plant issued May 1, 2001.
3. Air Construction Permit 0250020-012-AC to increase hours of operation for the aggregate plant and replace hourly and daily production limits with monthly and yearly limits. The permit was issued January 25, 2002.
4. Title V Air Operation Permit Revision 0250020-011-AV to incorporate the aggregate plant into the Title V Operation Permit and a compliance plan for NO_x and clarifications related to the wet process plant and modernization of the facility. The permit was issued March 21, 2002.
5. Air Construction Permit 0250020-014-AC to construct the 5,500 blocks per hour concrete block plant that replaced two smaller block plants. The permit was issued September 20, 2002.
6. Air Construction Permit 0250020-016-AC to keep Finish Mill 1 and upgrade Finish Mill 3. The permit was issued May 31, 2005.
7. Air Construction Permit 0250020-017-AC (PSD-FL-360) to increase cement production, establish best available control technology (BACT) for carbon monoxide (CO) and establish a Facility Fugitive Emissions Control Plan. The permit was issued December 2, 2005.
8. Air Construction Permit 0250020-019-AC to use Finish Mill 2 as a backup. The permit was issued October 13, 2006.

These documents are provided to the permittee for information purposes only:

1. Appendix H-1: Permit History.
2. Statement of Basis.

These documents and all related applications, permits and correspondence are on file with the permitting and compliance authorities:

1. All permit documents and related applications listed in attached Appendix H-1.
2. Title V Operation Permit Renewal Application received April 28, 2005.
3. Revised Title V Operation Permit Renewal Application received February 24, 2006.
4. DEP's electronic communications dated April 7, May 17, June 8, and July 13, 2006.
5. Titan's electronic communications dated April 6, April 10, May 1, May 17, June 9, July 27, August 7, and November 14, 2006. Titan's Statement of Compliance received August 28, 2006.
6. DERM's electronic mail dated July 14, 2006. Titan Compliance Status Confirmation.

Subsection D. Information on Shutdown Operations

Since the time the existing Pennsuco Facility was constructed in 1960 to the present, several emissions units operations have shutdown or were permitted but never operated or were never built.

These emissions units are listed in Appendix H-1: Permit History.

Section II. Facility-Wide Conditions

The following conditions apply facility-wide:

1. APPENDIX TV-6, TITLE V CONDITIONS, is a part of this permit.
{Permitting Note: APPENDIX TV-6, TITLE V CONDITIONS, is distributed to the permittee only. Other persons requesting copies of these conditions shall be provided a copy when requested or otherwise appropriate.}
2. General Pollutant Emissions Limiting Standards. Objectionable Odor Prohibited. No person shall cause, suffer, allow, or permit the discharge of air pollutants, which cause or contribute to an objectionable odor. [Rule 62-296.320(2), F.A.C.]
3. General Particulate Emissions Limiting Standards - General Visible Emissions Standard: Except for emissions units that are subject to a Particulate Matter or opacity limit set forth or established by rule and reflected by conditions in this permit, no person shall cause, let, permit, suffer or allow to be discharged into the atmosphere the emissions of air pollutants from any activity, the density of which is equal to or greater than that designated as Number 1 on the Ringelmann Chart (20 percent opacity). EPA Method 9 is the method of compliance pursuant to Chapter 62-297, F.A.C. [Rules 62-296.320(4)(b) 1. & 4., F.A.C.]
4. Prevention of Accidental Releases (Section 112(r) of CAA):
 - a. The permittee shall submit its Risk Management Plan (RMP) to the Chemical Emergency Preparedness and Prevention Office (CEPPO) RMP Reporting Center when, and if, such requirement becomes applicable. Any Risk Management Plan original submittals, revisions or updates to submittals, should be sent to:

RMP Reporting Center
P.O. Box 1515
Lanham-Seabrook, Maryland 20703-1515
Telephone: 301/429-5018
 - b. The permittee shall submit to the permitting authority Title V certification forms or a compliance schedule in accordance with Rule 62-213.440(2), F.A.C.

[40 CFR 68]
5. Unregulated Emission Units and/or Activities: Appendix U-1, List of Unregulated Emission Units and/or Activities, is a part of this permit.
6. General Pollutant Emissions Limiting Standards - Volatile Organic Compounds (VOC) Emissions or Organic Solvents (OS) Emissions: The permittee shall allow no person to store, pump, handle, process, load, unload or use in any process or installation, volatile organic compounds or organic solvents without applying known and existing vapor emissions control devices or systems deemed necessary and ordered by the Department. The Department has not required or deemed anything necessary to date. [Rule 62-296.320(1)(a), F.A.C.; and SIP approved]
7. Emissions of Unconfined Particulate Matter: Pursuant to Rules 62-296.320(4)(c)1, 3, & 4, F.A.C., reasonable precautions to prevent emissions of unconfined particulate matter at this facility include the following requirements (see Condition 57 of APPENDIX TV-6, TITLE V CONDITIONS, Condition 12 of Appendix CG, Subsection G, Facility Fugitives Emissions and Appendix CP-1):
 1. Paving and maintenance of roads, parking areas and yards.
 2. Application of water or chemicals to control emissions from such activities as demolition of buildings, grading roads, construction, and land clearing.
 3. Application of asphalt, water, chemicals or other dust suppressants to unpaved roads, yards, open stock piles and similar activities.

Section II. Facility-Wide Conditions

4. Removal of particulate matter from roads and other paved areas under the control of the owner or operator of the facility to prevent reentrainment, and from buildings or work areas to prevent particulate from becoming airborne.
 5. Landscaping or planting of vegetation.
 6. Use of hoods, fans, filters, and similar equipment to contain, capture and/or vent particulate matter.
 7. Confining abrasive blasting where possible.
 8. Enclosure or covering of conveyor systems.
8. **Recording, Monitoring and Reporting:** When appropriate, any recording, monitoring, or reporting requirements that are time-specific shall be in accordance with the effective date of the permit, which defines day one. [Rule 62-213.440, F.A.C.]
9. **Statement of Compliance:** The annual statement of compliance pursuant to Rule 62-213.440(3)(a)2., F.A.C., shall be submitted to DERM and EPA within 60 (sixty) days after the end of the calendar year using DEP Form No. 62-213.900(7), F.A.C. [Rule 62-213.440(3) and 62-213.900, F.A.C.]
- {Permitting Note: This condition implements the requirements of Rules 62-213.440(3)(a)2 & 3, F.A.C. (see Condition 51. of APPENDIX TV-6, TITLE V CONDITIONS)}*
10. **Annual Report Required:** On or before March 1 of each calendar year, a completed DEP Form 62-210.900(5), Annual Operations Report (AOR) Form for Air Pollutant Emitting Facility, shall be submitted to the DERM, Air Facilities Section. Included with this report shall be additional reports, if any, required by this permit in Section III -- Emissions Units and Conditions and Section IV -- Common and General Conditions. [Rule 62-4.070(3), F.A.C.; and Rule 62-210.900(5), F.A.C.]
11. **Miami-Dade County Compliance Authority:** The permittee shall submit all compliance related notifications and reports required of this permit to DERM at the following address:
- Miami-Dade County
Department of Environmental Resources
Air Quality Management Division
33 SW 2nd Avenue, Suite 900
Miami, Florida 33130-1540
12. **EPA Compliance Authority:** Any reports, data, notifications, certifications, and requests required to be sent to the United States Environmental Protection Agency, Region 4, should be sent to:
- United States Environmental Protection Agency Region 4
Air, Pesticides & Toxics Management Division
Air & EPCRA Enforcement Branch
Air Enforcement Section
61 Forsyth Street
Atlanta, Georgia 30303-8960
Telephone: 404/562-9155; Fax: 404/562-9163
13. **Certification by Responsible Official (RO):** In addition to the professional engineering certification required for applications by Rule 62-4.050(3), F.A.C., any application form, report, compliance statement, compliance plan and compliance schedule submitted pursuant to Chapter 62-213, F.A.C., shall contain a certification signed by a responsible official that, based on information and belief formed after reasonable inquiry, the statements and information in the document are true, accurate, and complete. Any responsible official who fails to submit any required information or who has submitted incorrect information shall, upon becoming aware of such failure or incorrect submittal, promptly submit such supplementary information or correct information. [Rule 62-213.420(4), F.A.C.]

Section III. Emissions Unit(s) and Specific Conditions

Subsection A. Cement Plant Raw Material Handling

This subsection addresses the following emissions units system.

ARMS Emissions Unit No.	Brief Description of Emissions Unit
029	Cement Plant Raw Material Handling System

The raw material handling operations are controlled by the following baghouses:

Emission Point	Descriptions of Emissions Points
Baghouse I.D. 311.BF650	Dust collector for limestone and mineral aggregate feed bins/conveying
Baghouse I.D. 311.BF750	Dust collector for raw material conveyance from feed bins to raw mill
Baghouse I.D. 311.BF470	Dust collector for raw material conveyance from feed bins to raw mill
Baghouse I.D. 311.BF950	Dust collector for raw material conveyance from feed bins to raw mill

Operational Requirements

1. Hours of Operation: This emissions unit system is allowed to operate 8,760 hours per year. [Permit 0250020-017-AC]
2. Raw Material Handling System Throughput Specification: The maximum dry throughput rate is 3,723,000 TPY. The owner or operator shall record all throughput rates on a rolling 12-month basis, and maintain records for a minimum of 5 years. [Permit 0250020-017-AC; and 62-213.440, F.A.C.]

Emissions Limitations, Test Methods and Performance Standards

3. Visible Emissions Limits: Visible emissions are limited to 5 percent from each of the above listed baghouses. Compliance shall be determined in the manner described in 40 CFR 63.1350(a)(4)(i), (ii), (iii) and (iv) below except that the applicable standard is 5% instead of 10%. Numeration tracks the referenced CFR provision.
 - (4) Procedures to be used to periodically monitor affected sources subject to opacity standards under Sections 63.1346 and 63.1348. Such procedures must include the provisions of Paragraphs (a)(4)(i) through (a)(4)(iv) of this section.
 - (i) The owner or operator must conduct a monthly 1-minute visible emissions test of each affected source in accordance with Method 22 of Appendix A to [40 CFR] Part 60 of this chapter. The test must be conducted while the affected source is in operation.
 - (ii) If no visible emissions are observed in six consecutive monthly tests for any affected source, the owner or operator may decrease the frequency of testing from monthly to semi-annually for that affected source. If visible emissions are observed during any semi-annual test, the owner or operator must resume testing of that affected source on a monthly basis and maintain that schedule until no visible emissions are observed in six consecutive monthly tests.
 - (iii) If no visible emissions are observed during the semi-annual test for any affected source, the owner or operator may decrease the frequency of testing from semi-annually to annually for that affected source. If visible emissions are observed during any annual test, the owner or operator must resume testing of that affected source on a monthly basis and maintain that schedule until no visible emissions are observed in six (6) consecutive monthly tests.
 - (iv) If visible emissions are observed during any Method 22 test, the owner or operator must conduct a 6-minute test of opacity in accordance with Method 9 of Appendix A to part 60 of this Chapter. The Method 9 test must begin within one hour of any observation of visible emissions.

Section III. Emissions Unit(s) and Specific Conditions

Subsection A. Cement Plant Raw Material Handling

{Note: The applicant advised that the baghouses are designed to control particulate emissions to 0.0095 grains/dry standard cubic foot (gr/dscf). The 5% opacity limitation is consistent with this design and provides reasonable assurance that annual emissions of PM/PM₁₀ for all emission points in this emission unit system will be less than 13 TPY. This annual emission estimate is part of the facility-wide netting calculation to escape PSD applicability for PM/PM₁₀. Exceedance of the 5% opacity limit shall be deemed an exceedance of this permit condition and not necessarily an exceedance of the opacity limitations given in 40 CFR 63, Subpart LLL.}

[Permit 0250020-017-AC; 40 CFR 63.1348]

Test Procedures, Recordkeeping and Additional Requirements

4. **Common and General Conditions:** This emissions unit is subject to all applicable requirements of the attached Appendices, made part of the permit.

Section III. Emissions Unit(s) and Specific Conditions
Subsection B. Cement Plant Pyroprocessing and Raw Mill System

This subsection addresses the following emissions unit.

ARMS Emissions Unit No.	Brief Description of Emissions Unit
028	Cement Plant Pyroprocessing and Raw Mill System

The pyroprocessing and raw mill system are controlled by the following baghouses:

Emission Point	Descriptions of Emissions Point
Baghouse I.D: 331.BF200	Main Stack & dust collector for preheater/kiln/cooler/raw mill/coal mill
Baghouse I.D: 331.BF740	Dust collector for kiln dust conveyance and storage bin
Baghouse I.D: 341.BF350	Dust collector for preheater feed silo
Baghouse I.D: 351.BF440	Dust collector for raw meal conveyance from feed silo to preheater
Baghouse I.D: 351.BF470	Dust collector for raw meal conveyance from feed silo to preheater
Baghouse I.D: 331.BF645	Dust collector for truck loadout of kiln dust

Operational Requirements

1. Hours of Operation: This emissions unit system is allowed to operate 8760 hours per year.
[Permit 0250020-017-AC]
2. Pyroprocessing System Production Limits: The maximum production of clinker shall not exceed 250 TPH on a 24-hour block average and 2,190,000 TPY.
[Permit 0250020-017-AC; Rule 62-210.200, (Definitions – Potential to Emit), F.A.C.]
3. Fuels: Allowable fuels fired in the pyroprocessing/raw mill emission unit consist of natural gas, bituminous coal, petroleum coke, No. 2 fuel oil with used oil blend and No. 6 fuel oil with used oil blend. Fuel oil includes on-spec used oil (refer to definition in specific condition 13).
{Note: There is no heat input limitation. For reference, the design heat input capacities of the kiln burner and calciner burner are 290 million Btu per hour (mmBtu/hr) and 385 mmBtu/hr respectively. The clinker production effectively limits PTE.}
[Permit 0250020-017-AC]

Emissions Limitations and Performance Standards

4. Visible Emissions Limits: Visible emissions are limited to 5 percent from each of the above listed baghouses, except for the main stack baghouse, I.D.331.BF200. Compliance shall be determined in the manner described in 40 CFR 63.1350(a)(4)(i), (ii), (iii) and (iv) below except that the applicable standard is 5% instead of 10%. Numeration tracks the referenced CFR provision.
 - (4) Procedures to be used to periodically monitor affected sources subject to opacity standards under Sections 63.1346 and 63.1348. Such procedures must include the provisions of Paragraphs (a)(4)(i) through (a)(4)(iv) of this section.
 - (i) The owner or operator must conduct a monthly 1-minute visible emissions test of each affected source in accordance with Method 22 of Appendix A to [40 CFR] Part 60 of this chapter. The test must be conducted while the affected source is in operation.
 - (ii) If no visible emissions are observed in six consecutive monthly tests for any affected source, the owner or operator may decrease the frequency of testing from monthly to semi-annually for that affected source. If visible emissions are observed during any semi-annual test, the owner or operator must resume testing of that affected source on a monthly basis and maintain that schedule until no visible emissions are observed in six consecutive monthly tests.

Section III. Emissions Unit(s) and Specific Conditions
Subsection B. Cement Plant Pyroprocessing and Raw Mill System

- (iii) If no visible emissions are observed during the semi-annual test for any affected source, the owner or operator may decrease the frequency of testing from semi-annually to annually for that affected source. If visible emissions are observed during any annual test, the owner or operator must resume testing of that affected source on a monthly basis and maintain that schedule until no visible emissions are observed in six (6) consecutive monthly tests.
- (iv) If visible emissions are observed during any Method 22 test, the owner or operator must conduct a 6-minute test of opacity in accordance with Method 9 of Appendix A to part 60 of this Chapter. The Method 9 test must begin within one hour of any observation of visible emissions.

{Note: The applicant advised that the baghouses are designed to control particulate emissions to 0.0095 grains/dry standard cubic foot (gr/dscf). The 5% opacity limitation is consistent with this design and provides reasonable assurance that annual emissions of PM/PM₁₀ for all emission points, except for the main stack, in this emission unit system will be less than 7 TPY. This annual emission estimate is part of the facility-wide netting calculation to escape PSD applicability for PM/PM₁₀. Exceedance of the 5% opacity limit shall be deemed an exceedance of this permit condition and not necessarily an exceedance of the opacity limitations given in 40 CFR 63, Subpart LLL}

5. **Main Stack - Pyroprocessing/Raw Mill Emission Limits:** Emissions exiting the main stack from the Pyroprocessing/Raw Mill system shall not exceed the limits shown in the following table:

PARAMETER	EMISSION LIMIT	AVERAGING TIME	COMPLIANCE METHOD	LIMIT BASIS
Opacity ⁶	10 Percent	6 minute block	COMS, Method 9	PTE, Avoid PSD 40 CFR Subpart LLL
PM ⁶	0.063 lb/ton of dry kiln feed	3 hours ⁵	Annual Method 5	PTE, Avoid PSD 40 CFR Subpart LLL
	26.8 lb/hr			
PM ₁₀ ⁶	0.053 lb/ton of dry kiln feed	3 hours ⁵	Annual Method 5	PTE, Avoid PSD 40 CFR Subpart LLL
	22.5 lb/hr			
SO ₂	0.50 lb/ton of clinker	30 days ²	CEMS Method 6 or 6C	PTE, Avoid PSD
	320 lb/hour	24 hours ¹		
NO _x (as NO ₂)	2.17 lb/ton of clinker	12-months ³	CEMS Method 7 or 7E	PTE, Avoid PSD
	720 lb/hour	24 hours ¹		
CO	2.0 lb/ton of clinker	30 days ²	CEMS/Method 10	BACT
	576 lb/hour ¹	24 hours ¹		
VOC ⁴	0.16 lb/ton of clinker ²	30 days ²	CEMS Method 25 or 25A	PTE, Avoid PSD
	40 lb/hour	24 hours ¹		
Mercury (Hg)	229 lb/yr (base + 199 lb/yr)	12-month	Fuels, Materials ⁸	PTE, Avoid PSD
Temperature ⁷	Baghouse Temperature (T) ≤ T during Dioxin/Furan Tests	Continuous	Established during Method 23	40 CFR 63, Subpart LLL
Dioxin/Furan	0.2 ng TEQ/dscm (T ≥ 204 °C)	3 hours	30 Months, Method 23	40 CFR 63, Subpart LLL
	0.4 ng TEQ/dscm (T < 204 °C)			

¹ Compliance with the short-term emission limit for SO₂, NO_x, CO, and VOC shall be based on a 24-hour block average computed in accordance with Specific Condition 10. Compliance with lb/hr SO₂ emissions limitations in this condition will insure compliance with Miami-Dade County Code, Section 24-17(2)(a) limiting emissions to 1.2 lb SO₂/MMBtu heat input when solid fuel is fired, or 0.8 lb SO₂/MMBtu heat input when liquid fuel is fired, based on a 24 hour average.

Section III. Emissions Unit(s) and Specific Conditions

Subsection B. Cement Plant Pyroprocessing and Raw Mill System

- 2 Compliance with the long-term emission limit for SO₂, CO, and VOC shall be based on a 30 operating-day block average computed in accordance with Specific Condition 10.
- 3 Compliance with the long-term emission limit for NO_x shall be based on 12 month rolling average computed in accordance with Specific Condition 10.
- 4 VOC emissions shall be expressed as propane.
- 5 The averaging times for PM and PM₁₀ correspond to the required length of sampling for the initial and subsequent emission tests (e.g., a minimum of 3 one-hour test runs). Compliance demonstration with these limits shall be conducted pursuant to 40 CFR 63.1349(b)(1).
- 6 Compliance with the Opacity, PM and PM₁₀ permit limits given for in-line kiln/raw mill will insure compliance with applicable limits from 40 CFR 63, Subpart LLL for the in-line kiln/raw mill, and clinker cooler, and 40 CFR 60, Subpart Y for the coal mill.
- 7 The temperature requirements for the operation of in-line kiln/raw mill are in accordance with 40 CFR 63.1344(a) & (b), and 63.1349(b)(3).
- 8 Determined by raw materials and fuels entering the process. Refer to Conditions 6 and 12.

[Permit 0250020-017-AC (PSD-FL-360) including BACT determination for CO; Permit 0250020-019-AC; Rule 62-210.200, (Definitions – Potential to Emit), F.A.C. to avoid PSD applicability for other pollutants; 62-212.400, F.A.C.; 40 CFR 63.1343 and 63.1345]

{Permitting Note: For compliance with the long term CO, NO_x, SO₂, and VOC limits (30-day block and 12-month rolling averages), the averaging periods began January 1, 2006.}

6. Mercury Emissions from the Pyroprocessing/Raw Mill System: Mercury emissions exiting the main stack from the Pyroprocessing/Raw Mill system shall not exceed 229 pounds per year on a 12-month rolling basis. [Permit 0250020-017-AC; Rule 62-210.200, (Definitions – Potential to Emit), F.A.C. to avoid PSD applicability for Hg]

Test Methods and Monitoring Procedures

7. Determination of Clinker Production Rate during Testing: Prior to any emission testing to demonstrate compliance with any emission limit, the permittee shall determine the clinker production rate for the test as described in Specific Condition 15. The permittee shall notify the DERM of the preheater kiln feed rate and the factor used to determine the clinker production rate in advance of the commencement of any test(s). The rate of clinker production shall be used to determine compliance with all clinker-based emission limits in the permit for that test. [DERM Requirement. Rule 62-4.070(3), F.A.C.]
8. Testing Procedures and Methods: In addition to the CEMS or COMS compliance requirements listed in Condition 10, the main stack & dust collector, Baghouse I.D. 331.BF200, serving the preheater/kiln/cooler/raw mill/coal mill shall be tested according to the EPA Methods and at the frequencies listed below:

POLLUTANT	TEST METHOD	FREQUENCY
PM/PM ₁₀	EPA Method 5	Annual
Opacity	EPA Method 9	Annual
SO ₂	EPA Methods 6 or 6C	Annual*
NO _x (as NO ₂)	EPA Methods 7 or 7E	Annual*
CO	EPA Method 10	Annual*
VOC	EPA Methods 25 or 25A	Annual*
Dioxins/Furans	EPA Method 23	30 months

Section III. Emissions Unit(s) and Specific Conditions
Subsection B. Cement Plant Pyroprocessing and Raw Mill System

* The tests conducted annually for the relative accuracy test audit (RATA) for the CEM system may be used to satisfy this requirement provided the owner or operator satisfies the prior notification requirements and emission testing requirements of this permit for performance and compliance tests. The result from the actual referenced method (RM) test during the RATA needs to show compliance with the allowable permit emission limit.

[Permit 0250020-017-AC; Rules 62-297.310(7) and 62-212.400, F.A.C.;]

9. Feed or Fuel Changes and D/F and PM Performance Testing: The owner or operator shall notify the compliance authority prior to initiating any significant change in the feed or fuel used in the most recent compliant performance test for D/F or PM. For purposes of this condition, significant means any of the following: a physical or chemical change in the feed or fuel; the use of a raw material not previously used; a change in the loss on ignition (LOI) characteristic of the fly ash; a change between non-beneficiated fly ash and beneficiated fly ash. Based on the information provided, the compliance authority will, within seven days of notification from the permittee, determine if the proposed change would be reasonably expected to cause a change in D/F emissions such that performance testing pursuant to 40 CFR 63.1349 will be required for the new feed or fuel. If the compliance authority fails to respond within seven days of notification and the permittee believes such change would not reasonably be expected to cause an increase in D/F emissions that might jeopardize compliance with the applicable D/F standard, the change may be implemented immediately without performance testing. A significant change shall not include switching to a feed/fuel mix for which the permittee already tested in compliance with the dioxin/furan and PM emission limits. [Permit 0250020-017-AC]
10. Continuous Emission Monitoring Systems: The owner or operator shall install, calibrate, maintain, and operate continuous emission monitoring systems (CEMS) in the in-line kiln/raw mill stack to measure and record the emissions of NO_x, SO₂, CO, and VOC from the in-line kiln/raw mill, in a manner sufficient to demonstrate compliance with the emission limits of this permit. The CEMS systems shall express the results in units of pounds per ton of clinker produced and pounds per hour. Emissions of VOC shall be reported in units of the standards (lb/hour, lb/ton clinker) and ppmvd as propane corrected to 7% oxygen.
 - a. *Compliance Demonstration*: Compliance with the short-term emission limits for NO_x, SO₂, CO, and VOC shall be based on a 24-hour block average. The 24-hour block shall begin at midnight of each operating day and shall be calculated from 24 consecutive hourly average values. If there are less than 24 hours during the block, the 24-hr block average shall be the average of all valid hourly average values available during the 24 hour block. Compliance with the long-term emission limits for SO₂, CO, and VOC shall be based on a 30 operating-day block average that shall be computed as the arithmetic average of all valid hourly averages occurring within each 30 operating-day block. For purposes of the SO₂, CO, and VOC long-term emission limits, an operating day is any day that the kiln produces clinker or fires fuel. The first 30 operating day block shall begin the first operating day on or after January 1, 2006.
 - b. *Compliance with the long-term NO_x emissions limit*: Compliance with the long-term NO_x emission limit shall be based on a 12 month rolling average that shall be recomputed each month as the arithmetic average of that month and the preceding 11 months. Each monthly average shall be computed by averaging all valid hourly averages occurring within each calendar month. The first 12 month period shall commence on January 1, 2006.
 - c. *Valid Hourly Averages*: Each hourly average shall be computed as the arithmetic average of the data points generated by the CEM system. Data points must be generated at least once per minute. For an hourly average to be considered valid, at least two data points separated by a period of 15 minutes or more must be used to compute the hourly average.
 - Hours during which there is no preheater feed and no fuel fired to the kiln systems are not valid.

Section III. Emissions Unit(s) and Specific Conditions

Subsection B. Cement Plant Pyroprocessing and Raw Mill System

- Hours during which the plant is firing fuel but producing no clinker are valid, but these hours are excluded from the production-normalized emission rate computation (pounds per ton of dry preheater feed or pounds per ton of clinker). These hours are included in any pollutant mass emission rate computation (pounds per hour).
- d. *Data Availability:* During each semiannual (six-month) period, CEM system valid hourly averages shall be obtained for at least 95 percent of the operating hours for which the plant is producing clinker. If the CEM system does not obtain valid hourly averages for 95 percent or more of the operating hours per semiannual period for which the plant is producing clinker, the permittee shall also submit a continuous monitoring system performance report with the excess emissions report. This report must include corrective actions, and it shall be submitted within 30 days following the end of each reporting period.
- e. *Compliance Assurance:* CEM system breakdowns, malfunctions, repairs, calibration checks, zero adjustments, and span adjustments all result in periods during which CEM system data are not obtained. During such periods in excess of five percent of the total operating hours per calendar quarter, the permittee shall assure compliance with the emissions standards of this permit through stack tests, alternative monitoring systems, or other methods as approved by the Department.

[Permit 0250020-017-AC]

11. **Continuous Emissions Monitor System (CEMS) Requirements:** All CEM systems shall be operational, recording and continuously transmitting available data. The monitoring systems shall be certified in accordance with the appropriate Performance Specification in 40 CFR 60 Appendix B. The systems shall comply with the requirements for continuous monitoring systems found in the general provisions of 40 CFR 63, Subpart A including development of a quality control program. Data on monitoring equipment specifications, manufacturer, type calibration and maintenance requirements, and the proposed location of each monitor shall be provided to the DERM for review at least 45 days prior to replacement of any CEMS. [Permit 0250020-017-AC; and 62-204.800, F.A.C.]
12. **Mercury Compliance Demonstration:** The owner or operator shall demonstrate compliance with the mercury throughput limitation by material balance and maintaining records of the monthly and rolling 12-month mercury throughput. The following sampling and analytical procedures shall be used:
 - a. Samples of the raw mill feed and all fuels shall be collected each day. A single composite daily sample shall be made from all samples collected during a day. A monthly composite sample shall be made from each of the daily composite samples.
 - b. Each monthly composite sample shall be analyzed to determine the representative mercury concentration for the month.
 - c. For each composite sample, the monthly mercury throughput rate (pounds per month) shall be the product of the mercury concentration from the monthly composite sample and the corresponding monthly processing rate.
 - d. For each month, the mass of mercury introduced into the pyroprocessing system (pounds per month) shall be the sum of the monthly mercury throughput rates for each raw material and fuel.
 - e. The consecutive 12-month mercury throughput rate shall be the sum of the individual monthly records for the current month and the preceding eleven months (pounds of mercury per consecutive 12-months). Such records, including calculations and data, shall be completed no later than 25 days following the month of the records. The first 12-month rolling period shall begin on August 1, 2006.
 - f. The analytical methods used to determine mercury concentration shall be EPA or ASTM methods such as EPA Method 7471A (Mercury in Solid or Semisolid Waste). No other methods may be used unless prior written approval is received from the Department. If the mercury concentration is below detection limit or below the limits of quantification, the detection limit will be assumed for the concentration of the raw material or fuel, the permittee shall report the detection limit as the corresponding level. [Permit 0250020-019-AC; Compliance with 229 lb Hg/12-month limitation]

Section III. Emissions Unit(s) and Specific Conditions
Subsection B. Cement Plant Pyroprocessing and Raw Mill System

On-Specification Used Fuel Oil

13. Limits and Test Methods Applicable to On-Spec Fuel Oil:

- a. "Non-hazardous on-specification" used oil is defined as each used oil delivery that meets the 40 CFR 279 (Standards for the Management of Used Oil) specifications listed below. Used oil that does not meet all of the following specifications shall not be fired.

CONSTITUENT/PROPERTY	LIMIT	TEST METHOD ⁽²⁾
Arsenic	5 ppm	EPA SW-846 (3040-7130)
Cadmium	2 ppm	EPA SW-846 (3040-7130)
Chromium	10 ppm	EPA SW-846 (3040-7130)
Lead	100 ppm	EPA SW-846 (3040-7130)
Total Halogens	<1000 ppm ⁽¹⁾	ASTM E442
PCBs	<50 ppm	ASTM D4059
Flash Point	100 °F (minimum)	ASTM D93
Sulfur	% by weight (informational)	ASTM D2622, D4294-90, or both D4057-88 & D129-91
Heat of Combustion	Btu/gal (informational)	ASTM D240-76
Density	Lb/gal (informational)	ASTM D1298-80

⁽¹⁾ 40 CFR 279.10(b)(1) (ii) *Rebuttable presumption for used oil*. Used oil containing more than 1,000 ppm total halogens is presumed to be a hazardous waste because it has been mixed with halogenated hazardous waste listed in subpart D of 40 CFR part 261. Persons may rebut this presumption by demonstrating that the used oil does not contain hazardous waste (for example, by using an analytical method from SW-846, Edition III, to show that the used oil does not contain significant concentrations of halogenated hazardous constituents listed in appendix VIII of 40 CFR part 261). EPA Publication SW-846, Third Edition, is available from the Government Printing Office, Superintendent of Documents, P.O. Box 371954, Pittsburgh, PA 15250-7954, (202) 512-1800 (document number 955-001-00000-1"). If successfully rebutted for used oil up to 4000 ppm total halogens, used oil up to 4000 ppm maximum total halogens may be fired.

⁽²⁾ Other test methods may be used only after receiving written approval from the DERM.

- b. *Analysis of Used Oil Fuel*. The permittee may determine that the used oil to be burned for energy recovery meets the fuel specifications of §279.11 by performing analyses, or obtaining copies of analyses or other information, documenting that the used oil fuel meets the specifications.
- c. *Record Retention*. The permittee must keep copies of analyses of the used oil (or other information used to make the determination) for five years.
- d. *Fuel Analysis for On-specification Used Oil Requirements*. Fuel analysis shall be in accordance with 40 CFR 266.43(b)(1) & (6). A sample shall be taken from the outlet of the blend tank on the first working day (i.e., Monday-Friday; exceptions: holidays) of each month, if any used oil was placed in the blend tank the previous month; or, the sample can be taken directly from the used oil mobile collection tank after final collection and prior to the time of initial transfer; but, that sampling frequency shall be no less than quarterly and the sampling methodology shall have been established with the DERM, Miami-Dade County prior to sampling. Upon taking a sample, the sample shall be

Section III. Emissions Unit(s) and Specific Conditions
Subsection B. Cement Plant Pyroprocessing and Raw Mill System

analyzed for the following constituent/property and associated unit and using the following test methods (or their latest version):

- e. *Submittal of Samples.* The results of each sample analysis (on the laboratory's letterhead) shall be submitted to the DERM within 30-days after the sample is taken and analyzed.
- f. *Sample Results.* The results of each sample analysis (on the laboratory's letterhead) shall be submitted to the DERM within 30 days after a sample is taken and analyzed.

[Permit 0250020-017-AC; 40 CFR 279.11 (which is adopted by reference in Rule 62-710.210(2), F.A.C.), 40 CFR 279.72; 40 CFR 63.1343 and 63.1345]

14. Used Oil Usage Records: In order to document compliance with the used oil limitations, the following requirements shall be adhered to as a minimum:
- a. *Transfers to Storage Tank.* The dates and quantities of both on-specification used oil and purchased fuel oil transferred to the in-line kiln/raw mill's storage tank shall be reported quarterly (i.e., Jan.-Mar., April-June, July-Sept., and Oct.-Dec.) to the DERM and due during the month following the end of the quarter.
 - b. *Recordkeeping.* When burning used oil, records shall be maintained in accordance with applicable provisions of 40 CFR 279, Subpart B and Subpart G (July 1, 1996 version), Standards for the Management of Used Oil and Chapter 62-710, F.A.C.
 - c. *Delivery Receipts.* The following shall be recorded on the delivery receipt:
 - the use of tamper proof seals on the delivery receipt
 - the volume of fuel delivery
 - a cross reference to the analysis which establishes that the used oil meets EPA used oil fuel specifications
 - the results of the screening analysis
 - the name of the person performing the test
 - the specific test kit used
 - the amount of oil sampled
 - the amount and name of the solution used to dilute the oil
 - d. *Delivery Procedures.* The following procedures shall be implemented:
 - On and off specification used oil that is delivered without a delivery receipt containing all the above information, or which is not properly sealed, or for which the delivery receipt does not contain all the necessary information, is not to be accepted and the DERM is to be notified by phone immediately (with written confirmation to follow), if such a delivery is attempted.
 - Verification by signature on the delivery receipt shall be provided by plant personnel that the delivery truck arrived on site with all seals intact. As delivered samples of all used oil fuel received shall be accumulated through each quarter for each supplier.

[Permit 0250020-017-AC; DERM Requirements]

Section III. Emissions Unit(s) and Specific Conditions
Subsection B. Cement Plant Pyroprocessing and Raw Mill System

Process and Production Recording

15. Production Rate Recording: The owner or operator shall record the preheater kiln feed rate using the F.L. Smidth automated preheater feed weighing device and record the daily clinker production. The clinker production rate for the purposes of determining compliance with Specific Condition 2, shall be determined as the product of Preheater Kiln Feed and the Loss on Ignition (LOI) factor. LOI for the preheater kiln feed is based on a 30 operating-day block average of daily measurements. For purposes of this requirement, an operating day is any day that the kiln produces clinker or fires fuel. The calculation shall be expanded as needed to consider the additional feed points and LOI. [Permit 0250020-017-AC]
16. Excess Emissions Reports: In case of excess emissions resulting from malfunctions, the owner or operator shall notify the DERM in accordance with Rule 62-4.130, F.A.C. A full written report on the malfunctions shall be submitted in a quarterly report.
[Rules 62-210.700(6) and 62-4.070(3), F.A.C.]

Test Procedures, Recordkeeping and Additional Requirements

17. Common and General Conditions: This emissions unit is subject to all applicable requirements of the attached Appendices, made part of the permit.

Section III. Emissions Unit(s) and Specific Conditions
Subsection C. Cement Plant Clinker Handling & Storage

This subsection addresses the following emissions units system.

ARMS Emissions Unit No.	Brief Description of Emissions Unit
027	Cement Plant Clinker Handling & Storage System

The clinker handling operations are controlled by the following baghouses:

Emissions Point	Descriptions of Emissions Points
Baghouse I. D: 441.BF540	Conveyance/transfer from cooler to new clinker silos and off-spec silo
Baghouse I. D: 481.BF140	Conveyance/transfer/storage for new clinker silos and off-spec silo
Baghouse I. D: 481.BF330	Storage from off-spec silo and conveyance from new clinker silos
Baghouse I. D: 481.BF540	Conveyance from new clinker silos and off-spec silo to old clinker storage
Baghouse I. D: 481.BF640	Conveyance from new clinker and off-spec silos to old clinker storage area
Baghouse I. D: 481.BF730	Conveyance/transfer to old clinker area and storage clinker silos 2, 5, 18
Baghouse I. D: 481.BF930	Storage clinker silos 21, 22, 26, 27
Baghouse I.D: F-633	Storage clinker silos 12, 19, 20, 23, 28
Baghouse K-447	Storage clinker silo 17

Operational Requirements

1. Hours of Operation: This emissions unit is allowed to operate 8760 hours per year. Production is automatically limited by the clinker production limits established in Subsection B., Specific Condition 2 for the pyroprocessing system. [Permits 0250020-017-AC and 0250020-019-AC]

Emissions Limitations, Test Methods and Performance Standards

2. Visible Emissions Limits: Visible emissions are limited to 5 percent from each of the above listed baghouses. Compliance shall be determined in the manner described in 40 CFR 63.1350(a)(4)(i), (ii), (iii) and (iv) below except that the applicable standard is 5% instead of 10%. Numeration tracks the referenced CFR provision.
 - (4) Procedures to be used to periodically monitor affected sources subject to opacity standards under Sections 63.1346 and 63.1348. Such procedures must include the provisions of Paragraphs (a)(4)(i) through (a)(4)(iv) of this section.
 - (i) The owner or operator must conduct a monthly 1-minute visible emissions test of each affected source in accordance with Method 22 of Appendix A to [40 CFR] Part 60 of this chapter. The test must be conducted while the affected source is in operation.
 - (ii) If no visible emissions are observed in six consecutive monthly tests for any affected source, the owner or operator may decrease the frequency of testing from monthly to semi-annually for that affected source. If visible emissions are observed during any semi-annual test, the owner or operator must resume testing of that affected source on a monthly basis and maintain that schedule until no visible emissions are observed in six consecutive monthly tests.
 - (iii) If no visible emissions are observed during the semi-annual test for any affected source, the owner or operator may decrease the frequency of testing from semi-annually to annually for that affected source. If visible emissions are observed during any annual test, the owner or operator must resume testing of that affected source on a monthly basis and maintain that schedule until no visible emissions are observed in six (6) consecutive monthly tests.

Section III. Emissions Unit(s) and Specific Conditions
Subsection C. Cement Plant Clinker Handling & Storage

- (iv) If visible emissions are observed during any Method 22 test, the owner or operator must conduct a 6-minute test of opacity in accordance with Method 9 of Appendix A to part 60 of this Chapter. The Method 9 test must begin within one hour of any observation of visible emissions.

{Note: The applicant advised that the baghouses are designed to control particulate emissions to 0.0095 grains/dry standard cubic foot (gr/dscf) and 0.01 gr/acf (Baghouse F-633). The 5% opacity limitation is consistent with this design and provides reasonable assurance that annual emissions of PM/PM₁₀ for all emission points in this emission unit system will be less than 19.70 TPY. This annual emission estimate is part of the facility-wide netting calculation to escape PSD applicability for PM/PM₁₀. Exceedance of the 5% opacity limit shall be deemed an exceedance of this permit condition and not necessarily an exceedance of the opacity limitations given in 40 CFR 63, Subpart LLL}

[Permits 0250020-017-AC; and 40 CFR 63.1348]

Test Procedures, Recordkeeping and Additional Requirements

3. Common and General Conditions: This emissions unit is subject to all applicable requirements of the attached Appendices, made part of the permit.

Section III. Emissions Unit(s) and Specific Conditions

Subsection D. Cement Plant Finish Mills 1 - 6

This subsection addresses the following emissions units.

ARMS Emissions Unit No.	Brief Descriptions of Emissions Units
010	Cement Plant Finish Mill No. 1
011	Cement Plant Finish Mill No. 2
012	Cement Plant Finish Mill No. 3
013	Cement Plant Finish Mill No. 4
030	Cement Plant Finish Mill No. 6

The finish mill handling operations are controlled by the following baghouses:

Emissions Point	Descriptions of Emissions Points
Baghouse I.D. F-113	Dust collector – Finish Mill No. 1 – Feeder
Baghouse I.D. F-130	Dust collector – Finish Mill No. 1 – Mill Sweep
Baghouse I.D. F-213	Dust collector – Finish Mill No. 2 – Feeder
Baghouse I.D. F-230	Dust collector – Finish Mill No. 2 – Mill Sweep
Baghouse I.D. F-313	Dust collector – Finish Mill No. 3 – Feeder
Baghouse I.D. F-332	Dust collector – Finish Mill No. 3 – Mill Sweep
Baghouse I.D. 533.BF340	Dust collector – Finish Mill No. 3 – O-Sepa Cement Separator
Baghouse I.D. F-432	Dust collector – Finish Mill No. 4 – Belt conveyor/Separator
Baghouse I.D. F-430	Dust collector – Finish Mill No. 4 – Ball Mill/Mill Sweep
Baghouse I.D. F-730	Dust collector – Finish Mill No. 4 – O-Sepa Cement Separator
Baghouse I.D. 536.BF340	Dust collector – Finish Mill No. 6 – O-Sepa Cement Separator
Baghouse I.D. 536.BF500	Dust collector – Finish Mill No. 6 – Sweep
Baghouse I.D. 516.BF510	Dust collector – Finish Mill No. 6 – Feeder

Operational Requirements

1. Hours of Operation: These emissions unit system is allowed to operate 8,760 hours per year. Finish Mill No. 2 (EU 011) shall not operate unless one of the other Finish Mills is not in operation. [Permits 0250020-017-AC and 0250020-019-AC]
2. Finish Mill Process Rates: The maximum total hourly process rate of cement is 359 TPH on a 24-hour block average. The individual process rates are 25 TPH (Finish Mill 1); 25 TPH (Finish Mill 2); 84 TPH (Finish Mill 3); 140 TPH (Finish Mill 4); and 110 TPH (Finish Mill 6). The owner or operator shall record all hourly process rates, and maintain records for a minimum of 5 years. [Permits 0250020-017-AC and 0250020-019-AC]

Emissions Limitations, Test Methods and Performance Standards

3. Visible Emissions Limits: Visible emissions are limited to 5 percent from each of the above listed baghouses. For baghouses F-113, F-213, F-313, and 516.BF510, compliance shall be determined in the manner described in 40 CFR 63, Section 63.1350(a)(4)(i), (ii), (iii) and (iv) below except that the applicable standard is 5% instead of 10%. Numeration tracks the referenced CFR provision.

Section III. Emissions Unit(s) and Specific Conditions

Subsection D. Cement Plant Finish Mills 1 - 6

- (4) Procedures to be used to periodically monitor affected sources subject to opacity standards under Sections 63.1346 and 63.1348. Such procedures must include the provisions of Paragraphs (a)(4)(i) through (a)(4)(iv) of this section.
- (i) The owner or operator must conduct a monthly 1-minute visible emissions test of each affected source in accordance with Method 22 of Appendix A to [40 CFR] Part 60 of this chapter. The test must be conducted while the affected source is in operation.
 - (ii) If no visible emissions are observed in six consecutive monthly tests for any affected source, the owner or operator may decrease the frequency of testing from monthly to semi-annually for that affected source. If visible emissions are observed during any semi-annual test, the owner or operator must resume testing of that affected source on a monthly basis and maintain that schedule until no visible emissions are observed in six consecutive monthly tests.
 - (iii) If no visible emissions are observed during the semi-annual test for any affected source, the owner or operator may decrease the frequency of testing from semi-annually to annually for that affected source. If visible emissions are observed during any annual test, the owner or operator must resume testing of that affected source on a monthly basis and maintain that schedule until no visible emissions are observed in six (6) consecutive monthly tests.
 - (iv) If visible emissions are observed during any Method 22 test, the owner or operator must conduct a 6-minute test of opacity in accordance with Method 9 of Appendix A to part 60 of this Chapter. The Method 9 test must begin within one hour of any observation of visible emissions.

{Note: The applicant advised that the baghouses are designed to control particulate emissions to 0.0095 grains/dry standard cubic foot (gr/dscf) and 0.01 gr/acf (F-113; F-130; F-213; F-230; F-313; F-330; F-430; and F-432). The 5% opacity limitation is consistent with this design and provides reasonable assurance that annual emissions of PM/PM₁₀ for all emission points in this emission unit system will be less than 136.15 TPY. This annual emission estimate is part of the facility-wide netting calculation to escape PSD applicability for PM/PM₁₀. Exceedance of the 5% opacity limit shall be deemed an exceedance of this permit condition and not necessarily an exceedance of the opacity limitations given in 40 CFR 63, Subpart LLL}

[Permits 0250020-017-AC and 0250020-019-AC; 40 CFR 63.1348]

Monitoring Requirements

4. **Finish Mill Monitoring:** For baghouses F-130, F-230, F-332, 533.BF340, F-432, F-430, F-730, 536.BF340 and 536.BF500, the owner or operator of a finish mill shall monitor opacity by conducting daily visual emissions observations of the mill sweep and air separator PMCDs (PM control devices) of these affected sources, in accordance with the procedures of Method 22 of Appendix A, 40 CFR Part 60 and as required by 40 CFR 63.1350(e), Subpart LLL.

Pursuant to 40 CFR 63.1350(e):

The owner or operator of a raw mill or finish mill shall monitor opacity by conducting daily visual emissions observations of the mill sweep and air separator PMCDs of these affected sources, in accordance with the procedures of Method 22 of Appendix A to Part 60 of this chapter. The Method 22 test shall be conducted while the affected source is operating at the representative performance conditions. The duration of the Method 22 test shall be six minutes. If visible emissions are observed during any Method 22 visible emissions test, the owner or operator must:

- (1) Initiate, within one-hour, the corrective actions specified in the site specific operating and maintenance plan developed in accordance with paragraphs (a)(1) and (a)(2) of this section; and

Section III. Emissions Unit(s) and Specific Conditions

Subsection D. Cement Plant Finish Mills 1 - 6

- (2) Within 24 hours of the end of the Method 22 test in which visible emissions were observed, conduct a follow up Method 22 test of each stack from which visible emissions were observed during the previous Method 22 test. If visible emissions are observed during the follow up Method 22 test from any stack from which visible emissions were observed during the previous Method 22 test, conduct a visual opacity test of each stack from which emissions were observed during the follow up Method 22 test in accordance with Method 9 of Appendix A to Part 60 of this chapter. The duration of the Method 9 test shall be 30 minutes.

[Permits 0250020-017-AC and 0250020-019-AC; 40 CFR 63.1350, Monitoring Requirements]

Test Procedures, Recordkeeping and Additional Requirements

5. Common and General Conditions: This emissions unit is subject to all applicable requirements of the attached Appendices, made part of the permit.

Section III. Emissions Unit(s) and Specific Conditions
Subsection E. Cement Plant Storage & Packhouse/Loadout System

This subsection addresses the following emissions units system.

ARMS Emissions Unit No.	Brief Descriptions of Emissions Units
014	Cement Plant Storage Silos 1 through 12
015	Cement Plant Distribution Rail Truck Load
016	Cement Plant Packhouse

The cement handling operations are controlled by the following baghouses:

Emissions Point No.	Description of Emissions Points
Baghouse I.D. F-511	Dust collector - Cement Silos 1-6
Baghouse I.D. F-512	Dust collector - Cement Silos 7-9
Baghouse I.D. F-513	Dust collector - Cement Silo 10
Baghouse I.D. F-514	Dust collector - Cement Silo 11
Baghouse I.D. F-515	Dust collector - Cement Silo 12
Baghouse I.D. B-110	Dust collector - Bulk Loadout Unit 1 (Rail/Truck).
Baghouse I.D. B-210	Dust collector - Bulk Loadout Unit 2 (Truck).
Baghouse I.D. VL002	Dust collector - Bulk Loadout Unit 2 - Line 2 (Truck Loadout Operation)
Baghouse I.D. B-372	Dust collector - Bulk Loadout Unit 3 - Line 1
Baghouse I.D. B-374	Dust collector - Bulk Loadout Unit 3 - Line 2
Baghouse I.D. B-382	Dust collector - Bulk Loadout Unit 3 - Line 3
Baghouse I.D. VL003	Dust collector - Bulk Loadout Unit 3 - Line 3 (Truck Loadout Operation)
Baghouse I.D. B-120	Dust collector - Packhouse
Baghouse I.D. B-200	Dust collector - Packhouse
Baghouse I.D. B-400	Dust collector - Packhouse

Operational Requirements

1. Hours of Operation: These emissions units are allowed to operate 8,760 hours per year. [Permits 0250020-017-AC and 0250020-019-AC]
2. Cement Storage Silo/Packhouse/Loadout Process and Production Design Specifications: The maximum process input rate to each cement silo and loadout operation is 500 TPH on a 24-hour block average. The maximum production rate of cement in the Packhouse is 170 TPH on a 24-hour block average. [Permit 0250020-017-AC and 0250020-019-AC]

Emissions Limitations, Test Methods and Performance Standards

3. Visible Emissions Limits: Visible emissions are limited to 5 percent from each of the above listed baghouses. Compliance shall be determined in the manner described in 40 CFR 63, Section 63.1350(a)(4)(i), (ii), (iii) and (iv) below except that the applicable standard is 5% instead of 10%. Numeration tracks the referenced CFR provision.
 - (4) Procedures to be used to periodically monitor affected sources subject to opacity standards under Sections 63.1346 and 63.1348. Such procedures must include the provisions of Paragraphs (a)(4)(i) through (a)(4)(iv) of this section.

Section III. Emissions Unit(s) and Specific Conditions

Subsection E. Cement Plant Storage and Packhouse/Loadout System

- (i) The owner or operator must conduct a monthly 1-minute visible emissions test of each affected source in accordance with Method 22 of Appendix A to [40 CFR] Part 60 of this chapter. The test must be conducted while the affected source is in operation.
- (ii) If no visible emissions are observed in six consecutive monthly tests for any affected source, the owner or operator may decrease the frequency of testing from monthly to semi-annually for that affected source. If visible emissions are observed during any semi-annual test, the owner or operator must resume testing of that affected source on a monthly basis and maintain that schedule until no visible emissions are observed in six consecutive monthly tests.
- (iii) If no visible emissions are observed during the semi-annual test for any affected source, the owner or operator may decrease the frequency of testing from semi-annually to annually for that affected source. If visible emissions are observed during any annual test, the owner or operator must resume testing of that affected source on a monthly basis and maintain that schedule until no visible emissions are observed in six (6) consecutive monthly tests.
- (iv) If visible emissions are observed during any Method 22 test, the owner or operator must conduct a 6-minute test of opacity in accordance with Method 9 of Appendix A to part 60 of this Chapter. The Method 9 test must begin within one hour of any observation of visible emissions.

{Note: The applicant advised that the baghouses are designed to control particulate emissions to 0.01 grains/actual cubic foot (gr/acf) except for baghouses VL002 and VL003 which are designed to 0.03 gr/acf. The 5% opacity limitation is consistent with this design and provides reasonable assurance that annual emissions of PM/PM₁₀ for all emission points in this emission unit system will be less than 36.30 TPY. This annual emission estimate is part of the facility-wide netting calculation to escape PSD applicability for PM/PM₁₀. Exceedance of the 5% opacity limit shall be deemed an exceedance of this permit condition and not necessarily an exceedance of the opacity limitations given in 40 CFR 63, Subpart LLL}

[Permits 0250020-017-AC; 40 CFR 63.1348]

Test Procedures, Recordkeeping and Additional Requirements

4. Common and General Conditions: This emissions unit is subject to all applicable requirements of the attached Appendices, made part of the permit.

Section III. Emissions Unit(s) and Specific Conditions
Subsection F. Cement Plant Coal & Petroleum Coke Handling System

This subsection addresses the following emissions units system.

ARMS Emissions Unit No.	Brief Description of Emissions Unit
026	Cement Plant: Coal and Petroleum Coke Handling System

The provisions of 40 CFR 60 Subpart Y, Standards of Performance for Coal Preparation Plants and 40 CFR 60, Subpart A- General Provisions are applicable to this process emissions unit system (Appendix A and Appendix Y attached).

The coal handling operations are controlled by the following baghouses:

Emission Point	Description of Emissions Points
Baghouse I.D. 461-BF500	Coal Mill*
Baghouse I.D. 461-BF130	Coal Feed Bin
Baghouse I.D. 461-BF230	Petroleum Coke Feed Bin
Baghouse I.D. 461-BF750	Coke/Petroleum Coke (Transfer) Surge Bin Feeder
Baghouse I.D. 461-BF650	Coal (Transfer) / Surge Bin (Feeder)
Baghouse I.D. 461-BF350	Coal Mill Feed

* This emissions unit discharges to the common (main) stack. The Clinker Cooler which is limited to 10% opacity, discharges to the common (main) stack and therefore determines the opacity limit for this emissions unit. Total PM/PM₁₀ emissions from Pyroprocessing/Raw Mill/Coal Mill Systems shall not exceed 117 and 99 TPY respectively. [Permits 0250020-017-AC and 0250020-019-AC]

All of the above process emissions units are subject to 40 CFR 60, Subpart Y, NSPS for Coal Preparation Plants, except units solely engaged in processing, handling or storage of petroleum coke.

Operational Requirements

1. Hours of Operation: This emissions unit system is allowed to operate 8,760 hours per year. [Permit 0250020-017-AC]
2. Coal/Petroleum Coke Maximum Usage: The maximum combined usage of coal and petroleum coke is 30 TPH on a 24-hour block average and 263,000 TPY. The maximum petroleum coke usage rate shall not exceed 20 TPH on a 24-hour block average. Daily records of usage must be kept on site and retained for a minimum of 5 years. [Permit 0250020-017-AC]

Emissions Limitations, Test Methods and Performance Standards

3. Visible Emissions Limits: Visible emissions are limited to 5 percent from each of the above listed baghouses, except for the coal mill main baghouse 461-BF500. Compliance shall be demonstrated by EPA Reference Method 9 and the procedures specified in 40 CFR 60.11.

For the coal mill main, baghouse 461-BF500, the opacity shall not exceed 10%. Compliance shall be demonstrated pursuant to EPA Reference Method 9. Annual emissions of PM₁₀ for the kiln/cooler/coal mill main stack shall not exceed 99 TPY.

{Note: The applicant advised that the baghouses are designed to control particulate emissions to 0.0095 grains/dry standard cubic foot (gr/dscf) and to 0.01 grains/actual cubic foot (gr/acf) (for baghouses 461-BF300; 461.BF350). The 5% opacity limitation is consistent with this design and provides reasonable assurance that annual emissions of PM/PM₁₀ for all emission points in this emission unit system will be less than 3.10 TPY. This annual emission estimate is part of the facility-wide netting calculation to escape PSD applicability for PM/PM₁₀. Exceedance of the 5% opacity

Section III. Emissions Unit(s) and Specific Conditions

Subsection F. Cement Plant Coal & Petroleum Coke Handling System

limit shall be deemed an exceedance of this permit condition and not necessarily an exceedance of the opacity limitations given in 40 CFR 60, Subpart Y}

[Permits 0250020-017-AC and 0250020-019-AC; 40 CFR 60, Subpart Y; Rules 62-297.620(4); 40 CFR 63.1348]

4. Particulate and Fugitive Emissions: Particulate and fugitive emissions from coal handling facilities shall be minimized by following the procedures listed below:
 - a. All conveyers and transfer points shall be enclosed or covered to preclude particulate emissions (except those directly associated with coal stacking/reclaiming).
 - b. Coal storage piles shall be shaped, compacted and oriented to minimize wind erosion.
 - c. Water sprays or chemical wetting agents and stabilizers shall be applied to storage piles, handling equipment, etc., during dry periods as necessary to all facilities to maintain an opacity of less than 20 percent at the property line for fugitive emission sources.

[Permits 0250020-017-AC; Rule 62-296.320(4)(c), F.A.C.]

Test Procedures, Recordkeeping and Additional Requirements

5. Common and General Conditions: This emissions unit is subject to all applicable requirements of the attached Appendices, made part of the permit.

Section III. Emissions Unit(s) and Specific Conditions

Subsection G. Facility Fugitive Emissions

This subsection addresses the following emissions units

ARMS Emissions Unit No.	Brief Description of Emissions Unit and/or Activities
031	Facility-wide particulate matter fugitive emissions from miscellaneous activities, such as truck operations throughout the facility, wind erosion, etc. Fugitive Emissions – Transportation, Miscellaneous Transfers, and Storage

Unregulated Emissions Units and/or Activities: An emissions unit which emits no “emissions-limited pollutant” and which is subject to no unit-specific work practice standard, though it may be subject to regulations applied on a facility-wide basis (e.g., unconfined emissions, odor, general opacity) or to regulations that require only that it be able to prove exemption from unit-specific emissions or work practice standards.

Vehicular traffic and coal, petcoke, and raw material transfer points generate fugitive PM emissions from the handling, transfer, and storage between the unloading areas and the storage building. The activities are listed in the following table:

Activity	Description	Estimated Emissions (PM and PM ₁₀)*
Coal Handling	Drop Operations	0.17 and 0.059 TPY
Coal Handling	Vehicular Traffic	6.9 and 2.4 TPY
Raw Material Blending	Drop Operations	1.6 and 0.6 TPY
Raw Material Blending	Vehicular Traffic	14 and 4.9 TPY
Total Quantifiable Emissions	Fugitive Emissions	23 and 8 TPY

* The estimates given were included in calculations by the applicant demonstrating that the modernization and production increase projects related to the cement plant do not trigger PSD. It is not practicable to actually measure the emissions directly. Reasonable assurance that these emissions are controlled to the levels given above is by adherence to the Reasonable Precautions listed below.

[Permits 0250020-017-AC]

- Reasonable Precautions for Emissions of Unconfined Particulate Matter: This facility is subject to applicable requirements of Rule 62-296.320(4)(c)1, 2, 3, & 4, F.A.C. Refer to Appendix CG: Common and General Conditions.
- Additional Reasonable Precautions for Emissions of Unconfined Particulate Matter: Pursuant to Rule 62-296.320(4)(c)2, F.A.C, the permittee shall implement the following additional reasonable precautions at this facility:

Personnel

- Aggregate and material handling personnel, their supervisors, and environmental personnel, shall be trained in visible emissions, permit conditions related to fugitive emissions, and the Best Management Practices developed by Titan to implement the Fugitive Dust Improvement Plan under Construction Permit 0250020-017-AC.
- Personnel shall be trained on proper operation of wet-dry sweeper and water trucks. Training shall include but not be limited to speed, nozzle operation, and cleaning patterns around the plants that comprise the facility.

Section III. Emissions Unit(s) and Specific Conditions

Subsection G. Facility Fugitive Emissions

Roads

The permittee shall:

- c. Continue to identify areas where the installation of speed bumps would be beneficial in reducing vehicular speed and fugitive emissions.
- d. Continue cleaning and maintaining paved road surfaces, which includes removing silt build-up, repairing all potholes, sweeping on a daily basis and utilizing a water truck to control visible emissions.
- e. Continue to maintain dedicated berm areas that have been established throughout the facility to further reduce wind erosion from ground areas.
- f. Operate the sprinkler system, as needed, to reduce dust along the aggregate road between the pits and the raw materials storage building and other areas of the facility.
- g. Maintain and continuously improve the main entrance by establishing green areas between the security gate and the main facilities.

Materials

- h. To the extent feasible, raw materials and fuels for the cement facility will be stored inside the raw material building. Outside material storage will be maintained to control fugitive emission from all raw material and fuels. All material within the raw material building will be moved by stacker/reclaimer and covered conveyor belts.
- i. All conveyors are to be enclosed on at least three sides.
- j. The facility shall continue to maintain the clinker production area and continue to implement a cleaning process inside buildings to minimize dust emitted to the outside environment.
- k. Unloading and reclaiming of materials will be curtailed during windy or dry conditions.
- l. Raw materials will be managed to minimize their time in storage.

Trucks

- m. All trucks leaving the aggregate facility will be required to dewater and drive through the tire wash system.
- n. Titan America/Tarmac will work with all transport companies to further educate drivers in the Florida Department of Transportation requirements that all loads be tarped prior to leaving the facility.
- o. All trucks traveling within the cement facility should stay on asphalt or concrete surfaces. All road surfaces outside of the aggregate facility shall be constructed of concrete and/or asphalt.

[Rule 62-296.320(4)(c)2.,F.A.C., Rule 62-4. 070(3)F.A.C., Application received April 18, 2005 and, Fugitive Dust Improvement Plan dated August 19, 2005]

3. Fugitive Dust Improvement Plan - Appendix CP-1: The owner or operator shall complete the Fugitive Dust Improvement Plan described within the Compliance Plan under Appendix CP-1 that is part of this permit. The permittee shall submit quarterly progress reports to include a status report on the action implemented. The first quarterly report was submitted in January 2006. The updates shall be submitted every 3 months thereafter for a two-year period. The progress reports shall be submitted to the Compliance Authority (Miami-Dade County DERM).
4. Unconfined Emissions of Particulate Matter: Refer to Section II, Specific Condition No. 7.

Section III. Emissions Unit(s) and Specific Conditions

Subsection H. Aggregate Plant

This subsection addresses the following emissions units.

ARMS Emissions Unit No.	Brief Descriptions of Emissions Units
022	Nonmetallic Mineral Processing Plant Equipment and Operations at the Aggregate Plant Subject to 40 CFR 60, Subpart OOO
023	Nonmetallic Mineral Processing Plant Equipment and Operations at the Aggregate Plant NOT Subject to 40 CFR 60, Subpart OOO

This Subsection covers raw materials processing (limestone & overburden) from the quarry up to the raw materials storage. The quarry and its associated processing plant have been in operation since 1960 and consist of nonmetallic mineral processing operations such as crushing, screening, conveying, storage, and rail and truck loadout operations. The above emissions unit (EU 022) also includes an aggregate plant, that is adjacent to the portland cement manufacturing plant.

At least two construction permits directly related to these two units have been issued. They are permit AC13-234568, issued by the Florida Department of Environmental Protection on November 18, 1993 and Permit 0250020-012-AC, issued by the DERM on January 25, 2002.

{Permitting Note: Table 1, Emissions Unit Identification & Summary of Air Pollutant Standards for the Nonmetallic Mineral Processing Plant (E.U. ID Nos. 022 and 023), contains a list of equipment units and their corresponding air pollutant standards, it also summarizes maximum visible emissions standards. An affected facility in fixed or portable nonmetallic mineral processing plant is each crusher, grinding mill, screening operation, bucket elevator, belt conveyor, bagging operation, storage bin, enclosed truck or railroad loading station. The information contained in the table is for convenience purposes only and does not supersede any of the terms or conditions of this permit}

Regulations and Requirements

1. Emissions unit (E.U. 022) shall comply with all applicable requirements contained in the attached Appendix OOO: 40 CFR 60, Subpart OOO, Standards of Performance for Nonmetallic Mineral Processing Plants; and the attached Appendix A: 40 CFR 60, Subpart A – NSPS, General Provisions. The term "Administrator" when used in 40 CFR 60 shall mean the Secretary or the Secretary's designee.

Essential Potential to Emit (PTE) Parameters

2. Permitted Capacity:

- a. The processed raw material throughput is limited to 1,213,333 tons per month and 14,560,000 tons in any consecutive 12-month period. See Table 1 of this subsection for the capacity of each component of the nonmetallic mineral processing plant equipment.

- b. For testing purposes, the maximum throughput is 2,000 tons per hour.

[Permit 0250020-012-AC; Rule 297.310(2)(b), F.A.C.; Rule 62-210.200, F.A.C. (Definitions, Potential to Emit), and Rule 62-4.070(3), F.A.C., Reasonable Assurance for Specific Condition 4 and to net out of PSD]

3. Hours of Operation: The referenced emissions unit(s) may operate continuously (8760 hours per year). [Permit 0250020-012-AC]

Emissions Limitations and Standards

4. Particulate Matter Limitations: The maximum allowable particulate matter emissions are 35.4 TPY of PM and 14 TPY of PM₁₀. [Permit 0250020-012-AC]

Section III. Emissions Unit(s) and Specific Conditions

Subsection H. Aggregate Plant

5. Visible Emissions:

- a. No person shall cause, let, permit, suffer or allow to be discharged into the atmosphere the emissions of air pollutants from any activity, which exhibit opacity greater than 20 percent. [Rule 62-296.320(4)(b), F.A.C.]
- b. No owner or operator shall cause to be discharged into the atmosphere from any crusher subject to NSPS Subpart OOO, at which a capture system is not used, fugitive emissions which exhibit opacity greater than 15 percent. [40 CFR 60.672(c)]
- c. No visible emissions from wet screening operations and subsequent screening operations, bucket elevators, and belt conveyors that process saturated material in the production line up to the next crusher, grinding mill or storage bin. (For those operations/equipment subject to NSPS Subpart OOO.) [40 CFR 60.672(h)(1)]

Test Methods and Procedures

6. Visible Emissions Test Required: During the calendar year prior to expiration of this permit, the owner or operator shall determine compliance with all visible emissions limits on all nonmetallic mineral processing equipment, excluding storage piles. The owner or operator shall use EPA Method 9 and the procedures in 40 CFR 60.11, with the following additions:

- a. The minimum distance between the observer and the emissions unit shall be 4.57 meters (15 feet).
- b. The observer shall, when possible, select a position that minimizes interference from other fugitive emissions units (e.g., road dust). The required observer position relative to the sun (EPA Method 9, Section 2.1) must be followed.
- c. For affected emissions units using wet dust suppression for particulate matter control, a visible mist is sometimes generated by the spray. The water mist must not be confused with particulate matter emissions and is not to be considered a visible emission. When a water mist of this nature is present, the observation of emissions is to be made at a point in the plume where the mist is no longer visible.

[Rules 62-204.800 and 62-4.070(3), F.A.C; and, 40 CFR 60.675(c)(1), (2) & (3)]

7. Change of processing material (Saturated vs. Unsaturated): Any screening operation, bucket elevator, or belt conveyor that process saturated material and is subject to 40 CFR 672(h) and subsequently processes unsaturated material, shall submit a report of this change to the Department within 30 days following change. This screening operation, bucket elevator, or belt conveyor is then subject to the 10 percent opacity limit in 40 CFR 672(b) and the emissions test requirement of 40 CFR 60.11 and 40 CFR 60, Subpart OOO. Likewise a screening operation, bucket elevator, or belt conveyor that processes unsaturated material but subsequently processes saturated material shall submit a report of this change to the Department within 30 days following such change. This screening operation, bucket elevator, or belt conveyor is then subject to the no visible emissions limit in 40 CFR 60.672(h). [40 CFR 60.676(g)]

8. Annual Operating Report Supplemental Information: Annual-operating reports for the emissions units covered under this permit subsection shall include the following supplemental information that was recorded in the previous calendar year:

- The amount of material processed on a monthly basis; and
- A consecutive 12-month total of the amount of material processed, calculated from the monthly totals for the previous twelve calendar months.

[Rule 62-4.070(3), F.A.C.]

Section III. Emissions Unit(s) and Specific Conditions

Subsection H. Aggregate Plant

Reporting for Replacement of Facilities at Nonmetallic Mineral Processing Plants

9. **Replacement Exemption:** When an existing facility is replaced by a piece of equipment of equal or smaller size, as defined in 40 CFR 60.671, having the same function as the existing facility, the new facility is exempt from provisions of 40 CFR 60.672 (standards for particulate matter), 40 CFR 60.674 (Monitoring of operations), and 40 CFR 60.675 (Test methods and procedures). Reconstruction costs shall be calculated per 40 CFR 60.673. [40 CFR 60.670(d)(1)]
10. **Replacement Not Exempted:** Replacing all existing facilities in a production line with new facilities does not qualify for the exemption described above. [40 CFR 60.670(d)(3)]
11. **Exemption Requirements:** When seeking exemption, the permittee shall submit the following information to the DERM, Air Facilities Section, postmarked 60 days or as soon as practicable before the change is commenced and shall include the expected completion date of the change(s), as well as the following information:

The required information shall be submitted for both the existing facility that was replaced, and the replacement equipment.

When Replacing....	Required Information	Rule Reference
a crusher, grinding mill, bucket elevator, bagging operation, or enclosed truck or railcar loading station	Rated capacity in tons per hour; Model and Serial Numbers	40 CFR 60.676(a)(1)
a screening operation	The total surface area of the top screen; Model and Serial Numbers	40 CFR 60.676(a)(2)
a conveyer belt	The width of the belt	40 CFR 60.676(a)(3)
a storage bin	The rated capacity in tons	40 CFR 60.676(a)(4)

[40 CFR 60.7 and 40 CFR 60.676(a)]

12. **Replacement Prohibition:** The permittee shall not replace any facility covered under this permit subsection with a piece of equipment of larger size or different function without applying for, and receiving, a modification of this permit to allow such replacement, unless this requirement is specifically waived in writing by the DERM, Air Facilities Section. [40 CFR 60.670]
13. **Unconfined Emissions of Particulate Matter:** Refer to Section II. Specific Condition 7. [Rule 62-296.320 (4)(c) (2), F.A.C.; 40 CFR 60.670; Permit No. AC13-234568]
14. **Facility Common and General Conditions:** This emissions unit is subject to all applicable requirements of the attached Appendices, made part of the permit.
15. **Aggregate Plant Reasonable Precautions.** The following shall constitute additional reasonable precautions to control Unconfined Emissions of Particulate Matter for this plant:
 - a. Paved parking and trafficked areas shall be maintained and kept free of particulate matter build-up.
 - b. Sprinkling with water shall be used as necessary on paved areas and stockpiles.[Rule 62-296.320 (4)(c) (2), F.A.C.; 40 CFR 60.670; Permit No 0250020-012-AC issued 1/25/02, Permit No. AC13-234568 issued 11/18/93]

Section III. Emissions Unit(s) and Specific Conditions

Subsection I. Concrete Block Plant

This subsection addresses the following emissions unit.

ARMS Emissions Unit No.	Brief Description of Emissions Unit
024	Concrete Block Plant

Operational Requirements

1. Permitted Capacity: The maximum hourly production for the concrete block plant shall not exceed 5,500 blocks per hour, approximately 96 tons per hour of concrete block. [Permit No. 0250020-014-AC]
2. Hours of Operation: The Concrete Block Plant shall not exceed 6,240 hours of operation per year. The permittee shall keep a daily log of the number of hours of operation. [Permit 0250020-014-AC]
3. Plant Design: The concrete block plant consists of three Aggregate Storage Silos with Weigh Hoppers, and two Cement Storage Silos. Each Cement Storage Silo has two Baghouses, a Mixer, and a Weigh Hopper with Baghouse. A total of five baghouses are associated with the Concrete Block Plant. The baghouses have the following design specifications:

Source I.D.	Visible Emissions*	Manufacturer	Model No.	Number of Cartridges	Flow Rate (acfm)	Cloth Area (ft²)	Air-to-Cloth Ratio
Cement Silo #1	5% Initial/Annual	C & W Mfg.	CP-310 [2 units]	4	1600	304	5.3
Cement Silo #2	5% Initial/Annual	C & W Mfg.	CP-310 [2 units]	4	1600	304	5.3
Weigh Hopper #1	5% Initial/Annual	C & W Mfg.	CP-100 [1 unit]	1	400	110	4.0
Weigh Hopper #2	5% Initial/Annual	C & W Mfg.	CP-100 [1 unit]	1	400	110	4.0

*Emissions from enclosed storage and conveying equipment shall not exceed 5 %.

[Permit 0250020-014-AC; Rule 62-296.414(1) F.A.C.]

Emissions Limits, Test Methods and Reasonable Precautions

4. Visible Emissions (VE) Limit: Visible emissions limits for the baghouses shall not exceed 5% as stated above.
5. Test Procedures: All emissions tests performed on the Concrete Block Plant shall comply with the following requirements:
 - a. The test Method for visible emissions shall be EPA Method 9.
 - b. Test procedures shall meet all applicable requirements of Chapter 62-297, F.A.C.
 - c. Visible emissions tests of silo dust collector exhaust points shall be conducted while loading the silo at a rate that is representative of the normal silo loading rate. The minimum loading rate shall be 25 tons per hour unless such rate is unachievable in practice. If emissions from the weigh hopper (batcher) operation are also controlled by the silo dust collector, then the batching operation shall be in operation during the visible emissions test. The batching rate during the emissions test shall be representative of the normal batching rate and duration. Each test report shall state the actual silo loading rate during emissions testing and, if applicable, whether or not batching occurred during emissions testing.

Section III. Emissions Unit(s) and Specific Conditions

Subsection I. Concrete Block Plant

- d. If emissions from the weigh hopper (batcher) operation are controlled by a dust collector which is separate from the silo dust collector, visible emissions tests of the weigh hopper (batcher) dust collector exhaust point shall be conducted while batching at a rate that is representative of the normal batching rate and duration. Each test report shall state the actual batching rate during emissions testing.
- e. Each dust collector exhaust point shall be tested for a minimum of 30 minutes or, if the operation is normally completed within less than 30 minutes and does not recur within that time, the test shall last for the length of the loading operation.

[Rules 62-296.414(3)F.A.C., and 62-297.310(4)(a), F.A.C.; Permit No. 0250020-014-AC]

6. Annual Testing: Each dust collector exhaust point shall be tested annually for compliance with the visible emissions limiting standard of Rule 62-296.414 (1) F.A.C.
[Rule 62-296.414(1), F.A.C., Permit No. 0250020-014-AC]
7. Unconfined Emissions of Particulate Matter: Refer to Section II, Specific Condition N. 7.
[Rule 62-296.414(2), F.A.C., Rule 62-296.320(4)(c), F.A.C., Permit No. 0250020-014-AC]
8. Concrete Block Plant Reasonable Precautions. The permittee shall take reasonable precautions to control unconfined emissions from hoppers, storage and conveying equipment, conveyor drop points, truck loading and unloading, roads, parking areas, stock piles, and yards as required by Rule 62-296.320 (4) F.A.C. The following shall constitute additional reasonable precautions to control Unconfined Emissions of Particulate Matter for this plant:
 - a. Reduction of stock pile height or installation of wind breaks to mitigate wind entrainment of particulate matter from stock piles.
 - b. Use of spray bar, chute, or partial enclosure to mitigate emissions at the drop point to the truck.

[Rule 62-296.414(2), F.A.C.; Permit No. 0250020-014-AC issued 9/20/02]

Test Procedures, Recordkeeping and Additional Requirements

9. Common and General Conditions: This emissions unit is subject to all applicable requirements of the attached Appendices, made part of the permit.

Section III. Emissions Unit(s) and Specific Conditions

Subsection J. Concrete Batch Ready Mix Plant

This subsection addresses the following emissions unit.

ARMS Emissions Unit No.	Brief Description of Emissions Unit
025	Two Concrete Batch Ready Mix Plants

Operational Requirements

1. **Compliance Plan:** The applicant may operate both concrete batch ready mix plants subject to the additional terms in the attached Compliance Plan in Appendix CP-1.
2. **Permitted Capacity:** The maximum hourly production rate of each plant shall not exceed 243.75 tons per hour, approximately 130 cubic yard/hr. [Permit AC13-158138, Applicant' Request November 14, 2006]
3. **Hours of Operation:** These plants emissions units may operate continuously, i.e., 8,760 hours per year. [Requested by applicant November 14, 2000]
4. **Plants Design:** The Ready Mix Plants have a total of six storage silos, one of which is a split silo. Emissions are controlled by dust collectors. The two weigh hoppers' emissions are controlled by separate dust collectors. The baghouses have the following design specifications:

Source I.D.	Visible Emissions*	Manufacturer	Model No.	Flow Rate (acfm)	Cloth Area (ft ²)	Air-to-Cloth Ratio
Cement/Flyash Silo No. 1	5% Initial/Annual	C&W Mfg.	CP-310	1,600	267	6.0
Cement/Flyash Silo No. 2	5% Initial/Annual	C&W Mfg.	CP-310	1,600	304	5.3
Cement/Flyash Silo No. 3	5% Initial/Annual	C&W Mfg.	CP-310(2)	1,600	267	6.0
Cement/Flyash Silo No. 4	5% Initial/Annual	C&W Mfg.	CP-340	1,800	267	6.7
Cement Silo No. 5 – Left	5% Initial/Annual	C&W Mfg.	CP-310	1,600	267	6.0
Cement Silo No. 5 – Right	5% Initial/Annual	C&W Mfg.	CP-310	1,600	267	6.0
Cement/Fly ash Silo No. 6	5% Initial/Annual	C&W Mfg.	CP-310(2)	1,600	267	6.0
Weigh/Loadout No. 1	5% Initial/Annual	C&W Mfg.	KR-1100	6,500	912	7.1
Weigh/Loadout No. 2	5% Initial/Annual	Vince Hagen	VH-1083-JP	6,500	1083	6.0

* Rule 62-296.414 (1) F.A.C.

Emissions Limits, Test Methods and Reasonable Precautions

5. **Visible Emissions (VE) Limit and Test Method:** Visible emissions limits for the baghouses shall not exceed 5% as stated above. EPA Method 9 shall be used to test for compliance with the VE emissions limits. Annual test shall meet the requirements of Chapter 62- 297. F.A.C. [Rule 62-4.070 (3)F.A.C]

Section III. Emissions Unit(s) and Specific Conditions

Subsection J. Concrete Batch Ready Mix Plant

6. Unconfined Emissions of Particulate Matter: Refer to Section II, Specific Condition N. 7. [Rule 62-296.414(2), F.A.C., Rule 62-296.320(4)(c), F.A.C., Permit No. AC13-158138]
7. Ready Mix Plants Reasonable Precautions: The following shall constitute additional reasonable precautions to control Unconfined Emissions of Particulate Matter for these plants:
 - a. Paved parking and trafficked areas shall be maintained and kept free of particulate matter build-up.
 - b. Sprinkling with water shall be used as necessary on paved areas and stockpiles.
 - c. Return concrete material shall be confined to the area around the industrial wastewater system.[Rule 62-296.414(2), F.A.C.; Permit No. AC13-158138 issued 5/18/1989]

Test Procedures, Recordkeeping and Additional Requirements

8. Common and General Conditions: This emissions unit is subject to all applicable requirements of the attached Appendices, made part of the permit.

**Section IV. Common and General Conditions
Facility-Wide Requirements**

General Requirements

This Section addresses the following emissions unit(s), emissions unit systems, and the regulations to which they are subject which are contained in the Appendices listed in the Placard Page and attached as part of the permit.

ARMS Emissions Unit No.	Brief Description of Emissions Units
010	Cement Plant Finish Mill System: Finish Mill No. 1
011	Cement Plant Finish Mill System: Finish Mill No. 2
012	Cement Plant Finish Mill System: Finish Mill No. 3
013	Cement Plant Finish Mill System: Finish Mill No. 4
030	Cement Plant Finish Mill System: Finish Mill No. 6
014	Cement Handling System: Cement Storage Silos. 1 through 12
015	Cement Handling System: Cement Distribution, Rail and Truck Loadout
016	Cement Handling System: Cement Packhouse
022	Nonmetallic Mineral Processing Plant Equipment and Operations at the Aggregate Plant Subject to 40 CFR 60, Subpart 000
023	Nonmetallic Mineral Processing Plant Equipment and Operations at the Aggregate Plant NOT Subject to 40 CFR 60, Subpart 000
024	Concrete Block Plant
025	Two Concrete Ready Mix Plants
026	Cement Plant Coal Handling System
027	Cement Plant Clinker Handling and Storage System
028	Cement Plant Pyroprocessing/Raw Mill System
029	Cement Plant Raw Material Handling System
031	Facility Fugitive Emissions: Unregulated Emissions Units and/or Activities

1. All of the listed emission units (except emissions units 022, 023, 024, 025 and 031) have at least one component that is subject to 40 CFR 63, Subpart LLL - National Emission Standards for Hazardous Air Pollutants from the Portland Cement Manufacturing Industry. The listed emission units shall comply with Subpart LLL only to the extent that the regulations apply to the facility or its operations.
2. Some of the listed cement plant emission units have at least one component that was subject to 40 CFR 60, Subpart F - Standards of Performance for Portland Cement Plants (NSPS) when originally constructed. The listed emission units shall comply with Subpart F only to the extent that the applicable Subpart F requirements were not subsumed by 40 CFR 63, Subpart LLL. Specifically, 40 CFR 63.1356 exempts units from compliance with NSPS Subpart F if they are complying with NESHAP Subpart LLL.
3. The listed emission units shall comply with 40 CFR 60 Subpart A, General Provisions and 40 CFR 63, Subpart A, General Provisions only to the extent that the requirements apply to the facility or its operations.

Section IV. Common and General Conditions
Facility-Wide Requirements

4. Emissions Unit 026 is subject to 40 CFR 60 Subpart Y, Standards of Performance for Coal Preparation Plants as applicable.
5. Emissions Unit 022 is subject to 40 CFR 60, Subpart OOO - Standards of Performance for Nonmetallic Mineral Processing Plants.
6. Source Obligation: If a previously permitted facility or modification becomes a facility or modification which would be subject to the preconstruction review requirements of this rule if it were a proposed new facility or modification solely by virtue of a relaxation in any federally enforceable limitation on the capacity of the facility or modification to emit a pollutant (such as a restriction on hours of operation), which limitation was established after August 7, 1980, then at the time of such relaxation the preconstruction review requirements of this rule shall apply to the facility or modification as though construction had not yet commenced on it.

[Rule 62-212.400 (12) (b) F.A.C.]

{This facility modification avoided preconstruction review pursuant to Paragraph 62-212.400, F.A.C., except for CO, by taking federally enforceable limitations on the capacity to emit certain criteria pollutants from each of the emission units listed above. Refer to PSD-FL-360/ 0250020-017-AC and 0250020-019-AC .}

The Department adopted the provisions of the referenced NSPS and NESHAPS regulations from 40 CFR 60 and 40 CFR 63, respectively by reference into Rule 62-204.800, F.A.C. The provisions of these regulations are included in this permit as attached Appendices.

{Permitting Note: The numbering of the original rules has been preserved for ease of reference to the rules. The term "Administrator" when used in 40 CFR 60 shall mean the Secretary or the Secretary's designee.}

APPENDIX A
40 CFR 60, Subpart A - General Provisions

40 CFR 60.1 Applicability.

(a) Except as provided in 40 CFR 60 subparts B and C, the provisions of this part apply to the owner or operator of any stationary source which contains an affected facility, the construction or modification of which is commenced after the date of publication in this part of any standard (or, if earlier, the date of publication of any proposed standard) applicable to that facility.

(b) Any new or revised standard of performance promulgated pursuant to section 111(b) of the Act shall apply to the owner or operator of any stationary source which contains an affected facility, the construction or modification of which is commenced after the date of publication in this part of such new or revised standard (or, if earlier, the date of publication of any proposed standard) applicable to that facility.

(c) In addition to complying with the provisions of this part, the owner or operator of an affected facility may be required to obtain an operating permit issued to stationary sources by an authorized State air pollution control agency or by the Administrator of the U.S. Environmental Protection Agency (EPA) pursuant to Title V of the Clean Air Act (CAA) as amended November 15, 1990 (42 U.S.C. 7661). [Rule 62-204.800, F.A.C.; and, 40 CFR 60.1(a), (b) and (c)]

40 CFR 60.2 Definitions.

(a) *Administrator* means the Administrator of the Environmental Protection Agency or the Secretary or the Secretary's designee.
[Rule 62-204.800(7)(a), F.A.C.; and, 40 CFR 60.2]

40 CFR 60.7 Notification and record keeping.

(a) The owner or operator subject to the provisions of this part shall furnish the Administrator written notification as follows:

- (1) A notification of the date construction (or reconstruction as defined under 40 CFR 60.15) of an affected facility is commenced postmarked no later than 30 days after such date. This requirement shall not apply in the case of mass-produced facilities which are purchased in completed form.
- (2) A notification of the anticipated date of initial startup of an affected facility postmarked not more than 60 days nor less than 30 days prior to such date.
- (3) A notification of the actual date of initial startup of an affected facility postmarked within 15 days after such date.
- (4) A notification of any physical or operational change to an existing facility which may increase the emission rate of any air pollutant to which a standard applies, unless that change is specifically exempted under an applicable subpart or in 40 CFR 60.14(e). This notice shall be postmarked 60 days or as soon as practicable before the change is commenced and shall include information describing the precise nature of the change, present and proposed emission control systems, productive capacity of the facility before and after the change, and the expected completion date of the change. The Administrator may request additional relevant information subsequent to this notice.
- (5) A notification of the date upon which demonstration of the continuous monitoring system performance commences in accordance with 40 CFR 60.13(c). Notification shall be postmarked not less than 30 days prior to such date.
- (6) A notification of the anticipated date for conducting the opacity observations required by 40 CFR 60.11(e)(1) of this part. The notification shall also include, if appropriate, a request for the Administrator to provide a visible emissions reader during a performance test. The notification shall be postmarked not less than 30 days prior to such date.

APPENDIX A
40 CFR 60, Subpart A - General Provisions

(7) A notification that continuous opacity monitoring system data results will be used to determine compliance with the applicable opacity standard during a performance test required by 40 CFR 60.8 in lieu of Method 9 observation data as allowed by 40 CFR 60.11(e)(5) of 40 CFR 60. This notification shall be postmarked not less than 30 days prior to the date of the performance test.

(b) The owner or operator subject to the provisions of this part shall maintain records of the occurrence and duration of any startup, shutdown, or malfunction in the operation of an affected facility; any malfunction of the air pollution control equipment; or any periods during which a continuous monitoring system or monitoring device is inoperative.

(c) The owner or operator required to install a continuous monitoring system (CMS) or monitoring device shall submit an excess emissions and monitoring systems performance report (excess emissions are defined in applicable subparts) and/or a summary report form (see 40 CFR 60.7(d) to the Administrator semiannually, except when: more frequent reporting is specifically required by an applicable subpart; or the CMS data are to be used directly for compliance determination, in which case quarterly reports shall be submitted; or the Administrator, on a case-by-case basis, determines that more frequent reporting is necessary to accurately assess the compliance status of the source. All reports shall be postmarked by the 30th day following the end of each calendar half (or quarter, as appropriate).

Written reports of excess emissions shall include the following information:

- (1) The magnitude of excess emissions computed in accordance with 40 CFR 60.13(h), any conversion factor(s) used, and the date and time of commencement and completion of each time period of excess emissions. The process operating time during the reporting period.
- (2) Specific identification of each period of excess emissions that occurs during startups, shutdowns, and malfunctions of the affected facility. The nature and cause of any malfunction (if known), the corrective action taken or preventative measures adopted.
- (3) The date and time identifying each period during which the continuous monitoring system was inoperative except for zero and span checks and the nature of the system repairs or adjustments.
- (4) When no excess emissions have occurred or the continuous monitoring system(s) have not been inoperative, repaired, or adjusted, such information shall be stated in the report.

(d) The summary report form shall contain the information and be in the format shown in Figure 1 unless otherwise specified by the Administrator. One summary report form shall be submitted for each pollutant monitored at each affected facility.

- (1) If the total duration of excess emissions for the reporting period is less than 1 percent of the total operating time for the reporting period and CMS downtime for the reporting period is less than 5 percent of the total operating time for the reporting period, only the summary report form shall be submitted and the excess emission report described in 40 CFR 60.7(c) need not be submitted unless requested by the Administrator.
- (2) If the total duration of excess emissions for the reporting period is 1 percent or greater of the total operating time for the reporting period or the total CMS downtime for the reporting period is 5 percent or greater of the total operating time for the reporting period, the summary report form and the excess emission report described in 40 CFR 60.7(c) shall both be submitted.

[See Attached Figure 1-Summary Report-Gaseous and Opacity Excess Emission and Monitoring System Performance]

(e) The owner or operator subject to the provisions of this part shall maintain a file of all measurements, including continuous monitoring system, monitoring device, and performance testing measurements; all

APPENDIX A
40 CFR 60, Subpart A - General Provisions

continuous monitoring system performance evaluations; all continuous monitoring system or monitoring device calibration

checks; adjustments and maintenance performed on these systems or devices; and all other information required by this part recorded in a permanent form suitable for inspection. The file shall be retained for at least two years following the date of such measurements, maintenance, reports, and records.

(f) If notification substantially similar to that in 40 CFR 60.7(a) is required by any other State or local agency, sending the Administrator a copy of that notification will satisfy the requirements of 40 CFR 60.7(a).

(g) Individual subparts of this part may include specific provisions which clarify or make inapplicable the provisions set forth in this section.

[Rule 62-204.800, F.A.C.; and, 40 CFR 60.7(a), (b), (c), (d), (e), (f) and (g)]

40 CFR 60.8 Performance tests.

(a) Within 60 days after achieving the maximum production rate at which the affected facility will be operated, but not later than 180 days after initial startup of such facility and at such other times as may be required by the Administrator under section 114 of the Act, the owner or operator of such facility shall conduct performance test(s) and furnish the Administrator a written report of the results of such performance test(s).

(b) Performance tests shall be conducted and data reduced in accordance with the test methods and procedures contained in each applicable subpart unless the Administrator (1) specifies or approves, in specific cases, the use of a reference method with minor changes in methodology, (2) approves the use of an equivalent method, (3) approves the use of an alternative method the results of which he has determined to be adequate for indicating whether a specific source is in compliance, (4) waives the requirement for performance tests because the owner or operator of a source has demonstrated by other means to the Administrator's satisfaction that the affected facility is in compliance with the standard, or (5) approves shorter sampling times and smaller sample volumes when necessitated by process variables or other factors. Nothing in 40 CFR 60.8 shall be construed to abrogate the Administrator's authority to require testing under section 114 of the Act.

(c) Performance tests shall be conducted under such conditions as the Administrator shall specify to the plant operator based on representative performance of the affected facility. The owner or operator shall make available to the Administrator such records as may be necessary to determine the conditions of the performance tests. Operations during periods of startup, shutdown, and malfunction shall not constitute representative conditions for the purpose of a performance test nor shall emissions in excess of the level of the applicable emission limit during periods of startup, shutdown, and malfunction be considered a violation of the applicable emission limit unless otherwise specified in the applicable standard.

(d) The owner or operator of an affected facility shall provide the Administrator at least 30 days prior notice of any performance test, except as specified under other subparts, to afford the Administrator the opportunity to have an observer present. If after 30 days notice for an initially scheduled performance test, there is a delay (due to operational problems, etc) in conducting the scheduled performance test, the owner or operator of an affected facility shall notify the administrator (or delegated State or local agency) as soon as possible of any delay in the original test date, either by providing at least 7 days prior notice of the rescheduled date of the performance test, or by arranging a rescheduled date with the Administrator (or delegated State or local agency) by mutual agreement.

APPENDIX A
40 CFR 60, Subpart A - General Provisions

(e) The owner or operator of an affected facility shall provide, or cause to be provided, performance testing facilities as follows:

- (1) Sampling ports adequate for test methods applicable to such facility. This includes (i) constructing the air pollution control system such that volumetric flow rates and pollutant emission rates can be accurately determined by applicable test methods and procedures and (ii) providing a stack or duct free of cyclonic flow during performance tests, as demonstrated by applicable test methods and procedures.
- (2) Safe sampling platform(s).
- (3) Safe access to sampling platform(s).
- (4) Utilities for sampling and testing equipment.

(f) Unless otherwise specified in the applicable subpart, each performance test shall consist of three separate runs using the applicable test method. Each run shall be conducted for the time and under the conditions specified in the applicable standard. For the purpose of determining compliance with an applicable standard, the arithmetic means of results of the three runs shall apply. In the event that a sample is accidentally lost or conditions occur in which one of the three runs must be discontinued because of forced shutdown, failure of an irreplaceable portion of the sample train, extreme meteorological conditions, or other circumstances, beyond the owner or operator's control, compliance may, upon the Administrator's approval, be determined using the arithmetic mean of the results of the two other runs.

[Rule 62-204.800, F.A.C.; and, 40 CFR 60.8]

40 CFR 60.10 State authority.

The provisions of 40 CFR 60 shall not be construed in any manner to preclude any State or political subdivision thereof from:

- (a) Adopting and enforcing any emission standard or limitation applicable to an affected facility, provided that such emission standard or limitation is not less stringent than the standard applicable to such facility.
- (b) Requiring the owner or operator of an affected facility to obtain permits, licenses, or approvals prior to initiating construction, modification, or operation of such facility.

[Rule 62-204.800, F.A.C.; and, 40 CFR 60.10(a) and (b)].

40 CFR 60.11 Compliance with standards and maintenance requirements.

(a) Compliance with standards in this part, other than opacity standards, shall be determined only by performance tests established by 40 CFR 60.8, unless otherwise specified in the applicable standard.

(b) Compliance with opacity standards in this part shall be determined by conducting observations in accordance with Reference Method 9 in appendix A of this part, any alternative method that is approved by the Administrator, or as provided in 40 CFR 60.11(e)(5). For purposes of determining initial compliance, the minimum total time of observations shall be 3 hours (30 6-minute averages) for the performance test or other set of observations (meaning those fugitive-type emission sources subject only to an opacity standard).

(c) The opacity standards set forth in this part shall apply at all times except during periods of startup, shutdown, malfunction, and as otherwise provided in the applicable standard.

APPENDIX A
40 CFR 60, Subpart A - General Provisions

(d) At all times, including periods of startup, shutdown, and malfunction, owners and operators shall, to the extent practicable, maintain and operate any affected facility including associated air pollution control equipment in a manner consistent with good air pollution control practice for minimizing emissions. Determination of whether acceptable operating and maintenance procedures are being used will be based on information available to the Administrator which may include, but is not limited to, monitoring results, opacity observations, review of operating and maintenance procedures, and inspection of the source.

(e)(1) For the purpose of demonstrating initial compliance, opacity observations shall be conducted concurrently with the initial performance test required in 40 CFR 60.8 unless one of the following conditions apply. If no performance test under 40 CFR 60.8 is required, then opacity observations shall be conducted within 60 days after achieving the maximum production rate at which the affected facility will be operated but no later than 180 days after initial startup of the facility. If visibility or other conditions prevent the opacity observations from being conducted concurrently with the initial performance test required under 40 CFR 60.8, the source owner or operator shall reschedule the opacity observations as soon after the initial performance test as possible, but not later than 30 days thereafter, and shall advise the Administrator of the rescheduled date. In these cases, the 30-day prior notification to the Administrator required in 40 CFR 60.7(a)(6) shall be waived. The rescheduled opacity observations shall be conducted (to the extent possible) under the same operating conditions that existed during the initial performance test conducted under 40 CFR 60.8. The visible emissions observer shall determine whether visibility or other conditions prevent the opacity observations from being made concurrently with the initial performance test in accordance with procedures contained in Reference Method 9 of appendix B of this part. Opacity readings of portions of plumes which contain condensed, uncombined water vapor shall not be used for purposes of determining compliance with opacity standards. The owner or operator of an affected facility shall make available, upon request by the Administrator, such records as may be necessary to determine the conditions under which the visual observations were made and shall provide evidence indicating proof of current visible observer emission certification. Except as provided in 40 CFR 60.11(e)(5), the results of continuous monitoring by transmissometer which indicate that the opacity at the time visual observations were made was not in excess of the standard are probative but not conclusive evidence of the actual opacity of an emission, provided that the source shall meet the burden of proving that the instrument used meets (at the time of the alleged violation) Performance Specification 1 in appendix B of 40 CFR 60, has been properly maintained and (at the time of the alleged violation) that the resulting data have not been altered in any way.

(2) Except as provided in 40 CFR 60.11(e)(3), the owner or operator of an affected facility to which an opacity standard in this part applies shall conduct opacity observations in accordance with 40 CFR 60.11(b), shall record the opacity of emissions, and shall report to the Administrator the opacity results along with the results of the initial performance test required under 40 CFR 60.8. The inability of an owner or operator to secure a visible emissions observer shall not be considered a reason for not conducting the opacity observations concurrent with the initial performance test.

(3) The owner or operator of an affected facility to which an opacity standard in this part applies may request the Administrator to determine and to record the opacity of emissions from the affected facility during the initial performance test and at such times as may be required. The owner or operator of the affected facility shall report the opacity results. Any request to the Administrator to determine and to record the opacity of emissions from an affected facility shall be included in the notification required in 40 CFR 60.7(a)(6). If, for some reason, the Administrator cannot determine and record the opacity of emissions from the affected facility during the performance test, then the provisions of 40 CFR 60.7(e)(1) shall apply.

APPENDIX A
40 CFR 60, Subpart A - General Provisions

(4) The owner or operator of an affected facility using a continuous opacity monitor (transmissometer) shall record the monitoring data produced during the initial performance test required by 40 CFR 60.8 and shall furnish the Administrator a written report of the monitoring results along with Method 9 and 40 CFR 60.8 performance test results.

(5) The owner or operator of an affected facility subject to an opacity standard may submit, for compliance purposes, continuous opacity monitoring system (COMS) data results produced during any performance test required under 40 CFR 60.8 in lieu of Method 9 observation data. If an owner or operator elects to submit COMS data for compliance with the opacity standard, he shall notify the Administrator of that decision, in writing, at least 30 days before any performance test required under 40 CFR 60.8 is conducted. Once the owner or operator of an affected facility has notified the Administrator to that effect, the COMS data results will be used to determine opacity compliance during subsequent tests required under 40 CFR 60.8 until the owner or operator notifies the Administrator, in writing, to the contrary. For the purpose of determining compliance with the opacity standard during a performance test required under 40 CFR 60.8 using COMS data, the minimum total time of COMS data collection shall be averages of all 6-minute continuous periods within the duration of the mass emission performance test. Results of the COMS opacity determinations shall be submitted along with the results of the performance test required under 60.8. The owner or operator of an affected facility using a COMS for compliance purposes is responsible for demonstrating that the COMS meets the requirements specified in 40 CFR 60.13(c), that the COMS has been properly maintained and operated, and that the resulting data have not been altered in any way. If COMS data results are submitted for compliance with the opacity standard for a period of time during which Method 9 data indicates noncompliance, the Method 9 data will be used to determine opacity compliance.

(6) Upon receipt from an owner or operator of the written reports of the results of the performance tests required by 40 CFR 60.8, the opacity observation results and observer certification required by 40 CFR 60.11(e)(1), and the COMS results, if applicable, the Administrator will make a finding concerning compliance with opacity and other applicable standards. If COMS data results are used to comply with an opacity standard, only those results are required to be submitted along with the performance test results required by 40 CFR 60.8. If the Administrator finds that an affected facility is in compliance with all applicable standards for which performance tests are conducted in accordance with 40 CFR 60.8 of this part but during the time such performance tests are being conducted fails to meet any applicable opacity standard, the shall notify the owner or operator and advise him that he may petition the Administrator within 10 days of receipt of notification to make appropriate adjustment to the opacity standard for the affected facility.

(7) The Administrator will grant such a petition upon a demonstration by the owner or operator that the affected facility and associated air pollution control equipment was operated and maintained in a manner to minimize the opacity of emissions during the performance tests; that the performance tests were performed under the conditions established by the Administrator; and that the affected facility and associated air pollution control equipment were incapable of being adjusted or operated to meet the applicable opacity standard.

(8) The Administrator will establish an opacity standard for the affected facility meeting the above requirements at a level at which the source will be able, as indicated by the performance and opacity tests, to meet the opacity standard at all times during which the source is meeting the mass or concentration emission standard. The Administrator will promulgate the new opacity standard in the Federal Register.

(f) Special provisions set forth under an applicable subpart of 40 CFR 60 shall supersede any conflicting provisions of 40 CFR 60.11.

APPENDIX A
40 CFR 60, Subpart A - General Provisions

(g) For the purpose of submitting compliance certifications or establishing whether or not a person has violated or is in violation of any standard in this part, nothing in this part shall preclude the use, including the exclusive use, of any credible evidence or information, relevant to whether a source would have been in compliance with applicable requirements if the appropriate performance or compliance test or procedure had been performed.

[Rule 62-204.800, F.A.C.; and, 40 CFR 60.11(a), (b), (c), (d), (e), (f) and (g)]

40 CFR 60.12 Circumvention.

No owner or operator subject to the provisions of this part shall build, erect, install, or use any article, machine, equipment or process, the use of which conceals an emission which would otherwise constitute a violation of an applicable standard. Such concealment includes, but is not limited to, the use of gaseous diluents to achieve compliance with an opacity standard or with a standard which is based on the concentration of a pollutant in the gases discharged to the atmosphere.

[Rule 62-204.800, F.A.C.; and, 40 CFR 60.12]

40 CFR 60.13 Monitoring requirements.

(a) For the purposes of this section, all continuous monitoring systems required under applicable subparts shall be subject to the provisions of this section upon promulgation of performance specifications for continuous monitoring systems under appendix B of 40 CFR 60 and, if the continuous monitoring system is used to demonstrate compliance with emission limits on a continuous basis, appendix F to 40 CFR 60, unless otherwise specified in an applicable subpart or by the Administrator. Appendix F is applicable December 4, 1987.

(b) All continuous monitoring systems and monitoring devices shall be installed and operational prior to conducting performance tests under 40 CFR 60.8. Verification of operational status shall, as a minimum, include completion of the manufacturer's written requirements or recommendations for installation, operation, and calibration of the device.

(c) If the owner or operator of an affected facility elects to submit continuous opacity monitoring system (COMS) data for compliance with the opacity standard as provided under 40 CFR 60.11(e)(5), he/she shall conduct a performance evaluation of the COMS as specified in Performance Specification 1, appendix B, of 40 CFR 60 before the performance test required under 40 CFR 60.8 is conducted. Otherwise, the owner or operator of an affected facility shall conduct a performance evaluation of the COMS or continuous emission monitoring system (CEMS) during any performance test required under 40 CFR 60.8 or within 30 days thereafter in accordance with the applicable performance specification in appendix B of 40 CFR 60. The owner or operator of an affected facility shall conduct COMS or CEMS performance evaluations at such other times as may be required by the Administrator under section 114 of the Act.

(1) The owner or operator of an affected facility using a COMS to determine opacity compliance during any performance test required under 40 CFR 60.8 and as described in 40 CFR 60.11(e)(5), shall furnish the Administrator two or, upon request, more copies of a written report of the results of the COMS performance evaluation described in 40 CFR 60.13(c) at least 10 days before the performance test required under 40 CFR 60.8 is conducted.

(2) Except as provided in 40 CFR 60.13(c)(1), the owner or operator of an affected facility shall furnish the Administrator within 60 days of completion two or, upon request, more copies of a written report of the results of the performance evaluation.

APPENDIX A
40 CFR 60, Subpart A - General Provisions

(d)(1) Owners and operators of all continuous emission monitoring systems installed in accordance with the provisions of this part shall check the zero (or low-level value between 0 and 20 percent of span value) and span (50 to 100 percent of span value) calibration drifts at least once daily in accordance with a written procedure. The zero and span shall, as a minimum, be adjusted whenever the 24-hour zero drift or 24-hour span drift exceeds two times the limits of the applicable performance specifications in appendix B. The system must allow the amount of excess zero and span drift measured at the 24-hour interval checks to be recorded and quantified, whenever specified. For continuous monitoring systems measuring opacity of emissions, the optical surfaces exposed to the effluent gases shall be cleaned prior to performing the zero and span drift adjustments except that for systems using automatic zero adjustments. The optical surfaces shall be cleaned when the cumulative automatic zero compensation exceeds 4 percent opacity.

(2) Unless otherwise approved by the Administrator, the following procedures shall be followed for continuous monitoring systems measuring opacity of emissions. Minimum procedures shall include a method for producing a simulated zero opacity condition and an upscale (span) opacity condition using a certified neutral density filter or other related technique to produce a known obscuration of the light beam. Such procedures shall provide a system check of the analyzer internal optical surfaces and all electronic circuitry including the lamp and photo detector assembly.

(e) Except for system breakdowns, repairs, calibration checks, and zero and span adjustments required under 40 CFR 60.13(d), all continuous monitoring systems shall be in continuous operation and shall meet minimum frequency of operation requirements as follows:

(1) All continuous monitoring systems referenced by 40 CFR 60.13(c) for measuring opacity of emissions shall complete a minimum of one cycle of sampling and analyzing for each successive 10-second period and one cycle of data recording for each successive 6-minute period.

(2) All continuous monitoring systems referenced by 40 CFR 60.13(c) for measuring emissions, except opacity, shall complete a minimum of one cycle of operation (sampling, analyzing, and data recording) for each successive 15-minute period.

(f) All continuous monitoring systems or monitoring devices shall be installed such that representative measurements of emissions or process parameters from the affected facility are obtained. Additional procedures for location of continuous monitoring systems contained in the applicable Performance Specifications of appendix B of 40 CFR 60 shall be used.

(g) When the effluents from a single affected facility or two or more affected facilities subject to the same emission standards are combined before being released to the atmosphere, the owner or operator may install applicable continuous monitoring systems on each effluent or on the combined effluent. When the affected facilities are not subject to the same emission standards, separate continuous monitoring systems shall be installed on each effluent. When the effluent from one affected facility is released to the atmosphere through more than one point, the owner or operator shall install an applicable continuous monitoring system on each separate effluent unless the installation of fewer systems is approved by the Administrator. When more than one continuous monitoring system is used to measure the emissions from one affected facility (e.g., multiple breechings, multiple outlets), the owner or operator shall report the results as required from each continuous monitoring system.

(h) Owners or operators of all continuous monitoring systems for measurement of opacity shall reduce all data to 6-minute averages and for continuous monitoring systems other than opacity to 1-hour averages for time periods as defined in 40 CFR 60.2. Six-minute opacity averages shall be calculated from 36 or more data points equally spaced over each 6-minute period. For continuous monitoring

APPENDIX A
40 CFR 60, Subpart A - General Provisions

systems other than opacity, 1-hour averages shall be computed from four or more data points equally spaced over each 1-hour period. Data recorder during periods of continuous monitoring system breakdowns, repairs, calibration checks, and zero and span adjustments shall not be included in the data averages computed under this paragraph. An arithmetic or integrated average of all data may be used. The data may be recorded in reduced or non reduced form (e.g., ppm pollutant and percent O₂ or ng/J of pollutant). All excess emissions shall be converted into units of the standard using the applicable conversion procedures specified in subparts. After conversion into units of the standard, the data may be rounded to the same number of significant digits as used in the applicable subparts to specify the emission limit (e.g., rounded to the nearest 1 percent opacity).

- (i) After receipt and consideration of written application, the Administrator may approve alternatives to any monitoring procedures or requirements of this part including, but not limited to the following:
- (1) Alternative monitoring requirements when installation of a continuous monitoring system or monitoring device specified by this part would not provide accurate measurements due to liquid water or other interferences caused by substances with the effluent gases.
 - (2) Alternative monitoring requirements when the affected facility is infrequently operated.
 - (3) Alternative monitoring requirements to accommodate continuous monitoring systems that require additional measurements to correct for stack moisture conditions.
 - (4) Alternative locations for installing continuous monitoring systems or monitoring devices when the owner or operator can demonstrate that installation at alternate locations will enable accurate and representative measurements.
 - (5) Alternative methods of converting pollutant concentration measurements to units of the standards.
 - (6) Alternative procedures for performing daily checks of zero and span drift that do not involve use of span gases or test cells.
 - (7) Alternatives to the A.S.T.M. test methods or sampling procedures specified by any subpart.
 - (8) Alternative continuous monitoring systems that do not meet the design or performance requirements in Performance Specification 1, appendix B, but adequately demonstrate a definite and consistent relationship between its measurements and the measurements of opacity by a system complying with the requirements in Performance Specification 1. The Administrator may require that such demonstration be performed for each affected facility.
 - (9) Alternative monitoring requirements when the effluent from a single affected facility or the combined effluent from two or more affected facilities are released to the atmosphere through more than one point.
- (j) An alternative to the relative accuracy test specified in Performance Specification 2 of appendix B may be requested as follows:
- (1) An alternative to the reference method tests for determining relative accuracy is available for sources with emission rates demonstrated to be less than 50 percent of the applicable standard. A source owner or operator may petition the Administrator to waive the relative accuracy test in section 7 of Performance Specification 2 and substitute the procedures in section 10 if the results of a performance test conducted according to the requirements in 40 CFR 60.8 of this subpart or other tests performed following the criteria in 40 CFR 60.8 demonstrate that the emission rate of the pollutant of interest in the units of the applicable standard is less than 50 percent of the applicable standard. For sources subject to standards expressed as control efficiency levels, a source owner or operator may petition the Administrator to waive the relative accuracy test and substitute the procedures in section 10 of Performance Specification 2 if the control device exhaust emission rate is less than 50 percent of the level needed to meet the control efficiency requirement. The alternative procedures do not apply if the continuous emission monitoring system is used to determine

APPENDIX A
40 CFR 60, Subpart A - General Provisions

compliance continuously with the applicable standard. The petition to waive the relative accuracy test shall include a detailed description of the procedures to be applied. Included shall be location and procedure for conducting the alternative, the concentration or response levels of the alternative RA materials, and the other equipment checks included in the alternative procedure. The Administrator will review the petition for completeness and applicability. The determination to grant a waiver will depend on the intended use of the CEMS data (e.g., data collection purposes other than NSPS) and may require specifications more stringent than in Performance Specification 2 (e.g., the applicable emission limit is more stringent than NSPS).

(2) The waiver of a CEMS relative accuracy test will be reviewed and may be rescinded at such time following successful completion of the alternative RA procedure that the CEMS data indicate the source emissions approaching the level of the applicable standard. The criterion for reviewing the waiver is the collection of CEMS data showing that emissions have exceeded 70 percent of the applicable standard for seven, consecutive, averaging periods as specified by the applicable regulation(s). For sources subject to standards expressed as control efficiency levels, the criterion for reviewing the waiver is the collection of CEMS data showing that exhaust emissions have exceeded 70 percent of the level needed to meet the control efficiency requirement for seven, consecutive, averaging periods as specified by the applicable regulation(s) [e.g., 40 CFR 60.45(g)(2) and 40 CFR 60.45(g)(3), 40 CFR 60.73(e), and 40 CFR 60.84(e)]. It is the responsibility of the source operator to maintain records and determine the level of emissions relative to the criterion on the waiver of relative accuracy testing. If this criterion is exceeded, the owner or operator must notify the Administrator within 10 days of such occurrence and include a description of the nature and cause of the increasing emissions. The Administrator will review the notification and may rescind the waiver and require the owner or operator to conduct a relative accuracy test of the CEMS as specified in section 7 of Performance Specification 2.

[Rule 62-204.800, F.A.C.; and, 40 CFR 60.13(a) thru (j)].

40 CFR 60.14 Modification.

(a) Except as provided under 40 CFR 60.14(e) and 40 CFR 60.14(f), any physical or operational change to an existing facility which results in an increase in the emission rate to the atmosphere of any pollutant to which a standard applies shall be considered a modification within the meaning of section 111 of the Act. Upon modification, an existing facility shall become an affected facility for each pollutant to which a standard applies and for which there is an increase in the emission rate to the atmosphere.

(b) Emission rate shall be expressed as kg/hr (lbs/hour) of any pollutant discharged into the atmosphere for which a standard is applicable. The Administrator shall use the following to determine emission rate:

(1) Emission factors as specified in the latest issue of "Compilation of Air Pollutant Emission Factors", EPA Publication No. AP-42, or other emission factors determined by the Administrator to be superior to AP-42 emission factors, in cases where utilization of emission factors demonstrate that the emission level resulting from the physical or operational change will either clearly increase or clearly not increase.

(2) Material balances, continuous monitor data, or manual emission tests in cases where utilization of emission factors as referenced in 40 CFR 60.14(b)(1) does not demonstrate to the Administrator's satisfaction whether the emission level resulting from the physical or operational change will either clearly increase or clearly not increase, or where an owner or operator demonstrates to the Administrator's satisfaction that there are reasonable grounds to dispute the result obtained by the Administrator utilizing emission factors as referenced in 40 CFR 60.14(b)(1). When the emission rate is based on results from manual emission tests or continuous monitoring systems, the procedures specified in 40 CFR 60 appendix C of 40 CFR 60 shall be used to determine whether an increase in

APPENDIX A
40 CFR 60, Subpart A - General Provisions

emission rate has occurred. Tests shall be conducted under such conditions as the Administrator shall specify to the owner or operator based on representative performance of the facility. At least three valid test runs must be conducted before and at least three after the physical or operational change. All operating parameters which may affect emissions must be held constant to the maximum feasible degree for all test runs.

- (c) The addition of an affected facility to a stationary source as an expansion to that source or as a replacement for an existing facility shall not by itself bring within the applicability of this part any other facility within that source.
- (d) [Reserved]
- (e) The following shall not, by themselves, be considered modifications under this part:
- (1) Maintenance, repair, and replacement which the Administrator determines to be routine for a source category, subject to the provisions of 40 CFR 60.14(c) and 40 CFR 60.15.
 - (2) An increase in production rate of an existing facility, if that increase can be accomplished without a capital expenditure on that facility.
 - (3) An increase in the hours of operation.
 - (4) Use of an alternative fuel or raw material if, prior to the date any standard under this part becomes applicable to that source type, as provided by 40 CFR 60.1, the existing facility was designed to accommodate that alternative use. A facility shall be considered to be designed to accommodate an alternative fuel or raw material if that use could be accomplished under the facility's construction specifications as amended prior to the change. Conversion to coal required for energy considerations, as specified in section 111(a)(8) of the Act, shall not be considered a modification.
 - (5) The addition or use of any system or device whose primary function is the reduction of air pollutants, except when an emission control system is removed or is replaced by a system which the Administrator determines to be less environmentally beneficial.
 - (6) The relocation or change in ownership of an existing facility.
- (f) Special provisions set forth under an applicable subpart of this part shall supersede any conflicting provisions of this section.
- (g) Within 180 days of the completion of any physical or operational change subject to the control measures specified in 40 CFR 60.14(a), compliance with all applicable standards must be achieved. [Rule 62-204.800, F.A.C.; and, 40 CFR 60.14(a) thru (g)].

40 CFR 60.15 Reconstruction.

- (a) An existing facility, upon reconstruction, becomes an affected facility, irrespective of any change in emission rate.
- (b) "Reconstruction" means the replacement of components of an existing facility to such an extent that:
- (1) The fixed capital cost of the new components exceeds 50 percent of the fixed capital cost that would be required to construct a comparable entirely new facility, and
 - (2) It is technologically and economically feasible to meet the applicable standards set forth in this part.
- (c) "Fixed capital cost" means the capital needed to provide all the depreciable components.
- (d) If an owner or operator of an existing facility proposes to replace components, and the fixed capital cost of the new components exceeds 50 percent of the fixed capital cost that would be required to construct a comparable entirely new facility, he shall notify the Administrator of the proposed

APPENDIX A
40 CFR 60, Subpart A - General Provisions

replacements. The notice must be postmarked 60 days (or as soon as practicable) before construction of the replacements is commenced and must include the following information:

- (1) Name and address of the owner or operator.
- (2) The location of the existing facility.
- (3) A brief description of the existing facility and the components which are to be replaced.
- (4) A description of the existing air pollution control equipment and the proposed air pollution control equipment.
- (5) An estimate of the fixed capital cost of the replacements and of constructing a comparable entirely new facility.
- (6) The estimated life of the existing facility after the replacements.
- (7) A discussion of any economic or technical limitations the facility may have in complying with the applicable standards of performance after the proposed replacements.

(e) The Administrator will determine, within 30 days of the receipt of the notice required by 40 CFR 60.15(d) and any additional information he may reasonably require, whether the proposed replacement constitutes reconstruction.

(f) The Administrator's determination under 40 CFR 60.15(e) shall be based on:

- (1) The fixed capital cost of the replacements in comparison to the fixed capital cost that would be required to construct a comparable entirely new facility;
- (2) The estimated life of the facility after the replacements compared to the life of a comparable entirely new facility;
- (3) The extent to which the components being replaced cause or contribute to the emissions from the facility; and
- (4) Any economic or technical limitations on compliance with applicable standards of performance which are inherent in the proposed replacements.

(g) Individual subparts of this part may include specific provisions which refine and delimit the concept of reconstruction set forth in this section.

[Rule 62-204.800, F.A.C.; and, 40 CFR 60.15(a) thru (g)].

APPENDIX A-1
40 CFR 63, Subpart A

National Emission Standards for Hazardous Air Pollutants for Source Categories: General Provisions

§ 63.1 Applicability.

(a) General.

(1) Terms used throughout this part are defined in § 63.2 or in the Clean Air Act (Act) as amended in 1990, except that individual subparts of this part may include specific definitions in addition to or that supersede definitions in § 63.2.

(2) This part contains national emission standards for hazardous air pollutants (NESHAP) established pursuant to section 112 of the Act as amended November 15, 1990. These standards regulate specific categories of stationary sources that emit (or have the potential to emit) one or more hazardous air pollutants listed in this part pursuant to section 112(b) of the Act. This section explains the applicability of such standards to sources affected by them. The standards in this part are independent of NESHAP contained in 40 CFR part 61. The NESHAP in part 61 promulgated by signature of the Administrator before November 15, 1990 (i.e., the date of enactment of the Clean Air Act Amendments of 1990) remain in effect until they are amended, if appropriate, and added to this part.

(3) No emission standard or other requirement established under this part shall be interpreted, construed, or applied to diminish or replace the requirements of a more stringent emission limitation or other applicable requirement established by the Administrator pursuant to other authority of the Act (section 111, part C or D or any other authority of this Act), or a standard issued under State authority. The Administrator may specify in a specific standard under this part that facilities subject to other provisions under the Act need only comply with the provisions of that standard.

(4) (i) Each relevant standard in this part 63 must identify explicitly whether each provision in this subpart A is or is not included in such relevant standard.

(ii) If a relevant part 63 standard incorporates the requirements of 40 CFR part 60, part 61, or other part 63 standards, the relevant part 63 standard must identify explicitly the applicability of each corresponding part 60, part 61, or other part 63 subpart A (General) Provision.

(iii) The General Provisions in this Subpart A do not apply to regulations developed pursuant to section 112(r) of the amended Act., unless otherwise specified in those regulations.

(5) [Reserved]

(6) To obtain the most current list of categories of sources to be regulated under section 112 of the Act, or to obtain the most recent regulation promulgation schedule established pursuant to section 112(e) of the Act, contact the Office of the Director, Emission Standards Division, Office of Air Quality Planning and Standards, U.S. EPA (MD-13), Research Triangle Park, North Carolina 27711.

(7) [Reserved]

(8) [Reserved]

(9) [Reserved]

(10) For the purposes of this part, time periods specified in days shall be measured in calendar days, even if the word "calendar" is absent, unless otherwise specified in an applicable requirement.

(11) For the purposes of this part, if an explicit postmark deadline is not specified in an applicable requirement for the submittal of a notification, application, test plan, report, or other written communication to the Administrator, the owner or operator shall postmark the submittal on or before the number of days specified in the applicable requirement. For example, if a notification must be submitted 15 days before a particular event is scheduled to take place, the notification shall be postmarked on or before 15 days preceding the event; likewise, if a notification must be submitted 15 days after a particular event takes place, the notification shall be postmarked on or before 15 days following the end of the event. The use of reliable non-Government mail carriers that provide indications of verifiable delivery of information required to be submitted to the Administrator, similar to the postmark provided by the U.S. Postal Service, or alternative means of delivery agreed to by the permitting authority, is acceptable.

(12) Notwithstanding time periods or postmark deadlines specified in this part for the submittal of information to the Administrator by an owner or operator, or the review of such information by the

APPENDIX A-1
40 CFR 63, Subpart A

National Emission Standards for Hazardous Air Pollutants for Source Categories: General Provisions

Administrator, such time periods or deadlines may be changed by mutual agreement between the owner or operator and the Administrator. Procedures governing the implementation of this provision are specified in § 63.9(i).

- (13) [Reserved]
- (14) [Reserved]

(b) *Initial applicability determination for this part.*

(1) **§ 63.1340 specifies applicability.**

(2) [Reserved]

(3) An owner or operator of a stationary source who is in the relevant source category and who determines that the source is not subject to a relevant standard or other requirement established under this part, must keep a record as specified in § 63.10(b)(3).

(c) *Applicability of this part after a relevant standard has been set under this part.*

(1) If a relevant standard has been established under this part, the owner or operator of an affected source must comply with the provisions of that standard and of this subpart as provided in paragraph (a)(4) of this section.

Except as provided in § 63.10(b)(3), if a relevant standard has been established under this part, the owner or operator of an affected source may be required to obtain a title V permit from a permitting authority in the State in which the source is located. **{Area sources must obtain Title V permits.}** Emission standards promulgated in this part for area sources will specify whether -

(i) States will have the option to exclude area sources affected by that standard from the requirement to obtain a title V permit (i.e., the standard will exempt the category of area sources altogether from the permitting requirement);

(ii) States will have the option to defer permitting of area sources in that category until the Administrator takes rulemaking action to determine applicability of the permitting requirements; or

(iii) If a standard fails to specify what the permitting requirements will be for area sources affected by such a standard, then area sources that are subject to the standard will be subject to the requirement to obtain a title V permit without any deferral.

(3) [Reserved]

(4) [Reserved]

(5) If an area source that otherwise would be subject to an emission standard or other requirement established under this part if it were a major source subsequently increases its emissions of hazardous air pollutants (or its potential to emit hazardous air pollutants) such that the source is a major source that is subject to the emission standard or other requirement, such source also shall be subject to the notification requirements of this subpart.

(d) [Reserved]

(e) If the Administrator promulgates an emission standard under section 112(d) or (h) of the Act that is applicable to a source subject to an emission limitation by permit established under section 112(j) of the Act, and the requirements under the section 112(j) emission limitation are substantially as effective as the promulgated emission standard, the owner or operator may request the permitting authority to revise the source's title V permit to reflect that the emission limitation in the permit satisfies the requirements of the promulgated emission standard. The process by which the permitting authority determines whether the section 112(j) emission limitation is substantially as effective as the promulgated emission standard must include, consistent with part 70 or 71 of this chapter, the opportunity for full public, EPA, and affected State review (including the opportunity for EPA's objection) prior to the permit revision being finalized. A negative

APPENDIX A-1
40 CFR 63, Subpart A

National Emission Standards for Hazardous Air Pollutants for Source Categories: General Provisions

determination by the permitting authority constitutes final action for purposes of review and appeal under the applicable title V operating permit program.

§ 63.2 Definitions.

Additional definitions in § 63.1341.

The terms used in this part are defined in the Act or in this section as follows:

Act means the Clean Air Act (42 U.S.C. 7401 et seq., as amended by Pub. L. 101-549, 104 Stat. 2399).

Actual emissions is defined in subpart D of this part for the purpose of granting a compliance extension for an early reduction of hazardous air pollutants.

Administrator means the Administrator of the United States Environmental Protection Agency or his or her authorized representative (e.g., a State that has been delegated the authority to implement the provisions of this part).

Affected source, for the purposes of this part, means the collection of equipment, activities, or both within a single contiguous area and under common control that is included in a section 112(c) source category or subcategory for which a section 112(d) standard or other relevant standard is established pursuant to section 112 of the Act. Each relevant standard will define the "affected source," as defined in this paragraph unless a different definition is warranted based on a published justification as to why this definition would result in significant administrative, practical, or implementation problems and why the different definition would resolve those problems. The term "affected source," as used in this part, is separate and distinct from any other use of that term in EPA regulations such as those implementing title IV of the Act. Affected source may be defined differently for part 63 than affected facility and stationary source in parts 60 and 61, respectively. This definition of "affected source," and the procedures for adopting an alternative definition of "affected source," shall apply to each section 112(d) standard for which the initial proposed rule is signed by the Administrator after June 30, 2002.

Alternative emission limitation means conditions established pursuant to sections 112(i)(5) or 112(i)(6) of the Act by the Administrator or by a State with an approved permit program.

Alternative emission standard means an alternative means of emission limitation that, after notice and opportunity for public comment, has been demonstrated by an owner or operator to the Administrator's satisfaction to achieve a reduction in emissions of any air pollutant at least equivalent to the reduction in emissions of such pollutant achieved under a relevant design, equipment, work practice, or operational emission standard, or combination thereof, established under this part pursuant to section 112(h) of the Act.

Alternative test method means any method of sampling and analyzing for an air pollutant that is not a test method in this chapter and that has been demonstrated to the Administrator's satisfaction, using Method 301 in Appendix A of this part, to produce results adequate for the Administrator's determination that it may be used in place of a test method specified in this part.

Approved permit program means a State permit program approved by the Administrator as meeting the requirements of part 70 of this chapter or a Federal permit program established in this chapter pursuant to title V of the Act (42 U.S.C. 7661).

Area source means any stationary source of hazardous air pollutants that is not a major source as defined in this part.

Commenced means, with respect to construction or reconstruction of an affected source, that an owner or operator has undertaken a continuous program of construction or reconstruction or that an owner or operator has entered into a contractual obligation to undertake and complete, within a reasonable time, a continuous program of construction or reconstruction.

APPENDIX A-1
40 CFR 63, Subpart A

National Emission Standards for Hazardous Air Pollutants for Source Categories: General Provisions

Compliance date means the date by which an affected source is required to be in compliance with a relevant standard, limitation, prohibition, or any federally enforceable requirement established by the Administrator (or a State with an approved permit program) pursuant to section 112 of the Act.

Compliance plan means a plan that contains all of the following:

- (1) A description of the compliance status of the affected source with respect to all applicable requirements established under this part;
- (2) A description as follows:
 - (i) For applicable requirements for which the source is in compliance, a statement that the source will continue to comply with such requirements;
 - (ii) For applicable requirements that the source is required to comply with by a future date, a statement that the source will meet such requirements on a timely basis;
 - (iii) For applicable requirements for which the source is not in compliance, a narrative description of how the source will achieve compliance with such requirements on a timely basis;
- (3) A compliance schedule, as defined in this section; and
- (4) A schedule for the submission of certified progress reports no less frequently than every 6 months for affected sources required to have a schedule of compliance to remedy a violation.

Compliance schedule means:

- (1) In the case of an affected source that is in compliance with all applicable requirements established under this part, a statement that the source will continue to comply with such requirements; or
- (2) In the case of an affected source that is required to comply with applicable requirements by a future date, a statement that the source will meet such requirements on a timely basis and, if required by an applicable requirement, a detailed schedule of the dates by which each step toward compliance will be reached; or
- (3) In the case of an affected source not in compliance with all applicable requirements established under this part, a schedule of remedial measures, including an enforceable sequence of actions or operations with milestones and a schedule for the submission of certified progress reports, where applicable, leading to compliance with a relevant standard, limitation, prohibition, or any federally enforceable requirement established pursuant to section 112 of the Act for which the affected source is not in compliance. This compliance schedule shall resemble and be at least as stringent as that contained in any judicial consent decree or administrative order to which the source is subject. Any such schedule of compliance shall be supplemental to, and shall not sanction non-compliance with, the applicable requirements on which it is based.

Construction means the on-site fabrication, erection, or installation of an affected source. Construction does not include the removal of all equipment comprising an affected source from an existing location and reinstallation of such equipment at a new location. The owner or operator of an existing affected source that is relocated may elect not to reinstall minor ancillary equipment including, but not limited to, piping, ductwork, and valves. However, removal and reinstallation of an affected source will be construed as reconstruction if it satisfies the criteria for reconstruction as defined in this section. The costs of replacing minor ancillary equipment must be considered in determining whether the existing affected source is reconstructed.

Continuous emission monitoring system (CEMS) means the total equipment that may be required to meet the data acquisition and availability requirements of this part, used to sample, condition (if applicable), analyze, and provide a record of emissions.

Continuous monitoring system (CMS) is a comprehensive term that may include, but is not limited to, continuous emission monitoring systems, continuous opacity monitoring systems, continuous parameter monitoring systems, or other manual or automatic monitoring that is used for demonstrating compliance with an applicable regulation on a continuous basis as defined by the regulation.

Continuous opacity monitoring system (COMS) means a continuous monitoring system that measures the opacity of emissions.

APPENDIX A-1
40 CFR 63, Subpart A

National Emission Standards for Hazardous Air Pollutants for Source Categories: General Provisions

Continuous parameter monitoring system means the total equipment that may be required to meet the data acquisition and availability requirements of this part, used to sample, condition (if applicable), analyze, and provide a record of process or control system parameters.

Effective date means:

(1) With regard to an emission standard established under this part, the date of promulgation in the FEDERAL REGISTER of such standard; or

(2) With regard to an alternative emission limitation or equivalent emission limitation determined by the Administrator (or a State with an approved permit program), the date that the alternative emission limitation or equivalent emission limitation becomes effective according to the provisions of this part.

Emission standard means a national standard, limitation, prohibition, or other regulation promulgated in a subpart of this part pursuant to sections 112(d), 112(h), or 112(f) of the Act.

Emissions averaging is a way to comply with the emission limitations specified in a relevant standard, whereby an affected source, if allowed under a subpart of this part, may create emission credits by reducing emissions from specific points to a level below that required by the relevant standard, and those credits are used to offset emissions from points that are not controlled to the level required by the relevant standard.

EPA means the United States Environmental Protection Agency.

Equivalent emission limitation means any maximum achievable control technology emission limitation or requirements which are applicable to a major source of hazardous air pollutants and are adopted by the Administrator (or a State with an approved permit program) on a case-by-case basis, pursuant to section 112(g) or (j) of the Act.

Excess emissions and continuous monitoring system performance report is a report that must be submitted periodically by an affected source in order to provide data on its compliance with relevant emission limits, operating parameters, and the performance of its continuous parameter monitoring systems.

Existing source means any affected source that is not a new source.

Federally enforceable means all limitations and conditions that are enforceable by the Administrator and citizens under the Act or that are enforceable under other statutes administered by the Administrator. Examples of federally enforceable limitations and conditions include, but are not limited to:

(1) Emission standards, alternative emission standards, alternative emission limitations, and equivalent emission limitations established pursuant to section 112 of the Act as amended in 1990;

(2) New source performance standards established pursuant to section 111 of the Act, and emission standards established pursuant to section 112 of the Act before it was amended in 1990;

(3) All terms and conditions in a title V permit, including any provisions that limit a source's potential to emit, unless expressly designated as not federally enforceable;

(4) Limitations and conditions that are part of an approved State Implementation Plan (SIP) or a Federal Implementation Plan (FIP);

(5) Limitations and conditions that are part of a Federal construction permit issued under 40 CFR 52.21 or any construction permit issued under regulations approved by the EPA in accordance with 40 CFR part 51;

(6) Limitations and conditions that are part of an operating permit where the permit and the permitting program pursuant to which it was issued meet all of the following criteria:

(i) The operating permit program has been submitted to and approved by EPA into a State implementation plan (SIP) under section 110 of the CAA;

(ii) The SIP imposes a legal obligation that operating permit holders adhere to the terms and limitations of such permits and provides that permits which do not conform to the operating permit program requirements and the requirements of EPA's underlying regulations may be deemed not "federally enforceable" by EPA;

(iii) The operating permit program requires that all emission limitations, controls, and other requirements imposed by such permits will be at least as stringent as any other applicable limitations

APPENDIX A-1
40 CFR 63, Subpart A

National Emission Standards for Hazardous Air Pollutants for Source Categories: General Provisions

and requirements contained in the SIP or enforceable under the SIP, and that the program may not issue permits that waive, or make less stringent, any limitations or requirements contained in or issued pursuant to the SIP, or that are otherwise "federally enforceable";

(iv) The limitations, controls, and requirements in the permit in question are permanent, quantifiable, and otherwise enforceable as a practical matter; and

(v) The permit in question was issued only after adequate and timely notice and opportunity for comment for EPA and the public.

(7) Limitations and conditions in a State rule or program that has been approved by the EPA under subpart E of this part for the purposes of implementing and enforcing section 112; and

(8) Individual consent agreements that the EPA has legal authority to create.

Fixed capital cost means the capital needed to provide all the depreciable components of an existing source.

Fugitive emissions means those emissions from a stationary source that could not reasonably pass through a stack, chimney, vent, or other functionally equivalent opening. Under section 112 of the Act, all fugitive emissions are to be considered in determining whether a stationary source is a major source.

Hazardous air pollutant means any air pollutant listed in or pursuant to section 112(b) of the Act.

Issuance of a part 70 permit will occur, if the State is the permitting authority, in accordance with the requirements of part 70 of this chapter and the applicable, approved State permit program. When the EPA is the permitting authority, issuance of a title V permit occurs immediately after the EPA takes final action on the final permit.

Major source means any stationary source or group of stationary sources located within a contiguous area and under common control that emits or has the potential to emit considering controls, in the aggregate, 10 tons per year or more of any hazardous air pollutant or 25 tons per year or more of any combination of hazardous air pollutants, unless the Administrator establishes a lesser quantity, or in the case of radionuclides, different criteria from those specified in this sentence.

Malfunction means any sudden, infrequent, and not reasonably preventable failure of air pollution control and monitoring equipment, process equipment, or a process to operate in a normal or usual manner which causes, or has the potential to cause, the emission limitations in an applicable standard to be exceeded. Failures that are caused in part by poor maintenance or careless operation are not malfunctions.

Monitoring means the collection and use of measurement data or other information to control the operation of a process or pollution control device or to verify a work practice standard relative to assuring compliance with applicable requirements. Monitoring is composed of four elements:

(1) Indicator(s) of performance -- the parameter or parameters you measure or observe for demonstrating proper operation of the pollution control measures or compliance with the applicable emissions limitation or standard. Indicators of performance may include direct or predicted emissions measurements (including opacity), operational parametric values that correspond to process or control device (and capture system) efficiencies or emissions rates, and recorded findings of inspection of work practice activities, materials tracking, or design characteristics. Indicators may be expressed as a single maximum or minimum value, a function of process variables (for example, within a range of pressure drops), a particular operational or work practice status (for example, a damper position, completion of a waste recovery task, materials tracking), or an interdependency between two or among more than two variables.

(2) Measurement techniques -- the means by which you gather and record information of or about the indicators of performance. The components of the measurement technique include the detector type, location and installation specifications, inspection procedures, and quality assurance and quality control measures. Examples of measurement techniques include continuous emission monitoring systems, continuous opacity monitoring systems, continuous parametric monitoring systems, and manual inspections that include making records of process conditions or work practices.

APPENDIX A-1
40 CFR 63, Subpart A

National Emission Standards for Hazardous Air Pollutants for Source Categories: General Provisions

(3) Monitoring frequency -- the number of times you obtain and record monitoring data over a specified time interval. Examples of monitoring frequencies include at least four points equally spaced for each hour for continuous emissions or parametric monitoring systems, at least every 10 seconds for continuous opacity monitoring systems, and at least once per operating day (or week, month, etc.) for work practice or design inspections.

(4) Averaging time -- the period over which you average and use data to verify proper operation of the pollution control approach or compliance with the emissions limitation or standard. Examples of averaging time include a 3-hour average in units of the emissions limitation, a 30-day rolling average emissions value, a daily average of a control device operational parametric range, and an instantaneous alarm.

New affected source means the collection of equipment, activities, or both within a single contiguous area and under common control that is included in a section 112(c) source category or subcategory that is subject to a section 112(d) or other relevant standard for new sources. This definition of "new affected source," and the criteria to be utilized in implementing it, shall apply to each section 112(d) standard for which the initial proposed rule is signed by the Administrator after June 30, 2002. Each relevant standard will define the term "new affected source," which will be the same as the "affected source" unless a different collection is warranted based on consideration of factors including:

- (1) Emission reduction impacts of controlling individual sources versus groups of sources;
- (2) Cost effectiveness of controlling individual equipment;
- (3) Flexibility to accommodate common control strategies;
- (4) Cost/benefits of emissions averaging;
- (5) Incentives for pollution prevention;
- (6) Feasibility and cost of controlling processes that share common equipment (e.g., product recovery devices);
- (7) Feasibility and cost of monitoring; and
- (8) Other relevant factors.

New source means any affected source the construction or reconstruction of which is commenced after the Administrator first proposes a relevant emission standard under this part establishing an emission standard applicable to such source.

One-hour period, unless otherwise defined in an applicable subpart, means any 60-minute period commencing on the hour.

Opacity means the degree to which emissions reduce the transmission of light and obscure the view of an object in the background. For continuous opacity monitoring systems, opacity means the fraction of incident light that is attenuated by an optical medium.

Owner or operator means any person who owns, leases, operates, controls, or supervises a stationary source.

Performance audit means a procedure to analyze blind samples, the content of which is known by the Administrator, simultaneously with the analysis of performance test samples in order to provide a measure of test data quality.

Performance evaluation means the conduct of relative accuracy testing, calibration error testing, and other measurements used in validating the continuous monitoring system data.

Performance test means the collection of data resulting from the execution of a test method (usually three emission test runs) used to demonstrate compliance with a relevant emission standard as specified in the performance test section of the relevant standard.

Permit modification means a change to a title V permit as defined in regulations codified in this chapter to implement title V of the Act (42 U.S.C. 7661).

Permit program means a comprehensive State operating permit system established pursuant to title V of the Act (42 U.S.C. 7661) and regulations codified in part 70 of this chapter and applicable State

APPENDIX A-1
40 CFR 63, Subpart A

National Emission Standards for Hazardous Air Pollutants for Source Categories: General Provisions

regulations, or a comprehensive Federal operating permit system established pursuant to title V of the Act and regulations codified in this chapter.

Permit revision means any permit modification or administrative permit amendment to a title V permit as defined in regulations codified in this chapter to implement title V of the Act (42 U.S.C. 7661).

Permitting authority means:

(1) The State air pollution control agency, local agency, other State agency, or other agency authorized by the Administrator to carry out a permit program under part 70 of this chapter; or

(2) The Administrator, in the case of EPA-implemented permit programs under title V of the Act (42 U.S.C. 7661).

Potential to emit means the maximum capacity of a stationary source to emit a pollutant under its physical and operational design. Any physical or operational limitation on the capacity of the stationary source to emit a pollutant, including air pollution control equipment and restrictions on hours of operation or on the type or amount of material combusted, stored, or processed, shall be treated as part of its design if the limitation or the effect it would have on emissions is federally enforceable.

Reconstruction means the replacement of components of an affected or a previously unaffected stationary source to such an extent that:

(1) The fixed capital cost of the new components exceeds 50 percent of the fixed capital cost that would be required to construct a comparable new source; and

(2) It is technologically and economically feasible for the reconstructed source to meet the relevant standard(s) established by the Administrator (or a State) pursuant to section 112 of the Act. Upon reconstruction, an affected source, or a stationary source that becomes an affected source, is subject to relevant standards for new sources, including compliance dates, irrespective of any change in emissions of hazardous air pollutants from that source.

Regulation promulgation schedule means the schedule for the promulgation of emission standards under this part, established by the Administrator pursuant to section 112(e) of the Act and published in the FEDERAL REGISTER.

Relevant standard means:

(1) An emission standard;

(2) An alternative emission standard;

(3) An alternative emission limitation; or

(4) An equivalent emission limitation established pursuant to section 112 of the Act that applies to the collection of equipment, activities, or both regulated by such standard or limitation. A relevant standard may include or consist of a design, equipment, work practice, or operational requirement, or other measure, process, method, system, or technique (including prohibition of emissions) that the Administrator (or a State) establishes for new or existing sources to which such standard or limitation applies. Every relevant standard established pursuant to section 112 of the Act includes subpart A of this part, as provided by § 63.1(a)(4), and all applicable appendices of this part or of other parts of this chapter that are referenced in that standard.

Responsible official means one of the following:

(1) For a corporation: A president, secretary, treasurer, or vice president of the corporation in charge of a principal business function, or any other person who performs similar policy or decision-making functions for the corporation, or a duly authorized representative of such person if the representative is responsible for the overall operation of one or more manufacturing, production, or operating facilities and either:

(i) The facilities employ more than 250 persons or have gross annual sales or expenditures exceeding \$25 million (in second quarter 1980 dollars); or

(ii) The delegation of authority to such representative is approved in advance by the Administrator.

(2) For a partnership or sole proprietorship: a general partner or the proprietor, respectively.

APPENDIX A-1
40 CFR 63, Subpart A

National Emission Standards for Hazardous Air Pollutants for Source Categories: General Provisions

(3) For a municipality, State, Federal, or other public agency: either a principal executive officer or ranking elected official. For the purposes of this part, a principal executive officer of a Federal agency includes the chief executive officer having responsibility for the overall operations of a principal geographic unit of the agency (e.g., a Regional Administrator of the EPA).

(4) For affected sources (as defined in this part) applying for or subject to a title V permit: “responsible official” shall have the same meaning as defined in part 70 or Federal title V regulations in this chapter (42 U.S.C. 7661), whichever is applicable.

Run means one of a series of emission or other measurements needed to determine emissions for a representative operating period or cycle as specified in this part.

Shutdown means the cessation of operation of an affected source or portion of an affected source for any purpose.

Six-minute period means, with respect to opacity determinations, any one of the 10 equal parts of a 1-hour period.

Standard conditions means a temperature of 293 °K (68° F) and a pressure of 101.3 kilopascals (29.92 in. Hg).

Startup means the setting in operation of an affected source for any purpose.

State means all non-Federal authorities, including local agencies, interstate associations, and State-wide programs, that have delegated authority to implement:

(1) The provisions of this part and/or

(2) the permit program established under part 70 of this chapter. The term State shall have its conventional meaning where clear from the context.

Stationary source means any building, structure, facility, or installation which emits or may emit any air pollutant.

Test method means the validated procedure for sampling, preparing, and analyzing for an air pollutant specified in a relevant standard as the performance test procedure. The test method may include methods described in an appendix of this chapter, test methods incorporated by reference in this part, or methods validated for an application through procedures in Method 301 of appendix A of this part.

Title V permit means any permit issued, renewed, or revised pursuant to Federal or State regulations established to implement title V of the Act (42 U.S.C. 7661). A title V permit issued by a State permitting authority is called a part 70 permit in this part.

Visible emission means the observation of an emission of opacity or optical density above the threshold of vision.

Working day means any day on which Federal Government offices (or State government offices for a State that has obtained delegation under section 112(l)) are open for normal business. Saturdays, Sundays, and official Federal (or where delegated, State) holidays are not working days.

§ 63.3 Units and abbreviations.

Used in this part are abbreviations and symbols of units of measure. These are defined as follows:

(a) System International (SI) units of measure:

A = ampere

g = gram

Hz = hertz

J = joule

°K = degree Kelvin

kg = kilogram

l = liter

m = meter

APPENDIX A-1
40 CFR 63, Subpart A

National Emission Standards for Hazardous Air Pollutants for Source Categories: General Provisions

m³ = cubic meter
mg = milligram = 10⁻³ gram
ml = milliliter = 10⁻³ liter
mm = millimeter = 10⁻³ meter
Mg = megagram = 10⁶ gram = metric ton
MJ = megajoule
mol = mole
N = newton
ng = nanogram = 10⁻⁹ gram
nm = nanometer = 10⁻⁹ meter
Pa = pascal
s = second
V = volt
W = watt
Ω = ohm
μg = microgram = 10⁻⁶ gram
μl = microliter = 10⁻⁶ liter

(b) Other units of measure:

Btu = British thermal unit
°C = degree Celsius (centigrade)
cal = calorie
cfm = cubic feet per minute
cc = cubic centimeter
cu ft = cubic feet
d = day
dcf = dry cubic feet
dcm = dry cubic meter
dscf = dry cubic feet at standard conditions
dscm = dry cubic meter at standard conditions
eq = equivalent
°F = degree Fahrenheit
ft = feet
ft² = square feet
ft³ = cubic feet
gal = gallon
gr = grain
g-eq = gram equivalent
g-mole = gram mole
hr = hour
in. = inch
in. H₂O = inches of water
K = 1,000
kcal = kilocalorie
lb = pound
lpm = liter per minute
meq = milliequivalent
min = minute
MW = molecular weight
oz = ounces

APPENDIX A-1
40 CFR 63, Subpart A

National Emission Standards for Hazardous Air Pollutants for Source Categories: General Provisions

ppb = parts per billion
ppbw = parts per billion by weight
ppbv = parts per billion by volume
ppm = parts per million
ppmw = parts per million by weight
ppmv = parts per million by volume
psia = pounds per square inch absolute
psig = pounds per square inch gage
°R = degree Rankine
scf = cubic feet at standard conditions
scfh = cubic feet at standard conditions per hour
scm = cubic meter at standard conditions
scmm = cubic meter at standard conditions per minute
sec = second
sq ft = square feet
std = at standard conditions
v/v = volume per volume
yd² = square yards
yr = year

(c) Miscellaneous:

act = actual
avg = average
I.D. = inside diameter
M = molar
N = normal
O.D. = outside diameter
% = percent

§ 63.4 Prohibited activities and circumvention.

(a) *Prohibited activities.*

(1) No owner or operator subject to the provisions of this part must operate any affected source in violation of the requirements of this part. Affected sources subject to and in compliance with either an extension of compliance or an exemption from compliance are not in violation of the requirements of this part. An extension of compliance can be granted by the Administrator under this part; by a State with an approved permit program; or by the President under section 112(i)(4) of the Act.

(2) No owner or operator subject to the provisions of this part shall fail to keep records, notify, report, or revise reports as required under this part.

(3) [Reserved]
(4) [Reserved]
(5) [Reserved]

(b) *Circumvention.* No owner or operator subject to the provisions of this part shall build, erect, install, or use any article, machine, equipment, or process to conceal an emission that would otherwise constitute noncompliance with a relevant standard. Such concealment includes, but is not limited to

(1) The use of diluents to achieve compliance with a relevant standard based on the concentration of a pollutant in the effluent discharged to the atmosphere;

APPENDIX A-1
40 CFR 63, Subpart A

National Emission Standards for Hazardous Air Pollutants for Source Categories: General Provisions

- (2) The use of gaseous diluents to achieve compliance with a relevant standard for visible emissions;
and
(3) [Reserved]

(c) *Severability.* Notwithstanding any requirement incorporated into a title V permit obtained by an owner or operator subject to the provisions of this part, the provisions of this part are federally enforceable.

§ 63.5 Preconstruction review and notification requirements.

(a) *Applicability.*

(1) This section implements the preconstruction review requirements of section 112(i)(1) for sources subject to a relevant emission standard that has been promulgated in this part. In addition, this section includes other requirements for constructed and reconstructed stationary sources that are or become subject to a relevant promulgated emission standard.

(2) After the effective date of a relevant standard promulgated under this part, the requirements in this section apply to owners or operators who construct a new source or reconstruct a source after the proposal date of that standard. New or reconstructed sources that start up before the standard's effective date are not subject to the preconstruction review requirements specified in paragraphs (b)(3), (d), and (e) of this section.

(b) *Requirements for existing, newly constructed, and reconstructed sources.*

(1) A new affected source for which construction commences after proposal of a relevant standard is subject to relevant standards for new affected sources, including compliance dates. An affected source for which reconstruction commences after proposal of a relevant standard is subject to relevant standards for new sources, including compliance dates, irrespective of any change in emissions of hazardous air pollutants from that source.

(2) [Reserved]

(3) After the effective date of any relevant standard promulgated by the Administrator under this part, no person may, without obtaining written approval in advance from the Administrator in accordance with the procedures specified in paragraphs (d) and (e) of this section, do any of the following:

- (i) Construct a new affected source that is major-emitting and subject to such standard;
- (ii) Reconstruct an affected source that is major-emitting and subject to such standard; or
- (iii) Reconstruct a major source such that the source becomes an affected source that is

major-emitting and subject to the standard.

(4) After the effective date of any relevant standard promulgated by the Administrator under this part, an owner or operator who constructs a new affected source that is not major-emitting or reconstructs an affected source that is not major-emitting that is subject to such standard, or reconstructs a source such that the source becomes an affected source subject to the standard, must notify the Administrator of the intended construction or reconstruction. The notification must be submitted in accordance with the procedures in § 63.9(b).

(5) [Reserved]

(6) After the effective date of any relevant standard promulgated by the Administrator under this part, equipment added (or a process change) to an affected source that is within the scope of the definition of affected source under the relevant standard must be considered part of the affected source and subject to all provisions of the relevant standard established for that affected source.

(c) [Reserved]

APPENDIX A-1
40 CFR 63, Subpart A

National Emission Standards for Hazardous Air Pollutants for Source Categories: General Provisions

(d) *Application for approval of construction or reconstruction.* The provisions of this paragraph implement section 112(i)(1) of the Act.

(1) *General application requirements.*

- (i) (i) An owner or operator who is subject to the requirements of paragraph (b)(3) of this section must submit to the Administrator an application for approval of the construction or reconstruction. The application must be submitted as soon as practicable before actual construction or reconstruction begins. The application for approval of construction or reconstruction may be used to fulfill the initial notification requirements of § 63.9(b)(5). The owner or operator may submit the application for approval well in advance of the date actual construction or reconstruction begins in order to ensure a timely review by the Administrator and that the planned date to begin will not be delayed.

(ii) A separate application shall be submitted for each construction or reconstruction. Each application for approval of construction or reconstruction shall include at a minimum:

(A) The applicant's name and address;

(B) A notification of intention to construct a new major affected source or make any physical or operational change to a major affected source that may meet or has been determined to meet the criteria for a reconstruction, as defined in § 63.2 or in the relevant standard;

(C) The address (i.e., physical location) or proposed address of the source;

(D) An identification of the relevant standard that is the basis of the application;

(E) The expected date of the beginning of actual construction or reconstruction;

(F) The expected completion date of the construction or reconstruction;

(G) [Reserved]

(H) The type and quantity of hazardous air pollutants emitted by the source, reported in units and averaging times and in accordance with the test methods specified in the relevant standard, or if actual emissions data are not yet available, an estimate of the type and quantity of hazardous air pollutants expected to be emitted by the source reported in units and averaging times specified in the relevant standard. The owner or operator may submit percent reduction information if a relevant standard is established in terms of percent reduction. However, operating parameters, such as flow rate, shall be included in the submission to the extent that they demonstrate performance and compliance; and

(I) [Reserved]

(J) Other information as specified in paragraphs (d)(2) and (d)(3) of this section.

(iii) An owner or operator who submits estimates or preliminary information in place of the actual emissions data and analysis required in paragraphs (d)(1)(ii)(H) and (d)(2) of this section shall submit the actual, measured emissions data and other correct information as soon as available but no later than with the notification of compliance status required in § 63.9(h) (see § 63.9(h)(5)).

(2) *Application for approval of construction.* Each application for approval of construction must include, in addition to the information required in paragraph (d)(1)(ii) of this section, technical information describing the proposed nature, size, design, operating design capacity, and method of operation of the source, including an identification of each type of emission point for each type of hazardous air pollutant that is emitted (or could reasonably be anticipated to be emitted) and a description of the planned air pollution control system (equipment or method) for each emission point. The description of the equipment to be used for the control of emissions must include each control device for each hazardous air pollutant and the estimated control efficiency (percent) for each control device. The description of the method to be used for the control of emissions must include an estimated control efficiency (percent) for that method. Such technical information must include calculations of emission estimates in sufficient detail to permit assessment of the validity of the calculations.

APPENDIX A-1
40 CFR 63, Subpart A

National Emission Standards for Hazardous Air Pollutants for Source Categories: General Provisions

(3) *Application for approval of reconstruction.* Each application for approval of reconstruction shall include, in addition to the information required in paragraph (d)(1)(ii) of this section -

(i) A brief description of the affected source and the components that are to be replaced;

(ii) A description of present and proposed emission control systems (i.e., equipment or methods). The description of the equipment to be used for the control of emissions shall include each control device for each hazardous air pollutant and the estimated control efficiency (percent) for each control device. The description of the method to be used for the control of emissions shall include an estimated control efficiency (percent) for that method. Such technical information shall include calculations of emission estimates in sufficient detail to permit assessment of the validity of the calculations;

(iii) An estimate of the fixed capital cost of the replacements and of constructing a comparable entirely new source;

(iv) The estimated life of the affected source after the replacements; and

(v) A discussion of any economic or technical limitations the source may have in complying with relevant standards or other requirements after the proposed replacements. The discussion shall be sufficiently detailed to demonstrate to the Administrator's satisfaction that the technical or economic limitations affect the source's ability to comply with the relevant standard and how they do so.

(vi) If in the application for approval of reconstruction the owner or operator designates the affected source as a reconstructed source and declares that there are no economic or technical limitations to prevent the source from complying with all relevant standards or other requirements, the owner or operator need not submit the information required in paragraphs (d)(3)(iii) through (d)(3)(v) of this section.

(4) *Additional information.* The Administrator may request additional relevant information after the submittal of an application for approval of construction or reconstruction.

(e) *Approval of construction or reconstruction.*

(1) (i) If the Administrator determines that, if properly constructed, or reconstructed, and operated, a new or existing source for which an application under paragraph (d) of this section was submitted will not cause emissions in violation of the relevant standard(s) and any other federally enforceable requirements, the Administrator will approve the construction or reconstruction.

(ii) In addition, in the case of reconstruction, the Administrator's determination under this paragraph will be based on:

(A) The fixed capital cost of the replacements in comparison to the fixed capital cost that would be required to construct a comparable entirely new source;

(B) The estimated life of the source after the re-placements compared to the life of a comparable entirely new source;

(C) The extent to which the components being replaced cause or contribute to the emissions from the source; and

(D) Any economic or technical limitations on compliance with relevant standards that are inherent in the proposed replacements.

(2) (i) The Administrator will notify the owner or operator in writing of approval or intention to deny approval of construction or reconstruction within 60 calendar days after receipt of sufficient information to evaluate an application submitted under paragraph (d) of this section. The 60-day approval or denial period will begin after the owner or operator has been notified in writing that his/her application is complete. The Administrator will notify the owner or operator in writing of the status of his/her application, that is, whether the application contains sufficient information to make a determination, within 30 calendar days after receipt of the original application and within 30 calendar days after receipt of any supplementary information that is submitted.

(ii) When notifying the owner or operator that his/her application is not complete, the Administrator will specify the information needed to complete the application and provide notice of opportunity for the applicant to present, in writing, within 30 calendar days after he/she is notified of the

APPENDIX A-1
40 CFR 63, Subpart A

National Emission Standards for Hazardous Air Pollutants for Source Categories: General Provisions

incomplete application, additional information or arguments to the Administrator to enable further action on the application.

(3) Before denying any application for approval of construction or reconstruction, the Administrator will notify the applicant of the Administrator's intention to issue the denial together with -

(i) Notice of the information and findings on which the intended denial is based; and

(ii) Notice of opportunity for the applicant to present, in writing, within 30 calendar days after he/she is notified of the intended denial, additional information or arguments to the Administrator to enable further action on the application.

(4) A final determination to deny any application for approval will be in writing and will specify the grounds on which the denial is based. The final determination will be made within 60 calendar days of presentation of additional information or arguments (if the application is complete), or within 60 calendar days after the final date specified for presentation if no presentation is made.

(5) Neither the submission of an application for approval nor the Administrator's approval of construction or reconstruction shall -

(i) Relieve an owner or operator of legal responsibility for compliance with any applicable provisions of this part or with any other applicable Federal, State, or local requirement; or

(ii) Prevent the Administrator from implementing or enforcing this part or taking any other action under the Act.

(f) *Approval of construction or reconstruction based on prior State preconstruction review.*

(1) Preconstruction review procedures that a State utilizes for other purposes may also be utilized for purposes of this section if the procedures are substantially equivalent to those specified in this section. The Administrator will approve an application for construction or reconstruction specified in paragraphs (b)(3) and (d) of this section if the owner or operator of a new affected source or reconstructed affected source, who is subject to such requirement meets the following conditions:

(i) The owner or operator of the new affected source or reconstructed affected source has undergone a preconstruction review and approval process in the State in which the source is (or would be) located and has received a federally enforceable construction permit that contains a finding that the source will meet the relevant promulgated emission standard, if the source is properly built and operated.

(ii) Provide a statement from the State or other evidence (such as State regulations) that it considered the factors specified in paragraph (e)(1) of this section.

(2) The owner or operator must submit to the Administrator the request for approval of construction or reconstruction under this paragraph (f)(2) no later than the application deadline specified in paragraph (d)(1) of this section (see also § 63.9(b)(2)). The owner or operator must include in the request information sufficient for the Administrator's determination. The Administrator will evaluate the owner or operator's request in accordance with the procedures specified in paragraph (e) of this section. The Administrator may request additional relevant information after the submittal of a request for approval of construction or reconstruction under this paragraph (f)(2).

§ 63.6 Compliance with standards and maintenance requirements.

(a) *Applicability.*

(1) The requirements in this section apply to the owner or operator of affected sources for which any relevant standard has been established pursuant to section 112 of the Act and the applicability of such requirements is set out in accordance with § 63.1(a)(4) unless --

(i) The Administrator (or a State with an approved permit program) has granted an extension of compliance consistent with paragraph (i) of this section; or

APPENDIX A-1
40 CFR 63, Subpart A

National Emission Standards for Hazardous Air Pollutants for Source Categories: General Provisions

(ii) The President has granted an exemption from compliance with any relevant standard in accordance with section 112(i)(4) of the Act.

(2) If an area source that otherwise would be subject to an emission standard or other requirement established under this part if it were a major source subsequently increases its emissions of hazardous air pollutants (or its potential to emit hazardous air pollutants) such that the source is a major source, such source shall be subject to the relevant emission standard or other requirement.

(b) Compliance dates for new and reconstructed sources.

(1) Except as specified in paragraphs (b)(3) and (4) of this section, the owner or operator of a new or reconstructed affected source for which construction or reconstruction commences after proposal of a relevant standard that has an initial startup before the effective date of a relevant standard established under this part pursuant to section 112(d), (f), or (h) of the Act must comply with such standard not later than the standard's effective date.

(2) Except as specified in paragraphs (b)(3) and (4) of this section, the owner or operator of a new or reconstructed affected source that has an initial startup after the effective date of a relevant standard established under this part pursuant to section 112(d), (f), or (h) of the Act must comply with such standard upon startup of the source.

(3) The owner or operator of an affected source for which construction or reconstruction is commenced after the proposal date of a relevant standard established under this part pursuant to section 112(d), 112(f), or 112(h) of the Act but before the effective date (that is, promulgation) of such standard shall comply with the relevant emission standard not later than the date 3 years after the effective date if:

(i) The promulgated standard (that is, the relevant standard) is more stringent than the proposed standard; for purposes of this paragraph, a finding that controls or compliance methods are "more stringent" must include control technologies or performance criteria and compliance or compliance assurance methods that are different but are substantially equivalent to those required by the promulgated rule, as determined by the Administrator (or his or her authorized representative); and

(ii) The owner or operator complies with the standard as proposed during the 3-year period immediately after the effective date.

(4) The owner or operator of an affected source for which construction or reconstruction is commenced after the proposal date of a relevant standard established pursuant to section 112(d) of the Act but before the proposal date of a relevant standard established pursuant to section 112(f) shall not be required to comply with the section 112(f) emission standard until the date 10 years after the date construction or reconstruction is commenced, except that, if the section 112(f) standard is promulgated more than 10 years after construction or reconstruction is commenced, the owner or operator must comply with the standard as provided in paragraphs (b)(1) and (2) of this section.

(5) The owner or operator of a new source that is subject to the compliance requirements of paragraph (b)(3) or (4) of this section must notify the Administrator in accordance with § 63.9(d).

(6) [Reserved]

(7) When an area source becomes a major source by the addition of equipment or operations that meet the definition of new affected source in the relevant standard, the portion of the existing facility that is a new affected source must comply with all requirements of that standard applicable to new sources. The source owner or operator must comply with the relevant standard upon startup.

(c) Compliance dates for existing sources.

(1) After the effective date of a relevant standard established under this part pursuant to section 112(d) or 112(h) of the Act, the owner or operator of an existing source shall comply with such standard by the compliance date established by the Administrator in the applicable subpart(s) of this part. Except as otherwise provided for in section 112 of the Act, in no case will the compliance date established for an existing source in an applicable subpart of this part exceed 3 years after the effective date of such standard.

APPENDIX A-1
40 CFR 63, Subpart A

National Emission Standards for Hazardous Air Pollutants for Source Categories: General Provisions

(2) If an existing source is subject to a standard established under this part pursuant to section 112(f) of the Act, the owner or operator must comply with the standard by the date 90 days after the standard's effective date, or by the date specified in an extension granted to the source by the Administrator under paragraph (i)(4)(ii) of this section, whichever is later.

(3)–(4) [Reserved]

(5) Except as provided in paragraph (b)(7) of this section, the owner or operator of an area source that increases its emissions of (or its potential to emit) hazardous air pollutants such that the source becomes a major source shall be subject to relevant standards for existing sources. Such sources must comply by the date specified in the standards for existing area sources that become major sources. If no such compliance date is specified in the standards, the source shall have a period of time to comply with the relevant emission standard that is equivalent to the compliance period specified in the relevant standard for existing sources in existence at the time the standard becomes effective..

(d) [Reserved]

(e) *Operation and maintenance requirements.*

(1) (i) At all times, including periods of startup, shutdown, and malfunction, the owner or operator must operate and maintain any affected source, including associated air pollution control equipment and monitoring equipment, in a manner consistent with safety and good air pollution control practices for minimizing emissions. During a period of startup, shutdown, or malfunction, this general duty to minimize emissions requires that the owner or operator reduce emissions from the affected source to the greatest extent which is consistent with safety and good air pollution control practices. The general duty to minimize emissions during a period of startup, shutdown, or malfunction does not require the owner or operator to achieve emission levels that would be required by the applicable standard at other times if this is not consistent with safety and good air pollution control practices, nor does it require the owner or operator to make any further efforts to reduce emissions if levels required by the applicable standard have been achieved. Determination of whether such operation and maintenance procedures are being used will be based on information available to the Administrator which may include, but is not limited to, monitoring results, review of operation and maintenance procedures (including the startup, shutdown, and malfunction plan required in paragraph (e)(3) of this section), review of operation and maintenance records, and inspection of the source.

(ii) Malfunctions must be corrected as soon as practicable after their occurrence in accordance with the startup, shutdown, and malfunction plan required in paragraph (e)(3) of this section. To the extent that an unexpected event arises during a startup, shutdown, or malfunction, an owner or operator must comply by minimizing emissions during such a startup, shutdown, and malfunction event consistent with safety and good air pollution control practices.

(iii) Operation and maintenance requirements established pursuant to section 112 of the Act are enforceable independent of emissions limitations or other requirements in relevant standards.

(2) [Reserved]

(3) Startup, shutdown, and malfunction plan.

(i) The owner or operator of an affected source must develop and implement a written startup, shutdown, and malfunction plan that describes, in detail, procedures for operating and maintaining the source during periods of startup, shutdown, and malfunction, and a program of corrective action for malfunctioning process and air pollution control and monitoring equipment used to comply with the relevant standard.

(A) Ensure that, at all times, the owner or operator operates and maintains each affected source, including associated air pollution control and monitoring equipment, in a manner which satisfies the general duty to minimize emissions established by paragraph (e)(1)(i) of this section;

APPENDIX A-1
40 CFR 63, Subpart A

National Emission Standards for Hazardous Air Pollutants for Source Categories: General Provisions

(B) Ensure that owners or operators are prepared to correct malfunctions as soon as practicable after their occurrence in order to minimize excess emissions of hazardous air pollutants; and

(C) Reduce the reporting burden associated with periods of startup, shutdown, and malfunction (including corrective action taken to restore malfunctioning process and air pollution control equipment to its normal or usual manner of operation).

(ii) During periods of startup, shutdown, and malfunction, the owner or operator of an affected source must operate and maintain such source (including associated air pollution control and monitoring equipment) in accordance with the procedures specified in the startup, shutdown, and malfunction plan developed under paragraph (e)(3)(i) of this section.

(iii) When actions taken by the owner or operator during a startup, shutdown, or malfunction (including actions taken to correct a malfunction) are consistent with the procedures specified in the affected source's startup, shutdown, and malfunction plan, the owner or operator must keep records for that event which demonstrate that the procedures specified in the plan were followed. These records may take the form of a "checklist," or other effective form of recordkeeping that confirms conformance with the startup, shutdown, and malfunction plan for that event. In addition, the owner or operator must keep records of these events as specified in § 63.10(b), including records of the occurrence and duration of each startup, shutdown, or malfunction of operation and each malfunction of the air pollution control and monitoring equipment. Furthermore, the owner or operator shall confirm that actions taken during the relevant reporting period during periods of startup, shutdown, and malfunction were consistent with the affected source's startup, shutdown and malfunction plan in the semiannual (or more frequent) startup, shutdown, and malfunction report required in § 63.10(d)(5).

(iv) If an action taken by the owner or operator during a startup, shutdown, or malfunction (including an action taken to correct a malfunction) is not consistent with the procedures specified in the affected source's startup, shutdown, and malfunction plan, and the source exceeds any applicable emission limitation in the relevant emission standard, then the owner or operator must record the actions taken for that event and must report such actions within 2 working days after commencing actions inconsistent with the plan, followed by a letter within 7 working days after the end of the event, in accordance with Sec. 63.10(d)(5) (unless the owner or operator makes alternative reporting arrangements, in advance, with the Administrator).

(v) The owner or operator must maintain at the affected source a current startup, shutdown, and malfunction plan and must make the plan available upon request for inspection and copying by the Administrator. In addition, if the startup, shutdown, and malfunction plan is subsequently revised as provided in paragraph (e)(3)(viii) of this section, the owner or operator must maintain at the affected source each previous (i.e., superseded) version of the startup, shutdown, and malfunction plan, and must make each such previous version available for inspection and copying by the Administrator for a period of 5 years after revision of the plan. If at any time after adoption of a startup, shutdown, and malfunction plan the affected source ceases operation or is otherwise no longer subject to the provisions of this part, the owner or operator must retain a copy of the most recent plan for 5 years from the date the source ceases operation or is no longer subject to this part and must make the plan available upon request for inspection and copying by the Administrator. The Administrator may at any time request in writing that the owner or operator submit a copy of any startup, shutdown, and malfunction plan (or a portion thereof) which is maintained at the affected source or in the possession of the owner or operator. Upon receipt of such a request, the owner or operator must promptly submit a copy of the requested plan (or a portion thereof) to the Administrator. The Administrator must request that the owner or operator submit a particular startup, shutdown, or malfunction plan (or a portion thereof) whenever a member of the public submits a specific and reasonable request to

APPENDIX A-1
40 CFR 63, Subpart A

National Emission Standards for Hazardous Air Pollutants for Source Categories: General Provisions

examine or to receive a copy of that plan or portion of a plan. The owner or operator may elect to submit the required copy of any startup, shutdown, and malfunction plan to the Administrator in an electronic format. If the owner or operator claims that any portion of such a startup, shutdown, and malfunction plan is confidential business information entitled to protection from disclosure under section 114(c) of the Act or 40 CFR 2.301, the material which is claimed as confidential must be clearly designated in the submission.

(vi) To satisfy the requirements of this section to develop a startup, shutdown, and malfunction plan, the owner or operator may use the affected source's standard operating procedures (SOP) manual, or an Occupational Safety and Health Administration (OSHA) or other plan, provided the alternative plans meet all the requirements of this section and are made available for inspection or submitted when requested by the Administrator.

(vii) Based on the results of a determination made under paragraph (e)(1)(i) of this section, the Administrator may require that an owner or operator of an affected source make changes to the startup, shutdown, and malfunction plan for that source. The Administrator must require appropriate revisions to a startup, shutdown, and malfunction plan, if the Administrator finds that the plan:

(A) Does not address a startup, shutdown, or malfunction event that has occurred;

(B) Fails to provide for the operation of the source (including associated air pollution control and monitoring equipment) during a startup, shutdown, or malfunction event in a manner consistent with the general duty to minimize emissions established by paragraph (e)(1)(i) of this section;

(C) Does not provide adequate procedures for correcting malfunctioning process and/or air pollution control and monitoring equipment as quickly as practicable; or

(D) Includes an event that does not meet the definition of startup, shutdown, or malfunction listed in § 63.2.

(viii) The owner or operator may periodically revise the startup, shutdown, and malfunction plan for the affected source as necessary to satisfy the requirements of this part or to reflect changes in equipment or procedures at the affected source. Unless the permitting authority provides otherwise, the owner or operator may make such revisions to the startup, shutdown, and malfunction plan without prior approval by the Administrator or the permitting authority. However, each such revision to a startup, shutdown, and malfunction plan must be reported in the semiannual report required by § 63.10(d)(5). If the startup, shutdown, and malfunction plan fails to address or inadequately addresses an event that meets the characteristics of a malfunction but was not included in the startup, shutdown, and malfunction plan at the time the owner or operator developed the plan, the owner or operator must revise the startup, shutdown, and malfunction plan within 45 days after the event to include detailed procedures for operating and maintaining the source during similar malfunction events and a program of corrective action for similar malfunctions of process or air pollution control and monitoring equipment. In the event that the owner or operator makes any revision to the startup, shutdown, and malfunction plan which alters the scope of the activities at the source which are deemed to be a startup, shutdown, or malfunction, or otherwise modifies the applicability of any emission limit, work practice requirement, or other requirement in a standard established under this part, the revised plan shall not take effect until after the owner or operator has provided a written notice describing the revision to the permitting authority.

(ix) The title V permit for an affected source must require that the owner or operator adopt a startup, shutdown, and malfunction plan which conforms to the provisions of this part, and that the owner or operator operate and maintain the source in accordance with the procedures specified in the current startup, shutdown, and malfunction plan. However, any revisions made to the startup, shutdown, and malfunction plan

APPENDIX A-1
40 CFR 63, Subpart A

National Emission Standards for Hazardous Air Pollutants for Source Categories: General Provisions

in accordance with the procedures established by this part shall not be deemed to constitute permit revisions under part 70 or part 71 of this chapter. Moreover, none of the procedures specified by the startup, shutdown, and malfunction plan for an affected source shall be deemed to fall within the permit shield provision in section 504(f) of the Act.

(f) Compliance with nonopacity emission standards -

(1) *Applicability.* The non-opacity emission standards set forth in this part shall apply at all times except during periods of startup, shutdown, and malfunction, and as otherwise specified in an applicable subpart. If a startup, shutdown, or malfunction of one portion of an affected source does not affect the ability of particular emission points within other portions of the affected source to comply with the non-opacity emission standards set forth in this part, then that emission point must still be required to comply with the non-opacity emission standards and other applicable requirements.

(2) Methods for determining compliance.

(i) The Administrator will determine compliance with nonopacity emission standards in this part based on the results of performance tests conducted according to the procedures in § 63.7, unless otherwise specified in an applicable subpart of this part.

(ii) The Administrator will determine compliance with nonopacity emission standards in this part by evaluation of an owner or operator's conformance with operation and maintenance requirements, including the evaluation of monitoring data, as specified in § 63.6(e) and applicable subparts of this part.

(iii) If an affected source conducts performance testing at startup to obtain an operating permit in the State in which the source is located, the results of such testing may be used to demonstrate compliance with a relevant standard if -

(A) The performance test was conducted within a reasonable amount of time before an initial performance test is required to be conducted under the relevant standard;

(B) The performance test was conducted under representative operating conditions for the source;

(C) The performance test was conducted and the resulting data were reduced using EPA-approved test methods and procedures, as specified in § 63.7(e) of this subpart; and

(D) The performance test was appropriately quality-assured, as specified in § 63.7(c).

(iv) The Administrator will determine compliance with design, equipment, work practice, or operational emission standards in this part by review of records, inspection of the source, and other procedures specified in applicable subparts of this part.

(v) The Administrator will determine compliance with design, equipment, work practice, or operational emission standards in this part by evaluation of an owner or operator's conformance with operation and maintenance requirements, as specified in paragraph (e) of this section and applicable subparts of this part.

(3) *Finding of compliance.* The Administrator will make a finding concerning an affected source's compliance with a non-opacity emission standard, as specified in paragraphs (f)(1) and (2) of this section, upon obtaining all the compliance information required by the relevant standard (including the written reports of performance test results, monitoring results, and other information, if applicable), and information available to the Administrator pursuant to paragraph (e)(1)(i) of this section.

(g) Use of an alternative nonopacity emission standard.

(1) If, in the Administrator's judgment, an owner or operator of an affected source has established that an alternative means of emission limitation will achieve a reduction in emissions of a hazardous air pollutant from an affected source at least equivalent to the reduction in emissions of that pollutant from that source achieved under any design, equipment, work practice, or operational emission standard, or combination thereof, established under this part pursuant to section 112(h) of the Act, the Administrator will

APPENDIX A-1
40 CFR 63, Subpart A

National Emission Standards for Hazardous Air Pollutants for Source Categories: General Provisions

publish in the FEDERAL REGISTER a notice permitting the use of the alternative emission standard for purposes of compliance with the promulgated standard. Any FEDERAL REGISTER notice under this paragraph shall be published only after the public is notified and given the opportunity to comment. Such notice will restrict the permission to the stationary source(s) or category(ies) of sources from which the alternative emission standard will achieve equivalent emission reductions. The Administrator will condition permission in such notice on requirements to assure the proper operation and maintenance of equipment and practices required for compliance with the alternative emission standard and other requirements, including appropriate quality assurance and quality control requirements, that are deemed necessary.

(2) An owner or operator requesting permission under this paragraph shall, unless otherwise specified in an applicable subpart, submit a proposed test plan or the results of testing and monitoring in accordance with § 63.7 and § 63.8, a description of the procedures followed in testing or monitoring, and a description of pertinent conditions during testing or monitoring. Any testing or monitoring conducted to request permission to use an alternative nonopacity emission standard shall be appropriately quality assured and quality controlled, as specified in § 63.7 and § 63.8.

(3) The Administrator may establish general procedures in an applicable subpart that accomplish the requirements of paragraphs (g)(1) and (g)(2) of this section.

(h) Compliance with opacity and visible emission standards -

(1) *Applicability.* The opacity and visible emission standards set forth in this part must apply at all times except during periods of startup, shutdown, and malfunction, and as otherwise specified in an applicable subpart. If a startup, shutdown, or malfunction of one portion of an affected source does not affect the ability of particular emission points within other portions of the affected source to comply with the opacity and visible emission standards set forth in this part, then that emission point shall still be required to comply with the opacity and visible emission standards and other applicable requirements.

(2) Methods for determining compliance.

(i) The Administrator will determine compliance with opacity and visible emission standards in this part based on the results of the test method specified in an applicable subpart. Whenever a continuous opacity monitoring system (COMS) is required to be installed to determine compliance with numerical opacity emission standards in this part, compliance with opacity emission standards in this part shall be determined by using the results from the COMS. Whenever an opacity emission test method is not specified, compliance with opacity emission standards in this part shall be determined by conducting observations in accordance with Test Method 9 in appendix A of part 60 of this chapter or the method specified in paragraph (h)(7)(ii) of this section. Whenever a visible emission test method is not specified, compliance with visible emission standards in this part shall be determined by conducting observations in accordance with Test Method 22 in appendix A of part 60 of this chapter.

(ii) [Reserved]

(iii) If an affected source undergoes opacity or visible emission testing at startup to obtain an operating permit in the State in which the source is located, the results of such testing may be used to demonstrate compliance with a relevant standard if -

(A) The opacity or visible emission test was conducted within a reasonable amount of time before a performance test is required to be conducted under the relevant standard;

(B) The opacity or visible emission test was conducted under representative operating conditions for the source;

(C) The opacity or visible emission test was conducted and the resulting data were reduced using EPA-approved test methods and procedures, as specified in § 63.7(e); and

(D) The opacity or visible emission test was appropriately quality-assured, as specified in § 63.7(c) of this section.

(3) [Reserved]

APPENDIX A-1
40 CFR 63, Subpart A

National Emission Standards for Hazardous Air Pollutants for Source Categories: General Provisions

(4) *Notification of opacity or visible emission observations.* The owner or operator of an affected source shall notify the Administrator in writing of the anticipated date for conducting opacity or visible emission observations in accordance with § 63.9(f), if such observations are required for the source by a relevant standard.

(5) *Conduct of opacity or visible emission observations.* When a relevant standard under this part includes an opacity or visible emission standard, the owner or operator of an affected source shall comply with the following:

(i) For the purpose of demonstrating initial compliance, opacity or visible emission observations shall be conducted concurrently with the initial performance test required in § 63.7 unless one of the following conditions applies:

(A) If no performance test under § 63.7 is required, opacity or visible emission observations shall be conducted within 60 days after achieving the maximum production rate at which a new or reconstructed source will be operated, but not later than 120 days after initial startup of the source, or within 120 days after the effective date of the relevant standard in the case of new sources that start up before the standard's effective date. If no performance test under § 63.7 is required, opacity or visible emission observations shall be conducted within 120 days after the compliance date for an existing or modified source; or

(B) If visibility or other conditions prevent the opacity or visible emission observations from being conducted concurrently with the initial performance test required under § 63.7, or within the time period specified in paragraph (h)(5)(i)(A) of this section, the source's owner or operator shall reschedule the opacity or visible emission observations as soon after the initial performance test, or time period, as possible, but not later than 30 days thereafter, and shall advise the Administrator of the rescheduled date. The rescheduled opacity or visible emission observations shall be conducted (to the extent possible) under the same operating conditions that existed during the initial performance test conducted under § 63.7. The visible emissions observer shall determine whether visibility or other conditions prevent the opacity or visible emission observations from being made concurrently with the initial performance test in accordance with procedures contained in Test Method 9 or Test Method 22 in appendix A of part 60 of this chapter.

(ii) **Test duration specified in Subpart LLL (Attachment D).**

(iii) **Test duration specified in Subpart (Attachment D).**

(iv) **Test duration specified in Subpart (Attachment D).**

(v) Opacity readings of portions of plumes that contain condensed, uncombined water vapor shall not be used for purposes of determining compliance with opacity emission standards.

(6) *Availability of records.* The owner or operator of an affected source shall make available, upon request by the Administrator, such records that the Administrator deems necessary to determine the conditions under which the visual observations were made and shall provide evidence indicating proof of current visible observer emission certification.

(7) *Use of a continuous opacity monitoring system.*

(i) The owner or operator of an affected source required to use a continuous opacity monitoring system (COMS) shall record the monitoring data produced during a performance test required under § 63.7 and shall furnish the Administrator a written report of the monitoring results in accordance with the provisions of § 63.10(e)(4).

(ii) Whenever an opacity emission test method has not been specified in an applicable subpart, or an owner or operator of an affected source is required to conduct Test Method 9 observations (see appendix A of part 60 of this chapter), the owner or operator may submit, for compliance purposes, COMS data results produced during any performance test required under § 63.7 in lieu of Method 9 data. If the owner or operator elects to submit COMS data for compliance with the opacity emission standard, he or she shall notify the Administrator of that decision, in writing, simultaneously with the notification under § 63.7(b) of the date the performance test is scheduled to begin. Once the owner or operator of an affected source has

APPENDIX A-1
40 CFR 63, Subpart A

National Emission Standards for Hazardous Air Pollutants for Source Categories: General Provisions

notified the Administrator to that effect, the COMS data results will be used to determine opacity compliance during subsequent performance tests required under § 63.7, unless the owner or operator notifies the Administrator in writing to the contrary not later than with the notification under § 63.7(b) of the date the subsequent performance test is scheduled to begin.

(iii) For the purposes of determining compliance with the opacity emission standard during a performance test required under § 63.7 using COMS data, the COMS data shall be reduced to 6-minute averages over the duration of the mass emission performance test.

(iv) The owner or operator of an affected source using a COMS for compliance purposes is responsible for demonstrating that he/she has complied with the performance evaluation requirements of § 63.8(e), that the COMS has been properly maintained, operated, and data quality-assured, as specified in § 63.8(c) and § 63.8(d), and that the resulting data have not been altered in any way.

(v) Except as provided in paragraph (h)(7)(ii) of this section, the results of continuous monitoring by a COMS that indicate that the opacity at the time visual observations were made was not in excess of the emission standard are probative but not conclusive evidence of the actual opacity of an emission, provided that the affected source proves that, at the time of the alleged violation, the instrument used was properly maintained, as specified in § 63.8(c), and met Performance Specification 1 in appendix B of part 60 of this chapter, and that the resulting data have not been altered in any way.

(8) *Finding of compliance.* The Administrator will make a finding concerning an affected source's compliance with an opacity or visible emission standard upon obtaining all the compliance information required by the relevant standard (including the written reports of the results of the performance tests required by § 63.7, the results of Test Method 9 or another required opacity or visible emission test method, the observer certification required by paragraph (h)(6) of this section, and the continuous opacity monitoring system results, whichever is/are applicable) and any information available to the Administrator needed to determine whether proper operation and maintenance practices are being used.

(9) *Adjustment to an opacity emission standard.*

(i) If the Administrator finds under paragraph (h)(8) of this section that an affected source is in compliance with all relevant standards for which initial performance tests were conducted under § 63.7, but during the time such performance tests were conducted fails to meet any relevant opacity emission standard, the owner or operator of such source may petition the Administrator to make appropriate adjustment to the opacity emission standard for the affected source. Until the Administrator notifies the owner or operator of the appropriate adjustment, the relevant opacity emission standard remains applicable.

(ii) The Administrator may grant such a petition upon a demonstration by the owner or operator that -

(A) The affected source and its associated air pollution control equipment were operated and maintained in a manner to minimize the opacity of emissions during the performance tests;

(B) The performance tests were performed under the conditions established by the Administrator; and

(C) The affected source and its associated air pollution control equipment were incapable of being adjusted or operated to meet the relevant opacity emission standard.

(iii) The Administrator will establish an adjusted opacity emission standard for the affected source meeting the above requirements at a level at which the source will be able, as indicated by the performance and opacity tests, to meet the opacity emission standard at all times during which the source is meeting the mass or concentration emission standard. The Administrator will promulgate the new opacity emission standard in the FEDERAL REGISTER.

(iv) After the Administrator promulgates an adjusted opacity emission standard for an affected source, the owner or operator of such source shall be subject to the new opacity emission standard, and the new opacity emission standard shall apply to such source during any subsequent performance tests.

(i) *Extension of compliance with emission standards.*

APPENDIX A-1
40 CFR 63, Subpart A

National Emission Standards for Hazardous Air Pollutants for Source Categories: General Provisions

(1) Until an extension of compliance has been granted by the Administrator (or a State with an approved permit program) under this paragraph, the owner or operator of an affected source subject to the requirements of this section shall comply with all applicable requirements of this part.

(2) *Extension of compliance for early reductions and other reductions*

(i) *Early reductions.* Pursuant to section 112(i)(5) of the Act, if the owner or operator of an existing source demonstrates that the source has achieved a reduction in emissions of hazardous air pollutants in accordance with the provisions of subpart D of this part, the Administrator (or the State with an approved permit program) will grant the owner or operator an extension of compliance with specific requirements of this part, as specified in subpart D.

(ii) *Other reductions.* Pursuant to section 112(i)(6) of the Act, if the owner or operator of an existing source has installed best available control technology (BACT) (as defined in section 169(3) of the Act) or technology required to meet a lowest achievable emission rate (LAER) (as defined in section 171 of the Act) prior to the promulgation of an emission standard in this part applicable to such source and the same pollutant (or stream of pollutants) controlled pursuant to the BACT or LAER installation, the Administrator will grant the owner or operator an extension of compliance with such emission standard that will apply until the date 5 years after the date on which such installation was achieved, as determined by the Administrator.

(3) *Request for extension of compliance.* Paragraphs (i)(4) through (i)(7) of this section concern requests for an extension of compliance with a relevant standard under this part (except requests for an extension of compliance under paragraph (i)(2)(i) of this section will be handled through procedures specified in subpart D of this part).

(4) (i) (A) The owner or operator of an existing source who is unable to comply with a relevant standard established under this part pursuant to section 112(d) of the Act may request that the Administrator (or a State, when the State has an approved part 70 permit program and the source is required to obtain a part 70 permit under that program, or a State, when the State has been delegated the authority to implement and enforce the emission standard for that source) grant an extension allowing the source up to 1 additional year to comply with the standard, if such additional period is necessary for the installation of controls. An additional extension of up to 3 years may be added for mining waste operations, if the 1-year extension of compliance is insufficient to dry and cover mining waste in order to reduce emissions of any hazardous air pollutant. The owner or operator of an affected source who has requested an extension of compliance under this paragraph and who is otherwise required to obtain a title V permit shall apply for such permit or apply to have the source's title V permit revised to incorporate the conditions of the extension of compliance. The conditions of an extension of compliance granted under this paragraph will be incorporated into the affected source's title V permit according to the provisions of part 70 or Federal title V regulations in this chapter (42 U.S.C. 7661), whichever are applicable.

(B) Any request under this paragraph for an extension of compliance with a relevant standard must be submitted in writing to the appropriate authority no later than 120 days prior to the affected source's compliance date (as specified in paragraphs (b) and (c) of this section), except as provided for in paragraph (i)(4)(i)(C) of this section. Nonfrivolous requests submitted under this paragraph will stay the applicability of the rule as to the emission points in question until such time as the request is granted or denied. A denial will be effective as of the date of denial. Emission standards established under this part may specify alternative dates for the submittal of requests for an extension of compliance if alternatives are appropriate for the source categories affected by those standards.

(C) An owner or operator may submit a compliance extension request after the date specified in paragraph (i)(4)(i)(B) of this section provided the need for the compliance extension arose after that date, and before the otherwise applicable compliance date and the need arose due to circumstances beyond reasonable control of the owner or operator. This request must include, in addition to the information required in paragraph (i)(6)(i) of this section, a statement of the reasons additional time is needed and the date when the owner or operator first learned of the problems. Nonfrivolous requests submitted under this paragraph will

APPENDIX A-1
40 CFR 63, Subpart A

National Emission Standards for Hazardous Air Pollutants for Source Categories: General Provisions

stay the applicability of the rule as to the emission points in question until such time as the request is granted or denied. A denial will be effective as of the original compliance date.

(ii) The owner or operator of an existing source unable to comply with a relevant standard established under this part pursuant to section 112(f) of the Act may request that the Administrator grant an extension allowing the source up to 2 years after the standard's effective date to comply with the standard. The Administrator may grant such an extension if he/she finds that such additional period is necessary for the installation of controls and that steps will be taken during the period of the extension to assure that the health of persons will be protected from imminent endangerment. Any request for an extension of compliance with a relevant standard under this paragraph must be submitted in writing to the Administrator not later than 90 calendar days after the effective date of the relevant standard.

(5) The owner or operator of an existing source that has installed BACT or technology required to meet LAER [as specified in paragraph (i)(2)(ii) of this section] prior to the promulgation of a relevant emission standard in this part may request that the Administrator grant an extension allowing the source 5 years from the date on which such installation was achieved, as determined by the Administrator, to comply with the standard. Any request for an extension of compliance with a relevant standard under this paragraph shall be submitted in writing to the Administrator not later than 120 days after the promulgation date of the standard. The Administrator may grant such an extension if he or she finds that the installation of BACT or technology to meet LAER controls the same pollutant (or stream of pollutants) that would be controlled at that source by the relevant emission standard.

(6) (i) The request for a compliance extension under paragraph (i)(4) of this section shall include the following information:

(A) A description of the controls to be installed to comply with the standard;

(B) A compliance schedule, including the date by which each step toward compliance will be reached. At a minimum, the list of dates shall include:

(1) The date by which on-site construction, installation of emission control equipment, or a process change is planned to be initiated; and

(2) The date by which final compliance is to be achieved;

(C) [Reserved]

(D) [Reserved]

(ii) The request for a compliance extension under paragraph (i)(5) of this section shall include all information needed to demonstrate to the Administrator's satisfaction that the installation of BACT or technology to meet LAER controls the same pollutant (or stream of pollutants) that would be controlled at that source by the relevant emission standard.

(7) Advice on requesting an extension of compliance may be obtained from the Administrator (or the State with an approved permit program).

(8) *Approval of request for extension of compliance.* Paragraphs (i)(9) through (i)(14) of this section concern approval of an extension of compliance requested under paragraphs (i)(4) through (i)(6) of this section.

(9) Based on the information provided in any request made under paragraphs (i)(4) through (i)(6) of this section, or other information, the Administrator (or the State with an approved permit program) may grant an extension of compliance with an emission standard, as specified in paragraphs (i)(4) and (i)(5) of this section.

(10) The extension will be in writing and will -

(i) Identify each affected source covered by the extension;

(ii) Specify the termination date of the extension;

(iii) Specify the dates by which steps toward compliance are to be taken, if appropriate;

(iv) Specify other applicable requirements to which the compliance extension applies (e.g., performance tests); and

APPENDIX A-1
40 CFR 63, Subpart A

National Emission Standards for Hazardous Air Pollutants for Source Categories: General Provisions

(v) (A) Under paragraph (i)(4), specify any additional conditions that the Administrator (or the State) deems necessary to assure installation of the necessary controls and protection of the health of persons during the extension period; or

(B) Under paragraph (i)(5), specify any additional conditions that the Administrator deems necessary to assure the proper operation and maintenance of the installed controls during the extension period.

(11) The owner or operator of an existing source that has been granted an extension of compliance under paragraph (i)(10) of this section may be required to submit to the Administrator (or the State with an approved permit program) progress reports indicating whether the steps toward compliance outlined in the compliance schedule have been reached. The contents of the progress reports and the dates by which they shall be submitted will be specified in the written extension of compliance granted under paragraph (i)(10) of this section.

(12) (i) The Administrator (or the State with an approved permit program) will notify the owner or operator in writing of approval or intention to deny approval of a request for an extension of compliance within 30 calendar days after receipt of sufficient information to evaluate a request submitted under paragraph (i)(4)(i) or (i)(5) of this section. The Administrator (or the State) will notify the owner or operator in writing of the status of his/her application, that is, whether the application contains sufficient information to make a determination, within 30 calendar days after receipt of the original application and within 30 calendar days after receipt of any supplementary information that is submitted. The 30-day approval or denial period will begin after the owner or operator has been notified in writing that his/her application is complete.

(ii) When notifying the owner or operator that his/her application is not complete, the Administrator will specify the information needed to complete the application and provide notice of opportunity for the applicant to present, in writing, within 30 calendar days after he/she is notified of the incomplete application, additional information or arguments to the Administrator to enable further action on the application.

(iii) Before denying any request for an extension of compliance, the Administrator (or the State with an approved permit program) will notify the owner or operator in writing of the Administrator's (or the State's) intention to issue the denial, together with -

(A) Notice of the information and findings on which the intended denial is based; and

(B) Notice of opportunity for the owner or operator to present in writing, within 15 calendar days after he/she is notified of the intended denial, additional information or arguments to the Administrator (or the State) before further action on the request.

(iv) The Administrator's final determination to deny any request for an extension will be in writing and will set forth the specific grounds on which the denial is based. The final determination will be made within 30 calendar days after presentation of additional information or argument (if the application is complete), or within 30 calendar days after the final date specified for the presentation if no presentation is made.

(13) (i) The Administrator will notify the owner or operator in writing of approval or intention to deny approval of a request for an extension of compliance within 30 calendar days after receipt of sufficient information to evaluate a request submitted under paragraph (i)(4)(ii) of this section. The 30-day approval or denial period will begin after the owner or operator has been notified in writing that his/her application is complete. The Administrator (or the State) will notify the owner or operator in writing of the status of his/her application, that is, whether the application contains sufficient information to make a determination, within 15 calendar days after receipt of the original application and within 15 calendar days after receipt of any supplementary information that is submitted.

(ii) When notifying the owner or operator that his/her application is not complete, the Administrator will specify the information needed to complete the application and provide notice of opportunity for the applicant to present, in writing, within 15 calendar days after he/she is notified of the

APPENDIX A-1
40 CFR 63, Subpart A

National Emission Standards for Hazardous Air Pollutants for Source Categories: General Provisions

incomplete application, additional information or arguments to the Administrator to enable further action on the application.

(iii) Before denying any request for an extension of compliance, the Administrator will notify the owner or operator in writing of the Administrator's intention to issue the denial, together with -

(A) Notice of the information and findings on which the intended denial is based; and

(B) Notice of opportunity for the owner or operator to present in writing, within 15 calendar days after he/she is notified of the intended denial, additional information or arguments to the Administrator before further action on the request.

(iv) A final determination to deny any request for an extension will be in writing and will set forth the specific grounds on which the denial is based. The final determination will be made within 30 calendar days after presentation of additional information or argument (if the application is complete), or within 30 calendar days after the final date specified for the presentation if no presentation is made.

(14) The Administrator (or the State with an approved permit program) may terminate an extension of compliance at an earlier date than specified if any specification under paragraph (i)(10)(iii) or (iv) of this section is not met. Upon a determination to terminate, the Administrator will notify, in writing, the owner or operator of the Administrator's determination to terminate, together with:

(i) Notice of the reason for termination; and

(ii) Notice of opportunity for the owner or operator to present in writing, within 15 calendar days after he/she is notified of the determination to terminate, additional information or arguments to the Administrator before further action on the termination.

(iii) A final determination to terminate an extension of compliance will be in writing and will set forth the specific grounds on which the termination is based. The final determination will be made within 30 calendar days after presentation of additional information or arguments, or within 30 calendar days after the final date specified for the presentation if no presentation is made.

(15) [Reserved]

(16) The granting of an extension under this section shall not abrogate the Administrator's authority under section 114 of the Act.

(j) *Exemption from compliance with emission standards.* The President may exempt any stationary source from compliance with any relevant standard established pursuant to section 112 of the Act for a period of not more than 2 years if the President determines that the technology to implement such standard is not available and that it is in the national security interests of the United States to do so. An exemption under this paragraph may be extended for 1 or more additional periods, each period not to exceed 2 years.

§ 63.7 Performance testing requirements.

(a) *Applicability and performance test dates.* {§ 63.1349 has specific requirements}

(1) The applicability of this section is set out in § 63.1(a)(4).

(2) If required to do performance testing by a relevant standard, and unless a waiver of performance testing is obtained under this section or the conditions of paragraph (c)(3)(ii)(B) of this section apply, the owner or operator of the affected source must perform such tests within 180 days of the compliance date for such source.

(i)- (viii) [Reserved]

(ix) When an emission standard promulgated under this part is more stringent than the standard proposed (see § 63.6(b)(3)), the owner or operator of a new or reconstructed source subject to that standard for which construction or reconstruction is commenced between the proposal and promulgation dates of the standard shall comply with performance testing requirements within 180 days after the standard's effective date, or within 180 days after startup of the source, whichever is later. If the promulgated standard is more stringent than the proposed standard, the owner or operator may choose to demonstrate compliance with

APPENDIX A-1
40 CFR 63, Subpart A

National Emission Standards for Hazardous Air Pollutants for Source Categories: General Provisions

either the proposed or the promulgated standard. If the owner or operator chooses to comply with the proposed standard initially, the owner or operator shall conduct a second performance test within 3 years and 180 days after the effective date of the standard, or after startup of the source, whichever is later, to demonstrate compliance with the promulgated standard.

(3) The Administrator may require an owner or operator to conduct performance tests at the affected source at any other time when the action is authorized by section 114 of the Act.

(b) Notification of performance test.

(1) The owner or operator of an affected source must notify the Administrator in writing of his or her intention to conduct a performance test at least 60 calendar days before the performance test is initially scheduled to begin to allow the Administrator, upon request, to review and approve the site-specific test plan required under paragraph (c) of this section and to have an observer present during the test.

(2) In the event the owner or operator is unable to conduct the performance test on the date specified in the notification requirement specified in paragraph (b)(1) of this section due to unforeseeable circumstances beyond his or her control, the owner or operator must notify the Administrator as soon as practicable and without delay prior to the scheduled performance test date and specify the date when the performance test is rescheduled. This notification of delay in conducting the performance test shall not relieve the owner or operator of legal responsibility for compliance with any other applicable provisions of this part or with any other applicable Federal, State, or local requirement, nor will it prevent the Administrator from implementing or enforcing this part or taking any other action under the Act.

(c) Quality assurance program.

(1) The results of the quality assurance program required in this paragraph will be considered by the Administrator when he/she determines the validity of a performance test.

(2) (i) *Submission of site-specific test plan.* Before conducting a required performance test, the owner or operator of an affected source shall develop and, if requested by the Administrator, shall submit a site-specific test plan to the Administrator for approval. The test plan shall include a test program summary, the test schedule, data quality objectives, and both an internal and external quality assurance (QA) program. Data quality objectives are the pretest expectations of precision, accuracy, and completeness of data.

(ii) The internal QA program shall include, at a minimum, the activities planned by routine operators and analysts to provide an assessment of test data precision; an example of internal QA is the sampling and analysis of replicate samples.

(iii) The external QA program shall include, at a minimum, application of plans for a test method performance audit (PA) during the performance test. The PA's consist of blind audit samples provided by the Administrator and analyzed during the performance test in order to provide a measure of test data bias. The external QA program may also include systems audits that include the opportunity for on-site evaluation by the Administrator of instrument calibration, data validation, sample logging, and documentation of quality control data and field maintenance activities.

(iv) The owner or operator of an affected source shall submit the site-specific test plan to the Administrator upon the Administrator's request at least 60 calendar days before the performance test is scheduled to take place, that is, simultaneously with the notification of intention to conduct a performance test required under paragraph (b) of this section, or on a mutually agreed upon date.

(v) The Administrator may request additional relevant information after the submittal of a site-specific test plan.

(3) Approval of site-specific test plan.

(i) The Administrator will notify the owner or operator of approval or intention to deny approval of the site-specific test plan (if review of the site-specific test plan is requested) within 30 calendar days after receipt of the original plan and within 30 calendar days after receipt of any supplementary information that is submitted under paragraph (c)(3)(i)(B) of this section. Before disapproving any site-

APPENDIX A-1
40 CFR 63, Subpart A

National Emission Standards for Hazardous Air Pollutants for Source Categories: General Provisions

specific test plan, the Administrator will notify the applicant of the Administrator's intention to disapprove the plan together with -

(A) Notice of the information and findings on which the intended disapproval is based; and

(B) Notice of opportunity for the owner or operator to present, within 30 calendar days after he/she is notified of the intended disapproval, additional information to the Administrator before final action on the plan.

(ii) In the event that the Administrator fails to approve or disapprove the site-specific test plan within the time period specified in paragraph (c)(3)(i) of this section, the following conditions shall apply:

(A) If the owner or operator intends to demonstrate compliance using the test method(s) specified in the relevant standard or with only minor changes to those tests methods (see paragraph (e)(2)(i) of this section), the owner or operator must conduct the performance test within the time specified in this section using the specified method(s);

(B) If the owner or operator intends to demonstrate compliance by using an alternative to any test method specified in the relevant standard, the owner or operator is authorized to conduct the performance test using an alternative test method after the Administrator approves the use of the alternative method when the Administrator approves the site-specific test plan (if review of the site-specific test plan is requested) or after the alternative method is approved (see paragraph (f) of this section). However, the owner or operator is authorized to conduct the performance test using an alternative method in the absence of notification of approval 45 days after submission of the site-specific test plan or request to use an alternative method. The owner or operator is authorized to conduct the performance test within 60 calendar days after he/she is authorized to demonstrate compliance using an alternative test method. Notwithstanding the requirements in the preceding three sentences, the owner or operator may proceed to conduct the performance test as required in this section (without the Administrator's prior approval of the site-specific test plan) if he/she subsequently chooses to use the specified testing and monitoring methods instead of an alternative.

(iii) Neither the submission of a site-specific test plan for approval, nor the Administrator's approval or disapproval of a plan, nor the Administrator's failure to approve or disapprove a plan in a timely manner shall -

(A) Relieve an owner or operator of legal responsibility for compliance with any applicable provisions of this part or with any other applicable Federal, State, or local requirement; or

(B) Prevent the Administrator from implementing or enforcing this part or taking any other action under the Act.

(4) (i) *Performance test method audit program.* The owner or operator must analyze performance audit (PA) samples during each performance test. The owner or operator must request performance audit materials 30 days prior to the test date. Audit materials including cylinder audit gases may be obtained by contacting the appropriate EPA Regional Office or the responsible enforcement authority.

(ii) The Administrator will have sole discretion to require any subsequent remedial actions of the owner or operator based on the PA results.

(iii) If the Administrator fails to provide required PA materials to an owner or operator of an affected source in time to analyze the PA samples during a performance test, the requirement to conduct a PA under this paragraph shall be waived for such source for that performance test. Waiver under this paragraph of the requirement to conduct a PA for a particular performance test does not constitute a waiver of the requirement to conduct a PA for future required performance tests.

(d) *Performance testing facilities.* If required to do performance testing, the owner or operator of each new source and, at the request of the Administrator, the owner or operator of each existing source, shall provide performance testing facilities as follows:

(1) Sampling ports adequate for test methods applicable to such source. This includes:

APPENDIX A-1
40 CFR 63, Subpart A

National Emission Standards for Hazardous Air Pollutants for Source Categories: General Provisions

(i) Constructing the air pollution control system such that volumetric flow rates and pollutant emission rates can be accurately determined by applicable test methods and procedures; and

(ii) Providing a stack or duct free of cyclonic flow during performance tests, as demonstrated by applicable test methods and procedures;

(2) Safe sampling platform(s);

(3) Safe access to sampling platform(s);

(4) Utilities for sampling and testing equipment; and

(5) Any other facilities that the Administrator deems necessary for safe and adequate testing of a source.

(e) Conduct of performance tests.

(1) Performance tests shall be conducted under such conditions as the Administrator specifies to the owner or operator based on representative performance (i.e., performance based on normal operating conditions) of the affected source. Operations during periods of startup, shutdown, and malfunction shall not constitute representative conditions for the purpose of a performance test, nor shall emissions in excess of the level of the relevant standard during periods of startup, shutdown, and malfunction be considered a violation of the relevant standard unless otherwise specified in the relevant standard or a determination of noncompliance is made under § 63.6(e). Upon request, the owner or operator shall make available to the Administrator such records as may be necessary to determine the conditions of performance tests.

(2) Performance tests shall be conducted and data shall be reduced in accordance with the test methods and procedures set forth in this section, in each relevant standard, and, if required, in applicable appendices of parts 51, 60, 61, and 63 of this chapter unless the Administrator -

(i) Specifies or approves, in specific cases, the use of a test method with minor changes in methodology (see definition in § 63.90(a)). Such changes may be approved in conjunction with approval of the site-specific test plan (see paragraph (c) of this section); or

(ii) Approves the use of an intermediate or major change or alternative to a test method (see definitions in § 63.90(a)), the results of which the Administrator has determined to be adequate for indicating whether a specific affected source is in compliance; or

(iii) Approves shorter sampling times or smaller sample volumes when necessitated by process variables or other factors; or

(iv) Waives the requirement for performance tests because the owner or operator of an affected source has demonstrated by other means to the Administrator's satisfaction that the affected source is in compliance with the relevant standard.

(3) Unless otherwise specified in a relevant standard or test method, each performance test shall consist of three separate runs using the applicable test method. Each run shall be conducted for the time and under the conditions specified in the relevant standard. For the purpose of determining compliance with a relevant standard, the arithmetic mean of the results of the three runs shall apply. Upon receiving approval from the Administrator, results of a test run may be replaced with results of an additional test run in the event that

(i) A sample is accidentally lost after the testing team leaves the site; or

(ii) Conditions occur in which one of the three runs must be discontinued because of forced shutdown; or

(iii) Extreme meteorological conditions occur; or

(iv) Other circumstances occur that are beyond the owner or operator's control.

(4) Nothing in paragraphs (e)(1) through (e)(3) of this section shall be construed to abrogate the Administrator's authority to require testing under section 114 of the Act.

(f) Use of an alternative test method -

APPENDIX A-1
40 CFR 63, Subpart A

National Emission Standards for Hazardous Air Pollutants for Source Categories: General Provisions

(1) *General.* Until authorized to use an intermediate or major change or alternative to a test method, the owner or operator of an affected source remains subject to the requirements of this section and the relevant standard.

(2) The owner or operator of an affected source required to do performance testing by a relevant standard may use an alternative test method from that specified in the standard provided that the owner or operator -

(i) Notifies the Administrator of his or her intention to use an alternative test method at least 60 days before the performance test is scheduled to begin;

(ii) Uses Method 301 in appendix A of this part to validate the alternative test method. This may include the use of specific procedures of Method 301 if use of such procedures are sufficient to validate the alternative test method; and

(iii) Submits the results of the Method 301 validation process along with the notification of intention and the justification for not using the specified test method. The owner or operator may submit the information required in this paragraph well in advance of the deadline specified in paragraph (f)(2)(i) of this section to ensure a timely review by the Administrator in order to meet the performance test date specified in this section or the relevant standard.

(3) The Administrator will determine whether the owner or operator's validation of the proposed alternative test method is adequate and issue an approval or disapproval of the alternative test method. If the owner or operator intends to demonstrate compliance by using an alternative to any test method specified in the relevant standard, the owner or operator is authorized to conduct the performance test using an alternative test method after the Administrator approves the use of the alternative method. However, the owner or operator is authorized to conduct the performance test using an alternative method in the absence of notification of approval/disapproval 45 days after submission of the request to use an alternative method and the request satisfies the requirements in paragraph (f)(2) of this section. The owner or operator is authorized to conduct the performance test within 60 calendar days after he/she is authorized to demonstrate compliance using an alternative test method. Notwithstanding the requirements in the preceding three sentences, the owner or operator may proceed to conduct the performance test as required in this section (without the Administrator's prior approval of the site-specific test plan) if he/she subsequently chooses to use the specified testing and monitoring methods instead of an alternative.

(4) If the Administrator finds reasonable grounds to dispute the results obtained by an alternative test method for the purposes of demonstrating compliance with a relevant standard, the Administrator may require the use of a test method specified in a relevant standard.

(5) If the owner or operator uses an alternative test method for an affected source during a required performance test, the owner or operator of such source shall continue to use the alternative test method for subsequent performance tests at that affected source until he or she receives approval from the Administrator to use another test method as allowed under § 63.7(f).

(6) Neither the validation and approval process nor the failure to validate an alternative test method shall abrogate the owner or operator's responsibility to comply with the requirements of this part.

(g) Data analysis, recordkeeping, and reporting.

(1) Unless otherwise specified in a relevant standard or test method, or as otherwise approved by the Administrator in writing, results of a performance test shall include the analysis of samples, determination of emissions, and raw data. A performance test is "completed" when field sample collection is terminated. The owner or operator of an affected source shall report the results of the performance test to the Administrator before the close of business on the 60th day following the completion of the performance test, unless specified otherwise in a relevant standard or as approved otherwise in writing by the Administrator (see § 63.9(i)). The results of the performance test shall be submitted as part of the notification of compliance status required under § 63.9(h). Before a title V permit has been issued to the owner or operator of an affected

APPENDIX A-1
40 CFR 63, Subpart A

National Emission Standards for Hazardous Air Pollutants for Source Categories: General Provisions

source, the owner or operator shall send the results of the performance test to the Administrator. After a title V permit has been issued to the owner or operator of an affected source, the owner or operator shall send the results of the performance test to the appropriate permitting authority.

(2) [Reserved]

(3) For a minimum of 5 years after a performance test is conducted, the owner or operator shall retain and make available, upon request, for inspection by the Administrator the records or results of such performance test and other data needed to determine emissions from an affected source.

(h) *Waiver of performance tests.*

(1) Until a waiver of a performance testing requirement has been granted by the Administrator under this paragraph, the owner or operator of an affected source remains subject to the requirements of this section.

(2) Individual performance tests may be waived upon written application to the Administrator if, in the Administrator's judgment, the source is meeting the relevant standard(s) on a continuous basis, or the source is being operated under an extension of compliance, or the owner or operator has requested an extension of compliance and the Administrator is still considering that request.

(3) Request to waive a performance test.

(i) If a request is made for an extension of compliance under § 63.6(i), the application for a waiver of an initial performance test shall accompany the information required for the request for an extension of compliance. If no extension of compliance is requested or if the owner or operator has requested an extension of compliance and the Administrator is still considering that request, the application for a waiver of an initial performance test shall be submitted at least 60 days before the performance test if the site-specific test plan under paragraph (c) of this section is not submitted.

(ii) If an application for a waiver of a subsequent performance test is made, the application may accompany any required compliance progress report, compliance status report, or excess emissions and continuous monitoring system performance report [such as those required under § 63.6(l), § 63.9(h), and § 63.10(e) or specified in a relevant standard or in the source's title V permit], but it shall be submitted at least 60 days before the performance test if the site-specific test plan required under paragraph (c) of this section is not submitted.

(iii) Any application for a waiver of a performance test shall include information justifying the owner or operator's request for a waiver, such as the technical or economic infeasibility, or the impracticality, of the affected source performing the required test.

(4) Approval of request to waive performance test. The Administrator will approve or deny a request for a waiver of a performance test made under paragraph (h)(3) of this section when he/she -

(i) Approves or denies an extension of compliance under § 63.6(i)(8); or

(ii) Approves or disapproves a site-specific test plan under § 63.7(c)(3); or

(iii) Makes a determination of compliance following the submission of a required compliance status report or excess emissions and continuous monitoring systems performance report; or

(iv) Makes a determination of suitable progress towards compliance following the submission of a compliance progress report, whichever is applicable.

(5) Approval of any waiver granted under this section shall not abrogate the Administrator's authority under the Act or in any way prohibit the Administrator from later canceling the waiver. The cancellation will be made only after notice is given to the owner or operator of the affected source.

§ 63.8 Monitoring requirements.

(a) *Applicability.*

(1) The applicability of this section is set out in § 63.1(a)(4).

(2) **§ 63.1350 includes CEM requirements.**

(3) [Reserved]

APPENDIX A-1
40 CFR 63, Subpart A

National Emission Standards for Hazardous Air Pollutants for Source Categories: General Provisions

(4) Flares not applicable.

(b) Conduct of monitoring.

(1) Monitoring shall be conducted as set forth in this section and the relevant standard(s) unless the Administrator -

(i) Specifies or approves the use of minor changes in methodology for the specified monitoring requirements and procedures (see § 63.90(a) for definition); or

(ii) Approves the use of an intermediate or major change or alternative to any monitoring requirements or procedures (see § 63.90(a) for definition).

(iii) Owners or operators with flares subject to § 63.11(b) are not subject to the requirements of this section unless otherwise specified in the relevant standard.

(2) (i) When the emissions from two or more affected sources are combined before being released to the atmosphere, the owner or operator may install an applicable CMS for each emission stream or for the combined emissions streams, provided the monitoring is sufficient to demonstrate compliance with the relevant standard.

(ii) If the relevant standard is a mass emission standard and the emissions from one affected source are released to the atmosphere through more than one point, the owner or operator must install an applicable CMS at each emission point unless the installation of fewer systems is -

(A) Approved by the Administrator; or

(B) Provided for in a relevant standard (e.g., instead of requiring that a CMS be installed at each emission point before the effluents from those points are channeled to a common control device, the standard specifies that only one CMS is required to be installed at the vent of the control device).

(3) When more than one CMS is used to measure the emissions from one affected source (e.g., multiple breechings, multiple outlets), the owner or operator shall report the results as required for each CMS. However, when one CMS is used as a backup to another CMS, the owner or operator shall report the results from the CMS used to meet the monitoring requirements of this part. If both such CMS are used during a particular reporting period to meet the monitoring requirements of this part, then the owner or operator shall report the results from each CMS for the relevant compliance period.

(c) Operation and maintenance of continuous monitoring systems. Performance specification supersedes requirements for THC CEM. Temperature and activated carbon injection monitoring data reduction requirements given in subpart LLL (Attachment D).

(1) The owner or operator of an affected source shall maintain and operate each CMS as specified in this section, or in a relevant standard, and in a manner consistent with good air pollution control practices.

(i) The owner or operator of an affected source must maintain and operate each CMS as specified in § 63.6(e)(1).

(ii) The owner or operator must keep the necessary parts for routine repairs of the affected CMS equipment readily available.

(iii) The owner or operator of an affected source must develop and implement a written startup, shutdown, and malfunction plan for CMS as specified in § 63.6(e)(3).

(2) (i) All CMS must be installed such that representative measures of emissions or process parameters from the affected source are obtained. In addition, CEMS must be located according to procedures contained in the applicable performance specification(s).

(ii) Unless the individual subpart states otherwise, the owner or operator must ensure the read out (that portion of the CMS that provides a visual display or record), or other indication of operation, from any CMS required for compliance with the emission standard is readily accessible on site for operational control or inspection by the operator of the equipment.

(3) All CMS shall be installed, operational, and the data verified as specified in the relevant standard either prior to or in conjunction with conducting performance tests under § 63.7. Verification of operational

APPENDIX A-1
40 CFR 63, Subpart A

National Emission Standards for Hazardous Air Pollutants for Source Categories: General Provisions

status shall, at a minimum, include completion of the manufacturer's written specifications or recommendations for installation, operation, and calibration of the system.

(4) Except for system breakdowns, out-of-control periods, repairs, maintenance periods, calibration checks, and zero (low-level) and high-level calibration drift adjustments, all CMS, including COMS and CEMS, shall be in continuous operation and shall meet minimum frequency of operation requirements as follows:

(i) All COMS shall complete a minimum of one cycle of sampling and analyzing for each successive 10-second period and one cycle of data recording for each successive 6-minute period.

(ii) All CEMS for measuring emissions other than opacity shall complete a minimum of one cycle of operation (sampling, analyzing, and data recording) for each successive 15-minute period.

(5) Unless otherwise approved by the Administrator, minimum procedures for COMS shall include a method for producing a simulated zero opacity condition and an upscale (high-level) opacity condition using a certified neutral density filter or other related technique to produce a known obscuration of the light beam. Such procedures shall provide a system check of all the analyzer's internal optical surfaces and all electronic circuitry, including the lamp and photodetector assembly normally used in the measurement of opacity.

(6) The owner or operator of a CMS that is not a CPMS, which is installed in accordance with the provisions of this part and the applicable CMS performance specification(s), must check the zero (low-level) and high-level calibration drifts at least once daily in accordance with the written procedure specified in the performance evaluation plan developed under paragraphs (e)(3)(i) and (ii) of this section. The zero (low-level) and high-level calibration drifts must be adjusted, at a minimum, whenever the 24-hour zero (low-level) drift exceeds two times the limits of the applicable performance specification(s) specified in the relevant standard. The system shall allow the amount of excess zero (low-level) and high-level drift measured at the 24-hour interval checks to be recorded and quantified whenever specified. For COMS, all optical and instrumental surfaces exposed to the effluent gases must be cleaned prior to performing the zero (low-level) and high-level drift adjustments; the optical surfaces and instrumental surfaces must be cleaned when the cumulative automatic zero compensation, if applicable, exceeds 4 percent opacity. The CPMS must be calibrated prior to use for the purposes of complying with this section. The CPMS must be checked daily for indication that the system is responding. If the CPMS system includes an internal system check, results must be recorded and checked daily for proper operation.

(7) (i) A CMS is out of control if -

(A) The zero (low-level), mid-level (if applicable), or high-level calibration drift (CD) exceeds two times the applicable CD specification in the applicable performance specification or in the relevant standard; or

(B) The CMS fails a performance test audit (e.g., cylinder gas audit), relative accuracy audit, relative accuracy test audit, or linearity test audit; or

(C) The COMS CD exceeds two times the limit in the applicable performance specification in the relevant standard.

(ii) When the CMS is out of control, the owner or operator of the affected source shall take the necessary corrective action and shall repeat all necessary tests which indicate that the system is out of control. The owner or operator shall take corrective action and conduct retesting until the performance requirements are below the applicable limits. The beginning of the out-of-control period is the hour the owner or operator conducts a performance check (e.g., calibration drift) that indicates an exceedance of the performance requirements established under this part. The end of the out-of-control period is the hour following the completion of corrective action and successful demonstration that the system is within the allowable limits. During the period the CMS is out of control, recorded data shall not be used in data averages and calculations, or to meet any data availability requirement established under this part.

(8) The owner or operator of a CMS that is out of control as defined in paragraph (c)(7) of this section shall submit all information concerning out-of-control periods, including start and end dates and hours and

APPENDIX A-1
40 CFR 63, Subpart A

National Emission Standards for Hazardous Air Pollutants for Source Categories: General Provisions

descriptions of corrective actions taken, in the excess emissions and continuous monitoring system performance report required in § 63.10(e)(3).

(d) *Quality control program.*

(1) The results of the quality control program required in this paragraph will be considered by the Administrator when he/she determines the validity of monitoring data.

(2) The owner or operator of an affected source that is required to use a CMS and is subject to the monitoring requirements of this section and a relevant standard shall develop and implement a CMS quality control program. As part of the quality control program, the owner or operator shall develop and submit to the Administrator for approval upon request a site-specific performance evaluation test plan for the CMS performance evaluation required in paragraph (e)(3)(i) of this section, according to the procedures specified in paragraph (e). In addition, each quality control program shall include, at a minimum, a written protocol that describes procedures for each of the following operations:

- (i) Initial and any subsequent calibration of the CMS;
- (ii) Determination and adjustment of the calibration drift of the CMS;
- (iii) Preventive maintenance of the CMS, including spare parts inventory;
- (iv) Data recording, calculations, and reporting;
- (v) Accuracy audit procedures, including sampling and analysis methods; and
- (vi) Program of corrective action for a malfunctioning CMS.

(3) The owner or operator shall keep these written procedures on record for the life of the affected source or until the affected source is no longer subject to the provisions of this part, to be made available for inspection, upon request, by the Administrator. If the performance evaluation plan is revised, the owner or operator shall keep previous (i.e., superseded) versions of the performance evaluation plan on record to be made available for inspection, upon request, by the Administrator, for a period of 5 years after each revision to the plan. Where relevant, e.g., program of corrective action for a malfunctioning CMS, these written procedures may be incorporated as part of the affected source's startup, shutdown, and malfunction plan to avoid duplication of planning and recordkeeping efforts.

(e) *Performance evaluation of continuous monitoring systems - {Performance specification supersedes requirements for THC CEM.*

(1) *General.* When required by a relevant standard, and at any other time the Administrator may require under section 114 of the Act, the owner or operator of an affected source being monitored shall conduct a performance evaluation of the CMS. Such performance evaluation shall be conducted according to the applicable specifications and procedures described in this section or in the relevant standard.

(2) *Notification of performance evaluation.* The owner or operator shall notify the Administrator in writing of the date of the performance evaluation simultaneously with the notification of the performance test date required under § 63.7(b) or at least 60 days prior to the date the performance evaluation is scheduled to begin if no performance test is required.

(3) (i) *Submission of site-specific performance evaluation test plan.* Before conducting a required CMS performance evaluation, the owner or operator of an affected source shall develop and submit a site-specific performance evaluation test plan to the Administrator for approval upon request. The performance evaluation test plan shall include the evaluation program objectives, an evaluation program summary, the performance evaluation schedule, data quality objectives, and both an internal and external QA program. Data quality objectives are the pre-evaluation expectations of precision, accuracy, and completeness of data.

(ii) The internal QA program shall include, at a minimum, the activities planned by routine operators and analysts to provide an assessment of CMS performance. The external QA program shall include, at a minimum, systems audits that include the opportunity for on-site evaluation by the Administrator of instrument calibration, data validation, sample logging, and documentation of quality control data and field maintenance activities.

APPENDIX A-1
40 CFR 63, Subpart A

National Emission Standards for Hazardous Air Pollutants for Source Categories: General Provisions

(iii) The owner or operator of an affected source shall submit the site-specific performance evaluation test plan to the Administrator (if requested) at least 60 days before the performance test or performance evaluation is scheduled to begin, or on a mutually agreed upon date, and review and approval of the performance evaluation test plan by the Administrator will occur with the review and approval of the site-specific test plan (if review of the site-specific test plan is requested).

(iv) The Administrator may request additional relevant information after the submittal of a site-specific performance evaluation test plan.

(v) In the event that the Administrator fails to approve or disapprove the site-specific performance evaluation test plan within the time period specified in § 63.7(c)(3), the following conditions shall apply:

(A) If the owner or operator intends to demonstrate compliance using the monitoring method(s) specified in the relevant standard, the owner or operator shall conduct the performance evaluation within the time specified in this subpart using the specified method(s);

(B) If the owner or operator intends to demonstrate compliance by using an alternative to a monitoring method specified in the relevant standard, the owner or operator shall refrain from conducting the performance evaluation until the Administrator approves the use of the alternative method. If the Administrator does not approve the use of the alternative method within 30 days before the performance evaluation is scheduled to begin, the performance evaluation deadlines specified in paragraph (e)(4) of this section may be extended such that the owner or operator shall conduct the performance evaluation within 60 calendar days after the Administrator approves the use of the alternative method. Notwithstanding the requirements in the preceding two sentences, the owner or operator may proceed to conduct the performance evaluation as required in this section (without the Administrator's prior approval of the site-specific performance evaluation test plan) if he/she subsequently chooses to use the specified monitoring method(s) instead of an alternative.

(vi) Neither the submission of a site-specific performance evaluation test plan for approval, nor the Administrator's approval or disapproval of a plan, nor the Administrator's failure to approve or disapprove a plan in a timely manner shall -

(A) Relieve an owner or operator of legal responsibility for compliance with any applicable provisions of this part or with any other applicable Federal, State, or local requirement; or

(B) Prevent the Administrator from implementing or enforcing this part or taking any other action under the Act.

(4) *Conduct of performance evaluation and performance evaluation dates.* The owner or operator of an affected source shall conduct a performance evaluation of a required CMS during any performance test required under § 63.7 in accordance with the applicable performance specification as specified in the relevant standard. Notwithstanding the requirement in the previous sentence, if the owner or operator of an affected source elects to submit COMS data for compliance with a relevant opacity emission standard as provided under § 63.6(h)(7), he/she shall conduct a performance evaluation of the COMS as specified in the relevant standard, before the performance test required under § 63.7 is conducted in time to submit the results of the performance evaluation as specified in paragraph (e)(5)(ii) of this section. If a performance test is not required, or the requirement for a performance test has been waived under § 63.7(h), the owner or operator of an affected source shall conduct the performance evaluation not later than 180 days after the appropriate compliance date for the affected source, as specified in § 63.7(a), or as otherwise specified in the relevant standard.

(5) *Reporting performance evaluation results.*

(i) The owner or operator shall furnish the Administrator a copy of a written report of the results of the performance evaluation simultaneously with the results of the performance test required under § 63.7 or within 60 days of completion of the performance

APPENDIX A-1
40 CFR 63, Subpart A

National Emission Standards for Hazardous Air Pollutants for Source Categories: General Provisions

evaluation if no test is required, unless otherwise specified in a relevant standard. The Administrator may request that the owner or operator submit the raw data from a performance evaluation in the report of the performance evaluation results.

(ii) The owner or operator of an affected source using a COMS to determine opacity compliance during any performance test required under § 63.7 and described in § 63.6(d)(6) shall furnish the Administrator two or, upon request, three copies of a written report of the results of the COMS performance evaluation under this paragraph. The copies shall be provided at least 15 calendar days before the performance test required under § 63.7 is conducted.

(f) Use of an alternative monitoring method - {Additional requirements in § 63.1350(I).}

(1) *General.* Until permission to use an alternative monitoring procedure (minor, intermediate, or major changes; see definition in § 63.90(a)) has been granted by the Administrator under this paragraph (f)(1), the owner or operator of an affected source remains subject to the requirements of this section and the relevant standard.

(2) After receipt and consideration of written application, the Administrator may approve alternatives to any monitoring methods or procedures of this part including, but not limited to, the following:

(i) Alternative monitoring requirements when installation of a CMS specified by a relevant standard would not provide accurate measurements due to liquid water or other interferences caused by substances within the effluent gases;

(ii) Alternative monitoring requirements when the affected source is infrequently operated;

(iii) Alternative monitoring requirements to accommodate CEMS that require additional measurements to correct for stack moisture conditions;

(iv) Alternative locations for installing CMS when the owner or operator can demonstrate that installation at alternate locations will enable accurate and representative measurements;

(v) Alternate methods for converting pollutant concentration measurements to units of the relevant standard;

(vi) Alternate procedures for performing daily checks of zero (low-level) and high-level drift that do not involve use of high-level gases or test cells;

(vii) Alternatives to the American Society for Testing and Materials (ASTM) test methods or sampling procedures specified by any relevant standard;

(viii) Alternative CMS that do not meet the design or performance requirements in this part, but adequately demonstrate a definite and consistent relationship between their measurements and the measurements of opacity by a system complying with the requirements as specified in the relevant standard. The Administrator may require that such demonstration be performed for each affected source; or

(ix) Alternative monitoring requirements when the effluent from a single affected source or the combined effluent from two or more affected sources is released to the atmosphere through more than one point.

(3) If the Administrator finds reasonable grounds to dispute the results obtained by an alternative monitoring method, requirement, or procedure, the Administrator may require the use of a method, requirement, or procedure specified in this section or in the relevant standard. If the results of the specified and alternative method, requirement, or procedure do not agree, the results obtained by the specified method, requirement, or procedure shall prevail.

(4) (i) *Request to use alternative monitoring procedure.* An owner or operator who wishes to use an alternative monitoring procedure must submit an application to the Administrator as described in paragraph (f)(4)(ii) of this section. The application may be submitted at any time provided that the monitoring procedure is not the performance test method used to demonstrate compliance with a relevant standard or other requirement. If the alternative monitoring procedure will serve as the performance test method that is to be used to demonstrate compliance with a relevant standard, the application must be submitted at least 60

APPENDIX A-1
40 CFR 63, Subpart A

National Emission Standards for Hazardous Air Pollutants for Source Categories: General Provisions

days before the performance evaluation is scheduled to begin and must meet the requirements for an alternative test method under § 63.7(f).

(ii) The application must contain a description of the proposed alternative monitoring system which addresses the four elements contained in the definition of monitoring in § 63.2 and a performance evaluation test plan, if required, as specified in paragraph (e)(3) of this section. In addition, the application must include information justifying the owner or operator's request for an alternative monitoring method, such as the technical or economic infeasibility, or the impracticality, of the affected source using the required method.

(iii) The owner or operator may submit the information required in this paragraph well in advance of the submittal dates specified in paragraph (f)(4)(i) above to ensure a timely review by the Administrator in order to meet the compliance demonstration date specified in this section or the relevant standard.

(iv) Application for minor changes to monitoring procedures, as specified in paragraph (b)(1) of this section, may be made in the site-specific performance evaluation plan.

(5) Approval of request to use alternative monitoring procedure.

(i) The Administrator will notify the owner or operator of approval or intention to deny approval of the request to use an alternative monitoring method within 30 calendar days after receipt of the original request and within 30 calendar days after receipt of any supplementary information that is submitted. If a request for a minor change is made in conjunction with site-specific performance evaluation plan, then approval of the plan will constitute approval of the minor change. Before disapproving any request to use an alternative monitoring method, the Administrator will notify the applicant of the Administrator's intention to disapprove the request together with --

(A) Notice of the information and findings on which the intended disapproval is based; and

(B) Notice of opportunity for the owner or operator to present additional information to the Administrator before final action on the request. At the time the Administrator notifies the applicant of his or her intention to disapprove the request, the Administrator will specify how much time the owner or operator will have after being notified of the intended disapproval to submit the additional information.

(ii) The Administrator may establish general procedures and criteria in a relevant standard to accomplish the requirements of paragraph (f)(5)(i) of this section.

(iii) If the Administrator approves the use of an alternative monitoring method for an affected source under paragraph (f)(5)(i) of this section, the owner or operator of such source shall continue to use the alternative monitoring method until he or she receives approval from the Administrator to use another monitoring method as allowed by § 63.8(f).

(6) Alternative to the relative accuracy test. An alternative to the relative accuracy test for CEMS specified in a relevant standard may be requested as follows:

(i) *Criteria for approval of alternative procedures.* An alternative to the test method for determining relative accuracy is available for affected sources with emission rates demonstrated to be less than 50 percent of the relevant standard. The owner or operator of an affected source may petition the Administrator under paragraph (f)(6)(ii) of this section to substitute the relative accuracy test in section 7 of Performance Specification 2 with the procedures in section 10 if the results of a performance test conducted according to the requirements in § 63.7, or other tests performed following the criteria in § 63.7, demonstrate that the emission rate of the pollutant of interest in the units of the relevant standard is less than 50 percent of the relevant standard. For affected sources subject to emission limitations expressed as control efficiency levels, the owner or operator may petition the Administrator to substitute the relative accuracy test with the procedures in section 10 of Performance Specification 2 if the control device exhaust emission rate is less than 50 percent of the level needed to meet the control efficiency requirement. The alternative procedures do not apply if the CEMS is used continuously to determine compliance with the relevant standard.

(ii) *Petition to use alternative to relative accuracy test.* The petition to use an alternative to the relative accuracy test shall include a detailed description of the procedures to be applied, the location and

APPENDIX A-1
40 CFR 63, Subpart A

National Emission Standards for Hazardous Air Pollutants for Source Categories: General Provisions

the procedure for conducting the alternative, the concentration or response levels of the alternative relative accuracy materials, and the other equipment checks included in the alternative procedure(s). The Administrator will review the petition for completeness and applicability. The Administrator's determination to approve an alternative will depend on the intended use of the CEMS data and may require specifications more stringent than in Performance Specification 2.

(iii) *Rescission of approval to use alternative to relative accuracy test.* The Administrator will review the permission to use an alternative to the CEMS relative accuracy test and may rescind such permission if the CEMS data from a successful completion of the alternative relative accuracy procedure indicate that the affected source's emissions are approaching the level of the relevant standard. The criterion for reviewing the permission is that the collection of CEMS data shows that emissions have exceeded 70 percent of the relevant standard for any averaging period, as specified in the relevant standard. For affected sources subject to emission limitations expressed as control efficiency levels, the criterion for reviewing the permission is that the collection of CEMS data shows that exhaust emissions have exceeded 70 percent of the level needed to meet the control efficiency requirement for any averaging period, as specified in the relevant standard. The owner or operator of the affected source shall maintain records and determine the level of emissions relative to the criterion for permission to use an alternative for relative accuracy testing. If this criterion is exceeded, the owner or operator shall notify the Administrator within 10 days of such occurrence and include a description of the nature and cause of the increased emissions. The Administrator will review the notification and may rescind permission to use an alternative and require the owner or operator to conduct a relative accuracy test of the CEMS as specified in section 7 of Performance Specification 2.

(g) Reduction of monitoring data.

(1) (1) The owner or operator of each CMS must reduce the monitoring data as specified in paragraphs (g)(1) through (5) of this section.

(2) The owner or operator of each COMS shall reduce all data to 6-minute averages calculated from 36 or more data points equally spaced over each 6-minute period. Data from CEMS for measurement other than opacity, unless otherwise specified in the relevant standard, shall be reduced to 1-hour averages computed from four or more data points equally spaced over each 1-hour period, except during periods when calibration, quality assurance, or maintenance activities pursuant to provisions of this part are being performed. During these periods, a valid hourly average shall consist of at least two data points with each representing a 15-minute period. Alternatively, an arithmetic or integrated 1-hour average of CEMS data may be used. Time periods for averaging are defined in § 63.2.

(3) The data may be recorded in reduced or nonreduced form (e.g., ppm pollutant and percent O₂ or ng/J of pollutant).

(4) All emission data shall be converted into units of the relevant standard for reporting purposes using the conversion procedures specified in that standard. After conversion into units of the relevant standard, the data may be rounded to the same number of significant digits as used in that standard to specify the emission limit (e.g., rounded to the nearest 1 percent opacity).

(5) Monitoring data recorded during periods of unavoidable CMS breakdowns, out-of-control periods, repairs, maintenance periods, calibration checks, and zero (low-level) and high-level adjustments must not be included in any data average computed under this part. For the owner or operator complying with the requirements of § 63.10(b)(2)(vii)(A) or (B), data averages must include any data recorded during periods of monitor breakdown or malfunction.

§ 63.9 Notification requirements.

(a) Applicability and general information.

(1) The applicability of this section is set out in § 63.1(a)(4).

APPENDIX A-1
40 CFR 63, Subpart A

National Emission Standards for Hazardous Air Pollutants for Source Categories: General Provisions

(2) For affected sources that have been granted an extension of compliance under subpart D of this part, the requirements of this section do not apply to those sources while they are operating under such compliance extensions.

(3) If any State requires a notice that contains all the information required in a notification listed in this section, the owner or operator may send the Administrator a copy of the notice sent to the State to satisfy the requirements of this section for that notification.

(4) (i) Before a State has been delegated the authority to implement and enforce notification requirements established under this part, the owner or operator of an affected source in such State subject to such requirements shall submit notifications to the appropriate Regional Office of the EPA (to the attention of the Director of the Division indicated in the list of the EPA Regional Offices in § 63.13).

(ii) After a State has been delegated the authority to implement and enforce notification requirements established under this part, the owner or operator of an affected source in such State subject to such requirements shall submit notifications to the delegated State authority (which may be the same as the permitting authority). In addition, if the delegated (permitting) authority is the State, the owner or operator shall send a copy of each notification submitted to the State to the appropriate Regional Office of the EPA, as specified in paragraph (a)(4)(i) of this section. The Regional Office may waive this requirement for any notifications at its discretion.

(b) Initial notifications.

(1) (i) The requirements of this paragraph apply to the owner or operator of an affected source when such source becomes subject to a relevant standard.

(ii) If an area source that otherwise would be subject to an emission standard or other requirement established under this part if it were a major source subsequently increases its emissions of hazardous air pollutants (or its potential to emit hazardous air pollutants) such that the source is a major source that is subject to the emission standard or other requirement, such source shall be subject to the notification requirements of this section.

(iii) Affected sources that are required under this paragraph to submit an initial notification may use the application for approval of construction or reconstruction under § 63.5(d) of this subpart, if relevant, to fulfill the initial notification requirements of this paragraph.

(2) The owner or operator of an affected source that has an initial startup before the effective date of a relevant standard under this part shall notify the Administrator in writing that the source is subject to the relevant standard. The notification, which shall be submitted not later than 120 calendar days after the effective date of the relevant standard (or within 120 calendar days after the source becomes subject to the relevant standard), shall provide the following information:

(i) The name and address of the owner or operator;

(ii) The address (i.e., physical location) of the affected source;

(iii) An identification of the relevant standard, or other requirement, that is the basis of the notification and the source's compliance date;

(iv) A brief description of the nature, size, design, and method of operation of the source and an identification of the types of emission points within the affected source subject to the relevant standard and types of hazardous air pollutants emitted; and

(v) A statement of whether the affected source is a major source or an area source.

(3) [Reserved]

(4) The owner or operator of a new or reconstructed major affected source for which an application for approval of construction or reconstruction is required under § 63.5(d) must provide the following information in writing to the Administrator:

(i) A notification of intention to construct a new major-emitting affected source, reconstruct a major-emitting affected source, or reconstruct a major source such that the source becomes a major-emitting

APPENDIX A-1
40 CFR 63, Subpart A

National Emission Standards for Hazardous Air Pollutants for Source Categories: General Provisions

affected source with the application for approval of construction or reconstruction as specified in § 63.5(d)(1)(i); and

(ii) [Reserved]

(iii) [Reserved]

(iv) [Reserved]; and

(v) A notification of the actual date of startup of the source, delivered or postmarked within 15 calendar days after that date.

(5) The owner or operator of a new or reconstructed affected source for which an application for approval of construction or reconstruction is not required under § 63.5(d) must provide the following information in writing to the Administrator:

(i) A notification of intention to construct a new affected source, reconstruct an affected source, or reconstruct a source such that the source becomes an affected source, and

(ii) A notification of the actual date of startup of the source, delivered or postmarked within 15 calendar days after that date.

(iii) Unless the owner or operator has requested and received prior permission from the Administrator to submit less than the information in § 63.5(d), the notification must include the information required on the application for approval of construction or reconstruction as specified in § 63.5(d)(1)(i).

(c) *Request for extension of compliance.* If the owner or operator of an affected source cannot comply with a relevant standard by the applicable compliance date for that source, or if the owner or operator has installed BACT or technology to meet LAER consistent with § 63.6(i)(5) of this subpart, he/she may submit to the Administrator (or the State with an approved permit program) a request for an extension of compliance as specified in § 63.6(i)(4) through § 63.6(i)(6).

(d) *Notification that source is subject to special compliance requirements.* An owner or operator of a new source that is subject to special compliance requirements as specified in § 63.6(b)(3) and § 63.6(b)(4) shall notify the Administrator of his/her compliance obligations not later than the notification dates established in paragraph (b) of this section for new sources that are not subject to the special provisions.

(e) *Notification of performance test.* The owner or operator of an affected source shall notify the Administrator in writing of his or her intention to conduct a performance test at least 60 calendar days before the performance test is scheduled to begin to allow the Administrator to review and approve the site-specific test plan required under § 63.7(c), if requested by the Administrator, and to have an observer present during the test.

(f) *Notification of opacity and visible emission observations.* The owner or operator of an affected source shall notify the Administrator in writing of the anticipated date for conducting the opacity or visible emission observations specified in § 63.6(h)(5), if such observations are required for the source by a relevant standard. The notification shall be submitted with the notification of the performance test date, as specified in paragraph (e) of this section, or if no performance test is required or visibility or other conditions prevent the opacity or visible emission observations from being conducted concurrently with the initial performance test required under § 63.7, the owner or operator shall deliver or postmark the notification not less than 30 days before the opacity or visible emission observations are scheduled to take place. **{Notification not required for VE/opacity tests under 63.1350(e) and (j)}.**

(g) *Additional notification requirements for sources with continuous monitoring systems.* The owner or operator of an affected source required to use a CMS by a relevant standard shall furnish the Administrator written notification as follows:

APPENDIX A-1
40 CFR 63, Subpart A

National Emission Standards for Hazardous Air Pollutants for Source Categories: General Provisions

(1) A notification of the date the CMS performance evaluation under § 63.8(e) is scheduled to begin, submitted simultaneously with the notification of the performance test date required under § 63.7(b). If no performance test is required, or if the requirement to conduct a performance test has been waived for an affected source under § 63.7(h), the owner or operator shall notify the Administrator in writing of the date of the performance evaluation at least 60 calendar days before the evaluation is scheduled to begin;

(2) A notification that COMS data results will be used to determine compliance with the applicable opacity emission standard during a performance test required by § 63.7 in lieu of Method 9 or other opacity emissions test method data, as allowed by § 63.6(h)(7)(ii), if compliance with an opacity emission standard is required for the source by a relevant standard. The notification shall be submitted at least 60 calendar days before the performance test is scheduled to begin; and

(3) A notification that the criterion necessary to continue use of an alternative to relative accuracy testing, as provided by § 63.8(f)(6), has been exceeded. The notification shall be delivered or postmarked not later than 10 days after the occurrence of such exceedance, and it shall include a description of the nature and cause of the increased emissions.

(h) Notification of compliance status.

(1) The requirements of paragraphs (h)(2) through (h)(4) of this section apply when an affected source becomes subject to a relevant standard.

(2) (i) Before a title V permit has been issued to the owner or operator of an affected source, and each time a notification of compliance status is required under this part, the owner or operator of such source shall submit to the Administrator a notification of compliance status, signed by the responsible official who shall certify its accuracy, attesting to whether the source has complied with the relevant standard. The notification shall list -

(A) The methods that were used to determine compliance;

(B) The results of any performance tests, opacity or visible emission observations, continuous monitoring system (CMS) performance evaluations, and/or other monitoring procedures or methods that were conducted;

(C) The methods that will be used for determining continuing compliance, including a description of monitoring and reporting requirements and test methods;

(D) The type and quantity of hazardous air pollutants emitted by the source (or surrogate pollutants if specified in the relevant standard), reported in units and averaging times and in accordance with the test methods specified in the relevant standard;

(E) If the relevant standard applies to both major and area sources, an analysis demonstrating whether the affected source is a major source (using the emissions data generated for this notification);

(F) A description of the air pollution control equipment (or method) for each emission point, including each control device (or method) for each hazardous air pollutant and the control efficiency (percent) for each control device (or method); and

(G) A statement by the owner or operator of the affected existing, new, or reconstructed source as to whether the source has complied with the relevant standard or other requirements.

(ii) The notification must be sent before the close of business on the 60th day following the completion of the relevant compliance demonstration activity specified in the relevant standard (unless a different reporting period is specified in the standard, in which case the letter must be sent before the close of business on the day the report of the relevant testing or monitoring results is required to be delivered or postmarked). For example, the notification shall be sent before close of business on the 60th (or other required) day following completion of the initial performance test and again before the close of business on the 60th (or other required) day following the completion of any subsequent required performance test. If no performance test is required but opacity or visible emission observations are required to demonstrate compliance with an opacity or visible emission standard under this part, the notification of compliance status

APPENDIX A-1
40 CFR 63, Subpart A

National Emission Standards for Hazardous Air Pollutants for Source Categories: General Provisions

shall be sent before close of business on the 30th day following the completion of opacity or visible emission observations. Notifications may be combined as long as the due date requirement for each notification is met.

(3) After a title V permit has been issued to the owner or operator of an affected source, the owner or operator of such source shall comply with all requirements for compliance status reports contained in the source's title V permit, including reports required under this part. After a title V permit has been issued to the owner or operator of an affected source, and each time a notification of compliance status is required under this part, the owner or operator of such source shall submit the notification of compliance status to the appropriate permitting authority following completion of the relevant compliance demonstration activity specified in the relevant standard.

(4) [Reserved].

(5) If an owner or operator of an affected source submits estimates or preliminary information in the application for approval of construction or reconstruction required in § 63.5(d) in place of the actual emissions data or control efficiencies required in paragraphs (d)(1)(ii)(H) and (d)(2) of § 63.5, the owner or operator shall submit the actual emissions data and other correct information as soon as available but no later than with the initial notification of compliance status required in this section.

(6) Advice on a notification of compliance status may be obtained from the Administrator.

(i) Adjustment to time periods or postmark deadlines for submittal and review of required communications.

(1) (i) Until an adjustment of a time period or postmark deadline has been approved by the Administrator under paragraphs (i)(2) and (i)(3) of this section, the owner or operator of an affected source remains strictly subject to the requirements of this part.

(ii) An owner or operator shall request the adjustment provided for in paragraphs (i)(2) and (i)(3) of this section each time he or she wishes to change an applicable time period or postmark deadline specified in this part.

(2) Notwithstanding time periods or postmark deadlines specified in this part for the submittal of information to the Administrator by an owner or operator, or the review of such information by the Administrator, such time periods or deadlines may be changed by mutual agreement between the owner or operator and the Administrator. An owner or operator who wishes to request a change in a time period or postmark deadline for a particular requirement shall request the adjustment in writing as soon as practicable before the subject activity is required to take place. The owner or operator shall include in the request whatever information he or she considers useful to convince the Administrator that an adjustment is warranted.

(3) If, in the Administrator's judgment, an owner or operator's request for an adjustment to a particular time period or postmark deadline is warranted, the Administrator will approve the adjustment. The Administrator will notify the owner or operator in writing of approval or disapproval of the request for an adjustment within 15 calendar days of receiving sufficient information to evaluate the request.

(4) If the Administrator is unable to meet a specified deadline, he or she will notify the owner or operator of any significant delay and inform the owner or operator of the amended schedule.

(j) Change in information already provided. Any change in the information already provided under this section shall be provided to the Administrator in writing within 15 calendar days after the change.

§ 63.10 Recordkeeping and reporting requirements.

(a) Applicability and general information.

(1) The applicability of this section is set out in § 63.1(a)(4).

APPENDIX A-1
40 CFR 63, Subpart A

National Emission Standards for Hazardous Air Pollutants for Source Categories: General Provisions

(2) For affected sources that have been granted an extension of compliance under subpart D of this part, the requirements of this section do not apply to those sources while they are operating under such compliance extensions.

(3) If any State requires a report that contains all the information required in a report listed in this section, an owner or operator may send the Administrator a copy of the report sent to the State to satisfy the requirements of this section for that report.

(4) (i) Before a State has been delegated the authority to implement and enforce recordkeeping and reporting requirements established under this part, the owner or operator of an affected source in such State subject to such requirements shall submit reports to the appropriate Regional Office of the EPA (to the attention of the Director of the Division indicated in the list of the EPA Regional Offices in § 63.13).

(ii) After a State has been delegated the authority to implement and enforce recordkeeping and reporting requirements established under this part, the owner or operator of an affected source in such State subject to such requirements shall submit reports to the delegated State authority (which may be the same as the permitting authority). In addition, if the delegated (permitting) authority is the State, the owner or operator shall send a copy of each report submitted to the State to the appropriate Regional Office of the EPA, as specified in paragraph (a)(4)(i) of this section. The Regional Office may waive this requirement for any reports at its discretion.

(5) If an owner or operator of an affected source in a State with delegated authority is required to submit periodic reports under this part to the State, and if the State has an established timeline for the submission of periodic reports that is consistent with the reporting frequency(ies) specified for such source under this part, the owner or operator may change the dates by which periodic reports under this part shall be submitted (without changing the frequency of reporting) to be consistent with the State's schedule by mutual agreement between the owner or operator and the State. For each relevant standard established pursuant to section 112 of the Act, the allowance in the previous sentence applies in each State beginning 1 year after the affected source's compliance date for that standard. Procedures governing the implementation of this provision are specified in § 63.9(i).

(6) If an owner or operator supervises one or more stationary sources affected by more than one standard established pursuant to section 112 of the Act, he/she may arrange by mutual agreement between the owner or operator and the Administrator (or the State permitting authority) a common schedule on which periodic reports required for each source shall be submitted throughout the year. The allowance in the previous sentence applies in each State beginning 1 year after the latest compliance date for any relevant standard established pursuant to section 112 of the Act for any such affected source(s). Procedures governing the implementation of this provision are specified in § 63.9(i).

(7) If an owner or operator supervises one or more stationary sources affected by standards established pursuant to section 112 of the Act (as amended November 15, 1990) and standards set under part 60, part 61, or both such parts of this chapter, he/she may arrange by mutual agreement between the owner or operator and the Administrator (or the State permitting authority) a common schedule on which periodic reports required by each relevant (i.e., applicable) standard shall be submitted throughout the year. The allowance in the previous sentence applies in each State beginning 1 year after the stationary source is required to be in compliance with the relevant section 112 standard, or 1 year after the stationary source is required to be in compliance with the applicable part 60 or part 61 standard, whichever is latest. Procedures governing the implementation of this provision are specified in § 63.9(i).

(b) General recordkeeping requirements.

(1) The owner or operator of an affected source subject to the provisions of this part shall maintain files of all information (including all reports and notifications) required by this part recorded in a form suitable and readily available for expeditious inspection and review. The files shall be retained for at least 5 years following the date of each occurrence, measurement, maintenance, corrective action, report, or record. At a minimum, the most recent 2 years of data shall be retained on site. The remaining 3 years of data may be

APPENDIX A-1
40 CFR 63, Subpart A

National Emission Standards for Hazardous Air Pollutants for Source Categories: General Provisions

retained off site. Such files may be maintained on microfilm, on a computer, on computer floppy disks, on magnetic tape disks, or on microfiche.

(2) The owner or operator of an affected source subject to the provisions of this part shall maintain relevant records for such source of -

(i) The occurrence and duration of each startup, shutdown, or malfunction of operation (i.e., process equipment);

(ii) The occurrence and duration of each malfunction of the required air pollution control and monitoring equipment;

(iii) All required maintenance performed on the air pollution control and monitoring equipment;

(iv) Actions taken during periods of startup, shutdown, and malfunction (including corrective actions to restore malfunctioning process and air pollution control and monitoring equipment to its normal or usual manner of operation) when such actions are different from the procedures specified in the affected source's startup, shutdown, and malfunction plan (see § 63.6(e)(3));

(v) All information necessary to demonstrate conformance with the affected source's startup, shutdown, and malfunction plan (see § 63.6(e)(3)) when all actions taken during periods of startup, shutdown, and malfunction (including corrective actions to restore malfunctioning process and air pollution control and monitoring equipment to its normal or usual manner of operation) are consistent with the procedures specified in such plan. (The information needed to demonstrate conformance with the startup, shutdown, and malfunction plan may be recorded using a "checklist," or some other effective form of recordkeeping, in order to minimize the recordkeeping burden for conforming events);

(vi) Each period during which a CMS is malfunctioning or inoperative (including out-of-control periods);

(vii) All required measurements needed to demonstrate compliance with a relevant standard (including, but not limited to, 15-minute averages of CMS data, raw performance testing measurements, and raw performance evaluation measurements, that support data that the source is required to report);

(A) This paragraph applies to owners or operators required to install a continuous emissions monitoring system (CEMS) where the CEMS installed is automated, and where the calculated data averages do not exclude periods of CEMS breakdown or malfunction. An automated CEMS records and reduces the measured data to the form of the pollutant emission standard through the use of a computerized data acquisition system. In lieu of maintaining a file of all CEMS subhourly measurements as required under paragraph (b)(2)(vii) of this section, the owner or operator shall retain the most recent consecutive three averaging periods of subhourly measurements and a file that contains a hard copy of the data acquisition system algorithm used to reduce the measured data into the reportable form of the standard.

(B) This paragraph applies to owners or operators required to install a CEMS where the measured data is manually reduced to obtain the reportable form of the standard, and where the calculated data averages do not exclude periods of CEMS breakdown or malfunction. In lieu of maintaining a file of all CEMS subhourly measurements as required under paragraph (b)(2)(vii) of this section, the owner or operator shall retain all subhourly measurements for the most recent reporting period. The subhourly measurements shall be retained for 120 days from the date of the most recent summary or excess emission report submitted to the Administrator.

(C) The Administrator or delegated authority, upon notification to the source, may require the owner or operator to maintain all measurements as required by paragraph (b)(2)(vii), if the administrator or the delegated authority determines these records are required to more accurately assess the compliance status of the affected source.

(viii) All results of performance tests, CMS performance evaluations, and opacity and visible emission observations;

(ix) All measurements as may be necessary to determine the conditions of performance tests and performance evaluations;

APPENDIX A-1
40 CFR 63, Subpart A

National Emission Standards for Hazardous Air Pollutants for Source Categories: General Provisions

- (x) All CMS calibration checks;
- (xi) All adjustments and maintenance performed on CMS;
- (xii) Any information demonstrating whether a source is meeting the requirements for a waiver of recordkeeping or reporting requirements under this part, if the source has been granted a waiver under paragraph (f) of this section;
- (xiii) All emission levels relative to the criterion for obtaining permission to use an alternative to the relative accuracy test, if the source has been granted such permission under § 63.8(f)(6); and
- (xiv) All documentation supporting initial notifications and notifications of compliance status under § 63.9.

(3) *Recordkeeping requirement for applicability determinations.* If an owner or operator determines that his or her stationary source that emits (or has the potential to emit, without considering controls) one or more hazardous air pollutants regulated by any standard established pursuant to section 112(d) or (f), and that stationary source is in the source category regulated by the relevant standard, but that source is not subject to the relevant standard (or other requirement established under this part) because of limitations on the source's potential to emit or an exclusion, the owner or operator must keep a record of the applicability determination on site at the source for a period of 5 years after the determination, or until the source changes its operations to become an affected source, whichever comes first. The record of the applicability determination must be signed by the person making the determination and include an analysis (or other information) that demonstrates why the owner or operator believes the source is unaffected (e.g., because the source is an area source). The analysis (or other information) must be sufficiently detailed to allow the Administrator to make a finding about the source's applicability status with regard to the relevant standard or other requirement. If relevant, the analysis must be performed in accordance with requirements established in relevant subparts of this part for this purpose for particular categories of stationary sources. If relevant, the analysis should be performed in accordance with EPA guidance materials published to assist sources in making applicability determinations under section 112, if any. The requirements to determine applicability of a standard under § 63.1(b)(3) and to record the results of that determination under paragraph (b)(3) of this section shall not by themselves create an obligation for the owner or operator to obtain a title V permit.

(c) *Additional recordkeeping requirements for sources with continuous monitoring systems.* In addition to complying with the requirements specified in paragraphs (b)(1) and (b)(2) of this section, the owner or operator of an affected source required to install a CMS by a relevant standard shall maintain records for such source of -

- (1) All required CMS measurements (including monitoring data recorded during unavoidable CMS breakdowns and out-of-control periods) **PS-8A supercedes requirements for THC CEMS**
- (2)–(4) [Reserved]
- (5) The date and time identifying each period during which the CMS was inoperative except for zero (low-level) and high-level checks; **PS-8A supercedes requirements for THC CEMS**
- (6) The date and time identifying each period during which the CMS was out of control, as defined in § 63.8(c)(7); **PS-8A supercedes requirements for THC CEMS**
- (7) The specific identification (i.e., the date and time of commencement and completion) of each period of excess emissions and parameter monitoring exceedances, as defined in the relevant standard(s), that occurs during startups, shutdowns, and malfunctions of the affected source; **PS-8A supercedes requirements for THC CEMS**
- (8) The specific identification (i.e., the date and time of commencement and completion) of each time period of excess emissions and parameter monitoring exceedances, as defined in the relevant standard(s), that occurs during periods other than startups, shutdowns, and malfunctions of the affected source; **PS-8A supercedes requirements for THC CEMS**
- (9) [Reserved]

APPENDIX A-1
40 CFR 63, Subpart A

National Emission Standards for Hazardous Air Pollutants for Source Categories: General Provisions

(10) The nature and cause of any malfunction (if known); **PS-8A supercedes requirements for THC CEMS**

(11) The corrective action taken or preventive measures adopted; **PS-8A supercedes requirements for THC CEMS**

(12) The nature of the repairs or adjustments to the CMS that was inoperative or out of control; **PS-8A supercedes requirements for THC CEMS**

(13) The total process operating time during the reporting period; **PS-8A supercedes requirements for THC CEMS**; and

(14) All procedures that are part of a quality control program developed and implemented for CMS under § 63.8(d) ; **PS-8A supercedes requirements for THC CEMS**

(15) In order to satisfy the requirements of paragraphs (c)(10) through (c)(12) of this section and to avoid duplicative recordkeeping efforts, the owner or operator may use the affected source's startup, shutdown, and malfunction plan or records kept to satisfy the recordkeeping requirements of the startup, shutdown, and malfunction plan specified in § 63.6(e), provided that such plan and records adequately address the requirements of paragraphs (c)(10) through (c)(12) ; **PS-8A supercedes requirements for THC CEMS**

(d) General reporting requirements.

(1) Notwithstanding the requirements in this paragraph or paragraph (e) of this section, the owner or operator of an affected source subject to reporting requirements under this part shall submit reports to the Administrator in accordance with the reporting requirements in the relevant standard(s).

(2) *Reporting results of performance tests.* Before a title V permit has been issued to the owner or operator of an affected source, the owner or operator shall report the results of any performance test under § 63.7 to the Administrator. After a title V permit has been issued to the owner or operator of an affected source, the owner or operator shall report the results of a required performance test to the appropriate permitting authority. The owner or operator of an affected source shall report the results of the performance test to the Administrator (or the State with an approved permit program) before the close of business on the 60th day following the completion of the performance test, unless specified otherwise in a relevant standard or as approved otherwise in writing by the Administrator. The results of the performance test shall be submitted as part of the notification of compliance status required under § 63.9(h).

(3) *Reporting results of opacity or visible emission observations.* The owner or operator of an affected source required to conduct opacity or visible emission observations by a relevant standard shall report the opacity or visible emission results (produced using Test Method 9 or Test Method 22, or an alternative to these test methods) along with the results of the performance test required under § 63.7. If no performance test is required, or if visibility or other conditions prevent the opacity or visible emission observations from being conducted concurrently with the performance test required under § 63.7, the owner or operator shall report the opacity or visible emission results before the close of business on the 30th day following the completion of the opacity or visible emission observations.

(4) *Progress reports.* The owner or operator of an affected source who is required to submit progress reports as a condition of receiving an extension of compliance under § 63.6(i) shall submit such reports to the Administrator (or the State with an approved permit program) by the dates specified in the written extension of compliance.

(5) (i) *Periodic startup, shutdown, and malfunction reports.* If actions taken by an owner or operator during a startup, shutdown, or malfunction of an affected source (including actions taken to correct a malfunction) are consistent with the procedures specified in the source's startup, shutdown, and malfunction plan (see Sec. 63.6(e)(3)), the owner or operator shall state such information in a startup, shutdown, and malfunction report. Such a report shall identify any instance where any action taken by an owner or operator during a startup, shutdown, or malfunction (including actions taken to correct a malfunction) is not consistent with the affected source's startup, shutdown, and malfunction plan, but the source does not exceed any

APPENDIX A-1
40 CFR 63, Subpart A

National Emission Standards for Hazardous Air Pollutants for Source Categories: General Provisions

applicable emission limitation in the relevant emission standard. Such a report shall also include the number, duration, and a brief description for each type of malfunction which occurred during the reporting period and which caused or may have caused any applicable emission limitation to be exceeded. Reports shall only be required if a startup, shutdown, or malfunction occurred during the reporting period. The startup, shutdown, and malfunction report shall consist of a letter, containing the name, title, and signature of the owner or operator or other responsible official who is certifying its accuracy, that shall be submitted to the Administrator semiannually (or on a more frequent basis if specified otherwise in a relevant standard or as established otherwise by the permitting authority in the source's title V permit). The startup, shutdown, and malfunction report shall be delivered or postmarked by the 30th day following the end of each calendar half (or other calendar reporting period, as appropriate). If the owner or operator is required to submit excess emissions and continuous monitoring system performance (or other periodic) reports under this part, the startup, shutdown, and malfunction reports required under this paragraph may be submitted simultaneously with the excess emissions and continuous monitoring system performance (or other) reports. If startup, shutdown, and malfunction reports are submitted with excess emissions and continuous monitoring system performance (or other periodic) reports, and the owner or operator receives approval to reduce the frequency of reporting for the latter under paragraph (e) of this section, the frequency of reporting for the startup, shutdown, and malfunction reports also may be reduced if the Administrator does not object to the intended change. The procedures to implement the allowance in the preceding sentence shall be the same as the procedures specified in paragraph (e)(3) of this section.

(ii) Immediate startup, shutdown, and malfunction reports. Notwithstanding the allowance to reduce the frequency of reporting for periodic startup, shutdown, and malfunction reports under paragraph (d)(5)(i) of this section, any time an action taken by an owner or operator during a startup, shutdown, or malfunction (including actions taken to correct a malfunction) is not consistent with the procedures specified in the affected source's startup, shutdown, and malfunction plan, and the source exceeds any applicable emission limitation in the relevant emission standard, the owner or operator shall report the actions taken for that event within 2 working days after commencing actions inconsistent with the plan followed by a letter within 7 working days after the end of the event. The immediate report required under this paragraph (d)(5)(ii) shall consist of a telephone call (or facsimile (FAX) transmission) to the Administrator within 2 working days after commencing actions inconsistent with the plan, and it shall be followed by a letter, delivered or postmarked within 7 working days after the end of the event, that contains the name, title, and signature of the owner or operator or other responsible official who is certifying its accuracy, explaining the circumstances of the event, the reasons for not following the startup, shutdown, and malfunction plan, and describing all excess emissions and/or parameter monitoring exceedances which are believed to have occurred. Notwithstanding the requirements of the previous sentence, after the effective date of an approved permit program in the State in which an affected source is located, the owner or operator may make alternative reporting arrangements, in advance, with the permitting authority in that State. Procedures governing the arrangement of alternative reporting requirements under this paragraph (d)(5)(ii) are specified in Sec. 63.9(i).

(e) Additional reporting requirements for sources with continuous monitoring systems -

(1) *General.* When more than one CEMS is used to measure the emissions from one affected source (e.g., multiple breechings, multiple outlets), the owner or operator shall report the results as required for each CEMS.

(2) Reporting results of continuous monitoring system performance evaluations.

(i) The owner or operator of an affected source required to install a CMS by a relevant standard shall furnish the Administrator a copy of a written report of the results of the CMS performance evaluation, as required under § 63.8(e), simultaneously with the results of the performance test required under § 63.7, unless otherwise specified in the relevant standard.

APPENDIX A-1
40 CFR 63, Subpart A

National Emission Standards for Hazardous Air Pollutants for Source Categories: General Provisions

(ii) The owner or operator of an affected source using a COMS to determine opacity compliance during any performance test required under § 63.7 and described in § 63.6(d)(6) shall furnish the Administrator two or, upon request, three copies of a written report of the results of the COMS performance evaluation conducted under § 63.8(e). The copies shall be furnished at least 15 calendar days before the performance test required under § 63.7 is conducted.

(3) *Excess emissions and continuous monitoring system performance report and summary report..*

{Exceedances are defined in subpart LLL.}

(i) Excess emissions and parameter monitoring exceedances are defined in relevant standards. The owner or operator of an affected source required to install a CMS by a relevant standard shall submit an excess emissions and continuous monitoring system performance report and/or a summary report to the Administrator semiannually, except when -

(A) More frequent reporting is specifically required by a relevant standard;

(B) The Administrator determines on a case-by-case basis that more frequent reporting is necessary to accurately assess the compliance status of the source; or

(C) [Reserved].

(ii) Request to reduce frequency of excess emissions and continuous monitoring system performance reports. Notwithstanding the frequency of reporting requirements specified in paragraph (e)(3)(i) of this section, an owner or operator who is required by a relevant standard to submit excess emissions and continuous monitoring system performance (and summary) reports on a quarterly (or more frequent) basis may reduce the frequency of reporting for that standard to semiannual if the following conditions are met:

(A) For 1 full year (e.g., 4 quarterly or 12 monthly reporting periods) the affected source's excess emissions and continuous monitoring system performance reports continually demonstrate that the source is in compliance with the relevant standard;

(B) The owner or operator continues to comply with all recordkeeping and monitoring requirements specified in this subpart and the relevant standard; and

(C) The Administrator does not object to a reduced frequency of reporting for the affected source, as provided in paragraph (e)(3)(iii) of this section.

(iii) The frequency of reporting of excess emissions and continuous monitoring system performance (and summary) reports required to comply with a relevant standard may be reduced only after the owner or operator notifies the Administrator in writing of his or her intention to make such a change and the Administrator does not object to the intended change. In deciding whether to approve a reduced frequency of reporting, the Administrator may review information concerning the source's entire previous performance history during the 5-year recordkeeping period prior to the intended change, including performance test results, monitoring data, and evaluations of an owner or operator's conformance with operation and maintenance requirements. Such information may be used by the Administrator to make a judgment about the source's potential for noncompliance in the future. If the Administrator disapproves the owner or operator's request to reduce the frequency of reporting, the Administrator will notify the owner or operator in writing within 45 days after receiving notice of the owner or operator's intention. The notification from the Administrator to the owner or operator will specify the grounds on which the disapproval is based. In the absence of a notice of disapproval within 45 days, approval is automatically granted.

(iv) As soon as CMS data indicate that the source is not in compliance with any emission limitation or operating parameter specified in the relevant standard, the frequency of reporting shall revert to the frequency specified in the relevant standard, and the owner or operator shall submit an excess emissions and continuous monitoring system performance (and summary) report for the noncomplying emission points at the next appropriate reporting period following the noncomplying event. After demonstrating ongoing compliance with the relevant standard for another full year, the owner or operator may again request approval from the Administrator to reduce the frequency of reporting for that standard, as provided for in paragraphs (e)(3)(ii) and (e)(3)(iii) of this section.

APPENDIX A-1
40 CFR 63, Subpart A

National Emission Standards for Hazardous Air Pollutants for Source Categories: General Provisions

(v) *Content and submittal dates for excess emissions and monitoring system performance reports.* All excess emissions and monitoring system performance reports and all summary reports, if required, shall be delivered or postmarked by the 30th day following the end of each calendar half or quarter, as appropriate. Written reports of excess emissions or exceedances of process or control system parameters shall include all the information required in paragraphs (c)(5) through (c)(13) of this section, in § 63.8(c)(7) and § 63.8(c)(8), and in the relevant standard, and they shall contain the name, title, and signature of the responsible official who is certifying the accuracy of the report. When no excess emissions or exceedances of a parameter have occurred, or a CMS has not been inoperative, out of control, repaired, or adjusted, such information shall be stated in the report.

(vi) *Summary report.* As required under paragraphs (e)(3)(vii) and (e)(3)(viii) of this section, one summary report shall be submitted for the hazardous air pollutants monitored at each affected source (unless the relevant standard specifies that more than one summary report is required, e.g., one summary report for each hazardous air pollutant monitored). The summary report shall be entitled "Summary Report - Gaseous and Opacity Excess Emission and Continuous Monitoring System Performance" and shall contain the following information:

- (A) The company name and address of the affected source;
- (B) An identification of each hazardous air pollutant monitored at the affected source;
- (C) The beginning and ending dates of the reporting period;
- (D) A brief description of the process units;
- (E) The emission and operating parameter limitations specified in the relevant standard(s);
- (F) The monitoring equipment manufacturer(s) and model number(s);
- (G) The date of the latest CMS certification or audit;
- (H) The total operating time of the affected source during the reporting period;
- (I) An emission data summary (or similar summary if the owner or operator monitors control system parameters), including the total duration of excess emissions during the reporting period (recorded in minutes for opacity and hours for gases), the total duration of excess emissions expressed as a percent of the total source operating time during that reporting period, and a breakdown of the total duration of excess emissions during the reporting period into those that are due to startup/shutdown, control equipment problems, process problems, other known causes, and other unknown causes;
- (J) A CMS performance summary (or similar summary if the owner or operator monitors control system parameters), including the total CMS downtime during the reporting period (recorded in minutes for opacity and hours for gases), the total duration of CMS downtime expressed as a percent of the total source operating time during that reporting period, and a breakdown of the total CMS downtime during the reporting period into periods that are due to monitoring equipment malfunctions, nonmonitoring equipment malfunctions, quality assurance/quality control calibrations, other known causes, and other unknown causes;
- (K) A description of any changes in CMS, processes, or controls since the last reporting period;
- (L) The name, title, and signature of the responsible official who is certifying the accuracy of the report; and
- (M) The date of the report.

(vii) If the total duration of excess emissions or process or control system parameter exceedances for the reporting period is less than 1 percent of the total operating time for the reporting period, and CMS downtime for the reporting period is less than 5 percent of the total operating time for the reporting period, only the summary report shall be submitted, and the full excess emissions and continuous monitoring system performance report need not be submitted unless required by the Administrator.

APPENDIX A-1
40 CFR 63, Subpart A

National Emission Standards for Hazardous Air Pollutants for Source Categories: General Provisions

(viii) If the total duration of excess emissions or process or control system parameter exceedances for the reporting period is 1 percent or greater of the total operating time for the reporting period, or the total CMS downtime for the reporting period is 5 percent or greater of the total operating time for the reporting period, both the summary report and the excess emissions and continuous monitoring system performance report shall be submitted.

(4) Reporting continuous opacity monitoring system data produced during a performance test. The owner or operator of an affected source required to use a COMS shall record the monitoring data produced during a performance test required under § 63.7 and shall furnish the Administrator a written report of the monitoring results. The report of COMS data shall be submitted simultaneously with the report of the performance test results required in paragraph (d)(2) of this section.

(f) *Waiver of recordkeeping or reporting requirements.*

(1) Until a waiver of a recordkeeping or reporting requirement has been granted by the Administrator under this paragraph, the owner or operator of an affected source remains subject to the requirements of this section.

(2) Recordkeeping or reporting requirements may be waived upon written application to the Administrator if, in the Administrator's judgment, the affected source is achieving the relevant standard(s), or the source is operating under an extension of compliance, or the owner or operator has requested an extension of compliance and the Administrator is still considering that request.

(3) If an application for a waiver of record-keeping or reporting is made, the application shall accompany the request for an extension of compliance under § 63.6(i), any required compliance progress report or compliance status report required under this part (such as under § 63.6(i) and § 63.9(h)) or in the source's title V permit, or an excess emissions and continuous monitoring system performance report required under paragraph (e) of this section, whichever is applicable. The application shall include whatever information the owner or operator considers useful to convince the Administrator that a waiver of recordkeeping or reporting is warranted.

(4) The Administrator will approve or deny a request for a waiver of recordkeeping or reporting requirements under this paragraph when he/she -

(i) Approves or denies an extension of compliance; or

(ii) Makes a determination of compliance following the submission of a required compliance status report or excess emissions and continuous monitoring systems performance report; or

(iii) Makes a determination of suitable progress towards compliance following the submission of a compliance progress report, whichever is applicable.

(5) A waiver of any recordkeeping or reporting requirement granted under this paragraph may be conditioned on other recordkeeping or reporting requirements deemed necessary by the Administrator.

(6) Approval of any waiver granted under this section shall not abrogate the Administrator's authority under the Act or in any way prohibit the Administrator from later canceling the waiver. The cancellation will be made only after notice is given to the owner or operator of the affected source.

§ 63.11 [Reserved]

§ 63.12 State authority and delegations.

(a) The provisions of this part shall not be construed in any manner to preclude any State or political subdivision thereof from -

(1) Adopting and enforcing any standard, limitation, prohibition, or other regulation applicable to an affected source subject to the requirements of this part, provided that such standard, limitation, prohibition, or regulation is not less stringent than any requirement applicable to such source established under this part;

APPENDIX A-1
40 CFR 63, Subpart A

National Emission Standards for Hazardous Air Pollutants for Source Categories: General Provisions

(2) Requiring the owner or operator of an affected source to obtain permits, licenses, or approvals prior to initiating construction, reconstruction, modification, or operation of such source; or

(3) Requiring emission reductions in excess of those specified in subpart D of this part as a condition for granting the extension of compliance authorized by section 112(i)(5) of the Act.

(b) (1) Section 112(l) of the Act directs the Administrator to delegate to each State, when appropriate, the authority to implement and enforce standards and other requirements pursuant to section 112 for stationary sources located in that State. Because of the unique nature of radioactive material, delegation of authority to implement and enforce standards that control radionuclides may require separate approval.

(2) Subpart E of this part establishes procedures consistent with section 112(l) for the approval of State rules or programs to implement and enforce applicable Federal rules promulgated under the authority of section 112. Subpart E also establishes procedures for the review and withdrawal of section 112 implementation and enforcement authorities granted through a section 112(l) approval.

(c) All information required to be submitted to the EPA under this part also shall be submitted to the appropriate State agency of any State to which authority has been delegated under section 112(l) of the Act, provided that each specific delegation may exempt sources from a certain Federal or State reporting requirement. The Administrator may permit all or some of the information to be submitted to the appropriate State agency only, instead of to the EPA and the State agency.

§ 63.13 Addresses of State air pollution control agencies and EPA Regional Offices.

(a) All requests, reports, applications, submittals, and other communications to the Administrator pursuant to this part shall be submitted to the appropriate Regional Office of the U.S. Environmental Protection Agency indicated as follows:

EPA Region IV; Director; Air, Pesticides and Toxics, Management Division; Atlanta Federal Center, 61 Forsyth Street; Atlanta, GA 30303.

(b) All information required to be submitted to the Administrator under this part also shall be submitted to the appropriate State agency of any State to which authority has been delegated under section 112(l) of the Act. The owner or operator of an affected source may contact the appropriate EPA Regional Office for the mailing addresses for those States whose delegation requests have been approved.

(c) If any State requires a submittal that contains all the information required in an application, notification, request, report, statement, or other communication required in this part, an owner or operator may send the appropriate Regional Office of the EPA a copy of that submittal to satisfy the requirements of this part for that communication.

§ 63.14 Incorporations by reference.

(a) The materials listed in this section are incorporated by reference in the corresponding sections noted. These incorporations by reference were approved by the Director of the Federal Register in accordance with 5 U.S.C. 552(a) and 1 CFR part 51. These materials are incorporated as they exist on the date of the approval, and notice of any change in these materials will be published in the Federal Register. The materials are available for purchase at the corresponding addresses noted below, and all are available for inspection at the Office of the Federal Register, 800 North Capitol Street, NW., suite 700, Washington, DC, at the Air and Radiation Docket and Information Center, U.S. EPA, 401 M St., SW., Washington, DC, and at the EPA Library (MD-35), U.S. EPA, Research Triangle Park, North Carolina.

APPENDIX A-1
40 CFR 63, Subpart A

National Emission Standards for Hazardous Air Pollutants for Source Categories: General Provisions

(b) The following materials are available for purchase from at least one of the following addresses: American Society for Testing and Materials (ASTM), 100 Barr Harbor Drive, Post Office Box C700, West Conshohocken, PA 19428-2959; or ProQuest, 300 North Zeeb Road, Ann Arbor, MI 48106.

- (1) ASTM D523-89, Standard Test Method for Specular Gloss, IBR approved for § 63.782.
- (2) ASTM D1193-77, 91, Standard Specification for Reagent Water, IBR approved for Appendix A: Method 306, Sections 7.1.1 and 7.4.2.
- (3) ASTM D1331-89, Standard Test Methods for Surface and Interfacial Tension of Solutions of Surface Active Agents, IBR approved for Appendix A: Method 306B, Sections 6.2, 11.1, and 12.2.2.
- (4) ASTM D1475-90, Standard Test Method for Density of Paint, Varnish Lacquer, and Related Products, IBR approved for § 63.788, Appendix A.
- (5) ASTM D1946-77, 90, 94, Standard Method for Analysis of Reformed Gas by Gas Chromatography, IBR approved for § 63.11(b)(6).
- (6) ASTM D2369-93, 95, Standard Test Method for Volatile Content of Coatings, IBR approved for § 63.788, Appendix A.
- (7) ASTM D2382-76, 88, Heat of Combustion of Hydrocarbon Fuels by Bomb Calorimeter (High-Precision Method), IBR approved for § 63.11(b)(6).
- (8) ASTM D2879-83, 96, Test Method for Vapor Pressure-Temperature Relationship and Initial Decomposition Temperature of Liquids by Isoteniscope, IBR approved for § 63.111 of Subpart G.
- (9) ASTM D3257-93, Standard Test Methods for Aromatics in Mineral Spirits by Gas Chromatography, IBR approved for § 63.786(b).
- (10) ASTM 3695-88, Standard Test Method for Volatile Alcohols in Water by Direct Aqueous-Injection Gas Chromatography, IBR approved for § 63.365(e)(1) of Subpart O.
- (11) ASTM D3792-91, Standard Method for Water Content of Water-Reducible Paints by Direct Injection into a Gas Chromatograph, IBR approved for § 63.788, Appendix A.
- (12) ASTM D3912-80, Standard Test Method for Chemical Resistance of Coatings Used in Light-Water Nuclear Power Plants, IBR approved for § 63.782.
- (13) ASTM D4017-90, 96a, Standard Test Method for Water in Paints and Paint Materials by the Karl Fischer Titration Method, IBR approved for § 63.788, Appendix A.
- (14) ASTM D4082-89, Standard Test Method for Effects of Gamma Radiation on Coatings for Use in Light-Water Nuclear Power Plants, IBR approved for § 63.782.
- (15) ASTM D4256-89, 94, Standard Test Method for Determination of the Decontaminability of Coatings Used in Light-Water Nuclear Power Plants, IBR approved for § 63.782.
- (16) ASTM D4809-95, Standard Test Method for Heat of Combustion of Liquid Hydrocarbon Fuels by Bomb Calorimeter (Precision Method), IBR approved for § 63.11(b)(6).
- (17) ASTM E180-93, Standard Practice for Determining the Precision of ASTM Methods for Analysis and Testing of Industrial Chemicals, IBR approved for § 63.786(b).
- (18) ASTM E260-91, 96, General Practice for Packed Column Gas Chromatography, IBR approved for §§ 63.750(b)(2) and 63.786(b)(5).
- (19) [Reserved]
- (20) [Reserved]
- (21) ASTM D2099-00, Standard Test Method for Dynamic Water Resistance of Shoe Upper Leather by the Maeser Water Penetration Tester, IBR approved for § 63.5350.
- (24) ASTM D2697-86(1998) (Reapproved 1998), Standard Test Method for Volume Nonvolatile Matter in Clear or Pigmented Coatings, IBR approved for §§63.4141(b)(1), 63.4741(b)(1), 63.4941(b)(1), and 63.5160(c).
- (25) ASTM D6093-97, Standard Test Method for Percent Volume Nonvolatile Matter in Clear or Pigmented Coatings Using a Helium Gas Pycnometer, IBR approved for §§63.4141(b)(1), 63.4741(b)(1), 63.4941(b)(1), and 63.5160(c).

APPENDIX A-1
40 CFR 63, Subpart A

National Emission Standards for Hazardous Air Pollutants for Source Categories: General Provisions

(26) ASTM D1475-98, Standard Test Method for Density of Liquid Coatings, Inks, and Related Products, IBR approved for §§ 63.4141(b)(3) and 63.4141(c).

(27) ASTM D 6522-00, Standard Test Method for Determination of Nitrogen Oxides, Carbon Monoxide and Oxygen concentrations in Emissions from Natural Gas Fired Reciprocating Engines, Combustion Turbines, Boilers, and Process heaters Using Portable Analyzers, IBR approved for Sec. 63.9307(c)(2).

(28) [Reserved]

(29) ASTM D6420-99, Standard Test Method for Determination of Gaseous Organic Compounds by Direct Interface Gas Chromatography-Mass Spectrometry, IBR approved for §§ 63.5799 and 63.5850.

(c) The materials listed below are available for purchase from the American Petroleum Institute (API), 1220 L Street, NW., Washington, DC 20005.

(1) API Publication 2517, *Evaporative Loss from External Floating-Roof Tanks*, Third Edition, February 1989, IBR approved for § 63.111 of subpart G of this part.

(2) API Publication 2518, *Evaporative Loss from Fixed-roof Tanks*, Second Edition, October 1991, IBR approved for § 63.150(g)(3)(i)(C) of subpart G of this part.

(3) API Manual of Petroleum Measurement Specifications (MPMS) Chapter 19.2; *Evaporative Loss From Floating-Roof Tanks* (formerly API Publications 2517 and 2519), First Edition, April 1997, IBR approved for § 63.1251 of subpart GGG of this part.

(d) *State and Local Requirements*. The materials listed below are available at the Air and Radiation Docket and Information Center, U.S. EPA, 401 M St., SW., Washington, DC.

(1) *California Regulatory Requirements Applicable to the Air Toxics Program*, January 5, 1999, IBR approved for § 63.99(a)(5)(ii) of subpart E of this part.

(2) *New Jersey's Toxic Catastrophe Prevention Act Program*, (July 20, 1998), Incorporation By Reference approved for § 63.99 (a)(30)(i) of subpart E of this part.

(3) (i) Letter of June 7, 1999 to the U.S. Environmental Protection Agency Region 3 from the Delaware Department of Natural Resources and Environmental Control requesting formal full delegation to take over primary responsibility for implementation and enforcement of the Chemical Accident Prevention Program under Section 112(r) of the Clean Air Act Amendments of 1990.

(ii) Delaware Department of Natural Resources and Environmental Control, Division of Air and Waste Management, *Accidental Release Prevention Regulation*, sections 1 through 5 and sections 7 through 14, effective January 11, 1999, IBR approved for § 63.99(a)(8)(i) of subpart E of this part.

(iii) State of Delaware Regulations Governing the Control of Air Pollution (October 2000), IBR approved for § 63.99(a)(8)(ii)-(v) of subpart E of this part.

(e) The materials listed below are available for purchase from the National Institute of Standards and Technology, Springfield, VA 22161, (800) 553-6847.

(1) Handbook 44, *Specifications, Tolerances, and Other Technical Requirements for Weighing and Measuring Devices* 1998, IBR approved for § 63.1303(e)(3).

(2) [Reserved]

(f) The following material is available from the National Council of the Paper Industry for Air and Stream Improvement, Inc. (NCASI), P. O. Box 133318, Research Triangle Park, NC 27709-3318 or at <http://www.ncasi.org>: NCASI Method DI/MEOH-94.02, *Methanol in Process Liquids GC/FID (Gas Chromatography/Flame Ionization Detection)*, August 1998, *Methods Manual*, NCASI, Research Triangle Park, NC, IBR approved for § 63.457(c)(3)(ii) of subpart S of this part.

APPENDIX A-1
40 CFR 63, Subpart A

National Emission Standards for Hazardous Air Pollutants for Source Categories: General Provisions

(g) The materials listed below are available for purchase from AOAC International, Customer Services, Suite 400, 2200 Wilson Boulevard, Arlington, Virginia, 22201-3301, Telephone (703) 522-3032, Fax (703) 522-5468.

(1) AOAC Official Method 978.01 Phosphorus (Total) in Fertilizers, Automated Method, Sixteenth edition, 1995, IBR approved for § 63.626(d)(3)(vi).

(2) AOAC Official Method 969.02 Phosphorus (Total) in Fertilizers, Alkalimetric Quinolinium Molybdophosphate Method, Sixteenth edition, 1995, IBR approved for § 63.626(d)(3)(vi).

(3) AOAC Official Method 962.02 Phosphorus (Total) in Fertilizers, Gravimetric Quinolinium Molybdophosphate Method, Sixteenth edition, 1995, IBR approved for § 63.626(d)(3)(vi).

(4) AOAC Official Method 957.02 Phosphorus (Total) in Fertilizers, Preparation of Sample Solution, Sixteenth edition, 1995, IBR approved for § 63.626(d)(3)(vi).

(5) AOAC Official Method 929.01 Sampling of Solid Fertilizers, Sixteenth edition, 1995, IBR approved for § 63.626(d)(3)(vi).

(6) AOAC Official Method 929.02 Preparation of Fertilizer Sample, Sixteenth edition, 1995, IBR approved for § 63.626(d)(3)(vi).

(7) AOAC Official Method 958.01 Phosphorus (Total) in Fertilizers, Spectrophotometric Molybdovanadophosphate Method, Sixteenth edition, 1995, IBR approved for § 63.626(d)(3)(vi).

(h) The materials listed below are available for purchase from The Association of Florida Phosphate Chemists, P.O. Box 1645, Bartow, Florida, 33830, Book of Methods Used and Adopted By The Association of Florida Phosphate Chemists, Seventh Edition 1991, IBR.

(1) Section IX, Methods of Analysis for Phosphate Rock, No. 1 Preparation of Sample, IBR approved for § 63.606(c)(3)(ii) and § 63.626(c)(3)(ii).

(2) Section IX, Methods of Analysis for Phosphate Rock, No. 3 Phosphorus -- P₂O₅ or Ca₃(PO₄)₂, Method A-Volumetric Method, IBR approved for § 63.606(c)(3)(ii) and § 63.626(c)(3)(ii).

(3) Section IX, Methods of Analysis for Phosphate Rock, No. 3 Phosphorus-P₂O₅ or Ca₃(PO₄)₂, Method B -- Gravimetric Quimociac Method, IBR approved for § 63.606(c)(3)(ii) and § 63.626(c)(3)(ii).

(4) Section IX, Methods of Analysis For Phosphate Rock, No. 3 Phosphorus-P₂O₅ or Ca₃(PO₄)₂, Method C -- Spectrophotometric Method, IBR approved for § 63.606(c)(3)(ii) and § 63.626(c)(3)(ii).

(5) Section XI, Methods of Analysis for Phosphoric Acid, Superphosphate, Triple Superphosphate, and Ammonium Phosphates, No. 3 Total Phosphorus-P₂O₅, Method A -- Volumetric Method, IBR approved for § 63.606(c)(3)(ii), § 63.626(c)(3)(ii), and § 63.626(d)(3)(v).

(6) Section XI, Methods of Analysis for Phosphoric Acid, Superphosphate, Triple Superphosphate, and Ammonium Phosphates, No. 3 Total Phosphorus-P₂O₅, Method B -- Gravimetric Quimociac Method, IBR approved for § 63.606(c)(3)(ii), § 63.626(c)(3)(ii), and § 63.626(d)(3)(v).

(7) Section XI, Methods of Analysis for Phosphoric Acid, Superphosphate, Triple Superphosphate, and Ammonium Phosphates, No. 3 Total Phosphorus-P₂O₅, Method C -- Spectrophotometric Method, IBR approved for § 63.606(c)(3)(ii), § 63.626(c)(3)(ii), and § 63.626(d)(3)(v).

(i) The following materials are available for purchase from at least one of the following addresses: ASME International, Orders/Inquiries, P.O. Box 2900, Fairfield, NJ 07007-2900; or Global Engineering Documents, Sales Department, 15 Inverness Way East, Englewood, CO 80112.

(1) ASME standard number QHO-1-1994, "Standard for the Qualification and Certification of Hazardous Waste Incinerator Operators," IBR approved for Sec. 63.1206(c)(6)(iii).

(2) ASME standard number QHO-1a-1996 Addenda to QHO-1-1994, "Standard for the Qualification and Certification of Hazardous Waste Incinerator Operators," IBR approved for Sec. 63.1206(c)(6)(iii).

APPENDIX A-1
40 CFR 63, Subpart A

National Emission Standards for Hazardous Air Pollutants for Source Categories: General Provisions

(3) ANSI/ASME PTC 19.10-1981, "Flue and Exhaust Gas Analyses [Part 10, Instruments and Apparatus]," IBR approved for Sec. Sec. 63.865(b), 63.3360(e)(1)(iii), 63.4166(a)(3), 63.4362(a)(3), 63.4766(a)(3), 63.4965(a)(3), 63.5160(d)(1)(iii), 63.9307(c)(2), and 63.9323(a)(3).

(j) [Reserved]

(k) The following material may be obtained from U.S. EPA, Office of Solid Waste (5305W), 1200 Pennsylvania Avenue, NW., Washington, DC 20460:

(1) Method 9071B, "n-Hexane Extractable Material (HEM) for Sludge, Sediment, and Solid Samples," (Revision 2, April 1998) as published in EPA Publication SW-846: "Test Methods for Evaluating Solid Waste, Physical/Chemical Methods." The incorporation by reference of Method 9071B is approved for Section 63.7824(e) of Subpart FFFFF of this part.

§ 63.15 Availability of information and confidentiality.

(a) Availability of information.

(1) With the exception of information protected through part 2 of this chapter, all reports, records, and other information collected by the Administrator under this part are available to the public. In addition, a copy of each permit application, compliance plan (including the schedule of compliance), notification of compliance status, excess emissions and continuous monitoring systems performance report, and title V permit is available to the public, consistent with protections recognized in section 503(e) of the Act.

(2) The availability to the public of information provided to or otherwise obtained by the Administrator under this part shall be governed by part 2 of this chapter.

(b) Confidentiality.

(1) If an owner or operator is required to submit information entitled to protection from disclosure under section 114(c) of the Act, the owner or operator may submit such information separately. The requirements of section 114(c) shall apply to such information.

(2) The contents of a title V permit shall not be entitled to protection under section 114(c) of the Act; however, information submitted as part of an application for a title V permit may be entitled to protection from disclosure.

APPENDIX CAM

Compliance Assurance Monitoring Requirements

Emissions Unit 028

Main Stack Baghouse No. 331.BF200
For Preheater/Kiln/Cooler/Raw Mill/Coal Mill
Particulate Emissions

Compliance Assurance Monitoring Requirements

Pursuant to Rule 62-213.440(1)(b)1.a., F.A.C., the CAM plans that are included in this appendix contain the monitoring requirements necessary to satisfy 40 CFR 64. Conditions 1. – 17. are generic conditions applicable to all emissions units that are subject to the CAM requirements. Specific requirements related to each emissions unit are contained in the attached tables, as submitted by the applicant and approved by the Department.

40 CFR 64.6 Approval of Monitoring.

1. The attached CAM plan(s), as submitted by the applicant, is/are approved for the purposes of satisfying the requirements of 40 CFR 64.3. [40 CFR 64.6(a)]
2. The attached CAM plan(s) include the following information:
 - (i) The indicator(s) to be monitored (such as temperature, pressure drop, emissions, or similar parameter);
 - (ii) The means or device to be used to measure the indicator(s) (such as temperature measurement device, visual observation, or CEMS); and
 - (iii) The performance requirements established to satisfy 40 CFR 64.3(b) or (d), as applicable.
[40 CFR 64.6(c)(1)]
3. The attached CAM plan(s) describe the means by which the owner or operator will define an exceedance of the permitted limits or an excursion from the stated indicator ranges and averaging periods for purposes of responding to (see **CAM Conditions 5. - 9.**) and reporting exceedances or excursions (see **CAM Conditions 10. – 14.**). [40 CFR 64.6(c)(2)]
4. The permittee is required to conduct the monitoring specified in the attached CAM plan(s) and shall fulfill the obligations specified in the conditions below (see **CAM Conditions 5. - 17.**).
[40 CFR 64.6(c)(3)]

40 CFR 64.7 Operation of Approved Monitoring.

5. Commencement of operation. The owner or operator shall conduct the monitoring required under this appendix upon the effective date of this Title V permit. [40 CFR 64.7(a)]
6. Proper maintenance. At all times, the owner or operator shall maintain the monitoring, including but not limited to, maintaining necessary parts for routine repairs of the monitoring equipment.
[40 CFR 64.7(b)]
7. Continued operation. Except for, as applicable, monitoring malfunctions, associated repairs, and required quality assurance or control activities (including, as applicable, calibration checks and required zero and span adjustments), the owner or operator shall conduct all monitoring in continuous operation (or shall collect data at all required intervals) at all times that the pollutant-specific emissions unit is operating. Data recorded during monitoring malfunctions, associated repairs, and required quality assurance or control activities shall not be used for purposes of this part, including data averages and calculations, or fulfilling a minimum data availability requirement, if applicable. The owner or operator shall use all the data collected during all other periods in assessing the operation of the control device and associated control system. A monitoring malfunction is any sudden, infrequent, not reasonably preventable failure of the monitoring to provide valid data. Monitoring failures that are caused in part by poor maintenance or careless operation are not malfunctions. [40 CFR 64.7(c)]

8. Response to excursions or exceedances.

- a. Upon detecting an excursion or exceedance, the owner or operator shall restore operation of the pollutant-specific emissions unit (including the control device and associated capture system) to its normal or usual manner of operation as expeditiously as practicable in accordance with good air pollution control practices for minimizing emissions. The response shall include minimizing the period of any startup, shutdown or malfunction and taking any necessary corrective actions to restore normal operation and prevent the likely recurrence of the cause of an excursion or exceedance (other than those caused by excused startup or shutdown conditions, if allowed by this permit). Such actions may include initial inspection and evaluation, recording that operations returned to normal without operator action (such as through response by a computerized distribution control system), or any necessary follow-up actions to return operation to within the indicator range, designated condition, or below the applicable emission limitation or standard, as applicable.
- b. Determination of whether the owner or operator has used acceptable procedures in response to an excursion or exceedance will be based on information available, which may include but is not limited to, monitoring results, review of operation and maintenance procedures and records, and inspection of the control device, associated capture system, and the process.

[40 CFR 64.7(d)(1) & (2)]

- 9. Documentation of need for improved monitoring.** If the owner or operator identifies a failure to achieve compliance with an emission limitation or standard for which the approved monitoring did not provide an indication of an excursion or exceedance while providing valid data, or the results of compliance or performance testing document a need to modify the existing indicator ranges or designated conditions, the owner or operator shall promptly notify the permitting authority and, if necessary, submit a proposed modification to the Title V permit to address the necessary monitoring changes. Such a modification may include, but is not limited to, reestablishing indicator ranges or designated conditions, modifying the frequency of conducting monitoring and collecting data, or the monitoring of additional parameters. [40 CFR 64.7(e)]

40 CFR 64.8 Quality Improvement Plan (QIP) Requirements.

- 10.** Based on the results of a determination made under **CAM Condition 8.a.**, above, the permitting authority may require the owner or operator to develop and implement a QIP. Consistent with **CAM Condition 4.**, an accumulation of exceedances or excursions exceeding 5 percent duration of a pollutant-specific emissions unit's operating time for a reporting period, may require the implementation of a QIP. The threshold may be set at a higher or lower percent or may rely on other criteria for purposes of indicating whether a pollutant-specific emissions unit is being maintained and operated in a manner consistent with good air pollution control practices. [40 CFR 64.8(a)]

11. Elements of a QIP:

- a. The owner or operator shall maintain a written QIP, if required, and have it available for inspection.
- b. The plan initially shall include procedures for evaluating the control performance problems and, based on the results of the evaluation procedures, the owner or operator shall modify the plan to include procedures for conducting one or more of the following actions, as appropriate:
 - (i) Improved preventive maintenance practices.
 - (ii) Process operation changes.
 - (iii) Appropriate improvements to control methods.
 - (iv) Other steps appropriate to correct control performance.

- (v) More frequent or improved monitoring (only in conjunction with one or more steps under **CAM Condition 11.b(i)** through **(iv)**, above).

[40 CFR 64.8(b)]

- 12. If a QIP is required, the owner or operator shall develop and implement a QIP as expeditiously as practicable and shall notify the permitting authority if the period for completing the improvements contained in the QIP exceeds 180 days from the date on which the need to implement the QIP was determined. [40 CFR 64.8(c)]
- 13. Following implementation of a QIP, upon any subsequent determination pursuant to **CAM Condition 8.b.**, the permitting authority may require that an owner or operator make reasonable changes to the QIP if the QIP is found to have:
 - a. Failed to address the cause of the control device performance problems; or
 - b. Failed to provide adequate procedures for correcting control device performance problems as expeditiously as practicable in accordance with good air pollution control practices for minimizing emissions.

[40 CFR 64.8(d)]

- 14. Implementation of a QIP shall not excuse the owner or operator of a source from compliance with any existing emission limitation or standard, or any existing monitoring, testing, reporting or recordkeeping requirement that may apply under federal, state, or local law, or any other applicable requirements under the Act. [40 CFR 64.8(e)]

40 CFR 64.9 Reporting And Recordkeeping Requirements.

15. General reporting requirements.

- a. On and after the date specified in **CAM Condition 5.** by which the owner or operator must use monitoring that meets the requirements of this appendix, the owner or operator shall submit monitoring reports semi-annually to the permitting authority in accordance with Rule 62-213.440(1)(b)3.a., F.A.C.
- b. A report for monitoring under this part shall include, at a minimum, the information required under Rule 62-213.440(1)(b)3.a., F.A.C., and the following information, as applicable:
 - (i) Summary information on the number, duration and cause (including unknown cause, if applicable) of excursions or exceedances, as applicable, and the corrective actions taken;
 - (ii) Summary information on the number, duration and cause (including unknown cause, if applicable) for monitor downtime incidents (other than downtime associated with zero and span or other daily calibration checks, if applicable); and
 - (iii) A description of the actions taken to implement a QIP during the reporting period as specified in **CAM Conditions 10.** through **14.** Upon completion of a QIP, the owner or operator shall include in the next summary report documentation that the implementation of the plan has been completed and reduced the likelihood of similar levels of excursions or exceedances occurring.

[40 CFR 64.9(a)]

16. General recordkeeping requirements.

- a. The owner or operator shall comply with the recordkeeping requirements specified in Rule 62-213.440(1)(b)2., F.A.C.

The owner or operator shall maintain records of monitoring data, monitor performance data, corrective actions taken, any written quality improvement plan required pursuant to **CAM Conditions 10.** through **14.** and any activities undertaken to implement a quality improvement plan, and other supporting information required to be maintained under this part (such as data used to document the adequacy of monitoring, or records of monitoring maintenance or corrective actions).

- b. Instead of paper records, the owner or operator may maintain records on alternative media, such as microfilm, computer files, magnetic tape disks, or microfiche, provided that the use of such alternative media allows for expeditious inspection and review, and does not conflict with other applicable recordkeeping requirements.

[40 CFR 64.9(b)]

40 CFR 64.10 Savings Provisions.

17. It should be noted that nothing in this appendix shall:

- a. Excuse the owner or operator of a source from compliance with any existing emission limitation or standard, or any existing monitoring, testing, reporting or recordkeeping requirement that may apply under federal, state, or local law, or any other applicable requirements under the Act. The requirements of this appendix shall not be used to justify the approval of monitoring less stringent than the monitoring which is required under separate legal authority and are not intended to establish minimum requirements for the purpose of determining the monitoring to be imposed under separate authority under the Act, including monitoring in permits issued pursuant to title I of the Act. The purpose of this part is to require, as part of the issuance of a permit under Title V of the Act, improved or new monitoring at those emissions units where monitoring requirements do not exist or are inadequate to meet the requirements of this part.
- b. Restrict or abrogate the authority of the Administrator or the permitting authority to impose additional or more stringent monitoring, recordkeeping, testing, or reporting requirements on any owner or operator of a source under any provision of the Act, including but not limited to sections 114(a)(1) and 504(b), or state law, as applicable.
- c. Restrict or abrogate the authority of the Administrator or permitting authority to take any enforcement action under the Act for any violation of an applicable requirement or of any person to take action under section 304 of the Act.

[40 CFR 64.10]

Table 1. Monitoring Approach

<u>Indicator</u>	<u>Opacity</u>
Measurement Approach	Continuous opacity monitoring system (COMS)
Indicator Range	5.0% Opacity on the basis of five consecutive 6-minute average measurements.
Actions	Excursions trigger an inspection, corrective action, and a record keeping requirement. Corrective action will be taken as necessary and in accordance with the procedures supplied by the baghouse manufacturer or the internal Inspection and Maintenance Program.
Data Representativeness	<p>This is a new kiln that does not have an extended operating history. The main baghouse and stack process the combined exhaust and emissions of the cooler, kiln, raw mill, and coal mill. The stack is subject to a PM/PM₁₀ limitation of 0.063/0.053 lb/ton of feed and an opacity limitation of 10% on a 6-minute basis. Visible emissions (opacity) measurements are made in the stack.</p> <p>Based on available data under normal operation, the representative stack opacity is typically in the range of 1 to 5%. Thus far, the PM/PM₁₀ tests have been in the range of 40-70% of the limit. It is believed that operation in the range of 5-10% opacity would concurrently challenge the PM/PM₁₀ limitation.</p>
Verification of Operational Status	The COMS is integrated into the Data Acquisition System (DAS) for all plant processes and environmental recordkeeping.
QA/QC Practices and Criteria	Operate COMS according to 40 CFR Part 60 Appendix B, Performance Specification 1 and general provisions 60.13. These specify daily "zero" and "span" checks as well as periodic audits.
Monitoring Frequency	Opacity is monitored continuously. One-minute averages are stored in the DAS. 6-minute averages are also stored for the purpose of demonstrating compliance with the 10% opacity limitation.
Data Collection Procedures	The light beam crosses the measurement path and the system measures the light attenuation from dust in the stack and converts transmission into an electronic signal that is related to opacity.

APPENDIX CG

COMMON AND GENERAL CONDITIONS

{Permitting Note: Unless otherwise specified in the permit, the following conditions apply to all emissions units and activities at the facility.}

EMISSIONS AND CONTROLS

1. Plant Operation - Problems: If temporarily unable to comply with any of the conditions of the permit due to breakdown of equipment or destruction by fire, wind or other cause, the permittee shall notify each Compliance Authority as soon as possible, but at least within one working day, excluding weekends and holidays. The notification shall include: pertinent information as to the cause of the problem; steps being taken to correct the problem and prevent future recurrence; and, where applicable, the owner's intent toward reconstruction of destroyed facilities. Such notification does not release the permittee from any liability for failure to comply with the conditions of this permit or the regulations. [Rule 62-4.130, F.A.C.]
2. General Pollutant Emission Limiting Standards. Objectionable Odor Prohibited. No person shall cause, suffer, allow, or permit the discharge of air pollutants, which cause or contribute to an objectionable odor.
[Rule 62-296.320(2), F.A.C.]
3. General Particulate Emission Limiting Standards. General Visible Emissions Standard.
Except for emissions units that are subject to a particulate matter or opacity limit set forth or established by rule and reflected by conditions in this permit, no person shall cause, let, permit, suffer or allow to be discharged into the atmosphere the emissions of air pollutants from any activity, the density of which is equal to or greater than that designated as Number 1 on the Ringelmann Chart (20 percent opacity). EPA Method 9 is the method of compliance pursuant to Chapter 62-297, F.A.C.
[Rules 62-296.320(4)(b)1. & 4., F.A.C.]
4. General Pollutant Emission Limiting Standards. Volatile Organic Compounds (VOC) Emissions or Organic Solvents (OS) Emissions. The permittee shall allow no person to store, pump, handle, process, load, unload or use in any process or installation, volatile organic compounds (VOC) or organic solvents (OS) without applying known and existing vapor emission control devices or systems deemed necessary and ordered by the Department.
[Rule 62-296.320(1)(a), F.A.C.]
5. Circumvention: The permittee shall not circumvent the air pollution control equipment or allow the emission of air pollutants without this equipment operating properly. [Rule 62-210.650, F.A.C.]
6. Excess Emissions Allowed: Excess emissions resulting from startup, shutdown or malfunction of any emissions unit shall be permitted providing (1) best operational practices to minimize emissions are adhered to and (2) the duration of excess emissions shall be minimized but in no case exceed two hours in any 24 hour period unless specifically authorized by the Department for longer duration. [Rule 62-210.700(1), F.A.C.]
7. Excess Emissions Prohibited: Excess emissions caused entirely or in part by poor maintenance, poor operation, or any other equipment or process failure that may reasonably be prevented during startup, shutdown or malfunction shall be prohibited. [Rule 62-210.700(4), F.A.C.]
8. Excess Emissions – Notification and Reporting: In case of excess emissions resulting from malfunctions, the permittee shall notify the Department or the appropriate Local Program in accordance with Rule 62-4.130, F.A.C. A full written report on the malfunctions shall be submitted in a quarterly report, if requested by the Department. [Rule 62-210.700(6), F.A.C.]
9. Volatile Organic Compounds (VOC) or Organic Solvents (OS) Emissions: No person shall store, pump, handle, process, load, unload or use in any process or installation, volatile organic compounds or organic solvents without applying known and existing vapor emission control devices or systems deemed necessary and ordered by the Department. [Rule 62-296.320(1), F.A.C.]
10. Objectionable Odor Prohibited: No person shall cause, suffer, allow or permit the discharge of air pollutants, which cause or contribute to an objectionable odor. An "objectionable odor" means any odor present in the outdoor atmosphere which by itself or in combination with other odors, is or may be harmful or injurious to human health or welfare, which unreasonably interferes with the comfortable use and enjoyment of life or property, or which creates a nuisance. [Rules 62-296.320(2) and 62-210.200(203), F.A.C.]

APPENDIX CG

COMMON AND GENERAL CONDITIONS

11. General Visible Emissions: No person shall cause, let, permit, suffer or allow to be discharged into the atmosphere the emissions of air pollutants from any activity equal to or greater than 20 percent opacity. This regulation does not impose a specific testing requirement. [Rule 62-296.320(4)(b)1, F.A.C.]
12. Unconfined Emissions of Particulate Matter:
- (a) No person shall cause, let, permit, suffer or allow the emissions of unconfined particulate matter from any activity, including vehicular movement; transportation of materials; construction, alteration, demolition or wrecking; or industrially related activities such as loading, unloading, storing or handling; without taking reasonable precautions to prevent such emissions.
 - (b) Any permit issued to a facility with emissions of unconfined particulate matter shall specify the reasonable precautions to be taken by that facility to control the emissions of unconfined particulate matter.
 - (c) Reasonable precautions include the following:
 - 1. Paving and maintenance of roads, parking areas and yards.
 - 2. Application of water or chemicals to control emissions from such activities as demolition of buildings, grading roads, construction, and land clearing.
 - 3. Application of asphalt, water, chemicals or other dust suppressants to unpaved roads, yards, open stock piles and similar activities.
 - 4. Removal of particulate matter from roads and other paved areas under the control of the owner or operator of the facility to prevent reentrainment, and from buildings or work areas to prevent particulate from becoming airborne.
 - 5. Landscaping or planting of vegetation.
 - 6. Use of hoods, fans, filters, and similar equipment to contain, capture and/or vent particulate matter.
 - 7. Confining abrasive blasting where possible.
 - 8. Enclosure or covering of conveyor systems.

Additional reasonable precautions applicable to this facility are contained in Permits No. 0250020-017-AC and No. 0250020-018-AV.

- (d) In determining what constitutes reasonable precautions for a particular source, the Department shall consider the cost of the control technique or work practice, the environmental impacts of the technique or practice, and the degree of reduction of emissions expected from a particular technique or practice.

[Rule 62-296.320(4)(c), F.A.C.]

TESTING REQUIREMENTS

13. Required Number of Test Runs: For mass emission limitations, a compliance test shall consist of three complete and separate determinations of the total air pollutant emission rate through the test section of the stack or duct and three complete and separate determinations of any applicable process variables corresponding to the three distinct time periods during which the stack emission rate was measured; provided, however, that three complete and separate determinations shall not be required if the process variables are not subject to variation during a compliance test, or if three determinations are not necessary in order to calculate the unit's emission rate. The three required test runs shall be completed within one consecutive five-day period. In the event that a sample is lost or one of the three runs must be discontinued because of circumstances beyond the control of the owner or operator, and a valid third run cannot be obtained within the five-day period allowed for the test, the Secretary or his or her designee may accept the results of two complete runs as proof of compliance, provided that the arithmetic mean of the two complete runs is at least 20% below the allowable emission limiting standard. [Rule 62-297.310(1), F.A.C.]
14. Operating Rate During Testing: Testing of emissions shall be conducted with the emissions unit operating at permitted capacity. Permitted capacity is defined as 90 to 100 percent of the maximum operation rate allowed by the permit. If it is impractical to test at permitted capacity, an emissions unit may be tested at less than the maximum permitted capacity; in this case, subsequent emissions unit operation is limited to 110 percent of the test rate until a new test is conducted. Once the unit is so limited, operation at higher capacities is allowed for no more than 15 consecutive days for the purpose of additional compliance testing to regain the authority to operate at the permitted capacity.

APPENDIX CG

COMMON AND GENERAL CONDITIONS

Emissions testing shall be performed at the kiln/cooler main stack during a period when the kiln precalciner, cooler, raw mill and preheater are operating simultaneously and under normal operating conditions. EPA-reference methods for sampling pollutants shall be as specified in 40 CFR 63, Appendix A. These emissions units shall comply with all applicable requirements of Rule 62-297.310, F.A.C. General Test Requirements and 40 CFR 63.1349, Performance Tests.

Fuel Protocol: The permittee shall provide the DERM with a protocol that will outline the different fuel scenarios (% of total heat input) that this unit will be burning. Tarmac shall obtain the test data necessary to determine whether this kiln is capable of accommodating the burning of coal or petroleum coke and all of the other supplemental fuels specified on *Section III, Subsection B, Specific Condition 3- Fuels*. The fuel scenarios tested shall represent the actual combustion percentage (% of total heat input) that is going to be maintained while burning supplemental fuels during normal operation. The frequency of testing shall be determined by DERM. [Rules 62-297.310(2) & (2)(b), F.A.C., and Permit No. 0250020-010-AC]

15. Calculation of Emission Rate: For each emissions performance test, the indicated emission rate or concentration shall be the arithmetic average of the emission rate or concentration determined by each of the three separate test runs unless otherwise specified in a particular test method or applicable rule. [Rule 62-297.310(3), F.A.C.]

16. Test Performance Requirements: Tests shall be conducted in accordance with all applicable requirements of 40CFR60, Subpart A - General Provisions and 40CFR63, Subpart A - General Provisions (attached as Appendices E and F).

17. Applicable Test Procedures.

(a) Required Sampling Time.

1. Unless otherwise specified in the applicable rule, the required sampling time for each test run shall be no less than one hour and no greater than four hours, and the sampling time at each sampling point shall be of equal intervals of at least two minutes.

2. Opacity Compliance Tests. When EPA Method 9 is specified as the applicable opacity test method, the required minimum period of observation for a compliance test shall be sixty (60) minutes for emissions units which emit or have the potential to emit 100 tons per year or more of particulate matter, and thirty (30) minutes for emissions units which have potential emissions less than 100 tons per year of particulate matter and are not subject to a multiple-valued opacity standard. The opacity test observation period shall include the period during which the highest opacity emissions can reasonably be expected to occur.

Exceptions to these requirements are as follows:

a. The minimum observation period for opacity tests conducted by employees or agents of the Department to verify the day-to-day continuing compliance of a unit or activity with an applicable opacity standard shall be twelve minutes.

(b) Minimum Sample Volume. Unless otherwise specified in the applicable rule, the minimum sample volume per run shall be 25 dry standard cubic feet.

(c) Required Flow Rate Range. For EPA Method 5 particulate sampling, acid mist/sulfur dioxide, and fluoride sampling which uses Greenburg Smith type impingers, the sampling nozzle and sampling time shall be selected such that the average sampling rate will be between 0.5 and 1.0 actual cubic feet per minute, and the required minimum sampling volume will be obtained.

(d) Calibration of Sampling Equipment. Calibration of the sampling train equipment shall be conducted in accordance with the schedule shown in Table 297.310-1 (attached).

(e) Allowed Modification to EPA Method 5. When EPA Method 5 is required, the following modification is allowed: the heated filter may be separated from the impingers by a flexible tube.

[Rule 62-297.310(4), F.A.C.]

18. Determination of Process Variables

a. Required Equipment. The owner or operator of an emissions unit for which compliance tests are required shall install, operate, and maintain equipment or instruments necessary to determine process variables, such as process weight input or heat input, when such data are needed in conjunction with emissions data to determine the compliance of the emissions unit with applicable emission limiting standards.

APPENDIX CG

COMMON AND GENERAL CONDITIONS

- b. *Accuracy of Equipment.* Equipment or instruments used to directly or indirectly determine process variables, including devices such as belt scales, weight hoppers, flow meters, and tank scales, shall be calibrated and adjusted to indicate the true value of the parameter being measured with sufficient accuracy to allow the applicable process variable to be determined within 10% of its true value.

[Rule 62-297.310(5), F.A.C.]

19. *Sampling Facilities:* The permittee shall install permanent stack sampling ports and provide sampling facilities that meet the requirements of Rule 62-297.310(6), F.A.C. Refer to Appendix SS-1 Stack Sampling Facilities, attached to this permit.
20. *Test Notification:* The owner or operator shall notify in writing to the Compliance Authority, at least 30 days (initial) and 15 days (annual) prior to the date on which each formal compliance test is to begin, of the date, time, and place of each such test, and the test contact person who will be responsible for coordinating and having such test conducted for the owner or operator. [Rule 62-297.310(7)(a)9, F.A.C.]
21. *Frequency of Compliance Tests.* The following provisions apply only to those emissions units that are subject to an emissions limiting standard for which compliance testing is required.

(a) *General Compliance Testing.*

1. The owner or operator of an emissions unit that is subject to any emission limiting standard shall conduct a compliance test that demonstrates compliance with the applicable emission limiting standard prior to obtaining a renewed operation permit. Emissions units that are required to conduct an annual compliance test may submit the most recent annual compliance test to satisfy the requirements of this provision. In renewing an air operation permit pursuant to Rule 62-210.300(2)(a)3.b., c., or d., F.A.C., the Department shall not require submission of emission compliance test results for any emissions unit that, during the year prior to renewal:

a. Did not operate; or

b. In the case of a fuel burning emissions unit, burned liquid fuel for a total of no more than 400 hours.

2. During each federal fiscal year (October 1 - September 30), unless otherwise specified by rule, order, or permit, the owner or operator of each emissions unit shall have a formal compliance test conducted for:

a. Visible emissions, if there is an applicable standard;

b. Each of the following pollutants, if there is an applicable standard, and if the emissions unit emits or has the potential to emit: 5 tons per year or more of lead or lead compounds measured as elemental lead; or 100 tons per year or more of any other regulated air pollutant; and,

c. Each NESHAP pollutant, if there is an applicable emission standard.

3. The owner or operator shall notify the Department, at least 15 days prior to the date on which each formal compliance test is to begin, of the date, time, and place of each such test, and the test contact person who will be responsible for coordinating and having such test conducted for the owner or operator.

- (b) *Special Compliance Tests.* When the Department, after investigation, has good reason (such as complaints, increased visible emissions or questionable maintenance of control equipment) to believe that any applicable emission standard contained in a Department rule or in a permit issued pursuant to those rules is being violated, it may require the owner or operator of the emissions unit to conduct compliance tests which identify the nature and quantity of pollutant emissions from the emissions unit and to provide a report on the results of said tests to the Department.

- (c) *Waiver of Compliance Test Requirements.* If the owner or operator of an emissions unit that is subject to a compliance test requirement demonstrates to the Department, pursuant to the procedure established in Rule 62-297.620, F.A.C., that the compliance of the emissions unit with an applicable weight emission limiting standard can be adequately determined by means other than the designated test procedure, such as specifying a surrogate standard of no visible emissions for particulate matter sources equipped with a bag house or specifying a fuel analysis for sulfur dioxide emissions, the Department shall waive the compliance test requirements for such emissions units and order that the alternate means of determining compliance be used, provided, however, the provisions of Rule 62-297.310(7)(b), F.A.C., shall apply.

[Rule 62-297.310(7), F.A.C.; 40 CFR 63.1349(c)]

APPENDIX CG

COMMON AND GENERAL CONDITIONS

22. Test Reports: The owner or operator of an emissions unit for which a compliance test is required shall file a report with the Department on the results of each such test. The required test report shall be filed with the Department as soon as practical but no later than 45 days after the last sampling run of each test is completed. The test report shall provide sufficient detail on the emissions unit tested and the test procedures used to allow the Department to determine if the test was properly conducted and the test results properly computed. As a minimum, the test report, other than for an EPA or DEP Method 9 test, shall provide the following information:
1. The type, location, and designation of the emissions unit tested.
 2. The facility at which the emissions unit is located.
 3. The owner or operator of the emissions unit.
 4. The normal type and amount of fuels used and materials processed, and the types and amounts of fuels used and material processed during each test run.
 5. The means, raw data and computations used to determine the amount of fuels used and materials processed, if necessary to determine compliance with an applicable emission limiting standard.
 6. The type of air pollution control devices installed on the emissions unit, their general condition, their normal operating parameters (pressure drops, total operating current and GPM scrubber water), and their operating parameters during each test run.
 7. A sketch of the duct within 8 stack diameters upstream and 2 stack diameters downstream of the sampling ports, including the distance to any upstream and downstream bends or other flow disturbances.
 8. The date, starting time and duration of each sampling run.
 9. The test procedures used, including any alternative procedures authorized pursuant to Rule 62-297.620, F.A.C. Where optional procedures are authorized in this chapter, indicate which option was used.
 10. The number of points sampled and configuration and location of the sampling plane.
 11. For each sampling point for each run, the dry gas meter reading, velocity head, pressure drop across the stack, temperatures, average meter temperatures and sample time per point.
 12. The type, manufacturer and configuration of the sampling equipment used.
 13. Data related to the required calibration of the test equipment.
 14. Data on the identification, processing and weights of all filters used.
 15. Data on the types and amounts of any chemical solutions used.
 16. Data on the amount of pollutant collected from each sampling probe, the filters, and the impingers, are reported separately for the compliance test.
 17. The names of individuals who furnished the process variable data, conducted the test, analyzed the samples and prepared the report.
 18. All measured and calculated data required to be determined by each applicable test procedure for each run.
 19. The detailed calculations for one run that relate the collected data to the calculated emission rate.
 20. The applicable emission standard and the resulting maximum allowable emission rate for the emissions unit plus the test result in the same form and unit of measure.
 21. A certification that, to the knowledge of the owner or his authorized agent, all data submitted are true and correct. When a compliance test is conducted for the Department or its agent, the person who conducts the test shall provide the certification with respect to the test procedures used. The owner or his authorized agent shall certify that all data required and provided to the person conducting the test are true and correct to his knowledge.

[Rule 62-297.310(8), F.A.C.]

APPENDIX CG

COMMON AND GENERAL CONDITIONS

RECORDS AND REPORTS

23. Records Retention: All measurements, records, and other data required by this permit shall be documented in a permanent, legible format and retained for at least five (5) years following the date on which such measurements, records, or data are recorded. Records shall be made available to the Department upon request. [Rules 62-4.160(14) and 62-213.440(1)(b)2, F.A.C.]
24. Annual Operating Report: The permittee shall submit an annual report that summarizes the actual operating rates and emissions from this facility. Annual operating reports shall be submitted to the Compliance Authority by March 1st of each year. [Rule 62-210.370(2), F.A.C.]
25. Waste Disposal: The permittee shall treat, store, and dispose of all liquid, solid and hazardous waste in accordance with applicable federal, state and local regulations. [Rule 62-4.070 (3) F.A.C., Permit 0250020-014-AC]

APPENDIX CP-1
Compliance Plan

Background:

Permit No. 0250020-017-AC to increase cement production was issued December 2, 2005. The permit included a Fugitive Dust Improvement Plan that contained 12 Specific Conditions with numerous tasks, most of which were to be accomplished by specific dates. All of the requirements with specific implementation dates were completed on schedule.

Two of the conditions relate to road improvement projects that require interaction with and approvals from the local municipality. These do not have specific completion dates. However one of them (upgrade of 102nd Road) has already been implemented while the other road improvement has not yet been implemented (upgrade of 106th Avenue). Therefore this Compliance Plan is required.

Prior to issuance of this Title V Permit Operation Renewal, Titan contacted the Department to advise of a number of differences between the Department's listing of facility emission points at the Aggregate Plant as well as the number of Concrete Batch Ready Mix Plants at the facility.

Following are the key items identified by Titan:

- The concrete ready mix portion of the facility contains two rather than one plant. The second plant was added in 2003 to support construction of the cement plant modernization project. They intended to move the plant to Hollywood once construction of the new kiln line was complete. However they sold the property in Hollywood and now wish to keep the plant at the Pennsuco facility.
- The Aggregate Plant contains numerous emissions points. Some were not accurately noted in the Department's information although the listing is based on records provided by Titan and a Table appended to an earlier Air Construction Permit and the facility Title V Operation Permit.

The Department has determined that an after-the-fact minor source air construction permit is required to authorize the second Concrete Batch Ready Mix Plant and to correct the emission point information (Table I) for the Aggregate Plant.

Compliance Plan:

Following are the Compliance Plan items to follow:

1. Titan shall reroute truck traffic associated with the Packhouse. A new entrance road shall be constructed by extending 106th Avenue north along the east side of the property, just east of the old ESPs. This road improvement will be implemented in cooperation with the City of Medley. Once the entrance road is completed, the limerock road from the Packhouse to 106th Avenue shall be paved. This will reduce truck traffic on the Main plant entrance road (off U.S. 27), and will reduce fugitive emissions from unpaved roads. Schedule: Complete the project by June 30, 2008.
2. Titan shall continue to submit quarterly progress reports regarding the Fugitive Dust Improvement Plan, but shall limit the reports to the status of the Packhouse Traffic requirement given above. The quarterly reports shall be submitted within 10 days following the end of each quarter (January 10, April 10, July 10, October 10) and shall be discontinued

APPENDIX CP-1
Compliance Plan

upon after submittal of the report that indicates completion of the Packhouse Traffic requirement.

3. Titan shall submit substantially complete applications to modify the Aggregate Plant Equipment List (Table 1) and to construct the second Concrete Batch Ready Mix Plant by March 1, 2007.
4. Titan shall respond in writing to requests for additional information within 15 days of receipt to assist the permitting authority in prompt processing of the applications.

The quarterly progress reports and air construction permit applications shall be submitted to:

Ms. Mallika Muthiah, Chief
Air Facilities Section
33 S.W. 2 Avenue, Suite 900
Miami, Florida 33130-1540

Any performance tests shall be conducted using approved methodology established in each air construction permit and as agreed upon with Miami-Dade County DERM.

APPENDIX CF
CITATION FORMATS

The following examples illustrate the format used in the permit to identify applicable permitting actions and regulations.

REFERENCES TO PREVIOUS PERMITTING ACTIONS

Old Permit Numbers

Example: Permit No. AC50-123456 or Air Permit No. AO50-123456

Where: “AC” identifies the permit as an Air Construction Permit

“AO” identifies the permit as an Air Operation Permit

“123456” identifies the specific permit project number

New Permit Numbers

Example: Permit Nos. 099-2222-001-AC, 099-2222-001-AF, 099-2222-001-AO, or 099-2222-001-AV

Where: “099” represents the specific county ID number in which the project is located

“2222” represents the specific facility ID number

“001” identifies the specific permit project

“AC” identifies the permit as an air construction permit

“AF” identifies the permit as a minor federally enforceable state operation permit

“AO” identifies the permit as a minor source air operation permit

“AV” identifies the permit as a Title V Major Source Air Operation Permit

PSD Permit Numbers

Example: Permit No. PSD-FL-317

Where: “PSD” means issued pursuant to the Prevention of Significant Deterioration of Air Quality

“FL” means that the permit was issued by the State of Florida

“317” identifies the specific permit project

RULE CITATION FORMATS

Florida Administrative Code (F.A.C.)

Example: [Rule 62-213.205, F.A.C.]

Means: Title 62, Chapter 213, Rule 205 of the Florida Administrative Code

Code of Federal Regulations (CFR)

Example: [40 CFR 60.7]

Means: Title 40, Part 60, Section 7

APPENDIX F

40 CFR 60 Subpart F - Standards of Performance for Portland Cement Plants

[Last Updated: 2/7/02]

{Source: Federal Register dated 7/1/98, Revised 2/7/02 to reflect FR 10/17/00}

§ 60.60 Applicability and designation of affected facility.

(a) The provisions of this subpart are applicable to the following affected facilities in portland cement plants: Kiln, clinker cooler, raw mill system, finish mill system, raw mill dryer, raw material storage, clinker storage, finished product storage, conveyor transfer points, bagging and bulk loading and unloading systems.

(b) Any facility under paragraph (a) of this section that commences construction or modification after August 17, 1971, is subject to the requirements of this subpart.

[42 FR 37936, July 25, 1977]

§ 60.61 Definitions.

As used in this subpart, all terms not defined herein shall have the meaning given them in the Act and in subpart A of this part.

(a) *Portland cement plant* means any facility manufacturing portland cement by either the wet or dry process.

(b) *Bypass* means any system that prevents all or a portion of the kiln or clinker cooler exhaust gases from entering the main control device and ducts the gases through a separate control device. This does not include emergency systems designed to duct exhaust gases directly to the atmosphere in the event of a malfunction of any control device controlling kiln or clinker cooler emissions.

(c) *Bypass stack* means the stack that vents exhaust gases to the atmosphere from the bypass control device.

(d) *Monovent* means an exhaust configuration of a building or emission control device (e.g., positive- pressure fabric filter) that extends the length of the structure and has a width very small in relation to its length (i.e., length to width ratio is typically greater than 5:1). The exhaust may be an open vent with or without a roof, louvered vents, or a combination of such features.

[36 FR 24877, Dec. 23, 1971, as amended at 39 FR 20793, June 13, 1974; 53 FR 50363, Dec. 14, 1988]

§ 60.62 Standard for particulate matter.

(a) On and after the date on which the performance test required to be conducted by § 60.8 is completed, no owner or operator subject to the provisions of this subpart shall cause to be discharged into the atmosphere from any kiln any gases which:

(1) Contain particulate matter in excess of 0.15 kg per metric ton of feed (dry basis) to the kiln (0.30 lb per ton).

(2) Exhibit greater than 20 percent opacity.

(b) On and after the date on which the performance test required to be conducted by § 60.8 is completed, no owner or operator subject to the provisions of this subpart shall cause to be discharged into the atmosphere from any clinker cooler any gases which:

(1) Contain particulate matter in excess of 0.050 kg per metric ton of feed (dry basis) to the kiln (0.10 lb per ton).

(2) Exhibit 10 percent opacity, or greater.

(c) On and after the date on which the performance test required to be conducted by § 60.8 is completed, no owner or operator subject to the provisions of this subpart shall cause to be discharged into the atmosphere from any affected facility other than the kiln and clinker cooler any gases which exhibit 10 percent opacity, or

APPENDIX F

40 CFR 60 Subpart F - Standards of Performance for Portland Cement Plants

greater. [39 FR 20793, June 14, 1974, as amended at 39 FR 39874, Nov. 12, 1974; 40 FR 46258, Oct. 6, 1975]

§ 60.63 Monitoring of operations.

(a) The owner or operator of any portland cement plant subject to the provisions of this part shall record the daily production rates and kiln feed rates.

(b) Except as provided in paragraph (c) of this section, each owner or operator of a kiln or clinker cooler that is subject to the provisions of this subpart shall install, calibrate, maintain, and operate in accordance with § 60.13 a continuous opacity monitoring system to measure the opacity of emissions discharged into the atmosphere from any kiln or clinker cooler. Except as provided in paragraph

(c) of this section, a continuous opacity monitoring system shall be installed on each stack of any multiple stack device controlling emissions from any kiln or clinker cooler. If there is a separate bypass installed, each owner or operator of a kiln or clinker cooler shall also install, calibrate, maintain, and operate a continuous opacity monitoring system on each bypass stack in addition to the main control device stack. Each owner or operator of an affected kiln or clinker cooler for which the performance test required under § 60.8 has been completed on or prior to December 14, 1988, shall install the continuous opacity monitoring system within 180 days after December 14, 1988.

(c) Each owner or operator of a kiln or clinker cooler subject to the provisions of this subpart using a positive-pressure fabric filter with multiple stacks, or a negative-pressure fabric filter with multiple stacks, or an electrostatic precipitator with multiple stacks may, in lieu of installing the continuous opacity monitoring system required by § 60.63(b), monitor visible emissions at least once per day by using a certified visible emissions observer. If the control device exhausts gases through a monovent, visible emission observations in lieu of a continuous opacity monitoring system are required. These observations shall be taken in accordance with EPA Method 9. Visible emissions shall be observed during conditions representative of normal operation. Observations shall be recorded for at least three 6-minute periods each day. In the event that visible emissions are observed for a number of emission sites from the control device with multiple stacks, Method 9 observations shall be recorded for the emission site with the highest opacity. All records of visible emissions shall be maintained for a period of 2 years.

(d) For the purpose of reports under § 60.65, periods of excess emissions that shall be reported are defined as all 6-minute periods during which the average opacity exceeds that allowed by § 60.62(a)(2) or § 60.62(b)(2).

(e) The provisions of paragraphs (a), (b), and (c) of this section apply to kilns and clinker coolers for which construction, modification, or reconstruction commenced after August 17, 1971.

[36 FR 24877, Dec. 23, 1971, as amended at 53 FR 50363, Dec. 14, 1988]

§ 60.64 Test methods and procedures.

(a) In conducting the performance tests required in § 60.8, the owner or operator shall use as reference methods and procedures the test methods in 40 CFR 60 Appendix A or other methods and procedures as specified in this section, except as provided in § 60.8(b).

(b) The owner or operator shall determine compliance with the particulate matter standard in § 60.62 as follows:

(1) The emission rate (E) of particulate matter shall be computed for each run using the following equation:

$$E=(c_s Qsd)/(P K)$$

APPENDIX F

40 CFR 60 Subpart F - Standards of Performance for Portland Cement Plants

where:

E = emission rate of particulate matter, kg/metric ton (lb/ton) of kiln feed.

C_s = concentration of particulate matter, g/dscm (gr/dscf).

Qsd = volumetric flow rate of effluent gas, dscm/hr (dscf/hr).

P = total kiln feed (dry basis) rate, metric ton/hr (ton/hr).

K = conversion factor, 1000 g/kg (7000 gr/lb).

(2) Method 5 shall be used to determine the particulate matter concentration (cs) and the volumetric flow rate (Qsd) of the effluent gas. The sampling time and sample volume for each run shall be at least 60 minutes and 0.85 dscm (30.0 dscf) for the kiln and at least 60 minutes and 1.15 dscm (40.6 dscf) for the clinker cooler.

(3) Suitable methods shall be used to determine the kiln feed rate (P), except fuels, for each run. Material balance over the production system shall be used to confirm the feed rate.

(4) Method 9 and the procedures in § 60.11 shall be used to determine opacity.

[54 FR 6666, Feb. 14, 1989]

§ 60.65 Recordkeeping and reporting requirements.

(a) Each owner or operator required to install a continuous opacity monitoring system under § 60.63(b) shall submit reports of excess emissions as defined in § 60.63(d). The content of these reports must comply with the requirements in § 60.7(c). Notwithstanding the provisions of § 60.7(c), such reports shall be submitted semi-annually.

(b) Each owner or operator monitoring visible emissions under § 60.63(c) shall submit semi-annual reports of observed excess emissions as defined in § 60.63(d).

(c) Each owner or operator of facilities subject to the provisions of § 60.63(c) shall submit semi-annual reports of the malfunction information required to be recorded by § 60.7(b). These reports shall include the frequency, duration, and cause of any incident resulting in deenergization of any device controlling kiln emissions or in the venting of emissions directly to the atmosphere.

(d) The requirements of this section remain in force until and unless the Agency, in delegating enforcement authority to a State under section 111(c) of the Clean Air Act, 42 U.S.C. 7411, approves reporting requirements or an alternative means of compliance surveillance adopted by such States. In that event, affected sources within the State will be relieved of the obligation to comply with this section, provided that they comply with the requirements established by the State.

[53 FR 50364, Dec. 14, 1988]

§ 60.66 Delegation of authority.

(a) In delegating implementation and enforcement authority to a State under section 111(c) of the Act, the authorities contained in paragraph (b) of this section shall be retained by the Administrator and not transferred to a State.

(b) Authorities which will not be delegated to States: No restrictions.

Appendix H-1: Permit History

Titan America, LLC.
Titan America Pennsuco Complex

FINAL Permit Revision No.: 0250020-018-AV
Facility ID No.: 0250020

E.U. ID No.	Description of Affected Units	Permit No.	Effective Date	Expiration Date	Project Type Description
020	New 125 Slag TPH Dryer	0250020-001-AC	6/6/97	6/6/02	PSD-FL-236 to construct a Slag Dryer
		0250020-002-AV			Refer to 0250020-009-AV
020	125 TPH Slag Dryer	0250020-003-AC	11/20/95	7/1/96	AC Amendment to incorporate test plan
020	125 TPH Slag Dryer	0250020-004-AC	10/27/95	7/01/96	AC Modification to use slag as a cement product
005	Kiln No.2 Coal Conversion	0250020-005-AC	2/27/91	2/27/96	AC Permit Modification - PSD-FL-142
005	Kiln No.2 Coal Conversion	0250020-006-AC	11/20/95	5/31/96	AC Modification - Reevaluation of Kiln NOx limit
005	Kiln No.2	0250020-007-AC	2/12/99	2/12/04	AC Permit Modification - Kiln No. 2 modification from direct to indirect firing
-026 thru -030	New Dry Process Cement Plant System Units Kiln & Cooler No. 5 and Associated Equipment	0250020-008-AC	4/28/99	10/20/02	AC Permit to construct a 160 TPH clinker dry process cement plant (In-line Kiln and Clinker No.5 and support equipment)
-All Units	Existing Facility (1960 to 1999)	0250020-009-AV (0250020-002-AV)	10/26/00	10/25/05	Initial Title V Permit. It incorporates PSD-FI-050; PSD-FL-142; PSD-FL-236; AC-13-540054; AC-13-27742; AC13-158138; AC13-234568, AC13-21098 and permitting actions 0250020-001-AC; 0250020-003-AC; 0250020-004-AC; 0250020-005-AC; 0250020-006-AC and 0250020-007-AC.
-026 thru -030	New Dry Process Cement Plant System Units Kiln & Cooler No. 5 and Associated Equipment	0250020-010-AC	5/1/01	1/31/05	AC Permit Modification - To increase clinker production of the dry process cement plant up to 250 TPY. It replaces 0250020-008-AC
-022	Nonmetallic Mineral Processing Plant Subject to NSPS Subpart OOO	AC 13-234568	11/18/93	10/12/94	AC Permit to construct Nonmetallic Mineral Processing Plant Operations.
-023	Nonmetallic Mineral Processing Plant NOT Subject to NSPS Subpart OOO	0250020-011-AV	3/21/02	10/25/05	Title V Permit Revision to include existing Nonmetallic Mineral Processing Plant Operations at the Aggregate Plant - Permit 0250020-012-AC.
022	Aggregate Plant	0250020-012-AC	1/25/02	7/31/02	AC Permit Modification of the Aggregate Plant

Appendix H-1: Permit History

Titan America, LLC.
Titan America Pennsuco Complex

DRAFT Permit Revision No.: 0250020-018-AV
Facility ID No.: 0250020

E.U. ID No.	Description of Affected Units	Permit No.	Effective Date	Expiration Date	Project Type Description
-All Units		0250020-013-AV			<i>Withdrawn.</i> This Title V Revision Project request was to change the designation of major source to area HAPs source; and to include the construction/modifications of Permit No. 0250020-016-AC and 0250020-014-AC. This project was publicly noticed on January 2, 2004 and as a revised Draft on September 28, 2004.
-024	Concrete Block Plant -5,500 block/hr	0250020-014-AC	9/20/02	9/19/03	AC to construct a new 5,500 Block Concrete Plant
-All Units		0250020-015-AV			<i>Withdrawn.</i> Number not allocated.
-026 thru -030	Dry Process Cement Plant System Units Kiln & Cooler No. 5 and Associated Equipment	0250020-016-AC	5/31/05	10/31/05	AC Permit Modification/re-issuance - To adjust physical and operating parameters of new and existing baghouses at the clinker, finish mill and coal mill process system. It also reflects the shutdown of Kiln and Cooler No. 1 & 2 and their support equipment; the shutdown of the 125 TPH slag dryer and of the cement dust insufflation systems. It replaces Permit 0250020-010-AC
-026 thru -030	Dry Process Cement Plant System Units Kiln & Cooler No. 5 and Associated Equipment	0250020-017-AC (PSD-FL-360)	12/2/05	4/30/06	AC Permit Modification/Re-issuance: To increase annual clinker production from 1,642,500 to 2,190,000 TPY keeping the hourly rate of 250 TPH clinker. It replaces 0250020-016-AC
-All Units	Facility	0250020-018-AV	Pending	10/25/10	Title V Permit Renewal/Revision. It incorporates Permit construction/modification projects 0250020-014-AC; 0250020-016-AC and the final equipment reconfiguration and production increase stated in Permit 0250020-017-AC. It also reiterates the applicability of the major provisions of 40CFR63, Subpart LLL.
-026 thru -030	Dry Process Cement Plant System Units Kiln & Cooler No. 5 and Associated Equipment	0250020-019-AC	Pending	12/31/06	AC Permit modification. It revises and supplements Permit 0250020-017-AC. This permit reactivates Finish Mill No.2; updates several baghouses information and reduce PM/PM ₁₀ from kiln/raw mill exhaust.

Note: Shutdown Operations

Appendix H-1: Permit History

Titan America, LLC.
Titan Pennsuco Complex

DRAFT Permit Revision No.: 0250020-018-AV
Facility ID No.: 0250020

Shutdown Operations:

Since the time the existing Portland Cement Plant was constructed in the 1970's, several emissions units operations have shutdown or were permitted but never operated:

1. PSD-FL-050: Kiln 1 and Cooler 1 and support equipment were shutdown in the 1980's
2. PSD-FL-050: Kiln 2 and Cooler 2 and support equipment were shut down on June 1, 2004
3. PSD-FL-050: Kiln 3 and Cooler 3 and support equipment were shutdown on July 31, 2004
4. PSD-FL-050: Kiln 4 and Cooler 4 and support equipment never built
5. Slag dryer No.1 (PSD-FL-230) never operated and Slag Dryer No.2 (PSD-FL-236) was shutdown in 2004
6. 1000 Block/hr and 2000 Block/hr Concrete Block Plants were shutdown in 2001
7. Cement Kiln Dust Insufflation System was shut down in 2004
8. Finish Mill No.5 was never constructed

APPENDIX 000
40 CFR 60, Subpart OOO - Standards of Performance for Nonmetallic Mineral Processing Plants

{Updated 2/13/02}

§ 60.670 Applicability and designation of affected facility.

(a) (1) Except as provided in paragraphs (a)(2), (b), (c), and (d) of this section, the provisions of this subpart are applicable to the following affected facilities in fixed or portable nonmetallic mineral processing plants: each crusher, grinding mill, screening operation, bucket elevator, belt conveyor, bagging operation, storage bin, enclosed truck or railcar loading station. Also, crushers and grinding mills at hot mix asphalt facilities that reduce the size of nonmetallic minerals embedded in recycled asphalt pavement and subsequent affected facilities up to, but not including, the first storage silo or bin are subject to the provisions of this subpart.

(2) The provisions of this subpart do not apply to the following operations: All facilities located in underground mines; and stand-alone screening operations at plants without crushers or grinding mills.

(b) An affected facility that is subject to the provisions of subpart F or I or that follows in the plant process any facility subject to the provisions of subparts F or I of this part is not subject to the provisions of this subpart.

(c) Facilities at the following plants are not subject to the provisions of this subpart:

(1) Fixed sand and gravel plants and crushed stone plants with capacities, as defined in § 60.671, of 23 megagrams per hour (25 tons per hour) or less;

(2) Portable sand and gravel plants and crushed stone plants with capacities, as defined in § 60.671, of 136 megagrams per hour (150 tons per hour) or less; and

(3) Common clay plants and pumice plants with capacities, as defined in § 60.671, of 9 megagrams per hour (10 tons per hour) or less.

(d) (1) When an existing facility is replaced by a piece of equipment of equal or smaller size, as defined in § 60.671, having the same function as the existing facility, the new facility is exempt from the provisions of §§ 60.672, 60.674, and 60.675 except as provided for in paragraph (d)(3) of this section.

(2) An owner or operator complying with paragraph (d)(1) of this section shall submit the information required in § 60.676(a).

(3) An owner or operator replacing all existing facilities in a production line with new facilities does not qualify for the exemption described in paragraph (d)(1) of this section and must comply with the provisions of §§ 60.672, 60.674 and 60.675.

(e) An affected facility under paragraph (a) of this section that commences construction, reconstruction, or modification after August 31, 1983 is subject to the requirements of this part.

(f) Table 1 of this subpart specifies the provisions of subpart A of this part 60 that apply and those that do not apply to owners and operators of affected facilities subject to this subpart.

§ 60.671 Definitions.

All terms used in this subpart, but not specifically defined in this section, shall have the meaning given them in the Act and in subpart A of this part.

Bagging operation means the mechanical process by which bags are filled with nonmetallic minerals.

Belt conveyor means a conveying device that transports material from one location to another by means of an endless belt that is carried on a series of idlers and routed around a pulley at each end.

APPENDIX 000

40 CFR 60, Subpart OOO - Standards of Performance for Nonmetallic Mineral Processing Plants

Bucket elevator means a conveying device of nonmetallic minerals consisting of a head and foot assembly which supports and drives an endless single or double strand chain or belt to which buckets are attached.

Building means any frame structure with a roof.

Capacity means the cumulative rated capacity of all initial crushers that are part of the plant.

Capture system means the equipment (including enclosures, hoods, ducts, fans, dampers, etc.) used to capture and transport particulate matter generated by one or more process operations to a control device.

Control device means the air pollution control equipment used to reduce particulate matter emissions released to the atmosphere from one or more process operations at a nonmetallic mineral processing plant.

Conveying system means a device for transporting materials from one piece of equipment or location to another location within a plant. Conveying systems include but are not limited to the following: Feeders, belt conveyors, bucket elevators and pneumatic systems.

Crusher means a machine used to crush any nonmetallic minerals, and includes, but is not limited to, the following types: jaw, gyratory, cone, roll, rod mill, hammermill, and impactor.

Enclosed truck or railcar loading station means that portion of a nonmetallic mineral processing plant where nonmetallic minerals are loaded by an enclosed conveying system into enclosed trucks or railcars.

Fixed plant means any nonmetallic mineral processing plant at which the processing equipment specified in § 60.670(a) is attached by a cable, chain, turnbuckle, bolt or other means (except electrical connections) to any anchor, slab, or structure including bedrock.

Fugitive emission means particulate matter that is not collected by a capture system and is released to the atmosphere at the point of generation.

Grinding mill means a machine used for the wet or dry fine crushing of any nonmetallic mineral. Grinding mills include, but are not limited to, the following types: hammer, roller, rod, pebble and ball, and fluid energy. The grinding mill includes the air conveying system, air separator, or air classifier, where such systems are used.

Initial crusher means any crusher into which nonmetallic minerals can be fed without prior crushing in the plant.

Nonmetallic mineral means any of the following minerals or any mixture of which the majority is any of the following minerals:

(a) Crushed and Broken Stone, including Limestone, Dolomite, Granite, Traprock, Sandstone, Quartz, Quartzite, Marl, Marble, Slate, Shale, Oil Shale, and Shell.

(b) Sand and Gravel.

(c) Clay including Kaolin, Fireclay, Bentonite, Fuller's Earth, Ball Clay, and Common Clay.

(d) Rock Salt.

(e) Gypsum.

(f) Sodium Compounds, including Sodium Carbonate, Sodium Chloride, and Sodium Sulfate.

(g) Pumice.

(h) Gilsonite.

(i) Talc and Pyrophyllite.

(j) Boron, including Borax, Kernite, and Colemanite.

(k) Barite.

(l) Fluorospar.

(m) Feldspar.

(n) Diatomite.

(o) Perlite.

(p) Vermiculite.

(q) Mica.

(r) Kyanite, including Andalusite, Sillimanite, Topaz, and Dumortierite.

APPENDIX 000

40 CFR 60, Subpart OOO - Standards of Performance for Nonmetallic Mineral Processing Plants

Nonmetallic mineral processing plant means any combination of equipment that is used to crush or grind any nonmetallic mineral wherever located, including lime plants, power plants, steel mills, asphalt concrete plants, portland cement plants, or any other facility processing nonmetallic minerals except as provided in § 60.670 (b) and (c).

Portable plant means any nonmetallic mineral processing plant that is mounted on any chassis or skids and may be moved by the application of a lifting or pulling force. In addition, there shall be no cable, chain, turnbuckle, bolt or other means (except electrical connections) by which any piece of equipment is attached or clamped to any anchor, slab, or structure, including bedrock that must be removed prior to the application of a lifting or pulling force for the purpose of transporting the unit.

Production line means all affected facilities (crushers, grinding mills, screening operations, bucket elevators, belt conveyors, bagging operations, storage bins, and enclosed truck and railcar loading stations) which are directly connected or are connected together by a conveying system.

Screening operation means a device for separating material according to size by passing undersize material through one or more mesh surfaces (screens) in series, and retaining oversize material on the mesh surfaces (screens).

Size means the rated capacity in tons per hour of a crusher, grinding mill, bucket elevator, bagging operation, or enclosed truck or railcar loading station; the total surface area of the top screen of a screening operation; the width of a conveyor belt; and the rated capacity in tons of a storage bin.

Stack emission means the particulate matter that is released to the atmosphere from a capture system.

Storage bin means a facility for storage (including surge bins) or nonmetallic minerals prior to further processing or loading.

Transfer point means a point in a conveying operation where the nonmetallic mineral is transferred to or from a belt conveyor except where the nonmetallic mineral is being transferred to a stockpile.

Truck dumping means the unloading of nonmetallic minerals from movable vehicles designed to transport nonmetallic minerals from one location to another. Movable vehicles include but are not limited to: trucks, front end loaders, skip hoists, and railcars.

Vent means an opening through which there is mechanically induced air flow for the purpose of exhausting from a building air carrying particulate matter emissions from one or more affected facilities.

Wet mining operation means a mining or dredging operation designed and operated to extract any nonmetallic mineral regulated under this subpart from deposits existing at or below the water table, where the nonmetallic mineral is saturated with water.

Wet screening operation means a screening operation at a nonmetallic mineral processing plant which removes unwanted material or which separates marketable fines from the product by a washing process which is designed and operated at all times such that the product is saturated with water.

§ 60.672 Standard for particulate matter.

(a) On and after the date on which the performance test required to be conducted by § 60.8 is completed, no owner or operator subject to the provisions of this subpart shall cause to be discharged into the atmosphere from any transfer point on belt conveyors or from any other affected facility any stack emissions which:

- (1) Contain particulate matter in excess of 0.05 g/dscm (0.022 gr/dscf); and
- (2) Exhibit greater than 7 percent opacity, unless the stack emissions are discharged from an affected facility using a wet scrubbing control device. Facilities using a wet scrubber must comply with the reporting provisions of § 60.676 (c), (d), and (e).

(b) On and after the sixtieth day after achieving the maximum production rate at which the affected facility will be operated, but not later than 180 days after initial startup as required under § 60.11 of

APPENDIX 000
40 CFR 60, Subpart 000 - Standards of Performance for Nonmetallic Mineral Processing Plants

this part, no owner or operator subject to the provisions of this subpart shall cause to be discharged into the atmosphere from any transfer point on belt conveyors or from any other affected facility any fugitive emissions which exhibit greater than 10 percent opacity, except as provided in paragraphs (c), (d), and (e) of this section.

(c) On and after the sixtieth day after achieving the maximum production rate at which the affected facility will be operated, but not later than 180 days after initial startup as required under § 60.11 of this part, no owner or operator shall cause to be discharged into the atmosphere from any crusher, at which a capture system is not used, fugitive emissions which exhibit greater than 15 percent opacity.

(d) Truck dumping of nonmetallic minerals into any screening operation, feed hopper, or crusher is exempt from the requirements of this section.

(e) If any transfer point on a conveyor belt or any other affected facility is enclosed in a building, then each enclosed affected facility must comply with the emission limits in paragraphs (a), (b) and (c) of this section, or the building enclosing the affected facility or facilities must comply with the following emission limits:

(1) No owner or operator shall cause to be discharged into the atmosphere from any building enclosing any transfer point on a conveyor belt or any other affected facility any visible fugitive emissions except emissions from a vent as defined in § 60.671.

(2) No owner or operator shall cause to be discharged into the atmosphere from any vent of any building enclosing any transfer point on a conveyor belt or any other affected facility emissions which exceed the stack emissions limits in paragraph (a) of this section.

(f) On and after the sixtieth day after achieving the maximum production rate at which the affected facility will be operated, but not later than 180 days after initial startup as required under § 60.11 of this part, no owner or operator shall cause to be discharged into the atmosphere from any baghouse that controls emissions from only an individual, enclosed storage bin, stack emissions which exhibit greater than 7 percent opacity.

(g) Owners or operators of multiple storage bins with combined stack emissions shall comply with the emission limits in paragraph (a)(1) and (a)(2) of this section.

(h) On and after the sixtieth day after achieving the maximum production rate at which the affected facility will be operated, but not later than 180 days after initial startup, no owner or operator shall cause to be discharged into the atmosphere any visible emissions from:

(1) Wet screening operations and subsequent screening operations, bucket elevators, and belt conveyors that process saturated material in the production line up to the next crusher, grinding mill or storage bin.

(2) Screening operations, bucket elevators, and belt conveyors in the production line downstream of wet mining operations, where such screening operations, bucket elevators, and belt conveyors process saturated materials up to the first crusher, grinding mill, or storage bin in the production line.

§ 60.673 Reconstruction.

(a) The cost of replacement of ore-contact surfaces on processing equipment shall not be considered in calculating either the "fixed capital cost of the new components" or the "fixed capital cost that would be required to construct a comparable new facility" under § 60.15. Ore-contact surfaces are crushing surfaces; screen meshes, bars, and plates; conveyor belts; and elevator buckets.

(b) Under § 60.15, the "fixed capital cost of the new components" includes the fixed capital cost of all depreciable components (except components specified in paragraph (a) of this section) which are or

APPENDIX 000
40 CFR 60, Subpart OOO - Standards of Performance for Nonmetallic Mineral Processing Plants

will be replaced pursuant to all continuous programs of component replacement commenced within any 2-year period following August 31, 1983.

§ 60.674 Monitoring of operations.

The owner or operator of any affected facility subject to the provisions of this subpart which uses a wet scrubber to control emissions shall install, calibrate, maintain and operate the following monitoring devices:

(a) A device for the continuous measurement of the pressure loss of the gas stream through the scrubber. The monitoring device must be certified by the manufacturer to be accurate within ± 250 pascals ± 1 inch water gauge pressure and must be calibrated on an annual basis in accordance with manufacturer's instructions.

(b) A device for the continuous measurement of the scrubbing liquid flow rate to the wet scrubber. The monitoring device must be certified by the manufacturer to be accurate within ± 5 percent of design scrubbing liquid flow rate and must be calibrated on an annual basis in accordance with manufacturer's instructions.

§ 60.675 Test methods and procedures.

(a) In conducting the performance tests required in § 60.8, the owner or operator shall use as reference methods and procedures the test methods in appendix A of this part or other methods and procedures as specified in this section, except as provided in § 60.8(b). Acceptable alternative methods and procedures are given in paragraph (e) of this section.

(b) The owner or operator shall determine compliance with the particulate matter standards in § 60.672(a) as follows:

(1) Method 5 or Method 17 shall be used to determine the particulate matter concentration. The sample volume shall be at least 1.70 dscm (60 dscf). For Method 5, if the gas stream being sampled is at ambient temperature, the sampling probe and filter may be operated without heaters. If the gas stream is above ambient temperature, the sampling probe and filter may be operated at a temperature high enough, but no higher than 121 °C (250 °F), to prevent water condensation on the filter.

(2) Method 9 and the procedures in § 60.11 shall be used to determine opacity.

(c) (1) In determining compliance with the particulate matter standards in § 60.672 (b) and (c), the owner or operator shall use Method 9 and the procedures in § 60.11, with the following additions:

(i) The minimum distance between the observer and the emission source shall be 4.57 meters (15 feet).

(ii) The observer shall, when possible, select a position that minimizes interference from other fugitive emission sources (e.g., road dust). The required observer position relative to the sun (Method 9, Section 2.1) must be followed.

(iii) For affected facilities using wet dust suppression for particulate matter control, a visible mist is sometimes generated by the spray. The water mist must not be confused with particulate matter emissions and is not to be considered a visible emission. When a water mist of this nature is present, the observation of emissions is to be made at a point in the plume where the mist is no longer visible.

(2) In determining compliance with the opacity of stack emissions from any baghouse that controls emissions only from an individual enclosed storage bin under § 60.672(f) of this subpart, using Method 9, the duration of the Method 9 observations shall be 1 hour (ten 6-minute averages).

(3) When determining compliance with the fugitive emissions standard for any affected facility described under § 60.672(b) of this subpart, the duration of the Method 9 observations may be

APPENDIX 000

40 CFR 60, Subpart 000 - Standards of Performance for Nonmetallic Mineral Processing Plants

reduced from 3 hours (thirty 6-minute averages) to 1 hour (ten 6-minute averages) only if the following conditions apply:

- (i) There are no individual readings greater than 10 percent opacity; and
- (ii) There are no more than 3 readings of 10 percent for the 1-hour period.

(4) When determining compliance with the fugitive emissions standard for any crusher at which a capture system is not used as described under § 60.672(c) of this subpart, the duration of the Method 9 observations may be reduced from 3 hours (thirty 6-minute averages) to 1 hour (ten 6-minute averages) only if the following conditions apply:

- (i) There are no individual readings greater than 15 percent opacity; and
- (ii) There are no more than 3 readings of 15 percent for the 1-hour period.

(d) In determining compliance with § 60.672(e), the owner or operator shall use Method 22 to determine fugitive emissions. The performance test shall be conducted while all affected facilities inside the building are operating. The performance test for each building shall be at least 75 minutes in duration, with each side of the building and the roof being observed for at least 15 minutes.

(e) The owner or operator may use the following as alternatives to the reference methods and procedures specified in this section:

(1) For the method and procedure of paragraph (c) of this section, if emissions from two or more facilities continuously interfere so that the opacity of fugitive emissions from an individual affected facility cannot be read, either of the following procedures may be used:

- (i) Use for the combined emission stream the highest fugitive opacity standard applicable to any of the individual affected facilities contributing to the emissions stream.
- (ii) Separate the emissions so that the opacity of emissions from each affected facility can be read.

(f) To comply with § 60.676(d), the owner or operator shall record the measurements as required in § 60.676(c) using the monitoring devices in § 60.674 (a) and (b) during each particulate matter run and shall determine the averages.

(g) If, after 30 days notice for an initially scheduled performance test, there is a delay (due to operational problems, etc.) in conducting any rescheduled performance test required in this section, the owner or operator of an affected facility shall submit a notice to the Administrator at least 7 days prior to any rescheduled performance test.

(h) Initial Method 9 performance tests under § 60.11 of this part and § 60.675 of this subpart are not required for:

- (1) Wet screening operations and subsequent screening operations, bucket elevators, and belt conveyors that process saturated material in the production line up to, but not including the next crusher, grinding mill or storage bin.
- (2) Screening operations, bucket elevators, and belt conveyors in the production line downstream of wet mining operations, that process saturated materials up to the first crusher, grinding mill, or storage bin in the production line.

§ 60.676 Reporting and recordkeeping.

(a) Each owner or operator seeking to comply with § 60.670(d) shall submit to the Administrator the following information about the existing facility being replaced and the replacement piece of equipment.

(1) For a crusher, grinding mill, bucket elevator, bagging operation, or enclosed truck or railcar loading station:

- (i) The rated capacity in megagrams or tons per hour of the existing facility being replaced and
- (ii) The rated capacity in tons per hour of the replacement equipment.

(2) For a screening operation:

APPENDIX 000

40 CFR 60, Subpart OOO - Standards of Performance for Nonmetallic Mineral Processing Plants

- (i) The total surface area of the top screen of the existing screening operation being replaced and
- (ii) The total surface area of the top screen of the replacement screening operation.
- (3) For a conveyor belt:
 - (i) The width of the existing belt being replaced and
 - (ii) The width of the replacement conveyor belt.
- (4) For a storage bin:
 - (i) The rated capacity in megagrams or tons of the existing storage bin being replaced and
 - (ii) The rated capacity in megagrams or tons of replacement storage bins.

(b) [Reserved]

(c) During the initial performance test of a wet scrubber, and daily thereafter, the owner or operator shall record the measurements of both the change in pressure of the gas stream across the scrubber and the scrubbing liquid flow rate.

(d) After the initial performance test of a wet scrubber, the owner or operator shall submit semiannual reports to the Administrator of occurrences when the measurements of the scrubber pressure loss (or gain) and liquid flow rate differ by more than ± 30 percent from the averaged determined during the most recent performance test.

(e) The reports required under paragraph (d) shall be postmarked within 30 days following end of the second and fourth calendar quarters.

(f) The owner or operator of any affected facility shall submit written reports of the results of all performance tests conducted to demonstrate compliance with the standards set forth in § 60.672 of this subpart, including reports of opacity observations made using Method 9 to demonstrate compliance with § 60.672(b), (c), and (f), and reports of observations using Method 22 to demonstrate compliance with § 60.672(e).

(g) The owner or operator of any screening operation, bucket elevator, or belt conveyor that processes saturated material and is subject to § 60.672(h) and subsequently processes unsaturated materials, shall submit a report of this change within 30 days following such change. This screening operation, bucket elevator, or belt conveyor is then subject to the 10 percent opacity limit in § 60.672(b) and the emission test requirements of § 60.11 and this subpart. Likewise a screening operation, bucket elevator, or belt conveyor that processes unsaturated material but subsequently processes saturated material shall submit a report of this change within 30 days following such change. This screening operation, bucket elevator, or belt conveyor is then subject to the no visible emission limit in § 60.672(h).

(h) The subpart A requirement under § 60.7(a)(2) for notification of the anticipated date of initial startup of an affected facility shall be waived for owners or operators of affected facilities regulated under this subpart.

(i) A notification of the actual date of initial startup of each affected facility shall be submitted to the Administrator.

(1) For a combination of affected facilities in a production line that begin actual initial startup on the same day, a single notification of startup may be submitted by the owner or operator to the Administrator. The notification shall be postmarked within 15 days after such date and shall include a description of each affected facility, equipment manufacturer, and serial number of the equipment, if available.

(2) For portable aggregate processing plants, the notification of the actual date of initial startup shall include both the home office and the current address or location of the portable plant.

APPENDIX 000
40 CFR 60, Subpart OOO - Standards of Performance for Nonmetallic Mineral Processing Plants

(j) The requirements of this section remain in force until and unless the Agency, in delegating enforcement authority to a State under section 111(c) of the Act, approves reporting requirements or an alternative means of compliance surveillance adopted by such States. In that event, affected facilities within the State will be relieved of the obligation to comply with the reporting requirements of this section, provided that they comply with requirements established by the State.

Appendix U-1: List of Unregulated Emissions Units and Activities

Tarmac America, Inc.
Tarmac Pennsuco

Title V Operation Permit Renewal No.: 0250020-018-AV
Facility ID No.: 0250020

Unregulated Emissions Units and/or Activities. An emissions unit which emits no “emissions-limited pollutant” and which is subject to no unit-specific work practice standard, though it may be subject to regulations applied on a facility-wide basis (e.g., unconfined emissions, odor, general opacity) or to regulations that require only that it be able to prove exemption from unit-specific emissions or work practice standards.

The below listed emissions units and/or activities are neither ‘regulated emissions units’ nor ‘exempt emissions units’.

E.U. ID

<u>No.</u>	<u>Brief Description of Emissions Units and/or Activities</u>
-030	Facility-wide particulate matter fugitive emissions from miscellaneous activities, such as truck operations throughout the facility, wind erosion, etc.

APPENDIX SS-1, STACK SAMPLING FACILITIES (version dated 10/07/96)

Stack Sampling Facilities Provided by the Owner of an Emissions Unit. This section describes the minimum requirements for stack sampling facilities that are necessary to sample point emissions units. Sampling facilities include sampling ports, work platforms, access to work platforms, electrical power, and sampling equipment support. Emissions units must provide these facilities at their expense. All stack sampling facilities must meet any Occupational Safety and Health Administration (OSHA) Safety and Health Standards described in 29 CFR Part 1910, Subparts D and E.

(a) Permanent Test Facilities. The owner or operator of an emissions unit for which a compliance test, other than a visible emissions test, is required on at least an annual basis, shall install and maintain permanent stack sampling facilities.

(b) Temporary Test Facilities. The owner or operator of an emissions unit that is not required to conduct a compliance test on at least an annual basis may use permanent or temporary stack sampling facilities. If the owner chooses to use temporary sampling facilities on an emissions unit, and the Department elects to test the unit, such temporary facilities shall be installed on the emissions unit within 5 days of a request by the Department and remain on the emissions unit until the test is completed.

(c) Sampling Ports.

1. All sampling ports shall have a minimum inside diameter of 3 inches.

2. The ports shall be capable of being sealed when not in use.

3. The sampling ports shall be located in the stack at least 2 stack diameters or equivalent diameters downstream and at least 0.5 stack diameter or equivalent diameter upstream from any fan, bend, constriction or other flow disturbance.

4. For emissions units for which a complete application to construct has been filed prior to December 1, 1980, at least two sampling ports, 90 degrees apart, shall be installed at each sampling location on all circular stacks that have an outside diameter of 15 feet or less. For stacks with a larger diameter, four sampling ports, each 90 degrees apart, shall be installed. For emissions units for which a complete application to construct is filed on or after December 1, 1980, at least two sampling ports, 90 degrees apart, shall be installed at each sampling location on all circular stacks that have an outside diameter of 10 feet or less. For stacks with larger diameters, four sampling ports, each 90 degrees apart, shall be installed. On horizontal circular ducts, the ports shall be located so that the probe can enter the stack vertically, horizontally or at a 45 degree angle.

5. On rectangular ducts, the cross sectional area shall be divided into the number of equal areas in accordance with EPA Method 1. Sampling ports shall be provided which allow access to each sampling point. The ports shall be located so that the probe can be inserted perpendicular to the gas flow.

(d) Work Platforms.

1. Minimum size of the working platform shall be 24 square feet in area. Platforms shall be at least 3 feet wide.

2. On circular stacks with 2 sampling ports, the platform shall extend at least 110 degrees around the stack.

3. On circular stacks with more than two sampling ports, the work platform shall extend 360 degrees around the stack.

4. All platforms shall be equipped with an adequate safety rail (ropes are not acceptable), toeboard, and hinged floor-opening cover if ladder access is used to reach the platform. The safety rail directly in line with the sampling ports shall be removable so that no obstruction exists in an area 14 inches below each sample port and 6 inches on either side of the sampling port.

(e) Access to Work Platform.

APPENDIX SS-1, STACK SAMPLING FACILITIES (version dated 10/07/96)
(continued)

1. Ladders to the work platform exceeding 15 feet in length shall have safety cages or fall arresters with a minimum of 3 compatible safety belts available for use by sampling personnel.

2. Walkways over free-fall areas shall be equipped with safety rails and toeboards.

(f) Electrical Power.

1. A minimum of two 120-volt AC, 20-amp outlets shall be provided at the sampling platform within 20 feet of each sampling port.

2. If extension cords are used to provide the electrical power, they shall be kept on the plant's property and be available immediately upon request by sampling personnel.

(g) Sampling Equipment Support.

1. A three-quarter inch eyebolt and an angle bracket shall be attached directly above each port on vertical stacks and above each row of sampling ports on the sides of horizontal ducts.

a. The bracket shall be a standard 3 inch x 3 inch x one-quarter inch equal-legs bracket which is 1 and one-half inches wide. A hole that is one-half inch in diameter shall be drilled through the exact center of the horizontal portion of the bracket. The horizontal portion of the bracket shall be located 14 inches above the centerline of the sampling port.

b. A three-eighth inch bolt which protrudes 2 inches from the stack may be substituted for the required bracket. The bolt shall be located 15 and one-half inches above the centerline of the sampling port.

c. The three-quarter inch eyebolt shall be capable of supporting a 500 pound working load. For stacks that are less than 12 feet in diameter, the eyebolt shall be located 48 inches above the horizontal portion of the angle bracket. For stacks that are greater than or equal to 12 feet in diameter, the eyebolt shall be located 60 inches above the horizontal portion of the angle bracket. If the eyebolt is more than 120 inches above the platform, a length of chain shall be attached to it to bring the free end of the chain to within safe reach from the platform.

2. A complete monorail or dualrail arrangement may be substituted for the eyebolt and bracket.

3. When the sample ports are located in the top of a horizontal duct, a frame shall be provided above the port to allow the sample probe to be secured during the test.

[Rule 62-297.310(6), F.A.C.]

APPENDIX Y

40 CFR 60, Subpart Y- Standards of Performance for Coal Preparation Plants

Updated 9/15/03

Source: Federal Register dated 1/15/76

§ 60.250 Applicability and designation of affected facility.

(a) The provisions of this subpart are applicable to any of the following affected facilities in coal preparation plants which process more than 181 Mg (200 tons) per day: Thermal dryers, pneumatic coal-cleaning equipment (air tables), coal processing and conveying equipment (including breakers and crushers), coal storage systems, and coal transfer and loading systems.

(b) Any facility under paragraph (a) of this section that commences construction or modification after October 24, 1974, is subject to the requirements of this subpart.

§ 60.251 Definitions.

As used in this subpart, all terms not defined herein have the meaning given them in the Act and in subpart A of this part.

(a) *Coal preparation plant* means any facility (excluding underground mining operations) which prepares coal by one or more of the following processes: breaking, crushing, screening, wet or dry cleaning, and thermal drying.

(b) *Bituminous coal* means solid fossil fuel classified as bituminous coal by ASTM Designation D388-77, 90, 91, 95, or 98a (incorporated by reference -- see § 60.17).

(c) *Coal* means all solid fossil fuels classified as anthracite, bituminous, subbituminous, or lignite by ASTM Designation D388-77, 90, 91, 95, or 98a (incorporated by reference -- see § 60.17).

(d) *Cyclonic flow* means a spiraling movement of exhaust gases within a duct or stack.

(e) *Thermal dryer* means any facility in which the moisture content of bituminous coal is reduced by contact with a heated gas stream which is exhausted to the atmosphere.

(f) *Pneumatic coal-cleaning equipment* means any facility which classifies bituminous coal by size or separates bituminous coal from refuse by application of air stream(s).

(g) *Coal processing and conveying equipment* means any machinery used to reduce the size of coal or to separate coal from refuse, and the equipment used to convey coal to or remove coal and refuse from the machinery. This includes, but is not limited to, breakers, crushers, screens, and conveyor belts.

(h) *Coal storage system* means any facility used to store coal except for open storage piles.

(i) *Transfer and loading system* means any facility used to transfer and load coal for shipment.

APPENDIX Y

40 CFR 60, Subpart Y- Standards of Performance for Coal Preparation Plants

§ 60.252 Standards for particulate matter.

(a) On and after the date on which the performance test required to be conducted by § 60.8 is completed, an owner or operator subject to the provisions of this subpart shall not cause to be discharged into the atmosphere from any thermal dryer gases which:

- (1) Contain particulate matter in excess of 0.070 g/dscm (0.031 gr/dscf).
- (2) Exhibit 20 percent opacity or greater.

(b) On and after the date on which the performance test required to be conducted by § 60.8 is completed, an owner or operator subject to the provisions of this subpart shall not cause to be discharged into the atmosphere from any pneumatic coal cleaning equipment, gases which:

- (1) Contain particulate matter in excess of 0.040 g/dscm (0.017 gr/dscf).
- (2) Exhibit 10 percent opacity or greater.

(c) On and after the date on which the performance test required to be conducted by § 60.8 is completed, an owner or operator subject to the provisions of this subpart shall not cause to be discharged into the atmosphere from any coal processing and conveying equipment, coal storage system, or coal transfer and loading system processing coal, gases which exhibit 20 percent opacity or greater.

§ 60.253 Monitoring of operations.

(a) The owner or operator of any thermal dryer shall install, calibrate, maintain, and continuously operate monitoring devices as follows:

- (1) A monitoring device for the measurement of the temperature of the gas stream at the exit of the thermal dryer on a continuous basis. The monitoring device is to be certified by the manufacturer to be accurate within ± 1.7 °C (± 3 °F).
- (2) For affected facilities that use venturi scrubber emission control equipment:
 - (i) A monitoring device for the continuous measurement of the pressure loss through the venturi constriction of the control equipment. The monitoring device is to be certified by the manufacturer to be accurate within ± 1 inch water gauge.
 - (ii) A monitoring device for the continuous measurement of the water supply pressure to the control equipment. The monitoring device is to be certified by the manufacturer to be accurate within ± 5 percent of design water supply pressure. The pressure sensor or tap must be located close to the water discharge point. The Administrator may be consulted for approval of alternative locations.

(b) All monitoring devices under paragraph (a) of this section are to be recalibrated annually in accordance with procedures under § 60.13(b).

§ 60.254 Test methods and procedures.

(a) In conducting the performance tests required in § 60.8, the owner or operator shall use as reference methods and procedures the test methods in appendix A of this part or other methods and procedures as specified in this section, except as provided in § 60.8(b).

(b) The owner or operator shall determine compliance with the particulate matter standards in § 60.252 as follows:

- (1) Method 5 shall be used to determine the particulate matter concentration. The sampling time and sample volume for each run shall be at least 60 minutes and 0.85 dscm (30 dscf). Sampling shall begin no less than 30 minutes after startup and shall terminate before shutdown procedures begin.
- (2) Method 9 and the procedures in § 60.11 shall be used to determine opacity.

FIGURE 1 - SUMMARY REPORT--GASEOUS AND OPACITY EXCESS EMISSION AND MONITORING SYSTEM PERFORMANCE

[Note: This form is referenced in 40 CFR 60.7, Subpart A-General Provisions]

Pollutant (*Circle One*): SO₂ NO_x TRS H₂S CO Opacity

Reporting period dates: From _____ to _____

Company: _____

Emission Limitation: _____

Address: _____

Monitor Manufacturer: _____

Model No.: _____

Date of Latest CMS Certification or Audit: _____

Process Unit(s) Description: _____

Total source operating time in reporting period ¹: _____

Emission data summary ¹	CMS performance summary ¹
1. Duration of excess emissions in reporting period due to: a. Startup/shutdown _____ b. Control equipment problems _____ c. Process problems _____ d. Other known causes _____ e. Unknown causes _____ 2. Total duration of excess emissions _____ 3. Total duration of excess emissions x (100) / [Total source operating time] % ²	1. CMS downtime in reporting period due to: a. Monitor equipment malfunctions _____ b. Non-Monitor equipment malfunctions _____ c. Quality assurance calibration _____ d. Other known causes _____ e. Unknown causes _____ 2. Total CMS Downtime _____ 3. [Total CMS Downtime] x (100) / [Total source operating time] % ²

¹ For opacity, record all times in minutes. For gases, record all times in hours.

² For the reporting period: If the total duration of excess emissions is 1 percent or greater of the total operating time or the total CMS downtime is 5 percent or greater of the total operating time, both the summary report form and the excess emission report described in 40 CFR 60.7(c) shall be submitted.

Note: On a separate page, describe any changes since last quarter in CMS, process or controls.

I certify that the information contained in this report is true, accurate, and complete.

Name: _____

Signature: _____ Date: _____

Title: _____

Table 1- Emissions Unit Identification & Summary of Air Pollutant Standards for the Nonmetallic Mineral Processing Plant

NOTE: ID	TP = Transfer Point Equipment	Size/ Capacity	E.U. ID No.	NSPS Source?	VE Limit	F.A.C./CFR Rule Applicability	Process Description
Crusher Building 1							
Y10	Truck Dump Hopper	280 TPH	025	N	20%	62-296.320(4)(b)1	Primary Crushing/Screening
Y11	Screen	168 ft ²	025	N	20%	62-296.320(4)(b)1	Primary Crushing/Screening
Y12	Screen	112 ft ²	025	N	20%	62-296.320(4)(b)1	Primary Crushing/Screening
Y13	Crusher	800 TPH	025	N	20%	62-296.320(4)(b)1	Primary Crushing/Screening
Y15	Belt Conveyor	72 inches	025	N	20%	62-296.320(4)(b)1	Primary Crushing/Screening
Transfer Tower #1							
Y30	Surge Bin	3000 TPH	025	N	20%	62-296.320(4)(b)1	Primary Crushing/Screening
Y31	Vibrating Feeder (TP Y31 to Y33)	2500 TPH	025	N	20%	62-296.320(4)(b)1	Primary Crushing/Screening
Y32	Vibrating Feeder (TP Y32 to Y33)	2500 TPH	025	N	20%	62-296.320(4)(b)1	Primary Crushing/Screening
Transfer Tower #2							
Y33	Belt Conveyor (TP Y33 to Y34)	54 inches	025	N	20%	62-296.320(4)(b)1	Primary Crushing/Screening
Y34	Belt Conveyor (TP Y34 to Y35)	54 inches	025	N	20%	62-296.320(4)(b)1	Primary Crushing/Screening
Transfer Tower #3							
Y35	Belt Conveyor (TP Y35 to Y36)	54 inches	025	N	20%	62-296.320(4)(b)1	Primary Crushing/Screening
Y36	Belt Conveyor (to Feed Storage Piles)	54 inches	025	N	20%	62-296.320(4)(b)1	Primary Crushing/Screening
Aggregate Plant Feed Storage Pile			025	N	20%	62-296.320(4)(b)1	Primary Crushing/Screening
Cement Plant Feed Pile		35,000 TPH	025	N	20%	62-296.320(4)(b)1	Primary Crushing/Screening
Aggregate & Cement Plant Feed Storage Pile			025	N	20%	62-296.320(4)(b)1	Primary Crushing/Screening
Y48	Belt Conveyor (TP Y48 to Y49)	48 inches	025	N	20%	62-296.320(4)(b)1	Secondary/Tertiary/Screening
Y49	Belt Conveyor (TP Y49 to Y50/Y60)	48 inches	025	N	20%	62-296.320(4)(b)1	Secondary/Tertiary/Screening
Y110	Belt Conveyor (TP Y110 to Y49)	48 inches	025	N	20%	62-296.320(4)(b)1	Secondary/Tertiary/Screening
Secondary Tower/Transfer Tower #5							
Y50	Screen (TP Y50 to Y51/Y500)	144 ft ²	024	Y	0%	40 CFR 60.672(h)(1)	Secondary/Tertiary/Screening
Y51	Crusher (TP Y51 to Y52)	600 TPH	024	Y	15%	40 CFR 60.672(c)	Secondary/Tertiary/Screening
Y52	Belt Conveyor (TP Y52 to Y53/Y55)	48 inches	024	Y	0%	40 CFR 60.672(h)(1)	Secondary/Tertiary/Screening
Y60	Screen (TP Y60 to Y61/Y62/Y500)	144 ft ²	024	Y	0%	40 CFR 60.672(h)(1)	Secondary/Tertiary/Screening
Y61	Crusher (TP Y61 to Y62)	600 TPH	024	Y	15%	40 CFR 60.672(c)	Secondary/Tertiary/Screening
Y62	Belt Conveyor (TP Y62 to Y63/Y65)	48 inches	024	Y	0%	40 CFR 60.672(h)(1)	Secondary/Tertiary/Screening

Table 1- Emissions Unit Identification & Summary of Air Pollutant Standards for the Nonmetallic Mineral Processing Plant

ID	Equipment	Size/ Capacity	E.U. ID No.	NSPS Source?	VE Limit	F.A.C./CFR Rule Applicability	Process Description
----	-----------	-------------------	----------------	-----------------	-------------	----------------------------------	---------------------

Tower #6 - Screening and Crushing

Y53	Screen (TP Y53 to Y54/Y571/Y71A)	168 ft ²	024	Y	0%	40 CFR 60.672(h)(1)	Secondary/Tertiary/Screening
Y54	Crusher (TP Y54 to Y57)	400 TPH	024	Y	15%	40 CFR 60.672(c)	Secondary/Tertiary/Screening
Y55	Screen (TP Y55 to Y56/Y71/Y71A)	168 ft ²	024	Y	0%	40 CFR 60.672(h)(1)	Secondary/Tertiary/Screening
Y56	Crusher (TP Y56 to Y57)	500 TPH	024	Y	15%	40 CFR 60.672(c)	Secondary/Tertiary/Screening
Y57	Belt Conveyor (TP Y57 to Y58)	42 inches	024	Y	0%	40 CFR 60.672(h)(1)	Secondary/Tertiary/Screening
Y58	Belt Conveyor (TP Y58 to Y52/C-1)	36 inches	024	Y	0%	40 CFR 60.672(h)(1)	Secondary/Tertiary/Screening
Y62A	Stick Conveyor (Y62A to Y62)	42 inches	024	Y	0%	40 CFR 60.672(h)(1)	Secondary/Tertiary/Screening
Y63	Screen (TP Y63 to Y71/Y71A/SP 1)	168 ft ²	024	Y	0%	40 CFR 60.672(h)(1)	Secondary/Tertiary/Screening
Y64	Crusher (TP Y64 to Y67)	500 TPH	024	Y	15%	40 CFR 60.672(c)	Secondary/Tertiary/Screening
Y65	Screen (TP Y65 to Y71/Y71A/SP 1)	168 ft ²	024	Y	0%	40 CFR 60.672(h)(1)	Secondary/Tertiary/Screening
Y66	Crusher (TP Y66 to Y67)	400 TPH	024	Y	15%	40 CFR 60.672(c)	Secondary/Tertiary/Screening
Y67	Belt Conveyor (TP Y67 to Y68)	42 inches	024	Y	0%	40 CFR 60.672(h)(1)	Secondary/Tertiary/Screening
Y68	Belt Conveyor (TP Y68 to Y62/C-1)	36 inches	024	Y	0%	40 CFR 60.672(h)(1)	Secondary/Tertiary/Screening
Y71	Belt Conveyor (TP Y71 to Y73/Y80)	42 inches	024	Y	0%	40 CFR 60.672(h)(1)	Finishing Plant
Y71A	Belt Conveyor (TP Y71A to Y73/Y80)	42 inches	024	Y	0%	40 CFR 60.672(h)(1)	Finishing Plant
C-1	Belt Conveyor (TP C-1 to C-2)	48 inches	024	Y	0%	40 CFR 60.672(h)(1)	Secondary/Tertiary/Screening
C-2	Belt Conveyor	48 inches	024	Y	0%	40 CFR 60.672(h)(1)	Secondary/Tertiary/Screening

Tower #6A

	Screens (TP to C-3/C-5/C-9)	192 ft ²	024	Y	0%	40 CFR 60.672(h)(1)	Secondary/Tertiary/Screening
C-3	Belt Conveyor (TP C-3 to C-4)	36 inches	024	Y	0%	40 CFR 60.672(h)(1)	Secondary/Tertiary/Screening
C-4	Belt Conveyor (Recycle back to Y50/Y60)	36 inches	024	Y	0%	40 CFR 60.672(h)(1)	Secondary/Tertiary/Screening
C-5	Belt Conveyor (TP C-5 to C-6/C-8)	36 inches	024	Y	0%	40 CFR 60.672(h)(1)	Secondary/Tertiary/Screening
C-6	Belt Conveyor (TP C-6 to C-7)	36 inches	024	Y	0%	40 CFR 60.672(h)(1)	Secondary/Tertiary/Screening
C-7	Belt Conveyor	36 inches	024	Y	0%	40 CFR 60.672(h)(1)	Secondary/Tertiary/Screening

C-8	Belt Conveyor (TP C-8 to Y71A)	36 inches	024	Y	0%	40 CFR 60.672(h)(1)	Secondary/Tertiary/Screening
C-9	Belt Conveyor (TP C-9 to C-10)	36 inches	024	Y	0%	40 CFR 60.672(h)(1)	Finishing Plant
C-10	Belt Conveyor (TP C-10 to C-11)	36 inches	024	Y	0%	40 CFR 60.672(h)(1)	Finishing Plant
C-11	Belt Conveyor	36 inches	024	Y	0%	40 CFR 60.672(h)(1)	Finishing Plant
	Screens (TP to C-3/C-5/C-9/SP 2)	192 ft ²	024	Y	0%	40 CFR 60.672(h)(1)	Secondary/Tertiary/Screening
Y500	Stick Conveyor (TP Y500 to Y501)	42 inches	024	Y	0%	40 CFR 60.672(h)(1)	Finishing Plant
Y501	Radial Stacker (TP Y501 to Y502)	42 inches	025	N	20%	62-296.320(4)(b)1	Finishing Plant

Table 1- Emissions Unit Identification & Summary of Air Pollutant Standards for the Nonmetallic Mineral Processing Plant

NOTE: TP = Transfer Point		Size/	E.U. ID	NSPS	VE	F.A.C./CFR	
ID	Equipment	Capacity	No.	Source?	Limit	Rule Applicability	Process Description

Transfer Tower #7

Y73	Belt Conveyor (TP Y73 to Y74)	42 inches	024	Y	0%	40 CFR 60.672(h)(1)	Finishing Plant
Y74	Radial Stacker	48 inches	024	Y	0%	40 CFR 60.672(h)(1)	Finishing Plant

Cement Plant Blend Pile

		--	025	N	20%	62-296.320(4)(b)1	Finishing Plant
Y78	Belt Conveyor (TP Y78 to Y79)	36 inches	024	Y	0%	40 CFR 60.672(h)(1)	Finishing Plant
Y80	Belt Conveyor (TP Y80 to 80/80A/81)	42 inches	024	Y	0%	40 CFR 60.672(h)(1)	Finishing Plant

Transfer Tower #80, 80A, 80B

80	Screen (TP 80 to 85/90A/95)	160 ft ²	024	Y	0%	40 CFR 60.672(h)(1)	Finishing Plant
80A	Screen (TP 80A to 84/89/95A)	160 ft ²	024	Y	0%	40 CFR 60.672(h)(1)	Finishing Plant
80B	Screen (80B to 95B/406/85/90A)	160 ft ²	024	Y	0%	40 CFR 60.672(h)(1)	Finishing Plant
81	Belt Conveyor (TP 81 to 80B)	36 inches	024	Y	0%	40 CFR 60.672(h)(1)	Finishing Plant
84	Belt Conveyor (TP 84 to 85/85A)	24 inches	024	Y	0%	40 CFR 60.672(h)(1)	Finishing Plant
85A	Belt Conveyor	36 inches	024	Y	0%	40 CFR 60.672(h)(1)	Finishing Plant
85B	Belt Conveyor	42 inches	024	Y	0%	40 CFR 60.672(h)(1)	Finishing Plant
89	Belt Conveyor (TP 89 to 90A)	24 inches	024	Y	0%	40 CFR 60.672(h)(1)	Finishing Plant
95	Belt Conveyor (TP 95 to 100)	24 inches	024	Y	0%	40 CFR 60.672(h)(1)	Finishing Plant
95A	Belt Conveyor (TP 95A to 100A)	24 inches	024	Y	0%	40 CFR 60.672(h)(1)	Finishing Plant
95B	Belt Conveyor	24 inches	024	Y	0%	40 CFR 60.672(h)(1)	Finishing Plant

GR 57 (Storage Pile)

		--	025	N	20%	62-296.320(4)(b)1	Finishing Plant
--	--	----	-----	---	-----	-------------------	-----------------

Transfer Tower #100, 100A, 100B

100	Screen (100 to 105/110/115/117)	160 ft ²	024	Y	0%	40 CFR 60.672(h)(1)	Finishing Plant
100A	Screen (TP 100A to 104/109/114/117)	160 ft ²	024	Y	0%	40 CFR 60.672(h)(1)	Finishing Plant
100B	Screen (100B to 101/105/110/117)	160 ft ²	024	Y	0%	40 CFR 60.672(h)(1)	Finishing Plant

Table 1- Emissions Unit Identification & Summary of Air Pollutant Standards for the Nonmetallic Mineral Processing Plant

NOTE: TP = Transfer Point							
ID	Equipment	Size/ Capacity	E.U. ID No.	NSPS Source?	VE Limit	F.A.C./CFR Rule Applicability	Process Description
101	Belt Conveyor (TP 101 to 115)	24 inches	024	Y	0%	40 CFR 60.672(h)(1)	Finishing Plant
104	Belt Conveyor (TP 104 to 105)	24 inches	024	Y	0%	40 CFR 60.672(h)(1)	Finishing Plant
109	Belt Conveyor (TP 109 to 109A)	24 inches	024	Y	0%	40 CFR 60.672(h)(1)	Finishing Plant
109A	Belt Conveyor	24 inches	024	Y	0%	40 CFR 60.672(h)(1)	Finishing Plant
114	Belt Conveyor (TP 114 to 115)	24 inches	024	Y	0%	40 CFR 60.672(h)(1)	Finishing Plant
GR 16 (Storage Pile)		--	025	N	20%	62-296.320(4)(b)1	Finishing Plant
85	Belt Conveyor	24 inches	024	Y	0%	40 CFR 60.672(h)(1)	Finishing Plant
85B	Belt Conveyor	42 inches	024	Y	0%	40 CFR 60.672(h)(1)	Finishing Plant
90A	Belt Conveyor (TP 90A to 90B/90C)	24 inches	024	Y	0%	40 CFR 60.672(h)(1)	Finishing Plant
90B	Belt Conveyor	24 inches	024	Y	0%	40 CFR 60.672(h)(1)	Finishing Plant
90C	Belt Conveyor	24 inches	024	Y	0%	40 CFR 60.672(h)(1)	Finishing Plant
105	Belt Conveyor	24 inches	024	Y	0%	40 CFR 60.672(h)(1)	Finishing Plant
110	Belt Conveyor	24 inches	024	Y	0%	40 CFR 60.672(h)(1)	Finishing Plant
115	Belt Conveyor	24 inches	024	Y	0%	40 CFR 60.672(h)(1)	Finishing Plant
210	Belt Conveyor (TP 210 to 212E/212W)	42 inches	024	Y	0%	40 CFR 60.672(h)(1)	Load Out
Product Storage Piles							
	Pile "1/4", Basic 1 (TP to Y210)	--	024	Y	0%	40 CFR 60.672(h)(1)	Finishing Plant
	Pile "3/8", Basic 2 (TP to Y210)	--	024	Y	0%	40 CFR 60.672(h)(1)	Finishing Plant
	Pile "1/2", Basic 3 (TP to Y210)	--	024	Y	0%	40 CFR 60.672(h)(1)	Finishing Plant
	Pile "3/4", Basic 4 (TP to Y210)	--	024	Y	0%	40 CFR 60.672(h)(1)	Finishing Plant
	Pile "1", Basic 5 (TP to Y210)	--	024	Y	0%	40 CFR 60.672(h)(1)	Finishing Plant
	Pile Ballast, Basic 7 (TP to Y210)	--	024	Y	0%	40 CFR 60.672(h)(1)	Finishing Plant
Transfer Tower #210							
212E	Belt Conveyor (TP 212E to 215E)	42 inches	024	Y	0%	40 CFR 60.672(h)(1)	Load Out
212W	Belt Conveyor	42 inches	024	Y	0%	40 CFR 60.672(h)(1)	Load Out
Transfer Tower #215							
215E	Screens (TP 215E to 220/385N/385S/410)	160 ft ²	024	Y	0%	40 CFR 60.672(h)(1)	Load Out
215W	Screen (TP 215W to 220/385S/385N/410)	192 ft ²	024	Y	0%	40 CFR 60.672(h)(1)	Load Out
220	Belt Conveyor (TP 220 to 225)	36 inches	024	Y	0%	40 CFR 60.672(h)(1)	Load Out
385N	Belt Conveyor (TP 385N to 385)	30 inches	024	Y	0%	40 CFR 60.672(h)(1)	Load Out
385S	Belt Conveyor (TP 385S to 385)	30 inches	024	Y	0%	40 CFR 60.672(h)(1)	Load Out
225	Five Position Turn Head (TP to 230)	--	025	N	20%	62-296.320(4)(b)1	Load Out
230	Belt Conveyor (to Storage Bins)	42 inches	024	Y	0%	40 CFR 60.672(h)(1)	Load Out
	Storage Bins	--	025	N	20%	62-296.320(4)(b)1	Load Out
290	Belt Conveyor (TP 290 to 296)	42 inches	024	Y	0%	40 CFR 60.672(h)(1)	Load Out
296	Belt Conveyor (TP 296 to 300)	24 inches	024	Y	0%	40 CFR 60.672(h)(1)	Load Out
295	Belt Conveyor (TP 295 to 297)	42 inches	024	Y	0%	40 CFR 60.672(h)(1)	Load Out
297	Belt Conveyor	42 inches	024	Y	0%	40 CFR 60.672(h)(1)	Load Out

Table 1- Emissions Unit Identification & Summary of Air Pollutant Standards for the Nonmetallic Mineral Processing Plant

NOTE: TP = Transfer Point		Size/	E.U. ID	NSPS	VE	F.A.C./CFR	
ID	Equipment	Capacity	No.	Source?	Limit	Rule Applicability	Process Description
300	Belt Conveyor	24 inches	024	Y	0%	40 CFR 60.672(h)(1)	Load Out
303	Belt Conveyor	42 inches	024	Y	0%	40 CFR 60.672(h)(1)	Load Out
385	Belt Conveyor	24 inches	024	Y	0%	40 CFR 60.672(h)(1)	Load Out
	Scalpings Pile	--	025	N	20%	62-296.320(4)(b)1	Load Out
390	Belt Conveyor (TP 390 to 395)	36 inches	024	Y	0%	40 CFR 60.672(h)(1)	Load Out
395	Shuttle (to Storage Bins)	36 inches	024	Y	0%	40 CFR 60.672(h)(1)	Load Out
	Railcar Loading	--	025	N	20%	62-296.320(4)(b)1	Load Out
	Truck Loading	--	025	N	20%	62-296.320(4)(b)1	Load Out

Sand Plant

340	Belt Conveyor (TP 340 to 355)	30 inches	024	Y	0%	40 CFR 60.672(h)(1)	Sand Plant
345	Belt Conveyor (TP 345 to 360)	24 inches	024	Y	0%	40 CFR 60.672(h)(1)	Sand Plant
345A	Belt Conveyor (TP 345A to 360)	36 inches	024	Y	0%	40 CFR 60.672(h)(1)	Sand Plant
350	Belt Conveyor (TP 350 to 370)	24 inches	024	Y	0%	40 CFR 60.672(h)(1)	Sand Plant
355	Belt Conveyor (to Storage Piles)	24 inches	024	Y	0%	40 CFR 60.672(h)(1)	Sand Plant
360	Belt Conveyor (to Storage Piles)	36 inches	024	Y	0%	40 CFR 60.672(h)(1)	Sand Plant
370	Belt Conveyor (to Storage Piles)	24 inches	024	Y	0%	40 CFR 60.672(h)(1)	Sand Plant
	Sand Storage Piles	--	025	N	20%	62-296.320(4)(b)1	Sand Plant
390	Belt Conveyor (TP 390 to 395)	36 inches	024	Y	0%	40 CFR 60.672(h)(1)	Sand Plant
	Sand Hopper	--	025	N	20%	62-296.320(4)(b)1	Sand Plant
620	Screw Dehydrator (TP to 640)	228 ft ²	025	N	20%	62-296.320(4)(b)1	Sand Plant
625	Screw Dehydrator (TP to 645)	192.5 ft ²	025	N	20%	62-296.320(4)(b)1	Sand Plant
630	Screw Dehydrator (TP to 650)	228 ft ²	025	N	20%	62-296.320(4)(b)1	Sand Plant
635	Screw Dehydrator (TP to 655)	192.5 ft ²	025	N	20%	62-296.320(4)(b)1	Sand Plant
640	Belt Conveyor (TP 640 to 340/345/345A)	36 inches	024	Y	0%	40 CFR 60.672(h)(1)	Sand Plant
645	Belt Conveyor (TP 645 to 340/345/350)	24 inches	024	Y	0%	40 CFR 60.672(h)(1)	Sand Plant
650	Belt Conveyor (TP 650 to 340/345/350)	24 inches	024	Y	0%	40 CFR 60.672(h)(1)	Sand Plant
655	Belt Conveyor (TP 655 to 340/345/350)	24 inches	024	Y	0%	40 CFR 60.672(h)(1)	Sand Plant

Friday, Barbara

* Signed 4/23/07

To: 'hjohnson@titanamerica.com'; 'dbuff@golder.com'; 'tlancaster@titanamerica.com';
'wongp@miamidade.gov'; Graziani, Darrel

Cc: Heron, Teresa

Subject: FINAL Title V Permit Renewal No.: 0250020-018-AV - Tarmac America, LLC - Titan Pennsuco
Complex

Attachments: 0250020.018.AV.F_pdf[1].zip

Dear Sir/Madam:

Please send a "reply" message verifying receipt of the attached document(s); this may be done by selecting "Reply" on the menu bar of your e-mail software and then selecting "Send". We must receive verification of receipt and your reply will preclude subsequent e-mail transmissions to verify receipt of the document(s).

The document(s) may require immediate action within a specified time frame. Please open and review the document(s) as soon as possible.

The document is in Adobe Portable Document Format (pdf). Adobe Acrobat Reader can be downloaded for free at the following internet site: <http://www.adobe.com/products/acrobat/readstep.html>.

The Bureau of Air Regulation is issuing electronic documents for permits, notices and other correspondence in lieu of hard copies through the United States Postal System, to provide greater service to the applicant and the engineering community. Please advise this office of any changes to your e-mail address or that of the Engineer-of-Record.

Thank you,

DEP, Bureau of Air Regulation

4/23/2007

Friday, Barbara

To: 'hjohnson@titanamerica.com'; 'tlancaster@titanamerica.com'
Subject: FINAL Title V Permit Renewal No.: 0250020-018-AV - Tarmac America, LLC - Titan Pennsuco Complex
Attachments: TAppendix CP-1.pdf; 0250348History.pdf; 0250020018FinalNotice&FD.pdf; 0250020018FinalPermitSignaturePage.pdf; Appendix A-1 (NESHAP40CFR63 Supart A).pdf; Appendix A (NSPS40CFR60 Subpart A).pdf; Appendix CAM Titan.pdf; Appendix CG (Common and General Conditions).pdf; APPENDIX CT (CitationFormats).pdf; Appendix H-1 (History).pdf; Appendix LLL (40CFR63 SubpartLLL).pdf; APPENDIX OOO (40CFR60 Subapart OOO).pdf; Appendix SS-1.pdf; Appendix U-1.pdf; Appendix Y (40CFR60 Subpart Y).pdf; Figure 1.pdf; FPermit0250020-018-AVRenewal.pdf; FSOB 0250020-018-AVRenewal.pdf; Table 1.pdf

Dear Sir/Madam:

Please send a "reply" message verifying receipt of the attached document(s); this may be done by selecting "Reply" on the menu bar of your e-mail software and then selecting "Send". We must receive verification of receipt and your reply will preclude subsequent e-mail transmissions to verify receipt of the document(s).

The document(s) may require immediate action within a specified time frame. Please open and review the document(s) as soon as possible.

The document is in Adobe Portable Document Format (pdf). Adobe Acrobat Reader can be downloaded for free at the following internet site: <http://www.adobe.com/products/acrobat/readstep.html>.

The Bureau of Air Regulation is issuing electronic documents for permits, notices and other correspondence in lieu of hard copies through the United States Postal System, to provide greater service to the applicant and the engineering community. Please advise this office of any changes to your e-mail address or that of the Engineer-of-Record.

Thank you,

DEP, Bureau of Air Regulation

4/23/2007

Friday, Barbara

From: Exchange Administrator
Sent: Monday, April 23, 2007 10:35 AM
To: Friday, Barbara
Subject: Delivery Status Notification (Relay)

Attachments: ATT505793.txt; FINAL Title V Permit Renewal No.: 0250020-018-AV - Tarmac America, LLC
- Titan Pennsuco Complex



ATT505793.txt FINAL Title V Permit
(379 B) Renewal N...

This is an automatically generated Delivery Status Notification.

Your message has been successfully relayed to the following recipients, but the requested delivery status notifications may not be generated by the destination.

hjohnson@titanamerica.com
tlancaster@titanamerica.com

Friday, Barbara

From: System Administrator
To: Graziani, Darrel
Sent: Monday, April 23, 2007 9:57 AM
Subject: Delivered:FINAL Title V Permit Renewal No.: 0250020-018-AV - Tarmac America, LLC - Titan Pennsuco Complex

Your message

To: 'hjohnson@titanamerica.com'; 'dbuff@golder.com'; 'tlancaster@titanamerica.com'; 'wongp@miamidade.gov'; Graziani, Darrel
Cc: Heron, Teresa
Subject: FINAL Title V Permit Renewal No.: 0250020-018-AV - Tarmac America, LLC - Titan Pennsuco Complex
Sent: 4/23/2007 9:57 AM

was delivered to the following recipient(s):

Graziani, Darrel on 4/23/2007 9:57 AM

Friday, Barbara

From: Exchange Administrator
Sent: Monday, April 23, 2007 9:57 AM
To: Friday, Barbara
Subject: Delivery Status Notification (Relay)

Attachments: ATT504194.txt; FINAL Title V Permit Renewal No.: 0250020-018-AV - Tarmac America, LLC - Titan Pennsuco Complex



ATT504194.txt (286 B) FINAL Title V Permit Renewal N...

This is an automatically generated Delivery Status Notification.

Your message has been successfully relayed to the following recipients, but the requested delivery status notifications may not be generated by the destination.

wongp@miamidade.gov

Friday, Barbara

From: Exchange Administrator
Sent: Monday, April 23, 2007 9:58 AM
To: Friday, Barbara
Subject: Delivery Status Notification (Relay)

Attachments: ATT504206.txt; FINAL Title V Permit Renewal No.: 0250020-018-AV - Tarmac America, LLC - Titan Pennsuco Complex



ATT504206.txt (379 B) FINAL Title V Permit Renewal N...

This is an automatically generated Delivery Status Notification.

Your message has been successfully relayed to the following recipients, but the requested delivery status notifications may not be generated by the destination.

hjohnson@titanamerica.com
tlancaster@titanamerica.com

Friday, Barbara

From: Mail Delivery System [MAILER-DAEMON@sophos.golder.com]
Sent: Monday, April 23, 2007 9:58 AM
To: Friday, Barbara
Subject: Successful Mail Delivery Report

Attachments: Delivery report; Message Headers



Delivery report.txt
(454 B)

Message
Headers.txt (2 KB)

This is the mail system at host sophos.golder.com.

Your message was successfully delivered to the destination(s) listed below. If the message was delivered to mailbox you will receive no further notifications. Otherwise you may still receive notifications of mail delivery errors from other systems.

The mail system

<dbuff@golder.com>: delivery via 127.0.0.1[127.0.0.1]:10025: 250 OK, sent
462CBB4C_26295_89_1

Friday, Barbara

From: Wong, Patrick (DERM) [WongP@miamidade.gov]
To: Friday, Barbara
Sent: Monday, April 23, 2007 10:01 AM
Subject: Read: FINAL Title V Permit Renewal No.: 0250020-018-AV - Tarmac America, LLC - Titan Pennsuco Complex

Your message

To: WongP@miamidade.gov
Subject:

was read on 4/23/2007 10:01 AM.

Friday, Barbara

From: Buff, Dave [DBuff@GOLDER.com]
To: undisclosed-recipients
Sent: Monday, April 23, 2007 10:11 AM
Subject: Read: FINAL Title V Permit Renewal No.: 0250020-018-AV - Tarmac America, LLC - Titan Pennsuco Complex

Your message

To: DBuff@GOLDER.com
Subject:

was read on 4/23/2007 10:11 AM.

Friday, Barbara

From: Johnson Hardy [hjohnson@titanamerica.com]
To: Friday, Barbara
Sent: Monday, April 23, 2007 10:40 AM
Subject: Read: FINAL Title V Permit Renewal No.: 0250020-018-AV - Tarmac America, LLC - Titan Pennsuco Complex

Your message

To: hjohnson@titanamerica.com
Subject:

was read on 4/23/2007 10:40 AM.

Friday, Barbara

From: Graziani, Darrel
To: Friday, Barbara
Sent: Monday, April 23, 2007 1:09 PM
Subject: Read: FINAL Title V Permit Renewal No.: 0250020-018-AV - Tarmac America, LLC - Titan Pennsuco Complex

Your message

To: 'hjohnson@titanamerica.com'; 'dbuff@golder.com'; 'tlancaster@titanamerica.com'; 'wongp@miamidade.gov'; Graziani, Darrel
Cc: Heron, Teresa
Subject: FINAL Title V Permit Renewal No.: 0250020-018-AV - Tarmac America, LLC - Titan Pennsuco Complex
Sent: 4/23/2007 9:57 AM

was read on 4/23/2007 1:09 PM.

Friday, Barbara

From: Johnson Hardy [hjohnson@titanamerica.com]

Sent: Tuesday, April 24, 2007 12:33 PM

To: Friday, Barbara

Subject: RE: FINAL Title V Permit Renewal No.: 0250020-018-AV - Tarmac America, LLC - Titan Pennsuco Complex

From: Friday, Barbara [mailto:Barbara.Friday@dep.state.fl.us]

Sent: Monday, April 23, 2007 10:35 AM

To: Johnson Hardy; Lancaster Terry

Subject: FINAL Title V Permit Renewal No.: 0250020-018-AV - Tarmac America, LLC - Titan Pennsuco Complex

Dear Sir/Madam:

Please send a "reply" message verifying receipt of the attached document(s); this may be done by selecting "Reply" on the menu bar of your e-mail software and then selecting "Send". We must receive verification of receipt and your reply will preclude subsequent e-mail transmissions to verify receipt of the document(s).

The document(s) may require immediate action within a specified time frame. Please open and review the document(s) as soon as possible.

The document is in Adobe Portable Document Format (pdf). Adobe Acrobat Reader can be downloaded for free at the following internet site: <http://www.adobe.com/products/acrobat/readstep.html>.

The Bureau of Air Regulation is issuing electronic documents for permits, notices and other correspondence in lieu of hard copies through the United States Postal System, to provide greater service to the applicant and the engineering community. Please advise this office of any changes to your e-mail address or that of the Engineer-of-Record.

Thank you,

DEP, Bureau of Air Regulation

4/24/2007

Friday, Barbara

From: Lancaster Terry [tlancaster@titanamerica.com]
To: undisclosed-recipients
Sent: Tuesday, May 01, 2007 6:27 PM
Subject: Read: FINAL Title V Permit Renewal No.: 0250020-018-AV - Tarmac America, LLC - Titan Pennsuco Complex

Your message

To: tlancaster@titanamerica.com
Subject:

was read on 5/1/2007 6:27 PM.