



Department of Environmental Protection

Jeb Bush
Governor

Twin Towers Office Building
2600 Blair Stone Road
Tallahassee, Florida 32399-2400

Colleen M. Castille
Secretary

Electronic Mail – Received Receipt Requested

October 26, 2006

Mr. Lee Schmudde
Responsible Official
Walt Disney World Company
Walt Disney World Resort Complex
P.O. Box 10,000
Lake Buena Vista, FL 32830-1000

Re: **DRAFT Title V Air Operation Permit Revision No. 0950111-027-AV**
Walt Disney World Resort Complex

Dear Mr. Schmudde:

On July 24, 2006, you submitted an application for a Title V air operation permit revision for the Walt Disney World Resort Complex which is located at 1375 Buena Vista Drive, Orange and Osceola Counties. Enclosed are the following documents: "Statement of Basis", "DRAFT Permit", "Written Notice of Intent to Issue Title V Air Operation Permit", and "Public Notice of Intent to Issue Title V Air Operation Permit".

The "Statement of Basis" summarizes the Permitting Authority's technical review of the application and provides the rationale for making the preliminary determination to issue a DRAFT Permit. The proposed "DRAFT Permit" includes specific conditions that regulate the emissions units at this facility. The "Written Notice of Intent to Issue Title V Air Operation Permit" provides important information regarding: the Permitting Authority's intent to issue a Title V air operation permit (DRAFT Permit); the requirements for publishing a Public Notice of the Permitting Authority's intent to issue the DRAFT Permit; the procedures for submitting comments on the DRAFT Permit; the requirements for requesting a public meeting; the requirements for filing a petition for an administrative hearing; and the availability of mediation. The "Public Notice of Intent to Issue Title V Air Operation Permit" is the actual notice that you must have published in the legal advertisement section of a newspaper of general circulation in the area affected by this project.

If you have any questions, please contact the Project Engineer, Tom Cascio, at 850-921-9526.

Sincerely,

Trina L. Vielhauer, Chief
Bureau of Air Regulation

Enclosures

"More Protection, Less Process"

Printed on recycled paper.

WRITTEN NOTICE OF INTENT TO ISSUE TITLE V AIR OPERATION PERMIT

*In the Matter of an
Application for Title V Air Operation Permit by:*

Mr. Lee Schmudde
Responsible Official
Walt Disney World Company
P.O. Box 10,000
Lake Buena Vista, FL 32830-1000

DRAFT Air Permit No. **0950111-027-AV**
Walt Disney World Resort Complex
Title V Permit Revision
Orange and Osceola Counties, Florida

Facility Location: The applicant requests a Title V air operation permit (Permit) to operate the Walt Disney World Resort Complex, which is located at 1375 Buena Vista Drive, Orange and Osceola Counties, Florida. The UTM map coordinates are: Zone 17; 449.70 km East; and 3138.00 km North (Latitude: 28° 22' 24" North / Longitude: 81° 32' 46" West).

Project: On July 24, 2006, the applicant applied to the Permitting Authority for a Permit revision. The facility is a complex of hotels, theme parks and support facilities, and a utility. The various air pollution sources are boilers, a combined cycle combustion turbine with a natural gas-fired heat recovery steam generator, paint spray booths and associated operations, external combustion oil heaters, and hot water heaters.

The Reedy Creek Improvement District operates an electrical generating plant at the Walt Disney World Resort Complex. The purpose of this Title V permit revision is to incorporate the specific conditions of air construction permits 0950111-025-AC and 0950111-026-AC, that authorized the replacement of the existing LM 5000 gas turbine (EU-088) with an LM 6000PC gas turbine with SPRINT™. Details of the permit revision are provided in the application and the enclosed "Statement of Basis".

Permitting Authority: Applications for Title V air operation permits are subject to review in accordance with the provisions of Chapter 403, Florida Statutes (F.S.) and Chapters 62-4, 62-210, and 62-213, Florida Administrative Code (F.A.C.). The proposed project is not exempt from air permitting requirements and an air permit is required to operate the facility. The Department of Environmental Protection, Bureau of Air Regulation, is the Permitting Authority responsible for making a permit determination regarding this project. The Permitting Authority's physical address is: 111 South Magnolia Drive, Suite 4, Tallahassee, Florida 32301. The Permitting Authority's mailing address is: 2600 Blair Stone Road, Mail Station #5505, Tallahassee, Florida 32399-2400. The Permitting Authority's telephone number is 850/488-0114 and the facsimile number is 850/922-6979.

Project File: A complete project file is available for public inspection during the normal business hours of 8:00 a.m. to 5:00 p.m., Monday through Friday (except legal holidays), at the address indicated above for the Permitting Authority. The complete project file includes the DRAFT Permit, the Statement of Basis, the application, and the information submitted by the applicant, exclusive of confidential records under Section 403.111, F.S. Interested persons may view the DRAFT Permit and file electronic comments by visiting the following website: <http://www.dep.state.fl.us/air/eproducts/ards/>. A copy of the complete project file is also available at the Air Resource Section of the Department's Central District Office at 3319 Maguire Boulevard, Suite 232, Orlando, Florida 32803-3767. The telephone number is 407/894-7555.

Notice of Intent to Issue Air Permit: The Permitting Authority gives notice of its intent to issue a permit to the applicant for the project described above. The applicant has provided reasonable assurance that operation of the facility will not adversely impact air quality and that the project will comply with all appropriate provisions of Chapters 62-4, 62-204, 62-210, 62-212, 62-213, 62-214, 62-296, and 62-297, F.A.C. The Permitting Authority will issue a PROPOSED Permit and subsequent FINAL Permit in

WRITTEN NOTICE OF INTENT TO ISSUE TITLE V AIR OPERATION PERMIT

accordance with the conditions of the DRAFT Permit unless a response received in accordance with the following procedures results in a different decision or a significant change of terms or conditions.

Public Notice: Pursuant to Section 403.815, F.S. and Rules 62-110.106 and 62-210.350, F.A.C., you (the applicant) are required to publish at your own expense the enclosed "Public Notice of Intent to Issue Title V Air Operation Permit" (Public Notice). The Public Notice shall be published one time only as soon as possible in the legal advertisement section of a newspaper of general circulation in the area affected by this project. The newspaper used must meet the requirements of Sections 50.011 and 50.031, F.S. in the county where the activity is to take place. If you are uncertain that a newspaper meets these requirements, please contact the Permitting Authority at above address or phone number. Pursuant to Rule 62-110.106(5), F.A.C., the applicant shall provide proof of publication to the Permitting Authority at the above address within seven (7) days of publication. Failure to publish the notice and provide proof of publication may result in the denial of the permit pursuant to Rule 62-110.106(11), F.A.C.

Comments: The Permitting Authority will accept written comments concerning the DRAFT Permit for a period of thirty (30) days from the date of publication of this Public Notice. Written comments must be post-marked, and all e-mail or facsimile comments must be received by the close of business (5 pm), on or before the end of this 30-day period by the Permitting Authority at the above address, email or facsimile. As part of his or her comments, any person may also request that the Permitting Authority hold a public meeting on this permitting action. If the Permitting Authority determines there is sufficient interest for a public meeting, it will publish notice of the time, date, and location in the Florida Administrative Weekly (<http://faw.dos.state.fl.us/>) and in a newspaper of general circulation in the area affected by the permitting action. For additional information, contact the Permitting Authority at the above address or phone number. If written comments or comments received at a public meeting result in a significant change to the DRAFT Permit, the Permitting Authority will issue a Revised DRAFT Permit and require, if applicable, another Public Notice. All comments filed will be made available for public inspection.

Petitions: A person whose substantial interests are affected by the proposed permitting decision may petition for an administrative hearing in accordance with Sections 120.569 and 120.57, F.S. The petition must contain the information set forth below and must be filed with (received by) the Department's Agency Clerk in the Office of General Counsel of the Department of Environmental Protection, 3900 Commonwealth Boulevard, Mail Station #35, Tallahassee, Florida 32399-3000. Petitions filed by the applicant or any of the parties listed below must be filed within fourteen (14) days of receipt of this Written Notice of Intent to Issue Title V Air Operation Permit. Petitions filed by any persons other than those entitled to written notice under Section 120.60(3), F.S., must be filed within fourteen (14) days of publication of the attached Public Notice or within fourteen (14) days of receipt of this Written Notice of Intent to Issue Title V Air Operation Permit, whichever occurs first. Under Section 120.60(3), F.S., however, any person who asked the Permitting Authority for notice of agency action may file a petition within fourteen (14) days of receipt of that notice, regardless of the date of publication. A petitioner shall mail a copy of the petition to the applicant at the address indicated above, at the time of filing. The failure of any person to file a petition within the appropriate time period shall constitute a waiver of that person's right to request an administrative determination (hearing) under Sections 120.569 and 120.57, F.S., or to intervene in this proceeding and participate as a party to it. Any subsequent intervention will be only at the approval of the presiding officer upon the filing of a motion in compliance with Rule 28-106.205, F.A.C.

A petition that disputes the material facts on which the Permitting Authority's action is based must contain the following information: (a) The name and address of each agency affected and each agency's file or identification number, if known; (b) The name, address, and telephone number of the petitioner; the name, address and telephone number of the petitioner's representative, if any, which shall be the

WRITTEN NOTICE OF INTENT TO ISSUE TITLE V AIR OPERATION PERMIT

address for service purposes during the course of the proceeding; and an explanation of how the petitioner's substantial interests will be affected by the agency determination; (c) A statement of how and when each petitioner received notice of the agency action or proposed action; (d) A statement of all disputed issues of material fact. If there are none, the petition must so state; (e) A concise statement of the ultimate facts alleged, including the specific facts the petitioner contends warrant reversal or modification of the agency's proposed action; (f) A statement of the specific rules or statutes the petitioner contends require reversal or modification of the agency's proposed action; and, (g) A statement of the relief sought by the petitioner, stating precisely the action the petitioner wishes the agency to take with respect to the agency's proposed action. A petition that does not dispute the material facts upon which the Permitting Authority's action is based shall state that no such facts are in dispute and otherwise shall contain the same information as set forth above, as required by Rule 28-106.301, F.A.C.

Because the administrative hearing process is designed to formulate final agency action, the filing of a petition means that the Permitting Authority's final action may be different from the position taken by it in this Written Notice of Intent to Issue Title V Air Operation Permit. Persons whose substantial interests will be affected by any such final decision of the Permitting Authority on the application have the right to petition to become a party to the proceeding, in accordance with the requirements set forth above.

Mediation: Mediation is not available in this proceeding.

Objections: Finally, pursuant to 42 United States Code (U.S.C.) Section 7661d(b)(2), any person may petition the Administrator of the EPA within sixty (60) days of the expiration of the Administrator's 45 (forty-five) day review period as established at 42 U.S.C. Section 7661d(b)(1), to object to the issuance of any Title V air operation permit. Any petition shall be based only on objections to the Permit that were raised with reasonable specificity during the thirty (30) day public comment period provided in the Public Notice, unless the petitioner demonstrates to the Administrator of the EPA that it was impracticable to raise such objections within the comment period or unless the grounds for such objection arose after the comment period. Filing of a petition with the Administrator of the EPA does not stay the effective date of any permit properly issued pursuant to the provisions of Chapter 62-213, F.A.C. Petitions filed with the Administrator of EPA must meet the requirements of 42 U.S.C. Section 7661d(b)(2) and must be filed with the Administrator of the EPA at: U.S. EPA, 401 M Street, S.W., Washington, D.C. 20460. For more information regarding EPA review and objections, visit EPA's Region 4 web site at <http://www.epa.gov/region4/air/permits/Florida.htm>.

Executed in Tallahassee, Florida.



Trina L. Vielhauer, Chief
Bureau of Air Regulation

CERTIFICATE OF SERVICE

The undersigned duly designated deputy agency clerk hereby certifies that this "Statement of Basis", "DRAFT Permit", "Written Notice of Intent to Issue Title V Air Operation Permit", and "Public Notice of Intent to Issue Title V Air Operation Permit" and all copies were sent electronically (with Received Receipt) before the close of business on 10/26/06 to the person(s) listed below.

Lee Schmudde (Lee.Schmudde@disney.com)
Edward Godwin, P.E., Walt Disney World Company (Ed.Godwin@disney.com)
Len Kozlov, P.E., Central District Office
EPA Region 4 (danois.gracy@epa.gov)

Clerk Stamp

FILING AND ACKNOWLEDGMENT FILED, on this date, pursuant to Section 120.52(7), Florida Statutes, with the designated agency clerk, receipt of which is hereby acknowledged.

Paulina J. Friday 10/26/06
(Clerk) (Date)

PUBLIC NOTICE OF INTENT TO ISSUE TITLE V AIR OPERATION PERMIT

Department of Environmental Protection
DRAFT Title V Air Operation Permit Revision No. 0950111-027-AV
Walt Disney World Resort Complex
Orange and Osceola Counties

Applicant: The applicant for this project is the Walt Disney World Company, P.O. Box 10,000 Lake Buena Vista, Florida. The applicant's responsible official is Mr. Lee Schmutde.

Facility Location: The applicant operates the Walt Disney World Resort Complex, which is located at 1375 Buena Vista Drive, Orange and Osceola Counties, Florida. The facility is a complex of hotels, theme parks and support facilities, and a utility. The various air pollution sources are boilers, a combined cycle combustion turbine with a natural gas-fired heat recovery steam generator, paint spray booths and associated operations, external combustion oil heaters and hot water heaters.

Project: The applicant submitted an application for a Title V Air Operation Permit Revision. The Reedy Creek Improvement District operates an electrical generating plant at the Walt Disney World Resort Complex. The purpose of this revision is to incorporate the specific conditions of air construction permits 0950111-025-AC and 0950111-026-AC, that authorized the replacement of the existing General Electric LM 5000 gas turbine (EU-088) with an LM 6000PC gas turbine with SPRINT™.

Permitting Authority: Applications for Title V air operation permits are subject to review in accordance with the provisions of Chapter 403, Florida Statutes (F.S.) and Chapters 62-4, 62-210, and 62-213 of the Florida Administrative Code (F.A.C.). The proposed project is not exempt from air permitting requirements and an air permit is required to operate the facility. The Department of Environmental Protection, Bureau of Air Regulation, is the Permitting Authority responsible for making a permit determination regarding this project. The Permitting Authority's physical address is: 111 South Magnolia Drive, Suite 4, Tallahassee, Florida 32301. The Permitting Authority's mailing address is: 2600 Blair Stone Road, Mail Station #5505, Tallahassee, Florida 32399-2400. The Permitting Authority's telephone number is 850/488-0114 and the facsimile number is 850/922-6979.

Project File: A complete project file is available for public inspection during the normal business hours of 8:00 a.m. to 5:00 p.m., Monday through Friday (except legal holidays), at address indicated above for the Permitting Authority. The complete project file includes the DRAFT Permit, the Statement of Basis, the application, and the information submitted by the applicant, exclusive of confidential records under Section 403.111, F.S. Interested persons may view the DRAFT Permit and file electronic comments by visiting the following website: <http://www.dep.state.fl.us/air/eproducts/ards/>. A copy of the complete project file is also available at the Air Resource Section of the Department's Central District Office at 3319 Maguire Boulevard, Suite 232, Orlando, Florida 32803-3767. (Telephone: 407/894-7555).

Notice of Intent to Issue A Permit: The Permitting Authority gives notice of its intent to issue a permit to the applicant for the project described above. The applicant has provided reasonable assurance that operation of the facility will not adversely impact air quality and that the project will comply with all appropriate provisions of Chapters 62-4, 62-204, 62-210, 62-212, 62-213, 62-214, 62-296, and 62-297, F.A.C. The Permitting Authority will issue a PROPOSED Permit and subsequent FINAL Permit in accordance with the conditions of the DRAFT Permit unless a response received in accordance with the following procedures results in a different decision or a significant change of terms or conditions.

Comments: The Permitting Authority will accept written comments concerning the DRAFT Permit for a period of thirty (30) days from the date of publication of this Public Notice. Written comments must be post-marked and all e-mail or facsimile comments must be received by the close of business (5 pm) on or before the end of this 30-day period by the Permitting Authority at the above address, email or facsimile. As part of his or her comments, any person may also request that the Permitting Authority hold a public meeting on this permitting action. If the Permitting Authority determines there is sufficient interest for a

(Public Notice to be Published in the Newspaper)

PUBLIC NOTICE OF INTENT TO ISSUE TITLE V AIR OPERATION PERMIT

public meeting, it will publish notice of the time, date, and location in the Florida Administrative Weekly (<http://faw.dos.state.fl.us/>) and in a newspaper of general circulation in the area affected by the permitting action. For additional information, contact the Permitting Authority at the above address or phone number. If written comments or comments received at a public meeting result in a significant change to the DRAFT Permit, the Permitting Authority shall issue a Revised DRAFT Permit and require, if applicable, another Public Notice. All comments filed will be made available for public inspection.

Petitions: A person whose substantial interests are affected by the proposed permitting decision may petition for an administrative hearing in accordance with Sections 120.569 and 120.57, F.S. The petition must contain the information set forth below and must be filed with (received by) the Department's Agency Clerk in the Office of General Counsel of the Department of Environmental Protection at 3900 Commonwealth Boulevard, Mail Station #35, Tallahassee, Florida 32399-3000. Petitions filed by any persons other than those entitled to written notice under Section 120.60(3), F.S., must be filed within fourteen (14) days of publication of this Public Notice or receipt of a written notice, whichever occurs first. Under Section 120.60(3), F.S., however, any person who asked the Permitting Authority for notice of agency action may file a petition within fourteen (14) days of receipt of that notice, regardless of the date of publication. A petitioner shall mail a copy of the petition to the applicant at the address indicated above, at the time of filing. The failure of any person to file a petition within the appropriate time period shall constitute a waiver of that person's right to request an administrative determination (hearing) under Sections 120.569 and 120.57, F.S., or to intervene in this proceeding and participate as a party to it. Any subsequent intervention will be only at the approval of the presiding officer upon the filing of a motion in compliance with Rule 28-106.205, F.A.C.

A petition that disputes the material facts on which the Permitting Authority's action is based must contain the following information: (a) The name and address of each agency affected and each agency's file or identification number, if known; (b) The name, address and telephone number of the petitioner; the name address and telephone number of the petitioner's representative, if any, which shall be the address for service purposes during the course of the proceeding; and an explanation of how the petitioner's substantial rights will be affected by the agency determination; (c) A statement of how and when the petitioner received notice of the agency action or proposed action; (d) A statement of all disputed issues of material fact. If there are none, the petition must so state; (e) A concise statement of the ultimate facts alleged, including the specific facts the petitioner contends warrant reversal or modification of the agency's proposed action; (f) A statement of the specific rules or statutes the petitioner contends require reversal or modification of the agency's proposed action; and, (g) A statement of the relief sought by the petitioner, stating precisely the action the petitioner wishes the agency to take with respect to the agency's proposed action. A petition that does not dispute the material facts upon which the Permitting Authority's action is based shall state that no such facts are in dispute and otherwise shall contain the same information as set forth above, as required by Rule 28-106.301, F.A.C. Because the administrative hearing process is designed to formulate final agency action, the filing of a petition means that the Permitting Authority's final action may be different from the position taken by it in this Public Notice of intent. Persons whose substantial interests will be affected by any such final decision of the Permitting Authority on the application have the right to petition to become a party to the proceeding, in accordance with the requirements set forth above.

Mediation: Mediation is not available for this proceeding.

Objections: In addition to the above right to petition, pursuant to 42 United States Code (U.S.C.) Section 7661d(b)(2), any person may petition the Administrator of the EPA within sixty (60) days of the expiration of the Administrator's 45 (forty-five) day review period as established at 42 U.S.C. Section 7661d(b)(1), to object to the issuance of any Title V air operation permit. Any petition shall be based only on objections to the Permit that were raised with reasonable specificity during the thirty (30) day public comment period provided in the Public Notice, unless the petitioner demonstrates to the Administrator of the EPA that it was impracticable to raise such objections within the comment period or

(Public Notice to be Published in the Newspaper)

PUBLIC NOTICE OF INTENT TO ISSUE TITLE V AIR OPERATION PERMIT

unless the grounds for such objection arose after the comment period. Filing of a petition with the Administrator of the EPA does not stay the effective date of any permit properly issued pursuant to the provisions of Chapter 62-213, F.A.C. Petitions filed with the Administrator of EPA must meet the requirements of 42 U.S.C. Section 7661d(b)(2) and must be filed with the Administrator of the EPA at: U.S. EPA, 401 M Street, S.W., Washington, D.C. 20460. For more information regarding EPA review and objections, visit EPA's Region 4 web site at <http://www.epa.gov/region4/air/permits/Florida.htm>.

STATEMENT OF BASIS

**Walt Disney World Company
Walt Disney World Resort Complex**

**Facility ID. 0950111
Orange and Osecola Counties**

**Title V Air Operation Permit Revision
Permit No. 0950111-027-AV**

This Title V Air Operation Permit Revision is issued under the provisions of Chapter 403, Florida Statutes (F.S.), and Florida Administrative Code (F.A.C.) Chapters 62-4, 62-210, 62-213, and 62-214. The above named permittee is hereby authorized to perform the work or operate the facility shown on the application and approved drawing(s), plans, and other documents, attached hereto or on file with the permitting authority, in accordance with the terms and conditions of this permit.

This Title V Air Operation Permit Revision is for the operation of the Walt Disney World Resort Complex. This facility is located at 1375 Buena Vista Drive, Orange and Osceola Counties; UTM Coordinates: Zone 17, 449.70 km East and 3138.00 km North; Latitude: 28° 22' 24" North and Longitude: 81° 32' 46" West.

The facility is a complex of hotels, theme parks and support facilities, and a utility. The various air pollution sources are boilers, a combined cycle combustion turbine with a natural gas-fired heat recovery steam generator, paint spray booths and associated operations, external combustion oil heaters and hot water heaters.

The Walt Disney World Resort Complex operates 120 stand-by/emergency generators that fire new No. 2 distillate diesel fuel oil (108), natural gas (11), or LP gas (1). Of these generators within the complex, 85 are assigned to the Walt Disney World Co. operations and 35 are assigned to the Reedy Creek Improvement District operations.

The Reedy Creek Energy Services (RCES) operates a combined cycle combustion turbine (CT) system followed by an associated natural gas-fired duct burner and a heat recovery steam generator (HRSG). Details follow below.

Description: The emissions unit is a General Electric Model No. LM 6000PC gas turbine (nominal 50 MW) with heat recovery steam generator and steam turbine electrical generator (nominal 8.5 MW). The gas turbine includes SPRINT™ spray inter-cooling technology and inlet air chilling. Natural gas (SCC No. 2-01-002-01) is the primary fuel with distillate oil (SCC No. 2-01-001-01) as a restricted alternate fuel limited to no more than 475 hours per year. The permitted capacity is 505 MMBtu per hour of heat input from either fuel based on a compressor inlet air temperature of 30° F, 100% load, and the higher heating value of the fuel.

Controls: Water injection decreases flame temperatures to control emissions of nitrogen oxides (NOx). An oxidation catalyst minimizes emissions of carbon monoxide (CO) and volatile organic compounds (VOC).

Monitors: NOx emissions are monitored and recorded by a continuous emissions monitoring system (CEMS). The water-to-fuel ratio is also continuously monitored.

Stack Parameters: The exhaust stack is approximately 11.1 feet in diameter and 65 feet tall. Exhaust gas will exit the stack at approximately 285° F with a volumetric flow rate of approximately 350,935 acfm based on a compressor inlet air temperature of 48° F, 100% load, and the inlet chiller operation.

The North Service Area Laundry consists of three (3) laundry boilers (Nos. 1, 2 & 3), which are manufactured by York-Shipley. Nos. 1 and 2 are rated at 300 horsepower (HP) and No. 3 is rated at 350 HP. The combined maximum total heat input of the three boilers is 39.6 MMBtu/hr from the firing of natural gas only. The laundry boilers are subject to 40 CFR 60, Subpart Dc, Standards of Performance for Small Industrial-Commercial-Institutional Steam Generating Units; and, they are regulated under Rule 62-296.406, F.A.C., Fossil Fuel Steam Generators With Less Than 250 MMBtu Per Hour Heat Input.

Disney's Boardwalk Resort has two (2) boilers (Nos. BDW-1 & 2), which are manufactured by Cleaver Brooks, Model Nos. CBE-700-250. The boilers are each rated at 250 HP. The maximum heat input of each boiler is 10.46 MMBtu/hr from the firing of natural gas only. The boilers are subject to 40 CFR 60, Subpart Dc, Standards of Performance for Small Industrial-Commercial-Institutional Steam Generating Units; and, they are regulated under Rule 62-296.406, F.A.C., Fossil Fuel Steam Generators With Less Than 250 MMBtu Per Hour Heat Input.

The Reedy Creek Improvement District's Epcot Central Energy Plant has two (2) identical 3,600 horsepower large bore diesel engines (Nos. Epcot DG-1 & 2), manufactured by Stewart & Stevenson, Model Nos. S-20-645-E4B. Each engine is equipped with a 2.5 megawatt generator, Model TBGZHJ. Each generator provides peak demand reduction and emergency standby power. Each emissions unit is permitted to fire new No. 2 distillate fuel oil only. The sulfur content of the new No. 2 distillate fuel oil shall not exceed 0.5%, by weight. The firing of low sulfur fuel oil negates the need to conduct any SO₂ mass tests. Each emissions unit is allowed to operate 1900 hrs/yr.

At the North Service Area Dry Cleaning Plant, there is one perchloroethylene dry cleaning unit (No. 1). No. 1 is a Multimatic Atlas 45. The perchloroethylene dry cleaning unit is vented to a single exhaust stack with precleaning provided by a new chiller system followed by and in series with an existing carbon absorption system (an American Laundry Machinery, Inc.: Model PC 212 activated carbon vapor adsorber). The permittee recently upgraded the existing control system by installing a chiller system, which reduced the potential perchloroethylene emissions (1.5 TPY to 0.5 TPY) and load on the existing carbon absorption system. The perchloroethylene dry cleaning operation is subject to 40 CFR 63, Subpart M, National Perchloroethylene Air Emission Standards for Dry Cleaning Facilities.

Also included in this permit are miscellaneous unregulated (paint spray booths, etc.) and insignificant emissions units/activities.

Based on the Title V permit revision application received on July 24, 2006, this facility is a major source of hazardous air pollutants (HAPs).

This permit revision includes the following changes:

PROJECT DESCRIPTION OF (0950111-25-AC)

RCES proposed to replace the existing gas turbine with a General Electric LM 6000PC SPRINT™ gas turbine rated at nominal 50 MW. The new gas turbine includes General Electric's SPRINT™ spray inter-cooling technology. No changes are made to the existing HRSG, steam turbine electrical generator, or inlet air chilling system. The duct burner is no longer needed during combined cycle operation and does not operate when the new gas turbine is in operation. The current NOx/CO2 dilution in-stack CEMS is replaced with a NOx/O2 extractive CEMS. Commercial operation with the new gas turbine began in February 2006.

PROJECT DESCRIPTION OF (0950111-26-AC)

RCES requested that Section 3, Condition No. 6 of Air Construction Permit No. 0950111-025-AC be revised to show a maximum heat input of 505 mmBtu/hr, HHV at 30°F and full load operation and to replace the existing Section 3, Condition 20(e) with a proposed Condition 20(e) that addresses NOx four hour rolling average calculations and recording. Air Construction Permit 0950111-026-AC implements these changes. No other changes to Air Construction Permit No. 0950111-025-AC were requested or made.

Walt Disney World Co.
Walt Disney World Resort Complex
Facility ID No. **0950111**
Orange and Osceola Counties

Title V Air Operation Permit Revision
DRAFT Permit Project No. **0950111-027-AV**

Permitting Authority:

State of Florida
Department of Environmental Protection
Division of Air Resource Management
Bureau of Air Regulation
Permitting South Section

Mail Station #5505
2600 Blair Stone Road
Tallahassee, Florida 32399-2400

Telephone: 850/488-0114
Fax: 850/922-6979

Compliance Authority:

State of Florida
Department of Environmental Protection
Central District Office
3319 Maguire Boulevard, Suite 232
Orlando, Florida 32803-3767
Telephone: 407/894-7555
Fax: 407/897-2966

**Title V Air Operation Permit Revision
0950111-027-AV**

Table of Contents

Section	Page Numbers
Placard Page	1
I. Facility Information	2
A. Facility Description.	
B. Summary of Emissions Unit ID No(s). and Brief Description(s).	
C. Relevant Documents.	
II. Facility-wide Conditions	5
III. Emissions Unit(s) and Conditions	
A. Emissions Units	
Combined Cycle Combustion Turbine with Natural Gas-Fired Heat Recovery Steam Generator	8
B. Emissions Units	
Boilers and Diesel Electric Generators	24
C. Emissions Units	
Two Diesel Electric Generators (2.5 MW each)	29
D. Emissions Units	
North Service Area Laundry (Dry Cleaning Plant)	36
E. Emissions Unit	
Disney's Animal Kingdom Animal Crematory	41
F. Three Diesel Electric Generators serving the DISC Building	49
IV. Acid Rain Part	
A. Acid Rain, Phase II	51

Permittee:

Walt Disney World Co.
P.O. Box 10,000
Orlando, Florida 32830-1000

DRAFT Permit No.: 0950111-027-AV**Facility ID No.:** 0950111**SIC Nos.:** 79, 7996**Project:** Title V Air Operation Permit Revision

This permit revision is for the operation of the Walt Disney World Resort Complex. This facility is located at 1375 Buena Vista Drive, Orange and Osceola Counties; UTM Coordinates: Zone 17, 449.70 km East and 3138.00 km North; Latitude: 28° 22' 24" North and Longitude: 81° 32' 46" West.

This Title V Air Operation Permit Revision is issued under the provisions of Chapter 403, Florida Statutes (F.S.), and Florida Administrative Code (F.A.C.) Chapters 62-4, 62-210, 62-213 and 62-214. The above named permittee is hereby authorized to perform the work or operate the facility shown on the application and approved drawing(s), plans, and other documents, attached hereto or on file with the permitting authority, in accordance with the terms and conditions of this permit.

Referenced attachments made a part of this permit:

Appendix U-1, List of Unregulated Emissions Units and/or Activities

Appendix I-1, List of Insignificant Emissions Units and/or Activities

APPENDIX TV-4, TITLE V CONDITIONS (version dated 02/12/02)

APPENDIX SS-1, STACK SAMPLING FACILITIES (dated 10/07/96)

TABLE 297.310-1, CALIBRATION SCHEDULE (dated 10/07/96)

FIGURE 1 - SUMMARY REPORT - GASEOUS AND OPACITY EXCESS EMISSIONS
AND MONITORING SYSTEMS PERFORMANCE REPORT (40 CFR 60, July 1996)

Phase II Acid Rain Application dated 08/05/2002

Alternate Sampling Procedure: ASP Number 97-B-01

Appendix CAM

Effective Date: January 1, 2003**Revision Effective Date:****Renewal Application Due Date:** July 5, 2007**Expiration Date:** December 31, 2007

Joseph Kahn, Director
Division of Air Resource Management

JK/tlv/aal/tbc

Section I. Facility Information.

Subsection A. Facility Description.

The facility is a complex of hotels, theme parks and support facilities, and a utility. The various air pollution sources are boilers, a combined cycle combustion turbine with a natural gas-fired heat recovery steam generator, paint spray booths and associated operations, external combustion (thermal) oil heaters and hot water heaters.

Based on the Title V permit revision application received on July 24, 2006, this facility is a major source of hazardous air pollutants (HAPs).

Subsection B. Summary of Emissions Unit ID No(s). and Brief Description(s).

E.U. ID No. (Facility ID No.)	Brief Description
<u>North Service Area Dry Cleaning Plant</u>	
-001 (LDC-1)	Dry Cleaning Unit #1
<u>North Service Area (NSA)</u>	
-005 (NSA-17)	North Service Area (NSA) Central Shops Building Annex (CSBA): Sand Blast Chamber No. 1: unregulated
-006 (NSA-18)	NSA Boat Maintenance & Painting Facility
-007 (NSA-1 thru 7, 11, 12, 14 thru 16)	NSA Central Shops Building
-014 (NSA-8)	NSA Lofting Building PSB
-015 (NSA-9 & 10)	NSA CSBA
-020 (LBB-1a)	Laundry Boiler #1
-021 (LBB-1b)	Laundry Boiler #2
-022 (LBB-1c)	Laundry Boiler #3
<u>Disney's Grand Floridian Hotel</u>	
-035 (GFR2 thru 18)	16 Hot Water Heaters
<u>Disney-MGM Studios</u>	
-053 (STB-1, 2A, 2B1, 2B2, 3 thru 8)	10 Hot Water Heaters
<u>Disney-MGM Studio Tours</u>	
-061 (MGM-10)	Paint Spray Booth (PSB)
<u>Buena Vista Construction</u>	
-062 (BVC-1)	PSB
<u>Lake Buena Vista Community Village</u>	
-063 (LBV-1 & 2)	PSBs
<u>Disney Village</u>	
-065 (VM-3)	PSB
<u>Ft. Wilderness/Golf Course</u>	
-066 (FWR-4)	PSB
<u>Yacht & Beach Club</u>	
-067 (YBC-3)	PSB
<u>EPCOT Center</u>	
-068 (EP-1 & 2)	PSBs
-070 (EP-3)	PSB
<u>South Service Area</u>	
-071 (SSA-1)	PSB

E.U. ID No. (Facility ID No.)	Brief Description
<u>Administrative Area</u>	
-072 (LAU-1 & 2)	2 Laundry Thermal Oil Heaters
<u>Magic Kingdom</u>	
-075 (MK-1)	PSB
<u>Reedy Creek Improvement District/Epcot</u>	
-076 (Epcot HWG-1 thru 3)	3 Hot Water Heaters (unregulated)
-079 (Epcot DG-1)	2.5 MW Diesel Generator
-080 (Epcot DG-2)	2.5 MW Diesel Generator
<u>Reedy Creek Improvement District</u>	
-081 (CEP-2)	Hot Water Heater
<u>Blizzard Beach</u>	
-083 (BB-1 thru 5)	5 Hot Water Heaters
<u>Reedy Creek Improvement District</u>	
-088 (CEP-1)	CCCT with natural gas fired Heat Recovery Steam Generator
<u>Boardwalk Resort</u>	
-090 (BDW-1 & 2)	2 Boilers
-091 (BDW-3 thru 10)	8 Hot Water Heaters
<u>Magic Kingdom</u>	
-092 (MK-3)	Hot Water Heater
-093 (MK-2)	PSB
<u>Boardwalk Resort</u>	
-094 (BR-1)	PSB
<u>Coronado Springs Resort</u>	
-095 (COS-1 thru 37)	37 Hot Water Heaters
<u>Stand-by/Emergency Generators</u>	
-101	120 Stand-by/Emergency Generators Firing #2 FO, NG or LP Gas
<u>Coronado Springs Resort</u>	
-102 (COS-41)	PSB
<u>Disney's Animal Kingdom</u>	
-103 (DAKU-1 thru 51)	51 Hot Water Heaters
<u>Necropsy Building</u>	
-112 (DAK-1)	Crawford Model CB800 Animal Crematory
<u>All Star Resort</u>	
-113 (ASR-2 thru 108)	107 Hot Water Heaters
-114 (ASR-1)	PSB
<u>Tree of Life Boiler</u>	
-115 (DAKU-52)	1.075 MMBtu/hr boiler firing NG
<u>Disney's MGM Studios Feature Animation Building</u>	
-117	2 PSBs
<u>NSA Monorail Building</u>	
-118 (NSA-20)	Monorail Trains PSB
<u>Disney's Animal Kingdom</u>	
-119	Maintenance PSB
-120	Three Diesel Electric Generators Serving the DISC Building

Unregulated Emissions Units and/or Activities

{Permitting note: For Unregulated Emissions Units and/or Activities, see Appendix U-1.}

***Please reference the Permit No., Facility ID No., and appropriate Emissions Unit(s) ID No(s).
on all correspondence, test report submittals, applications, etc.***

Subsection C. Relevant Documents.

The documents listed below are not a part of this permit; however, they are specifically related to this permitting action.

These documents are provided to the permittee for information purposes only:

Appendix A-1, Abbreviations, Acronyms, Citations, and Identification Numbers
Statement of Basis

These documents are on file with the permitting authority:

Title V Permit Revision Application received on July 24, 2006.

Air Construction Permit 0950111-026-AC.

Letter requesting additional information sent on September 13, 2006.

Response received on September 29, 2006.

Section II. Facility-wide Conditions.

The following conditions apply facility-wide:

1. APPENDIX TV-4, TITLE V CONDITIONS, is a part of this permit.

{Permitting Note: APPENDIX TV-4, TITLE V CONDITIONS, is distributed to the permittee only. Other persons requesting copies of these conditions shall be provided a copy when requested or otherwise appropriate.}

2. General Pollutant Emission Limiting Standards. Objectionable Odor Prohibited. No person shall cause, suffer, allow, or permit the discharge of air pollutants which cause or contribute to an objectionable odor.

[Rule 62-296.320(2), F.A.C.; AC48-151472; AC48-151504; AC48-151506; AC48-151507; AC48-151509; AC48-151510; AC48-156346; AC48-166499; AC48-179648; AC48-179649; AC48-205018; AC48-243981; and, AO48-183381]

3. General Particulate Emission Limiting Standards. General Visible Emissions Standard.

Except for emissions units that are subject to a particulate matter or opacity limit set forth or established by rule and reflected by conditions in this permit, no person shall cause, let, permit, suffer or allow to be discharged into the atmosphere the emissions of air pollutants from any activity, the density of which is equal to or greater than that designated as Number 1 on the Ringelmann Chart (20 percent opacity). EPA Method 9 is the method of compliance pursuant to Chapter 62-297, F.A.C.

[Rules 62-296.320(4)(b)1. & 4., F.A.C.]

4. Prevention of Accidental Releases (Section 112(r) of CAA).

a. The permittee shall submit its Risk Management Plan (RMP) to the Chemical Emergency Preparedness and Prevention Office (CEPPO) RMP Reporting Center when, and if, such requirement becomes applicable. Any Risk Management Plans, original submittals, revisions or updates to submittals, should be sent to:

RMP Reporting Center
P.O. Box 1515
Lanham-Seabrook, Maryland 20703-1515
Telephone: 301/429-5018

and,

b. The permittee shall submit to the permitting authority Title V certification forms or a compliance schedule in accordance with Rule 62-213.440(2), F.A.C.

[40 CFR 68]

5. Unregulated Emissions Units and/or Activities. Appendix U-1, List of Unregulated Emissions Units and/or Activities, is a part of this permit.

[Rule 62-213.440(1), F.A.C.]

6. Insignificant Emissions Units and/or Activities. Appendix I-1, List of Insignificant Emissions Units and/or Activities, is a part of this permit.

[Rules 62-213.440(1), 62-213.430(6) and 62-4.040(1)(b), F.A.C.]

7. General Pollutant Emission Limiting Standards. Volatile Organic Compounds (VOC) Emissions or Organic Solvents (OS) Emissions. The permittee shall allow no person to store, pump, handle, process, load, unload or use in any process or installation, volatile organic compounds or organic solvents without applying known and existing vapor emission control devices or systems deemed necessary and ordered by the Department.

{Permitting Note: Nothing was deemed necessary and ordered at this time.}

[Rule 62-296.320(1)(a), F.A.C.]

8. Reasonable precautions to prevent emissions of unconfined particulate matter at this facility during operations include: chemical or water application to unpaved roads; unpaved yard areas, and storage piles; paving and maintenance of roads, parking areas and plant grounds; landscaping and planting of vegetation; confining abrasive blasting where possible; and other techniques, as necessary. Also, for the solid waste disposal area, wetting agents shall be applied.

[Rule 62-296.320(4)(c)2., F.A.C.]

9. When appropriate, any recording, monitoring, or reporting requirements that are time-specific shall be in accordance with the effective date of the permit, which defines day one.

[Rule 62-213.440, F.A.C.]

10. The permittee shall submit all compliance related notifications and reports required of this permit to the Department's Central District office at the following address:

Department of Environmental Protection
Central District Office
3319 Maguire Boulevard, Suite 232
Orlando, Florida 32803-3767
Telephone: 407/894-7555
Fax: 407/897-2966

11. Any reports, data, notifications, certifications, and requests required to be sent to the United States Environmental Protection Agency, Region 4, should be sent to:

United States Environmental Protection Agency
Region 4
Air, Pesticides & Toxics Management Division
Operating Permits Section
61 Forsyth Street
Atlanta, Georgia 30303
Telephone: 404/562-9155
Fax: 404/562-9163

12. Statement of Compliance. The annual statement of compliance pursuant to Rule 62-213.440(3)(a)2., F.A.C., shall be submitted to the Department and EPA within 60 (sixty) days after the end of the calendar year using DEP Form No. 62-213.900(7), F.A.C.

{Permitting Note: This condition implements the requirements of Rules 62-213.440(3)(a)2. & 3., F.A.C. (see Condition 51. of APPENDIX TV-4, TITLE V CONDITIONS)}

[Rules 62-213.440(3) and 62-213.900, F.A.C.]

13. Certification by Responsible Official (RO). In addition to the professional engineering certification required for applications by Rule 62-4.050(3), F.A.C., any application form, report, compliance statement, compliance plan and compliance schedule submitted pursuant to Chapter 62-213, F.A.C., shall contain a certification signed by a responsible official that, based on information and belief formed after reasonable inquiry, the statements and information in the document are true, accurate, and complete. Any responsible official who fails to submit any required information or who has submitted incorrect information shall, upon becoming aware of such failure or incorrect submittal, promptly submit such supplementary information or correct information.

[Rule 62-213.420(4), F.A.C.]

Miscellaneous

14. There shall be no discharges of liquid effluents or contaminated runoff to surface or ground water without approval from the Department.

[0950111-005-AV]

Section III. Emissions Units.

Subsection A. This section addresses the following emissions unit.

E.U. ID No./Facility ID No.	Brief Description
-088/CEP-1	GE LM 6000PC gas turbine (nominal 50 MW) operating in combined cycle mode with heat recovery steam generator and steam turbine electrical generator (nominal 8.5 MW)

Emissions Unit No. 088
<p><i>Description:</i> The emissions unit is a General Electric Model No. LM 6000PC gas turbine (nominal 50 MW) with heat recovery steam generator and steam turbine electrical generator (nominal 8.5 MW). The gas turbine includes SPRINT™ spray inter-cooling technology and inlet air chilling. Natural gas (SCC No. 2-01-002-01) is the primary fuel with distillate oil (SCC No. 2-01-001-01) as a restricted alternate fuel limited to no more than 475 hours per year. The permitted capacity is 505 MMBtu per hour of heat input from either fuel based on a compressor inlet air temperature of 30° F, 100% load, and the higher heating value of the fuel.</p> <p><i>Controls:</i> Water injection decreases flame temperatures to control emissions of nitrogen oxides (NOx). An oxidation catalyst minimizes emissions of carbon monoxide (CO) and volatile organic compounds (VOC).</p> <p><i>Monitors:</i> NOx emissions are monitored and recorded by a continuous emissions monitoring system (CEMS). The water-to-fuel ratio is also continuously monitored.</p> <p><i>Stack Parameters:</i> The exhaust stack is approximately 11.1 feet in diameter and 65 feet tall. Exhaust gas exits the stack at approximately 285° F with a volumetric flow rate of approximately 350,935 acfm based on a compressor inlet air temperature of 48° F, 100% load, and the inlet chiller operation.</p>

Station emergency power is provided by the Black Start Cummings No. 2 fuel oil fired emergency electric generator (which is exempt from permitting requirements: see Appendix I-1).

{Permitting Notes: The emissions unit is regulated under NSPS - 40 CFR 60, Subpart GG, Standards of Performance for Stationary Gas Turbines, and Subpart Db, Standards of Performance for Industrial-Commercial-Institutional Steam Generating Units, adopted and incorporated by reference in Rules 62-204.800(7)(b)38. & 62-204.800(7)(b)3., F.A.C., respectively; PSD-FL-014/014(A)/123, Prevention of Significant Deterioration (PSD), in Rule 62-212.400, F.A.C.; and 0950111-026-AC. For the combined cycle gas turbine and duct burner, 0950111-026-AC supersedes original Permit No. AC48-137740 (PSD-FL-123), which authorized initial construction. Commercial operation with the new gas turbine began in February 2006.}

The following specific conditions apply to the emissions unit listed above:

General

A.1. Definitions. For the purposes of Rule 62-204.800(7), F.A.C., the definitions contained in the various provisions of 40 CFR 60, shall apply except that the term "Administrator" when used in 40 CFR 60, shall mean the Secretary or the Secretary's designee.
[40 CFR 60.2; Rule 62-204.800(7)(a), F.A.C.]

A.2. Circumvention. No owner or operator subject to the provisions of 40 CFR 60 shall build, erect, install, or use any article, machine, equipment or process, the use of which conceals an emission which would otherwise constitute a violation of an applicable standard. Such concealment includes, but is not limited to, the use of gaseous diluents to achieve compliance with an opacity standard or with a standard which is based on the concentration of a pollutant in the gases discharged to the atmosphere.

[40 CFR 60.12]

A.3. Modifications. Except as provided under 40 CFR 60.14(e) and (f), any physical or operational change to an existing facility which results in an increase in the emission rate to the atmosphere of any pollutant to which a standard applies shall be considered a modification within the meaning of Section 11 of the Act. Upon modification, an existing facility shall become an affected facility for each pollutant to which a standard applies and for which there is an increase in the emission rate to the atmosphere.

[40 CFR 60.14(a)]

A.3.1. Water Injection. In accordance with the manufacturer's recommendations, the permittee shall tune, operate, and maintain a water injection system to reduce NOx emissions from the gas turbine to achieve the permitted NOx standards. The water injection system shall continuously monitor the water-to-fuel ratio.

[40 CFR 60 Subpart GG; and 0950111-026-AC, Specific Condition 5.]

Essential Potential to Emit (PTE) Parameters

A.4. Permitted Capacity. The maximum heat input rate to the gas turbine is 505 MMBtu per hour based on the higher heating value of each fuel, a compressor inlet temperature of 30° F, and full load operation.

[Rules 62-4.160(2) and 62-210.200(PTE), F.A.C.; 40 CFR 60.332(b); and 0950111-026-AC, Specific Condition 6.]

A.5. Emissions Unit Operating Rate Limitation After Testing. See Specific Condition A.36.

[Rule 62-297.310(2), F.A.C.]

A.6. Authorized Fuel. The gas turbine shall fire only the following fuels.

- a. *Natural Gas:* As the primary fuel, the gas turbine shall fire pipeline natural gas.
- b. *Distillate Oil:* As a restricted alternate fuel, the gas turbine may fire No. 2 distillate oil (or superior) with a maximum fuel sulfur content of no more than 0.1% sulfur by weight. Distillate oil firing shall not exceed 475 hours during any consecutive 12 months. Initial compliance with the fuel sulfur limit shall be demonstrated by taking a sample, analyzing the sample for fuel sulfur, and reporting the results to the Compliance Authority before initial startup on oil. Sampling the fuel oil sulfur content shall be conducted in accordance with ASTM D4057-88, Standard Practice for Manual Sampling of Petroleum and Petroleum Products, and one of the following test methods for sulfur in petroleum products: ASTM D129-91, ASTM D1552-90, ASTM D2622-94, or ASTM D4294-90 or other equivalent methods after approval of the Department. For each subsequent fuel delivery, the permittee shall maintain a permanent file of the certified fuel sulfur analysis from the fuel vendor. At the request of a Compliance Authority, the permittee shall perform additional sampling and analysis for the fuel sulfur content.

[Rules 62-4.070(3) and 62-210.200(PTE), F.A.C.; and 0950111-026-AC, Specific Condition 7.]

A.7. Hours of Operation. The hours of gas turbine operation are not limited (8760 hours per year). However, the gas turbine shall fire distillate oil for no more than 475 hours during any consecutive 12 months.

[Rules 62-4.070(3) and 62-210.200(PTE), F.A.C.; and 0950111-026-AC, Specific Condition 8.]

Emission Limitations and Standards

{Permitting Note: Unless otherwise specified, the averaging times for Specific Conditions Nos. A.8., A.9., and A.10. are based on the specified averaging time of the applicable test method.}

A.8. Nitrogen Oxides (NO_x). When firing natural gas, NO_x emissions shall not exceed 25 ppmvd @ 15% oxygen and 43.0 pounds per hour as determined by EPA Method 7E and 19 (or EPA Method 20) based on a 4-hour rolling average. When firing distillate oil, NO_x emissions shall not exceed 42 ppmvd @ 15% oxygen and 74.0 pounds per hour as determined by EPA Method 7E and 19 (or EPA Method 20) based on a 4-hour rolling average. Determination of the 4-hour rolling average shall be consistent with the requirements in NSPS Subpart GG.

[Rule 62-4.070(3), F.A.C.; and 0950111-026-AC, Specific Condition 10.]

A.9. Carbon Monoxide (CO). When firing natural gas, CO emissions shall not exceed 12.6 pounds per hour as determined by EPA Method 10 and 19 based on an average of three 1-hour test runs. When firing distillate oil, CO emissions shall not exceed 2.4 pounds per hour as determined by EPA Method 10 and 19 based on an average of three 1-hour test runs.

{Permitting Note: CO emissions are reduced by the oxidation catalyst. The above standards are equivalent to approximately 31.5 ppmvd @ 15% oxygen for gas firing and 2.3 ppmvd @ 15% oxygen for oil firing. The gas-firing standard is based on operation at only 25% load and a compressor inlet temperature of 30° F. When operating at loads greater than 40%, controlled CO emissions are expected to be 7.8 ppmvd @ 15% oxygen or less.}

[Rule 62-4.070(3), F.A.C.; and 0950111-026-AC, Specific Condition 9.]

A.10. Opacity. When firing natural gas, the stack exhaust opacity shall not exceed 5% based on a 6-minute average as determined by EPA Method 9 observations. When firing distillate oil, the stack exhaust opacity shall not exceed 10% based on a 6-minute average as determined by EPA Method 9 observations.

[Rule 62-4.070(3), F.A.C.; and 0950111-026-AC, Specific Condition 11.]

{Permitting Note: NESHAP Subpart YYYYY also establishes a formaldehyde standard; however, EPA has stayed the effectiveness of this rule until further notice. Emissions of particulate matter and volatile organic compounds are minimized by the firing of natural gas and distillate oil, which are readily combusted at high gas turbine temperatures. In addition, these fuels contain little ash. Emissions of volatile organic compounds are further reduced by the oxidation catalyst. Emissions of sulfur dioxide and sulfuric acid mist are also minimized by the use of natural gas and distillate oil, which contain only limited amounts of sulfur.}

Excess Emissions

{Permitting Note: The Excess Emissions Rule at Rule 62-210.700, F.A.C., cannot vary any requirement of an NSPS, NESHAP, or Acid Rain program provision.}

A.10.1. Definitions

- a. *Excess Emissions* are defined as emissions of pollutants in excess of those allowed by any applicable air pollution rule of the Department, or by a permit issued pursuant to any such rule or Chapter 62-4, F.A.C. The term applies only to conditions which occur during startup, shutdown, or malfunction.
- b. *Startup* is defined as the commencement of operation of any emissions unit which has shut down or ceased operation for a period of time sufficient to cause temperature, pressure, chemical or pollution control device imbalances, which result in excess emissions.
- c. *Shutdown* is the cessation of the operation of an emissions unit for any purpose.
- d. *Malfunction* is defined as any unavoidable mechanical and/or electrical failure of air pollution control equipment or process equipment or of a process resulting in operation in an abnormal or unusual manner.

[Rule 62-210.200, F.A.C; and 0950111-026-AC, Specific Condition 12.]

A.11. Startup, Shutdown, Malfunction

Excess emissions resulting from startup, shutdown or malfunction of any emissions unit shall be permitted providing: (1) best operational practices to minimize emissions are adhered to, and (2) the duration of excess emissions shall be minimized but in no case exceed two hours in any 24 hour period unless specifically authorized by the Department for longer duration. In case of excess emissions resulting from malfunctions, each owner or operator shall notify the Department or the appropriate Local Program in accordance with Rule 62-4.130, F.A.C. A written report summarizing each malfunction resulting in excess emissions shall be submitted in a quarterly report.

[Rule 62-210.700(1) and (6), F.A.C.; and 0950111-026-AC, Specific Condition 13.]

A.12. Prohibition

Excess emissions which are caused entirely or in part by poor maintenance, poor operation, or any other equipment or process failure which may reasonably be prevented during startup, shutdown, or malfunction shall be prohibited.

[Rule 62-210.700(4), F.A.C.; and 0950111-026-AC, Specific Condition 14.]

A.13. At all times, including periods of startup, shutdown, and malfunction, owners and operators shall, to the extent practicable, maintain and operate any affected facility including associated air pollution control equipment in a manner consistent with good air pollution control practice for minimizing emissions. Determination of whether acceptable operating and maintenance procedures are being used will be based on information available to the Administrator which may include, but is not limited to, monitoring results, opacity observations, review of operating and maintenance procedures, and inspection of the source.

[40 CFR 60.11(d)]

A.14. [Reserved.]

Monitoring of Operations including Continuous Monitoring Requirements

A.15. NOx CEMS. The permittee shall install, calibrate, maintain, and operate a continuous emissions monitoring system (CEMS) in the exhaust stack to measure and record NOx emissions and flue gas oxygen content in a manner sufficient to demonstrate compliance with the standards

specified in this permit. Emissions data shall be recorded by the CEMS at all times including periods such as startup, shutdown, and malfunction.

- a. *NOx Monitor Certification.* The NOx monitor shall be installed, certified, operated and maintained in accordance with the applicable requirements of 40 CFR Part 75. For purposes of determining compliance with the emission standards specified by this permit, missing data shall not be substituted. Determination of the 4-hour rolling average shall be consistent with the requirements in NSPS Subpart GG.
- b. *Oxygen Monitor Certification.* The oxygen monitor shall be installed, certified, operated and maintained in accordance with the applicable requirements of Performance Specification 3 in Appendix B of 40 CFR 60. The monitor shall comply with the applicable quality assurance procedures specified in Appendix F of 40 CFR 60.
- c. *Monitor Availability.* Monitor availability shall not be less than 95% in any calendar quarter. Within 30 days following each calendar quarter, the permittee shall submit a report to the Compliance Authority summarizing the monitor availability. In the event 95% availability is not achieved, the permittee shall include a supplemental report identifying the problems in achieving 95% availability and a plan of corrective actions that will be taken to achieve 95% availability. The permittee shall implement the reported corrective actions within the next calendar quarter. Failure to achieve 95% availability, in and of itself, is not necessarily a violation of this permit. Failure to take corrective actions or continued failure to achieve the minimum monitor availability shall be violations of this permit.
- d. *Data Collection.* The CEMS shall be designed and operated to sample, analyze, and record data evenly spaced over a 1-hour block. The CEMS shall be designed and operated to correct emissions to a dry basis. Each 1-hour emission average shall be computed using at least one data point in each fifteen minute quadrant of the 1-hour block during which the unit combusted fuel. Notwithstanding this requirement, each 1-hour emission average shall be computed from at least two data points separated by a minimum of 15 minutes. All valid measurements or data points collected during a 1-hour block shall be used to calculate the 1-hour emission averages.
- e. *Emissions Averages.* The emissions data shall be reduced to 1-hour emissions averages. Compliance with the NOx standards shall be demonstrated based on a 4-hour rolling average of the 1-hour emissions averages consistent with the requirements in NSPS Subpart GG. The NOx CEMS shall express 1-hour emission averages and 4-hour rolling averages in terms of "ppmvd corrected to 15% oxygen". An hour during which any amount of oil is fired shall be attributed to "oil firing". If an operational period includes both gas firing and oil firing, the 4-hour emissions standard shall be prorated based on the emissions standard for each fuel and the number of hours of firing attributed to each fuel. Upon a request from the Compliance Authority, the NOx emission rate shall be corrected to ISO conditions to demonstrate compliance with the applicable standards of 40 CFR 60.332.

For the purpose of recording one-hour NOx averages and four-hour rolling NOx averages in compliance with NSPS Subpart GG (40 CFR 60.332) emissions limits, all valid CEMS NOx emissions data shall be used.

For the purpose of recording one-hour NOx averages and four-hour rolling NOx averages in compliance with the limits of Specific Condition A.8., NOx average emissions shall be calculated to exclude periods of excess emissions due to startup/shutdown/malfunction (SU/SD/M), provided the permittee remains in compliance with the requirements of Specific Conditions A.10.1., A.11. and A.12. For the purpose of determining and

recording periods of excess emissions and calculating and recording NOx average emissions, the following procedures shall be used.

1. NOx emissions (including SU/SD/M) will be evaluated and recorded in 1-minute intervals.
2. NOx emissions data collected during periods of SU/SD/M (in 1-minute intervals, up to a total of 2 hours in a rolling 24-hour period) will be extracted prior to calculating hourly emission concentrations for determination of compliance with the 4-hour rolling average limit. Only data obtained during the described episode (startup, shutdown, or malfunction) may be excluded. These excluded periods will be identified and recorded as excess emissions (and attributed to SU/SD/M) if the averages of the excluded periods are above the rolling average limits for the particular fuel. This information will be reported in the Quarterly Excess Emissions Reports, along with the time, duration, and average NOx ppmvd, corrected to 15% O₂.
3. After the SU/SD/M periods have been extracted (in 1-minute intervals up to a total of 2 hours in a rolling 24-hour period), hourly averages will be calculated for determination of compliance with the NOx emission limit. A valid hourly average must have at least two valid data points at least 15 minutes apart (of non-excluded data); if there is insufficient data, the balance of the clock hour will be ignored.
4. Determination of the 4-hour rolling average period begins after the extraction of SU/SD/M data and are determined without regard to calendar days.

{Permitting Note: The term “in 1-minute intervals up to a total of 2 hours in a rolling 24-hour period” is intended to recognize the capabilities of the monitoring system to identify excess emissions for event-driven short term episodes. For example, electrical problems could cause the premature shutdown of water pumps on the NOx control system, which would be restarted by the operator. This might result in 10 minutes of excess emissions due to the malfunction, which could be extracted from the 4-hour compliance average up to a total of 2 hours in a rolling 24-hour period for SU/SD/M. Specifically, this term is not intended to allow the permittee to simply “cherry pick” periods of elevated emissions to extract from the compliance average.}

[Rules 62-4.070(3) and 62-297.520, F.A.C.; 40 CFR 75; and 0950111-026-AC, Specific Condition 20.]

A.16. CMS for Water-to-Fuel Ratio. Using operational data from the continuous monitoring system (CMS) for the water-to-fuel ratio and the NOx CEMS, the permittee shall document the water-to-fuel ratio necessary to comply with the permitted NOx standards throughout the range of operational loads. Data collected from the required NOx CEMS shall be used to demonstrate compliance with the emissions standards of this permit, including excess emissions with respect to the NSPS Subpart GG standards. However, in cases where the NOx data is invalid or unavailable, documentation of the water-to-fuel ratio shall be used to demonstrate proper operation of the NOx control system. Water-to-fuel ratio data shall only be used as a backup to data collected by the NOx CEMS.

[Rule 62-4.070(3), F.A.C.; 40 CFR 60 Subpart GG; and 0950111-026-AC, Specific Condition 21.]

A.17. [Reserved.]

A.18. The owner or operator of any stationary gas turbine subject to the provisions of 40 CFR 60, Subpart GG, and using water or steam injection to control NO_x emissions shall install, calibrate, maintain and operate a continuous monitoring system to monitor and record the fuel consumption and the ratio of water or steam to fuel being fired in the turbine.

[40 CFR 60.334(a)]

A.19. -- A.21. [Reserved.]

A.22. Determination of Process Variables.

(a) Required Equipment. The owner or operator of an emissions unit for which compliance tests are required shall install, operate, and maintain equipment or instruments necessary to determine process variables, such as process weight input or heat input, when such data are needed in conjunction with emissions data to determine the compliance of the emissions unit with applicable emission limiting standards.

(b) Accuracy of Equipment. Equipment or instruments used to directly or indirectly determine process variables, including devices such as belt scales, weight hoppers, flow meters, and tank scales, shall be calibrated and adjusted to indicate the true value of the parameter being measured with sufficient accuracy to allow the applicable process variable to be determined within 10% of its true value.

[Rule 62-297.310(5), F.A.C.]

Continuous Monitoring Requirements

A.23. For the purposes of 40 CFR 60.13, all continuous monitoring systems required under applicable subparts shall be subject to the provisions of 40 CFR 60.13 upon promulgation of performance specifications for continuous monitoring systems under Appendix B of 40 CFR 60 and, if the continuous monitoring system is used to demonstrate compliance with emission limits on a continuous basis, Appendix F of 40 CFR 60, unless otherwise specified in an applicable subpart or by the Administrator. Appendix F is applicable December 4, 1987.

[40 CFR 60.13(a)]

A.24. All continuous monitoring systems (CMS) or monitoring devices shall be installed such that representative measurements of emissions or process parameters from the affected facility are obtained. For CMS other than opacity, 1-hour averages shall be computed from four or more data points equally spaced over each 1-hour period. Data recorded during periods of CMS breakdowns, repairs, calibration checks, and zero span adjustments shall not be included in the data averages computed under this paragraph.

[40 CFR 60.13(f) and 60.13(h)]

Compliance Assurance Monitoring (CAM) Requirements

A.25. This emissions unit is subject to the CAM requirements contained in the attached Appendix CAM. Failure to adhere to the monitoring requirements specified does not necessarily indicate an exceedance of a specific emissions limitation; however, it may constitute good reason to require compliance testing pursuant to Rule 62-297.310(7)(b), F.A.C.

[40 CFR 64; and Rules 62-204.800 and 62-213.440(1)(b)1.a., F.A.C.]

Test Methods and Procedures

A.26. Test Methods. The following methods shall be used to determine emissions and demonstrate compliance with the standards specified in this permit. The methods are defined in Appendix A of 40 CFR 60 and are adopted by reference in Rule 62-204.800, F.A.C. Equivalent methods may only be used after written Department approval.

Method	Description of Method and Comments
1-4	Traverse Points, Velocity and Flow Rate, Gas Analysis, and Moisture Content <i>{Note: Use as necessary to support other methods.}</i>
7E	Determination of Nitrogen Oxide Emissions from Stationary Sources
9	Visual Determination of the Opacity of Emissions from Stationary Sources
10	Determination of Carbon Monoxide Emissions from Stationary Sources <i>{Note: The method shall be based on a continuous sampling train.}</i>
19	Determination of Sulfur Dioxide Removal Efficiency and Particulate Matter, Sulfur Dioxide, and Nitrogen Oxides Emission Rates <i>{Note: Optional F-factor method may be used to determine flow rate and gas analysis to calculate mass emissions in lieu of Methods 1-4. Use as necessary to support other methods.}</i>
20	Determination of Nitrogen Oxides, Sulfur Dioxide and Diluent Emissions from Stationary Gas Turbines

[Rules 62-204.800 and 62-297.100, F.A.C.; 40 CFR 60, Appendix A; and 0950111-026-AC, Specific Condition 16.]

A.26.1. Subsequent to the required initial testing, compliance with the NO_x standards shall be demonstrated by using CEMS data.
[0950111-026-AC, Specific Condition 17.]

A.27. Nitrogen Oxides. To compute the nitrogen oxides emissions, the owner or operator shall use analytical methods and procedures that are accurate to within 5 percent and are approved by the Department to determine the nitrogen content of the fuel being fired.
[40 CFR 60.335(a)]

A.28. Nitrogen Oxides. The owner or operator shall determine compliance with the nitrogen oxides NSPS standard in 40 CFR 60.332 as follows:

(1) The nitrogen oxides emission rate (NO_x) shall be computed for each run using the following equation:

$$NO_x = (NO_{xO}) (P_r/P_o)^{0.5} e^{19(H_o-0.00633)} (288^\circ K/T_a)^{1.53}$$

where:

NO_x = emission rate of NO_x at 15 percent O₂ and ISO standard ambient conditions, volume percent.

NO_{xO} = observed NO_x concentration, ppm by volume.

P_r = reference combustor inlet absolute pressure at 101.3 kilopascals ambient pressure, mm Hg.

P_o = observed combustor inlet absolute pressure at test, mm Hg.

H_o = observed humidity of ambient air, g H₂O/g air.

e = transcendental constant, 2.718.

T_a = ambient temperature, °K.

[40 CFR 60.335(b)(1)]

A.29. – A.30. [Reserved.]

A.31. Compliance with standards in 40 CFR 60, other than opacity standards, shall be determined by performance tests established by 40 CFR 60.8, unless otherwise specified in the applicable standard.

[40 CFR 60.11(a)]

A.32. Performance tests shall be conducted under such conditions as the Administrator shall specify to the plant operator based on representative performance of the affected facility. The owner or operator shall make available to the Administrator such records as may be necessary to determine the conditions of the performance tests. Operations during periods of startup, shutdown, and malfunction shall not constitute representative conditions for the purpose of a performance test nor shall emissions in excess of the level of the applicable emission limit during periods of startup, shutdown, and malfunction be considered a violation of the applicable emission limit unless otherwise specified in the applicable standard.

[40 CFR 60.8(c)]

A.33. The owner or operator shall provide, or cause to be provided, stack sampling and performance testing facilities as follows:

- (1) Sampling ports adequate for test methods applicable to such facilities.
- (2) Safe sampling platform(s).
- (3) Safe access to sampling platform(s).
- (4) Utilities for sampling and testing equipment.

[40 CFR 60.8(e)(1), (2), (3) & (4).]

A.34. Required Stack Sampling Facilities. When a mass emissions stack test is required, the permittee shall comply with the requirements contained in Appendix SS-1, Stack Sampling Facilities, attached to this permit.

[Rule 62-297.310(6), F.A.C.]

A.35. Required Number of Test Runs. For mass emission limitations, a compliance test shall consist of three complete and separate determinations of the total air pollutant emission rate through the test section of the stack or duct and three complete and separate determinations of any applicable process variables corresponding to the three distinct time periods during which the stack emission rate was measured provided, however, that three complete and separate determinations shall not be required if the process variables are not subject to variation during a compliance test, or if three determinations are not necessary in order to calculate the unit's emission rate. The three required test runs shall be completed within one consecutive five day period. In the event that a sample is lost or one of the three runs must be discontinued because of circumstances beyond the control of the owner or operator, and a valid third run cannot be obtained within the five day period allowed for the test, the Secretary or his or her designee may accept the results of the two complete runs as proof of compliance, provided that the arithmetic mean of the results of the two complete runs is at least 20 percent below the allowable emission limiting standards.

[Rule 62-297.310(1), F.A.C.]

A.36. Operating Rate During Testing. Testing of emissions shall be conducted with each emissions unit operation at permitted capacity, which is defined as 90 to 100 percent of the maximum operation rate allowed by the permit. If it is impracticable to test at permitted capacity, an emissions unit may be tested at less than the minimum permitted capacity; in this case, subsequent emissions unit operation is limited to 110 percent of the test load until a new test is conducted. Once the emissions unit is so limited, operation at higher capacities is allowed for no more than 15 consecutive days for the purpose of additional compliance testing to regain the authority to operate at the permitted capacity.

[Rules 62-297.310(2) & (2)(a), F.A.C.]

A.37. Calculation of Emission Rate. The indicated emission rate or concentration shall be the arithmetic average of the emission rate or concentration determined by each of the separate test runs unless otherwise specified in a particular test method or applicable rule.

[Rule 62-297.310(3), F.A.C.]

A.38. Applicable Test Procedures.

(a) Required Sampling Time.

1. Unless otherwise specified in the applicable rule, the required sampling time for each test run shall be no less than one hour and no greater than four hours, and the sampling time at each sampling point shall be of equal intervals of at least two minutes.

2. Opacity Compliance Tests. When either EPA Method 9 is specified as the applicable opacity test method, the required minimum period of observation for a compliance test shall be sixty (60) minutes for emissions units which emit or have the potential to emit 100 tons per year or more of particulate matter, and thirty (30) minutes for emissions units which have potential emissions less than 100 tons per year of particulate matter and are not subject to a multiple-valued opacity standard. The opacity test observation period shall include the period during which the highest opacity emissions can reasonably be expected to occur.

Exceptions to these requirements are as follows:

c. The minimum observation period for opacity tests conducted by employees or agents of the Department to verify the day-to-day continuing compliance of a unit or activity with an applicable opacity standard shall be twelve minutes.

(b) Minimum Sample Volume. Unless otherwise specified in the applicable rule, the minimum sample volume per run shall be 25 dry standard cubic feet.

(d) Calibration of Sampling Equipment. Calibration of the sampling train equipment shall be conducted in accordance with the schedule shown in Table 297.310-1 (attached).

[Rule 62-297.310(4), F.A.C.]

A.39. Frequency of Compliance Tests. The following provisions apply only to those emissions units that are subject to an emissions limiting standard for which compliance testing is required.

(a) General Compliance Testing.

3. The owner or operator of an emissions unit that is subject to any emission limiting standard shall conduct a compliance test that demonstrates compliance with the applicable emission limiting standard prior to obtaining a renewed operation permit. Emissions units that are required to conduct an annual compliance test may submit the most recent annual compliance test to satisfy the requirements of this provision. In renewing an air operation permit pursuant to Rule 62-210.300(2)(a)3.b., c., or d., F.A.C., the Department shall not require submission of emission compliance test results for any emissions unit that, during the year prior to renewal:

a. Did not operate; or,

b. In the case of a fuel burning emissions unit, burned liquid fuel for a total of no more than 400 hours.

4. During each federal fiscal year (October 1 - September 30), unless otherwise specified by rule, order, or permit, the owner or operator of each emissions unit shall have a formal compliance test conducted for:

- a. Visible emissions, if there is an applicable standard;
- b. Each of the following pollutants, if there is an applicable standard, and if the emissions unit emits or has the potential to emit: 5 tons per year or more of lead or lead compounds measured as elemental lead; 30 tons per year or more of acrylonitrile; or 100 tons per year or more of any other regulated air pollutant; and,
- c. Each NESHAP pollutant, if there is an applicable emission standard.

8. Any combustion turbine that does not operate for more than 400 hours per year shall conduct a visible emissions compliance test once per each five-year period, coinciding with the term of its air operation permit.

9. The owner or operator shall notify the Department, at least 15 days prior to the date on which each formal compliance test is to begin, of the date, time, and place of each such test, and the test contact person who will be responsible for coordinating and having such test conducted for the owner or operator.

(b) Special Compliance Tests. When the Department, after investigation, has good reason (such as complaints, increased visible emissions or questionable maintenance of control equipment) to believe that any applicable emission standard contained in a Department rule or in a permit issued pursuant to those rules is being violated, it may require the owner or operator of the emissions unit to conduct compliance tests which identify the nature and quantity of pollutant emissions from the emissions unit and to provide a report on the results of said tests to the Department.

(c) Waiver of Compliance Test Requirements. If the owner or operator of an emissions unit that is subject to a compliance test requirement demonstrates to the Department, pursuant to the procedure established in Rule 62-297.620, F.A.C., that the compliance of the emissions unit with an applicable weight emission limiting standard can be adequately determined by means other than the designated test procedure, such as specifying a surrogate standard of no visible emissions for particulate matter sources equipped with a bag house or specifying a fuel analysis for sulfur dioxide emissions, the Department shall waive the compliance test requirements for such emissions units and order that the alternate means of determining compliance be used, provided, however, the provisions of Rule 62-297.310(7)(b), F.A.C., shall apply. [Rule 62-297.310(7), F.A.C.; and SIP approved.]

A.40. By this permit, annual emissions compliance testing for visible emissions is not required for these emissions units while burning:

- a. only gaseous fuel(s); or,
- b. gaseous fuel(s) in combination with any amount of liquid fuel(s) for less than 400 hours per year; or,
- c. only liquid fuel(s) for less than 400 hours per year.

[Rule 62-297.310(7)(a)4., F.A.C.]

A.41. Annual Compliance Tests. During each federal fiscal year (October 1st to September 30th), the gas turbine shall be tested to demonstrate compliance with the CO and opacity standards specified in this permit.

{Permitting Note: No annual test for NOx is required because continuous compliance will be demonstrated by NOx CEMS data.}

[Rule and 62-297.310(7)(a)4, F.A.C.; and 0950111-026, Specific Condition 18.]

A.42. Test Reports. In addition to the information required by other specific conditions of this permit, each test report shall indicate the load rate (MW), heat input rate (MMBtu/hour), ambient

temperature (° F), compressor inlet temperature (° F), evaporating cooling or not, NOx emissions rate (ppmvd @ 15% oxygen and lb/hour), and the water-to-fuel ratio (lb water/lb fuel) for each test run.

[Rule 62-297.310(8), F.A.C.; and 0950111-026-AC, Specific Condition 19.]

Duct Burner Requirements

A.43. Duct Burner. The existing heat recovery steam generator (HRSG) includes a gas-fired duct burner system. After completion of the gas turbine replacement project, the duct burner shall be fired only in the “fresh air mode”, which is defined as duct firing without the gas turbine in operation. The duct burner is subject to the following requirements.

- a. The duct burner shall not operate when the combustion turbine is firing fuel. Exhaust gas from the duct burner will exit the gas turbine exhaust stack.
- b. The duct burner shall fire only natural gas (SCC No. 1-01-006-01). The maximum heat input rate is 198 MMBtu per hour, which is equivalent to approximately 190,000 cubic feet per hour based on the higher heating value of natural gas.
- c. The duct burner shall fire no more than 173,445 MMBtu per year of natural gas during any consecutive 12 months. *{Permitting Note: This condition restricts the annual capacity factor of the duct burner to less than 10%. Therefore, the duct burner is not subject to the NOx requirements of NSPS Subpart Db. There are no applicable NSPS Subpart Db emissions standards for the gas-fired duct burner.}*
- d. When firing the duct burner in fresh air mode, the stack opacity shall not exceed 5% based on EPA Method 9 observations.
- e. Due to the very restricted ability to operate this unit, no initial or periodic opacity tests are required. When the Department, after investigation, has good reason (such as complaints, increased visible emissions or questionable maintenance of control equipment) to believe that any applicable emission standard contained in a Department rule or in a permit issued pursuant to those rules is being violated, it shall require the owner or operator of the emissions unit to conduct compliance tests which identify the nature and quantity of pollutant emissions from the emissions unit and to provide a report on the results of said tests to the Department. [Rule 62-297.310(7)(b), F.A.C.]

{Permitting Note: With the upgraded gas turbine, duct firing no longer supports combined cycle operation. Duct firing will only be used as a backup for the gas turbine and hot water generator #3. In this mode, it is also necessary to circulate water and operate the steam turbine generator. Similarly, the duct burner could produce about 4 MW if there was a natural gas curtailment, a system power outage, or both. The electricity would be used for life and property preservation. The oxidation catalyst is operational during fresh air firing.}

[Rules 62-204.800 and 62-210.200(PTE), F.A.C.; 40 CFR 60.41b and 40 CFR 60.44b; and 0950111-026, Specific Condition 22.]

Recordkeeping and Reporting Requirements

A.44. To determine compliance with the oil firing heat input limitation, the permittee shall maintain daily records of fuel oil consumption and hourly usage for the turbine and the average heating value for the fuel oil. Average fuel oil heating rate shall be the calendar year annual average higher heating value of No. 2 fuel oil purchased for the permittee’s bulk fuel oil storage facility. All records shall be maintained for a minimum of five (5) years after the date of each record and shall be made available to representatives of the Department upon request.

[Rule 62-213.440, F.A.C.]

A.45. The owner or operator subject to the provisions of 40 CFR 60 shall furnish the Administrator written notification as follows:

(4) A notification of any physical or operational change to an existing facility which may increase the emission rate of any air pollutant to which a standard applies, unless that change is specifically exempted under an applicable subpart or in 40 CFR 60.14(e). This notice shall be postmarked 60 days or as soon as practicable before the change is commenced and shall include information describing the precise nature of the change, present and proposed emission control systems, productive capacity of the facility before and after the change, and the expected completion date of the change. The Administrator may request additional relevant information subsequent to this notice.

[40 CFR 60.7(a)(4)]

A.46. The owner or operator subject to the provisions of 40 CFR 60 shall maintain records of the occurrence and duration of any startup, shutdown, or malfunction in the operation of an affected facility; any malfunction of the air pollution control equipment; or, any periods during which a continuous monitoring system or monitoring device is inoperative.

[40 CFR 60.7(b)]

A.47. The owner or operator required to install a continuous monitoring system (CMS) or monitoring device shall submit an excess emissions and monitoring systems performance report and/or a summary report form [see 40 CFR 60.7(d)] to the Administrator semiannually, except when: more frequent reporting is specifically required by an applicable subpart; or, the CMS data are to be used directly for compliance determination, in which case quarterly reports shall be submitted; or, the Administrator, on a case-by-case basis, determines that more frequent reporting is necessary to accurately assess the compliance status of the source. All reports shall be postmarked by the 30th day following the end of each calendar half (or quarter, as appropriate). Written reports of excess emissions shall include the following information:

(2) Specific identification of each period of excess emissions that occurs during startups, shutdowns, and malfunctions of the affected facility. The nature and cause of any malfunction (if known), the corrective action taken or preventative measures adopted.

(3) The date and time identifying each period during which the continuous monitoring system was inoperative except for zero and span checks and the nature of the system repairs or adjustments.

(4) When no excess emissions have occurred or the continuous monitoring system(s) have not been inoperative, repaired, or adjusted, such information shall be stated in the report.

[40 CFR 60.7(c)(2), (3), & (4)]

A.48. The summary report form shall contain the information and be in the format shown in Figure 1 (attached) unless otherwise specified by the Administrator. One summary report form shall be submitted for each pollutant monitored at each affected facility.

(1) If the total duration of excess emissions for the reporting period is less than 1 percent of the total operating time for the reporting period and CMS downtime for the reporting period is less than 5 percent of the total operating time for the reporting period, only the summary report form shall be submitted and the excess emission report described in 40 CFR 60.7(c) need not be submitted unless requested by the Administrator.

(2) If the total duration of excess emissions for the reporting period is 1 percent or greater of the total operating time for the reporting period or the total CMS downtime for the reporting period is 5 percent or greater of the total operating time for the reporting period, the summary report form and the excess emission report described in 40 CFR 60.7(c) shall both be submitted.

[40 CFR 60.7(d)(1) & (2)]

{See attached Figure 1: Summary Report-Gaseous and Opacity Excess Emission and Monitoring System Performance} (electronic file name: figure1.doc)

A.49. (1) Notwithstanding the frequency of reporting requirements specified in 40 CFR 60.7(c), an owner or operator who is required by an applicable subpart to submit excess emissions and monitoring systems performance reports (and summary reports) on a quarterly (or more frequent) basis may reduce the frequency of reporting for that standard to semiannual if the following conditions are met:

- (i) For 1 full year (e.g., 4 quarterly or 12 monthly reporting periods) the affected facility's excess emissions and monitoring systems reports submitted to comply with a standard under this part continually demonstrate that the facility is in compliance with the applicable standard;
- (ii) The owner or operator continues to comply with all recordkeeping and monitoring requirements specified in 40 CFR 60, Subpart A, and the applicable standard; and,
- (iii) The Administrator does not object to a reduced frequency of reporting for the affected facility, as provided in 40 CFR 60.7(e)(2). The frequency of reporting of excess emissions and monitoring systems performance (and summary) reports may be reduced only after the owner or operator notifies the Administrator in writing of his or her intention to make such a change and the Administrator does not object to the intended change. In deciding whether to approve a reduced frequency of reporting, the Administrator may review information concerning the source's entire previous performance history during the required recordkeeping period prior to the intended change, including performance test results, monitoring data, and evaluations of an owner or operator's conformance with operation and maintenance requirements. Such information may be used by the Administrator to make a judgment about the source's potential for noncompliance in the future. If the Administrator disapproves the owner or operator's request to reduce the frequency of reporting, the Administrator will notify the owner or operator in writing within 45 days after receiving notice of the owner or operator's intention. The notification from the Administrator to the owner or operator will specify the grounds on which the disapproval is based. In the absence of a notice of disapproval within 45 days, approval is automatically granted.

(3) As soon as monitoring data indicate that the affected facility is not in compliance with any emission limitation or operating parameter specified in the applicable standard, the frequency of reporting shall revert to the frequency specified in the applicable standard, and the owner or operator shall submit an excess emissions and monitoring systems performance report (and summary report, if required) at the next appropriate reporting period following the noncomplying event. After demonstrating compliance with the applicable standard for another full year, the owner or operator may again request approval from the Administrator to reduce the frequency of reporting for that standard as provided for in 40 CFR 60.7(e)(1) & (e)(2).

[40 CFR 60.7(e)(1)]

A.50. The owner or operator subject to the provisions of 40 CFR 60 shall maintain a file of all measurements, including continuous monitoring system, monitoring device, and performance testing measurements; all continuous monitoring system performance evaluations; all continuous monitoring system or monitoring device calibration checks; adjustments and maintenance performed on these systems or devices; and, all other information required by 40 CFR 60 recorded in a permanent form suitable for inspection. The file shall be retained for at least 5 (five) years following the date of such measurements, maintenance, reports, and records.

[40 CFR 60.7(f); and, Rule 62-213.440(1)(b)2.b., F.A.C.]

A.51. [Reserved.]

A.52. Test Reports.

- (a) The owner or operator of an emissions unit for which a compliance test is required shall file a report with the Department on the results of each such test.
- (b) The required test report shall be filed with the Department as soon as practical but no later than 45 days after the last sampling run of each test is completed.
- (c) The test report shall provide sufficient detail on the emissions unit tested and the test procedures used to allow the Department to determine if the test was properly conducted and the test results properly computed. As a minimum, the test report, other than for an EPA Method 9 test, shall provide the following information:
 1. The type, location, and designation of the emissions unit tested.
 2. The facility at which the emissions unit is located.
 3. The owner or operator of the emissions unit.
 4. The normal type and amount of fuels used and materials processed, and the types and amounts of fuels used and material processed during each test run.
 5. The means, raw data and computations used to determine the amount of fuels used and materials processed, if necessary to determine compliance with an applicable emission limiting standard.
 6. The type of air pollution control devices installed on the emissions unit, their general condition, their normal operating parameters (pressure drops, total operating current and GPM scrubber water), and their operating parameters during each test run.
 7. A sketch of the duct within 8 stack diameters upstream and 2 stack diameters downstream of the sampling ports, including the distance to any upstream and downstream bends or other flow disturbances.
 8. The date, starting time and duration of each sampling run.
 9. The test procedures used, including any alternative procedures authorized pursuant to Rule 62-297.620, F.A.C. Where optional procedures are authorized in this chapter, indicate which option was used.
 10. The number of points sampled and configuration and location of the sampling plane.
 11. For each sampling point for each run, the dry gas meter reading, velocity head, pressure drop across the stack, temperatures, average meter temperatures and sample time per point.
 12. The type, manufacturer and configuration of the sampling equipment used.
 13. Data related to the required calibration of the test equipment.
 14. Data on the identification, processing and weights of all filters used.
 15. Data on the types and amounts of any chemical solutions used.
 16. Data on the amount of pollutant collected from each sampling probe, the filters, and the impingers, are reported separately for the compliance test.
 17. The names of individuals who furnished the process variable data, conducted the test, analyzed the samples and prepared the report.
 18. All measured and calculated data required to be determined by each applicable test procedure for each run.
 19. The detailed calculations for one run that relate the collected data to the calculated emission rate.
 20. The applicable emission standard, and the resulting maximum allowable emission rate for the emissions unit, plus the test result in the same form and unit of measure.
 21. A certification that, to the knowledge of the owner or his authorized agent, all data submitted are true and correct. When a compliance test is conducted for the Department or its agent, the person who conducts the test shall provide the certification with respect to the test procedures used. The owner or his authorized agent shall certify that all data required and provided to the person conducting the test are true and correct to his knowledge.

[Rules 62-213.440 and 62-297.310(8), F.A.C.]

A.53. Reports under 40 CFR 60.7(c) are required for periods of NO_x excess emissions, which are defined in Specific Condition A.10.1.
[40 CFR 60.334.]

A.54. [Reserved.]

A.55. HRSG. The owner or operator of an affected facility (HRSG) subject to the nitrogen oxides standards under 40 CFR 60.44b shall maintain records of the following information for each steam generating unit operating day:

(1) Calendar date.

[40 CFR 60.49b(g)(1)]

RECORDS

A.56. Monitoring of Operations. To demonstrate compliance with the gas turbine capacity requirements, the permittee shall monitor and record the operating rate of the gas turbine on a daily average basis, considering the number of hours of operation during each day (including the times of startup, shutdown and malfunction). Such monitoring shall be made using a monitoring component of the CEMS required above, or by monitoring daily rates of consumption and heat content of natural gas in accordance with the provisions of 40 CFR 75 Appendix D.

[Rules 62-4.070(3), F.A.C.; and 0950111-026-AC, Specific Condition 23.]

A.57. Operational Data. Within 10 days following each month, the permittee shall record the following information in a written log maintained on site: combustion turbine (MMcf of gas fired, hours of gas firing, gallons of oil fired, hours of oil firing, and hours of oil firing during last consecutive 12 months); and duct burner (hours of gas firing).

[Rule 62-4.070(3), F.A.C.; and 0950111-026-AC, Specific Condition 24.]

A.58. Catalyst Reports. Based on data collected during the calendar year, the permittee shall provide a report summarizing the present condition of the catalyst. The report shall be submitted along with the required Annual Operating Report.

[Rule 62-4.070(3), F.A.C.; and 0950111-026-AC, Specific Condition 25.]

A.59. Quarterly NO_x Report. Within 30 days following each calendar quarter, the permittee shall submit a report summarizing the following: NO_x monitor performance (downtime, availability, and a corrective plan if necessary; cause of each downtime; unusual maintenance or repair; and a summary of any RATA tests performed) and excess emissions (each 4-hour NO_x average in excess of the permitted NO_x standard in this permit; the number of startups, shutdowns, and malfunctions resulting in excess emissions; and the written report summarizing each malfunction resulting in excess emissions).

[Rules 62-4.070(3), 62-4.130, and 62-210.700(6), F.A.C.; and 0950111-026-AC, Specific Condition 26.]

Section III. Emissions Units.

Subsection B. This section addresses the following emissions units.

E.U./Facility I.D.	Brief Description	Manufacturer	Model
<u>North Service Area Laundry</u>			
-020/LBB-1a	Laundry Boiler #1	York-Shipley	300HP
-021/LBB-1b	Laundry Boiler #2	York-Shipley	300HP
-022/LBB-1c	Laundry Boiler #3	York-Shipley	350HP
<u>Disney's Boardwalk Resort</u>			
-090/BDW-1	Boiler	Cleaver Brooks	CBE-700-250
-090/BDW-2	Boiler	Cleaver Brooks	CBE-700-250

{Permitting Notes: The laundry boilers are subject to 40 CFR 60, Subpart Dc, Standards of Performance for Small Industrial-Commercial-Institutional Steam Generating Units; and, the other boilers are regulated under Rule 62-296.406, F.A.C., Fossil Fuel Steam Generators With Less Than 250 MMBtu Per Hour Heat Input.}

The following specific conditions apply to the emissions units listed above:

Essential Potential to Emit (PTE) Parameters

B.1. Permitted Capacity. The maximum operation rates are as follows:

E.U./Facility I.D.	Brief Description	Permitted Capacity
<u>North Service Area Laundry</u>		
		<u>MMBtu/hr Heat Input</u>
-020/LBB-1a	Laundry Boiler #1	39.6 (total: #1, #2 & #3)
-021/LBB-1b	Laundry Boiler #2	39.6 (total: #1, #2 & #3)
-022/LBB-1c	Laundry Boiler #3	39.6 (total: #1, #2 & #3)
<u>Disney's Boardwalk Resort</u>		
		<u>MMBtu/hr Heat Input</u>
-090/BDW-1	Boiler	10.46
-090/BDW-2	Boiler	10.46

{Permitting Note: The heat input limitation has been placed in the permit to identify the capacity of the emissions unit for purposes of confirming that emissions testing is conducted within 90-100 percent of the emissions unit's rated capacity (or to limit future operation to 110 percent of the test load), to establish appropriate limits and to aid in determining future rule applicability.}

[Rule 62-210.200(PTE); AC48-271849; and, 0950111-005-AV]

B.2. Emissions Unit Operating Rate Limitation After Testing. See specific condition **B.11.**

[Rule 62-297.310(2), F.A.C.; and, 0950111-005-AV]

B.3. Methods of Operation - Fuels. For the North Service Area Laundry and Disney's Boardwalk Resort boilers, the only fuel allowed to be fired is natural gas.

[Rules 62-296.406(2) & (3), F.A.C.; AC48-271849; and, 0950111-005-AV]

B.4. Hours of Operation. The emissions units may operate continuously, i.e., 8760 hours/year.

[Rule 62-210.200(PTE), F.A.C.; and, 0950111-005-AV]

Emission Limitations and Standards

{Permitting Note: Unless otherwise specified, the averaging time for Specific Condition **B.5.** is based on the specified averaging time of the applicable test method.}

B.5. Visible Emissions. See Specific Condition **B.10.**

- a. Visible emissions from each laundry boiler shall not exceed 5% opacity.
- b. Visible emissions from each Boardwalk Resort boiler shall not exceed 20% opacity, except for one 6-minute period per hour during which opacity shall not exceed 27%.
[Rules 62-296.406(1) and 62-296.320(4)(b)1., F.A.C.; AC48-271849; and, 0950111-005-AV]

B.6. Particulate Matter and Sulfur Dioxide. From the steam boilers, particulate matter and sulfur dioxide emissions shall be controlled by the firing of natural gas.

[Rule 62-296.406(2) & (3), F.A.C.; and, 0950111-005-AV]

Excess Emissions

{Permitting Note: The Excess Emissions Rule at Rule 62-210.700, F.A.C., cannot vary any requirement of an NSPS, NESHAP, or Acid Rain program provision.}

B.7. Excess emissions resulting from startup, shutdown or malfunction of any emissions unit shall be permitted provided that best operational practices to minimize emissions are adhered to and the duration of excess emissions shall be minimized but in no case exceed two hours in any 24 hour period unless specifically authorized by the Department for longer duration.

[Rule 62-210.700(1), F.A.C.]

B.8. Excess emissions which are caused entirely or in part by poor maintenance, poor operation, or any other equipment or process failure which may reasonably be prevented during startup, shutdown or malfunction shall be prohibited.

[Rule 62-210.700(4), F.A.C.]

Monitoring of Operations

B.9. Determination of Process Variables.

(a) Required Equipment. The owner or operator of an emissions unit for which compliance tests are required shall install, operate, and maintain equipment or instruments necessary to determine process variables, such as process weight input or heat input, when such data are needed in conjunction with emissions data to determine the compliance of the emissions unit with applicable emission limiting standards.

(b) Accuracy of Equipment. Equipment or instruments used to directly or indirectly determine process variables, including devices such as belt scales, weight hoppers, flow meters, and tank scales, shall be calibrated and adjusted to indicate the true value of the parameter being measured with sufficient accuracy to allow the applicable process variable to be determined within 10% of its true value.

[Rule 62-297.310(5), F.A.C.]

Test Methods and Procedures

B.10. Visible emissions. See specific condition **B.5.**

- a. For the laundry boilers, the diesel electric generators, and the Boardwalk Resort boilers, the test method shall be EPA Method 9, in accordance with Chapter 62-297, F.A.C.

- b. The visible emissions shall be conducted for 60-minutes for each boiler.
[Rules 62-213.440, 62-296.320(4)(b)4., and 62-297.401, F.A.C.; and, 0950111-005-AV]

B.11. Operating Rate During Testing. Testing of emissions shall be conducted with the emissions unit operation at permitted capacity, which is defined as 90 to 100 percent of the maximum operation rate allowed by the permit. If it is impracticable to test at permitted capacity, an emissions unit may be tested at less than the minimum permitted capacity; in this case, subsequent emissions unit operation is limited to 110 percent of the test load until a new test is conducted. Once the emissions unit is so limited, operation at higher capacities is allowed for no more than 15 consecutive days for the purpose of additional compliance testing to regain the authority to operate at the permitted capacity.

[Rules 62-297.310(2) & (2)(b), F.A.C.]

B.12. Applicable Test Procedures.

(a) Required Sampling Time.

2. Opacity Compliance Tests. When either EPA Method 9 or DEP Method 9 is specified as the applicable opacity test method, the required minimum period of observation for a compliance test shall be sixty (60) minutes for emissions units which emit or have the potential to emit 100 tons per year or more of particulate matter, and thirty (30) minutes for emissions units which have potential emissions less than 100 tons per year of particulate matter and are not subject to a multiple-valued opacity standard. The opacity test observation period shall include the period during which the highest opacity emissions can reasonably be expected to occur. Exceptions to these requirements are as follows:

- c. The minimum observation period for opacity tests conducted by employees or agents of the Department to verify the day-to-day continuing compliance of a unit or activity with an applicable opacity standard shall be twelve minutes.

[Rule 62-297.310(4)(a)2.c., F.A.C.]

B.13. Frequency of Compliance Tests. The following provisions apply only to those emissions units that are subject to an emissions limiting standard for which compliance testing is required.

(a) General Compliance Testing.

3. The owner or operator of an emissions unit that is subject to any emission limiting standard shall conduct a compliance test that demonstrates compliance with the applicable emission limiting standard prior to obtaining a renewed operation permit. Emissions units that are required to conduct an annual compliance test may submit the most recent annual compliance test to satisfy the requirements of this provision. In renewing an air operation permit pursuant to Rule 62-210.300(2)(a)3.b., c., or d., F.A.C., the Department shall not require submission of emission compliance test results for any emissions unit that, during the year prior to renewal:

- a. Did not operate; or
b. In the case of a fuel burning emissions unit, burned liquid fuel for a total of no more than 400 hours.

4. During each federal fiscal year (October 1 - September 30), unless otherwise specified by rule, order, or permit, the owner or operator of each emissions unit shall have a formal compliance test conducted for:

- a. Visible emissions, if there is an applicable standard (see specific condition **B.14.**);

9. The owner or operator shall notify the Department, at least 15 days prior to the date on which each formal compliance test is to begin, of the date, time, and place of each such test, and the test contact person who will be responsible for coordinating and having such test conducted for the owner or operator.

(b) Special Compliance Tests. When the Department, after investigation, has good reason (such as complaints, increased visible emissions or questionable maintenance of control equipment) to believe that any applicable emission standard contained in a Department rule or in a permit issued pursuant to those rules is being violated, it may require the owner or operator of the emissions unit to conduct compliance tests which identify the nature and quantity of pollutant emissions from the emissions unit and to provide a report on the results of said tests to the Department.

(c) Waiver of Compliance Test Requirements. If the owner or operator of an emissions unit that is subject to a compliance test requirement demonstrates to the Department, pursuant to the procedure established in Rule 62-297.620, F.A.C., that the compliance of the emissions unit with an applicable weight emission limiting standard can be adequately determined by means other than the designated test procedure, such as specifying a surrogate standard of no visible emissions for particulate matter sources equipped with a bag house or specifying a fuel analysis for sulfur dioxide emissions, the Department shall waive the compliance test requirements for such emissions units and order that the alternate means of determining compliance be used, provided, however, the provisions of Rule 62-297.310(7)(b), F.A.C., shall apply.
[Rule 62-297.310(7), F.A.C.; and, SIP approved]

B.14. By this permit, annual emissions compliance testing for visible emissions is not required for these emissions units while burning (see specific condition **B.13:(a)4.a.**):

- a. only gaseous fuel(s); or
- b. gaseous fuel(s) in combination with any amount of liquid fuel(s) for less than 400 hours per year; or
- c. only liquid fuel(s) for less than 400 hours per year.

[Rule 62-297.310(7)(a)4., F.A.C.]

Recordkeeping and Reporting Requirements

B.15. In the case of excess emissions resulting from malfunctions, each owner or operator shall notify the Department in accordance with Rule 62-4.130, F.A.C. A full written report on the malfunctions shall be submitted in a quarterly report, if requested by the Department.

[Rule 62-210.700(6), F.A.C.]

B.16. Test Reports.

(a) The owner or operator of an emissions unit for which a compliance test is required shall file a report with the Department on the results of each such test.

(b) The required test report shall be filed with the Department as soon as practical but no later than 45 days after the last sampling run of each test is completed.

[Rule 62-297.310(8), F.A.C.]

B.17. For each emissions unit, the permittee shall maintain a monthly log of the hours operated and the amount of fuel fired.

[Rules 62-4.070 and 62-213.440, F.A.C.; and, 0950111-005-AV]

B.18. The type of fuel and the heat input to each emissions unit shall be included on the visible emissions test report.

[Rule 62-213.440, F.A.C.; and, 0950111-005-AV]

B.19. The owner or operator of each affected emissions unit (laundry boilers) shall record and maintain records of the amounts of natural gas combusted during each day. The records shall be retained for a period of at least five years following the date of such record.

[40 CFR 60.48c(g) & (h); and, Rule 62-213.440, F.A.C.]

Section III. Emissions Units.

Subsection C. This section addresses the following emissions units.

E.U./Facility I.D.	Brief Description	Manufacturer	Model
<u>EPOCH Central Energy Plant</u>			
-079/(EPCOT DG-1)	Diesel Electric Generator #1 (2.5 MW)	Stewart & Stevenson	S-20-645-E4B
-080/(EPCOT DG-2)	Diesel Electric Generator #2 (2.5 MW)	Stewart & Stevenson	S-20-645-E4B

These emissions units are identical 3,600 horsepower large bore diesel engines, with each one equipped with a 2.5 megawatt generator, Model TBGZHJ. Each generator provides peak demand reduction and emergency standby power. Each emissions unit is permitted to fire new No. 2 distillate fuel oil only.

[Permitting Notes: The diesel electric generators were issued permits pursuant to Rule 62-210.300, Permits Required.]

The following specific conditions apply to the emissions units listed above:

Essential Potential to Emit (PTE) Parameters

C.1. Permitted Capacity. The maximum operation rates are as follows:

E.U./Facility I.D.	Brief Description	Permitted Capacity
<u>Reedy Creek Improvement District</u>		<u>megawatts/hr</u>
-079/(EPCOT DG-1)	Diesel Electric Generator #1 (2.5 MW)	2.5
-080/(EPCOT DG-2)	Diesel Electric Generator #2 (2.5 MW)	2.5

{Permitting Note: The megawatt limitation has been placed in the permit to identify the capacity of the emissions unit for purposes of confirming that emissions testing is conducted within 90-100 percent of the emissions unit's rated capacity (or to limit future operation to 110 percent of the test load), to establish appropriate limits and to aid in determining future rule applicability.}

[Rule 62-210.200(PTE), F.A.C.; and, 0950111-005-AV]

C.2. Emissions Unit Operating Rate Limitation After Testing. See specific condition **C.18.**

[Rule 62-297.310(2), F.A.C.]

C.3. Methods of Operation - Fuels. The only fuel allowed to be fired is new No. 2 distillate fuel oil.

[Rule 62-213.410, F.A.C.; and, 0950111-005-AV]

C.4. Hours of Operation. Each emissions unit is allowed to operate 1900 hrs/yr.

[Rule 62-210.200(PTE), F.A.C.; and, 0950111-005-AV]

Emission Limitations and Standards

{Permitting Note: Unless otherwise specified, the averaging times for Specific Conditions C.5. and C.6. are based on the specified averaging time of the applicable test method.}

C.5. Visible Emissions.

a. Visible emissions from each diesel electric generator shall be less than 20 percent opacity. [Rule 62-296.320(4)(b)1., F.A.C.; and, 0950111-016-AC]

C.6. The allowable pollutant emissions from each diesel electric generator shall not exceed the following:

Pollutant	lbs/hr	TPY
Particulate Matter	10.0	9.5
Sulfur Dioxide	14.5	14.0
Nitrogen Oxides	126.0	126.0
Carbon Monoxide	2.9	2.8
Volatile Organic Compounds	2.1	2.0

[0950111-005-AV]

C.7. Sulfur Dioxide - Sulfur Content. The sulfur content of the new No. 2 distillate fuel oil shall not exceed 0.5%, by weight. Firing low sulfur fuel oil negates the need to conduct any SO₂ mass tests. See Specific Conditions C.11. and C.15.

[0950111-005-AV]

Excess Emissions

C.8. Excess emissions resulting from startup, shutdown or malfunction of any emissions unit shall be permitted provided that best operational practices to minimize emissions are adhered to and the duration of excess emissions shall be minimized but in no case exceed two hours in any 24 hour period unless specifically authorized by the Department for longer duration.

[Rule 62-210.700(1), F.A.C.]

C.9. Excess emissions which are caused entirely or in part by poor maintenance, poor operation, or any other equipment or process failure which may reasonably be prevented during startup, shutdown or malfunction shall be prohibited.

[Rule 62-210.700(4), F.A.C.]

Monitoring of Operations

C.10. Determination of Process Variables.

(a) Required Equipment. The owner or operator of an emissions unit for which compliance tests are required shall install, operate, and maintain equipment or instruments necessary to determine process variables, such as process weight input or heat input, when such data are needed in conjunction with emissions data to determine the compliance of the emissions unit with applicable emission limiting standards.

(b) Accuracy of Equipment. Equipment or instruments used to directly or indirectly determine process variables, including devices such as belt scales, weight hoppers, flow meters, and tank scales, shall be calibrated and adjusted to indicate the true value of the parameter being measured with sufficient accuracy to allow the applicable process variable to be determined within 10% of its true value.

[Rule 62-297.310(5), F.A.C.]

C.11. Monitoring - Fuel Oil. The fuel oil shall be analyzed each time fuel oil is transferred to the storage tank. In lieu of conducting sampling and analysis at the time of each delivery of new fuel oil, the permittee can accept a fuel oil analysis from the vendor upon each delivery and the records shall be retained for a minimum of 5 years. See specific conditions **C.7.** and **C.15.**

[Rule 62-213.440, F.A.C.; and, 0950111-005-AV]

Test Methods and Procedures

C.12. Visible emissions.

a. For the diesel electric generators, the test method shall be EPA Method 9 in accordance with Chapter 62-297, F.A.C.

[Rules 62-296.320(4)(b)4. and 62-297.401, F.A.C.; and, 0950111-005-AV]

C.13. Particulate Matter. EPA Method 5 shall be used to demonstrate compliance with particulate matter emissions limit in accordance with Chapter 62-297, F.A.C., if the visible emissions are equal to or greater than 20% opacity. If a test is required, then a visible emissions test shall be conducted concurrently with each particulate matter emissions test.

[Rule 62-297.401, F.A.C.; and, 0950111-005-AV]

C.14. Nitrogen Oxides (NO_x). Annually, EPA Method 20 shall be used to demonstrate compliance with the NO_x emissions limit in accordance with Chapter 62-297, F.A.C. A visible emissions test shall be conducted concurrently with each NO_x emissions test.

[Rule 62-297.401, F.A.C.; and, 0950111-005-AV]

C.15. The fuel sulfur content, percent by weight, for liquid fuels shall be evaluated using either ASTM D2622-92, ASTM D4294-90, both ASTM D4057-88 and ASTM D129-91, or the latest edition. See specific conditions **C.7.** and **C.11.**

[Rules 62-213.440 and 62-297.440, F.A.C.; and, 0950111-005-AV]

C.16. Carbon Monoxide. The firing of low sulfur fuel oil and proper operation of the emissions units negates the need to conduct a mass emissions test for carbon monoxide.

[Rule 62-297.310(7), F.A.C.; and, 0950111-005-AV]

C.17. Volatile Organic Compounds. The firing of low sulfur fuel oil and proper operation of the emissions units negates the need to conduct a mass emissions test for volatile organic compounds.

[Rule 62-297.310(7), F.A.C.; and, 0950111-005-AV]

C.18. Operating Rate During Testing. Testing of emissions shall be conducted with the emissions unit operation at permitted capacity, which is defined as 90 to 100 percent of the maximum operation rate allowed by the permit. If it is impracticable to test at permitted capacity, an emissions unit may be tested at less than the minimum permitted capacity; in this case, subsequent emissions unit operation is limited to 110 percent of the test load until a new test is conducted. Once the emissions unit is so limited, operation at higher capacities is allowed for no more than 15 consecutive days for the purpose of additional compliance testing to regain the authority to operate at the permitted capacity.

[Rules 62-297.310(2) & (2)(b), F.A.C.]

C.19. Calculation of Emission Rate. The indicated emission rate or concentration shall be the arithmetic average of the emission rate or concentration determined by each of the separate test runs unless otherwise specified in a particular test method or applicable rule.

[Rule 62-297.310(3), F.A.C.]

C.20. Applicable Test Procedures.

(a) Required Sampling Time.

1. Unless otherwise specified in the applicable rule, the required sampling time for each test run shall be no less than one hour and no greater than four hours, and the sampling time at each sampling point shall be of equal intervals of at least two minutes.

2. Opacity Compliance Tests. When either EPA Method 9 or DEP Method 9 is specified as the applicable opacity test method, the required minimum period of observation for a compliance test shall be sixty (60) minutes for emissions units which emit or have the potential to emit 100 tons per year or more of particulate matter, and thirty (30) minutes for emissions units which have potential emissions less than 100 tons per year of particulate matter and are not subject to a multiple-valued opacity standard. The opacity test observation period shall include the period during which the highest opacity emissions can reasonably be expected to occur. Exceptions to these requirements are as follows:

c. The minimum observation period for opacity tests conducted by employees or agents of the Department to verify the day-to-day continuing compliance of a unit or activity with an applicable opacity standard shall be twelve minutes.

(b) Minimum Sample Volume. Unless otherwise specified in the applicable rule, the minimum sample volume per run shall be 25 dry standard cubic feet.

(c) Required Flow Rate Range. For EPA Method 5 particulate sampling, acid mist/sulfur dioxide, and fluoride sampling which uses Greenburg Smith type impingers, the sampling nozzle and sampling time shall be selected such that the average sampling rate will be between 0.5 and 1.0 actual cubic feet per minute, and the required minimum sampling volume will be obtained.

(d) Calibration of Sampling Equipment. Calibration of the sampling train equipment shall be conducted in accordance with the schedule shown in Table 297.310-1 (attached).

(e) Allowed Modification to EPA Method 5. When EPA Method 5 is required, the following modification is allowed: the heated filter may be separated from the impingers by a flexible tube.

[Rule 62-297.310(4), F.A.C.]

C.21. Required Stack Sampling Facilities. When a mass emissions stack test is required, the permittee shall comply with the requirements contained in Appendix SS-1, Stack Sampling Facilities, attached to this permit.

[Rule 62-297.310(6), F.A.C.]

C.22. Frequency of Compliance Tests. The following provisions apply only to those emissions units that are subject to an emissions limiting standard for which compliance testing is required.

(a) General Compliance Testing.

3. The owner or operator of an emissions unit that is subject to any emission limiting standard shall conduct a compliance test that demonstrates compliance with the applicable emission limiting standard prior to obtaining a renewed operation permit. Emissions units that are required to conduct an annual compliance test may submit the most recent annual compliance test to satisfy the requirements of this provision. In renewing an air operation permit pursuant to Rule 62-210.300(2)(a)3.b., c., or d., F.A.C., the Department shall not require submission of emission compliance test results for any emissions unit that, during the year prior to renewal:

- a. Did not operate; or
- b. In the case of a fuel burning emissions unit, burned liquid fuel for a total of no more than 400 hours.

4. During each federal fiscal year (October 1 - September 30), unless otherwise specified by rule, order, or permit, the owner or operator of each emissions unit shall have a formal compliance test conducted for:

- a. Visible emissions, if there is an applicable standard;
- b. Each of the following pollutants, if there is an applicable standard, and if the emissions unit emits or has the potential to emit: 5 tons per year or more of lead or lead compounds measured as elemental lead; 30 tons per year or more of acrylonitrile; or 100 tons per year or more of any other regulated air pollutant; and,
- c. Each NESHAP pollutant, if there is an applicable emission standard.

5. An annual compliance test for particulate matter emissions shall not be required for any fuel burning emissions unit that, in a federal fiscal year, does not burn liquid fuel, other than during startup, for a total of more than 400 hours.

9. The owner or operator shall notify the Department, at least 15 days prior to the date on which each formal compliance test is to begin, of the date, time, and place of each such test, and the test contact person who will be responsible for coordinating and having such test conducted for the owner or operator.

(b) Special Compliance Tests. When the Department, after investigation, has good reason (such as complaints, increased visible emissions or questionable maintenance of control equipment) to believe that any applicable emission standard contained in a Department rule or in a permit issued pursuant to those rules is being violated, it may require the owner or operator of the emissions unit to conduct compliance tests which identify the nature and quantity of pollutant emissions from the emissions unit and to provide a report on the results of said tests to the Department.

(c) Waiver of Compliance Test Requirements. If the owner or operator of an emissions unit that is subject to a compliance test requirement demonstrates to the Department, pursuant to the procedure established in Rule 62-297.620, F.A.C., that the compliance of the emissions unit with an applicable weight emission limiting standard can be adequately determined by means other than the designated test procedure, such as specifying a surrogate standard of no visible emissions for particulate matter sources equipped with a bag house or specifying a fuel analysis for sulfur dioxide emissions, the Department shall waive the compliance test requirements for such emissions units and order that the alternate means of determining compliance be used, provided, however, the provisions of Rule 62-297.310(7)(b), F.A.C., shall apply.

[Rule 62-297.310(7), F.A.C.; and, SIP approved]

C.23. Annual and permit renewal compliance testing for particulate matter emissions is not required for these emissions units while burning only liquid fuel(s) for less than 400 hours per year. See specific conditions **C.22.(a)3., 4., & 5.**
[Rules 62-297.310(7)(a)3. & 5., F.A.C.; and, ASP Number 97-B-01.]

Record keeping and Reporting Requirements

C.24. In the case of excess emissions resulting from malfunctions, each owner or operator shall notify the Department in accordance with Rule 62-4.130, F.A.C. A full written report on the malfunctions shall be submitted in a quarterly report, if requested by the Department.
[Rule 62-210.700(6), F.A.C.]

C.25. Test Reports.

- (a) The owner or operator of an emissions unit for which a compliance test is required shall file a report with the Department on the results of each such test.
- (b) The required test report shall be filed with the Department as soon as practical but no later than 45 days after the last sampling run of each test is completed.
- (c) The test report shall provide sufficient detail on the emissions unit tested and the test procedures used to allow the Department to determine if the test was properly conducted and the test results properly computed. As a minimum, the test report, other than for an EPA Method 9 test, shall provide the following information:
1. The type, location, and designation of the emissions unit tested.
 2. The facility at which the emissions unit is located.
 3. The owner or operator of the emissions unit.
 4. The normal type and amount of fuels used and materials processed, and the types and amounts of fuels used and material processed during each test run.
 5. The means, raw data and computations used to determine the amount of fuels used and materials processed, if necessary to determine compliance with an applicable emission limiting standard.
 6. The type of air pollution control devices installed on the emissions unit, their general condition, their normal operating parameters (pressure drops, total operating current and GPM scrubber water), and their operating parameters during each test run.
 7. A sketch of the duct within 8 stack diameters upstream and 2 stack diameters downstream of the sampling ports, including the distance to any upstream and downstream bends or other flow disturbances.
 8. The date, starting time and duration of each sampling run.
 9. The test procedures used, including any alternative procedures authorized pursuant to Rule 62-297.620, F.A.C. Where optional procedures are authorized in this chapter, indicate which option was used.
 10. The number of points sampled and configuration and location of the sampling plane.
 11. For each sampling point for each run, the dry gas meter reading, velocity head, pressure drop across the stack, temperatures, average meter temperatures and sample time per point.
 12. The type, manufacturer and configuration of the sampling equipment used.
 13. Data related to the required calibration of the test equipment.
 14. Data on the identification, processing and weights of all filters used.
 15. Data on the types and amounts of any chemical solutions used.
 16. Data on the amount of pollutant collected from each sampling probe, the filters, and the impingers, are reported separately for the compliance test.

17. The names of individuals who furnished the process variable data, conducted the test, analyzed the samples and prepared the report.

18. All measured and calculated data required to be determined by each applicable test procedure for each run.

19. The detailed calculations for one run that relate the collected data to the calculated emission rate.

20. The applicable emission standard, and the resulting maximum allowable emission rate for the emissions unit, plus the test result in the same form and unit of measure.

21. A certification that, to the knowledge of the owner or his authorized agent, all data submitted are true and correct. When a compliance test is conducted for the Department or its agent, the person who conducts the test shall provide the certification with respect to the test procedures used. The owner or his authorized agent shall certify that all data required and provided to the person conducting the test are true and correct to his knowledge.

[Rule 62-297.310(8), F.A.C.]

C.26. For each emissions unit, the permittee shall maintain a log of the hours operated and the amount of fuel fired.

[Rules 62-4.070 and 62-213.440, F.A.C.]

C.27. The amount of fuel fired and the megawatt output from each emissions unit shall be included on the visible emissions test report.

[Rule 62-213.440, F.A.C.; and, 0950111-016-AC]

Section III. Emissions Unit(s) and Conditions.

Subsection D. This section addresses the following emissions unit.

E.U./Facility I.D.	Brief Description	Manufacturer
<u>North Service Area Dry Cleaning Plant</u>		
-001/(LDC-1)	Dry Cleaning Unit #1	Multimatic Machine

There is one perchloroethylene dry cleaning unit (#1). #1 is a Multimatic Atlas 45. The perchloroethylene dry cleaning unit is vented to a single exhaust stack with precleaning provided by a new chiller system followed by and in series with an existing carbon absorption system (a American Laundry Machinery, Inc.: Model PC 212 activated carbon vapor adsorber). The permittee recently upgraded the existing control system by installing a chiller system, which reduced the potential perchloroethylene emissions (1.5 TPY to 0.5 TPY) and load on the existing carbon absorption system.

{Permitting Note(s): The perchloroethylene dry cleaning operation is subject to 40 CFR 63, Subpart M, National Perchloroethylene Air Emission Standards for Dry Cleaning Facilities.}

The following specific conditions apply to the emissions units listed above:

Standards

D.1. The permittee of each existing dry cleaning system shall comply with either 40 CFR 63.322(a)(1) or (a)(2).

(1) Route the air-perchloroethylene gas-vapor stream contained within each dry cleaning machine through a refrigerated condenser or an equivalent control device.

(2) Route the air-perchloroethylene gas-vapor stream contained within each dry cleaning machine through a carbon adsorber installed in the dry cleaning machine prior to September 22, 1993.

[40 CFR 63.322(a)(1) & (2)]

D.2. The permittee shall close the door of each dry cleaning machine immediately after transferring articles to or from the machine, and shall keep the door closed at all other times.

[40 CFR 63.322(c)]

D.3. The permittee of each dry cleaning system shall operate and maintain the system according to the manufacturers' specifications and recommendations.

[40 CFR 63.322(d)]

D.4. Each refrigerated condenser used for the purposes of complying with 40 CFR 63.322(a) or (b) and installed on a dry-to-dry machine, dryer, or reclaimer:

- (1) Shall be operated to not vent or release the air-perchloroethylene gas-vapor stream contained within the dry cleaning machine to the atmosphere while the dry cleaning machine drum is rotating;
 - (2) Shall be monitored according to 40 CFR 63.323(a)(1); and
 - (3) Shall be operated with a diverter valve, which prevents air drawn into the dry cleaning machine when the door of the machine is open from passing through the refrigerated condenser.
- [40 CFR 63.322(e)(1), (2), & (3)]

D.5. Each refrigerated condenser used for the purpose of complying with 40 CFR 63.322(a) and installed on a washer:

- (1) Shall be operated to not vent the air-perchloroethylene gas-vapor contained within the washer to the atmosphere until the washer door is opened;
 - (2) Shall be monitored according to 40 CFR 63.323(a)(2).
- [40 CFR 63.322(f)(1) & (2)]

D.6. Each carbon adsorber used for the purposes of complying with 40 CFR 63.322(a) or (b):

- (1) Shall not be bypassed to vent or release any air-perchloroethylene gas-vapor stream to the atmosphere at any time; and
 - (2) Shall be monitored according to the applicable requirements in 40 CFR 63.323(b) or (c).
- [40 CFR 63.322(g)(1) & (2)]

D.7. The permittee of an affected facility shall store all perchloroethylene and wastes that contain perchloroethylene in solvent tanks or solvent containers with no perceptible leaks.

[40 CFR 63.322(j)]

D.8. The permittee of a dry cleaning system shall inspect the following components weekly for perceptible leaks while the dry cleaning system is operating:

- (1) Hose and pipe connections, fittings, couplings, and valves;
- (2) Door gaskets and seatings;
- (3) Filter gaskets and seatings;
- (4) Pumps;
- (5) Solvent tanks and containers;
- (6) Water separators;
- (7) Muck cookers;
- (8) Stills;
- (9) Exhaust dampers;
- (10) Diverter valves; and
- (11) Cartridge filter housings.

[40 CFR 63.322(k)(1) thru (11)]

D.9. The permittee of a dry cleaning system shall repair all perceptible leaks detected under 40 CFR 63.322(k) within 24 hours. If repair parts must be ordered, either a written or verbal order for those parts shall be initiated within 2 working days of detecting such a leak. Such repair parts shall be installed within 5 working days after receipt.

[40 CFR 63.322(m)]

D.10. If parameter values monitored under 40 CFR 63.322(e), (f), or (g), do not meet the values specified in 40 CFR 63.323(a), (b), or (c), adjustments or repairs shall be made to the dry cleaning system or control device to meet those values. If repair parts must be ordered, either a written or verbal order for such parts shall be initiated within 2 working days of detecting such a parameter value. Such repair parts shall be installed within 5 working days after receipt.
[40 CFR 63.322(n)]

Test Methods and Monitoring

D.11. When a refrigerated condenser is used to comply with 40 CFR 63.322(a)(1) or (b)(1):

(1) The permittee shall measure the temperature of the air-perchloroethylene gas-vapor stream on the outlet side of the refrigerated condenser on a dry-to-dry machine, dryer, or reclaimer weekly with a temperature sensor to determine if it is equal to or less than 7.2° C (45° F). The temperature sensor shall be used according to the manufacturer's instructions and shall be designed to measure a temperature of 7.2° C (45° F) to an accuracy of $\pm 1.1^{\circ}$ C ($\pm 2^{\circ}$ F).

(2) The permittee shall calculate the difference between the temperature of the air-perchloroethylene gas-vapor stream entering the refrigerated condenser on a washer and the temperature of the air-perchloroethylene gas-vapor stream exiting the refrigerated condenser on the washer weekly to determine that the difference is greater than or equal to 11.1° C (20° F).

(i) Measurements of the inlet and outlet streams shall be made with a temperature sensor.

Each temperature sensor shall be used according to the manufacturer's instructions, and designed to measure at least a temperature range from 0° C (32° F) to 48.9° C (120° F) to an accuracy of $\pm 1.1^{\circ}$ C ($\pm 2^{\circ}$ F).

(ii) The difference between the inlet and outlet temperatures shall be calculated weekly from the measured values.

[40 CFR 63.323(a)(1) & (2)]

D.12. When a carbon adsorber is used to comply with 40 CFR 63.322(a)(2) or exhaust is passed through a carbon adsorber immediately upon machine door opening to comply with 40 CFR 63.322(b)(3), the permittee shall measure the concentration of perchloroethylene in the exhaust of the carbon adsorber weekly with a colorimetric detector tube, while the dry cleaning machine is venting to that carbon adsorber at the end of the last dry cleaning cycle prior to desorption of that carbon adsorber to determine that the perchloroethylene concentration in the exhaust is equal to or less than 100 parts per million by volume. The permittee shall:

(1) Use a colorimetric detector tube designed to measure a concentration of 100 parts per million by volume of perchloroethylene in air to an accuracy of ± 25 parts per million by volume; and

(2) Use the colorimetric detector tube according to the manufacturer's instructions; and

(3) Provide a sampling port for monitoring within the exhaust outlet of the carbon adsorber that is easily accessible and located at least 8 stack or duct diameters downstream from any flow disturbance such as a bend, expansion, contraction, or outlet; downstream from no other inlet; and 2 stack or duct diameters upstream from any flow disturbance such as a bend, expansion, contraction, inlet, or outlet.

[40 CFR 63.323(b)(1), (2) & (3)]

D.13. If the air-perchloroethylene gas-vapor stream is passed through a carbon adsorber prior to machine door opening to comply with 40 CFR 63.322(b)(3), the permittee of an affected facility shall measure the concentration of perchloroethylene in the dry cleaning machine drum at the end of the dry cleaning cycle weekly with a colorimetric detector tube to determine that the perchloroethylene concentration is equal to or less than 300 parts per million by volume. The permittee shall:

- (1) Use a colorimetric detector tube designed to measure a concentration of 300 parts per million by volume of perchloroethylene in air to an accuracy of ± 75 parts per million by volume; and
- (2) Use the colorimetric detector tube according to the manufacturer's instructions; and
- (3) Conduct the weekly monitoring by inserting the colorimetric detector tube into the open space above the articles at the rear of the dry cleaning machine drum immediately upon opening the dry cleaning machine door.

[40 CFR 63.323(c)(1), (2) & (3)]

D.14. When calculating yearly perchloroethylene consumption for the purpose of demonstrating applicability according to 40 CFR 63.320, the permittee shall perform the following calculation on the first day of every month:

- (1) Sum the volume of all perchloroethylene purchases made in each of the previous 12 months, as recorded in the log described in 40 CFR 63.324(d)(1).
- (2) If no perchloroethylene purchases were made in a given month, then the perchloroethylene consumption for that month is zero gallons.
- (3) The total sum calculated in 40 CFR 63.323(d) is the yearly perchloroethylene consumption at the facility.

[40 CFR 63.323(d)(1), (2) & (3)]

Recordkeeping and Reporting Requirements

D.15. Each permittee of a dry cleaning facility shall submit an initial report signed by a responsible official before a notary public certifying that the information provided in the initial report is accurate and true to the Permitting authority within 90 calendar days after September 22, 1993, which includes the following:

- (1) The name and address of the permittee;
- (2) The address (that is, physical location) of the dry cleaning facility;
- (3) A brief description of the type of each dry cleaning machine at the dry cleaning facility;
- (4) Documentation as described in 40 CFR 63.323(d) of the yearly perchloroethylene consumption at the dry cleaning facility for the previous year to demonstrate applicability according to 40 CFR 63.320; or an estimation of perchloroethylene consumption for the previous year to estimate applicability with 40 CFR 63.320; and
- (5) A description of the type of control device(s) that will be used to achieve compliance with 40 CFR 63.322(a) or (b) and whether the control device(s) is currently in use or will be purchased.
- (6) Documentation to demonstrate to the Permitting authority's satisfaction that each room enclosure used to meet the requirements of 40 CFR 63.322(a)(3) meets the requirements of 40 CFR 63.322(a)(3)(i) and (ii).

[40 CFR 63.324(a)(1) thru (6)]

D.16. Each permittee of a dry cleaning facility shall submit a statement signed by a responsible official in the presence of a notary public to the Permitting authority by registered letter on or before the 30th day following the compliance dates specified in 40 CFR 63.320(b) or (c), certifying the following:

- (1) The yearly perchloroethylene solvent consumption limit based upon the yearly solvent consumption calculated according to 40 CFR 63.323(d);
 - (2) Whether or not they are in compliance with each applicable requirement of 40 CFR 63.322; and
 - (3) All information contained in the statement is accurate and true.
- [40 CFR 63.324(b)(1), (2) & (3)]

D.17. Each permittee of a dry cleaning facility shall keep receipts of perchloroethylene purchases and a log of the following information and maintain such information on site and show it upon request for a period of 5 years:

- (1) The volume of perchloroethylene purchased each month by the dry cleaning facility as recorded from perchloroethylene purchases; if no perchloroethylene is purchased during a given month then the permittee would enter zero gallons into the log;
 - (2) The calculation and result of the yearly perchloroethylene consumption determined on the first day of each month as specified in 40 CFR 63.323(d);
 - (3) The dates when the dry cleaning system components are inspected for perceptible leaks, as specified in 40 CFR 63.322(k) or (l), and the name or location of dry cleaning system components where perceptible leaks are detected;
 - (4) The dates of repair and records of written or verbal orders for repair parts to demonstrate compliance with 40 CFR 63.322(m) and (n);
 - (5) The date and temperature sensor monitoring results, as specified in 40 CFR 63.323 if a refrigerated condenser is used to comply with 40 CFR 63.322(a) or (b); and
 - (6) The date and colorimetric detector tube monitoring results, as specified in 40 CFR 63.323, if a carbon adsorber is used to comply with 40 CFR 63.322(a)(2) or (b)(3).
- [40 CFR 63.324(d)(1) thru (6)]

D.18. Each permittee of a dry cleaning facility shall retain on-site a copy of the design specifications and the operating manuals for each dry cleaning system and each emission control device located at the dry cleaning facility.

[40 CFR 63.324(e)]

Section III. Emissions Unit(s) and Conditions.

Subsection E. This section addresses the following emissions unit.

E.U. ID No./Facility ID No.	Brief Description
-112/DAK-1	Disney's Animal Kingdom Animal Crematory: Necropsy Building

This emissions unit is an animal crematory, a Crawford Model CD800 Animal Carcass Incinerator, located at Disney's Animal Kingdom, specifically at the Necropsy Building.

{Permitting Notes: This emissions unit is subject to the permitting requirements of Rule 62-296.401(1), F.A.C., Incinerators with a Charging Rate Less Than 50 Tons Per Day.}

Essential Potential to Emit (PTE) Parameters

E.1. Permitted Capacity.

- a. The emissions unit's processing capacity shall not exceed 800 lbs per four-hour period (equivalent to 200 lbs/hr); and,
- b. The emissions unit's maximum heat input shall not exceed 3.0 MMBtu/hr while firing only natural gas.

[Rules 62-4.070, 62-4.160(2), 62-296.401(1), and 62-297.310(2)(b), F.A.C.]

E.2. Emissions Unit Operating Rate Limitation After Testing. See specific condition **E.28.**

[Rule 62-297.310(2), F.A.C.]

E.3. Hours of operation. The emissions unit is allowed to operate continuously, i.e., 8760 hours per year.

[Rule 62-21.200, Definitions - Potential to Emit (PTE), F.A.C.]

E.4. Methods of Operation - Fuels. The only fuel authorized to be burned is natural gas.

[Rules 62-4.160(2) and 62-210.200 (PTE), F.A.C.]

Emission Limitations and Standards

{Permitting Note: Unless otherwise specified, the averaging times for Specific Conditions E.5. thru E.7. are based on the specified averaging time of the applicable test method.}

E.5. Visible emissions. No visible emissions (5 percent opacity) except that visible emissions not exceeding 20 percent opacity are allowed for up to three minutes in any one-hour period.

[Rule 62-296.401(1)(a), F.A.C.]

E.6. Particulate matter. Particulate matter emissions shall not exceed 0.080 grains per dry standard cubic foot of flue gas, corrected to 7% O₂.

[Rule 62-296.401(6)(a), F.A.C.]

E.7. Carbon monoxide. Carbon monoxide (CO) emissions shall not exceed 100 parts per million by volume (ppmv), dry basis, corrected to 7% O₂ on an hourly average basis.

[Rule 62-296.401(6)(b), F.A.C.]

E.8. Operation Residence Time and Temperature(s). The design of the secondary chamber combustion zone shall be such that it has a minimum residence time of 1.0 seconds at 1800 degrees Fahrenheit (°F). The actual operating temperature of the secondary chamber combustion zone shall be no less than 1600 °F throughout the combustion process in the primary chamber. Cremation in the primary chamber shall not begin unless the secondary chamber combustion zone temperature is equal to or greater than 1600 °F.

[Rule 62-296.401(6)(c), F.A.C.]

Excess Emissions

E.9. Excess emissions resulting from startup, shutdown or malfunction of any emissions unit shall be permitted provided that best operational practices to minimize emissions are adhered to and the duration of excess emissions shall be minimized but in no case exceed two hours in any 24-hour period unless specifically authorized by the Department for longer duration.

[Rule 62-210.700(1), F.A.C.]

E.10. Excess emissions which are caused entirely or in part by poor maintenance, poor operation, or any other equipment or process failure which may reasonably be prevented during startup, shutdown or malfunction shall be prohibited.

[Rule 62-210.700(4), F.A.C.]

Operations

E.11. This emissions unit is permitted to incinerate only dead animals and, if applicable, the bedding and the remains associated with the animals placed in leak-proof containers. Containers may contain up to 0.5 percent by weight chlorinated plastics. Plastic bags used for the incineration of animals shall be nonchlorinated and no less than 3 mils thick. If containers are incinerated, documentation from the manufacturers certifying that they are composed of 0.5 percent or less by weight chlorinated plastics must be kept on-file at the site for the duration of their use and for at least five years after their use. This documentation must also be submitted with any application for renewal air operation permit.

[Rules 62-213.440 and 296.401(6)(e), F.A.C.]

E.12. This emissions unit is not permitted to cremate dead animals which were used for medical or commercial experimentation. No other material, including biomedical waste* as defined in Rule 62-210.200, F.A.C. (see below), shall be incinerated.

* "**Biomedical Waste**": Any solid waste or liquid waste which may present a threat of infection to humans, including nonliquid tissue, body parts, blood, blood products, and body fluids from humans and other primates; laboratory and veterinary wastes which contain human disease-causing agents; and, discarded sharps. The following are also included:

(a) Used absorbent materials saturated with blood, blood products, body fluids, or excretions or secretions contaminated with visible blood; and, absorbent materials saturated with blood or blood products that have dried.

(b) Non-absorbent, disposable devices that have been contaminated with blood, body fluids, or secretions or excretions visibly contaminated with blood, but have not been treated by a method listed in Section 381.0098, F.S., or a method approved pursuant to Rule 64E-16, F.A.C.

[Rules 62-296.401(6)(f) and 62-210.200, F.A.C.]

Training

E.13. Operators of the incinerator shall be trained by the equipment manufacturer's representatives or an equivalent state-approved organization. The content of the training program shall be submitted to the Department of Environmental Protection's Bureau of Air Regulation for approval. [Rule 62-296.401(6)(g), F.A.C.]

E.14. The content of the training program shall be submitted to the Department for approval through the permitting process and shall meet, at a minimum, the criteria applicable to cremation set forth in the EPA Medical Waste Incinerator Operator Training Program Course Handbook, EPA 453/B-93-018, and Instructor's Guide, EPA 453/B-93-019. [Rule 62-296.401(6)(g)1., F.A.C.]

E.15. A copy of the training certificate for each operator having satisfactorily completed the Department-approved training program must be submitted to the Department within 15 days of training. The owner of any new crematory units shall submit copies of the operator certificates within 15 days after completion of the initial compliance test pursuant to the unit's construction permit. [Rule 62-296.401(6)(g)2., F.A.C.]

E.16. An operator's certificate must be kept on file at the facility for the duration of the operator's employment and for an additional five years after termination of employment. [Rules 62-213.440 and 62-296.401(6)(g)3., F.A.C.]

Monitoring of Operations

E.17. Determination of Process Variables.

(a) **Required Equipment.** The owner or operator of an emissions unit for which compliance tests are required shall install, operate, and maintain equipment or instruments necessary to determine process variables, such as process weight input or heat input, when such data are needed in conjunction with emissions data to determine the compliance of the emissions unit with applicable emission limiting standards.

(b) **Accuracy of Equipment.** Equipment or instruments used to directly or indirectly determine process variables, including devices such as belt scales, weight hoppers, flow meters, and tank scales, shall be calibrated and adjusted to indicate the true value of the parameter being measured with sufficient accuracy to allow the applicable process variable to be determined within 10% of its true value.

[Rule 62-297.310(5), F.A.C.]

Test Methods and Procedures

E.18. The incinerator must be tested in its normal operating mode. In order for the permittee to be allowed to incinerate bedding, bags, or containers, these items shall be incinerated in normal amounts along with the animal remains during the compliance test burns. An incinerator which burns only animal remains during the compliance tests shall be permitted to incinerate only animal remains until a test determines compliance while incinerating bedding, bags, or containers along with the animal remains.

[Rule 62-4.070(3), F.A.C.]

E.19. Visible Emissions. The permittee shall have an initial and formal compliance test for visible emissions conducted during each federal fiscal year (October 1 - September 30).

[Rules 62-296.401(6)(j)1. and 62-297.310(7)(a)4.a., F.A.C.]

E.20. Visible Emissions. Compliance with the visible emissions limitation shall be determined by using DEP Method 9, incorporated in Chapter 62-297, F.A.C.

[Rules 62-296.401(6)(h)1. and 62-297.401(9)(c), F.A.C.]

E.21. Visible Emissions. The required minimum period of observation for an opacity compliance test shall be sixty (60) minutes. The opacity test observation period shall begin when incineration begins in the primary chamber.

[Rule 62-297.310(4)(a)2., F.A.C.]

E.22. Particulate Matter, Carbon Monoxide, and Oxygen. The permittee shall have an initial compliance test for particulate matter, carbon monoxide, and oxygen; after that, a compliance test shall be conducted prior to renewing the operation permit.

[Rules 62-296.401(6)(j)2. and 62-297.310(7)(a)3., F.A.C.]

E.23. Particulate Matter. Compliance with the particulate matter emission limitation shall be determined by using EPA Method 5, incorporated and adopted by reference in Chapter 62-297, F.A.C. The minimum sample volume shall be 30 dry standard cubic feet.

[Rule 62-296.401(6)(h)4., F.A.C.]

E.24. Carbon Monoxide. Compliance with the carbon monoxide emission limitation shall be determined by using EPA Method 10, incorporated and adopted by reference in Chapter 62-297, F.A.C.

[Rule 62-296.401(6)(h)2., F.A.C.]

E.25. Oxygen. The oxygen concentration shall be determined by using EPA Method 3, incorporated and adopted by reference in Chapter 62-297, F.A.C.

[Rule 62-296.401(6)(h)3., F.A.C.]

E.26. Test procedures shall meet all applicable requirements of Chapter 62-297, F.A.C.

[Rule 62-296.401(6)(h)5., F.A.C.]

E.27. Required Number of Test Runs. For mass emission limitations, a compliance test shall consist of three complete and separate determinations of the total air pollutant emission rate through the test section of the stack or duct and three complete and separate determinations of any applicable process variables corresponding to the three distinct time periods during which the stack emission rate was measured provided, however, that three complete and separate determinations shall not be required if the process variables are not subject to variation during a compliance test, or if three determinations are not necessary in order to calculate the unit's emission rate. The three required test runs shall be completed within one consecutive five day period. In the event that a sample is lost or one of the three runs must be discontinued because of circumstances beyond the control of the owner or operator, and a valid third run cannot be obtained within the five day period allowed for the test, the Secretary or his or her designee may

accept the results of the two complete runs as proof of compliance, provided that the arithmetic mean of the results of the two complete runs is at least 20 percent below the allowable emission limiting standards.

[Rule 62-297.310(1), F.A.C.]

E.28. Operating Rate During Testing. Testing of emissions shall be conducted with each emissions unit operation at permitted capacity, which is defined as 90 to 100 percent of the maximum operation rate allowed by the permit. If it is impracticable to test at permitted capacity, an emissions unit may be tested at less than the minimum permitted capacity; in this case, subsequent emissions unit operation is limited to 110 percent of the test load until a new test is conducted. Once the emissions unit is so limited, operation at higher capacities is allowed for no more than 15 consecutive days for the purpose of additional compliance testing to regain the authority to operate at the permitted capacity.

[Rules 62-297.310(2) & (2)(a), F.A.C.]

E.29. Calculation of Emission Rate. The indicated emission rate or concentration shall be the arithmetic average of the emission rate or concentration determined by each of the separate test runs unless otherwise specified in a particular test method or applicable rule.

[Rule 62-297.310(3), F.A.C.]

E.30. Applicable Test Procedures.

(a) Required Sampling Time.

1. Unless otherwise specified in the applicable rule, the required sampling time for each test run shall be no less than one hour and no greater than four hours, and the sampling time at each sampling point shall be of equal intervals of at least two minutes.

2. Opacity Compliance Tests. When either EPA Method 9 or DEP Method 9 is specified as the applicable opacity test method, the required minimum period of observation for a compliance test shall be sixty (60) minutes for emissions units which emit or have the potential to emit 100 tons per year or more of particulate matter, and thirty (30) minutes for emissions units which have potential emissions less than 100 tons per year of particulate matter and are not subject to a multiple-valued opacity standard. The opacity test observation period shall include the period during which the highest opacity emissions can reasonably be expected to occur. Exceptions to these requirements are as follows:

c. The minimum observation period for opacity tests conducted by employees or agents of the Department to verify the day-to-day continuing compliance of a unit or activity with an applicable opacity standard shall be twelve minutes.

(b) Minimum Sample Volume. Unless otherwise specified in the applicable rule, the minimum sample volume per run shall be 25 dry standard cubic feet.

(d) Calibration of Sampling Equipment. Calibration of the sampling train equipment shall be conducted in accordance with the schedule shown in Table 297.310-1 (attached).

[Rule 62-297.310(4), F.A.C.]

E.31. Required Stack Sampling Facilities. When a mass emissions stack test is required, the permittee shall comply with the requirements contained in Appendix SS-1, Stack Sampling Facilities, attached to this permit.

[Rule 62-297.310(6), F.A.C.]

E.32. Frequency of Compliance Tests. The following provisions apply only to those emissions units that are subject to an emissions limiting standard for which compliance testing is required.

(a) **General Compliance Testing.**

3. The owner or operator of an emissions unit that is subject to any emission limiting standard shall conduct a compliance test that demonstrates compliance with the applicable emission limiting standard prior to obtaining a renewed operation permit. Emissions units that are required to conduct an annual compliance test may submit the most recent annual compliance test to satisfy the requirements of this provision. In renewing an air operation permit pursuant to Rule 62-210.300(2)(a)3.b., c., or d., F.A.C., the Department shall not require submission of emission compliance test results for any emissions unit that, during the year prior to renewal:

- a. Did not operate; or,
- b. In the case of a fuel burning emissions unit, burned liquid fuel for a total of no more than 400 hours.

4. During each federal fiscal year (October 1 - September 30), unless otherwise specified by rule, order, or permit, the owner or operator of each emissions unit shall have a formal compliance test conducted for:

- a. Visible emissions, if there is an applicable standard;
- b. Each of the following pollutants, if there is an applicable standard, and if the emissions unit emits or has the potential to 100 tons per year or more of any other regulated air pollutant

9. The owner or operator shall notify the Department, at least 15 days prior to the date on which each formal compliance test is to begin, of the date, time, and place of each such test, and the test contact person who will be responsible for coordinating and having such test conducted for the owner or operator.

(b) **Special Compliance Tests.** When the Department, after investigation, has good reason (such as complaints, increased visible emissions or questionable maintenance of control equipment) to believe that any applicable emission standard contained in a Department rule or in a permit issued pursuant to those rules is being violated, it may require the owner or operator of the emissions unit to conduct compliance tests which identify the nature and quantity of pollutant emissions from the emissions unit and to provide a report on the results of said tests to the Department.

(c) **Waiver of Compliance Test Requirements.** If the owner or operator of an emissions unit that is subject to a compliance test requirement demonstrates to the Department, pursuant to the procedure established in Rule 62-297.620, F.A.C., that the compliance of the emissions unit with an applicable weight emission limiting standard can be adequately determined by means other than the designated test procedure, such as specifying a surrogate standard of no visible emissions for particulate matter sources equipped with a bag house or specifying a fuel analysis for sulfur dioxide emissions, the Department shall waive the compliance test requirements for such emissions units and order that the alternate means of determining compliance be used, provided, however, the provisions of Rule 62-297.310(7)(b), F.A.C., shall apply.

[Rule 62-297.310(7), F.A.C.; and, SIP approved]

E.33. Compliance Demonstration. Compliance with the carbon monoxide and particulate emission standards may be demonstrated by submission of a test report for an identical (same make, model, and permitted capacity) crematory unit operating in compliance with a valid Department air permit and tested pursuant to that permit. The test data in the test report must be less than five years old and may or may not be obtained from the unit that is being permitted.

[Rule 62-296.401(6)(k), F.A.C.]

Continuous Emissions Monitoring Requirements

E.34. Continuous Emissions Monitoring Requirements. The permittee shall install, operate, and maintain on the animal crematory continuous monitors to record temperature at the point or beyond where 1.0 second gas retention time is obtained in the secondary combustion zone in accordance with the manufacturer's instructions. A complete file of all measurements, including continuous monitoring system, monitoring device, and performance testing measurements; all continuous monitoring system performance evaluations; all continuous monitoring system or monitoring device calibration checks; and adjustments, preventive maintenance, and corrective maintenance performed on these systems or devices, shall be recorded in a permanent legible form available for inspection. Combustion temperature monitoring documentation shall include operator name, operator indication of when cremation in the primary chamber begins, date, time, and temperature markings. The file shall be retained for at least five years following the recording of such measurements, reports, and records.

[Rules 62-213.440 and 62-296.401(6)(l), F.A.C.]

Reports and Recordkeeping.

E.35. In the case of excess emissions resulting from malfunctions, each owner or operator shall notify the Department in accordance with Rule 62-4.130, F.A.C. A full written report on the malfunctions shall be submitted in a quarterly report, if requested by the Department.

[Rule 62-210.700(6), F.A.C.]

E.36. Test Reports.

(a) The owner or operator of an emissions unit for which a compliance test is required shall file a report with the Department on the results of each such test.

(b) The required test report shall be filed with the Department as soon as practical but no later than 45 days after the last sampling run of each test is completed.

(c) The test report shall provide sufficient detail on the emissions unit tested and the test procedures used to allow the Department to determine if the test was properly conducted and the test results properly computed. As a minimum, the test report, other than for an EPA Method 9 test, shall provide the following information:

1. The type, location, and designation of the emissions unit tested.
2. The facility at which the emissions unit is located.
3. The owner or operator of the emissions unit.
4. The normal type and amount of fuels used and materials processed, and the types and amounts of fuels used and material processed during each test run.
5. The means, raw data and computations used to determine the amount of fuels used and materials processed, if necessary to determine compliance with an applicable emission limiting standard.

6. The type of air pollution control devices installed on the emissions unit, their general condition, their normal operating parameters (pressure drops, total operating current and GPM scrubber water), and their operating parameters during each test run.
 7. A sketch of the duct within 8 stack diameters upstream and 2 stack diameters downstream of the sampling ports, including the distance to any upstream and downstream bends or other flow disturbances.
 8. The date, starting time and duration of each sampling run.
 9. The test procedures used, including any alternative procedures authorized pursuant to Rule 62-297.620, F.A.C. Where optional procedures are authorized in this chapter, indicate which option was used.
 10. The number of points sampled and configuration and location of the sampling plane.
 11. For each sampling point for each run, the dry gas meter reading, velocity head, pressure drop across the stack, temperatures, average meter temperatures and sample time per point.
 12. The type, manufacturer and configuration of the sampling equipment used.
 13. Data related to the required calibration of the test equipment.
 14. Data on the identification, processing and weights of all filters used.
 15. Data on the types and amounts of any chemical solutions used.
 16. Data on the amount of pollutant collected from each sampling probe, the filters, and the impingers, are reported separately for the compliance test.
 17. The names of individuals who furnished the process variable data, conducted the test, analyzed the samples and prepared the report.
 18. All measured and calculated data required to be determined by each applicable test procedure for each run.
 19. The detailed calculations for one run that relate the collected data to the calculated emission rate.
 20. The applicable emission standard, and the resulting maximum allowable emission rate for the emissions unit, plus the test result in the same form and unit of measure.
 21. A certification that, to the knowledge of the owner or his authorized agent, all data submitted are true and correct. When a compliance test is conducted for the Department or its agent, the person who conducts the test shall provide the certification with respect to the test procedures used. The owner or his authorized agent shall certify that all data required and provided to the person conducting the test are true and correct to his knowledge.
- [Rule 62-297.310(8), F.A.C.]

Section III. Emissions Unit(s) and Conditions.

Subsection F. This section addresses the following emissions unit.

E.U. ID No./Facility ID No.	Brief Description
-120	Three Diesel Electric Generators Serving the DISC Building

Both the annual fuel quantity used and percent sulfur, by weight, in the fuel oil are limited for this emissions unit. The nameplate rating of each generator is 1.75 megawatts (MW). The manufacturer is Spectrum Detroit Diesel. The model number is 1750DS-4. The generators were installed in November, 2002, with initial plans to operate them only as conditionally exempt emergency generators. Diesel fuel for the generators is stored in three 10,000 gallon fuel tanks. Air Construction Permit 0950111-022-AC reclassified the unit to regulated status, allowing increased operational flexibility for the facility.

Operational Requirements

F.1. Operating Procedures. Operating procedures shall include good operating practices and proper training of all operators and supervisors. The good operating practices shall meet the guidelines and procedures as established by the equipment manufacturers. All operators (including supervisors) of air pollution control devices shall be properly trained in plant specific equipment.

[Rule 62-4.070(3), F.A.C.; and 0950111-023-AC, Specific Condition A.11.]

F.2. Methods of Operation. Fuels. The only fuel allowed to be burned in this emissions unit is diesel fuel oil, with a maximum sulfur content of 0.5%, by weight. The amount of diesel fuel fired in the unit shall not exceed 225,000 gallons per year.

[Rule 62-4.070(3), F.A.C.; and 0950111-023-AC, Specific Condition A.12.]

Testing, Compliance Determination, and Reporting

F.3. Sulfur Dioxide. The permittee shall demonstrate compliance with the diesel fuel sulfur limit via a fuel analysis provided by the vendor or permittee upon each fuel delivery to the emission unit's three 10,000 gallon diesel fuel tanks.

- The fuel sulfur content, in percent by weight, for the diesel fuel shall be evaluated using either ASTM D2622-94, ASTM D4294-90 (95), ASTM D1552-95, ASTM D1266-91, or both ASTM D4057-88 and ASTM D129-95, or the latest editions.

{Permitting note: Evaluation of the fuel sulfur content required by this specific condition may be provided by using the fuel vendor's bill of lading for each fuel delivery.}

[Rules 62-4.070(3), 62-213.440 and 62-297.440, F.A.C.; and 0950111-023-AC, Specific Condition A.14.]

F.4. Recordkeeping. The following records shall be kept at the facility:

- Total gallons of diesel fuel oil used during each month for the three generators.
- The sulfur content, in percent by weight, of all the diesel fuel delivered each month to the three 10,000 gallon tanks, based on the vendor or permittee provided fuel sample analyses. See Specific Condition F.3.

The records shall be maintained for a minimum of 5 years and made available to the Central District Office upon request.
[Rule 62-297.310(8), F.A.C.; and 0950111-023-AC, Specific Condition A.15.]

DRAFT

Section IV. This section is the Acid Rain Part.

Operated by: Walt Disney World Co.
ORIS code: 7294: Reedy Creek Combined Cycle

Subsection A. This subsection addresses Acid Rain, Phase II.

The emissions unit listed below is regulated under Phase II of the Federal Acid Rain Program.

E.U./Facility ID No.	Description
-088/CEP-1	Reedy Creek Combined Cycle

A.1. The Phase II permit application(s) submitted for this facility, as approved by the Department, are a part of this permit. The owners and operators of these Phase II acid rain unit(s) must comply with the standard requirements and special provisions set forth in the application(s) listed below:

- a. DEP Form No. 62-210.900(1)(a), dated 08/05/02.
 [Chapter 62-213, F.A.C. and Rule 62-214.320, F.A.C.]

A.2. Sulfur dioxide (SO₂) allowance allocations requirements for each Acid Rain unit are as follows:

E.U. ID No.	EPA ID	Year	2003	2004	2005	2006	2007
-088*	32432	SO ₂ allowances, under Table 2 of 40 CFR Part 73	18* rule**	18* rule**	18* rule**	18* rule**	18* rule**

* The number of allowances held by an Acid Rain source in a unit account may differ from the number allocated by the USEPA under Table 2 of 40 CFR 73.

** "Rule" denotes that the preceding allocation will be proposed in the upcoming Acid Rain Division rulemaking change. These allowances are unadjusted basis allowances only, unless noted.

A.3. Emission Allowances. Emissions from sources subject to the Federal Acid Rain Program (Title IV) shall not exceed any allowances that the source lawfully holds under the Federal Acid Rain Program. Allowances shall not be used to demonstrate compliance with a non-Title IV applicable requirement of the Act.

1. No permit revision shall be required for increases in emissions that are authorized by allowances acquired pursuant to the Federal Acid Rain Program, provided that such increases do not require a permit revision pursuant to Rule 62-213.400(3), F.A.C.

2. No limit shall be placed on the number of allowances held by the source under the Federal Acid Rain Program.

3. Allowances shall be accounted for under the Federal Acid Rain Program.

[Rule 62-213.440(1)(c), F.A.C.]

A.4. Statement of Compliance. The annual statement of compliance pursuant to Rule 62-213.440(3), F.A.C., shall be submitted within 60 (sixty) days after the end of the calendar year. {See condition 51., APPENDIX TV-4, TITLE V CONDITIONS}
[Rule 62-214.420(11), F.A.C.]

A.5. Fast-Track Revisions of Acid Rain Parts. Those Acid Rain sources making a change described at Rule 62-214.370(4), F.A.C., may request such change as provided in Rule 62-213.413, F.A.C.
[Rules 62-213.413 and 62-214.370(4), F.A.C.]

A.6. No permit revision shall be required for increases in emissions that are authorized by allowances acquired pursuant to the Federal Acid Rain Program, provided that such increases do not require a permit revision pursuant to Rule 62-213.400, F.A.C.
[Rule 62-213.440(1)(c)1., F.A.C.]

A.7. Where an applicable requirement of the Act is more stringent than an applicable requirement of regulations promulgated under Title IV of the Act, both provisions shall be incorporated into the permit and shall be enforceable by the Administrator.
[40 CFR 70.6(a)(1)(ii); and, Rule 62-210.200, Definitions - Applicable Requirements, F.A.C.]

APPENDIX CAM

Compliance Assurance Monitoring Requirements

Compliance Assurance Monitoring Requirements

Pursuant to Rule 62-213.440(1)(b)1.a., F.A.C., the CAM plans that are included in this appendix contain the monitoring requirements necessary to satisfy 40 CFR 64. Conditions 1. – 17. are generic conditions applicable to all emissions units that are subject to the CAM requirements. Specific requirements related to each emissions unit are contained in the attached tables, as submitted by the applicant and approved by the Department.

40 CFR 64.6 Approval of Monitoring.

1. The attached CAM plan(s), as submitted by the applicant, is/are approved for the purposes of satisfying the requirements of 40 CFR 64.3.
[40 CFR 64.6(a)]
2. The attached CAM plan(s) include the following information:
 - (i) The indicator(s) to be monitored (such as temperature, pressure drop, emissions, or similar parameter);
 - (ii) The means or device to be used to measure the indicator(s) (such as temperature measurement device, visual observation, or CEMS); and
 - (iii) The performance requirements established to satisfy 40 CFR 64.3(b) or (d), as applicable.[40 CFR 64.6(c)(1)]
3. The attached CAM plan(s) describe the means by which the owner or operator will define an exceedance of the permitted limits or an excursion from the stated indicator ranges and averaging periods for purposes of responding to (see **CAM Conditions 5. - 9.**) and reporting exceedances or excursions (see **CAM Conditions 10. - 14.**).
[40 CFR 64.6(c)(2)]
4. The permittee is required to conduct the monitoring specified in the attached CAM plan(s) and shall fulfill the obligations specified in the conditions below (see **CAM Conditions 5. - 17.**).
[40 CFR 64.6(c)(3)]

40 CFR 64.7 Operation of Approved Monitoring.

5. Commencement of operation. The owner or operator shall conduct the monitoring required under this appendix upon the effective date of this Title V permit.
[40 CFR 64.7(a)]
6. Proper maintenance. At all times, the owner or operator shall maintain the monitoring, including but not limited to, maintaining necessary parts for routine repairs of the monitoring equipment.
[40 CFR 64.7(b)]
7. Continued operation. Except for, as applicable, monitoring malfunctions, associated repairs, and required quality assurance or control activities (including, as applicable, calibration checks and required zero and span adjustments), the owner or operator shall conduct all monitoring in continuous operation (or shall collect data at all required intervals) at all times that the pollutant-specific emissions unit is operating. Data recorded during monitoring malfunctions, associated repairs, and required quality assurance or control activities shall not be used for purposes of this part, including data averages and calculations, or fulfilling a minimum data availability requirement, if applicable. The owner or operator shall use all the data collected during all other periods in assessing the operation of the control device and associated control system. A monitoring malfunction is any sudden, infrequent, not reasonably preventable failure of the monitoring to provide valid data. Monitoring failures that are caused in part by poor maintenance or careless operation are not malfunctions.
[40 CFR 64.7(c)]

8. Response to excursions or exceedances.

a. Upon detecting an excursion or exceedance, the owner or operator shall restore operation of the pollutant-specific emissions unit (including the control device and associated capture system) to its normal or usual manner of operation as expeditiously as practicable in accordance with good air pollution control practices for minimizing emissions. The response shall include minimizing the period of any startup, shutdown or malfunction and taking any necessary corrective actions to restore normal operation and prevent the likely recurrence of the cause of an excursion or exceedance (other than those caused by excused startup or shutdown conditions, if allowed by this permit). Such actions may include initial inspection and evaluation, recording that operations returned to normal without operator action (such as through response by a computerized distribution control system), or any necessary follow-up actions to return operation to within the indicator range, designated condition, or below the applicable emission limitation or standard, as applicable.

b. Determination of whether the owner or operator has used acceptable procedures in response to an excursion or exceedance will be based on information available, which may include but is not limited to, monitoring results, review of operation and maintenance procedures and records, and inspection of the control device, associated capture system, and the process.

[40 CFR 64.7(d)(1) & (2)]

9. Documentation of need for improved monitoring. If the owner or operator identifies a failure to achieve compliance with an emission limitation or standard for which the approved monitoring did not provide an indication of an excursion or exceedance while providing valid data, or the results of compliance or performance testing document a need to modify the existing indicator ranges or designated conditions, the owner or operator shall promptly notify the permitting authority and, if necessary, submit a proposed modification to the Title V permit to address the necessary monitoring changes. Such a modification may include, but is not limited to, reestablishing indicator ranges or designated conditions, modifying the frequency of conducting monitoring and collecting data, or the monitoring of additional parameters.

[40 CFR 64.7(e)]

40 CFR 64.8 Quality Improvement Plan (QIP) Requirements.

10. Based on the results of a determination made under **CAM Condition 8.a.**, above, the permitting authority may require the owner or operator to develop and implement a QIP. Consistent with **CAM Condition 4.**, an accumulation of exceedances or excursions exceeding 5 percent duration of a pollutant-specific emissions unit's operating time for a reporting period, may require the implementation of a QIP. The threshold may be set at a higher or lower percent or may rely on other criteria for purposes of indicating whether a pollutant-specific emissions unit is being maintained and operated in a manner consistent with good air pollution control practices.

[40 CFR 64.8(a)]

11. Elements of a QIP:

a. The owner or operator shall maintain a written QIP, if required, and have it available for inspection.

b. The plan initially shall include procedures for evaluating the control performance problems and, based on the results of the evaluation procedures, the owner or operator shall modify the plan to include procedures for conducting one or more of the following actions, as appropriate:

- (i) Improved preventive maintenance practices.
- (ii) Process operation changes.
- (iii) Appropriate improvements to control methods.
- (iv) Other steps appropriate to correct control performance.
- (v) More frequent or improved monitoring (only in conjunction with one or more

steps under **CAM Condition 11.b(i) through (iv)**, above).

[40 CFR 64.8(b)]

12. If a QIP is required, the owner or operator shall develop and implement a QIP as expeditiously as practicable and shall notify the permitting authority if the period for completing the improvements contained in the QIP exceeds 180 days from the date on which the need to implement the QIP was determined.

[40 CFR 64.8(c)]

13. Following implementation of a QIP, upon any subsequent determination pursuant to **CAM Condition 8.b.**, the permitting authority may require that an owner or operator make reasonable changes to the QIP if the QIP is found to have:

- a. Failed to address the cause of the control device performance problems; or
- b. Failed to provide adequate procedures for correcting control device performance problems as expeditiously as practicable in accordance with good air pollution control practices for minimizing emissions.

[40 CFR 64.8(d)]

14. Implementation of a QIP shall not excuse the owner or operator of a source from compliance with any existing emission limitation or standard, or any existing monitoring, testing, reporting or recordkeeping requirement that may apply under federal, state, or local law, or any other applicable requirements under the Act.

[40 CFR 64.8(e)]

40 CFR 64.9 Reporting And Recordkeeping Requirements.

15. General reporting requirements.

- a. On and after the date specified in **CAM Condition 5.** by which the owner or operator must use monitoring that meets the requirements of this appendix, the owner or operator shall submit monitoring reports semi-annually to the permitting authority in accordance with Rule 62-213.440(1)(b)3.a., F.A.C.
- b. A report for monitoring under this part shall include, at a minimum, the information required under Rule 62-213.440(1)(b)3.a., F.A.C., and the following information, as applicable:
 - (i) Summary information on the number, duration and cause (including unknown cause, if applicable) of excursions or exceedances, as applicable, and the corrective actions taken;
 - (ii) Summary information on the number, duration and cause (including unknown cause, if applicable) for monitor downtime incidents (other than downtime associated with zero and span or other daily calibration checks, if applicable); and
 - (iii) A description of the actions taken to implement a QIP during the reporting period as specified in **CAM Conditions 10.** through **14.** Upon completion of a QIP, the owner or operator shall include in the next summary report documentation that the implementation of the plan has been completed and reduced the likelihood of similar levels of excursions or exceedances occurring.

[40 CFR 64.9(a)]

16. General recordkeeping requirements.

- a. The owner or operator shall comply with the recordkeeping requirements specified in Rule 62-213.440(1)(b)2., F.A.C. The owner or operator shall maintain records of monitoring data, monitor performance data, corrective actions taken, any written quality improvement plan required pursuant to **CAM Conditions 10.** through **14.** and any activities undertaken to implement a quality improvement plan, and other supporting information required to be maintained under this part (such as data used to document the adequacy of monitoring, or records of monitoring maintenance or corrective actions).
- b. Instead of paper records, the owner or operator may maintain records on alternative media, such as microfilm, computer files, magnetic tape disks, or microfiche, provided that the use of such alternative media allows for expeditious inspection and review, and does not conflict with other applicable recordkeeping requirements.

[40 CFR 64.9(b)]

40 CFR 64.10 Savings Provisions.

17. It should be noted that nothing in this appendix shall:
- a. Excuse the owner or operator of a source from compliance with any existing emission limitation or standard, or any existing monitoring, testing, reporting or recordkeeping requirement that may apply under federal, state, or local law, or any other applicable requirements under the Act. The requirements of this appendix shall not be used to justify the approval of monitoring less stringent than the monitoring which is required under separate legal authority and are not intended to establish minimum requirements for the purpose of determining the monitoring to be imposed under separate authority under the Act, including monitoring in permits issued pursuant to title I of the Act. The purpose of this part is to require, as part of the issuance of a permit under Title V of the Act, improved or new monitoring at those emissions units where monitoring requirements do not exist or are inadequate to meet the requirements of this part.
 - b. Restrict or abrogate the authority of the Administrator or the permitting authority to impose additional or more stringent monitoring, recordkeeping, testing, or reporting requirements on any owner or operator of a source under any provision of the Act, including but not limited to sections 114(a)(1) and 504(b), or state law, as applicable.
 - c. Restrict or abrogate the authority of the Administrator or permitting authority to take any enforcement action under the Act for any violation of an applicable requirement or of any person to take action under section 304 of the Act.

[40 CFR 64.10]

MONITORING APPROACH SUBMITTAL

I. Background

A. Emissions Unit

Description: Combined Cycle Combustion Turbine
(Type of emissions point) with a Natural Gas-Fired Duct Burner-
Heat Recovery Steam Generator

Identification: 088
(Emissions point number)

Facility: Walt Disney World Resort Complex –
(Location) Facility ID 0950111

B. Applicable Regulation, Emission Limits, and Monitoring Requirements

Regulation No.: 40 CFR 60 Subpart GG
Air Construction Permit 0950111-025-AC
Pollutant: Carbon Monoxide 12.6 lbs/hr or 55.2 tpy burning natural gas
(Emissions limit)

Pollutant: Carbon Monoxide 2.4 lbs/hr or 0.6 tpy burning fuel oil
(Emissions limit)

C. Control Technology

Carbon Monoxide (CO) is controlled or reduced by the use of a catalytic oxidation system, which is effectively a passive control system. The catalyst (stainless steel foil coated with calcined alumina with platinum metal) enhances the chemical reaction between oxygen and carbon monoxide and forms carbon dioxide as the end product. This reaction is greater than 80% efficient at 392° F (200° C) within minutes of gas turbine startup, before power generation begins. The catalyst normally operates at a temperature around 800° F (427° C) with corresponding CO removal efficiencies above 90%. The carbon monoxide removal efficiency increases as temperature increases up to the maximum operating limit of 1250° F (677° C). (Refer to the attached graph in Figure 1, which illustrates the carbon monoxide conversion efficiency at varying temperatures up to 500° C (932° F). This system is designed and certified by the manufacturer to operate while the plant is burning either natural gas or new No. 2 diesel fuel oil.

A plant operator occupies the plant control room 24 hours per day, which allows the plant personnel to monitor two key catalyst operating parameters. Namely, catalyst inlet temperature and pressure drop across the catalyst bed. A high temperature alarm is in place to alert the operator if the catalyst inlet temperature exceeds 1250° F (677° C) to protect the bed from thermal damage, and a high-pressure alarm sounds if the pressure drop across the catalyst bed exceeds 3" of water column. The pressure reading serves two purposes: to ensure that there is airflow across the bed, thus verifying that the system is operating, and to alert the plant operator if a possible plugging or fouling has occurred.


II. Monitoring Approach

The key elements of the monitoring approach are presented in Table 1. The selected performance indicators are catalyst inlet temperature, pressure drop across the catalyst bed, and annual analysis of a catalyst test plug. The plant operator manually logs the temperature and the pressure drop once a day, monitors the alarms, and takes action if the readings are outside the allowable operating range. The test plug is analyzed annually to enable the catalyst manufacturer to certify the condition of the catalyst.

TABLE 1: MONITORING APPROACH

	Indicator No. 1	Indicator No. 2
I. Indicator	Catalyst inlet temperature and pressure differential	Annual Test plug analysis
Measurement Approach	Thermocouples Pressure sensors	A test plug of the catalytic material is removed for the manufacturer's laboratory analysis.
II. Indicator Range	Minimum Temp. : 392° F (200° C) Maximum Temp. : 1250° F (677° C) Maximum pressure diff. = 3" of water column (w.c.)	Manufacturer certifies whether or not the catalyst is within operating specifications.
QIP Threshold (optional)	An excursion is defined as falling below 392° F (200° C), or rising above 1250° F (677° C), or rising above 3" w.c., during normal operation.	
III. Performance Criteria		
A. Data Representativeness	The thermocouples are located at the inlet face of the catalyst bed. The pressure sensors are located on the inlet and outlet faces of the catalyst bed.	A representative sample is removed from the catalyst bed in accordance with manufacturer's operational instructions.
B. Verification of Operational Status	Plant control room operators monitor the alarm system 24 hours/day and records data once per day.	Manufacturer certified condition of catalyst after initial installation and annually thereafter.
C. QA/QC Practices and Criteria	Annual testing/calibration of the temperature and pressure sensor transmitters	NA
D. Monitoring Frequency	Daily	Annual
Data Collection Procedures	Temperature and pressure readings are recorded daily.	Test plugs are removed when the plant is shut down for annual maintenance.
Averaging Procedures	NA (monitoring data does not correspond to actual emissions rate.)	NA

**Figure 1: Reedy Creek Cogeneration Plant
CO Conversion**

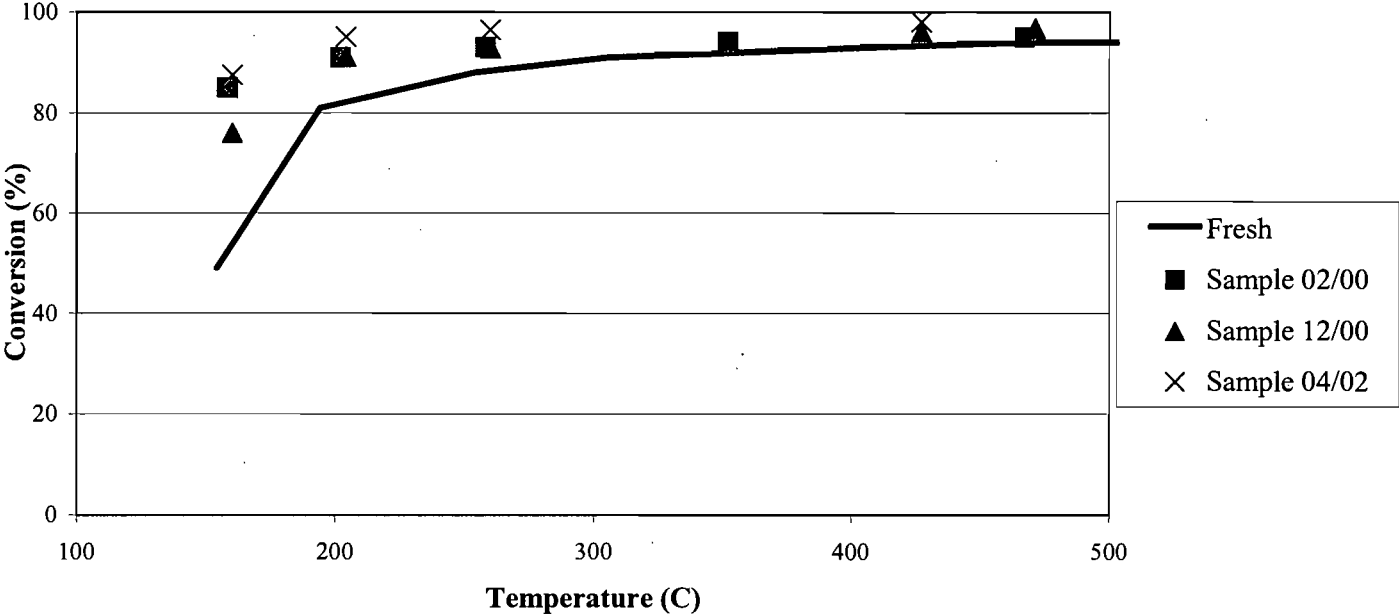

Appendix H-1: Permit History

Walt Disney World Co.
Walt Disney World Resort Complex

Permit No. **0950111-027-AV**
Facility ID No. **0950111**

E.U. ID No.	Description	Permit No.	Effective Date	Expiration Date	Project Type
All	Facility	0950111-005-AV	01/01/1998	12/31/2002	Initial
-088/CEP-1	CCCT and HRSG	0950111-016-AC	05/25/1999	12/31/2002	Construction (mod.)
		0950111-017-AV	05/25/1999	12/31/2002	Revision
-112/DAK-1	Necropsy Bldg.: Animal Crematory	0950111-013-AC	03/18/1998	12/31/1999	Construction (new)
		0950111-017-AV	05/25/1999	12/31/2002	Revision
-115/DAKU-52	Tree of Life Boiler	0950111-016-AC	05/25/1999	12/31/2002	Construction (new)
		0950111-017-AV	05/25/1999	12/31/2002	Revision
All	Facility	0950111-021-AV	01/01/2003	12/31/2007	Renewal
-120	Three Diesel Electric Generators Serving the DISC Building	0950111-022-AC	06/16/2004	12/31/2004	Construction (new)
-120	Three Diesel Electric Generators Serving the DISC Building	0950111-023-AC	12/01/04	2/28/2005	Construction (mod.)
All	Facility	0950111-024-AV	2/2/05	12/31/2007	Revision
-088/CEP-1	CCCT and HRSG	0950111-025-AC	6/13/05	11/1/06	Construction (new)
-088/CEP-1	CCCT and HRSG	0950111-026-AC	8/16/06	11/1/06	Construction (mod.)

Appendix U-1, List of Unregulated Emissions Units and/or Activities.

Walt Disney World Company
Walt Disney World Resort Complex

Permit No. 0950111-027-AV
Facility ID No. 0950111

Unregulated Emissions Units and/or Activities. An emissions unit which emits no “emissions-limited pollutant” and which is subject to no unit-specific work practice standard, though it may be subject to regulations applied on a facility-wide basis (e.g., unconfined emissions, odor, general opacity) or to regulations that require only that it be able to prove exemption from unit-specific emissions or work practice standards.

Brief Description of Emissions Units and/or Activities:

A. Commercial/Institutional External Combustion Boilers: Natural Gas Fired. These units are used to heat water.

1. Disney’s All-Star Resort (-113): ASR-2 thru ASR-108.
2. Disney’s Dixie Landings Resort (-xxx): DLR-1 thru DLR-25.
3. Disney’s Port Orleans Resort (-xxx): POR-1 thru POR-16.
4. Disney’s Polynesian Resort (-xxx): PR-1 thru PR-4, PR-6 thru PR-9, PR-11 & PR-12.
5. Disney’s Typhoon Lagoon (-xxx): TL-1 thru TL-3.
6. Disney’s Wilderness Lodge (-xxx): WLR-1 & WLR-2.
7. Disney’s Yacht and Beach Club (-xxx): YBC-1 & YBC-2.
8. Disney’s Grand Floridian Hotel (-035): GFR-2 thru GFR-18.
9. Disney-MGM Studio Tours (-053): STB-1, STB-2A, STB-3 thru STB-8.
10. Disney’s Blizzard Beach (-083): BB-1 thru BB-5.
11. Disney’s Boardwalk Resort (-091): BDW-3 thru BDW-10.
12. Disney’s Magic Kingdom (-092): MK-3.
13. Disney’s Animal Kingdom (-103): DAKU-1 thru DAKU-51.
14. Disney’s Coronado Springs Resort (-095): COS-1 thru COS-37.

B. Commercial/Institutional External Combustion Boilers: Natural/L.P. Gas Fired. These units are used to heat water.

1. Disney-MGM Studio Tours (-053): STB-2B1 & STB-2B2 (replaced HWG STB-2B).

C. Commercial/Institutional External Combustion Boiler: Primarily fired on Natural Gas or Propane (New No. 2 distillate fuel oil is used for back-up purposes). These units are used to heat water.

1. Reedy Creek Improvement District (-076): EPCOT HWG-1 thru -3.

D. Commercial/Institutional External Combustion Boiler: Primarily fired on Natural Gas (New No. 2 distillate fuel oil is used for back-up purposes). This unit is used to heat water.

1. Reedy Creek Improvement District (-081): CEP-2.

E. Commercial/Institutional External Combustion Boilers: Natural Gas Fired Only. This unit is used to make steam for the operation of the features of the “Tree of Life” and has a heat input rating of 1.075 MMBtu/hr.

1. Disney’s Animal Kingdom “Tree of Life” Boiler (-115): DAKU-52.

F. Administration Area Laundry (-072): There are two natural gas fired thermal fluid heaters (LAU-1 & LAU-2). They are manufactured by Fulton Thermal Corporation and the Model No. is FT-C 1000. The combined heat input is 26 MMBtu/hr.

G. North Service Area Central Shops Building Annex (-005).

1. Sand Blast Chamber No. 1 (NSA-17). This emissions unit operation has a baghouse control system manufactured by Carter-Day, Model 14-RJ-84 to control particulate matter and visible emissions. The collection efficiency is estimated to be 99.7% for particulate matter @ 10 microns in size. The sand blast chamber utilization rate of sand is below 7 lbs/hr.

H. Paint Spray Booths. The following paint spray booth (PSB) operations are VOC emitters from the use of coatings, paints, thinners, and clean-up solvents. The permittee maintains accountability of VOC usage through a material balance scheme. All of the PSBs are equipped with paint arrestor type filters to control particulate matter and visible emissions. All hazardous wastes will be disposed pursuant to RCRA and Chapter 62-730, F.A.C. Also, NSA-7 has an associated natural gas fired curing oven.

E.U./Facility I.D.	Brief Description
<u>North Service Area Boat Maintenance and Painting Facility</u>	
-006/NSA-18	NSA Boat Maintenance PSB
<u>North Service Area Central Shops Building</u>	
-007/NSA-1	NSA PSB #1
-007/NSA-2	NSA PSB #2
-007/NSA-3	NSA PSB #3
-007/NSA-4	NSA Metalizing PSB
-007/NSA-5	NSA Staff Shop PSB #1
-007/NSA-6	NSA Staff Shop PSB #2
-007/NSA-7	NSA Water Wash Plastisol PSB #1; includes a natural gas fired curing oven
-007/NSA-11	NSA Character Head Spray Box
-007/NSA-12	NSA Artist's Preparation Shop PSB
-007/NSA-14	NSA Paint Shop PSB #6
-007/NSA-15	NSA Central Shop Paint Mixing Stations (7)
-007/NSA-16	NSA Urethane Adhesive Lay-up Workstations (4)
<u>North Service Area Lofting Building</u>	
-014/NSA-8	NSA Lofting Building PSB
<u>North Service Area Central Shops Building Annex</u>	
-015/NSA-9	NSA Paint Shop PSB #4
-015/NSA-10	NSA Paint Shop PSB #5
<u>Disney-MGM Studio</u>	
-061/MGM-10	Studio Craft PSB
<u>Buena Vista Construction</u>	
-062/BVC-1	PSB
<u>Lake Buena Vista Community Village</u>	
-063/LBV-1	PSB #1
-063/LBV-2	PSB #2
<u>Disney Village</u>	
-065/VM-3	Marketplace PSB
<u>Ft. Wilderness Golf Course</u>	
-066/FWR-4	PSB

E.U./Facility I.D.	Brief Description
<u>Disney's Yacht & Beach Club</u>	
-067/YBC-3	PSB
<u>EPCOT Center</u>	
-068/EP-1	Maintenance PSB
-068/EP-2	Display PSB
-070/EP-3	Marina PSB
<u>South Service Area</u>	
-071/SSA-1	Traffic Control Equipment PSB
<u>Disney's Magic Kingdom</u>	
-075/MK-1	PSB #1
-093/MK-2	PSB #2
<u>Disney's Boardwalk Resort</u>	
-094/BR-1	PSB #1
<u>Disney's Coronado Springs Resort</u>	
-102/COS-41	PSB #1
<u>Disney's All Star Resort</u>	
-114/ASR-1	PSB #1
<u>Disney-MGM Studios Feature Animation Building</u>	
-117/MGM-xx	PSB
-117/MGM-xx	PSB
<u>NSA Monorail Building</u>	
-118/NSA-20	Monorail Trains Spray Booth
<u>Disney's Animal Kingdom Paint Shop</u>	
-xxx/DAKU-53	Maintenance PSB

I. Stand-by/Emergency Generators (-101). The Walt Disney World Resort Complex operates 120 stand-by/emergency generators that fire new No. 2 distillate diesel fuel oil (108), natural gas (11), or LP gas (1). Of these generators within the complex, 85 are assigned to the Walt Disney World Co. operations and 35 are assigned to the Reedy Creek Improvement District operations.

J. Facility-wide Fugitive VOC emissions. There are several large architectural type structures that cannot be coated/painted within an enclosed building, but have to be coated/painted after the structure has been made. Therefore, this subsection covers such type activities. Just as the paint spray booth operations, the permittee maintains accountability of VOC usage through a material balance scheme. All hazardous wastes will be disposed pursuant to RCRA and Chapter 62-730, F.A.C.

K. Miscellaneous

1. Degasifiers
2. Equipment used exclusively for space heating
3. Fireplaces
4. Natural gas gate and compression station, including odorant addition equipment
5. Oil and organic solvent storage tanks >550 gallons
6. Parts cleaning and degreasing stations
7. Pool heaters <1 MMBtu/hr maximum gross heat output, each
8. Portable kerosene space heaters
9. Sewage treatment facilities

10. Silk screening
11. Smokehouse
12. Storage tanks <550 gallons
13. Water heaters used for comfort heating, <1 MMBtu/hr maximum gross heat output, each
14. Twenty-six natural gas-fired laundry dryers @ 32.6 MMBtu/hr total heat input.

Appendix I-1, List of Insignificant Emissions Units and/or Activities.

Walt Disney World Company
Walt Disney World Resort Complex

Permit No. 0950111-027-AV
Facility ID No. 0950111


The facilities, emissions units, or pollutant-emitting activities listed in Rule 62-210.300(3)(a), F.A.C., Categorical Exemptions, or that meet the criteria specified in Rule 62-210.300(3)(b)1., F.A.C., Generic Emissions Unit Exemption, are exempt from the permitting requirements of Chapters 62-210, 62-212 and 62-4, F.A.C.; provided, however, that exempt emissions units shall be subject to any applicable emission limiting standards and the emissions from exempt emissions units or activities shall be considered in determining the potential emissions of the facility containing such emissions units. Emissions units and pollutant-emitting activities exempt from permitting under Rules 62-210.300(3)(a) and (b)1., F.A.C., shall not be exempt from the permitting requirements of Chapter 62-213, F.A.C., if they are contained within a Title V source; however, such emissions units and activities shall be considered insignificant for Title V purposes provided they also meet the criteria of Rule 62-213.430(6)(b), F.A.C. No emissions unit shall be entitled to an exemption from permitting under Rules 62-210.300(3)(a) and (b)1., F.A.C., if its emissions, in combination with the emissions of other units and activities at the facility, would cause the facility to emit or have the potential to emit any pollutant in such amount as to make the facility a Title V source.

The below listed emissions units and/or activities are considered insignificant pursuant to Rule 62-213.430(6), F.A.C.

Brief Description of Emissions Units and/or Activities:

1. Applications of fungicides, herbicides and pesticides.
2. Battery charging.
3. Blueprint reproduction.
4. Brazing, soldering and welding.
5. Campfires.
6. Compressed air systems, including air compressors and driers.
7. Degasifiers.
8. Electric drying oven with no air pollutant emissions expected.
9. Equipment used exclusively for space heating.
10. Equipment used exclusively to sand and shape wood or plastic.
11. Fireplaces.
12. Fresh water cooling towers.
13. Generator venting.
14. HVAC and chiller units that are in compliance with Rule 62-213.300(3)(o), F.A.C.
15. Inorganic substance storage tanks >550 gallons.
16. Kitchen exhaust.
17. Laboratory hood vents.
18. Latex injection.
19. Laundry dryers.
20. Lube oil tank vents.
21. Lube oil vents associated with rotating equipment.

22. Maintenance activity associated with transformers, switches, switchgear processing (including cleaning, changing and venting).
23. Natural gas gate and compression station, including odorant addition equipment.
24. Natural gas system maintenance.
25. Office equipment and office ventilation.
26. Oil and organic solvent storage tanks >550 gallons
27. Oil truck unloading equipment.
28. Oil/water separators.
29. Parts cleaning and degreasing stations, except for those subject to Rule 62-213.300(1)(c), F.A.C.
30. Pool heaters with less than 1 MMBtu/hr maximum gross heat output each.
31. Portable kerosene space heaters.
32. Recycling operations, including sorting, compacting and baling.
33. Refrigeration systems that are in compliance with Rule 62-213.300(3)(o), F.A.C.
34. Routine maintenance and repair activities, except painting
35. Sewage treatment facilities.
36. Sewer line vents.
37. Silk screening.
38. Smokehouse.
39. Special effects.
40. Stack test sampling equipment.
41. Tiki torches.
42. Turbine vapor extractor.
43. Black-start Generator.
 1. This generator has historically fired a total amount of less than 10,000 gallons per year.
44. Water heaters used for comfort heating with less than 1 MMBtu/hr maximum gross heat output each:
 - a. Disney's Animal Kingdom. Fifty-three (53) natural gas fired radiant comfort heaters with a gross maximum heat output of less than one million Btu per hour per unit pursuant to Rule 62-210.300(3)(a)4., F.A.C. (DAKE-1 thru DAKE-53)
 - b. Etc.
45. **Not Federally Enforceable**. Two (2) petroleum solvent dry cleaning machines with a total solvent consumption of less than 3,250 gallons per year pursuant to Rule 62-210.300(3)(a)18., F.A.C.



Jeb Bush
Governor

Department of Environmental Protection

Twin Towers Office Building
2600 Blair Stone Road
Tallahassee, Florida 32399-2400

Colleen M. Castille
Secretary

September 13, 2006

CERTIFIED MAIL – RETURN RECEIPT REQUESTED

Mr. Lee Schmudde
Responsible Official
Walt Disney World Company
Walt Disney World Resort Complex
P.O. Box 10,000
Lake Buena Vista, FL 32830-1000

Re: Title V Permit Revision Application
Project No. **0950111-027-AV**
Walt Disney World Resort Complex

Dear Mr. Schmudde:

We have reviewed your Title V permit revision application received on July 24, 2006, for the subject facility and have deemed the application incomplete due to the omission of a revised compliance assurance monitoring (CAM) plan as part of the submission. Please provide this document as soon as possible so we can complete our work on the revision request.

Rule 62-4.050(3), F.A.C., requires that all applications for a Department permit must be certified by a professional engineer registered in the State of Florida. This requirement also applies to responses to Department requests for additional information of an engineering nature. Permit applicants are advised that Rule 62-213.420(1)(b), F.A.C., requires applicants to respond to requests for information within 90 days, unless the applicant has requested in writing, and has been granted, additional time within 90 days.

If you have any questions, please contact Project Engineer Tom Cascio at 850-921-9526.

Sincerely,

A. A. Linero, Program Administrator
Permitting South Section

Cc: Edward Godwin, P.E., Walt Disney World Company
Len Kozlov, P.E., Central District Office

"More Protection, Less Process"

Printed on recycled paper.

SENDER: COMPLETE THIS SECTION

- Complete items 1, 2, and 3. Also complete item 4 if Restricted Delivery is desired.
- Print your name and address on the reverse so that we can return the card to you.
- Attach this card to the back of the mailpiece, or on the front if space permits.

1. Article Addressed to:

Mr. Lee Schumde, Responsible Official
 Walt Disney World Company
 Walt Disney World Resort Complex
 P.O. Box 10,000
 Lake Buena Vista, Florida 32830-1000

2. Article Number
 (Transfer from service label)

7005 1160 0004 3034 4684

COMPLETE THIS SECTION ON DELIVERY

A. Signature

Lannon

- Agent
 Addressee

B. Received by (Printed Name)

Lannon

C. Date of Delivery

9-18-06

- D. Is delivery address different from item 1? Yes
 If YES, enter delivery address below: No

3. Service Type

- Certified Mail Express Mail
 Registered Return Receipt for Merchandise
 Insured Mail C.O.D.

4. Restricted Delivery? (Extra Fee) Yes

4684 3034 0004 1160 7005

U.S. Postal Service™
CERTIFIED MAIL™ RECEIPT
 (Domestic Mail Only; No Insurance Coverage Provided)

For delivery information visit our website at www.usps.com

Mr. Lee Schumde, Responsible Official

Postage	\$
Certified Fee	
Return Receipt Fee (Endorsement Required)	
Restricted Delivery Fee (Endorsement Required)	
Total Postage & Fees	\$

Postmark
Here

Sent To
 Mr. Lee Schumde, Responsible Official
 Street, Apt. No. or PO Box No. P. O. Box 10,000
 City, State, ZIP+4
 Lake Buena Vista, Florida 32830-1000

Friday, Barbara

To: Lee.Schmudee@disney.com; Ed.Godwin@disney.com; Kozlov, Leonard
Cc: Cascio, Tom
Subject: DRAFT Title V Permit Revision No.: 0950111-027-AV - Walt Disney World Company/Walt Disney World Resort Complex
Attachments: 0950111.027.AV.D_pdf[1].zip

Dear Sir/Madam:

Please send a "reply" message verifying receipt of the attached document(s); this may be done by selecting "Reply" on the menu bar of your e-mail software and then selecting "Send". We must receive verification of receipt and your reply will preclude subsequent e-mail transmissions to verify receipt of the document(s).

The document(s) may require immediate action within a specified time frame. Please open and review the document(s) as soon as possible.

The document is in Adobe Portable Document Format (pdf). Adobe Acrobat Reader can be downloaded for free at the following internet site: <http://www.adobe.com/products/acrobat/readstep.html>.

The Bureau of Air Regulation is issuing electronic documents for permits, notices and other correspondence in lieu of hard copies through the United States Postal System, to provide greater service to the applicant and the engineering community. Please advise this office of any changes to your e-mail address or that of the Engineer-of-Record.

Thank you,

DEP, Bureau of Air Regulation

10/26/2006

Friday, Barbara

From: Schmudde, Lee [Lee.Schmudde@disney.com]
To: Friday, Barbara
Sent: Friday, October 27, 2006 9:14 AM
Subject: Read: DRAFT Title V Permit Revision No.: 0950111-027-AV - Walt Disney World Company/Walt Disney World Resort Complex

Your message

To: Lee.Schmudde@email.disney.com
Subject:

was read on 10/27/2006 9:14 AM.

Friday, Barbara

From: System Administrator
To: Kozlov, Leonard
Sent: Thursday, October 26, 2006 11:21 AM
Subject: Delivered:DRAFT Title V Permit Revision No.: 0950111-027-AV - Walt Disney World Company/Walt Disney World Resort Complex

Your message

To: 'Lee.Schmudee@disney.com'; 'Ed.Godwin@disney.com'; Kozlov, Leonard
Cc: Cascio, Tom
Subject: DRAFT Title V Permit Revision No.: 0950111-027-AV - Walt Disney World Company/Walt Disney World Resort Complex
Sent: 10/26/2006 11:21 AM

was delivered to the following recipient(s):

Kozlov, Leonard on 10/26/2006 11:21 AM

Friday, Barbara

From: Godwin, Ed [Ed.Godwin@disney.com]
To: Friday, Barbara
Sent: Thursday, October 26, 2006 1:11 PM
Subject: Read: DRAFT Title V Permit Revision No.: 0950111-027-AV - Walt Disney World Company/Walt Disney World Resort Complex

Your message

To: Ed.Godwin@email.disney.com
Subject:

was read on 10/26/2006 1:11 PM.

Friday, Barbara

From: Godwin, Ed [Ed.Godwin@disney.com]
Sent: Thursday, October 26, 2006 1:16 PM
To: Friday, Barbara; Lee.Schmudee@disney.com
Cc: Cascio, Tom
Subject: RE: DRAFT Title V Permit Revision No.: 0950111-027-AV - Walt Disney World Company/Walt Disney World Resort Complex

Ms. Friday;

I have received your transmittal.

Edward Godwin, P.E.
Chief Mechanical Engineer
Reedy Creek Energy Services
Walt Disney World
P.O. Box 10000
5300 North Cast Drive
Lake Buena Vista, FL 32830-1000
Phone: 407-824-4943

Fax: 407-824-2016

Blackberry: 321-354-5901

email: ed.godwin@disney.com

-----Original Message-----

From: Friday, Barbara [mailto:Barbara.Friday@dep.state.fl.us]
Sent: Thursday, October 26, 2006 11:21 AM
To: Lee.Schmudee@disney.com; Godwin, Ed; Kozlov, Leonard
Cc: Cascio, Tom
Subject: DRAFT Title V Permit Revision No.: 0950111-027-ÄV - Walt Disney World Company/Walt Disney World Resort Complex

Dear Sir/Madam:

Please send a "reply" message verifying receipt of the attached document(s); this may be done by selecting "Reply" on the menu bar of your e-mail software and then selecting "Send". We must receive verification of receipt and your reply will preclude subsequent e-mail transmissions to verify receipt of the document(s).

The document(s) may require immediate action within a specified time frame. Please open and review the document(s) as soon as possible.

The document is in Adobe Portable Document Format (pdf). Adobe Acrobat Reader can be downloaded for free at the following internet site: <http://www.adobe.com/products/acrobat/readstep.html>.

10/26/2006

The Bureau of Air Regulation is issuing electronic documents for permits, notices and other correspondence in lieu of hard copies through the United States Postal System, to provide greater service to the applicant and the engineering community. Please advise this office of any changes to your e-mail address or that of the Engineer-of-Record.

Thank you,

DEP, Bureau of Air Regulation

Friday, Barbara

From: Kozlov, Leonard
To: Friday, Barbara
Sent: Thursday, October 26, 2006 4:08 PM
Subject: Read: DRAFT Title V Permit Revision No.: 0950111-027-AV - Walt Disney World Company/Walt Disney World Resort Complex

Your message

To: 'Lee.Schmudee@disney.com'; 'Ed.Godwin@disney.com'; Kozlov, Leonard
Cc: Cascio, Tom
Subject: DRAFT Title V Permit Revision No.: 0950111-027-AV - Walt Disney World Company/Walt Disney World Resort Complex
Sent: 10/26/2006 11:21 AM

was read on 10/26/2006 4:08 PM.

MEMORANDUM

To: Trina Vielhauer
Through: Al Linero *AL*
From: Tom Cascio *10M*
Date: October 9, 2006
Subject: Intent Package for Title V Air Operation Permit Revision No. **0950111-027-AV**
Walt Disney World Resort Complex (Reedy Creek Improvement District)

This Title V Permit Revision incorporates the specific conditions of air construction permits 0950111-025-AC and 0950111-026-AC. 0950111-025-AC authorized the replacement of the existing LM 5000 gas turbine (EU-088) with an LM 6000PC gas turbine. 0950111-026-AC modified 0950111-025-AC to allow a maximum heat input of 505 mmBtu/hr, and addressed NOx average calculations and recording.

The current Title V Permit has the "Heat Input Permitting Note". This note was removed in the revision because we believe it is no longer appropriate in the permit document. *

We recommend your signature and forwarding to Patty for processing.

* The replacement CT is larger than the original. Heat input limitation directly affects ability to avoid PSD applicability. Latest (recent) AC has enforceable heat input limit.

*TRINA -
WE DISCUSSED
THIS W/ JEFF.
HE AGREES NO
CHANGES REQUIRED.
10M*

Cascio, Tom

From: Shine, Caroline
Sent: Wednesday, September 06, 2006 2:27 PM
To: Cascio, Tom
Subject: RE: WALT DISNEY WORLD

Not at this time.

-----Original Message-----

From: Cascio, Tom
Sent: Wednesday, September 06, 2006 2:21 PM
To: Shine, Caroline
Subject: WALT DISNEY WORLD

Hi Caroline. Are there any outstanding compliance and/or enforcement issues with the Walt Disney World Company? Thanks for your help.

Tom Cascio, D.B.A., CPM
Engineering Specialist IV
Permitting South Section
Florida Department of Environmental Protection
850-921-9526