



# Florida Department of Environmental Protection

Bob Martinez Center  
2600 Blair Stone Road  
Tallahassee, Florida 32399-2400

Charlie Crist  
Governor

Jeff Kottkamp  
Lt. Governor

Michael W. Sole  
Secretary

## PERMITTEE:

Northern Star Generation Services  
Orlando Cogen Limited L.P.  
8275 Exchange Drive  
Orlando, Florida 32809

Orlando Cogen Plant  
Air Permit No. 0950203-007-AC  
Facility ID No. 0950203  
SIC No. 4931  
Permit Expires: March 31, 2009

## Authorized Representative:

Mr. Jim Murray, Plant Manager

## PROJECT AND LOCATION

This permit authorizes the permittee to replace the rotor (power) section and to physically upgrade the existing Alstom combustion turbine from a Model GT 11NM to a Model GT 11NMC by replacement of key components in the compressor section.

The combustion turbine is part of a natural-gas-fired combined cycle unit that produces electrical power and steam at the existing Orlando Cogeneration Plant, which is located in Orange County at 8275 Exchange Drive, Orlando, Florida. The UTM coordinates are Zone 17, 459.5 km East, and 3146.1 km North.

## STATEMENT OF BASIS

This air pollution construction permit is issued under the provisions of Chapter 403 of the Florida Statutes (F.S.), and Chapters 62-4, 62-204, 62-210, 62-212, 62-296, and 62-297 of the Florida Administrative Code (F.A.C.) and Title 40, Part 60 of the Code of Federal Regulations (CFR). The permittee is authorized to install the proposed equipment in accordance with the conditions of this permit and as described in the application, approved drawings, plans, and other documents on file with the Department.

## CONTENTS

- Section 1. General Information
- Section 2. Administrative Requirements
- Section 3. Emissions Units Specific Conditions
- Section 4. Appendices

(FINAL)

 2/6/08  
Joseph Kahn, Director (Date)  
Division of Air Resource Management

## SECTION 1. GENERAL INFORMATION

### FACILITY AND PROJECT DESCRIPTION

The existing facility consists of a natural gas-fired combined cycle unit. The combined cycle unit includes: a Alstom combustion turbine-electrical generator (CT); a heat recovery steam generator (HRSG) with a duct burner (DB) system; and a nominal 50 megawatts (MW) steam turbine-electrical generator (ST).

This permit authorizes the permittee to replace the rotor (power) section of the CT and to physically upgrade it from a Model GT 11NM to a Model GT 11NMC by replacement of key components in the compressor section of the CT with improved ones. The upgrade will occur in conjunction with a like-kind replacement of the rotor (power) section of the CT. The permit recognizes the increase in the nominal power rating of the combustion turbine as a result of the present and previous projects from 79 to 86.8 MW at the International Standards Organization (ISO) conditions of 59 degrees Fahrenheit and 1 atmosphere of pressure. The total power rating of the combined cycle unit including the CT and the ST is 136.8 MW.

The permit also recognizes the applicability to the combined cycle unit of 40 Code of Federal Regulations Part 60, Subpart KKKK – Standards of Performance for Stationary Combustion Turbines (Subpart KKKK).

The following emissions units (EU) are affected by this permitting action.

EU ID	Emission Unit Description (after the project)
001	A nominal 86.8 MW (ISO) Alstom Model GT 11NMC natural gas-fired combustion turbine
002	A heat recovery steam generator with a natural gas-fired duct burner system having a maximum heat input capacity of 122 million British Thermal Units per hour (MMBtu/hr)

### REGULATORY CLASSIFICATION

The facility is not a major source of hazardous air pollutants (HAP).

The combined cycle unit is subject to the acid rain provisions of the Clean Air Act (CAA).

The facility is a Title V major source of air pollution in accordance with Chapter 213, F.A.C.

The facility is a Prevention of Significant Deterioration (PSD) major source of air pollution in accordance with Rule 62-212.400, F.A.C.

The combined cycle unit is subject to 40 CFR 60, Subpart KKKK - Standards of Performance for Stationary Combustion Turbines.

### RELEVANT DOCUMENTS

The permit application and additional information received to make it complete are not a part of this permit; however, the information is specifically related to this permitting action and is on file with the Department. This minor source air construction permit supplements Permit No. 0950203-005-AC issued in 2006 and the original Permit No. PSD-FL-184 issued in 1992.

Unless otherwise specified, the gas turbine remains subject to the applicable terms and conditions of the two mentioned permit (and their modifications) as well as the current Title V Air Operation Permit (0950203-006-AV).

## SECTION 2. ADMINISTRATIVE REQUIREMENTS

---

### REQUIREMENTS

1. Permitting Authority: All documents related to applications for permits to construct, modify, or operate emissions units regulated by this permit shall be submitted to the Bureau of Air Regulation of the Florida Department of Environmental Protection (FDEP) at 2600 Blair Stone Road Mail Station (MS) #5505, Tallahassee, Florida 32399-2400.
2. Compliance Authority: All documents related to compliance activities such as reports, tests, and notifications shall be submitted to the Air Resource Section of the Orange County Environmental Protection Division, 800 Mercy Drive, Orlando, Florida 32808.
3. Appendices: The following Appendices are attached as part of this permit: Appendix A (related to 40 CFR 60, Subpart A); Appendix GC (General Conditions); Appendix CC (Common Conditions); and Appendix KKKK (related to 40 CFR 60, Subpart KKKK).
4. Applicable Regulations, Forms and Application Procedures: Unless otherwise indicated in this permit, the construction and operation of the subject emissions unit shall be in accordance with the capacities and specifications stated in the application. The facility is subject to all applicable provisions of: Chapter 403 of the Florida Statutes (F.S.); Chapters 62-4, 62-204, 62-210, 62-212, 62-213, 62-296, and 62-297 of the Florida Administrative Code (F.A.C.); and Title 40, Part 60 of the CFR, adopted by reference in Rule 62-204.800, F.A.C. The terms used in this permit have specific meanings as defined in the applicable chapters of the F.A.C. The permittee shall use the applicable forms listed in Rule 62-210.900, F.A.C. and follow the application procedures in Chapter 62-4, F.A.C. Issuance of this permit does not relieve the permittee from compliance with any applicable federal, state, or local permitting or regulations. [Rules 62-204.800, 62-210.300 and 62-210.900, F.A.C.]
5. New or Additional Conditions: For good cause shown and after notice and an administrative hearing, if requested, the Department may require the permittee to conform to new or additional conditions. The Department shall allow the permittee a reasonable time to conform to the new or additional conditions, and on application of the permittee, the Department may grant additional time. [Rule 62-4.080, F.A.C.]
6. Modifications: The permittee shall notify the Compliance Authority upon commencement of construction. No emissions unit or facility subject to this permit shall be constructed or modified without obtaining an air construction permit from the Department. Such permit shall be obtained prior to beginning construction or modification. [Rules 62-210.300(1) and 62-212.300(1)(a), F.A.C.]
7. Title V Permit: The permittee shall apply for a Title V operation permit at least 90 days prior to expiration of this permit, but no later than 180 days after completing the gas turbine upgrade to a Model GT 11NMC model and commencing operation. To apply for a Title V operation permit, the applicant shall submit the appropriate application form, compliance test results, and such additional information as the Department may by law require. The application shall be submitted to the appropriate Permitting Authority with copies to the Compliance Authority. [Rules 62-4.030, 62-4.050, 62-4.220, and Chapter 62-213, F.A.C.]

### SECTION 3. EMISSIONS UNIT SPECIFIC CONDITIONS

#### Combined Cycle Unit (EU-001 and 002)

This section of the permit addresses the following emissions units.

ID	Emission Unit Description (after the project)
001	A nominal 86.8 MW (ISO) Alstom Model GT 11NMC natural gas-fired combustion turbine
002	A heat recovery steam generator with a natural gas-fired duct burner system having a maximum heat input capacity of 122 million British Thermal Units per hour (MMBtu/hr)

#### ADMINISTRATIVE REQUIREMENTS

1. Previous Permit Conditions: Unless otherwise specified, issuance of this permit does not alter any requirements established in any previously issued air construction or Title V operation permits for the existing gas turbine. Except as specified below, the conditions of this minor air construction permit supplement, and are in addition to, all current valid requirements. [Rule 62-210.300, F.A.C.]

#### NEWLY APPLICABLE REGULATORY REQUIREMENTS AND EXEMPTIONS

2. New Source Performance Standards (NSPS): The combined cycle unit including the combustion turbine, heat recovery steam generator and duct burner system are subject to 40 CFR 60, Subpart KKKK – Standards of Performance for Stationary Combustion Turbines. The project is subject to applicable requirements of 40 CFR 60, Subpart A – General Provisions. [Rule 62-204.800, F.A.C.; 40 CFR 60, Subparts A and KKKK]
3. Exemption from certain NSPS: Upon completion of the project, the combustion turbine regulated under 40 CFR 60, Subpart KKKK is exempt from the requirements of 40 CFR 60, Subpart GG – Standards of Performance for Stationary Gas Turbines. Upon completion of the project, the heat recovery steam generator and duct burner system regulated under 40 CFR 60, Subpart KKKK are exempted from the requirements of 40 CFR 60, Subpart Db – Standards of Performance for Small Industrial-Commercial-Institutional Steam Generating Units. [Rule 62-204.800, F.A.C.; 40 CFR 60.4305(b)]

#### PROPOSED PROJECTS

4. Rotor Replacement: The permittee is authorized to replace the rotor (power) section of the CT. [Application]
5. Gas Turbine Upgrade: The permittee is authorized to upgrade the CT from a Model GT 11NM to a Model GT 11NMC by replacing the following compressor components with improved parts:
  - Row #1 – 17 compressor blades;
  - Row #1 – 18 inlet compressor guide vanes; and
  - Stage #18 filler pieces.[Application]
6. Notifications: Within one week of beginning construction on the project, the permittee shall provide notification that construction has commenced including a schedule for completing the project. The permittee shall also provide notice if a project will not be constructed. The schedule shall be updated for any major changes as necessary. [Rule 6-4.070(3), F.A.C.]

**SECTION 3. EMISSIONS UNIT SPECIFIC CONDITIONS**

**Combined Cycle Unit (EU-001 and 002)**

**EMISSION LIMITS APPLICABLE TO EMISSIONS UNITS**

7. Emission Limits: The emission limits applicable to the CT (EU 001) and the DB (EU 002) are listed in Table 1. The maximum allowable emissions from this facility shall not exceed the following emission rates:

**Table 1**

Pollutant	Source	Allowable Emission Standard/Limitation
NO <sub>x</sub>	CT	15 ppmvd @ 15% O <sub>2</sub> (63.1 lb/hr; 251.4 TPY)
	DB	0.1 lb/MMBtu (12.2 lbs/hr; 22.5 TPY)
	CT, CT/DB	24-hr rolling average (applies to lb/hr emission limits)
	DB	Annual Testing
	CT with DB	15 ppmvd @ 15% O <sub>2</sub> on a 30 unit-days rolling average per 40 CFR 60, Subpart KKKK
CO	CT	10 ppmvd (22.3 lbs/hr; 92.1 TPY)
	DB	0.1 lb/MMBtu (12.2 lbs/hr; 22.5 TPY)
PM/PM <sub>10</sub>	CT	0.01 lb/MMBtu (9.9 lbs/hr; 43.3 TPY)
	DB	0.01 lb/MMBtu (1.2 lbs/hr; 2.2 TPY)
VOC	CT	3.3 lbs/hr; 14.3 TPY
	DB	3.7 lbs/hr; 6.8 TPY
VE	CT/DB	≤ 10% opacity
SO <sub>2</sub>	CT and DB	0.90 pounds megawatt-hour gross output or 0.060 pounds per MMBtu heat input per 40 CFR 60, Subpart KKKK)

**NOTE:**

1. CT: combustion turbine  
DB: duct burner
2. Natural gas usage only in the CT and DB.
3. Hours of operation:
  - a. CT: 8760 hrs/yr
  - b. DB: 3688 hrs/yr (at a maximum rate of 122.0 x 10<sup>6</sup> Btu/hr)
4. Maximum heat input:
  - a. CT: 980 x 10<sup>6</sup> Btu/hr
  - b. DB: 3688 hrs/yr (at a maximum rate of 122.0 x 10<sup>6</sup> Btu/hr)
5. DB operation planned when ambient temperature is greater than 59° F.

### SECTION 3. EMISSIONS UNIT SPECIFIC CONDITIONS

#### Combined Cycle Unit (EU-001 and 002)

The gas turbine remains subject to all other applicable conditions of Permit No. PSD-FL-184 and Permit No. 0950203-005-AC except as modified by Specific Conditions 2, 3 and 7 of this permit. Conditions in the Title V operation permit for this facility (0950203-006-AV) will be revised to reflect the changes authorized by this permit, including modifying Specific Conditions C.0 and C.22 to reflect emission changes allowed by this permit.

*{Permitting Note: The emission limits listed in Table 1 relating to 40 CFR Part 60, Subpart KKKK - Standards of Performance for Stationary Combustion Turbines and the associated requirements and conditions are contained in Appendix KKKK}*

[Application No. 0950203-007-AC]

#### TESTING REQUIREMENTS

8. Subpart KKKK Testing Requirements: Refer to Appendix KKKK for the NO<sub>x</sub> and SO<sub>2</sub> emission testing and compliance requirements pursuant to 40 CFR 60, Subpart KKKK.
9. Continuous Emissions Monitoring System (CEMS) for NO<sub>x</sub>: The existing CEMS presently used to demonstrate compliance with the requirements in previous permits shall also be used to demonstrate compliance with the NO<sub>x</sub> limits pursuant to 40 CFR 60, Subpart KKKK.
10. Initial CO Compliance Tests: The gas turbine shall be tested to compliance with the existing emissions standards for CO specified in the Title V permit. An initial test shall be conducted simultaneously with the testing required pursuant to 40 CFR 60, Subparts A and KKKK. The tests shall consist of at least three 1-hour test runs conducted in accordance with EPA Method 10 and EPA Methods 1-4 as necessary. For each CO test run, NO<sub>x</sub> emissions data collected from the installed CEMS shall also be reported. Tests shall be conducted within 90% of the maximum heat input rate given actual ambient conditions.

[Rule 62-297.310(7)(a)1, F.A.C.]

#### ANNUAL REPORTING

11. Future Actual Emissions Reporting. The permittee shall maintain and submit to the Department on an annual basis for a period of 5 years from the date the upgraded 11 NMC combustion turbine is placed in operation, information demonstrating in accordance with Rule 62-212.300(1)(e), F.A.C., using the emissions computation and reporting procedures in Rule 62-210.370, F.A.C., that the implementation of the initiative did not result in an emissions increase of CO and NO<sub>x</sub> that would equal or exceed the respective significant emission rate as defined in Rule 62-210.200, F.A.C. The baseline emissions for operation prior to the project are 3 tons per year of CO and 233 tons per year of NO<sub>x</sub>.

[Rule 62-212.300(1)(e), F.A.C.]

**SECTION 4. APPENDICES**

---

**CONTENTS**

Appendix A NSPS Subpart A

Appendix GC. General Conditions

Appendix CC. Common Conditions

Appendix KKKK. NSPS Subpart KKKK

SECTION 4 - APPENDIX A  
NSPS SUBPART A

---

The provisions of this Subpart may be provided in full upon request. Emissions units subject to a New Source Performance Standard of 40 CFR 60 are also subject to the applicable requirements of Subpart A, the General Provisions, including:

- § 60.1 Applicability.
- § 60.2 Definitions.
- § 60.3 Units and abbreviations.
- § 60.4 Address.
- § 60.5 Determination of construction or modification.
- § 60.6 Review of plans.
- § 60.7 Notification and Record Keeping.
- § 60.8 Performance Tests.
- § 60.9 Availability of information.
- § 60.10 State Authority.
- § 60.11 Compliance with Standards and Maintenance Requirements.
- § 60.12 Circumvention.
- § 60.13 Monitoring Requirements.
- § 60.14 Modification.
- § 60.15 Reconstruction.
- § 60.16 Priority List.
- § 60.17 Incorporations by Reference.
- § 60.18 General Control Device Requirements.
- § 60.19 General Notification and Reporting Requirements.

Individual subparts may exempt specific equipment or processes from some or all of these requirements. The general provisions may be provided in full upon request.



SECTION 4 - APPENDIX GC  
GENERAL CONDITIONS

---

The permittee shall comply with the following general conditions from Rule 62-4.160, F.A.C.

1. The terms, conditions, requirements, limitations, and restrictions set forth in this permit are "Permit Conditions" and are binding and enforceable pursuant to Sections 403.161, 403.727, or 403.859 through 403.861, Florida Statutes. The permittee is placed on notice that the Department will review this permit periodically and may initiate enforcement action for any violation of these conditions.
2. This permit is valid only for the specific processes and operations applied for and indicated in the approved drawings or exhibits. Any unauthorized deviation from the approved drawings, exhibits, specifications, or conditions of this permit may constitute grounds for revocation and enforcement action by the Department.
3. As provided in Subsections 403.087(6) and 403.722(5), Florida Statutes, the issuance of this permit does not convey and vested rights or any exclusive privileges. Neither does it authorize any injury to public or private property or any invasion of personal rights, nor any infringement of federal, state or local laws or regulations. This permit is not a waiver or approval of any other Department permit that may be required for other aspects of the total project which are not addressed in the permit.
4. This permit conveys no title to land or water, does not constitute State recognition or acknowledgment of title, and does not constitute authority for the use of submerged lands unless herein provided and the necessary title or leasehold interests have been obtained from the State. Only the Trustees of the Internal Improvement Trust Fund may express State opinion as to title.
5. This permit does not relieve the permittee from liability for harm or injury to human health or welfare, animal, or plant life, or property caused by the construction or operation of this permitted source, or from penalties therefore; nor does it allow the permittee to cause pollution in contravention of Florida Statutes and Department rules, unless specifically authorized by an order from the Department.
6. The permittee shall properly operate and maintain the facility and systems of treatment and control (and related appurtenances) that are installed or used by the permittee to achieve compliance with the conditions of this permit, as required by Department rules. This provision includes the operation of backup or auxiliary facilities or similar systems when necessary to achieve compliance with the conditions of the permit and when required by Department rules.
7. The permittee, by accepting this permit, specifically agrees to allow authorized Department personnel, upon presentation of credentials or other documents as may be required by law and at a reasonable time, access to the premises, where the permitted activity is located or conducted to:
  - a. Have access to and copy and records that must be kept under the conditions of the permit;
  - b. Inspect the facility, equipment, practices, or operations regulated or required under this permit, and,
  - c. Sample or monitor any substances or parameters at any location reasonably necessary to assure compliance with this permit or Department rules.

Reasonable time may depend on the nature of the concern being investigated.

8. If, for any reason, the permittee does not comply with or will be unable to comply with any condition or limitation specified in this permit, the permittee shall immediately provide the Department with the following information:
  - a. A description of and cause of non-compliance; and
  - b. The period of noncompliance, including dates and times; or, if not corrected, the anticipated time the non-compliance is expected to continue, and steps being taken to reduce, eliminate, and prevent recurrence of the non-compliance.

The permittee shall be responsible for any and all damages which may result and may be subject to enforcement action by the Department for penalties or for revocation of this permit.

SECTION 4 - APPENDIX GC  
GENERAL CONDITIONS

9. In accepting this permit, the permittee understands and agrees that all records, notes, monitoring data and other information relating to the construction or operation of this permitted source which are submitted to the Department may be used by the Department as evidence in any enforcement case involving the permitted source arising under the Florida Statutes or Department rules, except where such use is prescribed by Sections 403.73 and 403.111, Florida Statutes. Such evidence shall only be used to the extent it is consistent with the Florida Rules of Civil Procedure and appropriate evidentiary rules.
10. The permittee agrees to comply with changes in Department rules and Florida Statutes after a reasonable time for compliance, provided, however, the permittee does not waive any other rights granted by Florida Statutes or Department rules.
11. This permit is transferable only upon Department approval in accordance with Florida Administrative Code Rules 62-4.120 and 62-730.300, F.A.C., as applicable. The permittee shall be liable for any non-compliance of the permitted activity until the transfer is approved by the Department.
12. This permit or a copy thereof shall be kept at the work site of the permitted activity.
13. This permit also constitutes:
  - a. Determination of Best Available Control Technology ( );
  - b. Determination of Prevention of Significant Deterioration ( );
  - c. Compliance with New Source Performance Standards (X); and
  - d. Compliance with National Emission Standards for Hazardous Air Pollutants for Source Categories ( ).
14. The permittee shall comply with the following:
  - a. Upon request, the permittee shall furnish all records and plans required under Department rules. During enforcement actions, the retention period for all records will be extended automatically unless otherwise stipulated by the Department.
  - b. The permittee shall hold at the facility or other location designated by this permit records of all monitoring information (including all calibration and maintenance records and all original strip chart recordings for continuous monitoring instrumentation) required by the permit, copies of all reports required by this permit, and records of all data used to complete the application or this permit. These materials shall be retained at least three years from the date of the sample, measurement, report, or application unless otherwise specified by Department rule.
  - c. Records of monitoring information shall include:
    - 1) The date, exact place, and time of sampling or measurements;
    - 2) The person responsible for performing the sampling or measurements;
    - 3) The dates analyses were performed;
    - 4) The person responsible for performing the analyses;
    - 5) The analytical techniques or methods used; and
    - 6) The results of such analyses.
15. When requested by the Department, the permittee shall within a reasonable time furnish any information required by law which is needed to determine compliance with the permit. If the permittee becomes aware that relevant facts were not submitted or were incorrect in the permit application or in any report to the Department, such facts or information shall be corrected promptly.

SECTION 4 - APPENDIX CC  
COMMON CONDITIONS

---

*{Permitting Note: Unless otherwise specified in the permit, the following conditions apply to all emissions units and activities at the facility.}*

**EMISSIONS AND CONTROLS**

1. **Plant Operation - Problems:** If temporarily unable to comply with any of the conditions of the permit due to breakdown of equipment or destruction by fire, wind or other cause, the permittee shall notify each Compliance Authority as soon as possible, but at least within one working day, excluding weekends and holidays. The notification shall include: pertinent information as to the cause of the problem; steps being taken to correct the problem and prevent future recurrence; and, where applicable, the owner's intent toward reconstruction of destroyed facilities. Such notification does not release the permittee from any liability for failure to comply with the conditions of this permit or the regulations. [Rule 62-4.130, F.A.C.]
2. **Circumvention:** The permittee shall not circumvent the air pollution control equipment or allow the emission of air pollutants without this equipment operating properly. [Rule 62-210.650, F.A.C.]
3. **Excess Emissions Allowed:** Excess emissions resulting from startup, shutdown or malfunction of any emissions unit shall be permitted providing (1) best operational practices to minimize emissions are adhered to and (2) the duration of excess emissions shall be minimized but in no case exceed two hours in any 24 hour period unless specifically authorized by the Department for longer duration. [Rule 62-210.700(1), F.A.C.]
4. **Excess Emissions Prohibited:** Excess emissions caused entirely or in part by poor maintenance, poor operation, or any other equipment or process failure that may reasonably be prevented during startup, shutdown or malfunction shall be prohibited. [Rule 62-210.700(4), F.A.C.]
5. **Excess Emissions - Notification:** In case of excess emissions resulting from malfunctions, the permittee shall notify the Department or the appropriate Local Program in accordance with Rule 62-4.130, F.A.C. A full written report on the malfunctions shall be submitted in a quarterly report, if requested by the Department. [Rule 62-210.700(6), F.A.C.]
6. **VOC or OS Emissions:** No person shall store, pump, handle, process, load, unload or use in any process or installation, volatile organic compounds or organic solvents without applying known and existing vapor emission control devices or systems deemed necessary and ordered by the Department. [Rule 62-296.320(1), F.A.C.]
7. **Objectionable Odor Prohibited:** No person shall cause, suffer, allow or permit the discharge of air pollutants, which cause or contribute to an objectionable odor. An "objectionable odor" means any odor present in the outdoor atmosphere which by itself or in combination with other odors, is or may be harmful or injurious to human health or welfare, which unreasonably interferes with the comfortable use and enjoyment of life or property, or which creates a nuisance. [Rules 62-296.320(2) and 62-210.200(203), F.A.C.]
8. **General Visible Emissions:** No person shall cause, let, permit, suffer or allow to be discharged into the atmosphere the emissions of air pollutants from any activity equal to or greater than 20 percent opacity. This regulation does not impose a specific testing requirement. [Rule 62-296.320(4)(b)1, F.A.C.]
9. **Unconfined Particulate Emissions:** During the construction period, unconfined particulate matter emissions shall be minimized by dust suppressing techniques such as covering and/or application of water or chemicals to the affected areas, as necessary. [Rule 62-296.320(4)(c), F.A.C.]

***Testing Requirements***

10. **Required Number of Test Runs:** For mass emission limitations, a compliance test shall consist of three complete and separate determinations of the total air pollutant emission rate through the test section of the stack or duct and three complete and separate determinations of any applicable process variables

SECTION 4 - APPENDIX CC  
COMMON CONDITIONS

corresponding to the three distinct time periods during which the stack emission rate was measured; provided, however, that three complete and separate determinations shall not be required if the process variables are not subject to variation during a compliance test, or if three determinations are not necessary in order to calculate the unit's emission rate. The three required test runs shall be completed within one consecutive five-day period. In the event that a sample is lost or one of the three runs must be discontinued because of circumstances beyond the control of the owner or operator, and a valid third run cannot be obtained within the five-day period allowed for the test, the Secretary or his or her designee may accept the results of two complete runs as proof of compliance, provided that the arithmetic mean of the two complete runs is at least 20% below the allowable emission limiting standard. [Rule 62-297.310(1), F.A.C.]

11. Operating Rate during Testing: Testing of emissions shall be conducted with the emissions unit operating at permitted capacity. Permitted capacity is defined as 90 to 100 percent of the maximum operation rate allowed by the permit. If it is impractical to test at permitted capacity, an emissions unit may be tested at less than the maximum permitted capacity; in this case, subsequent emissions unit operation is limited to 110 percent of the test rate until a new test is conducted. Once the unit is so limited, operation at higher capacities is allowed for no more than 15 consecutive days for the purpose of additional compliance testing to regain the authority to operate at the permitted capacity. [Rule 62-297.310(2), F.A.C.]
12. Calculation of Emission Rate: For each emissions performance test, the indicated emission rate or concentration shall be the arithmetic average of the emission rate or concentration determined by each of the three separate test runs unless otherwise specified in a particular test method or applicable rule. [Rule 62-297.310(3), F.A.C.]
13. Test Procedures: Tests shall be conducted in accordance with all applicable requirements of Chapter 62-297, F.A.C.
  - a. *Required Sampling Time*. Unless otherwise specified in the applicable rule, the required sampling time for each test run shall be no less than one hour and no greater than four hours, and the sampling time at each sampling point shall be of equal intervals of at least two minutes. The minimum observation period for a visible emissions compliance test shall be thirty (30) minutes. The observation period shall include the period during which the highest opacity can reasonably be expected to occur.
  - b. *Minimum Sample Volume*. Unless otherwise specified in the applicable rule or test method, the minimum sample volume per run shall be 25 dry standard cubic feet.
  - c. *Calibration of Sampling Equipment*. Calibration of the sampling train equipment shall be conducted in accordance with the schedule shown in Table 297.310-1, F.A.C.

[Rule 62-297.310(4), F.A.C.]

14. Determination of Process Variables

- a. *Required Equipment*. The owner or operator of an emissions unit for which compliance tests are required shall install, operate, and maintain equipment or instruments necessary to determine process variables, such as process weight input or heat input, when such data are needed in conjunction with emissions data to determine the compliance of the emissions unit with applicable emission limiting standards.
- b. *Accuracy of Equipment*. Equipment or instruments used to directly or indirectly determine process variables, including devices such as belt scales, weight hoppers, flow meters, and tank scales, shall be calibrated and adjusted to indicate the true value of the parameter being measured with sufficient accuracy to allow the applicable process variable to be determined within 10% of its true value.

[Rule 62-297.310(5), F.A.C.]

## SECTION 4 - APPENDIX CC

### COMMON CONDITIONS

---

15. Sampling Facilities: The permittee shall install permanent stack sampling ports and provide sampling facilities that meet the requirements of Rule 62-297.310(6), F.A.C.
16. Test Notification: The owner or operator shall notify the Department, at least 15 days prior to the date on which each formal compliance test is to begin, of the date, time, and place of each such test, and the test contact person who will be responsible for coordinating and having such test conducted for the owner or operator. [Rule 62-297.310(7)(a)9, F.A.C.]
17. Special Compliance Tests: When the Department, after investigation, has good reason (such as complaints, increased visible emissions or questionable maintenance of control equipment) to believe that any applicable emission standard contained in a Department rule or in a permit issued pursuant to those rules is being violated, it shall require the owner or operator of the emissions unit to conduct compliance tests which identify the nature and quantity of pollutant emissions from the emissions unit and to provide a report on the results of said tests to the Department. [Rule 62-297.310(7)(b), F.A.C.]
18. Test Reports: The owner or operator of an emissions unit for which a compliance test is required shall file a report with the Department on the results of each such test. The required test report shall be filed with the Department as soon as practical but no later than 45 days after the last sampling run of each test is completed. The test report shall provide sufficient detail on the emissions unit tested and the test procedures used to allow the Department to determine if the test was properly conducted and the test results properly computed. As a minimum, the test report, other than for an EPA or DEP Method 9 test, shall provide the following information:
  1. The type, location, and designation of the emissions unit tested.
  2. The facility at which the emissions unit is located.
  3. The owner or operator of the emissions unit.
  4. The normal type and amount of fuels used and materials processed, and the types and amounts of fuels used and material processed during each test run.
  5. The means, raw data and computations used to determine the amount of fuels used and materials processed, if necessary to determine compliance with an applicable emission limiting standard.
  6. The type of air pollution control devices installed on the emissions unit, their general condition, their normal operating parameters (pressure drops, total operating current and GPM scrubber water), and their operating parameters during each test run.
  7. A sketch of the duct within 8 stack diameters upstream and 2 stack diameters downstream of the sampling ports, including the distance to any upstream and downstream bends or other flow disturbances.
  8. The date, starting time and duration of each sampling run.
  9. The test procedures used, including any alternative procedures authorized pursuant to Rule 62-297.620, F.A.C. Where optional procedures are authorized in this chapter, indicate which option was used.
  10. The number of points sampled and configuration and location of the sampling plane.
  11. For each sampling point for each run, the dry gas meter reading, velocity head, pressure drop across the stack, temperatures, average meter temperatures and sample time per point.
  12. The type, manufacturer and configuration of the sampling equipment used.
  13. Data related to the required calibration of the test equipment.
  14. Data on the identification, processing and weights of all filters used.
  15. Data on the types and amounts of any chemical solutions used.
  16. Data on the amount of pollutant collected from each sampling probe, the filters, and the impingers, are reported separately for the compliance test.

SECTION 4 - APPENDIX CC  
COMMON CONDITIONS

---

17. The names of individuals who furnished the process variable data, conducted the test, analyzed the samples and prepared the report.
18. All measured and calculated data required to be determined by each applicable test procedure for each run.
19. The detailed calculations for one run that relate the collected data to the calculated emission rate.
20. The applicable emission standard and the resulting maximum allowable emission rate for the emissions unit plus the test result in the same form and unit of measure.
21. A certification that, to the knowledge of the owner or his authorized agent, all data submitted are true and correct. When a compliance test is conducted for the Department or its agent, the person who conducts the test shall provide the certification with respect to the test procedures used. The owner or his authorized agent shall certify that all data required and provided to the person conducting the test are true and correct to his knowledge.

[Rule 62-297.310(8), F.A.C.]

**RECORDS AND REPORTS**

19. Records Retention: All measurements, records, and other data required by this permit shall be documented in a permanent, legible format and retained for at least five (5) years following the date on which such measurements, records, or data are recorded. Records shall be made available to the Department upon request. [Rules 62-4.160(14) and 62-213.440(1)(b)2, F.A.C.]
20. Annual Operating Report: The permittee shall submit an annual report that summarizes the actual operating rates and emissions from this facility. Annual operating reports shall be submitted to the Compliance Authority by March 1st of each year. [Rule 62-210.370(2), F.A.C.]

**Subpart KKKK--Standards of Performance for Stationary Combustion Turbines**

**Introduction**

**40 CFR 60.4300 What is the purpose of this subpart?**

This subpart establishes emission standards and compliance schedules for the control of emissions from stationary combustion turbines that commenced construction, modification or reconstruction after February 18, 2005.

**Applicability**

**40 CFR 60.4305 Does this subpart apply to my stationary combustion turbine?**

- (a) If you are the owner or operator of a stationary combustion turbine with a heat input at peak load equal to or greater than 10.7 gigajoules (10 MMBtu) per hour, based on the higher heating value of the fuel, which commenced construction, modification, or reconstruction after February 18, 2005, your turbine is subject to this subpart. Only heat input to the combustion turbine should be included when determining whether or not this subpart is applicable to your turbine. Any additional heat input to associated heat recovery steam generators (HRSG) or duct burners should not be included when determining your peak heat input. However, this subpart does apply to emissions from any associated HRSG and duct burners.
- (b) Stationary combustion turbines regulated under this subpart are exempt from the requirements of subpart GG of 40 CFR 60. Heat recovery steam generators and duct burners regulated under this subpart are exempted from the requirements of subparts Da, Db, and Dc of 40 CFR 60.

**40 CFR 60.4310 What types of operations are exempt from these standards of performance?**

- (a) Emergency combustion turbines, as defined in 40 CFR 60.4420(i), are exempt from the nitrogen oxides (NO<sub>x</sub>) emission limits in 40 CFR 60.4320.
- (b) Stationary combustion turbines engaged by manufacturers in research and development of equipment for both combustion turbine emission control techniques and combustion turbine efficiency improvements are exempt from the NO<sub>x</sub> emission limits in 40 CFR 60.4320 on a case-by-case basis as determined by the Administrator.
- (c) Stationary combustion turbines at integrated gasification combined cycle electric utility steam generating units that are subject to subpart Da of 40 CFR 60 are exempt from this subpart.
- (d) Combustion turbine test cells/stands are exempt from this subpart.

**Emission Limits**

**40 CFR 60.4315 What pollutants are regulated by this subpart?**

The pollutants regulated by this subpart are nitrogen oxide (NO<sub>x</sub>) and sulfur dioxide (SO<sub>2</sub>).

**40 CFR 60.4320 What emission limits must I meet for nitrogen oxides (NO<sub>x</sub>)?**

- (a) You must meet the emission limits for NO<sub>x</sub> specified in Table 1 to this subpart.
- (b) If you have two or more turbines that are connected to a single generator, each turbine must meet the emission limits for NO<sub>x</sub>.

SECTION 4 - APPENDIX KKKK

40 CFR 60, SUBPART KKKK

**40 CFR 60.4325 What emission limits must I meet for NO<sub>x</sub> if my turbine burns both natural gas and distillate oil (or some other combination of fuels)?**

You must meet the emission limits specified in Table 1 to this subpart. If your total heat input is greater than or equal to 50 percent natural gas, you must meet the corresponding limit for a natural gas-fired turbine when you are burning that fuel. Similarly, when your total heat input is greater than 50 percent distillate oil and fuels other than natural gas, you must meet the corresponding limit for distillate oil and fuels other than natural gas for the duration of the time that you burn that particular fuel.

**40 CFR 60.4330 What emission limits must I meet for sulfur dioxide (SO<sub>2</sub>)?**

- (a) If your turbine is located in a continental area, you must comply with either paragraph (a)(1) or (a)(2) of this section. If your turbine is located in Alaska, you do not have to comply with the requirements in paragraph (a) of this section until January 1, 2008.
- (1) You must not cause to be discharged into the atmosphere from the subject stationary combustion turbine any gases which contain SO<sub>2</sub> in excess of 110 nanograms per Joule (ng/J) (0.90 pounds per megawatt-hour (lb/MWh)) gross output, or
  - (2) You must not burn in the subject stationary combustion turbine any fuel which contains total potential sulfur emissions in excess of 26 ng SO<sub>2</sub>/J (0.060 lb SO<sub>2</sub>/MMBtu) heat input. If your turbine simultaneously fires multiple fuels, each fuel must meet this requirement.
- (b) If your turbine is located in a noncontinental area or a continental area that the Administrator determines does not have access to natural gas and that the removal of sulfur compounds would cause more environmental harm than benefit, you must comply with one or the other of the following conditions:
- (1) You must not cause to be discharged into the atmosphere from the subject stationary combustion turbine any gases which contain SO<sub>2</sub> in excess of 780 ng/J (6.2 lb/MWh) gross output, or
  - (2) You must not burn in the subject stationary combustion turbine any fuel which contains total sulfur with potential sulfur emissions in excess of 180 ng SO<sub>2</sub>/J (0.42 lb SO<sub>2</sub>/MMBtu) heat input. If your turbine simultaneously fires multiple fuels, each fuel must meet this requirement.

**General Compliance Requirements**

**40 CFR 60.4333 What are my general requirements for complying with this subpart?**

- (a) You must operate and maintain your stationary combustion turbine, air pollution control equipment, and monitoring equipment in a manner consistent with good air pollution control practices for minimizing emissions at all times including during startup, shutdown, and malfunction.
- (b) When an affected unit with heat recovery utilizes a common steam header with one or more combustion turbines, the owner or operator shall either:
- (1) Determine compliance with the applicable NO<sub>x</sub> emissions limits by measuring the emissions combined with the emissions from the other unit(s) utilizing the common heat recovery unit; or
  - (2) Develop, demonstrate, and provide information satisfactory to the Administrator on methods for apportioning the combined gross energy output from the heat recovery unit for each of the affected combustion turbines. The Administrator may approve such demonstrated substitute methods for apportioning the combined gross energy output measured at the steam turbine whenever the demonstration ensures accurate estimation of emissions related under 40 CFR 60.

**Monitoring**

**40 CFR 60.4335 How do I demonstrate compliance for NO<sub>x</sub> if I use water or steam injection?**

- (a) If you are using water or steam injection to control NO<sub>x</sub> emissions, you must install, calibrate, maintain and operate a continuous monitoring system to monitor and record the fuel consumption and the ratio of water or steam to fuel being fired in the turbine when burning a fuel that requires water or steam injection for compliance.



SECTION 4 - APPENDIX KKKK

40 CFR 60, SUBPART KKKK

(b) Alternatively, you may use continuous emission monitoring, as follows:

- (1) Install, certify, maintain, and operate a continuous emission monitoring system (CEMS) consisting of a NO<sub>x</sub> monitor and a diluent gas (oxygen (O<sub>2</sub>) or carbon dioxide (CO<sub>2</sub>)) monitor, to determine the hourly NO<sub>x</sub> emission rate in parts per million (ppm) or pounds per million British thermal units (lb/MMBtu); and
- (2) For units complying with the output-based standard, install, calibrate, maintain, and operate a fuel flow meter (or flow meters) to continuously measure the heat input to the affected unit; and
- (3) For units complying with the output-based standard, install, calibrate, maintain, and operate a watt meter (or meters) to continuously measure the gross electrical output of the unit in megawatt-hours; and
- (4) For combined heat and power units complying with the output-based standard, install, calibrate, maintain, and operate meters for useful recovered energy flow rate, temperature, and pressure, to continuously measure the total thermal energy output in British thermal units per hour (Btu/h).

**40 CFR 60.4340 How do I demonstrate continuous compliance for NO<sub>x</sub> if I do not use water or steam injection?**

- (a) If you are not using water or steam injection to control NO<sub>x</sub> emissions, you must perform annual performance tests in accordance with 40 CFR 60.4400 to demonstrate continuous compliance. If the NO<sub>x</sub> emission result from the performance test is less than or equal to 75 percent of the NO<sub>x</sub> emission limit for the turbine, you may reduce the frequency of subsequent performance tests to once every 2 years (no more than 26 calendar months following the previous performance test). If the results of any subsequent performance test exceed 75 percent of the NO<sub>x</sub> emission limit for the turbine, you must resume annual performance tests.
- (b) As an alternative, you may install, calibrate, maintain and operate one of the following continuous monitoring systems:
  - (1) Continuous emission monitoring as described in 40 CFR 60.4335(b) and 40 CFR 60.4345, or
  - (2) Continuous parameter monitoring as follows:
    - (i) For a diffusion flame turbine without add-on selective catalytic reduction (SCR) controls, you must define parameters indicative of the unit's NO<sub>x</sub> formation characteristics, and you must monitor these parameters continuously.
    - (ii) For any lean premix stationary combustion turbine, you must continuously monitor the appropriate parameters to determine whether the unit is operating in low-NO<sub>x</sub> mode.
    - (iii) For any turbine that uses SCR to reduce NO<sub>x</sub> emissions, you must continuously monitor appropriate parameters to verify the proper operation of the emission controls.
    - (iv) For affected units that are also regulated under part 75 of 40 CFR, with state approval you can monitor the NO<sub>x</sub> emission rate using the methodology in appendix E to part 75 of 40 CFR, or the low mass emissions methodology in 40 CFR 75.19, the requirements of this paragraph (b) may be met by performing the parametric monitoring described in section 2.3 of 40 CFR 75 appendix E or in 40 CFR 75.19(c)(1)(iv)(H).

**40 CFR 60.4345 What are the requirements for the continuous emission monitoring system equipment, if I choose to use this option?**

If the option to use a NO<sub>x</sub> CEMS is chosen:

- (a) Each NO<sub>x</sub> diluent CEMS must be installed and certified according to Performance Specification 2 (PS 2) in appendix B to 40 CFR 60, except the 7-day calibration drift is based on unit operating days, not calendar days. With state approval, Procedure 1 in appendix F to 40 CFR 60 is not required. Alternatively, a NO<sub>x</sub> diluent CEMS that is installed and certified according to appendix A of part 75 of 40 CFR is acceptable for

SECTION 4 - APPENDIX KKKK

40 CFR 60, SUBPART KKKK

use under this subpart. The relative accuracy test audit (RATA) of the CEMS shall be performed on a lb/MMBtu basis.

- (b) As specified in 40 CFR 60.13(e)(2), during each full unit operating hour, both the NO<sub>x</sub> monitor and the diluent monitor must complete a minimum of one cycle of operation (sampling, analyzing, and data recording) for each 15-minute quadrant of the hour, to validate the hour. For partial unit operating hours, at least one valid data point must be obtained with each monitor for each quadrant of the hour in which the unit operates. For unit operating hours in which required quality assurance and maintenance activities are performed on the CEMS, a minimum of two valid data points (one in each of two quadrants) are required for each monitor to validate the NO<sub>x</sub> emission rate for the hour.
- (c) Each fuel flowmeter shall be installed, calibrated, maintained, and operated according to the manufacturer's instructions. Alternatively, with state approval, fuel flowmeters that meet the installation, certification, and quality assurance requirements of appendix D to part 75 of 40 CFR are acceptable for use under this subpart.
- (d) Each watt meter, steam flow meter, and each pressure or temperature measurement device shall be installed, calibrated, maintained, and operated according to manufacturer's instructions.
- (e) The owner or operator shall develop and keep on-site a quality assurance (QA) plan for all of the continuous monitoring equipment described in paragraphs (a), (c), and (d) of this section. For the CEMS and fuel flow meters, the owner or operator may, with state approval, satisfy the requirements of this paragraph by implementing the QA program and plan described in section 1 of appendix B to part 75 of 40 CFR.

**40 CFR 60.4350 How do I use data from the continuous emission monitoring equipment to identify excess emissions?**

For purposes of identifying excess emissions:

- (a) All CEMS data must be reduced to hourly averages as specified in 40 CFR 60.13(h).
- (b) For each unit operating hour in which a valid hourly average, as described in 40 CFR 60.4345(b), is obtained for both NO<sub>x</sub> and diluent monitors, the data acquisition and handling system must calculate and record the hourly NO<sub>x</sub> emission rate in units of ppm or lb/MMBtu, using the appropriate equation from method 19 in appendix A of 40 CFR 60. For any hour in which the hourly average O<sub>2</sub> concentration exceeds 19.0 percent O<sub>2</sub> (or the hourly average CO<sub>2</sub> concentration is less than 1.0 percent CO<sub>2</sub>), a diluent cap value of 19.0 percent O<sub>2</sub> or 1.0 percent CO<sub>2</sub> (as applicable) may be used in the emission calculations.
- (c) Correction of measured NO<sub>x</sub> concentrations to 15 percent O<sub>2</sub> is not allowed.
- (d) If you have installed and certified a NO<sub>x</sub> diluent CEMS to meet the requirements of part 75 of 40 CFR, states can approve that only quality assured data from the CEMS shall be used to identify excess emissions under this subpart. Periods where the missing data substitution procedures in subpart D of 40 CFR 75 are applied are to be reported as monitor downtime in the excess emissions and monitoring performance report required under 40 CFR 60.7(c).
- (e) All required fuel flow rate, steam flow rate, temperature, pressure, and megawatt data must be reduced to hourly averages.
- (f) Calculate the hourly average NO<sub>x</sub> emission rates, in units of the emission standards under 40 CFR 60.4320, using either ppm for units complying with the concentration limit or the following equation for units complying with the output based standard:
  - (1) For simple-cycle operation:

$$E = \frac{(NO_x)_h * (HI)_h}{P} \quad (\text{Eq. 1})$$

SECTION 4 - APPENDIX KKKK

40 CFR 60, SUBPART KKKK

Where:

E = hourly NO<sub>x</sub> emission rate, in lb/MWh,

(NO<sub>x</sub>)<sub>h</sub> = hourly NO<sub>x</sub> emission rate, in lb/MMBtu,

(HI)<sub>h</sub> = hourly heat input rate to the unit, in MMBtu/h, measured using the fuel flowmeter(s), e.g., calculated using Equation D-15a in appendix D to part 75 of 40 CFR, and

P = gross energy output of the combustion turbine in MW.

- (2) For combined-cycle and combined heat and power complying with the output-based standard, use Equation 1 of this subpart, except that the gross energy output is calculated as the sum of the total electrical and mechanical energy generated by the combustion turbine, the additional electrical or mechanical energy (if any) generated by the steam turbine following the heat recovery steam generator, and 100 percent of the total useful thermal energy output that is not used to generate additional electricity or mechanical output, expressed in equivalent MW, as in the following equations:

$$P = (PE)_t + (PE)_c + P_s + P_o \quad (\text{Eq. 2})$$

Where:

P = gross energy output of the stationary combustion turbine system in MW.

(Pe)<sub>t</sub> = electrical or mechanical energy output of the combustion turbine in MW,

(Pe)<sub>c</sub> = electrical or mechanical energy output (if any) of the steam turbine in MW, and

$$P_s = \frac{Q * H}{3.413 \times 10^6 \text{ Btu} / \text{MWh}} \quad (\text{Eq. 3})$$

Where:

P<sub>s</sub> = useful thermal energy of the steam, measured relative to ISO conditions, not used to generate additional electric or mechanical output, in MW,

Q = measured steam flow rate in lb/h,

H = enthalpy of the steam at measured temperature and pressure relative to ISO conditions, in Btu/lb, and 3.413 x 10<sup>6</sup> = conversion from Btu/h to MW.

P<sub>o</sub> = other useful heat recovery, measured relative to ISO conditions, not used for steam generation or performance enhancement of the combustion turbine.

- (3) For mechanical drive applications complying with the output-based standard, use the following equation:

$$E = \frac{(NO_x)_m}{BL * AL} \quad (\text{Eq. 4})$$

Where:

E = NO<sub>x</sub> emission rate in lb/MWh,

(NO<sub>x</sub>)<sub>m</sub> = NO<sub>x</sub> emission rate in lb/h,

BL = manufacturer's base load rating of turbine, in MW, and

AL = actual load as a percentage of the base load.

- (g) For simple cycle units without heat recovery, use the calculated hourly average emission rates from paragraph (f) of this section to assess excess emissions on a 4-hour rolling average basis, as described in 40 CFR 60.4380(b)(1).
- (h) For combined cycle and combined heat and power units with heat recovery, use the calculated hourly average emission rates from paragraph (f) of this section to assess excess emissions on a 30 unit operating day rolling average basis, as described in 40 CFR 60.4380(b)(1).

SECTION 4 - APPENDIX KKKK

40 CFR 60, SUBPART KKKK

**40 CFR 60.4355 How do I establish and document a proper parameter monitoring plan?**

- (a) The steam or water to fuel ratio or other parameters that are continuously monitored as described in 40 CFR 60.4335 and 40 CFR 60.4340 must be monitored during the performance test required under 40 CFR 60.8, to establish acceptable values and ranges. You may supplement the performance test data with engineering analyses, design specifications, manufacturer's recommendations and other relevant information to define the acceptable parametric ranges more precisely. You must develop and keep on-site a parameter monitoring plan which explains the procedures used to document proper operation of the NO<sub>x</sub> emission controls. The plan must:
- (1) Include the indicators to be monitored and show there is a significant relationship to emissions and proper operation of the NO<sub>x</sub> emission controls,
  - (2) Pick ranges (or designated conditions) of the indicators, or describe the process by which such range (or designated condition) will be established,
  - (3) Explain the process you will use to make certain that you obtain data that are representative of the emissions or parameters being monitored (such as detector location, installation specification if applicable),
  - (4) Describe quality assurance and control practices that are adequate to ensure the continuing validity of the data,
  - (5) Describe the frequency of monitoring and the data collection procedures which you will use (e.g., you are using a computerized data acquisition over a number of discrete data points with the average (or maximum value) being used for purposes of determining whether an exceedance has occurred), and
  - (6) Submit justification for the proposed elements of the monitoring. If a proposed performance specification differs from manufacturer recommendation, you must explain the reasons for the differences. You must submit the data supporting the justification, but you may refer to generally available sources of information used to support the justification. You may rely on engineering assessments and other data, provided you demonstrate factors which assure compliance or explain why performance testing is unnecessary to establish indicator ranges. When establishing indicator ranges, you may choose to simplify the process by treating the parameters as if they were correlated. Using this assumption, testing can be divided into two cases:
    - (i) All indicators are significant only on one end of range (e.g., for a thermal incinerator controlling volatile organic compounds (VOC) it is only important to insure a minimum temperature, not a maximum). In this case, you may conduct your study so that each parameter is at the significant limit of its range while you conduct your emissions testing. If the emissions tests show that the source is in compliance at the significant limit of each parameter, then as long as each parameter is within its limit, you are presumed to be in compliance.
    - (ii) Some or all indicators are significant on both ends of the range. In this case, you may conduct your study so that each parameter that is significant at both ends of its range assumes its extreme values in all possible combinations of the extreme values (either single or double) of all of the other parameters. For example, if there were only two parameters, A and B, and A had a range of values while B had only a minimum value, the combinations would be A high with B minimum and A low with B minimum. If both A and B had a range, the combinations would be A high and B high, A low and B low, A high and B low, A low and B high. For the case of four parameters all having a range, there are 16 possible combinations.
- (b) For affected units that are also subject to part 75 of 40 CFR and that have state approval to use the low mass emissions methodology in 40 CFR 75.19 or the NO<sub>x</sub> emission measurement methodology in appendix E to 40 CFR 75, you may meet the requirements of this paragraph by developing and keeping on-site (or at a central location for unmanned facilities) a QA plan, as described in 40 CFR 75.19(e)(5) or in section 2.3 of appendix E to part 75 of 40 CFR and section 1.3.6 of appendix B to part 75 of 40 CFR.

## SECTION 4 - APPENDIX KKKK

### 40 CFR 60, SUBPART KKKK

#### **40 CFR 60.4360 How do I determine the total sulfur content of the turbine's combustion fuel?**

You must monitor the total sulfur content of the fuel being fired in the turbine, except as provided in 40 CFR 60.4365. The sulfur content of the fuel must be determined using total sulfur methods described in 40 CFR 60.4415. Alternatively, if the total sulfur content of the gaseous fuel during the most recent performance test was less than half the applicable limit, ASTM D4084, D4810, D5504, or D6228, or Gas Processors Association Standard 2377 (all of which are incorporated by reference, see 40 CFR 60.17), which measure the major sulfur compounds, may be used.

#### **40 CFR 60.4365 How can I be exempted from monitoring the total sulfur content of the fuel?**

You may elect not to monitor the total sulfur content of the fuel combusted in the turbine, if the fuel is demonstrated not to exceed potential sulfur emissions of 26 ng SO<sub>2</sub>/J (0.060 lb SO<sub>2</sub>/MMBtu) heat input for units located in continental areas and 180 ng SO<sub>2</sub>/J (0.42 lb SO<sub>2</sub>/MMBtu) heat input for units located in noncontinental areas or a continental area that the Administrator determines does not have access to natural gas and that the removal of sulfur compounds would cause more environmental harm than benefit. You must use one of the following sources of information to make the required demonstration:

- (a) The fuel quality characteristics in a current, valid purchase contract, tariff sheet or transportation contract for the fuel, specifying that the maximum total sulfur content for oil use in continental areas is 0.05 weight percent (500 ppmw) or less and 0.4 weight percent (4,000 ppmw) or less for noncontinental areas, the total sulfur content for natural gas use in continental areas is 20 grains of sulfur or less per 100 standard cubic feet and 140 grains of sulfur or less per 100 standard cubic feet for noncontinental areas, has potential sulfur emissions of less than less than 26 ng SO<sub>2</sub>/J (0.060 lb SO<sub>2</sub>/MMBtu) heat input for continental areas and has potential sulfur emissions of less than less than 180 ng SO<sub>2</sub>/J (0.42 lb SO<sub>2</sub>/MMBtu) heat input for noncontinental areas; or
- (b) Representative fuel sampling data which show that the sulfur content of the fuel does not exceed 26 ng SO<sub>2</sub>/J (0.060 lb SO<sub>2</sub>/MMBtu) heat input for continental areas or 180 ng SO<sub>2</sub>/J (0.42 lb SO<sub>2</sub>/MMBtu) heat input for noncontinental areas. At a minimum, the amount of fuel sampling data specified in section 2.3.1.4 or 2.3.2.4 of appendix D to part 75 of 40 CFR is required.

#### **40 CFR 60.4370 How often must I determine the sulfur content of the fuel?**

The frequency of determining the sulfur content of the fuel must be as follows:

- (a) Fuel oil. For fuel oil, use one of the total sulfur sampling options and the associated sampling frequency described in sections 2.2.3, 2.2.4.1, 2.2.4.2, and 2.2.4.3 of appendix D to part 75 of 40 CFR (i.e., flow proportional sampling, daily sampling, sampling from the unit's storage tank after each addition of fuel to the tank, or sampling each delivery prior to combining it with fuel oil already in the intended storage tank).
- (b) Gaseous fuel. If you elect not to demonstrate sulfur content using options in 40 CFR 60.4365, and the fuel is supplied without intermediate bulk storage, the sulfur content value of the gaseous fuel must be determined and recorded once per unit operating day.
- (c) Custom schedules. Notwithstanding the requirements of paragraph (b) of this section, operators or fuel vendors may develop custom schedules for determination of the total sulfur content of gaseous fuels, based on the design and operation of the affected facility and the characteristics of the fuel supply. Except as provided in paragraphs (c)(1) and (c)(2) of this section, custom schedules shall be substantiated with data and shall be approved by the Administrator before they can be used to comply with the standard in 40 CFR 60.4330.
  - (1) The two custom sulfur monitoring schedules set forth in paragraphs (c)(1)(i) through (iv) and in paragraph (c)(2) of this section are acceptable, without prior Administrative approval:

SECTION 4 - APPENDIX KKKK

40 CFR 60, SUBPART KKKK

- (i) The owner or operator shall obtain daily total sulfur content measurements for 30 consecutive unit operating days, using the applicable methods specified in this subpart. Based on the results of the 30 daily samples, the required frequency for subsequent monitoring of the fuel's total sulfur content shall be as specified in paragraph (c)(1)(ii), (iii), or (iv) of this section, as applicable.
  - (ii) If none of the 30 daily measurements of the fuel's total sulfur content exceeds half the applicable standard, subsequent sulfur content monitoring may be performed at 12-month intervals. If any of the samples taken at 12-month intervals has a total sulfur content greater than half but less than the applicable limit, follow the procedures in paragraph (c)(1)(iii) of this section. If any measurement exceeds the applicable limit, follow the procedures in paragraph (c)(1)(iv) of this section.
  - (iii) If at least one of the 30 daily measurements of the fuel's total sulfur content is greater than half but less than the applicable limit, but none exceeds the applicable limit, then:
    - (A) Collect and analyze a sample every 30 days for 3 months. If any sulfur content measurement exceeds the applicable limit, follow the procedures in paragraph (c)(1)(iv) of this section. Otherwise, follow the procedures in paragraph (c)(1)(iii)(B) of this section.
    - (B) Begin monitoring at 6-month intervals for 12 months. If any sulfur content measurement exceeds the applicable limit, follow the procedures in paragraph (c)(1)(iv) of this section. Otherwise, follow the procedures in paragraph (c)(1)(iii)(C) of this section.
    - (C) Begin monitoring at 12-month intervals. If any sulfur content measurement exceeds the applicable limit, follow the procedures in paragraph (c)(1)(iv) of this section. Otherwise, continue to monitor at this frequency.
  - (iv) If a sulfur content measurement exceeds the applicable limit, immediately begin daily monitoring according to paragraph (c)(1)(i) of this section. Daily monitoring shall continue until 30 consecutive daily samples, each having a sulfur content no greater than the applicable limit, are obtained. At that point, the applicable procedures of paragraph (c)(1)(ii) or (iii) of this section shall be followed.
- (2) The owner or operator may use the data collected from the 720-hour sulfur sampling demonstration described in section 2.3.6 of appendix D to part 75 of 40 CFR to determine a custom sulfur sampling schedule, as follows:
- (i) If the maximum fuel sulfur content obtained from the 720 hourly samples does not exceed 20 grains/100 scf, no additional monitoring of the sulfur content of the gas is required, for the purposes of this subpart.
  - (ii) If the maximum fuel sulfur content obtained from any of the 720 hourly samples exceeds 20 grains/100 scf, but none of the sulfur content values (when converted to weight percent sulfur) exceeds half the applicable limit, then the minimum required sampling frequency shall be one sample at 12 month intervals.
  - (iii) If any sample result exceeds half the applicable limit, but none exceeds the applicable limit, follow the provisions of paragraph (c)(1)(iii) of this section.
  - (iv) If the sulfur content of any of the 720 hourly samples exceeds the applicable limit, follow the provisions of paragraph (c)(1)(iv) of this section.

**Reporting**

**40 CFR 60.4375 What reports must I submit?**

- (a) For each affected unit required to continuously monitor parameters or emissions, or to periodically determine the fuel sulfur content under this subpart, you must submit reports of excess emissions and monitor downtime, in accordance with 40 CFR 60.7(c). Excess emissions must be reported for all periods of unit operation, including start-up, shutdown, and malfunction.

SECTION 4 - APPENDIX KKKK

40 CFR 60, SUBPART KKKK

- (b) For each affected unit that performs annual performance tests in accordance with 40 CFR 60.4340(a), you must submit a written report of the results of each performance test before the close of business on the 60th day following the completion of the performance test.

**40 CFR 60.4380 How are excess emissions and monitor downtime defined for NO<sub>x</sub>?**

For the purpose of reports required under 40 CFR 60.7(c), periods of excess emissions and monitor downtime that must be reported are defined as follows:

- (a) For turbines using water or steam to fuel ratio monitoring:
- (1) An excess emission is any unit operating hour for which the 4-hour rolling average steam or water to fuel ratio, as measured by the continuous monitoring system, falls below the acceptable steam or water to fuel ratio needed to demonstrate compliance with 40 CFR 60.4320, as established during the performance test required in 40 CFR 60.8. Any unit operating hour in which no water or steam is injected into the turbine when a fuel is being burned that requires water or steam injection for NO<sub>x</sub> control will also be considered an excess emission.
  - (2) A period of monitor downtime is any unit operating hour in which water or steam is injected into the turbine, but the essential parametric data needed to determine the steam or water to fuel ratio are unavailable or invalid.
  - (3) Each report must include the average steam or water to fuel ratio, average fuel consumption, and the combustion turbine load during each excess emission.
- (b) For turbines using continuous emission monitoring, as described in 40 CFR 60.4335(b) and 40 CFR 60.4345:
- (1) An excess emissions is any unit operating period in which the 4-hour or 30-day rolling average NO<sub>x</sub> emission rate exceeds the applicable emission limit in 40 CFR 60.4320. For the purposes of this subpart, a "4-hour rolling average NO<sub>x</sub> emission rate" is the arithmetic average of the average NO<sub>x</sub> emission rate in ppm or ng/J (lb/MWh) measured by the continuous emission monitoring equipment for a given hour and the three unit operating hour average NO<sub>x</sub> emission rates immediately preceding that unit operating hour. Calculate the rolling average if a valid NO<sub>x</sub> emission rate is obtained for at least 3 of the 4 hours. For the purposes of this subpart, a "30-day rolling average NO<sub>x</sub> emission rate" is the arithmetic average of all hourly NO<sub>x</sub> emission data in ppm or ng/J (lb/MWh) measured by the continuous emission monitoring equipment for a given day and the twenty-nine unit operating days immediately preceding that unit operating day. A new 30-day average is calculated each unit operating day as the average of all hourly NO<sub>x</sub> emissions rates for the preceding 30 unit operating days if a valid NO<sub>x</sub> emission rate is obtained for at least 75 percent of all operating hours.
  - (2) A period of monitor downtime is any unit operating hour in which the data for any of the following parameters are either missing or invalid: NO<sub>x</sub> concentration, CO<sub>2</sub> or O<sub>2</sub> concentration, fuel flow rate, steam flow rate, steam temperature, steam pressure, or megawatts. The steam flow rate, steam temperature, and steam pressure are only required if you will use this information for compliance purposes.
  - (3) For operating periods during which multiple emissions standards apply, the applicable standard is the average of the applicable standards during each hour. For hours with multiple emissions standards, the applicable limit for that hour is determined based on the condition that corresponded to the highest emissions standard.
- (c) For turbines required to monitor combustion parameters or parameters that document proper operation of the NO<sub>x</sub> emission controls:
- (1) An excess emission is a 4-hour rolling unit operating hour average in which any monitored parameter does not achieve the target value or is outside the acceptable range defined in the parameter monitoring plan for the unit.

SECTION 4 - APPENDIX KKKK

40 CFR 60, SUBPART KKKK

(2) A period of monitor downtime is a unit operating hour in which any of the required parametric data are either not recorded or are invalid.

**40 CFR 60.4385 How are excess emissions and monitoring downtime defined for SO<sub>2</sub>?**

If you choose the option to monitor the sulfur content of the fuel, excess emissions and monitoring downtime are defined as follows:

- (a) For samples of gaseous fuel and for oil samples obtained using daily sampling, flow proportional sampling, or sampling from the unit's storage tank, an excess emission occurs each unit operating hour included in the period beginning on the date and hour of any sample for
  - (a) which the sulfur content of the fuel being fired in the combustion turbine exceeds the applicable limit and ending on the date and hour that a subsequent sample is taken that demonstrates compliance with the sulfur limit.
  - (b) If the option to sample each delivery of fuel oil has been selected, you must immediately switch to one of the other oil sampling options (i.e., daily sampling, flow proportional sampling, or sampling from the unit's storage tank) if the sulfur content of a delivery exceeds 0.05 weight percent. You must continue to use one of the other sampling options until all of the oil from the delivery has been combusted, and you must evaluate excess emissions according to paragraph (a) of this section. When all of the fuel from the delivery has been burned, you may resume using the as-delivered sampling option.
  - (c) A period of monitor downtime begins when a required sample is not taken by its due date. A period of monitor downtime also begins on the date and hour of a required sample, if invalid results are obtained. The period of monitor downtime ends on the date and hour of the next valid sample.

**40 CFR 60.4390 What are my reporting requirements if I operate an emergency combustion turbine or a research and development turbine?**

- (a) If you operate an emergency combustion turbine, you are exempt from the NO<sub>x</sub> limit and must submit an initial report to the Administrator stating your case.
- (b) Combustion turbines engaged by manufacturers in research and development of equipment for both combustion turbine emission control techniques and combustion turbine efficiency improvements may be exempted from the NO<sub>x</sub> limit on a case-by-case basis as determined by the Administrator. You must petition for the exemption.

**40 CFR 60.4395 When must I submit my reports?**

All reports required under 40 CFR 60.7(c) must be postmarked by the 30th day following the end of each 6-month period.

**Performance Tests**

**40 CFR 60.4400 How do I conduct the initial and subsequent performance tests, regarding NO<sub>x</sub>?**

- (a) You must conduct an initial performance test, as required in 40 CFR 60.8. Subsequent NO<sub>x</sub> performance tests shall be conducted on an annual basis (no more than 14 calendar months following the previous performance test).
  - (1) There are two general methodologies that you may use to conduct the performance tests. For each test run:
    - (i) Measure the NO<sub>x</sub> concentration (in parts per million (ppm)), using EPA Method 7E or EPA Method 20 in appendix A of 40 CFR 60. For units complying with the output based standard, concurrently measure the stack gas flow rate, using EPA Methods 1 and 2 in appendix A of 40 CFR 60, and measure and record the electrical and thermal output from the unit. Then, use the following equation to calculate the NO<sub>x</sub> emission rate:

$$E = \frac{1.194 \times 10^{-7} * (NO_x)_c * Q_{std}}{P} \quad (\text{Eq. 5})$$



SECTION 4 - APPENDIX KKKK

40 CFR 60, SUBPART KKKK

Where:

E = NO<sub>x</sub> emission rate, in lb/MWh

$1.194 \times 10^{-7}$  = conversion constant, in lb/dscf-ppm

(NO<sub>x</sub>)<sub>c</sub> = average NO<sub>x</sub> concentration for the run, in ppm

Q<sub>std</sub> = stack gas volumetric flow rate, in dscf/hr

P = gross electrical and mechanical energy output of the combustion turbine, in MW (for simple-cycle operation), for combined-cycle operation, the sum of all electrical and mechanical output from the combustion and steam turbines, or, for combined heat and power operation, the sum of all electrical and mechanical output from the combustion and steam turbines plus all useful recovered thermal output not used for additional electric or mechanical generation, in MW, calculated according to 40 CFR 60.4350(f)(2); or

- (ii) Measure the NO<sub>x</sub> and diluent gas concentrations, using either EPA Methods 7E and 3A, or EPA Method 20 in appendix A of 40 CFR 60. Concurrently measure the heat input to the unit, using a fuel flowmeter (or flowmeters), and measure the electrical and thermal output of the unit. Use EPA Method 19 in appendix A of 40 CFR 60 to calculate the NO<sub>x</sub> emission rate in lb/MMBtu. Then, use Equations 1 and, if necessary, 2 and 3 in 40 CFR 60.4350(f) to calculate the NO<sub>x</sub> emission rate in lb/MWh.
- (2) Sampling traverse points for NO<sub>x</sub> and (if applicable) diluent gas are to be selected following EPA Method 20 or EPA Method 1 (non-particulate procedures), and sampled for equal time intervals. The sampling must be performed with a traversing single-hole probe, or, if feasible, with a stationary multi-hole probe that samples each of the points sequentially. Alternatively, a multi-hole probe designed and documented to sample equal volumes from each hole may be used to sample simultaneously at the required points.
- (3) Notwithstanding paragraph (a)(2) of this section, you may test at fewer points than are specified in EPA Method 1 or EPA Method 20 in appendix A of 40 CFR 60 if the following conditions are met:
  - (i) You may perform a stratification test for NO<sub>x</sub> and diluent pursuant to
    - (A) [Reserved], or
    - (B) The procedures specified in section 6.5.6.1(a) through (e) of appendix A of part 75 of 40 CFR.
  - (ii) Once the stratification sampling is completed, you may use the following alternative sample point selection criteria for the performance test:
    - (A) If each of the individual traverse point NO<sub>x</sub> concentrations is within 10 percent of the mean concentration for all traverse points, or the individual traverse point diluent concentrations differs by no more than 5ppm or 0.5 percent CO<sub>2</sub> (or O<sub>2</sub>) from the mean for all traverse points, then you may use three points (located either 16.7, 50.0 and 83.3 percent of the way across the stack or duct, or, for circular stacks or ducts greater than 2.4 meters (7.8 feet) in diameter, at 0.4, 1.2, and 2.0 meters from the wall). The three points must be located along the measurement line that exhibited the highest average NO<sub>x</sub> concentration during the stratification test; or
    - (B) For turbines with a NO<sub>x</sub> standard greater than 15 ppm @ 15% O<sub>2</sub>, you may sample at a single point, located at least 1 meter from the stack wall or at the stack centroid if each of the individual traverse point NO<sub>x</sub> concentrations is within 5 percent of the mean concentration for all traverse points, or the individual traverse point diluent concentrations differs by no more than 3ppm or 0.3 percent CO<sub>2</sub> (or O<sub>2</sub>) from the mean for all traverse points; or

SECTION 4 - APPENDIX KKKK

40 CFR 60, SUBPART KKKK

- (C) For turbines with a NO<sub>x</sub> standard less than or equal located at least 1 meter from the stack wall or at the stack centroid if each of the individual traverse point NO<sub>x</sub> concentrations is within 2.5 percent of the mean concentration for all traverse points, or the individual traverse point diluent concentrations differs by no more than 1ppm or 0.15 percent CO<sub>2</sub> (or O<sub>2</sub>) from the mean for all traverse points.
- (b) The performance test must be done at any load condition within plus or minus 25 percent of 100 percent of peak load. You may perform testing at the highest achievable load point, if at least 75 percent of peak load cannot be achieved in practice. You must conduct three separate test runs for each performance test. The minimum time per run is 20 minutes.
- (1) If the stationary combustion turbine combusts both oil and gas as primary or backup fuels, separate performance testing is required for each fuel.
  - (2) For a combined cycle and CHP turbine systems with supplemental heat (duct burner), you must measure the total NO<sub>x</sub> emissions after the duct burner rather than directly after the turbine. The duct burner must be in operation during the performance test.
  - (3) If water or steam injection is used to control NO<sub>x</sub> with no additional post-combustion NO<sub>x</sub> control and you choose to monitor the steam or water to fuel ratio in accordance with 40 CFR 60.4335, then that monitoring system must be operated concurrently with each EPA Method 20 or EPA Method 7E run and must be used to determine the fuel consumption and the steam or water to fuel ratio necessary to comply with the applicable 40 CFR 60.4320 NO<sub>x</sub> emission limit.
  - (4) Compliance with the applicable emission limit in 40 CFR 60.4320 must be demonstrated at each tested load level. Compliance is achieved if the three-run arithmetic average NO<sub>x</sub> emission rate at each tested level meets the applicable emission limit in 40 CFR 60.4320.
  - (5) If you elect to install a CEMS, the performance evaluation of the CEMS may either be conducted separately or (as described in 40 CFR 60.4405) as part of the initial performance test of the affected unit.
  - (6) The ambient temperature must be greater than 0 degrees F during the performance test.

**40 CFR 60.4405 How do I perform the initial performance test if I have chosen to install a NO<sub>x</sub>-diluent CEMS?**

If you elect to install and certify a NO<sub>x</sub>-diluent CEMS under 40 CFR 60.4345, then the initial performance test required under 40 CFR 60.8 may be performed in the following alternative manner:

- (a) Perform a minimum of nine RATA reference method runs, with a minimum time per run of 21 minutes, at a single load level, within plus or minus 25 percent of 100 percent of peak load. The ambient temperature must be greater than 0 [deg]F during the RATA runs.
- (b) For each RATA run, concurrently measure the heat input to the unit using a fuel flow meter (or flow meters) and measure the electrical and thermal output from the unit.
- (c) Use the test data both to demonstrate compliance with the applicable NO<sub>x</sub> emission limit under 40 CFR 60.4320 and to provide the required reference method data for the RATA of the CEMS described under 40 CFR 60.4335.
- (d) Compliance with the applicable emission limit in 40 CFR 60.4320 is achieved if the arithmetic average of all of the NO<sub>x</sub> emission rates for the RATA runs, expressed in units of ppm or lb/MWh, does not exceed the emission limit.

SECTION 4 - APPENDIX KKKK

40 CFR 60, SUBPART KKKK

**40 CFR 60.4410 How do I establish a valid parameter range if I have chosen to continuously monitor parameters?**

If you have chosen to monitor combustion parameters or parameters indicative of proper operation of NO<sub>x</sub> emission controls in accordance with 40 CFR 60.4340, the appropriate parameters must be continuously monitored and recorded during each run of the initial performance test, to establish acceptable operating ranges, for purposes of the parameter monitoring plan for the affected unit, as specified in 40 CFR 60.4355.

**40 CFR 60.4415 How do I conduct the initial and subsequent performance tests for sulfur?**

- (a) You must conduct an initial performance test, as required in 40 CFR 60.8. Subsequent SO<sub>2</sub> performance tests shall be conducted on an annual basis (no more than 14 calendar months following the previous performance test). There are three methodologies that you may use to conduct the performance tests.
- (1) If you choose to periodically determine the sulfur content of the fuel combusted in the turbine, a representative fuel sample would be collected following ASTM D5287 (incorporated by reference, see 40 CFR 60.17) for natural gas or ASTM D4177 (incorporated by reference, see 40 CFR 60.17) for oil. Alternatively, for oil, you may follow the procedures for manual pipeline sampling in section 14 of ASTM D4057 (incorporated by reference, see 40 CFR 60.17). The fuel analyses of this section may be performed either by you, a service contractor retained by you, the fuel vendor, or any other qualified agency. Analyze the samples for the total sulfur content of the fuel using:
- (i) For liquid fuels, ASTM D129, or alternatively D1266, D1552, D2622, D4294, or D5453 (all of which are incorporated by reference, see 40 CFR 60.17); or
- (ii) For gaseous fuels, ASTM D1072, or alternatively D3246, D4084, D4468, D4810, D6228, D6667, or Gas Processors Association Standard 2377 (all of which are incorporated by reference, see 40 CFR 60.17).
- (2) Measure the SO<sub>2</sub> concentration (in parts per million (ppm)), using EPA Methods 6, 6C, 8, or 20 in appendix A of 40 CFR 60. In addition, the American Society of Mechanical Engineers (ASME) standard, ASME PTC 19-10-1981-Part 10, "Flue and Exhaust Gas Analyses," manual methods for sulfur dioxide (incorporated by reference, see 40 CFR 60.17) can be used instead of EPA Methods 6 or 20. For units complying with the output based standard, concurrently measure the stack gas flow rate, using EPA Methods 1 and 2 in appendix A of 40 CFR 60, and measure and record the electrical and thermal output from the unit. Then use the following equation to calculate the SO<sub>2</sub> emission rate:

$$E = \frac{1.664 \times 10^{-7} * (SO_2)_c * Q_{std}}{P} \quad (\text{Eq. 6})$$

Where:

E = SO<sub>2</sub> emission rate, in lb/MWh

1.664 x 10<sup>-7</sup> = conversion constant, in lb/dscf-ppm

(SO<sub>2</sub>)<sub>c</sub> = average SO<sub>2</sub> concentration for the run, in ppm

Q<sub>std</sub> = stack gas volumetric flow rate, in dscf/hr

P = gross electrical and mechanical energy output of the combustion turbine, in MW (for simple-cycle operation), for combined-cycle operation, the sum of all electrical and mechanical output from the combustion and steam turbines, or, for combined heat and power operation, the sum of all electrical and mechanical output from the combustion and steam turbines plus all useful recovered thermal output not used for additional electric or mechanical generation, in MW, calculated according to 40 CFR 60.4350(f)(2); or

SECTION 4 - APPENDIX KKKK

40 CFR 60, SUBPART KKKK

- (3) Measure the SO<sub>2</sub> and diluent gas concentrations, using either EPA Methods 6, 6C, or 8 and 3A, or 20 in appendix A of 40 CFR 60. In addition, you may use the manual methods for sulfur dioxide ASME PTC 19-10-1981-Part 10 (incorporated by reference, see 40 CFR 60.17). Concurrently measure the heat input to the unit, using a fuel flowmeter (or flowmeters), and measure the electrical and thermal output of the unit. Use EPA Method 19 in appendix A of 40 CFR 60 to calculate the SO<sub>2</sub> emission rate in lb/MMBtu. Then, use Equations 1 and, if necessary, 2 and 3 in 40 CFR 60.4350(f) to calculate the SO<sub>2</sub> emission rate in lb/MWh.

(b) [Reserved]

**Definitions**

**40 CFR 60.4420 What definitions apply to this subpart?**

As used in this subpart, all terms not defined herein will have the meaning given them in the Clean Air Act and in subpart A (General Provisions) of 40 CFR 60.

Combined cycle combustion turbine means any stationary combustion turbine which recovers heat from the combustion turbine exhaust gases to generate steam that is only used to create additional power output in a steam turbine.

Combined heat and power combustion turbine means any stationary combustion turbine which recovers heat from the exhaust gases to heat water or another medium, generate steam for useful purposes other than additional electric generation, or directly uses the heat in the exhaust gases for a useful purpose.

Combustion turbine model means a group of combustion turbines having the same nominal air flow, combustor inlet pressure, combustor inlet temperature, firing temperature, turbine inlet temperature and turbine inlet pressure.

Combustion turbine test cell/stand means any apparatus used for testing uninstalled stationary or uninstalled mobile (motive) combustion turbines.

Diffusion flame stationary combustion turbine means any stationary combustion turbine where fuel and air are injected at the combustor and are mixed only by diffusion prior to ignition.

Duct burner means a device that combusts fuel and that is placed in the exhaust duct from another source, such as a stationary combustion turbine, internal combustion engine, kiln, etc., to allow the firing of additional fuel to heat the exhaust gases before the exhaust gases enter a heat recovery steam generating unit.

Efficiency means the combustion turbine manufacturer's rated heat rate at peak load in terms of heat input per unit of power output—based on the higher heating value of the fuel.

Emergency combustion turbine means any stationary combustion turbine which operates in an emergency situation. Examples include stationary combustion turbines used to produce power for critical networks or equipment, including power supplied to portions of a facility, when electric power from the local utility is interrupted, or stationary combustion turbines used to pump water in the case of fire or flood, etc. Emergency stationary combustion turbines do not include stationary combustion turbines used as peaking units at electric utilities or stationary combustion turbines at industrial facilities that typically operate at low capacity factors. Emergency combustion turbines may be operated for the purpose of maintenance checks and readiness testing, provided that the tests are required by the manufacturer, the vendor, or the insurance company associated with the turbine. Required testing of such units should be minimized, but there is no time limit on the use of emergency combustion turbines.

Excess emissions means a specified averaging period over which either (1) the NO<sub>x</sub> emissions are higher than the applicable emission limit in 40 CFR 60.4320; (2) the total sulfur content of the fuel being combusted in the affected facility exceeds the limit specified in 40 CFR 60.4330; or (3) the recorded value of a particular monitored parameter is outside the acceptable range specified in the parameter monitoring plan for the affected unit.

## SECTION 4 - APPENDIX KKKK

### 40 CFR 60, SUBPART KKKK

Gross useful output means the gross useful work performed by the stationary combustion turbine system. For units using the mechanical energy directly or generating only electricity, the gross useful work performed is the gross electrical or mechanical output from the turbine/generator set. For combined heat and power units, the gross useful work performed is the gross electrical or mechanical output plus the useful thermal output (i.e., thermal energy delivered to a process).

Heat recovery steam generating unit means a unit where the hot exhaust gases from the combustion turbine are routed in order to extract heat from the gases and generate steam, for use in a steam turbine or other device that utilizes steam. Heat recovery steam generating units can be used with or without duct burners.

Integrated gasification combined cycle electric utility steam generating unit means a coal-fired electric utility steam generating unit that burns a synthetic gas derived from coal in a combined-cycle gas turbine. No solid coal is directly burned in the unit during operation.

ISO conditions means 288 Kelvin, 60 percent relative humidity and 101.3 kilopascals pressure.

Lean premix stationary combustion turbine means any stationary combustion turbine where the air and fuel are thoroughly mixed to form a lean mixture before delivery to the combustor. Mixing may occur before or in the combustion chamber. A lean premixed turbine may operate in diffusion flame mode during operating conditions such as startup and shutdown, extreme ambient temperature, or low or transient load.

Natural gas means a naturally occurring fluid mixture of hydrocarbons (e.g., methane, ethane, or propane) produced in geological formations beneath the Earth's surface that maintains a gaseous state at standard atmospheric temperature and pressure under ordinary conditions. Additionally, natural gas must either be composed of at least 70 percent methane by volume or have a gross calorific value between 950 and 1,100 British thermal units (Btu) per standard cubic foot. Natural gas does not include the following gaseous fuels: landfill gas, digester gas, refinery gas, sour gas, blast furnace gas, coal-derived gas, producer gas, coke oven gas, or any gaseous fuel produced in a process which might result in highly variable sulfur content or heating value.

Noncontinental area means the State of Hawaii, the Virgin Islands, Guam, American Samoa, the Commonwealth of Puerto Rico, the Northern Mariana Islands, or offshore platforms.

Peak load means 100 percent of the manufacturer's design capacity of the combustion turbine at ISO conditions.

Regenerative cycle combustion turbine means any stationary combustion turbine which recovers heat from the combustion turbine exhaust gases to preheat the inlet combustion air to the combustion turbine.

Simple cycle combustion turbine means any stationary combustion turbine which does not recover heat from the combustion turbine exhaust gases to preheat the inlet combustion air to the combustion turbine, or which does not recover heat from the combustion turbine exhaust gases for purposes other than enhancing the performance of the combustion turbine itself.

Stationary combustion turbine means all equipment, including but not limited to the turbine, the fuel, air, lubrication and exhaust gas systems, control systems (except emissions control equipment), heat recovery system, and any ancillary components and sub-components comprising any simple cycle stationary combustion turbine, any regenerative/recuperative cycle stationary combustion turbine, any combined cycle combustion turbine, and any combined heat and power combustion turbine based system. Stationary means that the combustion turbine is not self propelled or intended to be propelled while performing its function. It may, however, be mounted on a vehicle for portability.

Unit operating day means a 24-hour period between 12 midnight and the following midnight during which any fuel is combusted at any time in the unit. It is not necessary for fuel to be combusted continuously for the entire 24-hour period.

Unit operating hour means a clock hour during which any fuel is combusted in the affected unit. If the unit combusts fuel for the entire clock hour, it is considered to be a full unit operating hour. If the unit combusts fuel for only part of the clock hour, it is considered to be a partial unit operating hour.

## SECTION 4 - APPENDIX KKKK

## 40 CFR 60, SUBPART KKKK

Useful thermal output means the thermal energy made available for use in any industrial or commercial process, or used in any heating or cooling application, i.e., total thermal energy made available for processes and applications other than electrical or mechanical generation. Thermal output for this subpart means the energy in recovered thermal output measured against the energy in the thermal output at 15 degrees Celsius and 101.325 kilopascals of pressure.

Combustion turbine type	Combustion turbine heat input at peak load (HHV)	NO <sub>x</sub> emission standard
New turbine firing natural gas, electric generating.	≤50 MMBtu/h	42 ppm at 15 percent O <sub>2</sub> or 290 ng/J of useful output (2.3 lb/MWh).
New turbine firing natural gas, mechanical drive.	≤50 MMBtu/h	100 ppm at 15 percent O <sub>2</sub> or 690 ng/J of useful output (5.5 lb/MWh).
New turbine firing natural gas.	> 50 MMBtu/h and ≤ 850 MMBtu/h.	25 ppm at 15 percent O <sub>2</sub> or 150 ng/J of useful output (1.2 lb/MWh).
<b>New, modified, or reconstructed turbine firing natural gas.*</b>	<b>&gt; 850 MMBtu/h.</b>	<b>15 ppm at 15 percent O<sub>2</sub> or 54 ng/J of useful output (0.43 lb/MWh).</b>
New turbine firing fuels other than natural gas, electric generating.	≤50 MMBtu/h	96 ppm at 15 percent O <sub>2</sub> or 700 ng/J of useful output (5.5 lb/MWh).
New turbine firing fuels other than natural gas, mechanical drive.	≤50 MMBtu/h	150 ppm at 15 percent O <sub>2</sub> or 1,100 ng/J of useful output (8.7 lb/MWh).
New turbine firing fuels other than natural gas.	> 50 MMBtu/h and ≤ 850 MMBtu/h.	74 ppm at 15 percent O <sub>2</sub> or 460 ng/J of useful output (3.6 lb/MWh).
New, modified, or reconstructed turbine firing fuels other than natural gas.	> 850 MMBtu/h.	42 ppm at 15 percent O <sub>2</sub> or 160 ng/J of useful output (1.3 lb/MWh).
Modified or reconstructed turbine.	≤50 MMBtu/h	150 ppm at 15 percent O <sub>2</sub> or 1,100 ng/J of useful output (8.7 lb/MWh).
Modified or reconstructed turbine firing natural gas.	> 50 MMBtu/h and ≤ 850 MMBtu/h.	42 ppm at 15 percent O <sub>2</sub> or 250 ng/J of useful output (2.0 lb/MWh).
Modified or reconstructed turbine firing fuels other than natural gas.	> 50 MMBtu/h and ≤ 850 MMBtu/h.	96 ppm at 15 percent O <sub>2</sub> or 590 ng/J of useful output (4.7 lb/MWh).
Turbines located north of the Arctic Circle (latitude 66.5 degrees north), turbines operating at less than 75 percent of peak load, modified and reconstructed offshore turbines, and turbine operating at temperatures less than 0°F.	≤ 30 MW output	150 ppm at 15 percent O <sub>2</sub> or 1,100 ng/J of useful output (8.7 lb/MWh).
	> 30 MW output	96 ppm at 15 percent O <sub>2</sub> or 590 ng/J of useful output (4.7 lb/MWh).
Heat recovery units operating independent of the combustion turbine.	All sizes	54 ppm at 15 percent O <sub>2</sub> or 110 ng/J of useful output (0.86 lb/MWh).

\* Combustion turbine class applicable to Orlando Cogen

## FINAL DETERMINATION

### PERMITTEE

Northern Star Generation Services  
Orlando Cogen Limited, L.P.  
8275 Exchange drive  
Orlando, Florida 32809

### PERMITTING AUTHORITY

Florida Department of Environmental Protection  
Division of Air Resource Management  
Bureau of Air Regulation  
2600 Blair Stone Road, MS# 5505  
Tallahassee, Florida 32399-2400

### PROJECT

Air Permit No. 0950203-007-AC  
Orlando Cogen Plant

The existing facility consists of a natural gas-fired combined cycle unit. The combined cycle unit includes: a combustion turbine-electrical generator (CT); a heat recovery steam generator (HRSG) with a duct burner (DB) system; and a nominal 50 megawatts (MW) steam turbine-electrical generator (ST).

This construction permit authorizes the applicant to replace the rotor (power) section of the CT and to physically upgrade it from an Alstom Model GT 11NM to a Model GT 11NMC by replacement of key components in the compressor section of the CT with improved ones. This upgrade will increase the nominal power rating of the CT as a result of the present and previous projects from 79 to 86.8 MW at the International Standards Organization (ISO) conditions of 59 degrees Fahrenheit and 1 atmosphere of pressure. The total power rating of the combined cycle unit including the CT, HRSG, and ST is 136.8 MW.

As a result of this upgrade project, the combined cycle unit becomes subject to the Standards of Performance for Stationary Combustion Turbines at 40 Code of Federal Regulations Part 60, Subpart KKKK.

The project is largely an efficiency improvement and will allow production of additional electricity with little or no increase in fuel use. The applicant projected that emissions will not significantly increase after completion of the project compared with historical baseline actual emissions. Therefore, the project is not subject to the rules for the Prevention of Significant Deterioration (PSD) at Section 62-212.400 of the Florida Administrative Code (F.A.C.) or a determination of best available control technology.

### NOTICE AND PUBLICATION

The Department distributed an "Intent to Issue Permit" package on November 20, 2007. The applicant published the "Public Notice of Intent to Issue" in the Stuart News on December 1, 2007 with proof of publication received by the Department on December 7, 2007. Comments on the draft construction permit were received from the applicant on December 21, 2007. No petitions for administrative hearings or extensions of time to petition for an administrative hearing were filed. No comments were received from EPA Region 4, or the public at large on the Intent to Issue the Air Construction Permit package. Minor comments were received from the applicant and are summarized below.

- Specific Condition 7 (page 5) the NO<sub>x</sub> limits in the table should be revised as follows:
  - The limit for the CT, and CT/DB should have a 24-hour rolling average.
  - The limit for the DB only should be determined by annual testing.

## FINAL DETERMINATION

**Response:** The Department agrees with this comment. The testing requirements listed in the table were clarified to indicate that the NO<sub>x</sub> testing requirements for the stand alone DB are on an annual basis. In addition, it was also clarified that the 24 hour rolling average NO<sub>x</sub> emission limits for the CT and CT/DB specified in the original PSD permit in the table are on a pound per hour (lb/hr) basis. Additionally, as a result of this turbine upgrade project the CT, HRSG, and DB system are subject to the NO<sub>x</sub> emission limit of 15 part per million (ppm) at 15% oxygen(O<sub>2</sub>) on a 30 day rolling average as specified in 40 CFR 60, Subpart KKKK – Standards of Performance for Stationary Combustion Turbines.

- Specific Condition 3 (page 4) indicates that the DB is subject to NSPS Subpart Dc when it is actually subject to Subpart Db.

**Response:** The Department agrees with this comment and this correction has been made in the final permit.

- Note 4 of Table 1 (page 5) states that the heat input rate is 890 MMBtu/hr. This number should be 980 MMBtu hr as was requested in the permit application.

**Response:** The department agrees with this comment. The heat input rate indicated in this note of Table 1 was not changed in the draft permit as requested in the application. This correction has been made in the final permit.

- Specific Condition 11 (page 6) the baseline emissions for NO<sub>x</sub> should be 233 TPY not 232 TPY.

**Response:** The department agrees with this comment. This correction has been made in the final permit.

In addition to the comments listed above, the applicant requested that the specific conditions in the current Title V operating permit (0950203-006-AV) be changed to reflect the emission changes authorized by this construction permit. These changes will be made once the applicant submits an application to revise their current Title V operating permit. Finally, a clarification of the NO<sub>x</sub> emission limits for the CT and CT/DB was added to Table 1 of the final construction permit. This clarification addresses the fact that the NO<sub>x</sub> emission limits for the CT and CT/DB are on a pound per hour (lb/hr) basis as described in Specific Condition 13 of the original PSD permit (PSD-FL-184)

### CONCLUSION

The final action of the Department is to issue the air construction permit with changes indicated above.



STATE OF FLORIDA  
DEPARTMENT OF ENVIRONMENTAL PROTECTION  
NOTICE OF FINAL PERMIT

In the Matter of an  
Application for Air Permit by:

Mr. Jim Murray, Plant Manager  
Northern Star Generation Services  
8275 Exchange Drive  
Orlando, Florida 32809

DEP File No. 0950203-007-AC  
Orlando Cogen Limited, L.P  
GT 11NMC Turbine Upgrade Project  
Orange County

Enclosed is the Final Permit Number 0950203-007-AC authorizing the applicant to replace the rotor (power) section of the combustion turbine electrical generator (CT) and to physically upgrade it from an Alstom Model GT 11NM to a Model GT 11NMC by replacing key components in the compressor section of the CT with improved ones. This upgrade will increase the nominal power rating of the CT as a result of the present and previous projects from 79 to 86.8 megawatts (MW) at the International Standards Organization (ISO) conditions of 59 degrees Fahrenheit and 1 atmosphere of pressure. The total power rating of the combined cycle unit including the CT; a heat recovery steam generator (HRSG) with a duct burner (DB) system; and a nominal 50 megawatts (MW) steam turbine-electrical generator (ST) is 136.8 MW.

Any party to this order (permit) has the right to seek judicial review of the permit pursuant to Section 120.68, F.S., by the filing of a Notice of Appeal pursuant to Rule 9.110, Florida Rules of Appellate Procedure, with the Clerk of the Department in the Legal Office; and by filing a copy of the Notice of Appeal accompanied by the applicable filing fees with the appropriate District Court of Appeal. The Notice of Appeal must be filed within 30 days from the date this Notice is filed with the Clerk of the Department.

Executed in Tallahassee, Florida.



Trina L. Vielhauer, Chief  
Bureau of Air Regulation


**CERTIFICATE OF SERVICE**

The undersigned duly designated deputy agency clerk hereby certifies that this Notice of Final Permit (including the Final Permit) and all copies were sent electronically (with Received Receipt Requested) before the close of business on 2/7/08 to the person(s) listed:

Mr. Jim Murray, Northern Star: [jim.murray@northernstargen.com](mailto:jim.murray@northernstargen.com)  
Mr. Dave Kellermeyer, Northern Star: [davekellermeyer@northernstargen.com](mailto:davekellermeyer@northernstargen.com)  
Mr. Scott Osbourn, P.E., Golder Associates: [sosbourn@golder.com](mailto:sosbourn@golder.com)  
Jim Bradner, DEP CD: [james.bradner@dep.state.fl.us](mailto:james.bradner@dep.state.fl.us)  
Lori Cunniff, Orange County EPD: [lori.cunniff@ocfl.net](mailto:lori.cunniff@ocfl.net)  
Jim Little, EPA Region 4: [little.james@epamail.epa.gov](mailto:little.james@epamail.epa.gov)  
Katy Forney, EPA Region 4: [forney.kathleen@epa.gov](mailto:forney.kathleen@epa.gov)

**Clerk Stamp**

**FILING AND ACKNOWLEDGMENT FILED**, on this date, pursuant to §120.52, Florida Statutes, with the designated Department Clerk, receipt of which is hereby acknowledged.

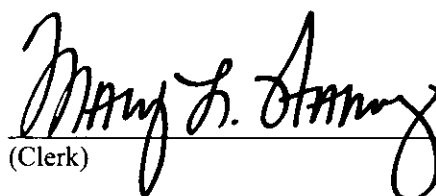

(Clerk)

2/7/08  
(Date)

# Florida Department of Environmental Protection

---

## Memorandum

TO: Joseph Kahn, Director, Division of Air Resource Management  
THROUGH: Trina Vielhauer, Chief, Bureau of Air Regulation  
THROUGH: Al Linero *AL*  
FROM: David Read *DR*  
DATE: February 5, 2008  
SUBJECT: Final Air Permit No. 0950203-007-AC  
Northern Star Generation Services  
Orlando Cogen Limited L.P.  
GT 11NMC Turbine Upgrade Project

Attached for your review are the following items:

- Final Notice;
- Final Determination; and
- Final Permit.

The Final Determination explains the purpose of the project and the events since issuance of the Draft permit so we have not repeated these here. We recommend your approval of the attached final permit for this project.

Attachments

**Harvey, Mary**

**From:** Harvey, Mary  
**Sent:** Thursday, February 07, 2008 1:28 PM  
**To:** 'Mr. Jim Murray, Northern Star:'; 'Mr. Dave Kellermeyer, Northern Star:'; 'Mr. Scott Osbourn, P.E., Golder Associates:'; 'Bradner, James:'; 'Lori Cunniff, Orange County EPD:'; 'Jim Little, EPA Region 4:'; 'Katy Forney, EPA Region 4:'  
**Cc:** Read, David; Walker, Elizabeth (AIR); Gibson, Victoria  
**Subject:** ~~ORLANDO COGEN LIMITED, L.P. - DEP FILE #0950203-007-AC-FINAL~~  
**Attachments:** ~~Orlando Cogen Limited, L.P. - Facility #0950203-007-AC-FINAL.pdf~~

Tracking:	Recipient	Delivery	Read
<input checked="" type="checkbox"/>	Mr. Jim Murray, Northern Star:		
<input checked="" type="checkbox"/>	Mr. Dave Kellermeyer, Northern Star:		
<input checked="" type="checkbox"/>	Mr. Scott Osbourn, P.E., Golder Associates:		
<input checked="" type="checkbox"/>	Bradner, James		Read: 2/7/2008 2:13 PM
<input checked="" type="checkbox"/>	Lori Cunniff, Orange County EPD:		
<input checked="" type="checkbox"/>	Jim Little, EPA Region 4:		
<input checked="" type="checkbox"/>	Katy Forney, EPA Region 4:		
<input checked="" type="checkbox"/>	Read, David		Read: 2/7/2008 1:28 PM
<input checked="" type="checkbox"/>	Walker, Elizabeth (AIR)	Delivered: 2/7/2008 1:28 PM	
	Gibson, Victoria		

Dear Sir/Madam:

Please send a "reply" message verifying receipt of the attached document(s); this may be done by selecting "Reply" on the menu bar of your e-mail software and then selecting "Send". We must receive verification of receipt and your reply will preclude subsequent e-mail transmissions to verify receipt of the document(s).

The document(s) may require immediate action within a specified time frame. Please open and review the document(s) as soon as possible.

The document is in Adobe Portable Document Format (pdf). Adobe Acrobat Reader can be downloaded for free at the following internet site:  
<http://www.adobe.com/products/acrobat/readstep.html>.

The Bureau of Air Regulation is issuing electronic documents for permits, notices and other correspondence in lieu of hard copies through the United States Postal System, to provide greater service to the applicant and the engineering community. Please advise this office of any changes to your e-mail address or that of the Engineer-of-Record.

Thank you,

DEP, Bureau of Air Regulation

~~Please verify receipt of the attached document(s), this may~~

2/11/2008

## Harvey, Mary

---

**From:** Read, David  
**To:** Harvey, Mary  
**Sent:** Thursday, February 07, 2008 1:37 PM  
**Subject:** Read: ORLANDO COGEN LIMITED, L.P. - DEP FILE #0950203-007-AC-FINAL

Your message

**To:** Read, David  
**Subject:** FW: ORLANDO COGEN LIMITED, L.P. - DEP FILE #0950203-007-AC-FINAL  
**Sent:** 2/7/2008 1:36 PM

was read on 2/7/2008 1:37 PM.

## Harvey, Mary

---

**From:** Lori.Cunniff@ocfl.net  
**To:** Harvey, Mary  
**Sent:** Thursday, February 07, 2008 1:39 PM  
**Subject:** Read: ORLANDO COGEN LIMITED, L.P. - DEP FILE #0950203-007-AC-FINAL

Your message

**To:** Lori.Cunniff@ocfl.net  
**Subject:**

was read on 2/7/2008 1:39 PM.

**Harvey, Mary**

---

**From:** Forney.Kathleen@epamail.epa.gov  
**Sent:** Monday, February 11, 2008 4:55 PM  
**To:** Harvey, Mary  
**Subject:** Re: FW: ORLANDO COGEN LIMITED, L.P. - DEP-FILE-#0950203-007-AC-FINAL

**Attachments:** Orlando Cogen Limited, L.P. - Facility #0950203-007-AC-FINAL.pdf



Orlando Cogen Limited, L.P. - ...

we got this one Mary. Thanks

-----  
Katy R. Forney  
Air Permits Section  
EPA - Region 4  
61 Forsyth St., SW  
Atlanta, GA 30303

Phone: 404-562-9130  
Fax: 404-562-9019

"Harvey, Mary"  
<Mary.Harvey@dep.state.fl.us>

02/11/2008 04:19 PM

ORLANDO COGEN LIMITED, L.P. - DEP FILE #0950203-007-AC-FINAL  
Kathleen Forney/R4/USEPA/US@EPA

To  
cc

Subject  
FW: ORLANDO COGEN LIMITED, L.P. -  
DEP FILE #0950203-007-AC-FINAL

Hi - I didn't get a read receipt on this.

Thanks  
Mary

The Department of Environmental Protection values your feedback as a customer. DEP Secretary Michael W. Sole is committed to continuously assessing and improving the level and quality of services provided to you. Please take a few minutes to comment on the quality of service you received. Simply click on this link to the DEP Customer Survey. Thank you in advance for completing the survey.

From: Harvey, Mary  
Sent: Thursday, February 07, 2008 1:45 PM  
To: 'dave.kellermeyer@northernstargen.com'  
Subject: FW: ORLANDO COGEN LIMITED, L.P. - DEP FILE #0950203-007-AC-FINAL

## Harvey, Mary

---

**From:** Osbourn, Scott [Scott\_Osbourn@golder.com]  
**To:** Harvey, Mary  
**Sent:** Thursday, February 07, 2008 1:35 PM  
**Subject:** Read: ORLANDO COGEN LIMITED, L.P. - DEP FILE #0950203-007-AC-FINAL

Your message

**To:** Scott\_Osbourn@golder.com  
**Subject:**

was read on 2/7/2008 1:35 PM.

**Harvey, Mary**

---

**From:** Murray, Jim [jim.murray@northernstargen.com]  
**Sent:** Thursday, February 07, 2008 2:14 PM  
**To:** Harvey, Mary  
**Subject:** RE: ORLANDO COGEN LIMITED, L.P. - DEP FILE #0950203-007-AC-FINAL

James T Murray  
407-851-1350 ext.2022

---

**From:** Harvey, Mary [mailto:Mary.Harvey@dep.state.fl.us]  
**Sent:** Thursday, February 07, 2008 1:28 PM  
**To:** Murray, Jim; Mr. Dave Kellermeyer, Northern Star;; Mr. Scott Osbourn, P.E., Golder Associates;; Bradner, James; Lori Cunniff, Orange County EPD;; Jim Little, EPA Region 4;; Katy Forney, EPA Region 4:  
**Cc:** Read, David; Walker, Elizabeth (AIR); Gibson, Victoria  
**Subject:** ORLANDO COGEN LIMITED, L.P. - DEP FILE #0950203-007-AC-FINAL

Dear Sir/Madam:

Please send a "reply" message verifying receipt of the attached document(s); this may be done by selecting "Reply" on the menu bar of your e-mail software and then selecting "Send". We must receive verification of receipt and your reply will preclude subsequent e-mail transmissions to verify receipt of the document(s).

The document(s) may require immediate action within a specified time frame. Please open and review the document(s) as soon as possible.

The document is in Adobe Portable Document Format (pdf). Adobe Acrobat Reader can be downloaded for free at the following internet site:  
<http://www.adobe.com/products/acrobat/readstep.html>.

The Bureau of Air Regulation is issuing electronic documents for permits, notices and other correspondence in lieu of hard copies through the United States Postal System, to provide greater service to the applicant and the engineering community. Please advise this office of any changes to your e-mail address or that of the Engineer-of-Record.

Thank you,

DEP, Bureau of Air Regulation

*The Department of Environmental Protection values your feedback as a customer. DEP Secretary Michael W. Sole is committed to continuously assessing and improving the level and quality of services provided to you. Please take a few minutes to comment on the quality of service you received. Simply click on [this link to the DEP Customer Survey](#). Thank you in advance for completing the survey.*

---

The information contained in this email message may be privileged, confidential and protected from disclosure. If you think that you have received this email message in error, please notify the sender by reply email and delete the message and any attachments.

2/7/2008



**Harvey, Mary**

---

**From:** Bradner, James  
**Sent:** Thursday, February 07, 2008 2:13 PM  
**To:** Harvey, Mary  
**Subject:** RE: ORLANDO COGEN LIMITED, L.P. - DEP-FILE-#0950203-007-AC-FINAL

Received—thank you.

---

**From:** Harvey, Mary  
**Sent:** Thursday, February 07, 2008 1:28 PM  
**To:** 'Mr. Jim Murray, Northern Star:'; 'Mr. Dave Kellermeyer, Northern Star:'; 'Mr. Scott Osbourn, P.E., Golder Associates:'; Bradner, James; 'Lori Cunniff, Orange County EPD:'; 'Jim Little, EPA Region 4:'; 'Katy Forney, EPA Region 4:'  
**Cc:** Read, David; Walker, Elizabeth (AIR); Gibson, Victoria  
**Subject:** ORLANDO COGEN LIMITED, L.P. - DEP FILE #0950203-007-AC-FINAL

Dear Sir/Madam:

Please send a "reply" message verifying receipt of the attached document(s); this may be done by selecting "Reply" on the menu bar of your e-mail software and then selecting "Send". We must receive verification of receipt and your reply will preclude subsequent e-mail transmissions to verify receipt of the document(s).

The document(s) may require immediate action within a specified time frame. Please open and review the document(s) as soon as possible.

The document is in Adobe Portable Document Format (pdf). Adobe Acrobat Reader can be downloaded for free at the following internet site:  
<http://www.adobe.com/products/acrobat/readstep.html>.

The Bureau of Air Regulation is issuing electronic documents for permits, notices and other correspondence in lieu of hard copies through the United States Postal System, to provide greater service to the applicant and the engineering community. Please advise this office of any changes to your e-mail address or that of the Engineer-of-Record.

Thank you,

DEP, Bureau of Air Regulation

## Harvey, Mary

---

**From:** Bradner, James  
**To:** Harvey, Mary  
**Sent:** Thursday, February 07, 2008 2:13 PM  
**Subject:** Read: ORLANDO COGEN LIMITED, L.P. - DEP FILE #0950203-007-AC-FINAL

### Your message

**To:** 'Mr. Jim Murray, Northern Star:'; 'Mr. Dave Kellermeyer, Northern Star:'; 'Mr. Scott Osbourn, P.E., Golder Associates:'; Bradner, James; 'Lori Cunniff, Orange County EPD:'; 'Jim Little, EPA Region 4:'; 'Katy Forney, EPA Region 4:'  
**Cc:** Read, David; Walker, Elizabeth (AIR); Gibson, Victoria  
**Subject:** ORLANDO COGEN LIMITED, L.P. - DEP FILE #0950203-007-AC-FINAL  
**Sent:** 2/7/2008 1:28 PM

was read on 2/7/2008 2:13 PM.

## Harvey, Mary

---

**From:** Murray, Jim [jim.murray@northernstargen.com]  
**To:** Harvey, Mary  
**Sent:** Thursday, February 07, 2008 2:13 PM  
**Subject:** Read: ORLANDO COGEN LIMITED, L.P. - DEP FILE #0950203-007-AC-FINAL

Your message

**To:** jim.murray@northernstargen.com  
**Subject:**

was read on 2/7/2008 2:13 PM.


**Harvey, Mary**

---

**From:** Lori.Cunniff@ocfl.net  
**Sent:** Sunday, February 10, 2008 9:39 PM  
**To:** Harvey, Mary  
**Subject:** RE: ORLANDO COGEN LIMITED, L.P. - DEP FILE #0950203-007-AC-FINAL

Received

Lori Cunniff, Manager  
Orange County Environmental Protection Division  
800 Mercy Drive  
Orlando, FL 32808  
407-836-1405

 Please consider the environment before printing this e-mail.

---

*PLEASE NOTE: Florida has a very broad public records law (F. S. 119). All e-mails to and from County Officials are kept as a public record. Your e-mail communications, including your e-mail address may be disclosed to the public and media at any time.*

---

**From:** Harvey, Mary [mailto:Mary.Harvey@dep.state.fl.us]  
**Sent:** Thursday, February 07, 2008 1:28 PM  
**To:** Mr. Jim Murray, Northern Star;; Mr. Dave Kellermeyer, Northern Star;; Mr. Scott Osbourn, P.E., Golder Associates;; Bradner, James; Cunniff, Lori; Jim Little, EPA Region 4;; Katy Forney, EPA Region 4:  
**Cc:** Read, David; Walker, Elizabeth (AIR); Gibson, Victoria  
**Subject:** ORLANDO COGEN LIMITED, L.P. - DEP FILE #0950203-007-AC-FINAL

Dear Sir/Madam:

Please send a "reply" message verifying receipt of the attached document(s); this may be done by selecting "Reply" on the menu bar of your e-mail software and then selecting "Send". We must receive verification of receipt and your reply will preclude subsequent e-mail transmissions to verify receipt of the document(s).

The document(s) may require immediate action within a specified time frame. Please open and review the document(s) as soon as possible.

The document is in Adobe Portable Document Format (pdf). Adobe Acrobat Reader can be downloaded for free at the following internet site:  
<http://www.adobe.com/products/acrobat/readstep.html>.

The Bureau of Air Regulation is issuing electronic documents for permits, notices and other correspondence in lieu of hard copies through the United States Postal System, to provide greater service to the applicant and the engineering community. Please advise this office of any changes to your e-mail address or that of the Engineer-of-Record.

**Harvey, Mary**

---

**From:** Kellermeyer, Dave [dave.kellermeyer@northernstargen.com]  
**Sent:** Friday, February 08, 2008 8:23 AM  
**To:** Harvey, Mary  
**Subject:** RE: ORLANDO COGEN LIMITED, L.P. - DEP FILE #0950203-007-AC-FINAL

---

**From:** Harvey, Mary [mailto:Mary.Harvey@dep.state.fl.us]  
**Sent:** Thursday, February 07, 2008 12:45 PM  
**To:** Kellermeyer, Dave  
**Subject:** FW: ORLANDO COGEN LIMITED, L.P. - DEP FILE #0950203-007-AC-FINAL

*The Department of Environmental Protection values your feedback as a customer. DEP Secretary Michael W. Sole is committed to continuously assessing and improving the level and quality of services provided to you. Please take a few minutes to comment on the quality of service you received. Simply click on [this link to the DEP Customer Survey](#). Thank you in advance for completing the survey.*

**From:** Harvey, Mary  
**Sent:** Thursday, February 07, 2008 1:28 PM  
**To:** 'Mr. Jim Murray, Northern Star:'; 'Mr. Dave Kellermeyer, Northern Star:'; 'Mr. Scott Osbourn, P.E., Golder Associates:'; Bradner, James; 'Lori Cunniff, Orange County EPD:'; 'Jim Little, EPA Region 4:'; 'Katy Forney, EPA Region 4:'  
**Cc:** Read, David; Walker, Elizabeth (AIR); Gibson, Victoria  
**Subject:** ORLANDO COGEN LIMITED, L.P. - DEP FILE #0950203-007-AC-FINAL

Dear Sir/Madam:

Please send a "reply" message verifying receipt of the attached document(s); this may be done by selecting "Reply" on the menu bar of your e-mail software and then selecting "Send". We must receive verification of receipt and your reply will preclude subsequent e-mail transmissions to verify receipt of the document(s).

The document(s) may require immediate action within a specified time frame. Please open and review the document(s) as soon as possible.

The document is in Adobe Portable Document Format (pdf). Adobe Acrobat Reader can be downloaded for free at the following internet site:  
<http://www.adobe.com/products/acrobat/readstep.html>.

The Bureau of Air Regulation is issuing electronic documents for permits, notices and other correspondence in lieu of hard copies through the United States Postal System, to provide greater service to the applicant and the engineering community. Please advise this office of any changes to your e-mail address or that of the Engineer-of-Record.

2/8/2008