


*File (off)*

STATE OF FLORIDA  
DEPARTMENT OF ENVIRONMENTAL REGULATION

TWIN TOWERS OFFICE BUILDING  
2600 BLAIR STONE ROAD  
TALLAHASSEE, FLORIDA 32399-2400



BOB MARTINEZ  
GOVERNOR  
DALE TWACHTMANN  
SECRETARY

June 9, 1987

Mr. Stephen L. Neck, P.E.  
Air Consulting & Engineering  
2106 N.W. 67th Place, Suite 4  
Gainesville, Florida 32606

Dear Mr. Neck:

Re: Kissimmee Utilities Commission, Gas Turbine/Allowable,  
NOx Emissions, Permit Nos. AO 49-093754 and PSD-FL-87

The Bureau of Air Quality Management (BAQM) has received your request and additional information dated February 25, 1987, and April 27, 1987, respectively, on behalf of Kissimmee Utilities Commission.

We forwarded this information to the USEPA, Region IV. Their response, as you can see in the copy attached, is to deny your request since the reported nitrogen content of the natural gas is not fuel bound nitrogen.

Unless supporting documentation, as specified in Bruce P. Miller's letter of June 1, 1987, is provided, credit cannot be given in the calculation of allowable NOx emissions under 40 CFR 60, Subpart GG.

Should you choose to pursue this request, please direct future correspondence on this matter to Mr. Bruce P. Miller, Air Program Branch, Region IV, 345 Courtland Street, N.E., Atlanta, Georgia 30365 and send a copy to our office.

Sincerely,

*C. H. Fancy*  
C. H. Fancy, P.E.  
Deputy Chief  
Bureau of Air Quality  
Management

CHF/TH/s

cc: Bruce P. Miller  
Tom Sawicki

attachment



PM  
6-2-87  
Atlanta, Ga.

File copy

UNITED STATES ENVIRONMENTAL PROTECTION AGENCY

REGION IV

345 COURTLAND STREET  
ATLANTA, GEORGIA 30365

JUN - 1 1987

4APT/APB-ljf

Mr. Clair Fancy, P.E.  
Deputy Chief  
Bureau of Air Quality Management  
Twin Towers Office Building  
2600 Blair Stone Road  
Tallahassee, Florida 32301

DER  
JUN 4 1987  
BAQM

Re: Kissimmee Utilities (Osceola County)

Dear Mr. Fancy:

This is in regard to your letter of April 10, 1987, forwarding the above company's request to increase the allowable nitrogen oxides emissions from their 49.9 MW combined cycle gas turbine. They have requested to increase their allowable emissions concentration limit from 79 ppm to 130 ppm using the fuel bound nitrogen credit as provided for in the New Source Performance Standards, Subpart GG.

We have reviewed the company's request to use the nitrogen content of their natural gas supply in calculating the emissions rate from equations contained in Subpart GG, New Source Performance Standards. During our review, we contacted the Office of Air Quality Planning and Standards regarding the definition of fuel bound nitrogen and data regarding measured concentrations of fuel bound nitrogen in natural gas. Their response was that natural gas does not contain measurable amounts of fuel bound nitrogen and that the nitrogen content reported by the supplier is probably atmospheric nitrogen which is not credible as fuel bound nitrogen. Therefore, the company's analysis supporting their request to increase their nitrogen oxides emissions rate is not valid.

In summary, the company's request to increase nitrogen oxides emissions when burning natural gas should be denied on the basis that the reported nitrogen content of the natural gas is not fuel bound nitrogen. Unless the supplier is able to provide an analysis of their natural gas which determines fuel bound nitrogen only, with supporting documentation of test methods and procedures, credit cannot be given in the calculation of allowable nitrogen oxide emissions as provided under the New Source Performance Standards, Subpart GG.

If you have any questions regarding this determination, you may contact Michael Brandon of my staff at (404) 347-2864.

Sincerely,

*Bruce P. Miller*

Bruce P. Miller, Chief  
Air Programs Branch  
Air, Pesticides and Toxics  
Management Division

Terrence Hannon }  
Bill Thomas } 6-4-87 RAM

*Teresa Heron*

STATE OF FLORIDA  
DEPARTMENT OF ENVIRONMENTAL REGULATION

TWIN TOWERS OFFICE BUILDING  
2600 BLAIR STONE ROAD  
TALLAHASSEE, FLORIDA 32399-2400



BOB MARTINEZ  
GOVERNOR  
DALE TWACHTMANN  
SECRETARY

April 10, 1987

Mr. Bruce Miller  
Chief, Air Facilities Branch  
Air & Waste Management Division  
USEPA - Region IV  
345 Courtland Street, N.E.  
Atlanta, Georgia 30365

Dear Mr. Miller:

Re: PSD-FL-087  
Kissimmee Utilities (Osceola County)

Attached, for your information, is a copy of Kissimmee Utilities' request to increase NOx emission concentrations from their 49.9 MW-Combined Cycle Gas Turbine.

The construction permits for this unit, PSD-FL-087 and AC 49-46521, were originally issued on February 19, 1982, and November 25, 1981, respectively.

In 1983, the Company failed to apply for an operating permit within the time allowed by the construction permit. Therefore, we requested a submission of a new application. The application was reviewed and a new state permit was issued on March 30, 1984.

On April 1, 1984, we received the above mentioned request. Currently, we are in the process of modifying the BACT determination and specific conditions for state permits AC 49-74856 and AO 49-093754.

If you have any questions, please call Teresa Heron (Review Engineer) or Barry Andrews (BACT Coordinator) at (904)488-1344.

Sincerely,

*Clair Fancy*  
Clair Fancy, P.E.  
Deputy Chief  
Bureau of Air Quality  
Management

CHF/TH/s

cc: John Turner, DER Orlando

STATE OF FLORIDA  
DEPARTMENT OF ENVIRONMENTAL REGULATION

TWIN TOWERS OFFICE BUILDING  
2600 BLAIR STONE ROAD  
TALLAHASSEE, FLORIDA 32301-8241



BOB GRAHAM  
GOVERNOR  
VICTORIA J. TSCHINKEL  
SECRETARY

June 27, 1984

Mr. Peter F. Burnete, Manager  
Source Testing Department  
Environmental Science and Engineering (ESE)  
Post Office Box ESE  
Gainesville, Florida 32602

Dear Sir:


This is in response to your letter of June 7, 1984. The acceptability of the test port location modification described in your letter has been approved by Ed Palagyi, Bill Thomas, Teresa Heron of my staff and Jim Manning of EPA. Therefore, you may proceed with the required compliance test as outlined in your letter.

Please notify the Orlando Office prior to the scheduled test, so that a witness can be present.

We will be waiting for the compliance test report. In the event these results are not representative of this operation, Kissimmee Utilities may be required to retest by EPA Method 20 as specified in 40 CFR, Appendix A.

If you have any questions regarding this matter, please call Ed Palagyi or Teresa M. Heron or write to me to the above address.

Sincerely

*for*   
C. H. Fancy  
Deputy Chief  
Bureau of Air Quality  
Management

TH/agh

cc: Bill Blommel, DER  
John Turner, SJR  
Jim Manning, EPA

**ENVIRONMENTAL SCIENCE  
AND ENGINEERING, INC.**

June 7, 1984

Mr. Ed Palagyi  
Florida Department of Environmental Regulation  
2600 Blair Stone Road  
Tallahassee, Florida 32301

Dear Mr. Palagyi:

Enclosed please find a Test Protocol for NSPS testing at Kissimmee Utilities on their gas fired turbine/combined cycle boiler system. Also, please find a stack schematic showing sample port locations.

Please contact us as soon as possible regarding the acceptability of the protocol. We will then establish a test date mutually acceptable to all parties.

Sincerely,



Peter F. Burnette  
Department Manager  
Source Testing Department

cc: David A. Buff, ESE  
Glen Massiongale, Kissimmee Utilities

**MEMO**

From: Ed Palagyi

To: TERESA

THIS LOOK

OK TO  
YOU?

Ed

· KISSIMMEE UTILITIES TEST PROTOCOL

Permit No. AC 49-74856  
Expires August 1, 1984

Gas Turbine/Combined Cycle Boiler

Performance tests shall be conducted while the unit is burning natural gas and is operating at ± 10% of capacity.

The only possible test location, without major alterations of the duct/stack system, is the outlet stack of the combined cycle boiler. The proposed location is four feet above the duct conveying flue gas to the stack. The stack is twelve feet in diameter. Two sample ports 90° apart will be cut into the stack such as the inlet duct may be used as a sampling platform. Since only gaseous pollutant sampling will be performed (no particulate sampling will be performed since the test is on natural gas), the effects on the test results of the close proximity of the sample ports to the inlet duct will be minimal. } 2


Oxygen will be monitored at a point between the turbine and the boiler (as close to the turbine outlet as possible) and also at the boiler outlet. This will demonstrate any in-leakage to the system between the turbine and the boiler stack. No dilution is expected since the exhaust system is under positive pressure and any leakage should be out of the system. Should in-leakage occur appropriate corrections will be made to sample concentrations as per EPA Methods. <

EPA Methods 1-4 will be used to determine stack velocity, flow rate, temperature, moisture content, and flue gas analysis. <

Opacity will be determined using EPA Method 9. . 2

EPA Methods 10 and 20 shall be used to measure CO and NO<sub>x</sub>, respectively.

Water injection rates will be recorded manually at least hourly during the testing period by plant personnel.

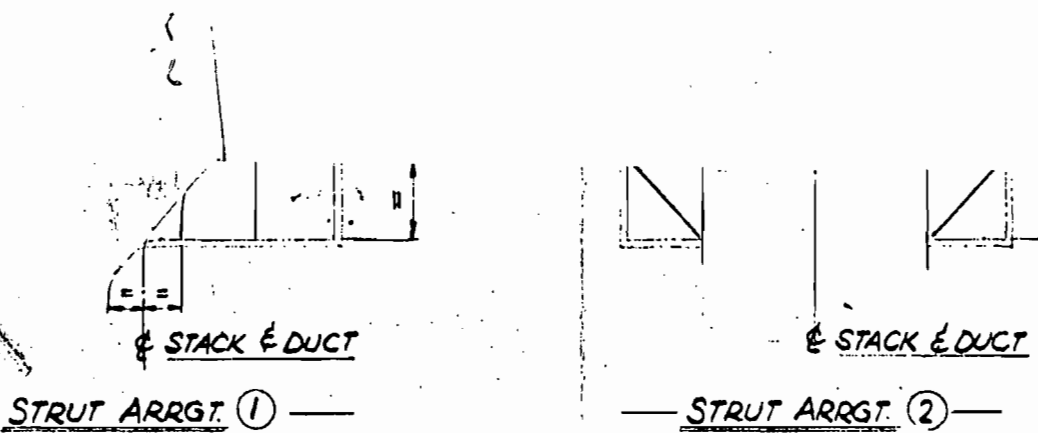


4.1.1.

Sampling site as close as practical to the exhaust of the turbine.

Sampling site shall be located upstream of the point of introduction of dilution air into the duct.

Sample ports may be located before or after the upturn elbow. Sample ports shall not be located within 5 feet of the gas discharge to the atm.


Minimum diameter of the sample ports shall be 3-inch nominal pipe size

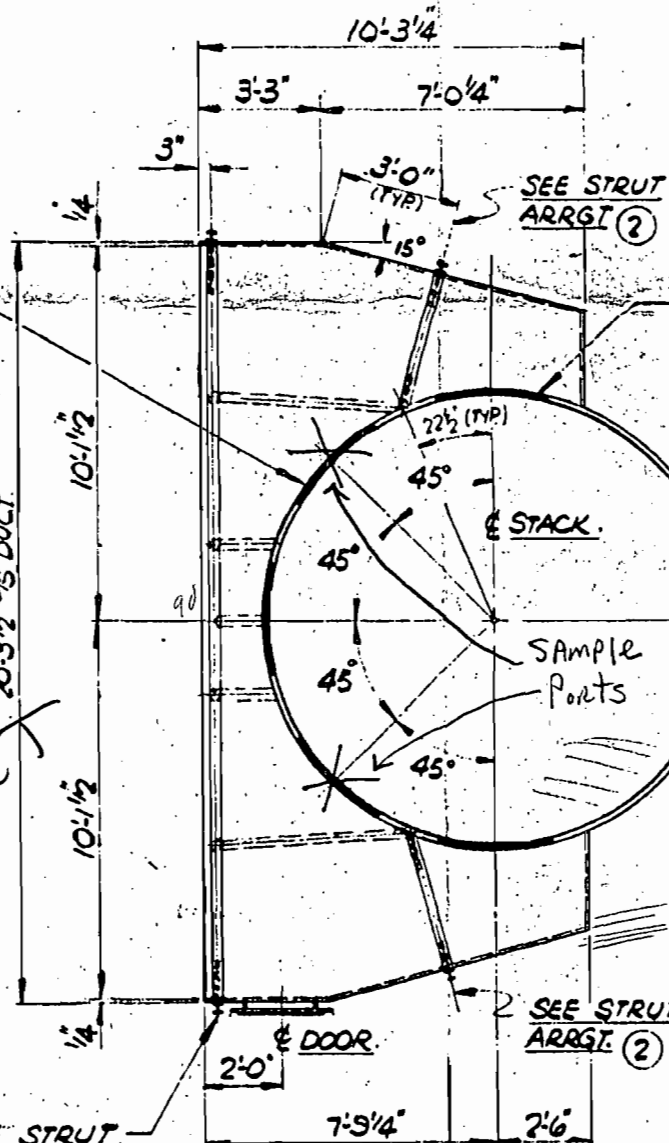

SHOP & ERECTOR NOTE:  
SHOP TO CUT 10" LG. ON 12" CTRS. FOR 3" C HOLES IN STACK & ER TO COMPLETE CUT AFT. ERECTION.

SECTION 'D-D'

*Samples ports shall not be located within 5 feet of diameter of stack discharged to the atmosphere*

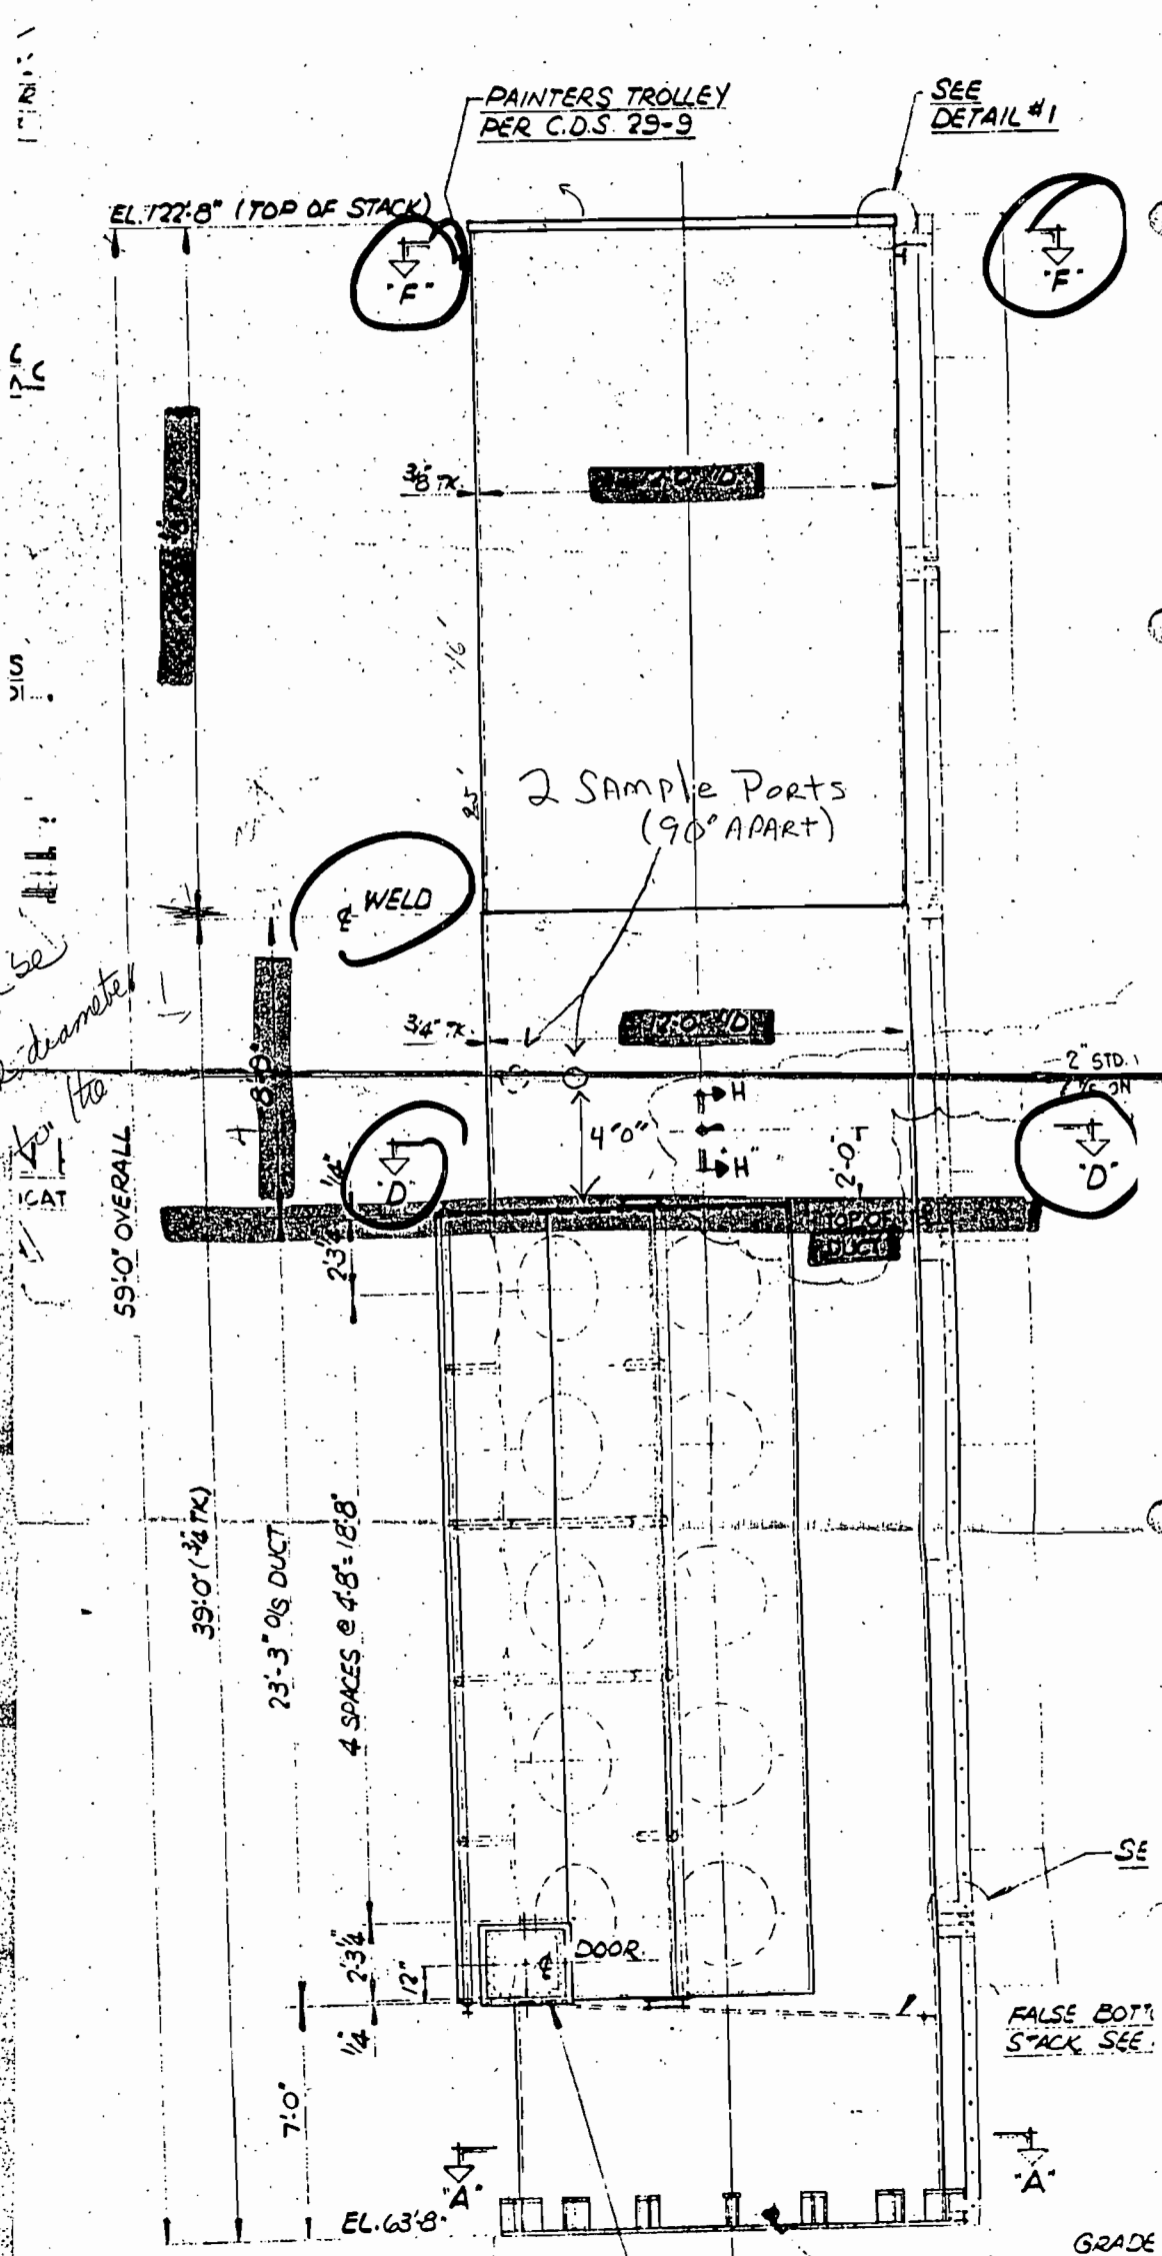



State of Florida  
DEPARTMENT OF ENVIRONMENTAL REGULATION  
INTEROFFICE MEMORANDUM

For Routing To District Offices And/Or To Other Than The Addressee			
To: _____	Loctn.: _____		
To: _____	Loctn.: _____		
To: _____	Loctn.: _____		
From: _____	Date: _____		
Reply Optional [ ]	Reply Required [ ]	Info. Only [ ]	
Date Due: _____	Date Due: _____		

TO: Victoria J. Tschinkel  
FROM: Clair Fancy *Willard Hanks*  
DATE: May 15, 1984  
SUBJ: Modification of Condition  
Permit No. AC 49-74856

**RECEIVED**  
MAY 16 1984

Office of the Secretary

Attached for your signature is a letter extending the expiration date of the above referenced permit to Kissimmee Utilities.

CF/pa

Attachment

STATE OF FLORIDA  
DEPARTMENT OF ENVIRONMENTAL REGULATION

TWIN TOWERS OFFICE BUILDING  
2600 BLAIR STONE ROAD  
TALLAHASSEE, FLORIDA 32301-8241



BOB GRAHAM  
GOVERNOR  
VICTORIA J. TSCHINKEL  
SECRETARY

May 14, 1984

Mr. James C. Welsh  
Utilities Director  
Kissimmee Utilities  
Post Office Box 1608  
Kissimmee, Florida 32741

Dear Mr. Welsh:

Modification of Condition  
Permit No. AC 49-74856

The department is in receipt of your request for a modification of your construction permit number AC 49-74856.

This request is acceptable and the condition of the permit AC 49-74856 is changed as follows:

<u>Condition</u>	<u>From</u>	<u>To</u>
Expiration Date	August 1, 1984	October 1, 1984

Attachment:

David A. Buff's modification request letter of May 3, 1984.

This letter and attachment must be attached to your permit AC 49-74856 and becomes a part of this permit.

Sincerely,

Victoria J. Tschinkel  
Secretary

VJT/s

cc: Charles Collins  
David A. Buff  
Max Alderman

# ESE

## ENVIRONMENTAL SCIENCE AND ENGINEERING, INC.

May 3, 1984  
81-613-0200

Ms. Teresa M. Heron  
Florida Department of  
Environmental Regulation  
Bureau of Air Quality Management  
2600 Blair Stone Road  
Tallahassee, FL 32301

DER  
MAY 04 1984  
BAQM

Subject: Kissimmee Utilites Permit No. AC49-74856

Dear Ms. Heron:

In follow-up to our conversation of April 27, 1984, this letter is to request on behalf of Kissimmee Utilities, an extension of the construction permit, which currently expires on August 1, 1984. Condition 13 of the construction permit requires a complete application for an operating permit to be submitted to the DER prior to 90 days of the expiration date of the construction permit. This would require the construction permit to be submitted on about May 1, 1984. Kissimme Utilities will not be able to complete an operating permit application by May 1st for several reasons. The first is that the construction permit was not received by Kissimmee Utilities until April 13, 1984. Therefore, they would have had approximately two weeks to perform all required performance tests and submit the application, which is not practical.

Secondly, the DER upheld the requirement of performing the source testing between the gas turbine and the boiler of the combined cycle unit. At present there are no ports installed in the bypass exhaust stack of the gas turbine and it would be nearly impossible to do so because of silencer on the stack. I am presently negotiating further with Ed Palagyi on this point. Once a decision is made it will take some time to install the required stack sampling ports.

Thirdly, Westinghouse has experienced some delays in completing their performance tests of the gas turbine unit. Westinghouse will be performing some additional testing in the first few weeks of May, and therefore the performance testing required by the construction permit will need to be delayed until after that time. Therefore, Kissimmee Utilities anticipates performance testing of the unit as required by the construction permit to be conducted during the last half of May or first half of June. A completed operating permit application could then likely be submitted during June.

Ms. Teresa M. Heron  
May 3, 1984  
Page 2

As a result, Kissimmee Utilities requests that the construction permit application date be extended to October 1, 1984. If you have any questions concerning this request, please call Mr. Max Alderman at Kissimmee Utilities or myself.

Sincerely,

A handwritten signature in cursive script that reads "David A. Buff".

David A. Buff, ME, PE  
Senior Engineer

DAB:rr

cc: Mr. James C., Welch, Kissimmee Utilities  
Mr. Max Alderman, Kissimmee Utilities  
Mr. Pete Burnette, ESE



March 29, 1984

Mr. Ed Palagyi  
Department of Environmental Regulation  
Twin Towers Office Building  
2600 Blair Stone Road  
Tallahassee, Florida 32301-8241

DER

APR 02 1984

BAQM

Re: Air Pollution Permit AC 49-74856

Dear Mr. Palagyi:

This letter is intended to satisfy the requirements of NSPS monitoring under 60.334 (a) subpart GG, 40 CFR for Kissimmee Utility's W251 B8 gas turbine NO<sub>x</sub> control.

The system is installed exactly as is described in the construction permit application of September 9, 1983 having the following features:

- Water injection on/off lighted panel button in the control room.
- Fuel flow is continuously monitored and recorded at this point.
- Water injection skid is housed about 25 paces from the control room.
- The integrator is used to record water flow by receiving a signal from the flow meter.
- The integrator valve is incremented by one count for each gallon of water to the burner.
- An alarm is activated in the control room when water flow is lost.

Attached is a copy of the operators log used to monitor and record water flow to burners.

Very truly yours,

James C. Welsh, P.E.  
Electric Utilities Director

GM:JCW/rk  
Attachment

cc - Steve Neck  
Max Alderman

Fuel Log Sheet

Combined Cycle Plant  
Kissimmee, Florida

Date \_\_\_\_\_

Time	Plant MW	Gas Fuel Meter	No. 2 Fuel Meter	Remarks
0100				
0200				
0300				
0400				
0500				
0600				
0700				
0800				
0900				
1000				
1100				
1200				
1300				
1400				
1500				
1600				
1700				
1800				
1900				
2000				
2100				
2200				
2300				
2400				

NOTES:

Log Sheet 1 of 4

Westinghouse W251B8 Gas Turbine  
Kissimmee, Florida

Date \_\_\_\_\_

Time	P R E S S U R E S															T E M P E R A T U R E S								Water Injection Flow in Gallons						
	F.O. Forwarding Pump Discharge	L.P. Fuel Filter Inlet	L.P. Fuel Filter Outlet	Lube Oil Filter Inlet	Lube Oil Filter Outlet	Air Receiver	Main Lube Oil Pump Disch	Overspeed Trip	Fuel Pump	Instrument Air	High Pressure Oil	Bearing Oil	Combustor Shell (P2C)	Megawatts	Megavars	Temperature Spread	Blade Path Temp "0"	Blade Path Temp "1"	Blade Path Temp "2"	Blade Path Temp "3"	Blade Path Temp "4"	Blade Path Temp "5"	Blade Path Temp "6"		Blade Path Temp "7"	Blade Path Temp "8"				
0100																														
0200																														
0300																														
0400																														
0500																														
0600																														
0700																														
0800																														
0900																														
1000																														
1100																														
1200																														
1300																														
1400																														
1500																														
1600																														
1700																														
1800																														
1900																														
2000																														
2100																														
2200																														
2300																														
2400																														

Remarks: 11-7 Shift

2400 hours ME at ramping  
 Attempt to start \_\_\_\_\_ Load \_\_\_\_\_  
 Successful start \_\_\_\_\_  
 Normal stop \_\_\_\_\_

Remarks: 7-3 Shift

Remarks: 3-11 Shift

DER

APR 02 1984

BAQM

1-2-84  
1-2-84



STATE OF FLORIDA  
DEPARTMENT OF ENVIRONMENTAL REGULATION

TWIN TOWERS OFFICE BUILDING  
2600 BLAIR STONE ROAD  
TALLAHASSEE, FLORIDA 32301-8241



BOB GRAHAM  
GOVERNOR

VICTORIA J. TSCHINKEL  
SECRETARY

AC 49-74856

April 3, 1984

CERTIFIED MAIL-RETURN RECEIPT REQUESTED

Mr. James C. Welsh  
Utilities Director  
Kissimmee Utilities  
Post Office Box 1608  
Kissimmee, Florida 32741

Dear Mr. Welsh:

Enclosed is Permit Number AC 49-74856, dated March 30, 1984 to Kissimmee Utilities issued pursuant to Section 403, Florida Statutes.

Acceptance of this permit constitutes notice and agreement that the department will periodically review this permit for compliance, including site inspections where applicable, and may initiate enforcement actions for violation of the conditions and requirements thereof.

Sincerely,

*C. H. Fancy*  
for C. H. Fancy, P.E.  
Deputy Bureau Chief  
Bureau of Air Quality  
Management

CHF/pa

Enclosure

cc: David A. Buff, P.E., Environmental Science and  
Engineering  
Charles Collins, DER St. Johns River District

Final Determination

Kissimmee Utilities  
Osceola County

49.9 MW Combined Cycle Gas Turbine  
Permit Number AC 49-74856

Florida Department of Environmental Regulation  
Bureau of Air Quality Management  
Central Air Permitting

March 28, 1984

Kissimmee Utilities  
Construction Permit  
AC 49-74856

Kissimmee Utilities' application for permit to construct a 49.9 MW Combined Cycle Gas Turbine has been reviewed by the Bureau of Air Quality Management. Public notice of the Department's Intent to Issue the construction permit was published in the Osceola Little Sentinel and Orlando Sentinel on Sunday, January 15, 1984. Copies of the preliminary determination have been available for public inspection at the Department's St. Johns River District Office in Orlando, Kissimmee Public Library and the Bureau of Air Quality Management in Tallahassee.

The only comments received were from Mr. James C. Welsh, Electric Utilities Director for the City of Kissimmee. Mr. Welsh requested that specific conditions No. 2, 5, 6, 7 be modified and that the expiration date of the construction permit be changed to August 1, 1984.

The Department considered the comments and reply as follows:

COMMENT:

Specific Condition 2

Table 2 of the Preliminary Determination, which lists the allowable emission limits for each pollutant, contains an inconsistency, which also occurs throughout the Preliminary Determination and the draft construction permit. Table 2 specifies the allowable emissions of SO<sub>2</sub> from the gas turbine to be "0.5 percent S by weight and 388 lb/hr". For the boiler, the limits are "0.5 percent S by weight".

The table should read "0.8 percent S weight and 388 lb/hr" for the gas turbine, and "0.8 percent S by weight" for the boiler. The application submitted by Kissimmee Utilities was based upon 0.8 percent S which results in the 388 lb SO<sub>2</sub>/hr figure for the gas turbine. All air quality analysis results presented in the application and in the preliminary determination are based upon the 0.8 percent S fuel. This inconsistency is also reflected on page 11 of the Preliminary Determination.

The 0.8 percent S fuel is equivalent to the NSPS for gas turbines. The high efficiency of this combined cycle operation, and the resulting minimal environmental impacts, does not justify the lowering of the fuel sulfur content to 0.5 percent. In addition, economic penalties (i.e. fuel costs) would be associated with such a requirement. At a very conservative price differential between 0.5 and 0.8 percent S fuel of \$1/bbl,

additional fuel costs to Kissimmee Utilities could be as great as \$683,280 per year (78 bbls/hr x 8760 hr/yr x \$1/bbl).

RESPONSE:

The applicant has indicated that natural gas will be the primary fuel and No. 2 distillate oil as the secondary fuel.

Fuel oil grade No. 2 as described in the ASTM specification D 396 indicates the sulfur content to be 0.5% maximum by weight. Oil analyses of the No. 2 oil received by the bureau from locations throughout the State indicates an average sulfur content of 0.3 percent by weight. The sulfur content limit of 0.5 percent for the No.2 oil to be fired is not unreasonable. The hourly rate of SO<sub>2</sub> emissions will be changed to 255 lb/hr to be consistent with fuel sulfur content requirement.

The department does not understand the reason for the economic penalty. In a letter dated October 31, 1983, the applicant indicates that there will be no blending of fuel oils and the fuel oil would be received directly from the pipeline. Why would the applicant receiving No. 2 oil from the pipeline be charged more than other users of No. 2 fuel oil receiving from the pipeline? Secondly, why would the penalty be calculated for 8760 hours when the primary fuel is natural gas? These questions need to be answered before the department can reply.

COMMENT:

Specific Condition No. 5

It is requested that the NO<sub>x</sub> emission limits for both oil and gas not be fixed concentration levels, as they are now specified in the draft permit. This NSPS formula is considered to be more appropriate, due to the fluctuations in turbine efficiency and fuel-bound nitrogen content encountered under actual operating conditions. Therefore, the only limit specified for NO<sub>x</sub> should be the NSPS formula.

RESPONSE:

The NSPS formula for gas turbines  $[0.0075 (14/Y) + F]$  defines Y as the manufacturer's rated heat rate at peak load (KJ/Watt-hr). The value of Y shall not exceed 14.4 KJ/Watt-hr which is the heat rate of a gas turbine operating at 25 percent efficiency.

The applicant proposed a Y value of 13.66 KJ/Watt-hr based on the manufacturer's rated heat rate. This value was considered when evaluating BACT.

The BACT emission limit of 79 ppmv NO<sub>x</sub>, when burning natural gas, allows approximately a 5.36% increase, due to the efficiency

adjustment factor, over the selected numerical limit of 75 ppmv NOx corrected to 15 percent oxygen.

The linear efficiency adjustment factor was selected to permit increased NOx emissions from high efficiency gas turbines. The overall efficiency of the gas turbine combined with the boiler will yield to a Y value of 9.34 KJ/Watt-hr. When this value is substituted into the NSPS formula, an increase of approximately 54%, over the selected 75 ppmv, will be obtained. This is not the intent of the NSPS.

It should be noted that to be consistent with the intent of the standard, the efficiency factor must be based on the gas turbine efficiency itself (as defined in 40 CFR 60.331), not the overall efficiency of a gas turbine combined with other equipment (FR, Vol 44, No. 176, 9/10/79).

Gaseous and premium distillate fuels contain little or no "fuel-bound" or "organic" nitrogen. Heavy residual fuel oil and crude oils can contain high levels of fuel-bound nitrogen. A limited fuel-bound allowance above the numerical NOx limit (up to 50 ppm NOx) was chosen by EPA as an alternative to allow combustion of high nitrogen fuels (heavy oil, shale oil, coal derived fuels). The BACT emission limit of 129 ppm was based on the maximum NOx allowance of 50 ppm when burning fuel oil No. 2. No credit was given for the fuel-bound nitrogen when burning natural gas. Therefore, the BACT-NOx emission limits will remain as specified in the draft permit. (Please see EPA's letter dated April 28, 1983).

COMMENT:

Specific Condition No. 6

The draft permit conditions do not specify which fuel (i.e. gas or oil) to test on. Kissimmee Utilities proposed to test on oil only since this represents the worst case for NOx, CO, and particulate matter emissions from the gas turbine. Gas firing produces essentially no particulate matter emissions. Because of the configuration of the turbine, boiler and stack, it is simplest to conduct the performance tests at the main stack outlet of the boiler. Since only the gas turbine is required to be tested, no supplementary firing of fuel in the combined cycle boiler will occur during the performance tests. Thus, only gas turbine emissions will be tested, although the sample location will be downstream of the boiler.

RESPONSE:

Performance tests will be done firing natural gas which is the primary fuel.

EPA Appendix A, Test method 20, Section 6.1. reads, "for supplementary fired, combined-cycle plants, the sampling site shall be located between the gas turbine and the boiler." The department does not plan to change this requirement.

COMMENT:

Specific Condition No. 7

A continuous monitoring system to measure the amount of water injected into the turbine is not currently installed at Kissimmee Utilities. However, a water meter and integrator is installed, and the meter reading will be recorded hourly by plant personnel for purposed of complying with this condition.

RESPONSE:

NSPS subsection 60.334(a) requires the installation and operation of a continuous monitoring system to monitor and record the fuel consumption and the ratio of water to fuel being fired in the turbine. The applicant has the water and fuel consumption meters which will provide the data for the ratio calculation, but not automatically. The applicant proposes to have this data recorded on an hourly basis by plant personnel.

The department believes, that in this case, the use of hourly data may satisfy the intent of the NSPS monitoring requirement. If not, the system will have to be modified. Specific condition No. 7 will not be changed.

COMMENT:

Specific Condition No. 13

We request that the expiration date of this construction permit not be sooner than August 1, 1984. This will allow us sufficient time for performance testing and submittal of an operating permit application 90 days prior to expiration of the construction permit.

RESPONSE:


The expiration date of this permit, AC 49-74856, will be changed to August 1, 1984.

CONCLUSION

The final action by the Department shall be to issue the permit with the changes noted above.

DEPARTMENT OF ENVIRONMENTAL REGULATION

TWIN TOWERS OFFICE BUILDING  
2600 BLAIR STONE ROAD  
TALLAHASSEE, FLORIDA 32301-8241



BOB GRAHAM  
GOVERNOR

VICTORIA J. TSCHINKEL  
SECRETARY

**PERMITTEE:**

Kissimmee Utilities  
P. O. Box 1608  
Kissimmee, Florida  
32741

Permit Number: AC 49-74856  
Date of Issue:  
Expiration Date: August 1, 1984  
County: Osceola  
Latitude/Longitude: 28° 17' 20" N.  
81° 24' 20" W  
Project: 49.9 MW Combined Cycle Gas  
Turbine

This permit is issued under the provisions of Chapter 403, Florida Statutes, Florida Administrative Code Rules 17-2 and 17-4, and 40 CFR 52.21. The above named permittee is hereby authorized to perform the work or operate the facility shown on the application and approved drawing(s), plans, and other documents attached hereto or on file with the department and made a part hereof and specifically described as follows:

For the construction of a 49.9 MW combined cycle combustion gas turbine to be located at Kissimmee Utilities Power plant on 112 Ruby Street, City of Kissimmee, Osceola County, Florida. The UTM coordinates of the proposed plant are 460.1 Km East and 3129.3 Km North.

Construction shall be in accordance with the attached permit application, plans, documents and drawings except as otherwise noted on page 5 through 9, Specific Conditions.

Attachments are as follows:

1. Application to Construct Air Pollution Sources, DER Form 17-1.122(16) received on September 9, 1983.
2. Clair Fancy's letter of October 6, 1983.
3. Response to Clair Fancy's letter received on November 7, 1983.

PERMITTEE: Kissimmee Utilities I. D. Number:  
Permit Number: AC 49-74856  
Date of Issue:  
Expiration Date: August 1, 1984

**GENERAL CONDITIONS:**

1. The terms, conditions, requirements, limitations, and restrictions set forth herein are "Permit Conditions" and as such are binding upon the permittee and enforceable pursuant to the authority of Sections 403.161, 403.727, or 403.859 through 403.861, Florida Statutes. The permittee is hereby placed on notice that the department will review this permit periodically and may initiate enforcement action for any violation of the "Permit Conditions" by the permittee, its agents, employees, servants or representatives.

2. This permit is valid only for the specific processes and operations applied for and indicated in the approved drawings or exhibits. Any unauthorized deviation from the approved drawings, exhibits, specifications, or conditions of this permit may constitute grounds for revocation and enforcement action by the department.

3. As provided in Subsections 403.087(6) and 403.722(5), Florida Statutes, the issuance of this permit does not convey any vested rights or any exclusive privileges. Nor does it authorize any injury to public or private property or any invasion of personal rights, nor any infringement of federal, state or local laws or regulations. This permit does not constitute a waiver of or approval of any other department permit that may be required for other aspects of the total project which are not addressed in the permit.

4. This permit conveys no title to land or water, does not constitute state recognition or acknowledgement of title, and does not constitute authority for the use of submerged lands unless herein provided and the necessary title or leasehold interests have been obtained from the state. Only the Trustees of the Internal Improvement Trust Fund may express state opinion as to title.

5. This permit does not relieve the permittee from liability for harm or injury to human health or welfare, animal, plant or aquatic life or property and penalties therefore caused by the construction or operation of this permitted source, nor does it allow the permittee to cause pollution in contravention of Florida Statutes and department rules, unless specifically authorized by an order from the department.



PERMITTEE: Kissimmee Utilities

I. D. Number:

Permit Number: AC 49-74856

Date of Issue:

Expiration Date: August 1, 1984

**GENERAL CONDITIONS:**

6. The permittee shall at all times properly operate and maintain the facility and systems of treatment and control (and related appurtenances) that are installed or used by the permittee to achieve compliance with the conditions of this permit, as required by department rules. This provision includes the operation of backup or auxiliary facilities or similar systems when necessary to achieve compliance with the conditions of the permit and when required by department rules.

7. The permittee, by accepting this permit, specifically agrees to allow authorized department personnel, upon presentation of credentials or other documents as may be required by law, access to the premises, at reasonable times, where the permitted activity is located or conducted for the purpose of:

- a. Having access to and copying any records that must be kept under the conditions of the permit;
- b. Inspecting the facility, equipment, practices, or operations regulated or required under this permit; and
- c. Sampling or monitoring any substances or parameters at any location reasonably necessary to assure compliance with this permit or department rules.

Reasonable time may depend on the nature of the concern being investigated.

8. If, for any reason, the permittee does not comply with or will be unable to comply with any condition or limitation specified in this permit, the permittee shall immediately notify and provide the department with the following information:

- a. a description of and cause of non-compliance; and
- b. the period of noncompliance, including exact dates and times; or, if not corrected, the anticipated time the noncompliance is expected to continue, and steps being taken to reduce, eliminate, and prevent recurrence of the noncompliance.

PERMITTEE: Kissimmee Utilities I. D. Number:  
Permit Number: AC 49-74856  
Date of Issue:  
Expiration Date: August 1, 1984

GENERAL CONDITIONS:

The permittee shall be responsible for any and all damages which may result and may be subject to enforcement action by the department for penalties or revocation of this permit.

9. In accepting this permit, the permittee understands and agrees that all records, notes, monitoring data and other information relating to the construction or operation of this permitted source, which are submitted to the department, may be used by the department as evidence in any enforcement case arising under the Florida Statutes or department rules, except where such use is proscribed by Sections 403.73 and 403.111, Florida Statutes.

10. The permittee agrees to comply with changes in department rules and Florida Statutes after a reasonable time for compliance, provided however, the permittee does not waive any other rights granted by Florida Statutes or department rules.

11. This permit is transferable only upon department approval in accordance with Florida Administrative Code Rules 17-4.12 and 17-30.30, as applicable. The permittee shall be liable for any non-compliance of the permitted activity until the transfer is approved by the department.

12. This permit is required to be kept at the work site of the permitted activity during the entire period of construction or operation.

13. This permit also constitutes:

- (X) Determination of Best Available Control Technology (BACT)
- (X) Determination of Prevention of Significant Deterioration (PSD)
- (X) Compliance with New Source Performance Standards.

14. The permittee shall comply with the following monitoring and record keeping requirements:

- a. Upon request, the permittee shall furnish all records and plans required under department rules. The retention period for all records will be extended automatically, unless otherwise stipulated by the department, during the course of any unresolved enforcement action.

PERMITTEE: Kissimmee Utilities I. D. Number:  
Permit Number: AC 49-74856  
Date of Issue:  
Expiration Date: August 1, 1984

**GENERAL CONDITIONS:**

- b. The permittee shall retain at the facility or other location designated by this permit records of all monitoring information (including all calibration and maintenance records and all original strip chart recordings for continuous monitoring instrumentation), copies of all reports required by this permit, and records of all data used to complete the application for this permit. The time period of retention shall be at least three years from the date of the sample, measurement, report or application unless otherwise specified by department rule.
- c. Records of monitoring information shall include:
  - the date, exact place, and time of sampling or measurements;
  - the person responsible for performing the sampling or measurements;
  - the date(s) analyses were performed;
  - the person responsible for performing the analyses;
  - the analytical techniques or methods used; and
  - the results of such analyses.

15. When requested by the department, the permittee shall within a reasonable time furnish any information required by law which is needed to determine compliance with the permit. If the permittee becomes aware that relevant facts were not submitted or were incorrect in the permit application or in any report to the department, such facts or information shall be submitted or corrected promptly.

**SPECIFIC CONDITIONS:**

1. The new source shall be constructed in accordance with the capacities and specifications stated in the application.
2. The maximum emission rates for the 49.9 MW combined cycle gas turbine shall not exceed the emission limits listed in the following table:

PERMITTEE: Kissimmee Utilities I. D. Number:  
 Permit Number: AC 49-74856  
 Date of Issue:  
 Expiration Date: August 1, 1984

SPECIFIC CONDITIONS:

ALLOWABLE EMISSION LIMITS  
 49.9 MW Combined Cycle Combustion Turbine

Pollutant	Standard	Gas Turbine (a)	Boiler	Basis
NO <sub>x</sub> (a)	0.0075 $\frac{(14.4)}{Y} + F$	79 PPM (gas) and 129 (oil) at 15 percent oxygen on a dry basis		NSPS, BACT
SO <sub>2</sub>	0.8 percent S by weight 0.015 percent by volume at 15 percent oxygen on a dry basis	0.5 percent S by weight and 255 lb/hr	0.5 percent S by weight	NSPS, BACT
PM (b)	20% opacity	20% opacity or 22 lb/hr	20% opacity	BACT
VOC	—	19 lb/hr		BACT
CO	—	80 lb/hr		BACT
Mercury (Hg)	—	0.0004 lb/hr		Estimated by Applicant
Beryllium (Be)	—	0.00004 lb/hr		EPA 600/57-81-003b

(a) The allowable NO<sub>x</sub> emission rate for the gas turbine was determined by the following formula:

$$STD = 0.0075 \frac{(14.4)}{Y} + F \text{ where:}$$

Y = manufacturer's rated heat rate at manufacturer's rated load (kilojoules per watt hour) or, actual measured heat rate based on lower heating value of fuel as measured at actual peak load for the facility. The value of Y shall not exceed 14.4 kilojoules per watt hour. The efficiency factor must be based on the gas turbine efficiency itself, not the overall efficiency of the gas turbine combined with other equipment.

NO<sub>x</sub> = 79 PPM when burning natural gas

NO<sub>x</sub> = 129 PPM when burning fuel oil No. 2

(b) Visible emissions: Not to exceed 20% opacity; 40% opacity is permitted for not more than two-minutes in any one hour.

F = NO<sub>x</sub> emission allowance for fuel-bound nitrogen as follows:

Fuel-bound nitrogen (Percent by weight)	F (NO <sub>x</sub> percent by volume)
N ≤ 0.015	0
0.015 < N ≤ 0.1	0.04(N)
0.1 < N ≤ 0.25	0.04 + 0.0067(N - 0.1)
N > 0.25	0.005

where: N = the nitrogen content of the fuel (percent by weight)  
 N > 0.25 is proposed by the applicant

3. The plant shall be allowed to operate continuously (8760 hours per year)

PERMITTEE: Kissimmee Utilities I. D. Number:  
Permit Number: AC 49-74856  
Date of Issue:  
Expiration Date: August 1, 1984

**SPECIFIC CONDITIONS:**

4. The source shall be allowed to use either natural gas or No. 2 fuel oil.
5. Maximum sulfur (S) content in the oil shall not exceed 0.5 percent S by weight.
6. Before this construction permit expires, the 49.9 MW combined cycle gas turbine will be tested for particulate matter, sulfur dioxide, visible emissions (VE), carbon monoxide and nitrogen oxides. Except as provided under 40 CFR 60.8(b), the performance tests shall be in accordance with the provisions of the following reference methods in Appendix A of 40 CFR 60.
  - a. Method 1. Sample and Velocity Traverses
  - b. Method 2. Volumetric Flow Rate.
  - c. Method 3. Gas Analysis
  - d. Reference Method 5 must be used to determine the initial compliance status of the unit with respect to the PM standard. Thereafter visible emissions may be used unless 10% opacity is exceeded. In that case, compliance must be demonstrated by Method 5. Compliance with the opacity limitation will be determined by reference Method 9.
  - e. Compliance with the sulfur dioxide emission limits will be determined by reference Method 20 or by calculations based on fuel analysis (ASTM D2880-77 and 010720-70) for sulfur content.
  - f. Compliance with carbon monoxide emission limits will be determined by reference Method 10.
  - g. Compliance with volatile organic compound emission limits will be assumed provided the CO allowable emission rate is achieved; specific VOC compliance testing is not required.

PERMITTEE: Kissimmee Utilities

I. D. Number:

Permit Number: AC 49-74856

Date of Issue:

Expiration Date: August 1, 1984

- h. Compliance with the allowable emission limits for nitrogen oxides shall be conducted using EPA reference Method 20 Subpart GG Section 60.335. The sampling site shall be located between the gas turbine and the boiler.

During performance tests to determine compliance with the proposed standard, measured  $\text{NO}_x$  emission at 15 percent oxygen will be adjusted to ISO ambient atmospheric conditions by the following correction factor:

$$\text{NO}_x = (\text{NO}_{x\text{OBS}}) \left( \frac{P_{\text{ref}}}{P_{\text{OBS}}} \right)^{0.5} e^{19(H_{\text{OBS}} - 0.00633)} \left( \frac{288^\circ\text{K}}{T_{\text{amb}}} \right)^{1.53}$$

where:

$\text{NO}_x$  = Emissions of  $\text{NO}_x$  at 15 percent oxygen and ISO standard ambient conditions.

$\text{NO}_{x\text{OBS}}$  = Measured  $\text{NO}_x$  emission at 15 percent oxygen, ppmv.

$P_{\text{ref}}$  = Reference combustor inlet absolute pressure at 101.3 kilopascals (1 atmosphere) ambient pressure.

$P_{\text{obs}}$  = Measured combustor inlet absolute pressure at test ambient pressure.

$H_{\text{obs}}$  = Specific humidity of ambient air at test.

$e$  = Transcendental constant (2.718).

$T_{\text{AMB}}$  = Temperature of ambient air at test.

Test results will be the average of 3 valid runs. The Department will be notified 30 days in advance of the compliance test. The test will be conducted at permitted capacity  $\pm 10\%$ .

7. A continuous monitoring system shall be installed to monitor and record the fuel consumption and the ratio of water to fuel being fired in the turbine.
8. Sulfur and nitrogen content of the fuel being fired in the gas turbine shall be determined and recorded as specified in the NSPS for Gas Turbines 40 CFR 60, Subpart GG, Section 60.334.

PERMITTEE: Kissimmee Utilities

I. D. Number:

Permit Number: AC 49-74856

Date of Issue:

Expiration Date: August 1, 1984

The records of fuel oil usage will be kept by the company, available for regulatory agency's inspection, for a two year period.

10. The applicant shall comply with all requirements of 40 CFR 60, Subpart GG, Standards of Performance for stationary gas turbines.
11. Reasonable precautions to prevent fugitive particulate emissions during construction such as coating or spraying roads and construction sites used by contractors will be taken by the applicant.
12. The applicant shall report any delays in construction and completion of this unit to the Department's St. Johns River District office.
13. The applicant will demonstrate compliance with the conditions of the construction permit, and submit a complete application for an operating permit to the Department's St. Johns River District office prior to 90 days of the expiration date of the construction permit. The applicant may continue to operate in compliance with all terms of the construction permit until its expiration date or issuance of an operating permit.
14. Upon obtaining an operating permit, the applicant will be required to submit periodic test reports on the actual operation and emissions of the facility. These reports will give the data specified in 40 CFR 60.334.
15. The source shall comply with the provisions and requirements of the attached general conditions.
16. Stack sampling facilities will include the eyebolt and angle described in Chapter 17-2.700, Florida Administrative Code.

Issued this 30 day of March, 1984.

STATE OF FLORIDA DEPARTMENT OF  
ENVIRONMENTAL REGULATION

  
VICTORIA J. TSCHINKEL, Secretary

BEST AVAILABLE CONTROL TECHNOLOGY (BACT) DETERMINATION  
Kissimmee Utilities  
Osceola County

Kissimmee Utilities, Kissimmee, Florida, plans to increase their existing electric generating capability by an additional 49.9 gross megawatts. The proposed supplementary-fired combined cycle gas turbine system is composed of one 400 million Btu/hr heat input gas turbine (30.9 megawatt gross output) from which the exhaust gases discharge into a waste heat boiler. The steam produced will operate two steam turbines each producing 9.5 megawatt gross output. The boiler has a 41.7 million Btu per hour supplemental heat source to generate additional steam.

The system will fire natural gas with No. 2 oil as stand-by fuel. Hourly fuel consumption at maximum firing will be 0.491 million cubic feet of gas or 78 barrels of oil. The system is scheduled to operate 8,760 hours per year.

BACT Determination Requested by the Applicant:

<u>Pollutant</u>	<u>Emission Limit</u>
NO <sub>x</sub>	129 PPM when firing oil
SO <sub>2</sub>	0.8% maximum fuel sulfur content

Date of Receipt of a BACT Application:

September 9, 1983

Date of Publication in the Florida Administrative Weekly:

September 4, 1981

Review Group Members:

Comments were obtained from the New Source Review Section, the Air Modeling Section, and the St. Johns River District Office.



BACT Determination by DER:

Turbine Emissions

Limit

NO <sub>x</sub> (gas)	79 PPM (water injection)
NO <sub>x</sub> (oil)	129 PPM (water injection)
SO <sub>2</sub>	No. 2 distillate oil with sulfur content not to exceed 0.5 percent or natural gas as fuel

Visible Emissions

Maximum 20% opacity

Boiler Emissions

Limit

SO<sub>2</sub> & Particulates

Natural gas as fuel  
or  
No. 2 distillate oil with sulfur content not to exceed 0.5 percent

Visible Emissions

Not to exceed 20% opacity.  
40% opacity is permitted for not more than two minutes in any one hour.

Turbine NO<sub>x</sub> emission limits calculated using the NSPS formula in Subpart GG, subsection 40 CFR 60.332.

$$\text{NO}_x = 0.0075 \frac{(14.4)}{Y} + F$$

Y = Manufacturer's rated heat rate at manufacturers rated load. Applicant indicates this parameter is 13.66 kJ/watt-hr.

F = NO<sub>x</sub> emission allowance for fuel-bound nitrogen. Applicant indicates this parameter is 0.005.

Compliance with the turbine NO<sub>x</sub> emission limit shall be in accordance with 40 CFR 60, Appendix A; Method 20 as set forth in the NSPS subsection 40 CFR 60.335. The sampling site shall be located between the gas turbine and the boiler.

The excess emission reports required under subsection 40 CFR 60.7(c) are to be sent to the Department of Environmental Regulation, Bureau of Air Quality Management, 2600 Blair Stone Road, Tallahassee, Florida, 32301. The information to be submitted to the department is outlined in Subpart GG, subsection 40 CFR 60.334(c).

Compliance with the opacity limits shall be in accordance with DER Method 9 (Rule 17-2.700(6)(a)9.).

BACT Determination Rationale:

Nitric oxides produced by the combustion of fuel in the gas turbine are formed by the combination of nitrogen and oxygen in the combustion air.  $\text{NO}_x$  is also formed from the reaction of the nitrogen in the fuel with the oxygen in the combustion air. Formation of the latter  $\text{NO}_x$  will be minimized by the applicant's use of natural gas or distillate oil as fuel, both of which have low nitrogen content.

$\text{NO}_x$  formation is extremely sensitive to flame temperature, therefore injecting water or steam into the gas turbine reaction zone will reduce production of  $\text{NO}_x$ . The use of the wet control technique to reduce  $\text{NO}_x$  emissions to or below the NSPS limits is determined to be BACT.

The  $\text{SO}_2$  emissions from the gas turbine are strictly a function of the fuel sulfur content. Flue gas desulfurization systems are economically unattractive compared to the cost of low sulfur fuels. The firing of natural gas or No. 2 oil containing a maximum of 0.5% sulfur is determined as BACT for the control of  $\text{SO}_2$  emissions.

The reduction of  $\text{NO}_x$  emissions results in an increase in CO emissions. CO emissions are considered to be a local problem since CO readily reacts to form  $\text{CO}_2$ .  $\text{NO}_x$  emissions, however, are linked to the formation of photochemical oxidants and are subject to long range transport. As a result of this trade-off, no emission limit for CO is specified in this determination.

The proposed stationary gas turbine is subject to the requirements of Subpart GG, New Source Performance Standards (NSPS) and Florida Administrative Code Rule 17-2.660. The Department has been delegated the authority to implement and enforce the NSPS program, therefore, the quarterly excess emission reports required by 40 CFR 60(c) are to be sent to the Department of Environmental Regulation.

The supplemental heat source to the waste heat recovery boiler is 41.7 million Btu per hour. The major air pollutant from this source would be  $\text{SO}_2$  when firing No. 2 distillate oil. The emission rate of  $\text{SO}_2$  will be  $0.5 \text{ lb}/10^6 \text{ Btu}$ , which is less than the current NSPS standard for fossil-fuel-fired steam generators, therefore, the installation of a FGD system is not justified. The waste heat recovery boiler will not operate when the gas turbine is down.

The monitoring provisions of the NSPS for the gas turbine requires that the sulfur content and nitrogen content of the fuel

fired is determined as set forth in subsection 40 CFR 60.334. The same fuel source will be used to fire the boiler supplemental heaters, therefore, the Department has determined that only an opacity emission limit for the waste heat boiler is necessary to insure compliance.

The applicant indicated that beryllium emissions would be 1.2 pounds per year based upon an emission factor from the guideline publication EPA-450/2-80-074. The beryllium emission factor for distillate oil was based on characterization of fuel samples. A later publication, EPA-600/57-81-003b, presented a summary of uncontrolled emissions in the exhaust gas from a distillate oil-fired boiler. The emission factor for beryllium was 0.00004 Ng/J as compared to the applicants emission factor of .00014 Ng/J. Using the most recent emission factor the annual amount of beryllium emitted would be 0.35 pounds which is less than the significant emission rate of 0.8 pounds per year (Table 500-2).

Details of the Analysis May be Obtained by Contacting:

Edward Palagyi, BACT Coordinator  
Department of Environmental Regulation  
Bureau of Air Quality Management  
2600 Blair Stone Road  
Tallahassee, Florida 32301

Recommended By

*[Signature]*  
for C. H. Fancy, Deputy Bureau Chief, BAQM

Date:

March 29, 1984

Approved:

March 30, 1984

Victoria J. Tschinkel, Secretary


Date:

Victoria J. Tschinkel

State of Florida  
DEPARTMENT OF ENVIRONMENTAL REGULATION

**INTEROFFICE MEMORANDUM**

For Routing To District Offices And/Or To Other Than The Addressee		
To: _____	Loctn.: _____	
To: _____	Loctn.: _____	
To: _____	Loctn.: _____	
From: _____	Date: _____	
Reply Optional [ ]	Reply Required [ ]	Info. Only [ ]
Date Due: _____	Date Due: _____	

TO: Victoria J. Tschinkel  
FROM: Steve Smallwood   
DATE: March 28, 1984  
SUBJ: Approval of Attached Air Construction Permit  
and BACT Determination

Attached for your approval and signature is one Air Construction Permit and BACT Determination for which the applicant is Kissimmee Utilities. The construction proposed is a 49.9 MW Combined Cycle Gas Turbine at the applicant's facility in Osceola County, Florida.

The waiver date, after which the permit would be issued by default, is April 2, 1984.

The Bureau recommends your approval and signature.

SS/pa

Attachment

No. 0158261

RECEIPT FOR CERTIFIED MAIL

NO INSURANCE COVERAGE PROVIDED—  
NOT FOR INTERNATIONAL MAIL

(See Reverse)

SENT TO		
Mr. James C. Welsh		
STREET AND NO.		
P.O., STATE AND ZIP CODE		
PCSTAGE	\$	
CONSULT POSTMASTER FOR FEES	CERTIFIED FEE	€
	SPECIAL DELIVERY	€
	RESTRICTED DELIVERY	€
	OPTIONAL SERVICES	
	RETURN RECEIPT SERVICE	
	SHOW TO WHOM AND DATE DELIVERED	€
SHOW TO WHOM, DATE, AND ADDRESS OF DELIVERY	€	
SHOW TO WHOM AND DATE DELIVERED WITH RESTRICTED DELIVERY	€	
SHOW TO WHOM, DATE AND ADDRESS OF DELIVERY WITH RESTRICTED DELIVERY	€	
TOTAL POSTAGE AND FEES	\$	
POSTMARK OR DATE		
4/10/84		

PS Form 3800, Apr. 1976

PS Form 3811, Jan. 1978

● SENDER: Complete items 1, 2, and 3. Add your address in the "RETURN TO" space on reverse.

The following service is requested (check one.)

Show to whom and date delivered.....

Show to whom, date and address of delivery.....

RESTRICTED DELIVERY  
Show to whom and date delivered.....

RESTRICTED DELIVERY  
Show to whom, date, and address of delivery.....

(CONSULT POSTMASTER FOR FEES)

2. ARTICLE ADDRESSED TO:  
Mr. James C. Welsh  
P.O. Box 1608  
Kissimmee, FL 32741

3. ARTICLE DESCRIPTION:  
REGISTERED NO. CERTIFIED NO. INSURED NO.  
0158261

(Always obtain signature of addressee or agent)

I have received the article described above.

SIGNATURE: *[Signature]*  Addressee  Authorized agent

DATE OF DELIVERY:  
APR 12 1984

5. ADDRESS (Complete only if necessary)

6. UNABLE TO DELIVER BECAUSE: \_\_\_\_\_


CLERK'S SIGNATURE: \_\_\_\_\_

U.S. POSTALS

GPO : 4979-300-459

STATE OF FLORIDA  
DEPARTMENT OF ENVIRONMENTAL REGULATION

TWIN TOWERS OFFICE BUILDING  
2600 BLAIR STONE ROAD  
TALLAHASSEE, FLORIDA 32301-8241



BOB GRAHAM  
GOVERNOR  
VICTORIA J. TSCHINKEL  
SECRETARY

March 15, 1984

Mr. Alex Alderman  
Kissimmee Utilities  
P. O. Box 1608  
Kissimmee, Florida 32741

Re: Air Pollution Permit AC 49-74856

Dear Mr. Alderman:

This letter is in reference to the documents (waiver and drawings) we received on March 7, 1984, concerning the water system proposed.

After review of the drawings submitted we determined the information included is not adequate to evaluate your request. Specifically, we need a process description of the water system proposed.

How does the present water injection system compare with the system that was submitted to the Department with the original application on September 9, 1983? Why was the department not notified that the proposed water injection system had been changed.

For purpose of complying with the NSPS monitoring of operations requirements, paragraph 60.334(a) subpart GG, 40 CFR, the system approved must be accurate to within  $\pm 5.0$  percent and must monitor and record continuously the fuel consumption and the ratio of water to fuel being fired in the turbine. Can the water meter (recorded hourly) and the integrator in the water injection system proposed supply this data in order to comply with the NSPS requirements? Please explain how this system operates.

As you are aware, the waiver of the 90 day time limit (DER Form 17-2.122(71)) will expire April 2, 1984. We hope to process your request before this date if we receive the required information on time.

Mr. Alex Alderman  
Page Two  
March 15, 1984

If you need clarification on the above subjects, please call Ed Palagyi or Teresa M. Heron of this office at (904)488-1344.

Sincerely,



C. H. Fancy, P.E.  
Deputy Bureau Chief  
Bureau of Air Quality Management

CHF/TH/s

No. 0158268

RECEIPT FOR CERTIFIED MAIL  
NO INSURANCE COVERAGE PROVIDED—  
NOT FOR INTERNATIONAL MAIL  
(See Reverse)

SENT TO		
Alex Alderman		
STREET AND NO.		
P.O., STATE AND ZIP CODE		
POSTAGE	\$	
CONSULT POSTMASTER FOR FEES	CERTIFIED FEE	¢
	SPECIAL DELIVERY	¢
	RESTRICTED DELIVERY	¢
	OPTIONAL SERVICES	
	RETURN RECEIPT SERVICE	
	SHOW TO WHOM AND DATE DELIVERED	¢
SHOW TO WHOM, DATE, AND ADDRESS OF DELIVERY	¢	
SHOW TO WHOM AND DATE DELIVERED WITH RESTRICTED DELIVERY	¢	
SHOW TO WHOM, DATE AND ADDRESS OF DELIVERY WITH RESTRICTED DELIVERY	¢	
TOTAL POSTAGE AND FEES	\$	
POSTMARK OR DATE		
3/16/84		

PS Form 3800, Apr. 1976

PS Form 3811, Jan. 1973

1. **SENDER:** Complete items 1, 2, and 3. Add your address in the "RETURN TO" space on reverse.

The following service is requested (check one.)

Show to whom and date delivered.

Show to whom, date and address of delivery.

RESTRICTED DELIVERY Show to whom and date delivered.

RESTRICTED DELIVERY Show to whom, date, and address of delivery.

(CONSULT POSTMASTER FOR FEES)

2. **ARTICLE ADDRESSED TO:**  
Mr. Alex Alderman  
P. O. Box 1608  
Lissimnee, FL 32741

3. **ARTICLE DESCRIPTION:**

REGISTERED NO.	CERTIFIED NO.	INSURED NO.
	0158268	

(Always obtain signature of addressee or agent)

I have received the article described above.

SIGNATURE:  Addressee  Authorized agent

*Charles J. [Signature]*

4. DATE OF DELIVERY: MAR 19 1984

5. ADDRESS (Complete only if requested)

6. UNABLE TO DELIVER BECAUSE: \_\_\_\_\_

7. CARRIER'S INITIALS: \_\_\_\_\_

8. RETURN RECEIPT, REGISTERED, INSURED AND CERTIFIED MAIL

9. POSTMARK: MAR 19 1984 SPS

GPO : 1979-300-459




STATE OF FLORIDA  
DEPARTMENT OF ENVIRONMENTAL REGULATION

TWIN TOWERS OFFICE BUILDING  
2800 BLAIR STONE ROAD  
TALLAHASSEE, FLORIDA 32301-8241



BOB GRAHAM  
GOVERNOR  
VICTORIA J. TSCHINKEL  
SECRETARY

February 24, 1984

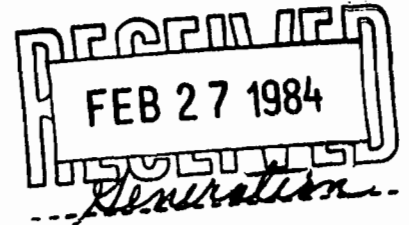

Mr. Alex Alderman  
Kissimmee Utilities  
P. O. Box 1608  
Kissimmee, Florida 32741

Re: Air pollution permit AC 49-74856

Dear Mr. Alderman:

As requested, I am sending you the waiver of 90 day time limit (DER Form 17-2.122(71)). This waiver form must be completed and extended for a reasonable length of time (30 days) to review your request. The gas turbine shall comply with the NSPS Monitoring of operations requirements, paragraph 60.334(a) Subpart GG, 40 CFR. Any modifications to that requirement shall be approved by the department. Therefore, we need detailed plans of the water control system proposed.

Kissimmee Utilities' permit must be issued on or before March 3, 1984, unless we have the completed waiver form at this office before that date. At the present time, your request is denied. If the permit is issued as presently scheduled, any changes to the permit would require an application for modification.

If you need clarification on the above subject, please call Teresa M. Heron of this office at (904)489-1344.

Sincerely,

C. H. Fancy, P.E.  
Deputy Bureau Chief  
Bureau of Air Quality Management

CHF/TH/s

WAIVER OF 90 DAY TIME LIMIT  
UNDER SECTION 120.60(2), FLORIDA STATUTES


License (Permit, Certification) Application No. AC49-74856  
Applicant's Name: KISSIMMEE UTILITIES

The undersigned has read Section 120.60(2), Florida Statutes, and fully understands the Applicant's rights under that section.

With regard to the above referenced license (permit, certification) application, the Applicant hereby with full knowledge and understanding of (his) (her) (its) rights under Section 120.60(2), Florida Statutes, waives the right under Section 120.60(2), Florida Statutes, to have the application approved or denied by the State of Florida Department of Environmental Regulation within the 90 day time period prescribed in Section 120.60(2), Florida Statutes. Said waiver is made freely and voluntarily by the Applicant, is in (his) (her) (its) self-interest, and without any pressure or coercion by anyone employed by the State of Florida Department of Environmental Regulation.

This waiver shall expire on the 2nd day of April 1984.

The undersigned is authorized to make this waiver on behalf of the applicant.

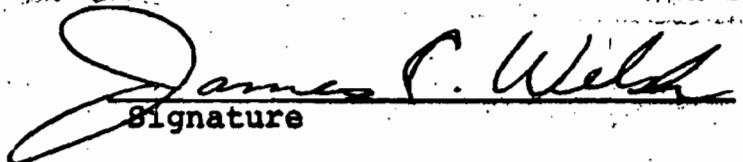  
Signature

James C. Welsh, P. E.  
Name of Signee

February 28, 1984  
Date

Sworn to and subscribed  
before me this 28th day  
of February 1984.



NOTARY PUBLIC STATE OF FLORIDA AT LARGE  
MY COMMISSION EXPIRES SEPT. 28, 1985  
BONDED THRU GENERAL INS. UNDERWRITER

COPY

Section 120.60, Florida Statutes

(2) When an application for a license is made as required by law, the agency shall conduct the proceedings required with reasonable dispatch and with due regard to the rights and privileges of all affected parties or aggrieved persons. Within 30 days after receipt of an application for a license, the agency shall examine the application, notify the applicant of any apparent errors or omissions, and request any additional information the agency is permitted by law to require. Failure to correct an error or omission or to supply additional information shall not be grounds for denial of the license unless the agency timely notified the applicant within this 30 day period. The agency shall notify the applicant if the activity for which he seeks a license is exempt from the licensing requirement and return any tendered application fee within 30 days after receipt of the original application or within 10 days after receipt of the timely requested additional information or correction of errors or omissions. Every application for license shall be approved or denied within 90 days after receipt of the original application or receipt of the timely requested additional information or correction of errors or omissions. Any application for a license not approved or denied within the 90-day period or within 15 days after conclusion of a public hearing held on the application, whichever is latest, shall be deemed approved and, subject to the satisfactory completion of an examination, if required as a prerequisite to licensure, <sup>2</sup>(the license) shall be issued. The Public Service Commission, when issuing a license, and any other agency, if specifically exempted by law, shall be exempt from the time limitations within this subsection. Each agency, upon issuing or denying a license, shall state with particularity the grounds or basis for the issuance or denial of same, except where issuance is a ministerial act. On denial of a license application on which there has been no hearing, the denying agency shall inform the applicant of any right to a hearing pursuant to s. 120.57.

PAGE 001-0

WESTINGHOUSE ELECTRIC CORPORATION \*\* COMBU

TITLE -- WATER INJECTION SKID ASSY


DWG NO	SUB	B/M UNITS	NO. OF SHEETS	DIST CODE
1248E93	001	INCHES	01	000-000-000

ITEM SYMB	DESCRIPTION	DEFINER	SIZE-REF INFORMATION
001	WATER INJECT SKID PPG	BOS	PER DWG
002	PUMP & MOTOR	DWG	24
003	FILTER	DWG	24
004	FLOWMETER WATER	DWG	24
005	CONTROL VALVE LIQUID FUEL	DWG	23
006	ISOLATION VALVE	DWG	24
007	VALVE SWING CHECK	DWG	24
008	PRESSURE SWITCH	BOS	MERCOID DA-23-103-R105
009	PRESSURE INDICATOR	DWG	24
010	VALVE	DWG	20
011	PIPING SPEC	DOC	21
012	BEDPLATE FAB & MACH	DWG	17
013	WATER FLOW CONTROLLER	DWG	13
014	WATER RETURN VALVE	DWG	24
015	ENCLOSURE WATER	DWG	23
016	CONDUIT ASSY	LAT	
017	WIRING DIAGRAM	LAT	
018	STRAINER	DWG	24
901	WATER INJECTION SKID ASSY		12

LAST ITEM

BEST AVAILABLE COPY

81233 000 15 521

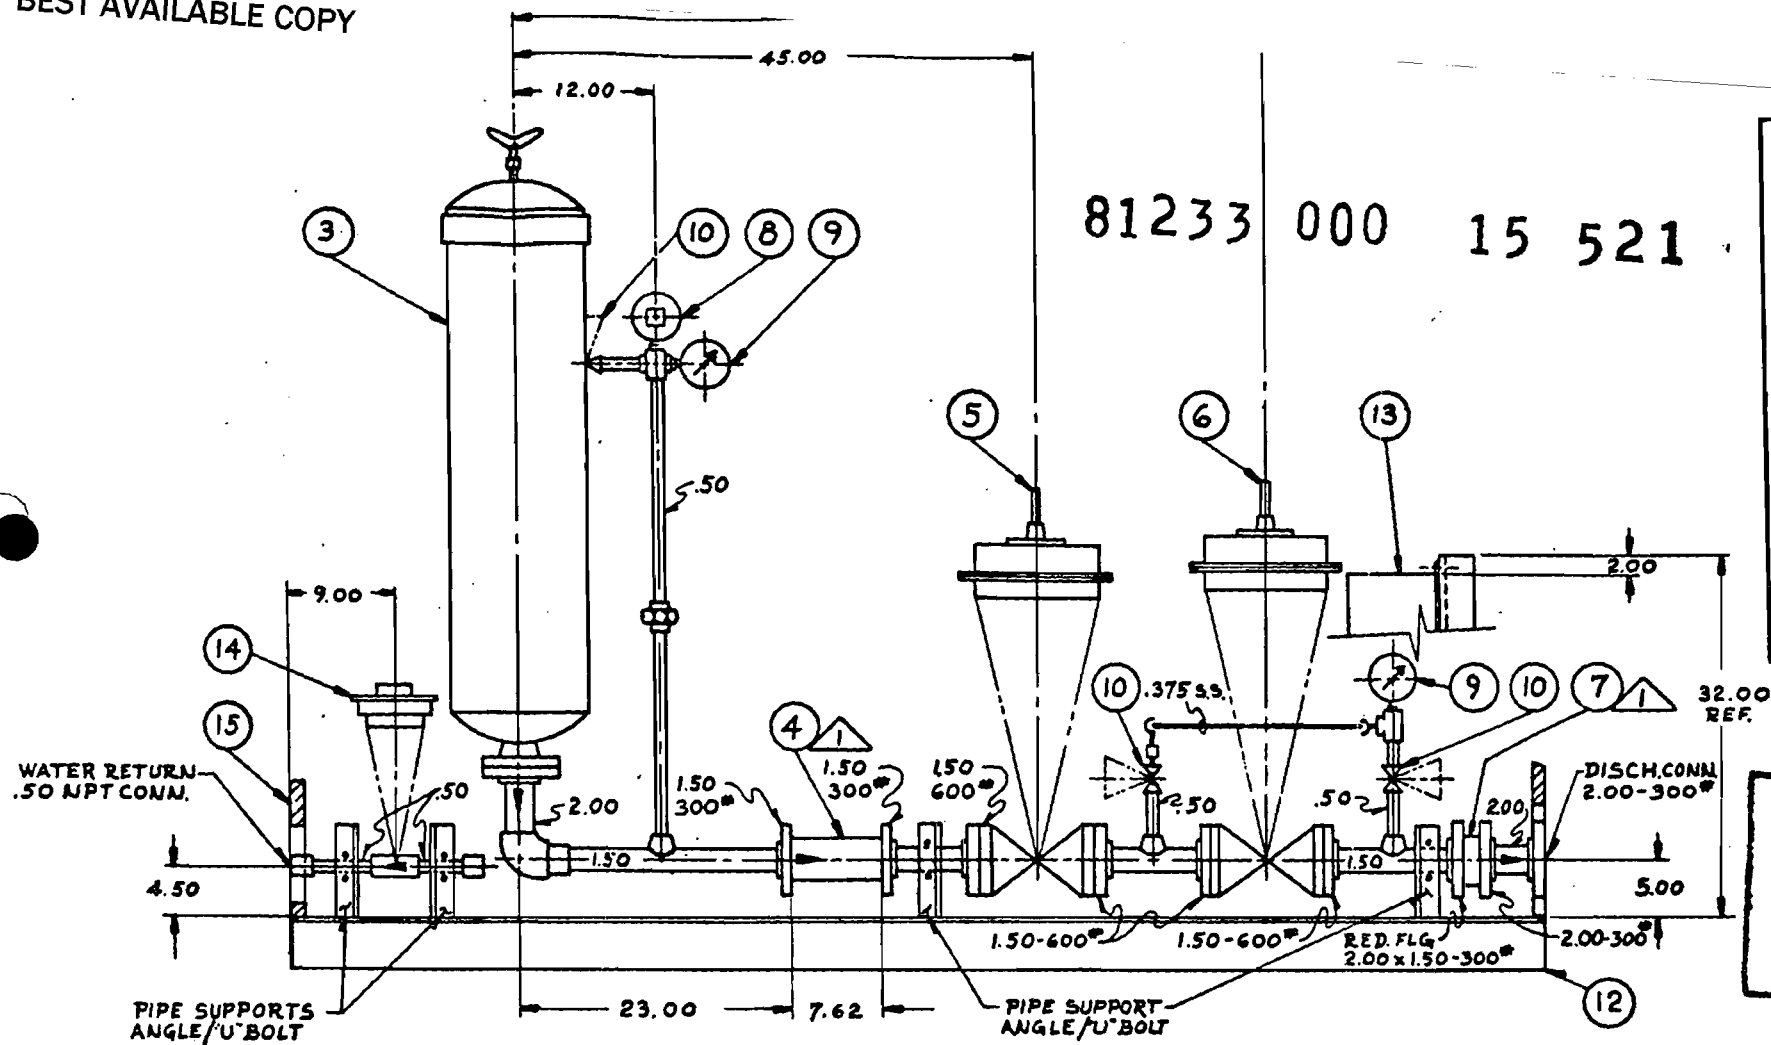

F.P. NO. 25

- ① APPROVED
- ② APPROVED
- ③ RETURNED
- ④ CERTIFIED
- ⑤ FINAL REVISION

THIS SHOP DRAWING IS TO BE USED AS A REFERENCE POINT OF COMPARISON WITH THE OVERALL DESIGN. THE RESPONSIBILITY FOR THE CORRECTNESS OF THE OBLIGATIONS OF THE CONTRACTOR IS THE RESPONSIBILITY OF THE CONTRACTOR.

DATE

CUSTOMER PURCHASE

RECEIVED

JUN 14 1962

J. HADIDIAN

GEOMETRIC SYMBOLS	
CHARACTERISTICS	SYMB.
FLATNESS	▭
STRAIGHTNESS	—
ROUGHNESS (CIRCULARITY)	⊖
CYLINDRICITY	⊘
PROFILE OF ANY LINE	⊖
PROFILE OF ANY SURFACE	⊘
PARALLELISM	//
PERPENDICULARITY	⊥
ANGULARITY	∠
POSITION	⊕
CONCENTRICITY	⊙
SYMMETRY	⊞
RUNOUT	⌒
TOTAL	⌒

3000B48	DOMESTIC MFG.
2171887ESP	PIPING SPEC
84800KM	QA REQ'D
600285	WELDING
600800	IDENT
ROT2000	MFG DATA
SPEC	TYPE


TOLERANCES OF FORM TO BE WITHIN DIMENSIONAL LIMITS UNLESS SPECIFIED	
DRAFTSMAN	M. SOLTANIK
CHECKER	M. SOLTANIK
DATE	5-11-62
DESIGN	J. Hadidian
ISSUE DATE	187

5

4

3


2

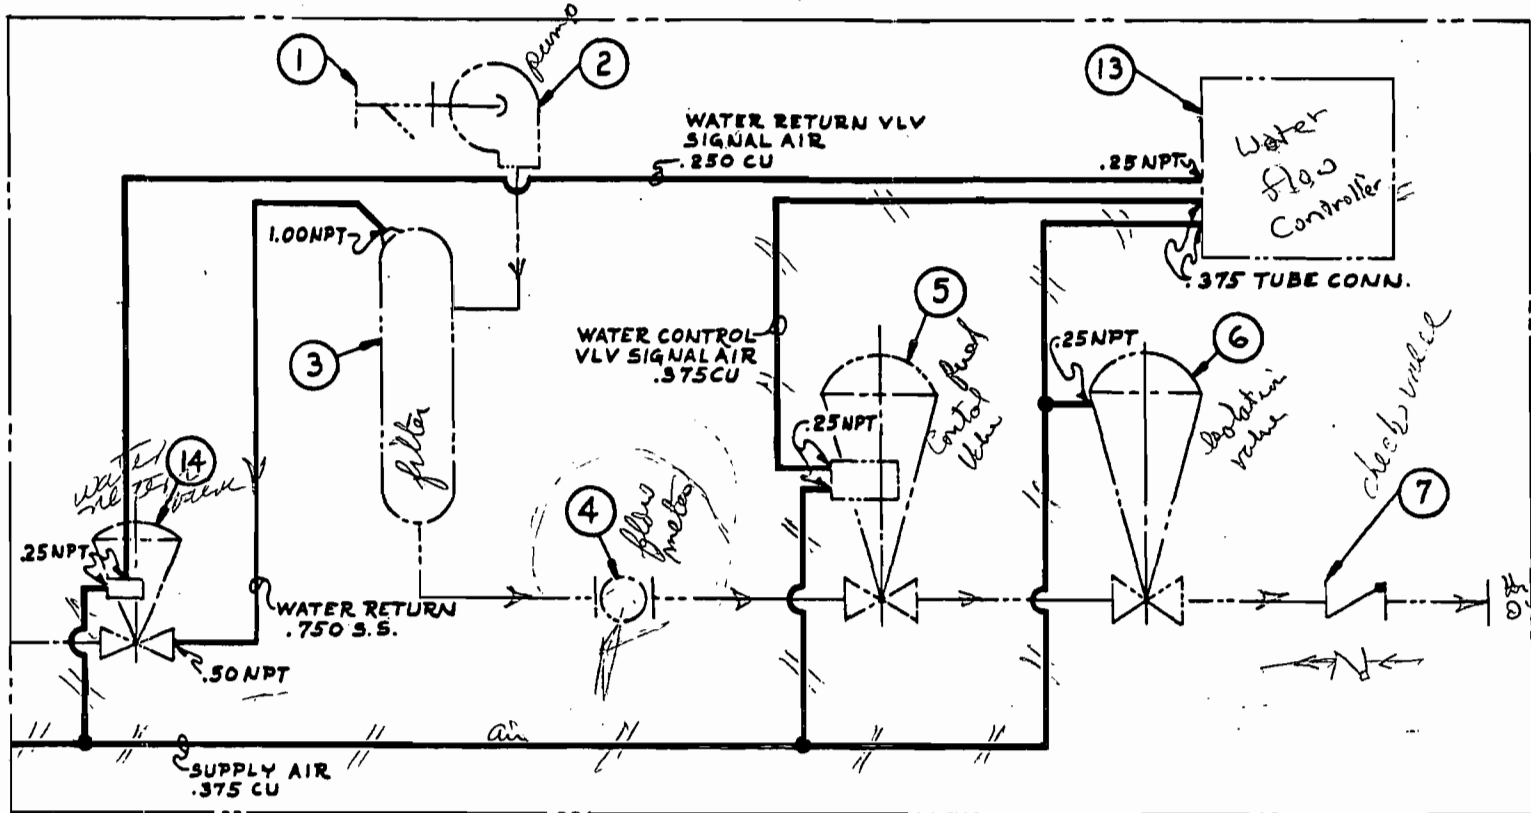

SCHEMATIC 6/B

NOTE:

- 1 WATER FLOWMETER AND SWI ARE FLANGELESS AND MUST BE LINE FLANGES.
- 2 BLANK OFF AND SEAL ALL OPENINGS ( PROPERLY BRACE INTERNAL EQUIP - PAINT ALL TEMPORARY BRACES

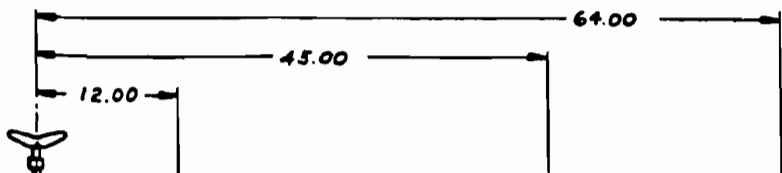



February 14, 1984

Mr. Bill Thomas  
Bureau of Air Quality Management  
Department of Environmental Regulation  
Twin Towers Office Building  
2600 Blair Stone Road  
Tallahassee, FL 32301-8241

Re: Florida DER Air Construction Permit  
Kissimmee Utilities Combined Cycle Unit No. 1  
Osceola County State Permit No. AC 49-74856  
Federal Permit No. PSD-FL-087

Dear Mr. Thomas:

The following are comments on the draft Florida DER air construction permit for our new Combined Cycle Turbine Generator and are referenced to the proposed DER specific conditions (pages 5 thru 8).

Specific  
Condition(s)

Comment

2, 5

Table 2 of the Preliminary Determination, which lists the allowable emission limits for each pollutant, contains an inconsistency, which also occurs throughout the Preliminary Determination and the draft construction permit. Table 2 specifies the allowable emissions of SO<sub>2</sub> from the gas turbine to be "0.5 percent S by weight and 388 lb/hr". For the boiler, the limits are "0.5 percent S by weight".

The table should read "0.8 percent S by weight and 388 lb/hr" for the gas turbine, and "0.8 percent S by weight" for the boiler. The application submitted by Kissimmee Utilities was based upon 0.8 percent S which results in the 388 lb SO<sub>2</sub>/hr figure for the gas turbine. All air quality analysis results presented in the application and in the preliminary determination are based upon the 0.8 percent S fuel. On page 11 of the Preliminary Determination this inconsistency is also reflected.


The 0.8 percent S fuel is equivalent to the NSPS for gas turbines. The high efficiency of this combined cycle operation, and the resulting minimal environ-

mental impacts, does not justify the lowering of the fuel sulfur content to 0.5 percent. In addition, economic penalties (i.e. fuel costs) would be associated with such a requirement. At a very conservative price differential between 0.5 and 0.8 percent S fuel of \$1/bbl, additional fuel costs to Kissimmee Utilities could be as great as \$683,280 per year (78 bbls/hr x 8760 hr/yr x \$1/bbl).

It is requested that the NO<sub>x</sub> emission limits for both oil and gas not be fixed concentration levels, as they are now specified in the draft permit. The NSPS formula is considered to be more appropriate, due to the fluctuations in turbine efficiency and fuel-bound nitrogen content encountered under actual operating conditions. Therefore, the only limit specified for NO<sub>x</sub> should be the NSPS formula.

- 6 The draft permit conditions do not specify which fuel (i.e. gas or oil) to test on. Kissimmee Utilities proposes to test on oil only since this represents the worst case for NO<sub>x</sub>, CO, and particulate matter emissions from the gas turbine. Gas firing produces essentially no particulate matter, emissions. Because of the configuration of the turbine, boiler and stack, it is simplest to conduct the performance tests at the main stack outlet of the boiler. Since only the gas turbine is required to be tested, no supplementary firing of fuel in the combined cycle boiler will occur during the performance tests. Thus, only gas turbine emissions will be tested, although the sample location will be downstream of the boiler.
- 7 A continuous monitoring system to measure the amount of water injected into the turbine is not currently installed at Kissimmee Utilities. However, a water meter and integrator is installed, and the meter reading will be recorded hourly by plant personnel for purposes of complying with this condition.
- 13 We request that the expiration date of this construction permit not be sooner than August 1, 1984. This will allow us sufficient time for performance testing and submittal of an operating permit application 90 days prior to expiration of the construction permit.

Sincerely,

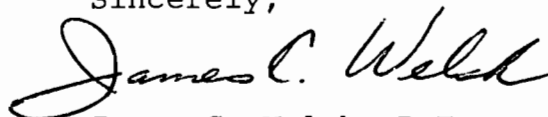

James C. Welsh, P.E.  
City of Kissimmee  
Electric Utilities Director



OFFICE OF THE UTILITIES DIRECTOR



P.O. BOX 1608 • KISSIMMEE, FLORIDA 32744 • 305/847-2821  
32744-1608

January 16, 1984

DER  
JAN 18 1984  
BAQM

Mr. C. H. Fancy  
Deputy Chief  
Bureau of Air Quality Management  
Department of Environmental Regulation  
Twin Towers Office Building  
2600 Blair Stone Road  
Tallahassee, Florida 32301-8241

Re: Preliminary Determination - Kissimmee Utilities  
Combined Cycle Unit #1, Osceola County  
State Permit No. AC 49-74856  
Federal Permit No. PSD-FL-087

Dear Mr. Fancy:

In compliance with the 14-day publication requirement of the Notice of Proposed Agency Action, please find enclosed a tear sheet of the Notice which appeared in the Osceola Little Sentinel, The Orlando Sentinel, Sunday, January 15, 1984.

Very truly yours,

James C. Welsh, P.E.  
Electric Utilities Director

/pf  
Enclosure

CC: David A. Buff, Environmental Science & Engineering, W/Encl.  
Charles Collins, DER St. Johns River District, W/Encl.

# CALL TOLL FREE 1

## We're Open Late.

You Can Call  
In Your Action Ad

8 a.m.-6 p.m. Monday-Wednesday

8 a.m.-8 p.m. Thursday & Friday

8 a.m.-12 Noon Saturday

In Orange and S. Seminole Counties

Call 420-5757

Outside of Orange and S. Seminole Counties

Call toll-free 1-800-432-6868

**The Orlando Sentinel**

12-83

## LEGAL NOTICES

### PUBLIC NOTICE

A modification to an existing air pollution source is being proposed by Kissimmee Utilities located in the City of Kissimmee, Osceola County, Florida. The proposed modification is the construction of a 49.9 MW combined cycle gas turbine. The modification will increase emissions of air pollutants, in tons per year, by the following amounts:

PM	SO <sub>2</sub>	NO <sub>x</sub>	CO	VOC
96	1702	1029	349	83

The proposed modification has been reviewed by the Florida Department of Environmental Regulation (FDER) under Chapter 403, Florida Statutes, and Federal regulation 40 CFR 52.21, Prevention of Significant Deterioration (PSD). The Department has made a preliminary determination that the construction can be approved provided certain conditions are met. A summary of the basis for the determination and the application for State and Federal permits submitted by Kissimmee Utilities are available for public review at the following offices:

Bureau of Air Quality Management Department of Environmental Regulation 2600 Blair Stone Road Tallahassee, Florida 32301	St. Johns River District Department of Environmental Regulation 3319 Maguire Blvd., Suite 232 Orlando, Florida 32803
---	---

Kissimmee Public Library

305 E. Broadway

Kissimmee, Florida 32741

The maximum percentages of allowable PSD increments consumed by the proposed modification will be as follows:

PM	Annual	24-Hour	3-Hour
SO <sub>2</sub>	Negligible	Negligible	NA
	5	11	9

Any person may submit written comments to FDER regarding the proposed modification. All comments, postmarked not later than 30 days from the date of notice, will be considered by FDER in making a final determination regarding approval for construction of this source. Those comments will be made available for public review on request. Furthermore, a public hearing can be requested by any person. Such request should be submitted within 14 days of the date of this notice. Letters should be addressed to:

Mr. C.H. Fancy, P.E.  
Deputy Chief  
Bureau of Air Quality Management  
Department of Environmental Regulation  
2600 Blair Stone Road  
Tallahassee, Florida 32301

OS-403

Jan. 15, 1984



January 11, 1984

DER

JAN 16 1984

BAQM

*PaHy*  
Mr. C. H. Fancy  
Deputy Chief  
Bureau of Air Quality Management  
Department of Environmental Regulation  
Twin Towers Office Building  
2600 Blair Stone Road  
Tallahassee, Florida 32301-8241

Re: Preliminary Determination - Kissimmee Utilities  
Combined Cycle Unit #1, Osceola County  
State Permit No. AC 49-74856  
Federal Permit No. PSD-FL-087

Dear Mr. Fancy:

Receipt is acknowledged of your letter of January 5, 1984, with attached Public Notice and Technical Evaluation and Preliminary Determination. These were received in this office January 9 and in keeping with the requirement of 14-day publication of the Notice of Proposed Agency Action, the Public Notice will appear in the Osceola Little Sentinel, Sentinel Star, on Sunday, January 15, 1984, in the legal section. A copy of this publication will be forwarded to your office.

Very truly yours,


James C. Welsh, P.E.  
Electric Utilities Director

/pf

CC: David A. Buff, P.E., Environmental Science & Engineering  
Charles Collins, DER St. Johns River District

STATE OF FLORIDA  
DEPARTMENT OF ENVIRONMENTAL REGULATION

TWIN TOWERS OFFICE BUILDING  
2600 BLAIR STONE ROAD  
TALLAHASSEE, FLORIDA 32301-8241



BOB GRAHAM  
GOVERNOR  
VICTORIA J. TSCHINKEL  
SECRETARY

January 5, 1984

CERTIFIED MAIL-RETURN RECEIPT REQUESTED

Mr. James C. Welsh  
Utilities Director  
Kissimmee Utilities  
Post Office Box 1608  
Kissimmee, Florida 32741

Dear Mr. Welsh:

RE: Preliminary Determination - Kissimmee Utilities  
Combined Cycle Unit #1, Osceola County  
State Permit No. AC 49-74856, Federal Permit No. PSD-FL-087

The Florida Department of Environmental Regulation, under the authority delegated by the U.S. Environmental Protection Agency, Region IV, has reviewed your application to modify the referenced source under the provisions of the Prevention of Significant Deterioration Regulations (40 CFR 52.21) and has made a preliminary determination of approval with conditions. Please find enclosed one copy of the Preliminary Determination and proposed state and federal permits.

Before final action can be taken on your proposed permit, you are required by Florida Administrative Code Rule 17-1.62(3) to publish the attached Notice of Proposed Agency Action in the legal advertising section of a newspaper of general circulation in Osceola County no later than fourteen days after receipt of this letter. The department must be provided with proof of publication within seven days of the date the notice is published. Failure to publish the notice may be grounds for denial of the permit.


Mr. James C. Welsh  
January 4, 1984  
Page Two

A copy of the Preliminary Determination and your application will be open to public review and comment for a period of 30 days after publication of the notice. The public can also request a public hearing to review and discuss specific issues. At the end of this period, the department will evaluate the comments received and make a final determination regarding the proposed construction.

The Preliminary Determination and proposed permit constitutes a proposed action of the department and is subject to administrative hearing under the provisions of Chapter 120, Florida Statutes, if requested within fourteen days from receipt of this letter. Any petition for hearing must comply with the requirements of Florida Administrative Code Rule 28-5.201 and be filed with the Office of General Counsel, Florida Department of Environmental Regulation, Twin Towers Office Building, 2600 Blair Stone Road, Tallahassee, Florida 32301. Failure to file a request for hearing within fourteen days shall constitute a waiver of your right to a hearing. Filing is deemed complete upon receipt by the Office of General Counsel.

Please submit, in writing, any comments which you wish to have considered concerning the department's proposed action to Mr. Bill Thomas of the Bureau of Air Quality Management.

Sincerely,



C. H. Fancy, P.E.  
Deputy Chief  
Bureau of Air Quality  
Management

CHF/TH/pa

Attachments

cc: David A. Buff, P.E., Environmental Science and Engineering  
Charles Collins, DER St. Johns River District

Technical Evaluation  
and  
Preliminary Determination

Kissimmee Utilities  
Osceola County

49.9 MW Combined Cycle Gas Turbine

Permit Numbers:

State AC 49-74856

Federal PSD-FL-087

Florida Department of Environmental Regulation  
Bureau of Air Quality Management  
Central Air Permitting

January 4, 1984

## Table of Contents

	Page
Public Notice	i
Introduction	iii
I. Synopsis of Application	1
A. Applicant Name and Address	
B. Source Location	
C. Project Description	
II. Rule Applicability	2
A. Federal Regulations	
B. State Regulations	
III. Source Impact Analysis	4
A. Emission Limitations	
Table 1. Summary of Emissions	
Table 2. Allowable Emissions	
B. Air Quality Impact	
C. Additional Impacts	
IV. Conclusions	8
Appendices	
Appendix A	9
BACT Analysis	
BACT Determination	
Appendix B	18
Air Quality Analysis	
Appendix C	27
Additional Impacts	
Appendix D	28
State general and specific conditions (Draft Permit)	
Federal general and specific conditions	
Attachments	
Kissimmee Utilities' permit application and pertinent correspondence submitted on September 6, 1983	

PUBLIC NOTICE

A modification to an existing air pollution source is being proposed by Kissimmee Utilities located in the City of Kissimmee, Osceola County, Florida. The proposed modification is the construction of a 49.9 MW combined cycle gas turbine. The modification will increase emissions of air pollutants, in tons per year, by the following amounts:

<u>PM</u>	<u>SO<sub>2</sub></u>	<u>NO<sub>x</sub></u>	<u>CO</u>	<u>VOC</u>
96	1702	1029	349	83

The proposed modification has been reviewed by the Florida Department of Environmental Regulation (FDER) under Chapter 403, Florida Statutes, and Federal regulation 40 CFR 52.21, Prevention of Significant Deterioration (PSD). The Department has made a preliminary determination that the construction can be approved provided certain conditions are met. A summary of the basis for the determination and the application for State and Federal permits submitted by Kissimmee Utilities are available for public review at the following offices:

Bureau of Air Quality  
Management  
Department of Environmental  
Regulation  
2600 Blair Stone Road  
Tallahassee, Florida 32301

St. Johns River District  
Department of Environmental  
Regulation  
3319 Maguire Blvd., Suite 232  
Orlando, Florida 32803

Kissimmee Public Library  
305 E. Broadway  
Kissimmee, Florida 32741

The maximum percentages of allowable PSD increments consumed by the proposed modification will be as follows:

	Annual	24-Hour	3-Hour
PM	Negligible	Negligible	NA
SO <sub>2</sub>	5	11	9

Any person may submit written comments to FDER regarding the proposed modification. All comments, postmarked not later than 30 days from the date of notice, will be considered by FDER in making a final determination regarding approval for construction of this source. Those comments will be made available for public review on request. Furthermore, a public hearing can be requested by any person. Such request should be submitted within



14 days of the date of this notice. Letters should be addressed to:

Mr. C. H. Fancy, P.E.  
Deputy Chief  
Bureau of Air Quality Management  
Department of Environmental Regulation  
2600 Blair Stone Road  
Tallahassee, Florida 32301

## INTRODUCTION

Kissimmee Utilities has reapplied (September 6, 1983) for a permit to construct a combined cycle unit. An original application for the same unit was submitted to the department in August 1983. A state and federal permit were issued on November 25, 1981 and February 19, 1982 respectively. The state permit expired on January 30, 1983.

A revised preliminary determination has been performed for the new permit application. This revised preliminary determination covers changes which have been made to the permit specific conditions and to the BACT emission limits. All sections have been revised to reflect the modifications requested in the new permit application.

The organization pattern of the original determination has not varied.

I. SYNOPSIS OF APPLICATION

A. Name and Address of Applicant

Kissimmee Utilities  
P. O. Box 1608  
Kissimmee, Florida 32741

B. Source Location

The proposed source is located at 112 Ruby Street in the City of Kissimmee, in Osceola County, Florida. The UTM coordinates are: Zone 17-460.1 Km East and 3,129.3 Km North.

C. Project Description

The applicant proposes to install and operate a combined cycle combustion gas turbine, with a total net generating capacity of 46.5 megawatts (MW) and a gross generating capacity of 49.9 MW. The turbine will be fired with natural gas. No. 2 fuel oil, having a maximum sulfur content of 0.5 percent, will be used as a standby fuel. The maximum heat input will be 441.7 MMBTU/hr (LHV).

Kissimmee Utilities (KU) currently operates 12 diesel generating units with a total output rated at 26.8 MW at this site.

## II. RULE APPLICABILITY

### A. Federal Regulations

The proposed project is subject to preconstruction review under federal Prevention of Significant Deterioration (PSD) regulation, Section 52.21 of Title 40 of the Code of Federal Regulations as amended in the Federal Register of August 7, 1980 (45 CFR 52.21). Specifically, Kissimmee Utilities' combined cycle combustion gas turbine is a major stationary source (40 CFR 52.21(b)(1)) located in an area currently designated as attainment in accordance with 40 CFR 81.310 for all criteria pollutants regulated under the Clean Air Act (CAA).

The proposed source will be a major modification (40 CFR 52.21(b)(2) for particulate matter (PM), sulfur dioxide (SO<sub>2</sub>), nitrogen oxides (NO<sub>x</sub>), volatile organic compounds (VOC), and carbon monoxide (CO). Emissions of PM, SO<sub>2</sub>, NO<sub>x</sub>, VOC and CO will increase above the significant criteria set in the PSD regulations. Therefore, the proposed project is subject to PSD review for these pollutants.

This review consists of a determination of Best Available Control Technology (BACT) and unless otherwise exempted, an analysis of the air quality impact of the increased emissions. No air quality impact analysis is required for ozone, even though there will be a significant increase in VOC emissions, because this increase is less than 100 tons per year. The review also includes an analysis of the project's impacts on soils, vegetation and visibility along with air quality impacts resulting from associated commercial, residential and industrial growth.

The proposed project is also subject to the provisions of the federal New Source Performance Standard (NSPS) for gas turbines, 40 CFR 60, Subpart GG.

B. State Regulations

The proposed project is subject to preconstruction review under the provisions of Chapter 403, Florida Statutes, and Chapter 17-2, Florida Administrative Code. Specifically, the proposed source is a major emitting facility for NO<sub>x</sub> and SO<sub>2</sub> as defined in Chapter 17-2 because the potential emissions of each pollutant exceed 250 tons per year.

This project shall comply with provisions of Rule 17-2.500, Prevention of Significant Deterioration (PSD), 17-2.660, New Source Performance Standards (NSPS) for gas turbines 40 CFR, Subpart GG and 17-2.700 Stationary Point Source Emissions Test Procedures.

The proposed source is exempt from provisions of Rule 17-2.510, New Source Review for Nonattainment Areas.

### III. SOURCE IMPACT ANALYSIS

#### A. Emissions Limitations

The operation of the proposed combined cycle gas turbine, will produce emissions of particulate matter (PM), sulfur dioxide (SO<sub>2</sub>), nitrogen oxides (NO<sub>x</sub>), beryllium (Be), Mercury (Hg), carbon monoxide (CO) and volatile organic compounds (VOC) to the atmosphere.

Table 1 summarizes potential to emit of all pollutants regulated under the Act which are affected by the proposed source.

Best Available Control Technology (BACT) has been determined for NO<sub>x</sub>, SO<sub>2</sub>, PM, VOC, and CO. The emission limiting standards selected as BACT and made a condition of the permit are listed in Table 2. Justification for the standards selected is included in Technical Appendix A.

The permitted emissions, including those determined as BACT, are in compliance with New Source Performance Standard (NSPS) requirements of 40 CFR 60, Subpart GG.

#### B. Air Quality Impacts

An air quality impacts analysis has been performed to evaluate the impact of the proposed project on ambient concentrations of NO<sub>x</sub>, SO<sub>2</sub>, PM, and CO. Dispersion modeling was used to evaluate the impacts.

Results of the analysis provide reasonable assurance that the project, as described in this permit and subject to the conditions herein, will not lead to any violation of National Ambient Air Quality Standards or PSD increments. Details of the analysis are discussed in the Technical Appendix B.

TABLE 1  
SUMMARY OF EMISSIONS  
(Tons Per Year)\*

Pollutant	Gas-Fired			Fuel-Oil Fired			PSD
	Turbine	Supplemental Firing	Total	Turbine	Supplemental Firing	Total	Significant Emission Rate <sup>(e)</sup>
Potential NO <sub>x</sub> <sup>(a)</sup>	1877	28	1905	1927	27	1954	--
Actual NO <sub>x</sub> <sup>(b)</sup>	976	28	1004	1002	27	1029	40
Hydrocarbons (as CH <sub>4</sub> )	82	1	83	73	1	73	40
Carbon Monoxide	224	7	231	342	7	349	100
Particulate	27	1	28	93	3	96	25
Sulfur Dioxide <sup>(c)</sup>	19	2	21	1,542	160	1,702	40
Mercury <sup>(d)</sup>	0.02	--	0.02	0.002	--	0.002	0.1
Beryllium	--	--	--	0.0006	--	0.0006	0.0004

(a) Potential emissions in accordance with state and federal definitions as estimated by the applicant. A 48 percent emission reduction is expected with the proposed water injection technique.

(b) Based upon turbine gas flow rate and 129 ppm Nox according to the following equation:  
 $(\text{DSCFM})(\text{NOx ppm})(2000 \text{ ug/m}^3\text{-ppm})(0.0283 \text{ m}^3/\text{ft}^3)(10^{-6} \text{ g/ug})(60 \text{ min/hr})(8760 \text{ hr/yr})(1 \text{ lb}/454\text{g})(1 \text{ ton}/2000 \text{ lb})$ .

(c) Assumed natural gas has 0.01 percent sulfur content. Fuel oil calculations based on total conversion of 0.8 percent sulfur in fuel oil to sulfur dioxide, as requested by the applicant.

(d) Emissions calculated based on emissions factors from Stationary Conventional Combustion Processes, EPA, (450/2-80-074).

(e) 40 CFR 52.21(b)(23).

\* Calculations are based on 8760 hours per year operating time.

C. Additional Impact Analysis

An additional impacts analysis has been performed to assess (1) the impact of the proposed project on soils, vegetation, and visibility and (2) any air quality impacts resulting from associated commercial, residential, or industrial growth. No adverse impacts are expected; details of the analysis are discussed in Technical Appendix C.



#### IV. CONCLUSIONS

Base on review of the data submitted by Kissimmee Utilities for the installation and operation of a 49.9 MW combined cycle gas turbine, the FDER concludes that compliance with all applicable federal and state air quality regulations will be achieved provided certain specific conditions are met. The NSPS emission limits for NO<sub>x</sub>, SO<sub>2</sub>, and the permitted emissions limits of 0.0004 lb/hr for Hg, 0.00004 lb/hr, for Be, 22 lb/hr for PM, 19 lb/hr for VOC and 80 lb/hr for CO have been determined to be Best Available Control Technology (BACT) for this source. The impact of the emissions from the 49.9 MW combined cycle gas turbine will not cause or contribute to a violation of any ambient air quality standard or PSD increment. Appendix D includes the proposed general and specific conditions in the draft state permit (AC 49-74856) and federal permit (PSD-FL-087).

TECHNICAL APPENDIX A  
FEDERAL BACT ANALYSIS

The applicant is required, under the provisions of 40 CFR 52.21, as revised August 7, 1980 (45 FR 52676), to apply BACT to all criteria and noncriteria pollutants emitted in significant levels. BACT is determined for each pollutant on a case-by-case review taking into account energy, environmental and economic impacts.

The applicant has proposed BACT for each applicable pollutant and has presented justification for the standards selected. The Department of Environmental Regulation (DER) has reviewed and accepted the technology and emission limits proposed as BACT. The federal PSD permit shall include these limits or any more stringent emission standards that are imposed by the State of Florida. These limits are summarized in Table 2. A discussion of the BACT for each pollutant follows:

### PM Control

The BACT limitation proposed for particulate matter (PM), 22 lb/hr, is based upon emission for Stationary Gas Turbines AP-42.

Particulate emissions from stationary gas turbines depend on the ash content of the fuel which is minimal for the proposed fuels. The applicant has reported an ash percentage of less than 0.1 in the fuel oil analysis. Therefore, FDER feels that the applicant proposed 0.0498 lb/MMBTU (22 lb/hr) emission limit for PM is reasonable as BACT.

### Carbon Monoxide and Hydrocarbon Control

The applicant proposes emissions levels for carbon monoxide (CO) and volatile organic compounds (VOC) based on emission estimates from Stationary Gas Turbines AP-42.

CO and HC emissions are function of combustion efficiency. The higher the percentage of peak load at which a turbine operates, the more efficient the combustion of the fuel.

HC and CO emissions from stationary gas turbines operating at peak load are relatively low. Gas turbines normally operate at 80 to 100 percent of peak load with HC emission averaging less than 50 ppm and CO emission averaging less than 500 ppm concentration at 15 percent oxygen.

Based on the above facts, FDER agrees that emission limits of 0.1811 lb/MMBTU (80 lb/hr) for CO and 0.043 lb/MMBTU (19 lb/hr) for VOC constitute BACT for the proposed source.

### SO<sub>2</sub> Control

The applicant proposes an emission limit of 388 lb SO<sub>2</sub>/hr and 0.8 percent sulfur content in the fuel oil. The basis of this proposed emission limit is found in the AP-42 emission factors for Stationary Gas Turbines and NSPS for Gas Turbines.

SO<sub>2</sub> emissions from stationary gas turbines depend on the sulfur content of the fuel since nearly 100 percent of the sulfur is converted to SO<sub>2</sub> during the combustion process. Due to the high volumes of exhaust gases, the cost of flue gas desulfurization (FGD) is considered unreasonable. Therefore, FDER determines that the selection of low sulfur oil (0.5), and an emission limit of 388 lb SO<sub>2</sub>/hr is BACT for the proposed source.

### NO<sub>x</sub> Control

The applicant proposes to control NO<sub>x</sub> with a wet control technique (water injection) and limiting the maximum fuel-bound nitrogen content to 0.25 percent.

Total NO<sub>x</sub> emissions from any combustion source, including stationary gas turbines, are a function of both thermal NO<sub>x</sub> and organic NO<sub>x</sub> formation. Thermal NO<sub>x</sub> is formed by a high temperature reaction between nitrogen and oxygen from the combustion air. Organic NO<sub>x</sub>, however, is formed by the oxidation of fuel-bound nitrogen during combustion.

NO<sub>x</sub> formation within a turbine generally increases exponentially with increased pressure and temperature. High efficiency turbines, therefore, generally discharge gases with higher NO<sub>x</sub> concentrations than low efficiency turbines. Since the

relative fuel consumption of gas turbines varies linearly with efficiency, an adjustment factor was selected (NSPS) that permitted increased NO<sub>x</sub> emissions for the efficient turbines.

Gas turbines with waste heat recovery (combined cycle gas turbine) have a higher overall efficiency than the gas turbine alone. The application of the efficiency adjustment factor to the entire system would permit greater NO<sub>x</sub> emission. The efficiency adjustment factor in the selected NSPS must be based on the gas turbine efficiency itself, not the overall efficiency of a gas turbine combined with other equipment. This consideration is discussed at length in the preamble to the selected NSPS for stationary gas turbines.

Based on the above facts, the KU gas turbine would actually be allowed an emission rate of 79 PPM (gas) and 129 PPM (oil) due to the efficiency adjustment factor, which is an increase of the nominal 75 PPM NO<sub>x</sub> emission by 5.64%. An additional 50 PPM would be the allowance for fuel-bound nitrogen when burning fuel oil No. 2. Therefore, FDER determines that the selected NSPS emission limit of 79 PPM (gas) and 129 PPM (oil), or  $0.0075 \frac{(14.4)}{Y} + F$

(when applicable) at 15% oxygen on a dry basis (see formula, Table 2) is BACT for this source.

### Beryllium Control

The applicant proposes an emission limit of 1.2 pounds per year (0.0014 NG/J) for beryllium based on the emission factor from Stationary Combustion Processes - EPA 450/2-80-074. This emission factor was based on characterization of fuel samples. A later publication, EPA 600/57/81-003b, presented an emission factor of 0.00004 NG/J based on uncontrolled emissions in the exhaust gases from a distillate oil-fired boiler.

Using the lowest emission factor of 0.35 pounds per year (0.00004 NG/J), the annual amount of beryllium emitted would be less than the significant increase - 0.8 pounds per year - for this pollutant.

BEST AVAILABLE CONTROL TECHNOLOGY (BACT) DETERMINATION  
Kissimmee Utilities  
Osceola County

Kissimmee Utilities, Kissimmee, Florida, plans to increase their existing electric generating capability by an additional 49.9 gross megawatts. The proposed supplementary-fired combined cycle gas turbine system is composed of one 400 million Btu/hr heat input gas turbine (30.9 megawatt gross output) from which the exhaust gases discharge into a waste heat boiler. The steam produced will operate two steam turbines each producing 9.5 megawatt gross output. The boiler has a 41.7 million Btu per hour supplemental heat source to generate additional steam.

The system will fire natural gas with No. 2 oil as stand-by fuel. Hourly fuel consumption at maximum firing will be 0.491 million cubic feet of gas or 78 barrels of oil. The system is scheduled to operate 8,760 hours per year.

BACT Determination Requested by the Applicant:

<u>Pollutant</u>	<u>Emission Limit</u>
NO <sub>x</sub>	129 PPM when firing oil
SO <sub>2</sub>	0.8% maximum fuel sulfur content

Date of Receipt of a BACT Application:

September 9, 1983

Date of Publication in the Florida Administrative Weekly:

September 4, 1981

Review Group Members:

Comments were obtained from the New Source Review Section, the Air Modeling Section, and the St. Johns River District Office.

BACT Determination by DER:

<u>Turbine Emissions</u>	<u>Limit</u>
NO <sub>x</sub> (gas)	79 PPM (water injection)
NO <sub>x</sub> (oil)	129 PPM (water injection)
SO <sub>2</sub>	No. 2 distillate oil with sulfur content not to exceed 0.5 percent or natural gas as fuel

Visible Emissions Maximum 20% opacity

<u>Boiler Emissions</u>	<u>Limit</u>
SO <sub>2</sub> & Particulates	Natural gas as fuel or No. 2 distillate oil with sulfur content not to exceed 0.5 percent
Visible Emissions	Not to exceed 20% opacity. 40% opacity is permitted for not more than two minutes in any one hour.

Turbine NO<sub>x</sub> emission limits calculated using the NSPS formula in Subpart GG, subsection 40 CFR 60.332.

$$NO_x = 0.0075 \frac{(14.4)}{Y} + F$$

Y = Manufacturer's rated heat rate at manufacturers rated load. Applicant indicates this parameter is 13.66 kJ/watt-hr.

F = NO<sub>x</sub> emission allowance for fuel-bound nitrogen. Applicant indicates this parameter is 0.005.

Compliance with the turbine NO<sub>x</sub> emission limit shall be in accordance with 40 CFR 60, Appendix A; Method 20 as set forth in the NSPS subsection 40 CFR 60.335. The sampling site shall be located between the gas turbine and the boiler.

The excess emission reports required under subsection 40 CFR 60.7(c) are to be sent to the Department of Environmental Regulation, Bureau of Air Quality Management, 2600 Blair Stone Road, Tallahassee, Florida, 32301. The information to be submitted to the department is outlined in Subpart GG, subsection 40 CFR 60.334(c).



Compliance with the opacity limits shall be in accordance with DER Method 9 (Rule 17-2.700(6)(a)9.).

BACT Determination Rationale:

Nitric oxides produced by the combustion of fuel in the gas turbine are formed by the combination of nitrogen and oxygen in the combustion air. NO<sub>x</sub> is also formed from the reaction of the nitrogen in the fuel with the oxygen in the combustion air. Formation of the latter NO<sub>x</sub> will be minimized by the applicant's use of natural gas or distillate oil as fuel, both of which have low nitrogen content.

NO<sub>x</sub> formation is extremely sensitive to flame temperature, therefore injecting water or steam into the gas turbine reaction zone will reduce production of NO<sub>x</sub>. The use of the wet control technique to reduce NO<sub>x</sub> emissions to or below the NSPS limits is determined to be BACT.

The SO<sub>2</sub> emissions from the gas turbine are strictly a function of the fuel sulfur content. Flue gas desulfurization systems are economically unattractive compared to the cost of low sulfur fuels. The firing of natural gas or No. 2 oil containing a maximum of 0.5% sulfur is determined as BACT for the control of SO<sub>2</sub> emissions.

The reduction of NO<sub>x</sub> emissions results in an increase in CO emissions. CO emissions are considered to be a local problem since CO readily reacts to form CO<sub>2</sub>. NO<sub>x</sub> emissions, however, are linked to the formation of photochemical oxidants and are subject to long range transport. As a result of this trade-off, no emission limit for CO is specified in this determination.

The proposed stationary gas turbine is subject to the requirements of Subpart GG, New Source Performance Standards (NSPS) and Florida Administrative Code Rule 17-2.660. The Department has been delegated the authority to implement and enforce the NSPS program, therefore, the quarterly excess emission reports required by 40 CFR 60(c) are to be sent to the Department of Environmental Regulation.

The supplemental heat source to the waste heat recovery boiler is 41.7 million Btu per hour. The major air pollutant from this source would be SO<sub>2</sub> when firing No. 2 distillate oil. The emission rate of SO<sub>2</sub> will be 0.5 lb/10<sup>6</sup> Btu, which is less than the current NSPS standard for fossil-fuel-fired steam generators, therefore, the installation of a FGD system is not justified. The waste heat recovery boiler will not operate when the gas turbine is down.

The monitoring provisions of the NSPS for the gas turbine requires that the sulfur content and nitrogen content of the fuel

fired is determined as set forth in subsection 40 CFR 60.334. The same fuel source will be used to fire the boiler supplemental heaters, therefore, the Department has determined that only an opacity emission limit for the waste heat boiler is necessary to insure compliance.

The applicant indicated that beryllium emissions would be 1.2 pounds per year based upon an emission factor from the guideline publication EPA-450/2-80-074. The beryllium emission factor for distillate oil was based on characterization of fuel samples. A later publication, EPA-600/57-81-003b, presented a summary of uncontrolled emissions in the exhaust gas from a distillate oil-fired boiler. The emission factor for beryllium was 0.00004 Ng/J as compared to the applicants emission factor of .00014 Ng/J. Using the most recent emission factor the annual amount of beryllium emitted would be 0.35 pounds which is less than the significant emission rate of 0.8 pounds per year (Table 500-2).

Details of the Analysis May be Obtained by Contacting:

Edward Palagyi, BACT Coordinator  
Department of Environmental Regulation  
Bureau of Air Quality Management  
2600 Blair Stone Road  
Tallahassee, Florida 32301

Recommended By:

C. H. Fancy, Deputy Bureau Chief, BAQM

Date:

---

Approved:

Victoria J. Tschinkel, Secretary

Date:

---

## APPENDIX B

### AIR QUALITY IMPACT ANALYSIS

#### A. Summary

The State PSD review for PM and SO<sub>2</sub> requires an air quality impact analysis which includes a PSD increment analysis and a Florida Ambient Air Quality Standards (FAAQS) analysis. The State PSD increment and FAAQS analyses depend on air quality modeling carried out in accordance with FDER-approved methods.

The air quality impact analysis required under federal PSD review for PM, SO<sub>2</sub>, CO, and NO<sub>x</sub> includes:

- o An analysis of existing air quality;
- o A PSD increment analysis (for PM and SO<sub>2</sub> only);
- o A National Ambient Air Quality Standards (NAAQS) analysis; and,
- o An analysis of impact on soils, vegetation and visibility and growth-related air quality impacts.

The analysis of existing air quality may require preconstruction monitoring; the PSD and NAAQS analyses depend on air quality modeling carried out in accordance with EPA-approved methods. Federal PSD review also requires a good engineering practice (GEP) stack height evaluation..

Based on these required State and federal air quality impact analyses, FDER has reasonable assurance that the KU modification, as described in this permit and subject to the conditions of approval proposed herein, will not cause or contribute to a violation of any State or federal PSD increment or ambient air quality standard. A discussion of the required analyses follows.

## B. Discussion

### 1. Modeling Methodology

Two FDER and EPA-approved dispersion models were used in the State and federal air quality impact analyses. These were the Single-Source (CRSTER) and Industrial Source Complex (ISC) models.

These models were used to determine the maximum predicted annual concentrations and to identify the absolute worst-case short-term meteorological conditions which would affect emissions from KU after the proposed modification is completed. They were also used to identify days on which meteorological conditions produced worst-case short-term KU impacts in the vicinity of the facility with interacting sources located directly upwind.

The maximum short-term impacts due to emissions from KU and all major interacting sources were analyzed using a refined grid spacing of 0.1 to 0.2 kilometers between receptors and only the days on which worst-case meteorological conditions occurred.

Since worst-case impacts for each pollutant subject to analysis occur under different fuel burning conditions, modeling and analysis for each of these pollutants was performed using the worst-case fuel.

The surface meteorological data used in the models were National Weather Service data collected at Orlando, Florida during the period 1974-78. Upper air meteorological data used in the models were collected during the same time period at Tampa, Florida.

Final stack parameters and emission rates used in evaluating the proposed KU modification are contained in Tables B-1 and B-2.

Table B-1

## Stack Parameters for Kissimmee Utilities - Baseline Case

Emissions Unit	Stack Height (m)	Stack Diameter (m)	Exit Velocity (m/s)	Exit Temperature (K)	Emission Rate (g/sec)	
					SO <sub>2</sub>	PM
Unit #7	13.11	.61	16.30	466.50	.87	.52
Units #8,#9	16.15	.85	17.60	477.60	3.36	2.01
Units #10,#11	7.01	.76	9.60	466.50	2.28	1.36
Units #14-#18	13.41	.80	8.70	505.40	5.37	3.21
Units #19,#20	8.69	.90	17.20	505.40	2.89	1.73

TABLE B-2

## Stack Parameters for Kissimmee Utilities - Projected Case

Emissions Unit	Stack Height (m)	Stack Diameter (m)	Exit Velocity (m/s)	Exit Temperature (K)	Emission Rate (g/sec)			CO
					SO <sub>2</sub>	PM	NO <sub>x</sub>	
Unit #7	13.11	.61	16.30	466.50	.87	.52	4.46	.79
Units #8, #9	16.15	.85	17.60	477.60	3.36	2.01	17.10	3.16
Units #10, #11	7.01	.76	9.60	466.50	2.28	1.36	10.58	2.12
Units #14-#18	13.41	.80	8.70	505.40	5.37	3.21	11.34	5.45
Units #19,#20	8.69	.90	17.20	505.40	2.89	1.73	14.66	2.64
Combustion Turbine	18.29	3.66	38.03	422.00	48.9	2.77	30.70	10.08

## 2. Analysis of Existing Air Quality

In order to evaluate existing air quality in the area of a proposed project, FDER may require a period of continuous preconstruction monitoring for any pollutant subject to PSD review. An exemption from this requirement may be obtained if the net emissions increase of the pollutant from the modification would cause an air quality impact less than a certain de minimus level as defined in 40 CFR 52.21(i)(8). Based on the modeling results shown in the following table, this exemption is applicable to the proposed modification for all of the pollutants subject to PSD review. Therefore, no preconstruction monitoring has been required.

### Projected Air Quality Impacts From Combustion Turbine

<u>Pollutant</u>	<u>Averaging Time</u>	<u>Projected Impact (ug/m<sup>3</sup>)</u>	<u>De Minimus Level (ug/m<sup>3</sup>)</u>
SO <sub>2</sub>	24-hour	10	13
TSP	24-hour	<1	10
NO <sub>x</sub>	24-hour	6	14
CO	8-hour	<10	575

There are no FDER or EPA-approved TSP, SO<sub>2</sub>, NO<sub>x</sub>, or CO monitors within 25 kilometers of the KU facility. Since the KU facility is located in a remote area with respect to nonspecified sources, FDER has assumed the following pollutant background values: 0 ug/m<sup>3</sup> for CO, 20 ug/m<sup>3</sup> for SO<sub>2</sub> and NO<sub>x</sub>, 40 ug/m<sup>3</sup> for TSP. These background values are used for all



averaging times and are consistent with EPA monitoring guidelines.

3. PSD Increment Analysis

Both the State and federal PSD increment analyses pertain to PM and SO<sub>2</sub> for which maximum allowable increases (increments) are defined. The proposed KU modification will be located in an area where the Class II increments apply. The nearest Class I area is more than 100 kilometers away from the proposed site.

The predicted maximum TSP and SO<sub>2</sub> increment consumption is the same in both the State and federal PSD increment analyses. Increment consumption at KU is affected by the construction of the combustion turbine alone.

As shown in the following table, modeling results predict that the maximum TSP and SO<sub>2</sub> increment consumption will not exceed allowable increments. The highest, second-highest short-term predicted concentrations are given in the table since five years of meteorological data were used in the modeling.

Maximum Increment Consumption

(ug/m<sup>3</sup>)

State and Federal

<u>Pollutant</u>	<u>Averaging Time</u>		
	<u>3-hour</u>	<u>24-hour</u>	<u>Annual</u>
SO <sub>2</sub> : Maximum KU Impact	44	10	< 1
SO <sub>2</sub> : Allowable Class II Increment	512	91	20
PM: Maximum KU Impact	NA	< 1	< 1
PM: Allowable Class II Increment	NA	37	19

There are other increment consuming sources within the vicinity of KU. Even though these sources consume increment in the area around KU, this consumption is very small. The combined impacts of these sources and KU in the interacting directions are less than the maximum increment consumed by KU only.

The nearest Class I area is Chassahowitza National Wilderness Area which is 125 kilometers away from KU. At this distance, it can be assumed that no Class I increment will be consumed as a result of emissions from KU.

#### 4. Ambient Air Quality Standards Analysis

Both State and federal PSD regulations require the permit applicant to demonstrate that, given existing air quality in an area, a proposed emissions increase subject to PSD review will not cause or contribute to any violation of ambient air quality standards. For the proposed project at KU, an ambient air quality standards analysis is required for PM, SO<sub>2</sub>, CO and NO<sub>x</sub>.

As shown in the following table, modeling results predict that maximum ground-level concentrations for each of these pollutants will be below both the FAAQS and NAAQS. The highest, second-highest short-term predicted values are given in this table since five years of meteorological data were used in the modeling.

<u>Pollutant</u>	<u>Averaging Time</u>	<u>Projected Air Quality* (ug/m<sup>3</sup>)</u>	<u>NAAQS (ug/m<sup>3</sup>)</u>	<u>FAAQS (ug/m<sup>3</sup>)</u>
SO <sub>2</sub>	annual	40	80	60
	24-hour	155	365	260
	3-hour	392	1300	1300
TSP	annual	52	75	60
	24-hour	121	150	150
NO <sub>2</sub>	annual	89	100	100
CO	8-hour	< 500	10,000	10,000
	1-hour	< 1000	40,000	40,000

\*Includes background concentrations of 40 ug/m<sup>3</sup> for annual and 24-hour TSP, 20 ug/m<sup>3</sup> for SO<sub>2</sub> for all averaging times, and 20 ug/m<sup>3</sup> for NO<sub>2</sub>.

\*\* Air quality impact calculated for the proposed modification only.

Modeling was also performed to evaluate the impacts of interactions of emissions from other sources with those from KU. Maximum contributions from surrounding sources are very small compared to maximum ground-level concentrations from KU and they occur in non-critical directions. Therefore, no violations are predicted to occur due to interacting sources.

##### 5. Good Engineering Practice Stack Height Evaluation

The stack height proposed for the KU combustion turbine is less than the Good Engineering Practice (GEP) stack height of 65 meters for stacks uninfluenced by structures or terrain. A building downwash analysis was not performed since the new stack will not be within the area of influence of any structure with the potential to cause downwash conditions.

APPENDIX C

ANALYSIS OF IMPACT ON SOILS, VEGETATION AND VISIBILITY AND GROWTH-RELATED AIR QUALITY IMPACTS

The maximum impact of the proposed modification, as demonstrated through the air quality analysis, will be below the national secondary air quality standards for PM and SO<sub>2</sub>. These standards were established to protect public welfare related values. Also, the maximum impact of the proposed modification on NO<sub>2</sub>, and CO concentrations will be insignificant. Therefore, no adverse effects on soils, vegetation and visibility is expected.

There will be no increase in the number of employees at this site due to the project. Therefore no secondary residential, commercial or industrial growth which will adversely affect air quality in the area is expected.

## APPENDIX D

### SPECIFIC CONDITIONS

FDER proposes a preliminary determination of approval with conditions for the project (construction of a 49.9 MW combined cycle gas turbine) requested by Kissimmee Utilities in the permit applications submitted on September 6, 1983.

Special conditions listed in the draft State permit AC 49-74856, are adopted as special conditions for the draft federal permit, PSD-FL-087, for this source.

The attached General Conditions (federal) are also made a part of the proposed federal permit PSD-FL-087.

## GENERAL CONDITIONS

1. The permittee shall notify the permitting authority in writing of the beginning of construction of the permitted source within 30 days of such action and the estimated date of start-up of operation.
2. The permittee shall notify the permitting authority in writing of the actual start-up of the permitted source within 30 days of such action and the estimated date of demonstration of compliance as required in the specific conditions.
3. Each emission point for which an emission test method is established in this permit shall be tested in order to determine compliance with the emission limitations contained herein within sixty (60) days of achieving the maximum production rate, but in no event later than 180 days after initial start-up of the permitted source. The permittee shall notify the permitting authority of the scheduled date of compliance testing at least thirty (30) days in advance of such test. Compliance test results shall be submitted to the permitting authority within forty-five (45) days after the complete testing. The permittee shall provide (1) sampling ports adequate for test methods applicable to such facility, (2) safe sampling platforms, (3) safe access to sampling platforms, and (4) utilities for sampling and testing equipment.
4. The permittee shall retain records of all information resulting from monitoring activities and information indicating operating parameters as specified in the specific conditions of this permit for a minimum of two (2) years from the date of recording.
5. If, for any reason, the permittee does not comply with or will not be able to comply with the emission limitations specified in this permit, the permittee shall immediately notify the State District Manager by telephone and provide the District Office and the permitting authority with the following information in writing within four (4) days of such conditions:
  - (a) description for noncomplying emission(s),
  - (b) cause of noncompliance,
  - (c) anticipated time the noncompliance is expected to continue or, if corrected, the duration of the period of noncompliance,

(d) steps taken by the permittee to reduce and eliminate the noncomplying emission,

and

(e) steps taken by the permittee to prevent recurrence of the noncomplying emission.

Failure to provide the above information when appropriate shall constitute a violation of the terms and conditions of this permit. Submittal of this report does not constitute a waiver of the emission limitations contained within this permit.

6. Any change in the information submitted in the application regarding facility emissions or changes in the quantity or quality of materials processed that will result in new or increased emissions must be reported to the permitting authority. If appropriate, modifications to the permit may then be made by the permitting authority to reflect any necessary changes in the permit conditions. In no case are any new or increased emissions allowed that will cause violation of the emission limitations specified herein.
7. In the event of any change in control or ownership of the source described in the permit, the permittee shall notify the succeeding owner of the existence of this permit by letter and forward a copy of such letter to the permitting authority.
8. The permittee shall allow representatives of the State environmental control agency or representatives of the Environmental Protection Agency, upon the presentation of credentials:
  - (a) to enter upon the permittee's premises, or other premises under the control of the permittee, where an air pollutant source is located or in which any records are required to be kept under the terms and conditions of the permit;
  - (b) to have access to any copy at reasonable times any records required to be kept under the terms and conditions of this permit, or the Act;
  - (c) to inspect at reasonable times any monitoring equipment or monitoring method required in this permit;

(d) to sample at reasonable times any emission of pollutants;

and

(e) to perform at reasonable times an operation and maintenance inspection of the permitted source.

9. All correspondence required to be submitted to this permit to the permitting agency shall be mailed to:

Mr. James T. Wilburn  
Chief, Air Management Branch  
Air & Waste Management Division  
U.S. EPA, Region IV  
345 Courtland Street, NE  
Atlanta, GA 30365

10. The conditions of this permit are severable, and if any provision of this permit, or the application of any provision of this permit to any circumstance, is held invalid, the application of such provision to other circumstances, and the remainder of this permit, shall not be affected thereby.

The emission of any pollutant more frequently or at a level in excess of that authorized by this permit shall constitute a violation of the terms and conditions of this permit.



ATTACHMENT 1

No. 0158242

RECEIPT FOR CERTIFIED MAIL  
 NO INSURANCE COVERAGE PROVIDED—  
 NOT FOR INTERNATIONAL MAIL  
 (See Reverse)

SENT TO		Mr. James C. Welsh	
STREET AND NO.			
P.O., STATE AND ZIP CODE			
POSTAGE		\$	
CONSULT POSTMASTER FOR FEES	CERTIFIED FEE	¢	
	SPECIAL DELIVERY	¢	
	RESTRICTED DELIVERY	¢	
	OPTIONAL SERVICES	RETURN RECEIPT SERVICE	¢
		SHOW TO WHOM AND DATE DELIVERED	¢
		SHOW TO WHOM, DATE, AND ADDRESS OF DELIVERY	¢
SHOW TO WHOM AND DATE DELIVERED WITH RESTRICTED DELIVERY		¢	
SHOW TO WHOM, DATE AND ADDRESS OF DELIVERY WITH RESTRICTED DELIVERY	¢		
TOTAL POSTAGE AND FEES		\$	
POSTMARK OR DATE		1/5/84	

PS Form 3800, Apr. 1976

PS Form 3811, Jan. 1979

SENDER: Complete items 1, 2, and 3.  
 Add your address in the "RETURN TO" space on reverse.

1. The following service is requested (check one.)  
 Show to whom and date delivered.....¢  
 Show to whom, date and address of delivery.....¢  
 RESTRICTED DELIVERY  
 Show to whom and date delivered.....¢  
 RESTRICTED DELIVERY.  
 Show to whom, date, and address of delivery.\$

(CONSULT POSTMASTER FOR FEES)

2. ARTICLE ADDRESSED TO:  
 Mr. James C. Welsh  
 P. O. Box 1608  
 Kissimmee, Florida 32741

3. ARTICLE DESCRIPTION:  
 REGISTERED NO. CERTIFIED NO. INSURED NO.  
 0158242

(Always obtain signature of addressee or agent)

I have received the article described above.  
 SIGNATURE  Addressee  Authorized agent

4. DATE OF DELIVERY  
 JAN 9 1984

5. ADDRESS (Complete only if requested)

6. UNABLE TO DELIVER BECAUSE:

POSTMARK  
 1984  
 6  
 JAN  
 KISSIMMEE, FLA.

CLERK'S INITIALS

RETURN RECEIPT, REGISTERED, INSURED AND CERTIFIED MAIL

STATE OF FLORIDA  
DEPARTMENT OF ENVIRONMENTAL REGULATION

TWIN TOWERS OFFICE BUILDING  
2600 BLAIR STONE ROAD  
TALLAHASSEE, FLORIDA 32301-8241



BOB GRAHAM  
GOVERNOR

VICTORIA J. TSCHINKEL  
SECRETARY

October 6, 1983

CERTIFIED MAIL - RETURN RECEIPT REQUESTED

Mr. James C. Welsh, Utilities Director  
Kissimmee Utilities  
P. O. Box 1608  
Kissimmee, Florida 32741

Dear Mr. Welsh:

The Bureau of Air Quality Management has received and reviewed the new information you submitted to us September 6, 1983, concerning your application to construct a combined cycle gas turbine in the City of Kissimmee, Orange County, Florida. We have determined the application is incomplete in the following sections.

Section II. General Project Information

A. In order to specify permit conditions and test procedures, we need the following information:

1. Will the steam boiler be operated as a separate source when the turbine is out of service? If so, is there a projected schedule for this type of operation?
2. Is the fuel oil used to fire the turbine and the boiler stored in the same tank?

D. This part must be completed.

Section III. Air Pollution Sources and Control Devices


E. Fuels.

What will be the maximum oil consumption rate if oil with lower sulfur content is burned? Typical No. 2 distillate oil has a 0.5% sulfur content. Will No. 2 oil be blended to 0.8% sulfur? If so, with what type and grade of oil.

Mr. James C. Welsh  
Page Two  
October 6, 1983

As soon as the requested information is received, we will resume processing your application. If you have any questions on this matter, please call Teresa Heron, review engineer, at (904)488-1344 or write to me at the above address.

Sincerely,

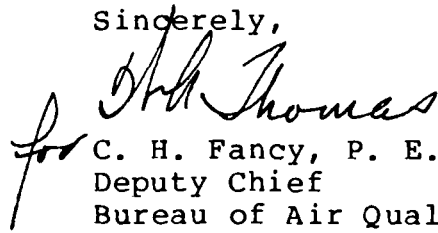  
for C. H. Fancy, P. E.  
Deputy Chief  
Bureau of Air Quality  
Management

CHF/TH/s

cc: David A. Buff, Environmental Science and Engineering  
Charles Collins, DER St. Johns River District



DER

SEP 9 1983

BAQM

AIR CONSTRUCTION PERMIT  
APPLICATION AND PSD REPORT  
KISSIMMEE UTILITIES  
49.9 MW COMBINED CYCLE UNIT

Prepared for:

KISSIMMEE UTILITIES  
Kissimmee, Florida

Prepared by:

ENVIRONMENTAL SCIENCE AND ENGINEERING, INC.  
Gainesville, Florida 32602

ESE No. 81-613-200

August 1983

TABLE OF CONTENTS

## SECTION I AIR CONSTRUCTION PERMIT APPLICATION

	<u>Page</u>
DER Form 17-1.202(1), Application to Operate/Construct Air Pollution Sources	1
PERMIT ATTACHMENTS	
A. SOURCE DESCRIPTION	A-1
Figure A-1 General Location (Vicinity Map)	A-1
Figure A-2 Location Map	A-2
Figure A-3 Plot Plan	A-3
Figure A-4 Schematic Diagram	A-4
B. EMISSION CALCULATIONS	B-1
C. CONTROL TECHNOLOGY	C-1
D. PREVIOUS EPA BACT DETERMINATIONS	D-1

## SECTION II PSD REPORT

1.0 <u>INTRODUCTION</u>	1
2.0 <u>SOURCE IMPACT ANALYSIS</u>	2
2.1 EMISSIONS INVENTORY	2
2.2 DISPERSION MODELING AND METEOROLOGY	2
2.3 AIR QUALITY IMPACTS	3
2.4 INCREMENTAL IMPACTS	4
3.0 <u>ADDITIONAL IMPACTS</u>	5
3.1 IMPACTS ON SOILS AND VEGETATION	5
3.2 VISIBILITY IMPACTS	6

REFERENCES

LIST OF TABLES IN PSD REPORT

<u>Table</u>		<u>Page</u>
1	Permitted Point Sources by County	7
2	Air Quality Impacts	13
3	Source Interactions	14
4	National and State of Florida AAQS	15
5	Significant Emission Rates and <u>De Minimis</u> Air Quality Impact Levels	16
6	Federal and State of Florida PSD Allowable Increments	17



Addendum to Air Construction Permit Application and PSD  
Report

Kissimmee Utilities Combined Cycle Unit

This addendum explains changes which have been made in the permit application since the original application was submitted to DER in August 1981. Additional information provided with this application is also discussed. The purpose of this addendum is to enhance understanding of the new revised application, and therefore facilitate the review process. Changes/additions are discussed in order as they appear in the document.

1. In Section III.C. of the application, pollutant emission rates for particulate matter (PM), nitrogen oxides (NO<sub>x</sub>), and carbon monoxide (CO) have changed. These changes are documented in Attachment B of the application. In the case of CO and PM when firing oil in the gas turbine, manufacturers emission data were used since those estimates were greater than AP42 emission factors. In addition, revised AP42 factors for Volatile Organic Compound (VOC) emissions when burning natural gas and fuel oil in the Heat Recovery Steam Generator (HRSG), for CO emissions when burning natural gas in the HRSG, and for PM emissions when burning natural gas in the HRSG, have been incorporated into the calculations. For NO<sub>x</sub>, emissions are based upon the NSPS limit of 129 ppm NO<sub>x</sub> in the turbine exhaust gas stream. This results in a substantial decrease in NO<sub>x</sub> emissions compared to the previous application. For PM and CO, the revised emission factors result in an increase in maximum hourly emissions for these pollutants.

2. In Section III.H., stack parameters are shown for both the main stack and the turbine bypass stack. The bypass stack would be used only when the HRSG units are not in operation. Under these conditions, the exhaust gases are at a much higher temperature (about 1000<sup>o</sup>F), and at a much larger flow rate. It is also noted that the stack height of the main stack is increased from 30 feet to 60 feet and the stack diameter has increased from 8 feet to 12 feet. Since the model results shown in Attachment D of the application where based upon a 30 foot stack height, those results are conservative. Maximum air quality impacts are not expected when using the bypass stack, because the much larger flow rate and exhaust gas temperature under these conditions will result in much greater plume rise.

3. In Attachment A of the application, a plot plan for the new combined cycle unit is shown.

4. In Attachment B, the estimated exhaust gas flow of the turbine only at 15 percent oxygen is shown in DSCFM. These flows for gas firing and oil firing were used with the 129 ppm NSPS emission rate in order to calculate NO<sub>x</sub> emission due to turbine operation only. The table of annual emissions in Attachment D has been expanded to show the contributions of the gas turbine and the HRSG supplemental firing to the total estimated emissions.

5. In Attachment C, Control Technology, a description of the water injection system for the gas turbine has been included.

6. The PSD report has not been revised although emissions of CO and PM have increased compared to the previous application. As shown in Table 2 of the PSD report, PM and CO impacts were minimal from the proposed combined cycle unit. These impacts are not expected to increase significantly based upon the revised emission rates and increased stack height. NOx impacts would decrease since emissions have decreased and stack height has been increased compared to the previous application. Similarly, sulfur dioxide (SO<sub>2</sub>) emissions have not changed but the increased stack height will result in decreased impacts.

7. The emission inventory presented in the PSD report was reviewed for currentness. From this review, two new increment consuming sources were identified; Southern Fruit and Orlando Utilities Commission - Stanton Energy Center. Southern Fruit is located approximately 24 kilometers from Kissimmee Utilities and OUC-Stanton is located approximately 32 kilometers from Kissimmee Utilities. Based upon the methodology presented in the PSD report, these sources would not have been included in the short term modeling analysis. These sources are primarily sulfur dioxide emitters. As shown in Table 2 of the report, short term SO<sub>2</sub> impacts were predicted to be well below air quality standards, therefore no revision of the report was considered necessary.

In addition to the changes in the permit application, some revisions to the conditions contained in the expired construction permit are requested. Specific Condition 2 of the permit states that maximum emissions shall not exceed those listed in Table 2 of the Preliminary Determination. For NOx, a fixed emission limit for the gas turbine and boiler combined of 250 lbs per hour is specified. In reality, actual mass emissions from the turbine may vary depending on the actual heat rate of the unit and the actual exhaust flow rate for the unit during testing. As a result, it is requested that if testing shows that the fixed mass emission limit cannot be met, that the gas turbine exhaust only be tested as an alternative means of demonstrating compliance. This is in the spirit of the Subpart GG NSPS, which only applies to the gas turbine emissions. The NOx emission limit for the gas turbine only would be variable, depending upon the heat rate of the unit, and compliance would be demonstrated by the NSPS formula.

Specific Condition 3 states that the plant be allowed to operate 8,736 hours per year. It is requested that this be revised to read 8,760 hours per year or 365 days per year operation.

Specific Condition 6 states maximum No. 2 fuel oil consumption to be 78 barrels per hour. It is requested that this condition be deleted so that more quantities of No. 2 fuel oil be allowed to be burned when sulfur content is less than 0.8 percent. The only limiting condition on fuel oil consumption should be the SO<sub>2</sub> emission limit of 388 pounds per hour.

Specific Condition 7.h. is not clear on where testing should be conducted in accordance with Subpart GG of the NSPS. Subpart GG only applies to the gas turbine portion of the combined cycle operation. It is suggested that compliance be determined by measuring total mass emissions at the main stack outlet with the heat recovery steam generator system in operation. However, if compliance with the mass emission limitation cannot be demonstrated at the main stack, then compliance can be demonstrated by measuring only the gas turbine exhaust for NOx concentration with comparison to the standard based on the NSPS formula.

AIR CONSTRUCTION PERMIT APPLICATION

DEPARTMENT OF ENVIRONMENTAL REGULATION

ST. JOHNS RIVER DISTRICT



DER

BOB GRAHAM GOVERNOR

VICTORIA J. TSCHINKEL SECRETARY

SEP 9 1983

ALEX SENKEVICH DISTRICT MANAGER

3319 MAGUIRE BOULEVARD SUITE 232 ORLANDO, FLORIDA 32803

BAQM

APPLICATION TO OPERATE/CONSTRUCT AIR POLLUTION SOURCES

SOURCE TYPE: Combustion Turbine [X] New<sup>1</sup> [ ] Existing<sup>1</sup>

APPLICATION TYPE: [X] Construction [ ] Operation [ ] Modification

COMPANY NAME: Kissimmee Utilities COUNTY: Osceola

Identify the specific emission point source(s) addressed in this application (i.e. Lime Kiln No. 4 with Venturi Scrubber; Peaking Unit No. 2, Gas Fired) Combined Cycle Unit #1

SOURCE LOCATION: Street 112 Ruby Street City Kissimmee

UTM: East 17-460.1 North 3129.3

Latitude 28° 17' 20" N Longitude 81° 24' 20" W

APPLICANT NAME AND TITLE: James C. Welsh, Utilities Director

APPLICANT ADDRESS: Post Office Box 1608, Kissimmee, Florida 32741

SECTION I: STATEMENTS BY APPLICANT AND ENGINEER

A. APPLICANT

I am the undersigned owner or authorized representative\* of Kissimmee Utilities

I certify that the statements made in this application for a Construction permit are true, correct and complete to the best of my knowledge and belief. Further, I agree to maintain and operate the pollution control source and pollution control facilities in such a manner as to comply with the provision of Chapter 403, Florida Statutes, and all the rules and regulations of the department and revisions thereof. I also understand that a permit, if granted by the department, will be non-transferable and I will promptly notify the department upon sale or legal transfer of the permitted establishment.

\*Attach letter of authorization

Signed: James C. Welsh
James C. Welsh, Utilities Director
Name and Title (Please Type)

Date: 8/26/83 Telephone No. (305) 847-2821

B. PROFESSIONAL ENGINEER REGISTERED IN FLORIDA (where required by Chapter 471, F.S.)

This is to certify that the engineering features of this pollution control project have been designed/examined by me and found to be in conformity with modern engineering principles applicable to the treatment and disposal of pollutants characterized in the permit application. There is reasonable assurance, in my professional judgment, that

1 See Florida Administrative Code Rule 17-2.100(57) and (104)

the pollution control facilities, when properly maintained and operated, will discharge an effluent that complies with all applicable statutes of the State of Florida and the rules and regulations of the department. It is also agreed that the undersigned will furnish, if authorized by the owner, the applicant a set of instructions for the proper maintenance and operation of the pollution control facilities and, if applicable, pollution sources.


Signed David A. Buff

David A. Buff  
Name (Please Type)

ESE, Inc.  
Company Name (Please Type)

P.O. Box ESE, Gainesville, FL 32602  
Mailing Address (Please Type)

Florida Registration No. 19011 Date: 8-25-83 Telephone No. (904) 372-3318



**SECTION II: GENERAL PROJECT INFORMATION**

A. Describe the nature and extent of the project. Refer to pollution control equipment, and expected improvements in source performance as a result of installation. State whether the project will result in full compliance. Attach additional sheet if necessary.

New 30.9 MW combustion turbine fired with natural gas or No. 2 fuel oil. NO<sub>x</sub> control by water injection. Waste heat used to produce steam to drive two 9.5 MW steam turbines for total net generation of 46.5 MW and a gross generation capacity of 49.9 MW. Supplemental firing of natural gas or No. 2 oil in waste heat boiler to meet steam requirements. (See Attachment A.)

B. Schedule of project covered in this application (Construction Permit Application Only)

Start of Construction September 1981 Completion of Construction December 1983

C. Costs of pollution control system(s): (Note: Show breakdown of estimated costs only for individual components/units of the project serving pollution control purposes. Information on actual costs shall be furnished with the application for operation permit.)

Additional capital cost of water injection system is \$60,000.

D. Indicate any previous DER permits, orders and notices associated with the emission point, including permit issuance and expiration dates.

Not Applicable-- New Source

E. Requested permitted equipment operating time: hrs/day 24 ; days/wk 7 ; wks/yr 52 ;  
if power plant, hrs/yr 8,760, if seasonal, describe: \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

F. If this is a new source or major modification, answer the following questions.  
(Yes or No)

1. Is this source in a non-attainment area for a particular pollutant? No
    - a. If yes, has "offset" been applied? \_\_\_\_\_
    - b. If yes, has "Lowest Achievable Emission Rate" been applied? \_\_\_\_\_
    - c. If yes, list non-attainment pollutants. \_\_\_\_\_
  2. Does best available control technology (BACT) apply to this source?  
If yes, see Section VI. Yes
  3. Does the State "Prevention of Significant Deterioration" (PSD)  
requirement apply to this source? If yes, see Sections VI and VII. Yes
  4. Do "Standards of Performance for New Stationary Sources" (NSPS)  
apply to this source? Yes
  5. Do "National Emission Standards for Hazardous Air Pollutants"  
(NESHAP) apply to this source? No
- Do "Reasonably Available Control Technology" (RACT) requirements apply  
to this source? No
- a. If yes, for what pollutants? \_\_\_\_\_
  - b. If yes, in addition to the information required in this form,  
any information requested in Rule 17-2.650 must be submitted.

Attach all supportive information related to any answer of "Yes". Attach any justifi-  
cation for any answer of "No" that might be considered questionable.

**SECTION III: AIR POLLUTION SOURCES & CONTROL DEVICES (Other than Incinerators)**

A. Raw Materials and Chemicals Used in your Process, if applicable: NA

Description	Contaminants		Utilization Rate - lbs/hr	Relate to Flow Diagram
	Type	% Wt		

B. Process Rate, if applicable: (See Section V, Item 1) NA

1. Total Process Input Rate (lbs/hr): \_\_\_\_\_

2. Product Weight (lbs/hr): \_\_\_\_\_

C. Airborne Contaminants Emitted: (Information in this table must be submitted for each emission point, use additional sheets as necessary) See Attachment B

Name of Contaminant	Emission <sup>1</sup>		Allowed Emission Rate per Rule 17-2	Allowable <sup>3</sup> Emission lbs/hr	Potential <sup>4</sup> Emission		Relate to Flow Diagram
	Maximum lbs/hr	Actual T/yr			lbs/hr	T/yr	
SO <sub>2</sub>	388	21	NA	NA	388	1,702	Attach. A
PM	22	28	NA	NA	22	96	
NO <sub>x</sub>	235	1,004	NA	NA	446	1,954	
HC (as CH <sub>4</sub> )	19	83	NA	NA	19	83	
CO	80	231	NA	NA	80	349	

<sup>1</sup>See Section V, Item 2.

<sup>2</sup>Reference applicable emission standards and units (e.g. Rule 17-2.600(5)(b)2. Table II, E. (1) - 0.1 pounds per million BTU heat input)

<sup>3</sup>Calculated from operating rate and applicable standard.

<sup>4</sup>Emission, if source operated without control (See Section V, Item 3).



D. Control Devices: (See Section V, Item 4)

Name and Type (Model & Serial No.)	Contaminant	Efficiency	Range of Particles Size Collected (in microns) (If applicable)	Basis for Efficiency (Section V Item 5)
Water Injection	NO <sub>x</sub>	48%	NA	Attach. C

E. Fuels

Type (Be Specific)	Consumption*		Maximum Heat Input (MMBTU/hr)
	avg/hr	max./hr	
No. 2 Fuel Oil	78	78	441.7
Natural Gas	0.491	0.491	441.7

\*Units: Natural Gas--MMCF/hr; Fuel Oils--gallons/hr; Coal, wood, refuse, other--lbs/hr.

Fuel Analysis: Fuel Oil

Percent Sulfur: 0.8 maximum Percent Ash: <.01

Density: 7.4 lbs/gal Typical Percent Nitrogen: <.25

Heat Capacity: 19,350 BTU/lb 143,200 BTU/gal

Other Fuel Contaminants (which may cause air pollution): \_\_\_\_\_

F. If applicable, indicate the percent of fuel used for space heating.

Annual Average NA Maximum \_\_\_\_\_

G. Indicate liquid or solid wastes generated and method of disposal.

Boiler blowdown will be directed to city waste water treatment facility

H. Emission Stack Geometry and Flow Characteristics (Provide data for each stack):

Stack Height: 60.0/33.1 ft. Stack Diameter: 12.0/18.9 x 10.25 ft. Main Stack/By pass stack  
 Gas Flow Rate: 377,000/686,000 ACFM 238,000/225,000 DSCFM Gas Exit Temperature: 300/950-1000 °F.  
 Water Vapor Content: 5 to 8 by vol. % Velocity: 56/59 FPS

SECTION IV: INCINERATOR INFORMATION

NA

Type of Waste	Type 0 (Plastics)	Type I (Rubbish)	Type II (Refuse)	Type III (Garbage)	Type IV (Pathological)	Type V (Liq. & Gas By-prod.)	Type VI (Solid By-prod.)
Actual lb/hr Incinerated							
Uncontrolled (lbs/hr)							

Description of Waste \_\_\_\_\_

Total Weight Incinerated (lbs/hr) \_\_\_\_\_ Design Capacity (lbs/hr) \_\_\_\_\_

Approximate Number of Hours of Operation per day \_\_\_\_\_ day/wk \_\_\_\_\_ wks/yr. \_\_\_\_\_

Manufacturer \_\_\_\_\_

Date Constructed \_\_\_\_\_ Model No. \_\_\_\_\_

	Volume (ft) <sup>3</sup>	Heat Release (BTU/hr)	Fuel		Temperature (°F)
			Type	BTU/hr	
Primary Chamber					
Secondary Chamber					

Stack Height: \_\_\_\_\_ ft. Stack Diameter: \_\_\_\_\_ Stack Temp. \_\_\_\_\_

Gas Flow Rate: \_\_\_\_\_ ACFM \_\_\_\_\_ DSCFM\* Velocity: \_\_\_\_\_ FPS

\*If 50 or more tons per day design capacity, submit the emissions rate in grains per standard cubic foot dry gas corrected to 50% excess air.

Type of pollution control device:  Cyclone  Wet Scrubber  Afterburner

Other (specify) \_\_\_\_\_

Brief description of operating characteristics of control devices: \_\_\_\_\_

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

Ultimate disposal of any effluent other than that emitted from the stack (scrubber water, ash, etc.):

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

NOTE: Items 2, 3, 4, 6, 7, 8, and 10 in Section V must be included where applicable.

**SECTION V: SUPPLEMENTAL REQUIREMENTS**

Please provide the following supplements where required for this application.

1. Total process input rate and product weight -- show derivation [Rule 17-2.100(127)] Attachment B
2. To a construction application, attach basis of emission estimate (e.g., design calculations, design drawings, pertinent manufacturer's test data, etc.) and attach proposed methods (e.g., FR Part 60 Methods 1, 2, 3, 4, 5) to show proof of compliance with applicable standards. To an operation application, attach test results or methods used to show proof of compliance. Information provided when applying for an operation permit from a construction permit shall be indicative of the time at which the test was made. Attachments B and C
3. Attach basis of potential discharge (e.g., emission factor, that is, AP42 test). Attachment B
4. With construction permit application, include design details for all air pollution control systems (e.g., for baghouse include cloth to air ratio; for scrubber include cross-section sketch, design pressure drop, etc.) Attachment C
5. With construction permit application, attach derivation of control device(s) efficiency. Include test or design data. Items 2, 3 and 5 should be consistent: actual emissions = potential (1-efficiency). Attachment C
6. An 8 1/2" x 11" flow diagram which will, without revealing trade secrets, identify the individual operations and/or processes. Indicate where raw materials enter, where solid and liquid waste exit, where gaseous emissions and/or airborne particles are evolved and where finished products are obtained. Attachment A
7. An 8 1/2" x 11" plot plan showing the location of the establishment, and points of airborne emissions, in relation to the surrounding area, residences and other permanent structures and roadways (Example: Copy of relevant portion of USGS topographic map). Attachment A
8. An 8 1/2" x 11" plot plan of facility showing the location of manufacturing processes and outlets for airborne emissions. Relate all flows to the flow diagram. Attachment A

9. The appropriate application fee in accordance with Rule 17-4.05. The check should be made payable to the Department of Environmental Regulation.
10. With an application for operation permit, attach a Certificate of Completion of Construction indicating that the source was constructed as shown in the construction permit.

**SECTION VI: BEST AVAILABLE CONTROL TECHNOLOGY**

- A. Are standards of performance for new stationary sources pursuant to 40 C.F.R. Part 60 applicable to the source?

Yes [ ] No

Contaminant	Rate or Concentration
Nitrogen Oxides	$\% \text{ by vol} = 0.0075 (14.4/Y) + F$
	$Y = \text{heat rate at peak load (kj/watt-hr)}$
	$F = \text{fuel-bound nitrogen allowance}$
Sulfur Dioxide	150 ppm or less than 0.8% sulfur fuel by weight

- B. Has EPA declared the best available control technology for this class of sources (If yes, attach copy)

Yes [ ] No

Contaminant	Rate or Concentration
Nitrogen Oxides	See Attachment D
Sulfur Dioxide	See Attachment D

- C. What emission levels do you propose as best available control technology?

Contaminant	Rate or Concentration
Nitrogen Oxides	NSPS: $\% \text{ by volume} = 0.0075 (14.4Y) + F$
Sulfur Dioxide	0.8% max fuel sulfur content by weight

- D. Describe the existing control and treatment technology (if any). Nitrogen Oxides (see Item B)

- |                           |                          |
|---------------------------|--------------------------|
| 1. Control Device/System: | 2. Operating Principles: |
| 3. Efficiency:*           | 4. Capital Costs:        |

\*Explain method of determining

5. Useful Life:

6. Operating Costs:

7. Energy:

8. Maintenance Cost:

9. Emissions:

Contaminant

Rate or Concentration

Contaminant	Rate or Concentration

10. Stack Parameters

Nitrogen Oxides

- a. Height: ft.
- b. Diameter: ft.
- c. Flow Rate: ACFM
- d. Temperature: °F.
- e. Velocity: FPS

E. Describe the control and treatment technology available (As many types as applicable, use additional pages if necessary).

1.

- a. Control Device: Water injection
- b. Operating Principles: Lower combustion temperature
- c. Efficiency:<sup>1</sup> 48%
- d. Capital Cost: \$60,000.
- e. Useful Life: 30 years
- f. Operating Cost: Additional fuel at 18.1 x 10<sup>6</sup> Btu/hr
- g. Energy:<sup>2</sup> Increases heat rate by 140 Btu/KWH
- h. Maintenance Cost: No additional maintenance costs.
- i. Availability of construction materials and process chemicals: Can be purchased as package with turbine unit.
- j. Applicability to manufacturing processes: Specifically designed for package unit.
- k. Ability to construct with control device, install in available space, and operate within proposed levels: Available as package from turbine manufacturer.
- 2. Ability to meet emission levels documented in Attachment C.

- a. Control Device:
- b. Operating Principles:
- c. Efficiency:<sup>1</sup>
- d. Capital Cost:
- e. Useful Life:
- f. Operating Cost:
- g. Energy:<sup>2</sup>
- h. Maintenance Cost:
- i. Availability of construction materials and process chemicals:

<sup>1</sup>Explain method of determining efficiency. See Attachment C

<sup>2</sup>Energy to be reported in units of electrical power - KWH design rate.

j. Applicability to manufacturing processes:

k. Ability to construct with control device, install in available space, and operate within proposed levels:

3.

a. Control Device:

b. Operating Principles:

c. Efficiency:<sup>1</sup>

d. Capital Cost:

e. Useful Life:

f. Operating Cost:

g. Energy:<sup>2</sup>

h. Maintenance Cost:

i. Availability of construction materials and process chemicals:

j. Applicability to manufacturing processes:

k. Ability to construct with control device, install in available space, and operate within proposed levels:

4.

a. Control Device:

b. Operating Principles:

c. Efficiency:<sup>1</sup>

d. Capital Costs:

e. Useful Life:

f. Operating Cost:

g. Energy:<sup>2</sup>

h. Maintenance Cost:

i. Availability of construction materials and process chemicals:

j. Applicability to manufacturing processes:

k. Ability to construct with control device, install in available space, and operate within proposed levels:

F. Describe the control technology selected:

1. Control Device: Water injection (see Item E)

2. Efficiency:<sup>1</sup>

3. Capital Cost:

4. Useful Life:

5. Operating Cost:

6. Energy:<sup>2</sup>

7. Maintenance Cost:

8. Manufacturer:

9. Other locations where employed on similar processes: See Attachment D.

a. (1) Company:

(2) Mailing Address:

(3) City:

(4) State:

<sup>1</sup>Explain method of determining efficiency. See Attachment C.

<sup>2</sup>Energy to be reported in units of electrical power - KWH design rate.

Nitrogen Oxides

(5) Environmental Manager:

(6) Telephone No.:

(7) Emissions:<sup>1</sup>

Contaminant

Rate or Concentration

Contaminant	Rate or Concentration

(8) Process Rate:<sup>1</sup>

b. (1) Company:

(2) Mailing Address:

(3) City:

(4) State:

(5) Environmental Manager:

(6) Telephone No.:

(7) Emissions:<sup>1</sup>

Contaminant

Rate or Concentration

Contaminant	Rate or Concentration

(8) Process Rate:<sup>1</sup>

10. Reason for selection and description of systems: Add-on NO<sub>x</sub> controls are currently in the experimental phase. The proposed water injection rate will reduce NO<sub>x</sub> emissions by 48 percent and will meet NSPS without significantly reducing thermal efficiency. Impacts from the new source are predicted to be insignificant, less than 1 ug/m<sup>3</sup> on an annual average. Therefore, further reduction in NO<sub>x</sub> emissions is not justified.

**SECTION VII - PREVENTION OF SIGNIFICANT DETERIORATION**

**A. Company Monitored Data**

1. \_\_\_\_\_ no. sites \_\_\_\_\_ TSP \_\_\_\_\_ ( ) SO<sub>2</sub>\* \_\_\_\_\_ Wind spd/dir

Period of Monitoring \_\_\_\_\_ / \_\_\_\_\_ / \_\_\_\_\_ to \_\_\_\_\_ / \_\_\_\_\_ / \_\_\_\_\_  
month      day      year                      month      day      year

Other data recorded \_\_\_\_\_

Attach all data or statistical summaries to this application.

\*Specify bubbler (B) or continuous (C).

<sup>1</sup>Applicant must provide this information when available. Should this information not be available, applicant must state the reason(s) why.

Sulfur Dioxide

- 5. Useful Life:
- 6. Operating Costs:
- 7. Energy:
- 8. Maintenance Cost:
- 9. Emissions:

Contaminant	Rate or Concentration

10. Stack Parameters

- a. Height: ft.
- b. Diameter: ft.
- c. Flow Rate: ACFM
- d. Temperature: °F.
- e. Velocity: FPS

E. Describe the control and treatment technology available (As many types as applicable, use additional pages if necessary).

1.

- a. Control Device: Wet scrubber
- b. Operating Principles: SO<sub>2</sub> is absorbed by alkaline solution. Sludge is separated and
- c. Efficiency:<sup>1</sup> 90% +
- d. Capital Cost: \$4 million treated for disposal.
- e. Useful Life: 5 to 10 years
- f. Operating Cost: Annualized cost approx. \$2.5 million
- g. Energy:<sup>2</sup> 2,500 kw
- h. Maintenance Cost:
- i. Availability of construction materials and process chemicals: Assumed Available.
- j. Applicability to manufacturing processes: Has not been applied to combustion turbines.
- k. Ability to construct with control device, install in available space, and operate within proposed levels: Assumed adequate.

2.

- a. Control Device: low sulfur fuel
- b. Operating Principles: Lower sulfur fuel replaces higher sulfur fuel
- c. Efficiency:<sup>1</sup> Variable
- d. Capital Cost: NA
- e. Useful Life: NA
- f. Operating Cost: Price differential over high sulfur fuel approx. \$6-8/bbl
- g. Energy:<sup>2</sup> NA
- h. Maintenance Cost: NA
- i. Availability of construction materials and process chemicals: Currently available at premium.

<sup>1</sup>Explain method of determining efficiency. Published literature.

<sup>2</sup>Energy to be reported in units of electrical power - KWH design rate.



Sulfur Dioxide

- j. Applicability to manufacturing processes: Widely applied.
- k. Ability to construct with control device, install in available space, and operate within proposed levels: Adequate.

3.

- a. Control Device:
- b. Operating Principles:
- c. Efficiency:<sup>1</sup>
- d. Capital Cost:
- e. Useful Life:
- f. Operating Cost:
- g. Energy:<sup>2</sup>
- h. Maintenance Cost:
- i. Availability of construction materials and process chemicals:
- j. Applicability to manufacturing processes:
- k. Ability to construct with control device, install in available space, and operate within proposed levels:

4.

- a. Control Device:
- b. Operating Principles:
- c. Efficiency:<sup>1</sup>
- d. Capital Costs:
- e. Useful Life:
- f. Operating Cost:
- g. Energy:<sup>2</sup>
- h. Maintenance Cost:
- i. Availability of construction materials and process chemicals:
- j. Applicability to manufacturing processes:
- k. Ability to construct with control device, install in available space, and operate within proposed levels:

F. Describe the control technology selected: Maximum sulfur content of fuel oil = 0.8%

- 1. Control Device: Low sulfur fuel
- 2. Efficiency:<sup>1</sup> Variable
- 3. Capital Cost: NA
- 4. Useful Life: NA
- 5. Operating Cost: Price differential between low and high sulfur fuel approx. 36-8/bbl
- 6. Energy:<sup>2</sup> NA
- 7. Maintenance Cost: NA
- 8. Manufacturer: NA
- 9. Other locations where employed on similar processes: See Attachment D.
- a. (1) Company:
- (2) Mailing Address:
- (3) City:
- (4) State:

<sup>1</sup>Explain method of determining efficiency.

<sup>2</sup>Energy to be reported in units of electrical power - KWH design rate.

Sulfur Dioxide

(5) Environmental Manager:

(6) Telephone No.:

(7) Emissions:<sup>1</sup>

Contaminant

Rate or Concentration

Contaminant	Rate or Concentration

(8) Process Rate:<sup>1</sup>

b. (1) Company:

(2) Mailing Address:

(3) City:

(4) State:

(5) Environmental Manager:

(6) Telephone No.:

(7) Emissions:<sup>1</sup>

Contaminant

Rate or Concentration

Contaminant	Rate or Concentration

(8) Process Rate:<sup>1</sup>

10. Reason for selection and description of systems: The primary fuel will be natural gas and actual emissions are expected to be approximately 21 ton/year. When fuel oil is burned, ground level impacts are expected to be below de minimis levels. The additional capital and operating costs for an add-on scrubber system are not justified from the standpoint of improving air quality or reducing emissions on a long-term basis. The BACT chosen for this facility is low-sulfur fuel (0.8% max). Lower sulfur fuel is not justified since fuel oil burned will be minimized and environmental impacts at 0.8% sulfur fuel are not significant. Economic penalty would also be incurred with burning of lower sulfur fuel.

SECTION VII - PREVENTION OF SIGNIFICANT DETERIORATION

A. Company Monitored Data NA

1. \_\_\_\_\_ no. sites \_\_\_\_\_ TSP \_\_\_\_\_ ( ) SO<sub>2</sub>\* \_\_\_\_\_ Wind spd/dir

Period of Monitoring \_\_\_\_\_ / \_\_\_\_\_ / \_\_\_\_\_ to \_\_\_\_\_ / \_\_\_\_\_ / \_\_\_\_\_  
month day year month day year

Other data recorded No monitoring data available in vicinity of site

Attach all data or statistical summaries to this application.

\*Specify bubbler (B) or continuous (C).

DER Form 17-1.202(1)

Effective November 30, 1982

Page 11 of 12

<sup>1</sup>Applicant must provide this information when available. Should this information not be available, applicant must state the reason(s) why.

2. Instrumentation, Field and Laboratory NA

- a. Was instrumentation EPA referenced or its equivalent? [ ] Yes [ ] No
- b. Was instrumentation calibrated in accordance with Department procedures?  
[ ] Yes [ ] No [ ] Unknown

B. Meteorological Data Used for Air Quality Modeling

1. 5 Year(s) of data from 01 / 01 / 74 to 12 / 31 / 78  
month day year month day year
2. Surface data obtained from (location) Orlando
3. Upper air (mixing height) data obtained from (location) Tampa
4. Stability wind rose (STAR) data obtained from (location) Orlando

C. Computer Models Used

1. CRSTER Modified? If yes, attach description.
2. ISCST Modified? If yes, attach description.
3. ISCLT Modified? If yes, attach description.
4. \_\_\_\_\_ Modified? If yes, attach description.

Attach copies of all final model runs showing input data, receptor locations, and principle output tables.

D. Applicants Maximum Allowable Emission Data

Pollutant	Emission Rate	
TSP	<u>1.98</u>	grams/sec
SO <sup>2</sup>	<u>48.9</u>	grams/sec

E. Emission Data Used in Modeling Attached PSD analysis

Attach list of emission sources. Emission data required is source name, description of point source (on NEDS point number), UTM coordinates, stack data, allowable emissions, and normal operating time.

F. Attach all other information supportive to the PSD review. Attached PSD Analysis

- G. Discuss the social and economic impact of the selected technology versus other applicable technologies (i.e., jobs, payroll, production, taxes, energy, etc.). Include assessment of the environmental impact of the sources.  
Proposed project will provide more reliable electrical power to the Kissimmee Utilities service area. Dependence on purchased power will be reduced, possibly offsetting fuel oil consumption at other generating stations owned by Orlando Utilities Commission. The city has projected savings to consumers in excess of \$10 million through 1985.

H. Attach scientific, engineering, and technical material, reports, publications, journals, and other competent relevant information describing the theory and application of the requested best available control technology. Attachment C

(5) Environmental Manager:

(6) Telephone No.:

(7) Emissions\*:

Contaminant	Rate or Concentration
_____	_____
_____	_____
_____	_____

(8) Process Rate\*:

10. Reason for selection and description of systems:


The impacts of TSP, HC, CO, Hg, and Be are all predicted to be below air quality de minimis levels (Table 5 of PSD report) and impacts of TSP, Hg, and Be are below air quality significance levels. The cost of add-on particulate control equipment is not justified by any reduction in environmental impacts.

There are no demonstrated add-on control methods for HC, CO, Hg, or Be emissions from combustion turbines.

BACT proposed for HC and CO is proper combustion technique.


\*Applicant must provide this information when available. Should this information not be available, applicant must state the reason(s) why.

PERMIT ATTACHMENT A  
SOURCE DESCRIPTION

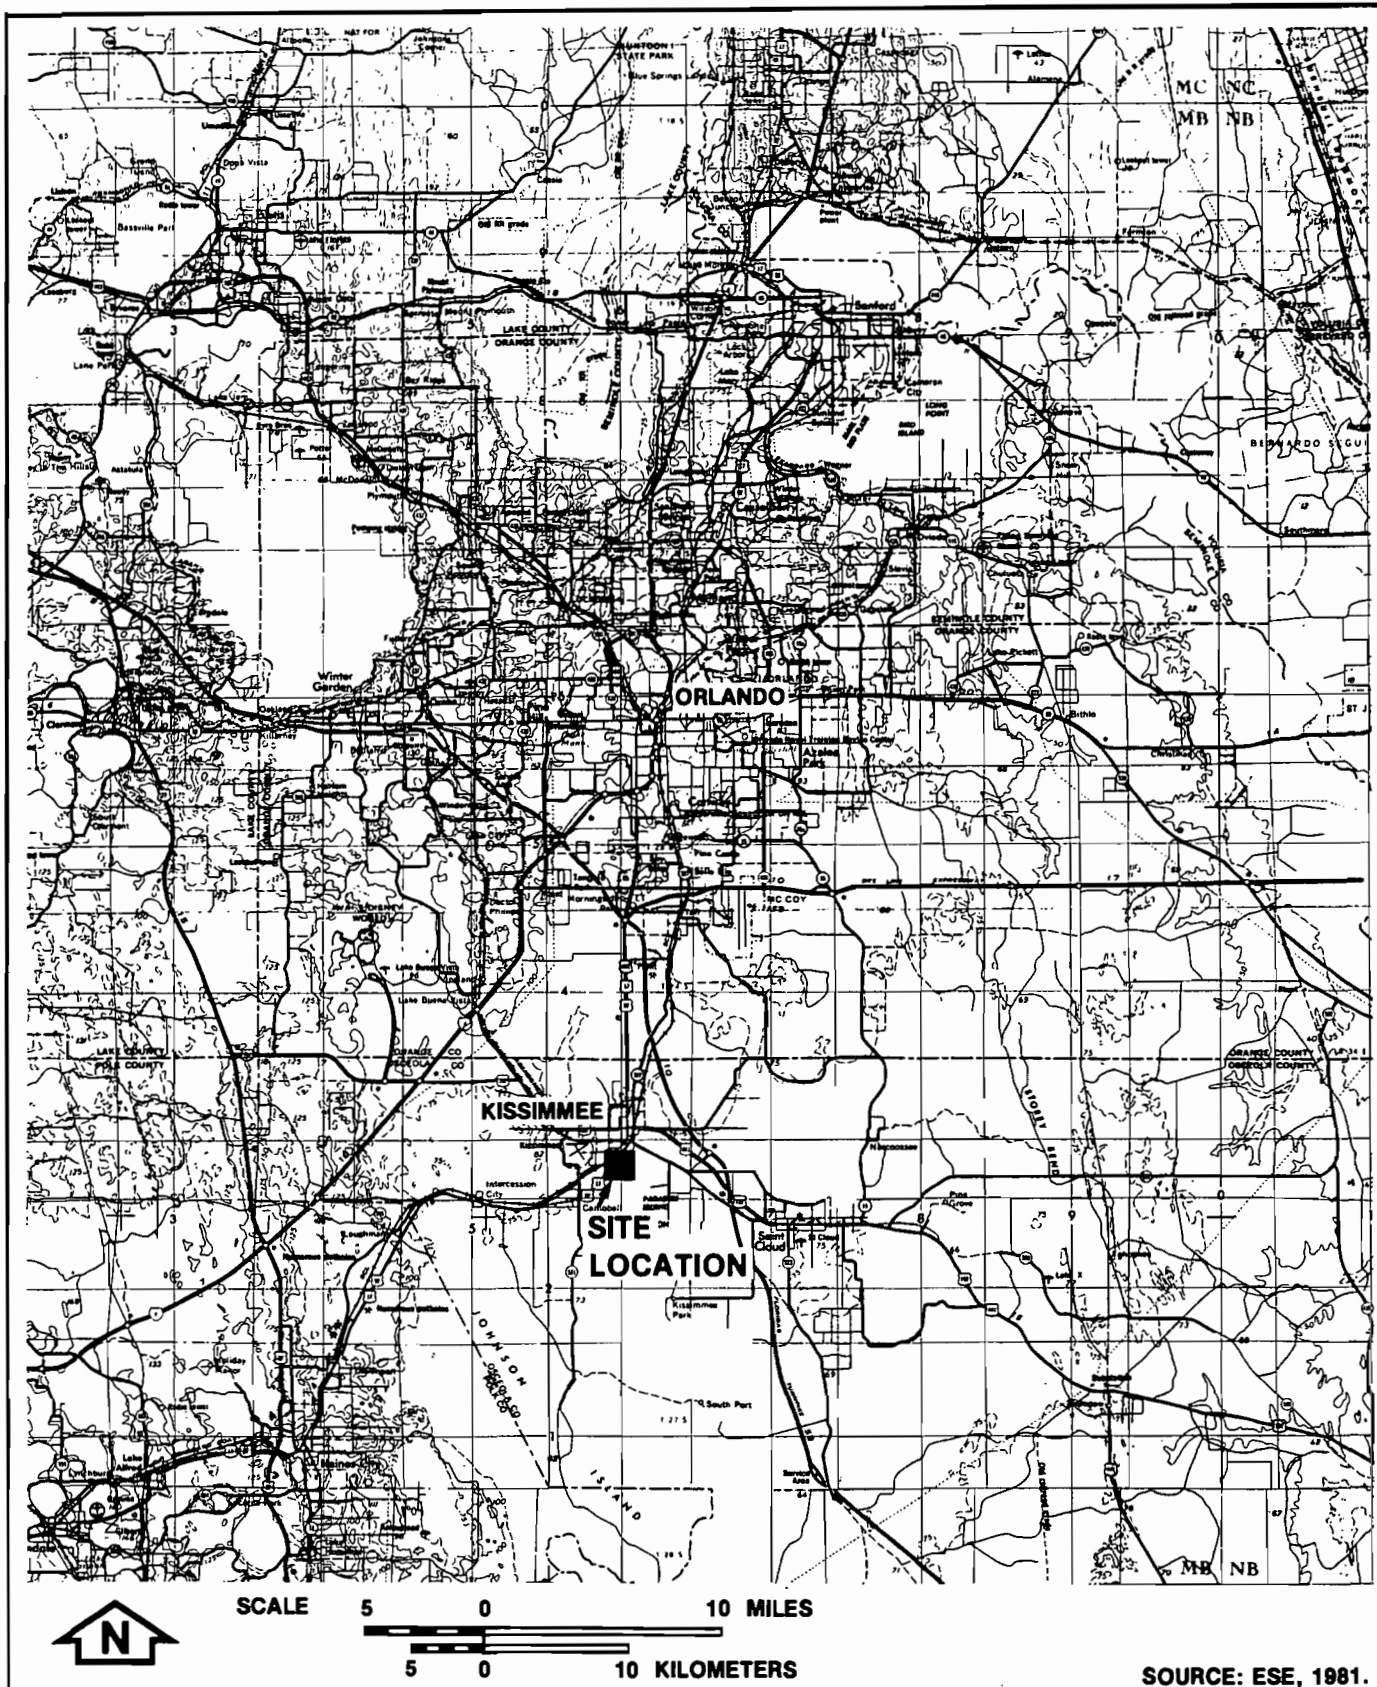


**Figure A-1**  
**CITY OF KISSIMMEE AND SURROUNDING AREA**

**Prepared for:**  
**CITY OF KISSIMMEE**

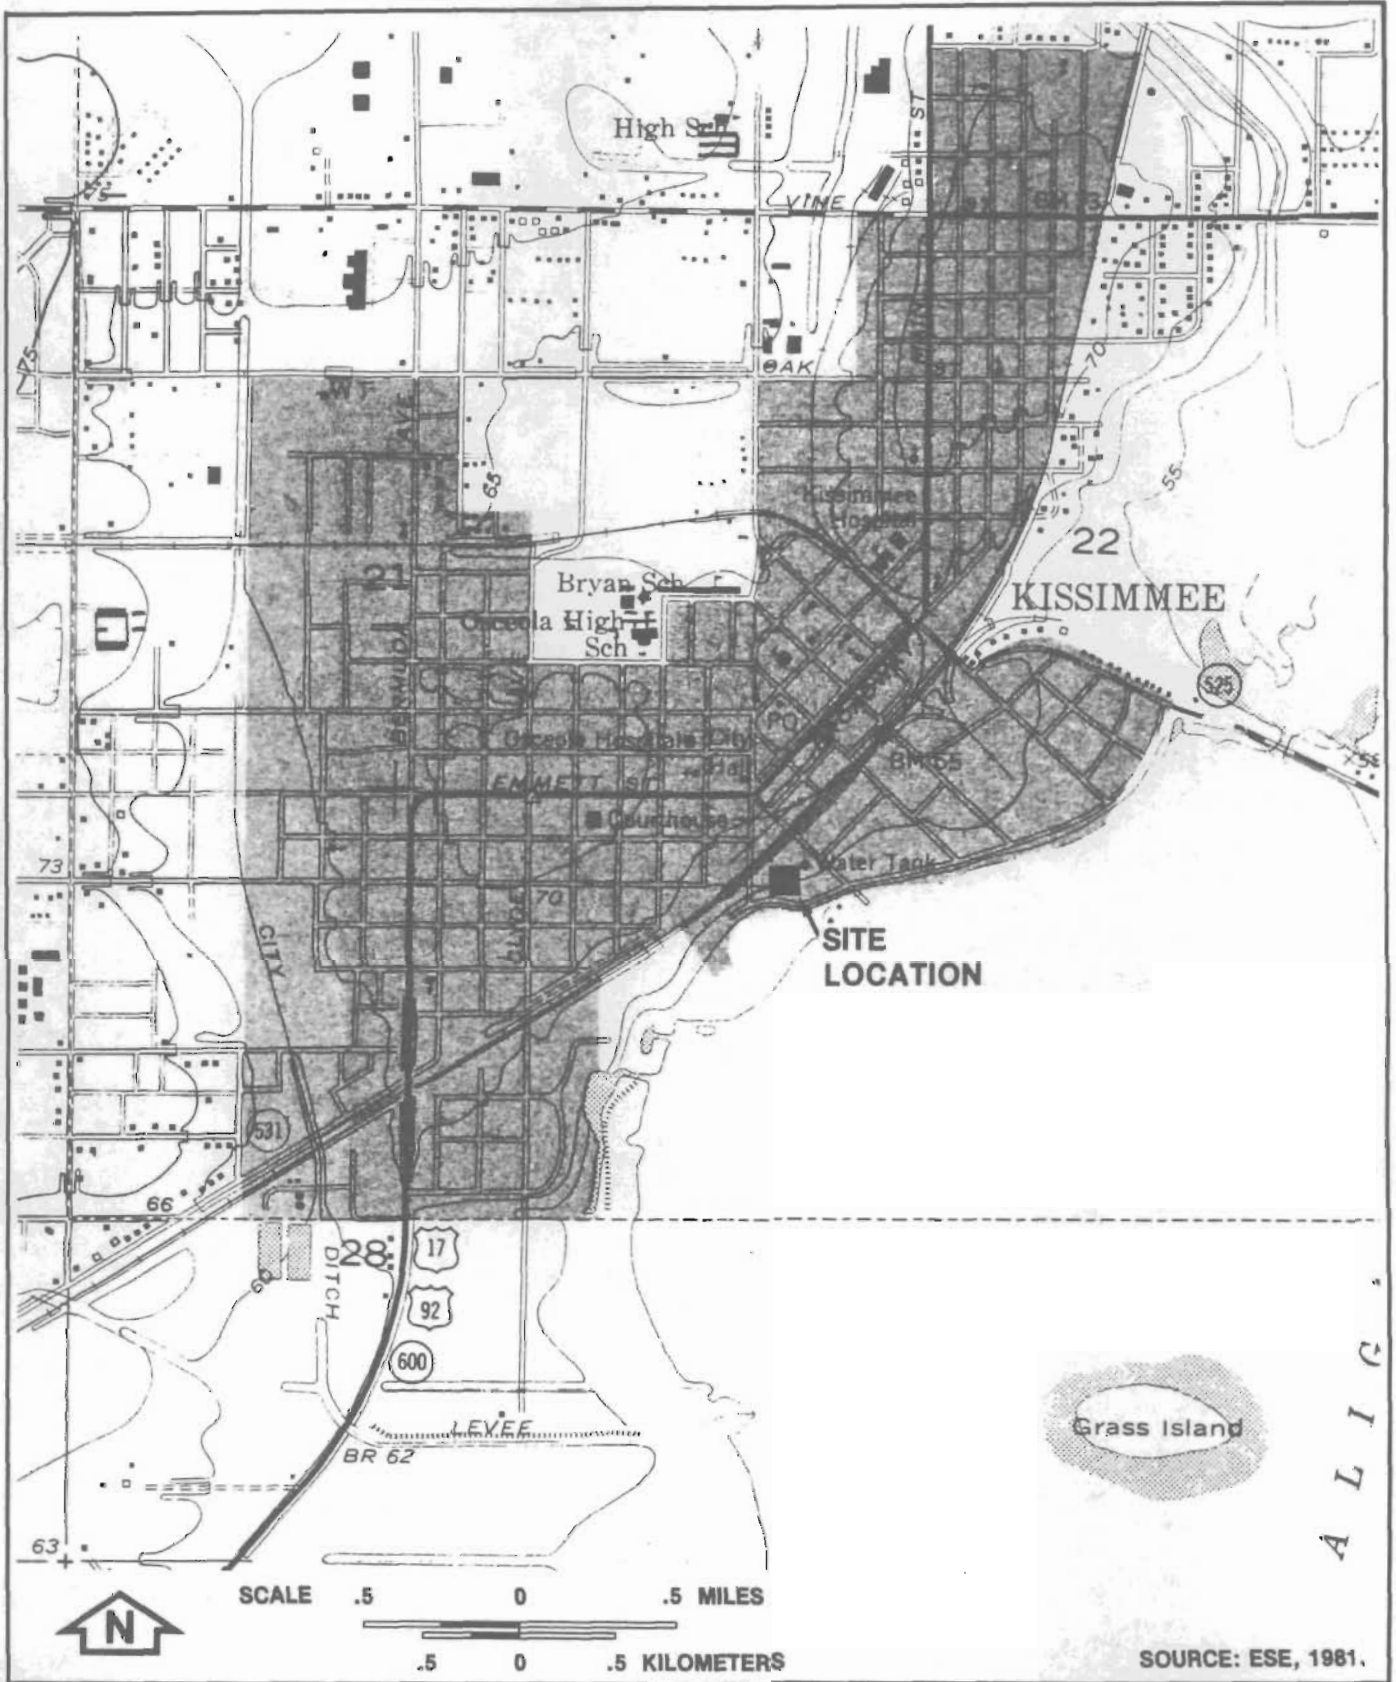

**Figure A-2**  
**LOCATION OF KISSIMMEE UTILITIES**  
**GENERATING STATION**

**Prepared for:**  
**CITY OF KISSIMMEE**

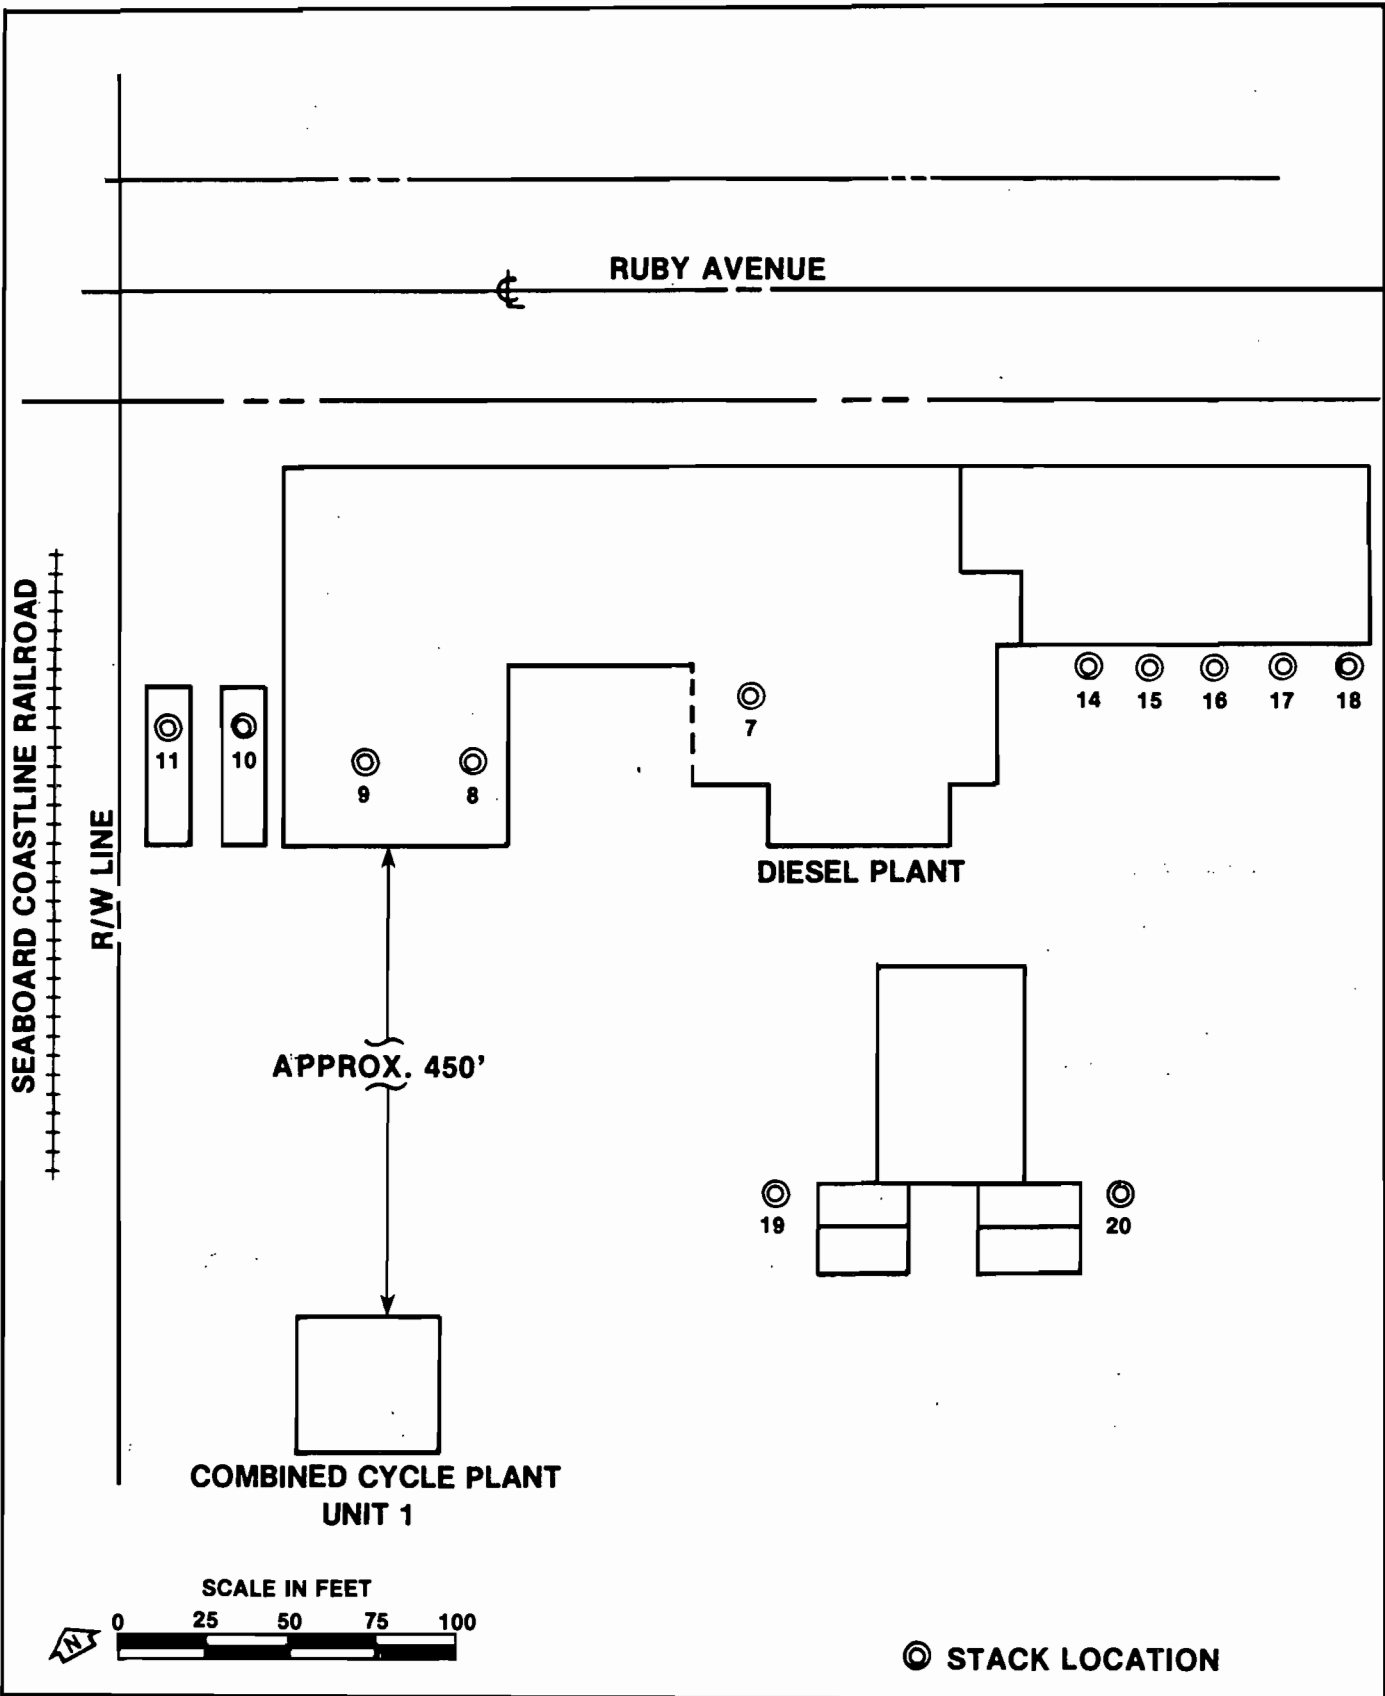

**Figure A-3**  
**PLOT PLAN FOR ROY HANSEL**  
**GENERATING STATION**

SOURCE: KISSIMMEE UTILITIES, 1981.

**Prepared For:**  
**CITY OF KISSIMMEE**



Best Available Copy


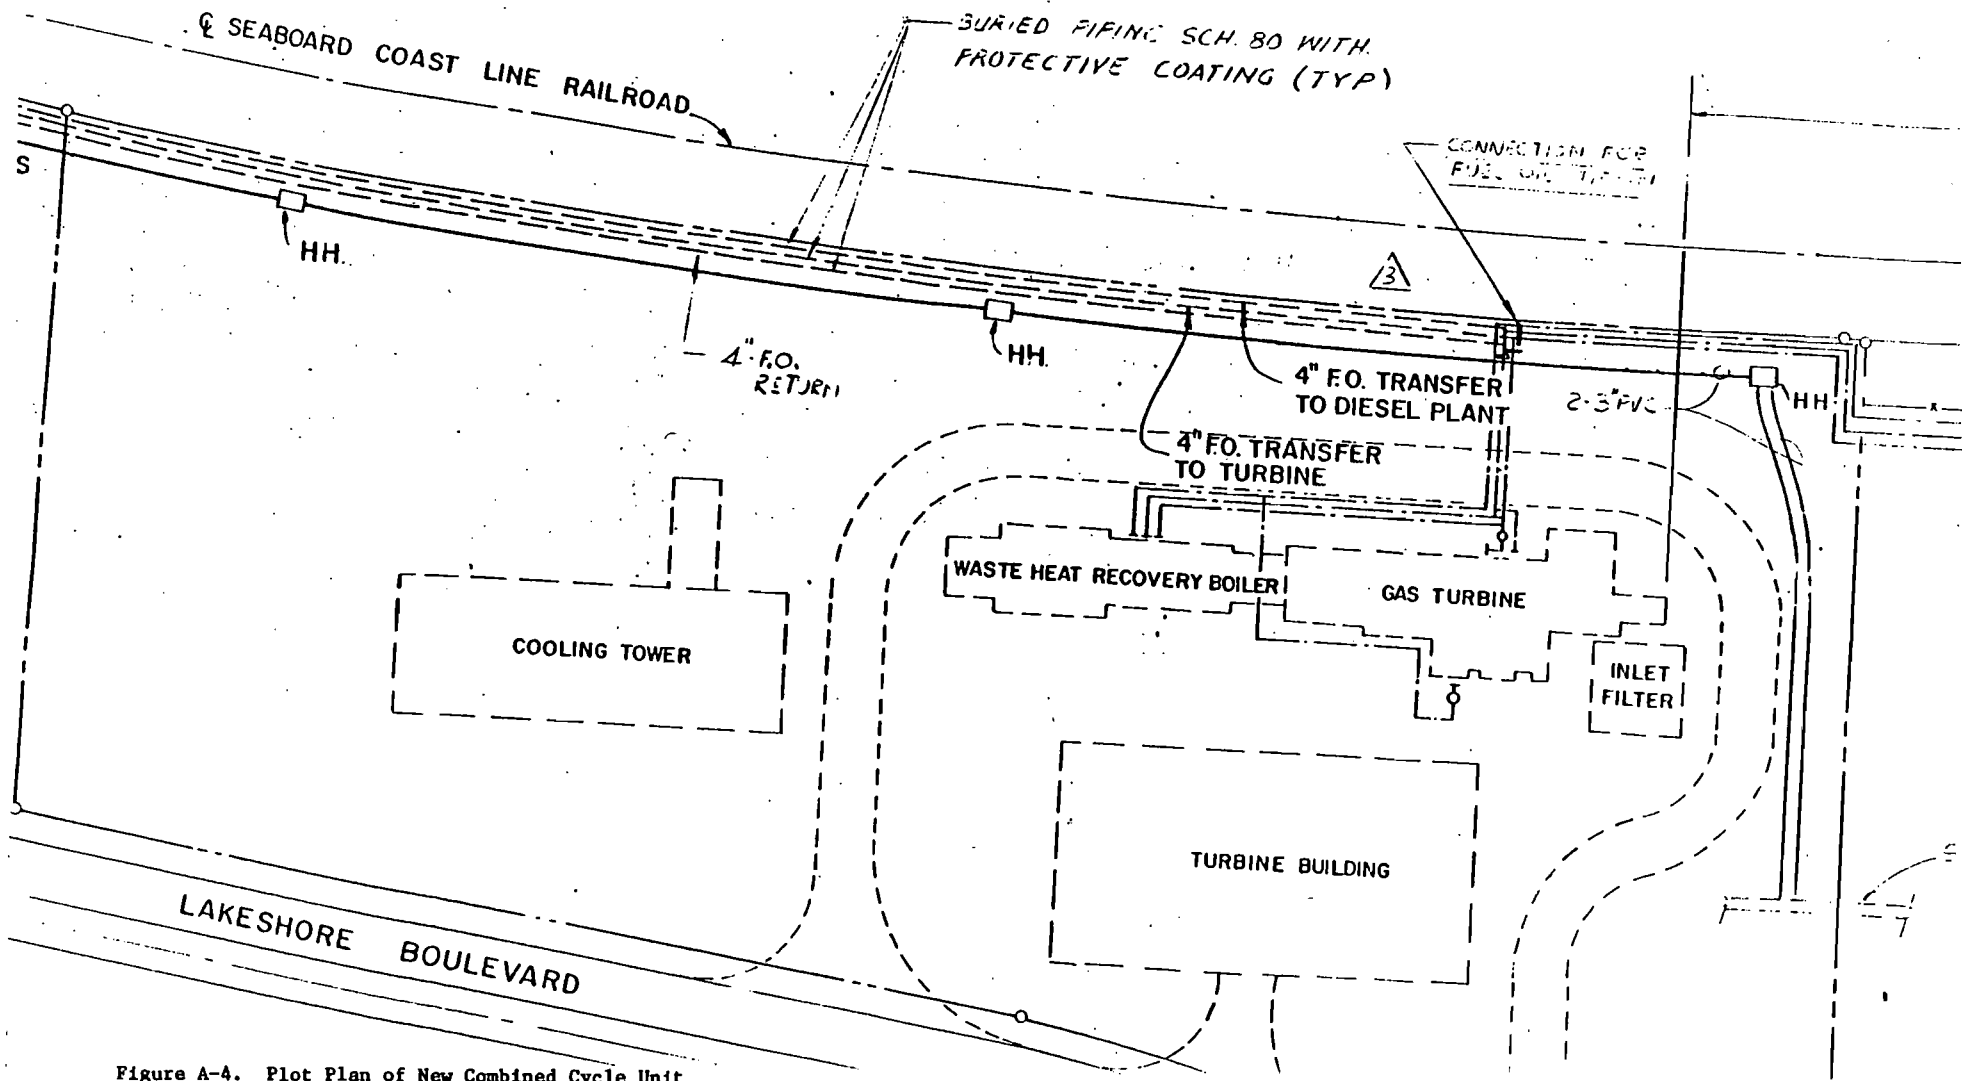


Figure A-4. Plot Plan of New Combined Cycle Unit

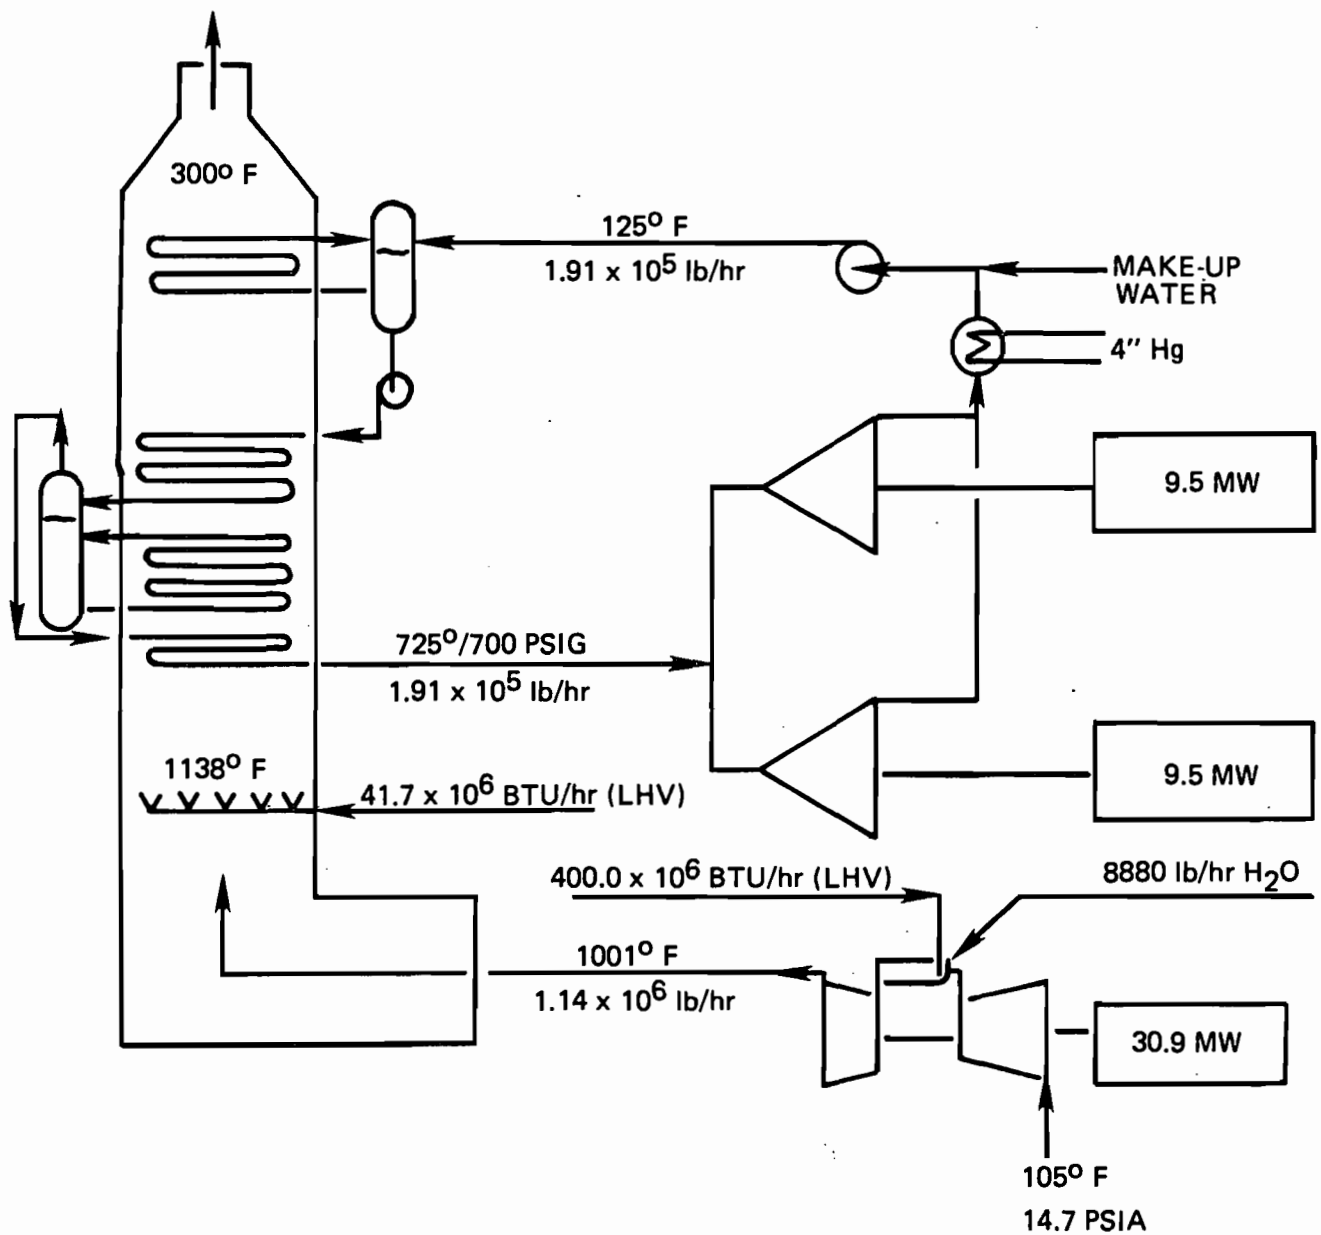

$$\text{HEAT RATE (LHV)} = \frac{(41.7 + 400.0)10^6}{(49.9)10^3} = 8852 \text{ BTU/KW-HR (GROSS)}$$

Figure A- 5

**SCHEMATIC FLOW DIAGRAM OF COMBINED  
CYCLE WITH WATER INJECTION**

SOURCE: KISSIMMEE UTILITIES, 1981.

**Prepared For:  
CITY OF KISSIMMEE**

PERMIT ATTACHMENT B  
EMISSION CALCULATIONS

SYSTEM CONSTANTS (See Figure A-4)

Heat Input to Turbine	400 x 10 <sup>6</sup> Btu/hr (LHV)
Heat Input for Supplemental Heat	41.7 x 10 <sup>6</sup> Btu/hr (LHV)
Heat Rate of Combined Cycle Plant	8,852 Btu/kW-hr (LHV) (9.34 kJ/Watt-hr)
Heat Rate of Gas Turbine Only	12,945 Btu/kW-hr (LHV) (13.66 kJ/Watt-hr)
Water Injected into Turbine	8,880 lb/hr
Total Mass Flow at Turbine Exit	1.14 x 10 <sup>6</sup> lb/hr

ASSUMED FUEL CHARACTERISTICS

NATURAL GAS

Density	0.049 lb/SCF
Heating Value	1,000 Btu/SCF (HHV); 900 Btu/SCF (LHV)
Water Produced by Combustion at Theoretical Air	1.92 lb H <sub>2</sub> O/lb fuel
Theoretical Air	14.7 lb/lb fuel
Excess Air for Supplemental Heating	15%

NO. 2 FUEL OIL

API Gravity at 60°F	28°
Density	7.4 lb/gal
Heating Value	19,350 Btu/lb (HHV) 18,200 Btu/lb (LHV)
Theoretical Air	14.2 lb/lb fuel
Excess Air for Supplemental Heating	25%
Water Produced by Combustion at Theoretical Air	1.09 lb H <sub>2</sub> O/lb fuel
Molecular Weight of Combustion Products	29 lb/lb-mole

NSPS EMISSION LIMITATIONS

SULFUR DIOXIDE 0.015% by volume or  
≤ 0.8% fuel sulfur content

NITROGEN OXIDES  $0.0075 \frac{14.4}{Y} + F$  [% by volume]

Y = Manufacturer's rated heat rate at rated load (gas turbine only):  
13.66 kJ/Watt-hr

F = Allowance for fuel-bound nitrogen: 0.005 (assume N > 0.25% by weight for worst-case emissions)

$$0.0075 \frac{14.4}{13.66} + 0.005 = 0.0129\% = \underline{129 \text{ ppm}}$$

FUEL USAGE AND COMBUSTION GAS RATES--NATURAL GAS

Fuel for Supplemental Heat:

$$(41.7 \times 10^6) (1 \text{ SCF}/900 \text{ Btu}) = 46,300 \text{ SCFH}$$

$$(46,300 \text{ SCF/hr})(0.049 \text{ lb/SCF}) = 2,270 \text{ lb/hr}$$

Air for Supplemental Heat @ 115% Theoretical:

$$(2,269) (14.7) (1.15) = 38,360 \text{ lb/hr}$$

Water from Combustion (Supplemental Heat):

$$(2,270) (1.92) = 4,360 \text{ lb/hr}$$

Fuel for turbine:

$$(400 \times 10^6) (1 \text{ SCF}/900 \text{ Btu}) = 444,400 \text{ SCFH}$$

$$(444,400 \text{ SCF/hr}) (0.049 \text{ lb/SCF}) = 21,780 \text{ lb/hr}$$

Water from Combustion (Turbine):

$$(21,700) (1.92) = 41,800 \text{ lb/hr}$$

Air Supply for Primary Combustion is Determined by System Requirement of  $1.14 \times 10^6$  lb/hr (39,310 lb-mole/hr) Mass Flow Rate Through Turbine.

Total Mass of Combustion Products =	$1.14 \times 10^6$
	+ 2,270 supplemental fuel
	+ <u>38,360</u> supplemental air
	1,181,000 lb/hr
	(40,700 lb-mole/hr)

Total Mass of Water in Combustion Gases =	4,360 supplemental
	41,800 turbine (2,322 lb-mole/hr)
	<u>8,880</u> injection (493 lb-mole/hr)
	55,040 lb/hr
	(3,060 lb-mole/hr)

Volumetric Flow Rate,  $V = \frac{nRT}{P}$

$$\text{Total Flow at Stack Exit} = \frac{(40,700) (1,545.3) (760)}{(14.7 \times 144) (60)} = 376,300 \text{ ACFM}$$

$$\text{Dry Flow at Standard Conditions} = \frac{(40,700 - 3,060) (1,545.3) (520)}{(14.7 \times 144) (60)} = 238,000 \text{ DSCFM}$$

$$\text{Gas Flow, Turbine Only, Assumed at 15 percent } O_2 = \frac{(39,310 - 2,322 - 493)(1,545.3)(520)}{(14.7 \times 144)(60)} = 230,900 \text{ DSCFM}$$

FUEL USAGE AND COMBUSTION GAS RATES--FUEL OIL

Fuel for Supplemental Heat:

$$(41.7 \times 10^6) (1 \text{ lb}/18,200 \text{ Btu}) = 2,290 \text{ lb/hr}$$

Air for Supplemental Heat at 125% Theoretical:

$$(2,290) (14.2) (1.25) = 40,650 \text{ lb/hr}$$

Water from Combustion (Supplemental Heat):

$$(2,290) (1.09) = 2,500 \text{ lb/hr}$$

Fuel for Turbine:

$$(400 \times 10^6) (1 \text{ lb}/18,200 \text{ Btu}) = 22,000 \text{ lb/hr}$$

Water from Combustion (Turbine):

$$(22,000) (1.09) = 24,000 \text{ lb/hr}$$

Air Supply for Primary Combustion is determined by System Requirement of  $1.14 \times 10^6$  lb/hr (39,310 lb-mole/hr) Mass Flow Rate Through Turbine.

Total Mass of Combustion Products =	$1.14 \times 10^6$
	+ 2,290 supplemental fuel
	+ <u>40,650</u> supplemental air
	1,183,000 lb/hr
	(40,800 lb-mole/hr)

Total Mass of Water in Combustion Gases =	2,500 supplemental
	24,000 turbine (1,333 lb-mole/hr)
	<u>8,880</u> injection (493 lb-mole/hr)
	35,400 lb/hr
	(1,970 lb-mole/hr)

$$\text{Volumetric Flow Rate, } v = \frac{nRT}{P}$$

$$\text{Total Flow at Stack Exit} = \frac{(40,800) (1,545.3) (760)}{(14.7 \times 144) (60)} = 377,000 \text{ ACFM}$$

$$\text{Dry Flow at Standard Conditions} = \frac{(40,800 - 1,970) (1,545.3) (520)}{(14.7 \times 144) (60)} = 246,000 \text{ DSCFM}$$

$$\text{Gas Flow, Turbine Only, Assumed at 15 Percent } O_2 = \frac{(39,310 - 1,333 - 493) (1,545.3) (520)}{(14.7 \times 144) (60)} = 237,150 \text{ DSCFM}$$

---

BASIS FOR POTENTIAL EMISSIONS

TURBINE: AP-42, Table 3.3.1-2 (See Attachment C)

	<u>Volatile Organics</u>	<u>Carbon Monoxide</u>	<u>Particulate</u>
Gas Fired (lb/10 <sup>6</sup> ft <sup>3</sup> gas)	42	115	14
Oil Fired (lb/10 <sup>3</sup> gal oil)	5.57	78.1 lb/hr*	21.2 lb/hr*

SUPPLEMENTAL HEATER: AP-42, Supplement 13, Table 1.3-1 and 1.4-1

Natural Gas (lb/10 <sup>6</sup> ft <sup>3</sup> )	5.8	35	1 to 5
Fuel Oil (lb/10 <sup>3</sup> gal oil)	0.25	5	2

SULFUR DIOXIDE: Conversion of all sulfur in fuel to SO<sub>2</sub> was assumed.

NITROGEN OXIDES: Based upon actual NO<sub>x</sub> emissions and assuming 48 percent removal efficiency by water injection system.

NONCRITERIA POLLUTANTS: Ackerman et al., 1980. Health Impacts, Emissions, and Emission Factors for Noncriteria Pollutants Subject to de minimis Guidelines and Emitted from Stationary Conventional Combustion Processes (see Table 4-4), EPA-450/2-80-074.

	<u>Mercury</u>	<u>Beryllium</u>
Natural Gas (lb/10 <sup>12</sup> Btu)	11.42	Nil
Distillate Oil (lb/10 <sup>12</sup> Btu)	0.91	0.33

---

\* Manufacturer's data used since those estimates were greater than AP-42 estimates.

ANNUAL EMISSIONS (TPY)†

Pollutant	Gas-Fired			Fuel-Oil Fired			PSD Significant Emission Rate*
	Turbine	Supplemental Firing	Total	Turbine	Supplemental Firing	Total	
Potential NO <sub>x</sub> ††	1877	28	1905	1927	27	1954	—
Actual NO <sub>x</sub>	976**	28	1004	1002**	27	1029	40
Hydrocarbons (as CH <sub>4</sub> )	82	1	83	73	<1	73	40
Carbon Monoxide	224	7	231	342	7	349	100
Particulate	27	1	28	93	3	96	25
Sulfur Dioxide†††	19	2	21	1,542	160	1,702	40
Mercury	0.02	—	0.02	0.002	—	0.002	0.01
Beryllium	—	—	—	0.0006	—	0.0006	0.0004

† Assumes 8,760 hr/yr operation.

\* Federal Register, Vol. 45, No. 154, 1980.

†† Based upon actual NO<sub>x</sub> emissions and assuming 48 percent removal in turbine by water injection system.

\*\* Based upon turbine gas flow rate and 129 ppm NO<sub>x</sub>, according to the following equation:

$$\begin{aligned} & (\text{DSCFM}) (166 \text{ ppm}) (2,000 \text{ ug/m}^3\text{-ppm}) (0.0283 \text{ m}^3/\text{ft}^3) (10^{-6} \text{ g/ug}) \\ & (60 \text{ min/hr}) (8,760 \text{ hr/yr}) (1 \text{ lb}/454 \text{ g}) (1 \text{ ton}/2,000 \text{ lb}). \end{aligned}$$

††† Assumed that natural gas has 0.01 percent sulfur content. Fuel oil calculation based on total conversion of 0.8 percent sulfur oil.

NOTE: Emission rates assume continuous firing of 100 percent gas or 100 percent fuel oil.

Potential and maximum emissions in Section IIIC are reported as the greater of the two fuels. Actual emissions are based on gas combustion.



PERMIT ATTACHMENT C  
CONTROL TECHNOLOGY

### 3.3 OFF-HIGHWAY STATIONARY SOURCES

In general, engines included in this category are internal combustion engines used in applications similar to those associated with external combustion sources (see Chapter 1). The major engines within this category are gas turbines and large, heavy-duty, general utility reciprocating engines. Emission data currently available for these engines are limited to gas turbines and natural-gas-fired, heavy-duty, general utility engines. Most stationary internal combustion engines are used to generate electric power, to pump gas or other fluids, or to compress air for pneumatic machinery.

#### 3.3.1 Stationary Gas Turbines for Electric Utility Power Plants

3.3.1.1 General — Stationary gas turbines find application in electric power generators, in gas pipeline pump and compressor drives, and in various process industries. The majority of these engines are used in electrical generation for continuous, peaking, or standby power.<sup>1</sup> The primary fuels used are natural gas and No. 2 (distillate) fuel oil, although residual oil is used in a few applications.

3.3.1.2 Emissions — Data on gas turbines were gathered and summarized under an EPA contract.<sup>2</sup> The contractor found that several investigators had reported data on emissions from gas turbines used in electrical generation but that little agreement existed among the investigators regarding the terms in which the emissions were expressed. The efforts represented by this section include acquisition of the data and their conversion to uniform terms. Because many sets of measurements reported by the contractor were not complete, this conversion often involved assumptions on engine air flow or fuel flow rates (based on manufacturers' data). Another shortcoming of the available information was that relatively few data were obtained at loads below maximum rated (or base) load.

Available data on the population and usage of gas turbines in electric utility power plants are fairly extensive, and information from the various sources appears to be in substantial agreement. The source providing the most complete information is the Federal Power Commission, which requires major utilities (electric revenues of \$1 million or more) to submit operating and financial data on an annual basis. Sawyer and Farmer<sup>3</sup> employed these data to develop statistics on the use of gas turbines for electric generation in 1971. Although their report involved only the major, publicly owned utilities (not the private or investor-owned companies), the statistics do appear to include about 87 percent of the gas turbine power used for electric generation in 1971.

Of the 253 generating stations listed by Sawyer and Farmer, 137 have more than one turbine-generator unit. From the available data, it is not possible to know how many hours *each* turbine was operated during 1971 for these multiple-turbine plants. The remaining 116 (single-turbine) units, however, were operated an average of 1196 hours during 1971 (or 13.7 percent of the time), and their average load factor (percent of rated load) during operation was 86.8 percent. This information alone is not adequate for determining a representative operating pattern for electric utility turbines, but it should help prevent serious errors.

Using 1196 hours of operation per year and 250 starts per year as normal, the resulting average operating day is about 4.8 hours long. One hour of no-load time per day would represent about 21 percent of operating time, which is considered somewhat excessive. For economy considerations, turbines are not run at off-design conditions any longer than necessary, so time spent at intermediate power points is probably minimal. The bulk of turbine operation must be at base or peak load to achieve the high load factor already mentioned.

If it is assumed that time spent at off-design conditions includes 15 percent at zero load and 2 percent each at 25 percent, 50 percent, and 75 percent load, then the percentages of operating time at rated load (100 percent) and peak load (assumed to be 125 percent of rated) can be calculated to produce an 86.8 percent load factor. These percentages turn out to be 19 percent at peak load and 60 percent at rated load; the postulated cycle based on this line of reasoning is summarized in Table 3.3.1-1.

Table 3.3.1-1. TYPICAL OPERATING CYCLE FOR ELECTRIC UTILITY TURBINES

Condition, % of rated power	Percent operating time spent at condition	Time at condition based on 4.8-hr day		Contribution to load factor at condition
		hours	minutes	
0	15	0.72	43	$0.00 \times 0.15 = 0.0$
25	2	0.10	6	$0.25 \times 0.02 = 0.005$
50	2	0.10	6	$0.50 \times 0.02 = 0.010$
75	2	0.10	6	$0.75 \times 0.02 = 0.015$
100 (base)	60	2.88	173	$1.0 \times 0.60 = 0.60$
125 (peak)	19	0.91	55	$1.25 \times 0.19 = 0.238$
		4.81	289	Load factor = 0.868

The operating cycle in Table 3.3.1-1 is used to compute emission factors, although it is only an estimate of actual operating patterns.

The operating cycle in Table 3.3.1-1 is used to compute emission factors, although it is only an estimate of actual operating patterns. Table 3.3.1-2 is the resultant composite emission factors based on the operating cycle of Table 3.3.1-1 and the 1971 population of electric utility turbines.

Different values for time at base and peak loads are obtained by changing the total time at lower loads (0 through 75 percent) or by changing the distribution of time spent at lower loads. The cycle given in Table 3.3.1-1 seems reasonable, however, considering the fixed load factor and the economies of turbine operation. Note that the cycle determines *only* the importance of each load condition in computing composite emission factors for each type of turbine, *not* overall operating hours.

The top portion of Table 3.3.1-2 gives separate factors for gas-fired and oil-fired units, and the bottom portion gives fuel-based factors that can be used to estimate emission rates when overall fuel consumption data are available. Fuel-based emission factors on a mode basis would also be useful, but present fuel consumption data are not adequate for this purpose.

3.3.1.3 Nitrogen Oxide Control<sup>4,5</sup>—Nitrogen oxide emissions from gas turbines are reduced by injecting water or steam into the primary flame zone of the combustion system. Moisture is added to the fuel or combustion air, or is injected directly into the combustion chamber. The addition of water limits the combustion temperature and thereby controls the formation of nitrogen oxide.

Water and steam injection rates, commonly expressed as a water-to-fuel ratio (by weight), have an effect on turbine efficiency. Injection of water and fuel with a ratio of 1 *reduces* gas turbine efficiency by approximately 1 percent. Injection of steam at the same ratio *increases* efficiency by 1 percent. For a combined-cycle turbine using steam from the waste-heat boiler, there is an overall reduction in efficiency of 1 percent at a steam/fuel injection ratio of 1. The incremental effectiveness of injecting either steam or water is sharply reduced at water/fuel ratios above 1. Table 3.3.1-3 gives average percentages of nitrogen oxide emission reduction for various water-to-fuel ratios.

Another possible means of controlling nitrogen oxide emissions is the modification of operations and system designs to include catalysts in the combustion and catalytic cleaning in the exhaust stream. These improvements, still in the experimental stage, would be used in addition to the water-injection methods.

**Table 3.3.1-2. COMPOSITE EMISSION FACTORS FOR 1971  
POPULATION OF ELECTRIC UTILITY TURBINES  
EMISSION FACTOR RATING: B**

Time basis	Nitrogen oxides	Organics (CH <sup>x</sup> )	Carbon Monoxide	Particulate	Sulfur oxides
Entire population					
lb/hr rated load <sup>a</sup>	8.84	0.79	2.18	0.52	0.33
kg/hr rated load	4.01	0.36	0.99	0.24	0.15
Gas-fired only					
lb/hr rated load	7.81	0.79	2.18	0.27	0.098
kg/hr rated load	3.54	0.36	0.99	0.12	0.044
Oil-fired only					
lb/hr rated load	9.60	0.79	2.18	0.71	0.50
kg/hr rated load	4.35	0.36	0.99	0.32	0.23
Fuel basis					
Gas-fired only					
lb/10 <sup>6</sup> ft <sup>3</sup> gas	413.	42.	115.	14.	940S <sup>b</sup>
kg/10 <sup>6</sup> m <sup>3</sup> gas	6615.	673.	1842.	224.	15,000S
Oil-fired only					
lb/10 <sup>3</sup> gal oil	67.8	5.57	15.4	5.0	140S
kg/10 <sup>3</sup> liter oil	8.13	0.668	1.85	0.60	16.8S

<sup>a</sup>Rated load expressed in megawatts.

<sup>b</sup>S is the percentage sulfur. Example: If the factor is 940 and the sulfur content is 0.01 percent, the sulfur oxides emitted would be 940 times 0.01, or 9.4 lb/10<sup>6</sup> ft<sup>3</sup> gas.

**Table 3.3.1-3. PERCENT REDUCTION OF NO<sub>x</sub>  
EMISSIONS FROM WATER OR  
STEAM INJECTION\***

**EMISSION FACTOR RATING: B**

Water-to-fuel ratio	Percent reduction of NO <sub>x</sub> emissions
0.2	28
0.4	48
0.6	63
0.8	73
1.0	79
1.2	84
1.4	88
1.6	90
1.8	92
2.0	92

\*Not corrected for efficiency variations.

### References for Section 3.3.1

1. O'Keefe, W. and R. G. Schwieger. Prime Movers. 115:522-531, November 1971.
2. Hare, C. T. and K. J. Springer. Exhaust Emissions from Uncontrolled Vehicles and Related Equipment Using Internal Combustion Engines, Final Report, Part 6: Gas Turbine Electric Utility Power Plants. Southwest Research Institute, San Antonio, Tx. Prepared for U.S. Environmental Protection Agency, Research Triangle Park, N.C., under Contract No. EHS 70-108. February 1974.
3. Sawyer, V. W. and R. C. Farmer. Gas Turbines in U.S. Electric Utilities. Gas Turbine International. January-April 1973.
4. Durkee, K. R., E. A. Noble, and R. Jenkins. An Investigation of the Best Systems of Emission Reduction for Stationary Gas Turbines — Standards Support and Environmental Impact Statement. U.S. Environmental Protection Agency, Research Triangle Park, N.C. Publication No. EPA-450/2-77-017a. 1977.
5. Control Techniques for Nitrogen Oxide Emissions from Stationary Sources. Acurex Corporation, Aero-therm Division. Prepared for U.S. Environmental Protection Agency, Office of Air Quality Planning and Standards, Research Triangle Park, N.C. Contract No. 68-02-2611. Publication No. EPA-450/1-78-001. January 1978.



Westinghouse  
Electric Corporation

Power Generation  
Group

Combustion Turbine  
Systems Division

Box 251  
Concordville Pennsylvania 19331

July 22, 1981

Mr. M. H. Dybevick  
Environmental Science and  
Engineering  
P. O. Box E.S.E.  
Gainsville, Florida 32602

Dear Mr. Dybevick:

In response to your request regarding the City of Kissimee, we are enclosing the following information on water injection in combustion turbines:

1. One-page summary
2. Write-up from Instruction Book I.B. 50-114A (5 pages)
3. Schematic (2 pages)
4. Cutaway of nozzle PDL-15A. Note: Water injection would be made through the atomizing air port in the cutaway.

We hope this information is what you want. If any additional details are desired, please let us know.

Sincerely,

A handwritten signature in dark ink, appearing to read 'Dale Stephenson', written over a horizontal line.

Dale Stephenson  
CTSD Marketing

cc: W Jacksonville, Fla Ofc - D. Goodling

CTSD 180 - R. L. Wolfinger

## W-501 WATER INJECTION SYSTEM

Each combustion turbine can be equipped with an automatic water injection system. The water used in the system must be relatively free from contaminants. (The total contaminants of the fuel and water must be below a specified limit. Please refer to the section on fuel treatment for allowable contaminant levels). The injection system is started automatically by the combustion turbine control system when the generator breaker closes. When water pressure reaches a sufficient level, the water injection pump pressure switch opens the water isolation valve allowing the water to flow to the combustors through the air atomization piping network. (The air atomization network is used only during starting and the nozzles are located in precisely the correct location in the combustor for maximum water injection benefit). The air and water systems are separated by a series of check valves in appropriate places to prevent potential water contamination in the plant compressed air system and to prevent backflow from the combustion turbine. The amount of water injected is a function of load and is regulated by means of an analog control signal from the Control System and feedback signal from the water flowmeter.

## 1.9 WATER INJECTION SYSTEM W-501 COMBUSTION TURBINE



I.B. 50-114-A

The Water Injection System is provided for the purpose of reducing  $\text{NO}_x$  (Oxides of Nitrogen) in the combustion turbine exhaust gases. The level of  $\text{NO}_x$  emissions is proportional to combustion turbine power output. The system is shown schematically in Figure 1.

Water of proper quality and free of contaminants, supplied by the customer, enters into the system through a strainer (Item 1) and then to a three phase, 460 VAC motor driven centrifugal pump (Item 2). The high pressure water passes through a filter (Item 3) and continues through a flowmeter (Item 4), water control valve (Item 5), and isolation valve (Item 6). The control valve regulates the flow as a function of load using the flowmeter as a feedback signal to the controller (Item 7). The water isolation valve provides redundant and positive shut-off protection. Redundant check valves (Item 8), downstream of the water isolation valve, prevents backflow from the turbine. The water is pumped through the atomizing air manifold (Item 9), and into the turbine combustion system via the atomizing air nozzle passages. Two check valves (Item 10, 11) for redundancy, are provided in the atomizing air line to prevent water from entering the compressed air supply (Item 12). A water drain valve (Item 13), is provided, which has a delayed opening during turbine shutdown, to drain water from the air/water manifold. An atomizing air purge valve (Not associated with water injection), (Item 14), opens with the closure of the atomizing air isolation/regulation valve to provide continuous purge of the nozzle air passages during turbine run. The purge valve must be closed during water injection to prevent water from backflowing into the purge air line. A high pressure selector valve (Item 15) (located in the pressure switch and gauge cabinet) passes signal air to the purge valve when atomizing air or water injection is used.

Combustion switch/lamps are located on the operator's panel decal'd WATER INJEC ON and WATER INJEC OFF. The selection is made by the operator any time before starting or during turbine operation. If the choice is to use water

injection, the system is started automatically by the controller when the generator breaker closes. A CCO to the water pump motor starter closes, thus energizing the motor and starting the water pump. The water injection pump discharge pressure switch, 63-W1, reads pump pressure and activates at a set operating level - opening the water injection isolation valve and closing the purge system valve, via solenoid valve 20-W1 located in the Pressure Switch and Gauge Cabinet. If 63-W1 does not activate within 15 seconds, the water pump motor will be de-energized. The pump motor will also be de-energized if 63-W1 is de-activated when the system is running in a steady state condition.

### NOTE

If the pump shuts down due to an abnormal condition, a pushbutton switch on the water injection panel of the motor control center must be pressed to reset the system before the next starting attempt.

The water isolation valve is equipped with a limit switch which indicates an open or closed valve. The limit switch is wired to the Control System as a CCI and gives an alarm signal, WATER INJECTION TROUBLE, when it is in the wrong position for the turbine operating condition.

When the CCO to the water pump motor starter is closed, the Control System generates an analog signal voltage as a function of MW load. This analog output is transmitted to the controller via the water isolation valve limit switch. The limit switch prevents the analog signal from opening the water control valve until the isolation valve is open. When the isolation valve is open, a pneumatic controller (Item 7) compares the analog signal with the flowmeter feedback signal and changes the position of the water control valve accordingly.

The analog signal feeds into a voltage to pressure transducer (Item 16) and then through a high limit relay (Item 17) (Limits control signal as a function of maximum system water flow) before



# 1.9 WATER INJECTION SYSTEM

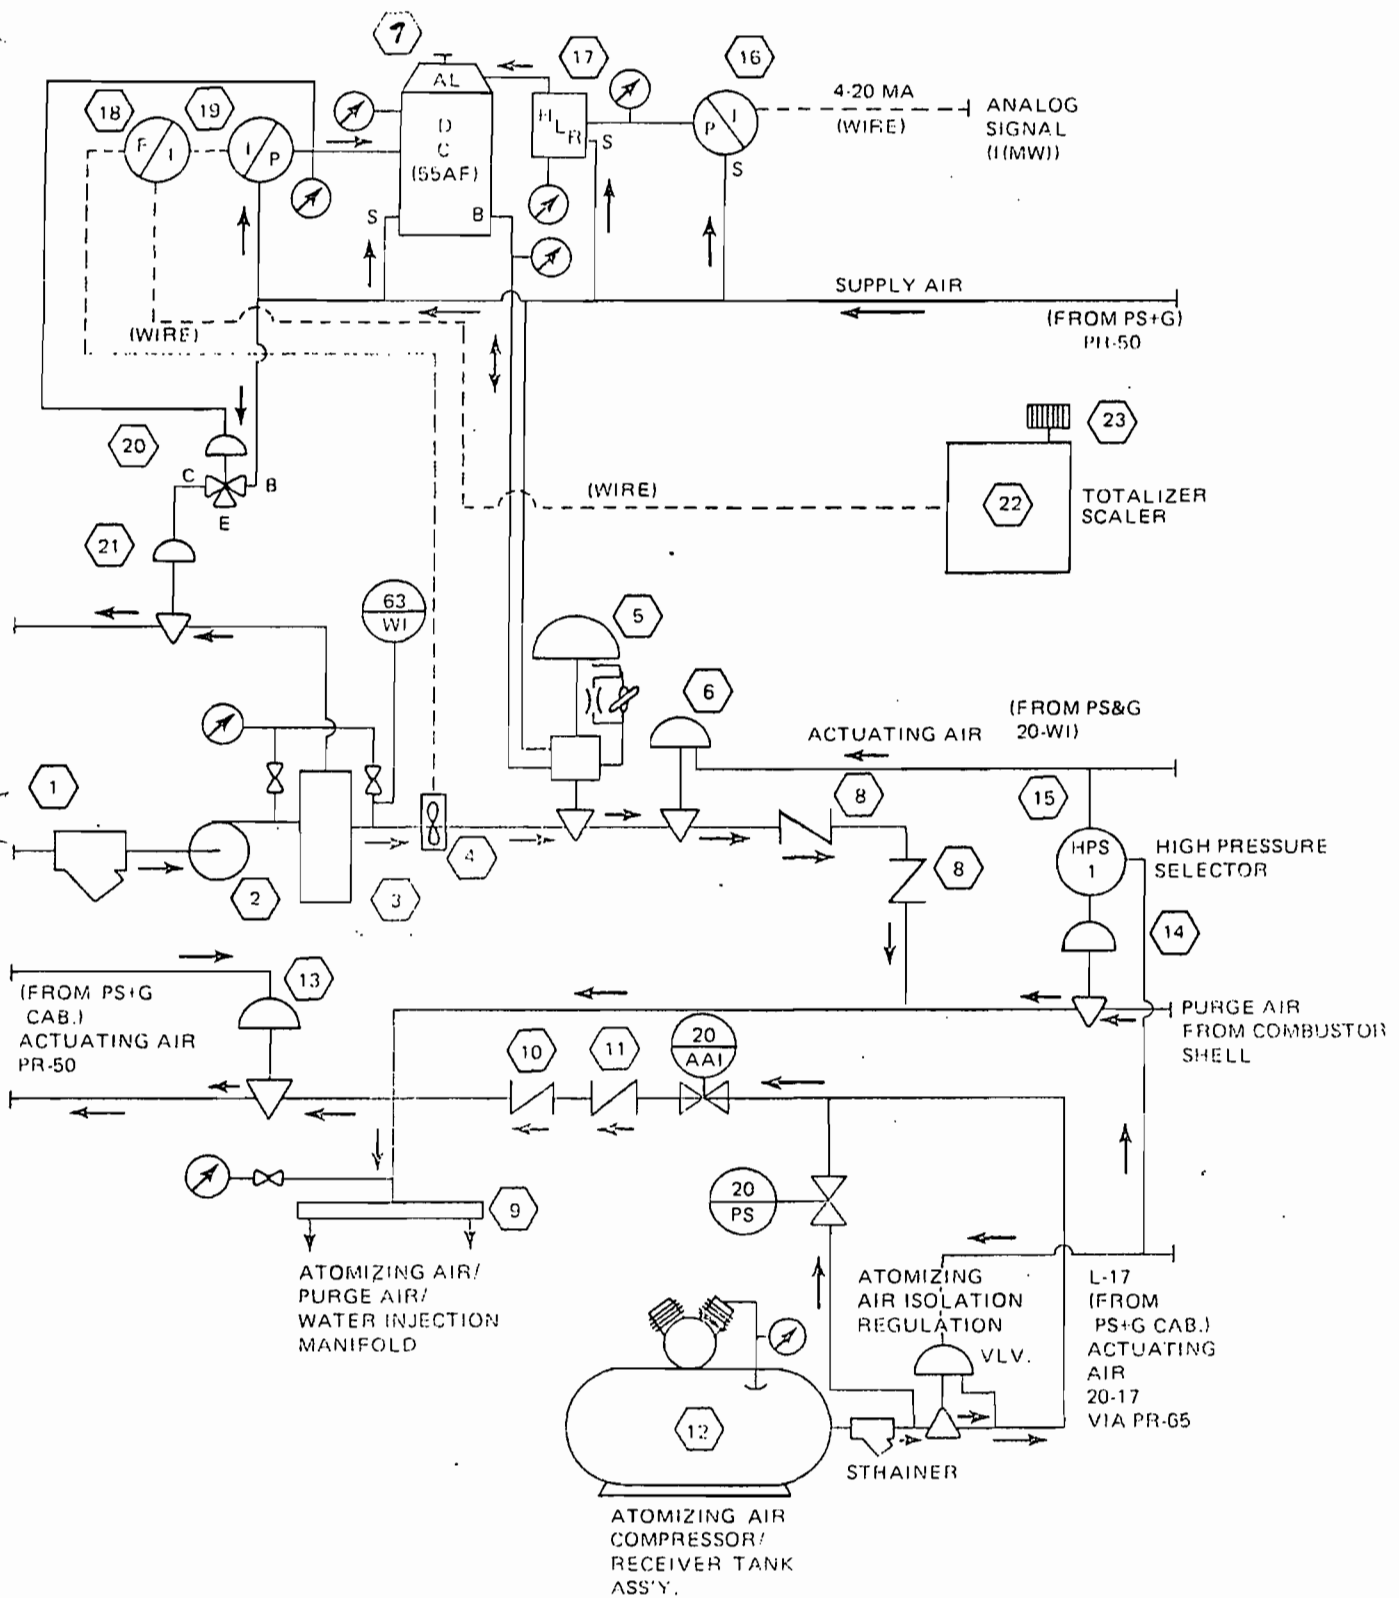


Figure 1. Water Injection System Schematic

input to the controller. The flow meter feedback circuit consists of a frequency to current transducer (Item 18) into a current pressure transducer (Item 19) before input to the other side of the controller.

The flowmeter feedback signal is also directed to a totalizer scaler (Item 22) installed in the control package. The totalizer processes the signal to advance the counter (Item 23) which indicates the total of water used.

A three-way pressure operated pilot valve (Item 20), receiving its signal pressure from the flowmeter input, closes at a pre-set pressure (approximately with generator breaker closure) directing actuating air to the customer water return valve (Item 21) closing it, thus diverting full water injection system flow to the turbine instead of back to the customer water supply tank.

During shutdown, simultaneous with closing of the fuel valve, two solenoid valves 20-PS and 20-AA1, are opened and the purge valve (Item 14) is closed. This will allow a high pressure surge of air to pass through the water injection manifold and fuel nozzles to clear them. Residual fuel in the nozzle will also be eliminated. After a short time interval, the solenoid valves are closed. Then the water drain valve (Item 13) is opened to keep the piping clear:

The water injection system will shut down if:

- 1) Pressure switch 63/W1 (water pump discharge pressure) deactivates with loss of pressure.
- 2) The blade path thermocouple spread exceeds a specified limit.
- 3) The blade path thermocouple average is below a specified limit.

**NOTE**

When either 2 or 3 (above) occur, the operator can manually reset and restart the water injection system two times in a one-hour period.

The water isolation valve will close if:

- 1) The overspeed trip relay is not set.
- 2) Pressure switch 63/W1 is open.

3) When a turbine shutdown occurs, the water isolation valve closes simultaneously with the fuel overspeed trip valve, and the water system is automatically de-energized.

**SYSTEM COMPONENTS**

Components of this system and their function are as follows:

**STRAINER**

This coarse strainer at the entrance of the system keeps foreign objects from entering the water injection pump.

**WATER INJECTION PUMP**

This is a high-speed centrifugal type pump driven by a 60 HP, 460 VAC, 3-phase, 60 Hz motor with a normal speed of 3500 rpm. A step-up gearbox is used to increase motor speed. The maximum pump capability is 136 gpm at 393 psig. Minimum inlet pressure is 15 psig which must be supplied by customer. The minimum discharge flow of 36 gpm is necessary to prevent overheating the pump.

**FILTER**

This is a 50 micron fibrous-medium cartridge filter that removes particles to protect the flowmeter, control valves, and turbine nozzles.

**FLOWMETER**

This fluidic-type meter has no moving parts. It generates an electronic pulse that is sent to frequency-to-current converter. The flow meter output varies linearly with rate of flow.

**CONTROL VALVE**

This is a diaphragm type, plug valve that controls water flow to the turbine. The valve is pneumatically actuated by a signal from the controller located in the control box to limit water flow.

### ISOLATION VALVE

This is a pneumatically-operated diaphragm, plug-type valve that is opened when the generator breaker is closed and closes when breaker opens. Actuating air is supplied through solenoid valve, 20-WI, in pressure switch and gauge cabinet. A limit switch will cause an alarm should the valve close during turbine operation.

### CHECK VALVES

A check valve on the water injection skid and one on the turbine are located in series with isolation valve to prevent pressurized air from entering water system. Redundant check valves are installed on the atomizing air line to prevent water from entering the air system.

### BYPASS VALVE

This is a pneumatically-operated diaphragm valve to allow a minimum water flow through the pump. The valve is controlled by a pilot valve and water is returned to storage. The bypass valve is closed when turbine water requirements are above minimum pump flow.

### HIGH LIMIT RELAY

This pneumatic relay, located in control box, limits the water flow to a maximum preset value.

### TRANSDUCER, CURRENT-TO-PRESSURE

This transducer, located in control box, converts the independent analog signal to a pressure signal that is fed to controller.

### CONTROLLER

This pneumatic pressure controller, located in control box, has proportional and reset control. The output signal determines position of control valve. The signal is a result of two inputs: one feeding back from flow meter and the other originating

from the controller. The analog signal is a function of generator megawatts.

### TOTALIZER SCALER AND COUNTER

This monitor is mounted on the control box. The totalizer is calibrated to output one pulse per gallon to a digital counter which indicates total flow.

### PRESSURE SWITCH, 63-WI

A pressure switch is located on the water injection skid to shut down pump should discharge pressure fall below set limit.

### SOLENOID VALVE, 20/AAI

This solenoid valve is located in the mechanical package on the atomizing air piping to permit passage of air into the water injection system to atomize fuel during starts and to purge residual water and fuel during shutdown.

### SOLENOID VALVE, 20/PS

This solenoid valve is located in the mechanical package. It is activated during shutdown along with valve, 20/AAI, to allow a surge of high pressure air of short duration to pass through the water injection manifold and fuel nozzles.

### WATER DRAIN VALVE

A pneumatically controlled valve is located on the turbine in the line to the manifold that supplies atomizing air, purge air, and water to the fuel nozzles. The valve is closed during all turbine operation and opened at shutdown, after the line purge sequence, to drain any water that may remain.

### P.S.&G. CABINET


The following components are located in the pressure switch and gauge cabinet:

REGULATOR PR-50

This valve functions as an air pressure limiting device in the air supply to the water injection skid. The regulated air is also used to close the water drain valve on the turbine.

WATER INJECTION ISOLATION VALVE  
AIR SOLENOID VALVE 20/WI

This valve is opened to pass control air to the isolation valve while water injection is used.

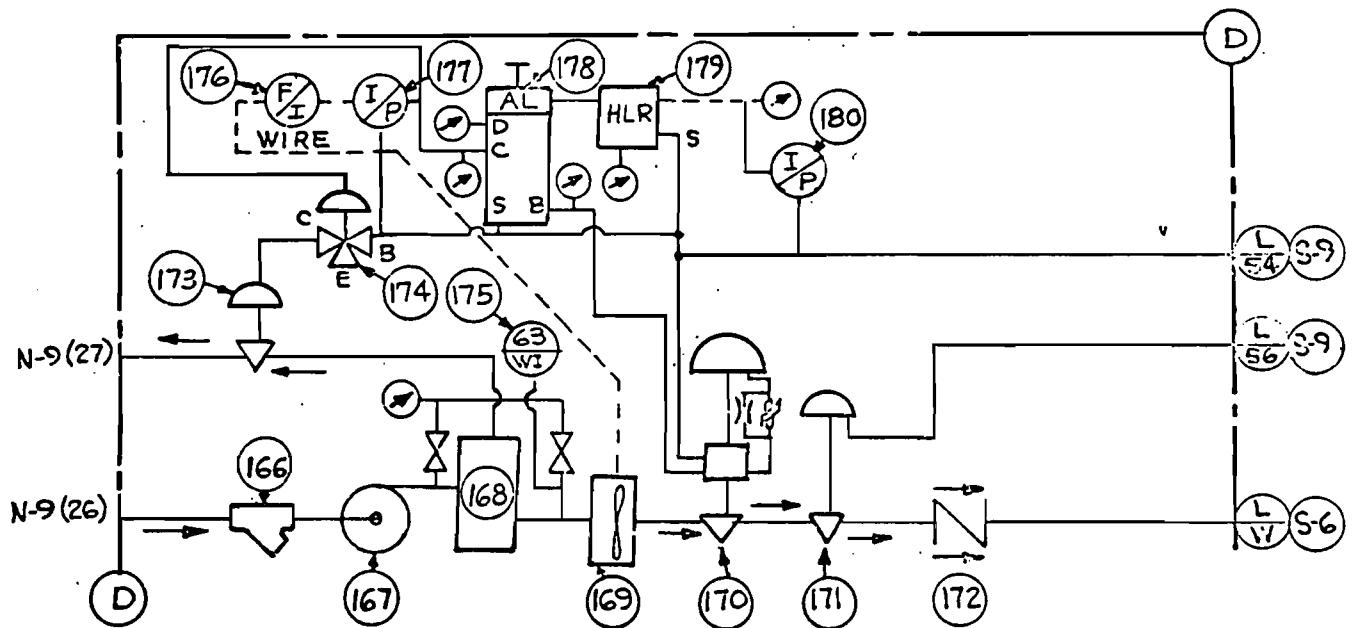


WATER INJECTION SYSTEM

12  
12

## WATER INJECTION

- 166. Strainer
- 167. Centrifugal Pump
- 168. Filter
- 169. Flow Meter
- 170. Control Valve

- 171. Isolation Valve
- 172. Check Valve
- 173. Water Return Valve
- 174. Water Return Valve - Pilot Valve Actuator
- 175. Pressure Switch - 63WI
- 176. Transducer - Frequency to Current
- 177. Transducer - Current to Pressure
- 178. Controller - Type 55AF
- 179. High Limit Relay
- 180. Transducer - Current to Pressure

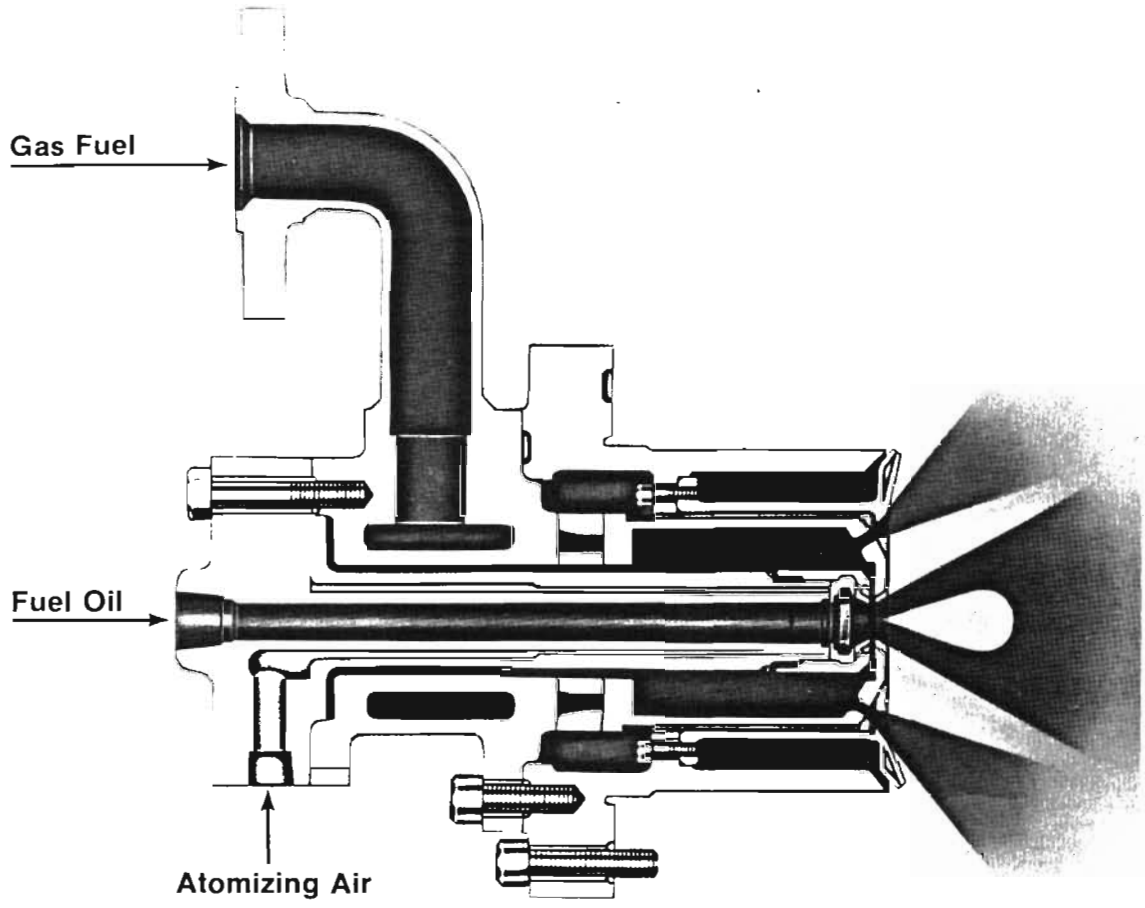

PERMIT ATTACHMENT D  
PREVIOUS EPA BACT DETERMINATIONS



BACT/LAER CLEARINGHOUSE REPORT

3.0

SOURCE TYPE/SIZE: Pipeline Pump Station/13,500 hp

NAME/ADDRESS: Alaska Pipeline Service Company, Anchorage, Alaska

DETERMINATION DATA: CONDITIONAL/FINAL PENDING for BACT/LAER on NEW MODIFIED SOURCE  
 KEY DATES: Application-Recd.           , Completed           ; Determination-Proposed           , Final 9/18/79

BY: (Agency) EPA Region X Person Paul Boys Phone           

AFFECTED FACILITIES	THROUGHPUT CAPACITY	EMISSION RATE* -UNCONTROLLED	EMISSION LIMITS (Basis)**	CONTROL STRATEGY DESCRIPTION Equipment type, etc.	Eff. %
Pump Turbines (2)	13,500 hp each	NOx	0.0150 ( $\frac{14.4}{Y}$ ) + F <sup>0</sup> (B) % by volume	Dry controls	

SOURCE OPERATION: BATCH/CONTINUOUS:            hrs/yr; % by Season            W            Sp            Su            F

NOTES: Y = manufactures rated heat rate @ peak load            -(see subpart G6 of NSPS)  
 F = emission allowance for fuel bound nitrogen           

\* Specify pollutant (PM, SO<sub>2</sub>, NO<sub>x</sub>, HC, CO or other) and mass emission rate.  
 \*\* Basis symbols: Use B = BACT, N = NSPS, S = SIP, A = Achieved-in-Practice (AIP)

Page      of       
 Rev. 5/80

D-1

BACT/LAER CLEARINGHOUSE REPORT

3.0

SOURCE TYPE/SIZE: Power production

NAME/ADDRESS: Puget Power Ferndale, WA.

DETERMINATION DATA: CONDITIONAL/FINAL PENDING for BACT/LAER on NEW/MODIFIED SOURCE

KEY DATES: Application-Recd. \_\_\_\_\_, Completed \_\_\_\_\_; Determination-Proposed \_\_\_\_\_, Final 9/7/79

BY: (Agency) EPA Region X

Person Paul Boys

Phone \_\_\_\_\_

AFFECTED FACILITIES	THROUGHPUT CAPACITY	EMISSION RATE, * -UNCONTROLLED	EMISSION LIMITS (Basis)**	CONTROL STRATEGY DESCRIPTION Equipment type, etc.	Eff. %
Gasturbines	2 @74.8MN*	NOx	75 ppm (B)	water injection	
		SO <sub>2</sub>	150 ppm @15% O <sub>2</sub> (B)	0.870 S maxin fuel	
		PM	10% opacity (B)	limited fuel ash content	

SOURCE OPERATION: BATCH/CONTINUOUS: \_\_\_\_\_ hrs/yr; % by Season \_\_\_\_\_ W \_\_\_\_\_ Sp \_\_\_\_\_ Su \_\_\_\_\_ F

NOTES: \* = baseload

\* Specify pollutant (PM, SO<sub>2</sub>, NO<sub>x</sub>, HC, CO or other) and mass emission rate

\*\* Basis symbols: Use B = BACT, N = NSPS, S = SIP, A = Achieved-in-Practice (AIP)

D-2

BACT/LAER CLEARINGHOUSE REPORT

3.0

SOURCE TYPE/SIZE: Gas turbine generators/179 HW total

NAME/ADDRESS: Puget Power, Frederickson, WA.

DETERMINATION DATA: CONDITIONAL/FINAL/PENDING for BACT/LAER on NEW/MODIFIED SOURCE

KEY DATES: Application-Recd. \_\_\_\_\_, Completed \_\_\_\_\_; Determination-Proposed \_\_\_\_\_, Final 6/24/80

BY: (Agency) EPA Region X

Person Paul Boys

Phone \_\_\_\_\_

AFFECTED FACILITIES	THROUGHPUT CAPACITY	EMISSION RATE* -UNCONTROLLED	EMISSION LIMITS (Basis)**	CONTROL STRATEGY DESCRIPTION Equipment type, etc.	Eff. %
Combustion	89.5 MW	NO <sub>x</sub>	75 ppm@15% O <sub>2</sub> (B)	Water injection	
Turbines (2)	(each - peak)	SO <sub>2</sub>	150 ppm@15% O <sub>2</sub> (N)	Low S fuel	

SOURCE OPERATION: BATCH/CONTINUOUS: \_\_\_\_\_ hrs/yr; % by Season \_\_\_\_\_ W \_\_\_\_\_ Sp \_\_\_\_\_ Su \_\_\_\_\_ F

NOTES: \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_

\* Specify pollutant (PM, SO<sub>2</sub>, NO<sub>x</sub>, HC, CO or other) and mass emission rate

\*\* Basis symbols: Use B = BACT, N = NSPS, S = SIP, A = Achieved-in-Practice (AIP)

D-3

# Best Available Copy

## BACT/LAER CLEARINGHOUSE REPORT

SOURCE TYPE/SIZE: Approximately 513 MW Combined Cycle Electric Generation Facility

NAME/ADDRESS: Stony Brook Energy Center, Mass Municipal Wholesale Electric Co., Ludlow, Massachusetts

DETERMINATION IS: CONDITIONAL/FINAL/PERMITS ISSUED on \_\_\_\_\_, BASIS\* of BACT<sup>1</sup>/LAER/BAC<sup>2</sup> for NEW/MODIFIED SOURCE (date)

BY U.S. EPA - Region I Linda Murphy FTS 223-4448  
(Agency) (Person) (Phone)

PERMIT PARAMETERS: AFFECTED FACILITIES	THROUGHPUT CAPACITY (Weight Rate)	POLLUTANT (s) EMITTED	EMISSION LIMIT (s) and (basis for)**	CONTROL STRATEGY DESCRIPT Equipment Type, Etc.	Eff
Gas Turbines	2 simple cycles @ 85 MW each	SO <sub>2</sub>		- 0.30% S #2 fuel oil * B	
	3 combined cycle @ 85 MW each	Particulates	- 0.040 lbs/MM Btu * S		
		NO <sub>x</sub>	- 0.0075% by volume @15% O <sub>2</sub> on a dry basis * N		
Steam Turbine	approx. 100 MW				

NOTES:  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

\* Circle one. BACT<sup>1</sup> means a determination made under pre-1977 amendments; BACT<sup>2</sup> means post-1977 amendments to CAA.

\*\* Basis symbols: Use B=DACT, N=NSPS, S=SIP, L=LAER

D-4

PREVENTION OF SIGNIFICANT DETERIORATION (PSD) REPORT  
FOR THE PROPOSED COMBUSTION TURBINE  
AT KISSIMMEE UTILITIES, OSCEOLA COUNTY, FLORIDA

## 1.0 INTRODUCTION

Kissimmee Utilities (KU) currently operates 12 diesel generating units with a total output rated at 26.8 megawatts (MW). The proposed plant is a combined cycle combustion turbine/steam generator, with a total net generating capacity of 46.5 MW and a gross generating capacity of 49.9 MW. The turbine will be fired with natural gas; No. 2 fuel oil will be used as a standby fuel. The proposed source will be a major modification for particulate matter (PM), sulfur dioxide (SO<sub>2</sub>), nitrogen oxides (NO<sub>x</sub>), hydrocarbons (HC), and carbon monoxide (CO) and as such, requires Prevention of Significant Deterioration (PSD) review.

Components of the federal PSD review are:

1. Control Technology Review,
2. Source Impact Analysis,
3. Air Quality Analysis,
4. Source Information, and
5. Additional Impact Analysis.

Components 1 and 4, the control technology review and source information, are contained in the accompanying construction permit application. No air quality analysis (preconstruction monitoring) is required since impacts of all pollutants are below federal de minimis levels, as documented in Section 2.3. Representative air quality data have not been collected in the vicinity of the site, so appropriate background concentrations were assumed as recommended in Ambient Monitoring Guidelines for Prevention of Significant Deterioration, EPA-450/2-78-019, May 1978. The remaining components are discussed in this PSD report.

7/30/81

## 2.0 SOURCE IMPACT ANALYSIS

### 2.1 EMISSIONS INVENTORY

Permitted point sources within 50 kilometers (km) of KU are listed in Table 1. The basis for this inventory was the 1980 edition of the Florida Air Permit Inventory System. SO<sub>2</sub> and PM emissions from Florida Power Corporation (FPC) Intercession City, St. Cloud Utilities, and the existing KU diesels were estimated from emission factors published in AP-42 (Tables 3.3.3-1, 3.3.2-1, and 3.3.1-2).

Short-term impacts were projected using listed emissions from all sources within 15 km and estimated emissions from the St. Cloud and FPC sources. Annual average impacts were projected using all sources within 15 km and all sources within 50 km with emissions greater than 40 tons per year of SO<sub>2</sub>, 25 tons per year of PM, or 40 tons per year of NO<sub>x</sub>.

### 2.2 DISPERSION MODELING AND METEOROLOGY

Critical meteorology and general location of highest, second-highest impacts were determined by 5-year CRSTER runs. Refined analyses including local source contribution and possible interactions were carried out with the ISCST model. Annual average concentrations were predicted with the ISCLT model.

Meteorological data input to the model consisted of hourly surface observations from Orlando International Airport combined with upper air observations from Tampa International Airport. Data collected during the 5-year period (1974-1978) were used.

The existing structure housing the diesels at KU is 38 feet high. The new stack will not be within the area of influence of this or any other structure with potential to cause downwash conditions.

Initial modeling showed that the critical meteorology and impact area were determined by existing diesel emissions. The 3-hour SO<sub>2</sub> impact was

less than 30 percent of the Ambient Air Quality Standard (AAQS) of 1,300 micrograms per cubic meter ( $\mu\text{g}/\text{m}^3$ ), so no refinements were made for this averaging time. Since both  $\text{SO}_2$  and PM emissions from the diesels were directly proportional to the fuel rate, refined modeling for these emissions was carried out at the same point; no separate 5-year total suspended particulate (TSP) run was made.

Estimated PM emissions from St. Cloud Utilities and FPC Intercession City were less than  $\text{SO}_2$  emissions from the same sources. Since the  $\text{SO}_2$  interaction analysis indicated the maximum  $\text{SO}_2$  contribution from these sources in the area of influence of KU was only  $4 \mu\text{g}/\text{m}^3$  and occurred in a noncritical direction, no TSP interaction modeling was performed.

$\text{CO}$ , beryllium (Be), and mercury (Hg) impacts of the new source were estimated by comparing emission rates (Table 2) and adjusting  $\text{SO}_2$  concentrations by the appropriate ratios.

Long-term  $\text{NO}_x$  concentrations were determined by assuming that the existing diesels are fired continuously with fuel oil and are in operation 5,260 hours per year.

### 2.3 AIR QUALITY IMPACTS

Table 2 shows the predicted highest, second-highest short-term and annual impacts that will result from KU and surrounding source emissions. Table 3 shows the effects of plume interaction with nearby major sources.

No violations of state or federal AAQS (Table 4) are predicted. Impacts due to the new source alone are below federal de minimis levels for all pollutants (Table 5), thus exempting the source from preconstruction monitoring.

Impacts for all pollutants except  $\text{SO}_2$  are below significance levels; when burning natural gas,  $\text{SO}_2$  impacts will also be below significance



levels. No TSP or SO<sub>2</sub> nonattainment areas are located within 100 km; no impacts on nonattainment areas are predicted.

#### 2.4 INCREMENTAL IMPACTS

Table 2 shows that all impacts due to the new source alone are below federal Class II increments (Table 6). The only other permitted increment-consuming sources in the vicinity are Stokely Van Camp and C.W. Bailey. Since no emissions were listed for these sources and the new source impacts are less than 20 percent of the allowable increment, no further incremental analysis was performed.

The KU site is 125 km from the nearest Class I area, the Chassahowitzka National Wildlife Refuge; no impact on this area is predicted.

### 3.0 ADDITIONAL IMPACTS ON SOILS, VEGETATION, AND VISIBILITY

#### 3.1 IMPACTS ON SOILS AND VEGETATION

Vegetation in the Kissimmee area is comprised of slash pine, saw palmetto, and wire grass. Improved pasture with bahia and carpet grass are also found. Soils are generally of the Leon-Plummer-Rutledge classification--thick acid sands, poorly drained due to a prevalent organic hardpan.

The projected highest, second-highest 3-hour SO<sub>2</sub> concentration of 392 ug/m<sup>3</sup> and annual mean concentration of 40 ug/m<sup>3</sup> (see Table 2) are below levels generally reported for damage to sensitive plant species. European studies by Heck and Brandt (1977) have found 1/2-hour levels of 3,406 ug/m<sup>3</sup> and long-term means of 393 ug/m<sup>3</sup> to approximate threshold levels for several species. According to studies by Heck and Brandt (1977), alfalfa, commonly thought to be one of the most SO<sub>2</sub>-sensitive species, has a 2-hour threshold level of at least 2,620 ug/m<sup>2</sup> and an 8-hour threshold of 655 ug/m<sup>2</sup>.

According to Jacobson & Hill (1970), PM is generally considered to have a relatively unimportant effect on vegetation. TSP impacts from the new source are predicted to be less than 1 ug/m<sup>3</sup>, 24-hour average.

Plant species classified as "sensitive" to NO<sub>2</sub>, such as pinto bean, cucumber, lettuce, and tomato, displayed injury when exposed to NO<sub>2</sub> levels of 3,760 to 4,960 ug/m<sup>3</sup> for a 2-hour period. Extremely resistant species, such as heath, were unaffected by an exposure of 1,900,000 ug/m<sup>3</sup> for 1 hour. Blue grass, orange tree plants, and rye are all classified as "intermediate" in resistance to NO<sub>2</sub> injury.

Jacobson and Hill (1970) found that  $\text{NO}_x$  concentration is more important to plant injury than the duration of exposure.  $\text{NO}_x$  impacts of the new source are predicted to be below  $1 \text{ ug}/\text{m}^3$ , annual average.

Based on these experimental results, the effects of  $\text{SO}_2$ ,  $\text{NO}_2$ , and PM emissions upon soils and vegetation are expected to be negligible.

### 3.2 VISIBILITY IMPACTS

The proposed source is not expected to have any significant impact on visibility in the immediate area. A Level I visibility screening analysis confirmed that no visibility impairment should occur in any Class I area. The absolute values of the three Level I contrast parameters (C1--plume contrast against the sky; C2--plume contrast against terrain; and C3--change in the sky/terrain contrast caused by primary and secondary aerosol) were well below 0.1, indicating that it is highly unlikely that the emissions source would cause adverse visibility impacts in Class I areas. Further analysis of potential visibility impacts was therefore unnecessary (EPA, 1980).

Table 1. Permitted Point Sources by County

Plant	Points	Plant Name	UTM Coordinates		Total Plant Emissions (tons per year)		
			E	N	PM	SO <sub>2</sub>	NO <sub>x</sub>
<u>Osceola County</u>							
01	04-08, 11-15	City of Kissimmee	460.1	3129.3	--	--	--
02	02, 04-08	City of St. Cloud	471.8	3124.9	--	--	--
03	01	Concrete Materials	473.7	3124.9	--	--	--
04	01	Concrete Materials	460.6	3129.8	--	--	--
05	01	Florida Dept. of Agriculture	458.7	3133.4	--	--	--
06	01	Kissimmee Community Hospital	459.9	3130.3	--	--	--
07	01	Stokely Van Camp	451.1	3125.8	--	--	--
08	01	Castcrete Corp.	460.1	3133.8	--	--	--
09	01	Rinker Materials	459.9	3130.1	--	--	--
10	02-03	St. Cloud Hospital	470.3	3124.1	--	--	--
11	01	C. W. Bailey	470.8	3133.8	--	--	--
14	01-10	Florida Power Corp.	446.3	3126.0	--	--	--
26	01	Transgulf Pipeline	462.0	3135.0	--	--	--
<u>Orange County</u>							
02	01	Basic Asphalt	455.9	3166.8	23	--	3
03	01-02	Bordens Dairy	460.6	3155.8	2	--	--
04	01	Buchanan	462.4	3155.1	6	--	--
06	01-04	Coca Cola	445.9	3173.6	10	13	1
08	01	V.A.	462.8	3155.6	--	--	--
09	01	Goodyear Recap	462.4	3154.4	--	--	--
10	01	Jensen's Furniture	464.0	3157.3	--	--	--
11	01-04	Florida Minerals & Materials	462.0	3149.0	44	--	--

Table 1. Permitted Point Sources by County (Continued, Page 2 of 6)

Plant	Points	Plant Name	UTM Coordinates		Total Plant Emissions (tons per year)		
			E	N	PM	SO <sub>2</sub>	NO <sub>x</sub>
<u>Orange County (Continued)</u>							
12	01, 02	Florida Minerals & Materials	444.5	3160	32	--	--
13	01, 02	Florida Minerals & Materials	470.7	3163.8	22	--	--
14	01	Florida Power Corp.	475.2	3156.8	1	31	9
15	01	University of Central Florida	480.5	3163.4	1	--	--
16	01	Kane Furniture	456.2	3158.2	1	--	--
17	01	Winter Park Memorial	467.9	3163.3	6	--	1
18	01	B. R. Tire Company	462.8	3154.3	--	--	--
19	01, 02	Houdaille	461.9	3141.9	1	--	--
20	01	Inland Materials	459.9	3160.9	26	--	--
21	01	Orlando Paving	453.8	3160.7	36	--	8
22	01	Quality Vaults	446.9	3158.8	1	--	--
23	01	Kissimmee Rock Industry	461.3	3157.9	43	--	--
24	01-03	Florida Rock Industry	459.2	3174.2	129	--	--
25	01, 02	Rinker Materials	458.3	3165	90	--	--
26	02-04	Martin Marietta	454.9	3146.5	2	--	7
27	01, 02	Lone Star	462.6	3154.2	44	--	--
28	01	Mercy Hospital	457.8	3159.7	1	--	12
29	01-06	GE Lamp	444.8	3174	1	--	1
30	01	Orlando Humane Society	457.5	3158.3	1	--	--
31	01	Orlando Paving Company	465.3	3145.9	42	10	8
32	01, 02	Owens Illinois	460.7	3142	52	--	--

8

Table 1. Permitted Point Sources by County (Continued, Page 3 of 6)

Plant	Points	Plant Name	UTM Coordinates		Total Plant Emissions (tons per year)		
			E	N	PM	SO <sub>2</sub>	NO <sub>x</sub>
<u>Orange County (Continued)</u>							
33	01-06	Orlando Utilities	463.3	3159	187	5,196	151
36	01	Rinker Materials	470.7	3163.9	40	--	--
37	01, 02	Rinker Materials	462.5	3154.3	92	--	--
38	02-06	Rinker Materials	450.6	3145.5	209	--	62
39	01, 03-04	Southern Fruit	462.9	3153.3	61	32	--
40	01-04	Southern Gold	458.7	3161.3	50	2	16
41	01	Dixie Asphalt	463.2	3143.0	50	9	20
42	01	Plymouth Citrus	455.2	3174.0	1	3	1
43	01-04	Aircraft Service	469	3146.2	--	--	--
44	01, 02	Boise Cascade Can Co.	460.7	3142.4	--	--	4
45	01-14	Martin Marietta Corp.	454.5	3146.2	15	1	--
46	01-08, 10-13, 16-18, 20-21	Martin Marietta Corp.	454.5	3146.2	51	--	--
47	01, 02	Martin Marietta Aerospace	455.2	3146.2	--	--	--
50	01-05	Carns Concrete Pipe	454.6	3167.8	69	--	--
53	01-03, 06, 08-14	Winter Garden Citrus	443.8	3159.6	303	39	68
54	01	City Chemicals Company	470.7	3163.9	1	--	--
56	01-06	Gould Battery	460.4	3142.3	14	--	--
58	01-03	Al Block Company	462.5	3155.0	141	--	1
59	01, 02	Medusa Cement Company	462.6	3154.7	69	--	--
60	01-08	Ashland Chemical Co.	460.4	3147.9	--	--	--
61	01-08	City of Orlando	456.3	3152.7	64	8	112
63	01, 02	Florida Hospital	463.8	3160.7	23	--	49

Table 1. Permitted Point Sources by County (Continued, Page 4 of 6)

Plant	Points	Plant Name	UTM Coordinates		Total Plant Emissions (tons per year)		
			E	N	PM	SO <sub>2</sub>	NO <sub>x</sub>
<u>Orange County (Continued)</u>							
65	01	Lucerne General Hospital	463.1	3153	--	--	--
66	01	West Orange Hospital	443.1	3160.0	3	1	1
67	01	Orlando Regional	463.1	3155.3	4	--	7
69	01-07, 11-13	Central Florida Pipeline	463.8	3143.8	--	--	--
70	01	Aaron Scrap Metals	454.8	3167.1	1	--	--
71	01-05	Florida Rock Industry	463.0	3145.5	119	--	4
74	01-03, 05	Citrus Central Metals	445.6	3173.8	9	--	--
77	01	Macasphalt Corporation	450.6	3145.4	4	1	--
78	01, 02	Frito Lay	459.1	3161	14	--	6
79	01-06	Naval Training Center	467.8	3160	10	--	6
80	01	Harry L. Hanes	463.8	3162.4	1	--	--
<u>Polk County</u>							
01	05	Alcoma Packing	451.6	3085.5	65	--	--
07	01-03	Owens Illinois	423.4	3102.8	93	--	--
14	01-04	Standard Sand Silica	441.5	3118.2	125	240	--
17	01-05	Swift Agrichem	427.9	3097.4	114	--	--
22	01, 02	Owens Illinois	423.4	3102.8	11	--	3
23	01-03	Coca Cola	421.3	3103.6	123	--	72
29	01	Hunt Brothers	445.3	3083	--	2	1

Table 1. Permitted Point Sources by County (Continued, Page 5 of 6)

Plant	Points	Plant Name	UTM Coordinates		Total Plant Emissions (tons per year)		
			E	N	PM	SO <sub>2</sub>	NO <sub>x</sub>
<u>Polk County (Continued)</u>							
33	01, 02	Bordo Citrus	438	3109	100	--	--
37	01	Adams Packing	421.7	3104.2	34	--	--
61	01-05	Holly Hill Fruit	441	3115.4	77	--	--
71	01-03	Uranium Recovery	465	3080	6	--	--
76	01	International Paper	421.7	3104.3	--	--	--
82	01	Macasphalt	423.1	3101.5	49	--	--
88	01	Morris Canning	428.1	3103.4	--	--	--
90	03	Florida Distillers	428	3108.1	--	--	--
96	01, 02	Jacquin Florida Dist.	421.4	3102.9	--	--	--
103	01	Kandors Thriftway	428.1	3100.6	--	--	--
105	01	Dundee Citrus	438.8	3099.9	--	--	--
108	01, 02	Concrete Materials	439.4	3109.4	--	--	--
113	02, 03	Gall Silica Mining	450.2	3085.4	--	--	--
115	01	Phoenix Industry	428	3096	--	--	--
122	01	Monier Resources	423.5	3104.6	--	--	--
124	01	Duncan Browning	422.8	3104.7	--	--	--
<u>Seminole County</u>							
01	01	Sunrise Materials	469.8	3177.8	4	--	--
02	01-04	Central Florida Drum	474.7	3173.4	13	4	3
04	01, 02	Inland Materials	466	3172.1	33	--	--
05	01	Kissam Concrete	465.1	3170.4	38	--	--



Table 1. Permitted Point Sources by County (Continued, Page 6 of 6)

Plant	Points	Plant Name	UTM Coordinates		Total Plant Emissions (tons per year)		
			E	N	PM	SO <sub>2</sub>	NO <sub>x</sub>
<u>Seminole County (Continued)</u>							
06	01-03	Coca Cola	459.4	3170.5	52	4	26
07	01	L.D Plante Inc.	474.5	3176.2	4	34	12
08	01	Lone Star	465.8	3172	18	--	--
19	01	Macasphalt Corp.	470.2	3175.8	8	13	3
<u>Lake County</u>							
11	01-03	Clermont Builders	424.4	3159	33	--	--
13	01	S. Lake Memorial Hospital	424.9	3158.6	--	--	--
31	01	Tower Chemical Co.	433	3158.2	1	--	--

NOTE: Blanks indicate no allowable or actual emissions listed in APIS 1980.

Source: ESE, 1981.  
APIS, 1980.

Table 2. Air Quality Impacts ( $\mu\text{g}/\text{m}^3$ )\*

	SO <sub>2</sub>			TSP		NO <sub>x</sub>	CO	Hg and Be
	24-hour	3-hour	Annual	24-hour	Annual	Annual	3-hour	24-hour
All Sources	135	372	20	81	12	69	—	—
<u>Plus Background</u>	<u>20</u>	<u>20</u>	<u>20</u>	<u>40</u>	<u>40</u>	<u>20</u>	—	—
	155	392	40	121	52	89	—	—
Day (period)/year	325/78	278(5)/77	—	—	—	—	—	—
Direction (degrees)/ distance (m)	180/500	240/300	—	—	—	—	—	—
<u>New Source</u>	10	44	<1	<1†	<1†	<1†	1.4	<0.0005
Day (period)/year	279/74	103(4)/78	—	—	—	—	—	—
Direction (degrees)/ distance (m)	180/4,000	360/2,000	—	—	—	—	—	—

\* Highest, second-highest for 24-hour and 3-hour averaging times.

† Calculated as ratio from SO<sub>2</sub> runs.

Source: ESE, 1981.

Table 3. Source Interactions

Interacting Source	Direction (deg.)	Day/Year	SO <sub>2</sub> Concentration (ug/m <sup>3</sup> )	
			KU Only	KU with Interaction
City of St. Cloud	290	113/78	72	76
FPC Intercession City	75	158/75	69	69

Source: ESE, 1981.

Table 4. National and State of Florida AAQS

Pollutant	Averaging Time	National		Florida
		Primary Standard	Secondary Standard	
Suspended PM	Annual Geometric Mean	75 ug/m <sup>3</sup>	60 ug/m <sup>3</sup>	60 ug/m <sup>3</sup>
	24-Hour Maximum*	260 ug/m <sup>3</sup>	150 ug/m <sup>3</sup>	150 ug/m <sup>3</sup>
SO <sub>2</sub>	Annual Arithmetic Mean	80 ug/m <sup>3</sup>	NA†	60 ug/m <sup>3</sup>
	24-Hour Maximum*	365 ug/m <sup>3</sup>	NA†	260 ug/m <sup>3</sup>
	3-Hour Maximum*	NA†	1,300 ug/m <sup>3</sup>	1,300 ug/m <sup>3</sup>
CO	8-Hour Maximum*	10 mg/m <sup>3</sup>	10 mg/m <sup>3</sup>	10 mg/m <sup>3</sup>
	1-Hour Maximum*	40 mg/m <sup>3</sup>	40 mg/m <sup>3</sup>	40 mg/m <sup>3</sup>
HC	3-Hour Maximum* (6 to 9 A.M.)	160 ug/m <sup>3</sup>	160 ug/m <sup>3</sup>	160 ug/m <sup>3</sup>
NO <sub>2</sub>	Annual Arithmetic Mean	100 ug/m <sup>3</sup>	100 ug/m <sup>3</sup>	100 ug/m <sup>3</sup>
Ozone	1-Hour Maximum*	235 ug/m <sup>3</sup>	235 ug/m <sup>3</sup>	160 ug/m <sup>3</sup>
Lead	Calendar Quarter Arithmetic Mean	1.5 ug/m <sup>3</sup>	1.5 ug/m <sup>3</sup>	NA†

\* Maximum concentration not to be exceeded more than once per year.

† No standard exists.

Sources: 40 CFR Part 50, 1980.  
FAC Chapter 17-2.

Table 5. Significant Emission Rates and De Minimis Air Quality Impact Levels

Pollutant	<u>De Minimis</u> Emission Rate (Tons per year)	<u>De Minimis</u> Air Quality Impact Level (For Use In Determining Monitoring) ( $\mu\text{g}/\text{m}^3$ )
CO	100	575, 8-hour average
NO <sub>2</sub>	40	14, annual
Total Suspended Particulates	25	10, 24-hour
SO <sub>2</sub>	40	13, 24-hour
Ozone* (volatile organic compounds)	40	
Lead	0.6	0.1, 3-month
Hg	0.1	0.25, 24-hour
Be	0.0004	0.0005, 24-hour
Asbestos†	0.007	
Fluorides	3	0.25, 24-hour
Sulfuric Acid Mist†	7	
Vinyl Chloride	1	15, maximum value
Total Reduced Sulfur	10	10, 1-hour
Hydrogen Sulfide	10	0.04, 1-hour
Reduced Sulfur Compounds	10	10, 1-hour
Inorganic Arsenic†	0	
Radionuclides†	0	
Benzene†	0	
Ethylene Dichloride†	0	
Polyvinyl Chloride†	0	

\* A de minimis air quality level is not given for ozone. However, a plant which is subject to PSD review and has a net increase of 100 tons per year of volatile organic compounds would be required to perform an ambient air quality analysis.

† No measurement method or de minimis air quality impact level has been established.

Source: Federal Register, Vol. 45, No. 154, 1980.

Table 6. Federal and State of Florida PSD Allowable Increments (ug/m<sup>3</sup>)

Pollutant/Averaging Time	Class		
	I	II	III
<u>PM</u>			
Annual Geometric Mean	5	19	37
24-Hour Maximum*	10	37	75
<u>SO<sub>2</sub></u>			
Annual Arithmetic Mean	2	20	40
24-Hour Maximum*	5	91	182
3-Hour Maximum*	25	512	700

\* Maximum concentration not to be exceeded more than once per year.

Sources: Public Law 95-95, Clean Air Act Amendments of 1977.  
Federal Register, Vol. 43, No. 118, June 19, 1978.

REFERENCES

- Heck, W.W., and Brandt, C.S. 1977. Air Pollution, Effects on Vegetation: Native Crops, Forests. In: Air Pollution. A.C. Stern, Editor. Vol. II. The Effects of Air Pollution. Academic Press, Inc., New York.
- Jacobson, J.L., and Hill, A.C. 1970. Recognition of Air Pollution Injury to Vegetation: A Pictorial Atlas. Air Pollution Control Association, Pittsburgh, Pennsylvania.
- U.S. Environmental Protection Agency, Office of Air Quality Planning and Standards. 1980. Workbook for Estimating Visibility Impairment. RTP No. 27711. July 1980.
- U.S. Environmental Protection Agency, Office of Air Quality Planning and Standards. 1978a. Ambient Air Guidelines for Prevention of Significant Deterioration. EPA-450/2-78-019.
- U.S. Environmental Protection Agency, Office of Air Quality Planning and Standards. 1978b. Guideline on Air Quality Models. EPA-450/2-78-027.
- U.S. Environmental Protection Agency, Office of Air Quality Planning and Standards. 1978c. Guidelines for Determining Best Available Control Technology (BACT).
- U.S. Environmental Protection Agency, Office of Air Quality Planning and Standards. 1978d. Technical Support for Determination of Good Engineering Practice Stack Height. Research Triangle Park, North Carolina.

DER

SEP 9 1983

BAQM

APPENDICES TO

PREVENTION OF SIGNIFICANT DETRIORATION (PSD) REPORT

FOR THE PROPOSED COMBUSTION TURBINE

AT KISSIMEE UTILITIES, OSCEOLA COUNTY, FLORIDA





APPENDICES TO

PREVENTION OF SIGNIFICANT DETERIORATION (PSD) REPORT  
FOR THE PROPOSED COMBUSTION TURBINE  
AT KISSIMMEE UTILITIES, OSCEOLA COUNTY, FLORIDA

NEW SOURCE ONLY



RING DISTANCES(KM)= 0.50 1.00 1.50 2.00 2.50

STACK # 1--UNIT 1

STACK	MONTH	EMISSION RATE (GMS/SEC)	HEIGHT (METERS)	DIAMETER (METERS)	EXIT VELOCITY (M/SEC)	TEMP (DEG.K)	VOLUMETRIC FLOW (M**3/SEC)
1	ALL	48.9000	9.14	2.44	38.03	422.00	177.83

2

PLANT NAME: KISS. UTILITIES      POLLUTANT: SO2      AIR QUALITY UNITS: GM/M\*\*3  
 MAXIMUM MEAN CONC= 5.0967E-07      DIRECTION= 23      DISTANCE= 2.5 KM  
 YEAR= 74

DIR	ANNUAL MEAN CONCENTRATION AT EACH RECEPTOR					
	RANGE	0.5 KM	1.0 KM	1.5 KM	2.0 KM	2.5 KM
1		2.84368E-09	1.59018E-07	3.34371E-07	4.11159E-07	4.26982E-07
2		3.57846E-09	1.59577E-07	2.97251E-07	3.51085E-07	3.55914E-07
3		2.91020E-09	1.29261E-07	2.32907E-07	2.78502E-07	2.87267E-07
4		3.15005E-09	1.35838E-07	2.41694E-07	2.90414E-07	3.03120E-07
5		5.19749E-09	1.67443E-07	2.85680E-07	3.31487E-07	3.39523E-07
6		4.85075E-09	1.64990E-07	2.76924E-07	3.26314E-07	3.42714E-07
7		3.74400E-09	1.62117E-07	2.68555E-07	3.13953E-07	3.24947E-07
8		3.38412E-09	1.52095E-07	2.42468E-07	2.80831E-07	2.89958E-07
9		4.03271E-09	1.24413E-07	2.04427E-07	2.49376E-07	2.69610E-07
10		5.29352E-09	1.17983E-07	2.01997E-07	2.44560E-07	2.60890E-07
11		7.99045E-09	1.42110E-07	2.38511E-07	2.84362E-07	3.01671E-07
12		8.50632E-09	1.67345E-07	2.73448E-07	3.23243E-07	3.40971E-07
13		5.84270E-09	1.57472E-07	2.60073E-07	3.06026E-07	3.20914E-07
14		3.57574E-09	1.42851E-07	2.79010E-07	3.42252E-07	3.60709E-07
15		1.96719E-09	1.06861E-07	2.12402E-07	2.63141E-07	2.82016E-07
16		1.03693E-09	1.07574E-07	2.19102E-07	2.67825E-07	2.82798E-07
17		6.41573E-10	1.28754E-07	2.63316E-07	3.28600E-07	3.58005E-07
18		8.29210E-10	1.50305E-07	3.25922E-07	4.36041E-07	5.05749E-07
19		1.39868E-09	1.29113E-07	2.42314E-07	2.93480E-07	3.16358E-07
20		3.15491E-09	1.38188E-07	2.72681E-07	3.55303E-07	4.04619E-07
21		3.81801E-09	1.58984E-07	3.06348E-07	3.77960E-07	4.04288E-07
22		5.58387E-09	1.88254E-07	3.66772E-07	4.54620E-07	4.90625E-07
23		6.59359E-09	1.85838E-07	3.75974E-07	4.70937E-07	5.09667E-07
24		4.88433E-09	1.59589E-07	3.36766E-07	4.26898E-07	4.60844E-07
25		2.72423E-09	1.43175E-07	3.04689E-07	3.92122E-07	4.28806E-07
26		3.21332E-09	1.81785E-07	3.25213E-07	3.79937E-07	3.94146E-07
27		3.85841E-09	1.96229E-07	3.55181E-07	4.25147E-07	4.48371E-07
28		3.49072E-09	1.69745E-07	3.07955E-07	3.73941E-07	4.00112E-07
29		3.88591E-09	1.51870E-07	2.79463E-07	3.39694E-07	3.67138E-07
30		6.66249E-09	1.59146E-07	3.03675E-07	3.75904E-07	4.09983E-07
31		9.42705E-09	1.71373E-07	3.15951E-07	3.80096E-07	4.02877E-07
32		1.36237E-08	2.09573E-07	3.44330E-07	3.83174E-07	3.88192E-07
33		8.94711E-09	1.98916E-07	3.34102E-07	3.64348E-07	3.59516E-07
34		4.44734E-09	1.66778E-07	3.25190E-07	3.99348E-07	4.30064E-07
35		3.37589E-09	1.59378E-07	3.19772E-07	3.81541E-07	3.95132E-07
36		2.60382E-09	1.65070E-07	3.70406E-07	4.67142E-07	5.00561E-07

3

PLANT NAME: KISS. UTILITIES

POLLUTANT: SO2

AIR QUALITY UNITS: GM/M\*\*3

MAXIMUM MEAN CONC= 6.5267E-07 DIRECTION= 18 DISTANCE= 5.0 KM

YEAR= 74

DIR	RANGE	ANNUAL MEAN CONCENTRATION AT EACH RECEPTOR				
		3.0 KM	3.5 KM	4.0 KM	4.5 KM	5.0 KM
1		4.21042E-07	4.07019E-07	3.92594E-07	3.77320E-07	3.63597E-07
2		3.45199E-07	3.30619E-07	3.17818E-07	3.05875E-07	2.95956E-07
3		2.84463E-07	2.78447E-07	2.73168E-07	2.67200E-07	2.62197E-07
4		3.03053E-07	2.97760E-07	2.92506E-07	2.86456E-07	2.81171E-07
5		3.34724E-07	3.24506E-07	3.13952E-07	3.02597E-07	2.92136E-07
6		3.47592E-07	3.46870E-07	3.45009E-07	3.40376E-07	3.35691E-07
7		3.23464E-07	3.16771E-07	3.09275E-07	2.99956E-07	2.91291E-07
8		2.89921E-07	2.86450E-07	2.82949E-07	2.77766E-07	2.72985E-07
9		2.81017E-07	2.87534E-07	2.92084E-07	2.92540E-07	2.91871E-07
10		2.67392E-07	2.68087E-07	2.66941E-07	2.63216E-07	2.58910E-07
11		3.09200E-07	3.11532E-07	3.12085E-07	3.09003E-07	3.05502E-07
12		3.46341E-07	3.44963E-07	3.41712E-07	3.35787E-07	3.30065E-07
13		3.22978E-07	3.17843E-07	3.10309E-07	3.00364E-07	2.90461E-07
14		3.60780E-07	3.52491E-07	3.42102E-07	3.29604E-07	3.17325E-07
15		2.86542E-07	2.83706E-07	2.78317E-07	2.70578E-07	2.62580E-07
16		2.83703E-07	2.78397E-07	2.71693E-07	2.63458E-07	2.55971E-07
17		3.71481E-07	3.76206E-07	3.77617E-07	3.74242E-07	3.70112E-07
18		5.55378E-07	5.90540E-07	6.19288E-07	6.37523E-07	6.52673E-07
19		3.27601E-07	3.32362E-07	3.35344E-07	3.34938E-07	3.34284E-07
20		4.39828E-07	4.65446E-07	4.86998E-07	5.00538E-07	5.11847E-07
21		4.15324E-07	4.20035E-07	4.24371E-07	4.25493E-07	4.26890E-07
22		5.08244E-07	5.16978E-07	5.24104E-07	5.25849E-07	5.27215E-07
23		5.27429E-07	5.34722E-07	5.39666E-07	5.39411E-07	5.38748E-07
24		4.73316E-07	4.76098E-07	4.76925E-07	4.73982E-07	4.71435E-07
25		4.46122E-07	4.54659E-07	4.61344E-07	4.63675E-07	4.66035E-07
26		3.99257E-07	4.02593E-07	4.07712E-07	4.10341E-07	4.13807E-07
27		4.54257E-07	4.52151E-07	4.48536E-07	4.41909E-07	4.36065E-07
28		4.10041E-07	4.10976E-07	4.08939E-07	4.02797E-07	3.96176E-07
29		3.81479E-07	3.87103E-07	3.89123E-07	3.86237E-07	3.82246E-07
30		4.27554E-07	4.34790E-07	4.38458E-07	4.37803E-07	4.36863E-07
31		4.09763E-07	4.08980E-07	4.06456E-07	4.00488E-07	3.94600E-07
32		3.84742E-07	3.78754E-07	3.74134E-07	3.68223E-07	3.63620E-07
33		3.47647E-07	3.35187E-07	3.25439E-07	3.16122E-07	3.08719E-07
34		4.42670E-07	4.44574E-07	4.43660E-07	4.38786E-07	4.33559E-07
35		3.94349E-07	3.88223E-07	3.82304E-07	3.74665E-07	3.67990E-07
36		5.12572E-07	5.14903E-07	5.15330E-07	5.11651E-07	5.07774E-07

PLANT NAME: KISS. UTILITIES

POLLUTANT: SO2

AIR QUALITY UNITS: GM/M\*\*3

MAXIMUM MEAN CONC= 6.8753E-07

DIRECTION= 36 DISTANCE= 2.5 KM

YEAR= 75

ANNUAL MEAN CONCENTRATION AT EACH RECEPTOR

DIR	RANGE	0.5 KM	1.0 KM	1.5 KM	2.0 KM	2.5 KM
1		6.46801E-09	2.47578E-07	4.59801E-07	5.33091E-07	5.33952E-07
2		6.46993E-09	2.00286E-07	3.76967E-07	4.42400E-07	4.44933E-07
3		5.94187E-09	1.65679E-07	3.14478E-07	3.67066E-07	3.65161E-07
4		5.19371E-09	1.82852E-07	3.34047E-07	3.91192E-07	3.97280E-07
5		5.40605E-09	2.10165E-07	3.63943E-07	4.28132E-07	4.42409E-07
6		4.66709E-09	1.67614E-07	2.81801E-07	3.29953E-07	3.42073E-07
7		7.47060E-09	1.58737E-07	2.78085E-07	3.29027E-07	3.44245E-07
8		1.08951E-08	1.24538E-07	2.33945E-07	2.84613E-07	2.98979E-07
9		8.09841E-09	9.72680E-08	1.90671E-07	2.46779E-07	2.74428E-07
10		4.17990E-09	1.13471E-07	2.14890E-07	2.57919E-07	2.67920E-07
11		3.17444E-09	1.62905E-07	3.14331E-07	3.79466E-07	4.00468E-07
12		3.87107E-09	1.89242E-07	3.61167E-07	4.41969E-07	4.66443E-07
13		4.12364E-09	1.88538E-07	3.60346E-07	4.43721E-07	4.70176E-07
14		3.12729E-09	1.68137E-07	3.23615E-07	3.90276E-07	4.05933E-07
15		2.34039E-09	1.21972E-07	2.27599E-07	2.75511E-07	2.92926E-07
16		1.83318E-09	1.10931E-07	2.26410E-07	2.91134E-07	3.22873E-07
17		1.64780E-09	1.16904E-07	2.29480E-07	2.85752E-07	3.13616E-07
18		1.39128E-09	1.12679E-07	2.37063E-07	3.19004E-07	3.77667E-07
19		1.19400E-09	8.51304E-08	1.80388E-07	2.37278E-07	2.69953E-07
20		1.34851E-09	8.98986E-08	2.08611E-07	2.83704E-07	3.27782E-07
21		1.74495E-09	1.21003E-07	2.73326E-07	3.58441E-07	3.97674E-07
22		2.60094E-09	1.54847E-07	3.28457E-07	4.15615E-07	4.54813E-07
23		3.33454E-09	1.93597E-07	4.24721E-07	5.46108E-07	6.00977E-07
24		3.76268E-09	2.05968E-07	4.20028E-07	5.10862E-07	5.39582E-07
25		3.47328E-09	1.62231E-07	3.05710E-07	3.72261E-07	4.03125E-07
26		3.81215E-09	1.46581E-07	2.80079E-07	3.49597E-07	3.73664E-07
27		4.28147E-09	1.92983E-07	3.84578E-07	4.90441E-07	5.40979E-07
28		3.43814E-09	1.93077E-07	3.67690E-07	4.36519E-07	4.52578E-07
29		2.42773E-09	1.71416E-07	3.33298E-07	3.93072E-07	4.03898E-07
30		2.22863E-09	1.80322E-07	3.68542E-07	4.58831E-07	5.00342E-07
31		2.94562E-09	1.75812E-07	3.29466E-07	3.88903E-07	4.00237E-07
32		3.89520E-09	1.74943E-07	3.10024E-07	3.67475E-07	3.88774E-07
33		6.24315E-09	2.31592E-07	4.11300E-07	4.82245E-07	4.99258E-07
34		8.31010E-09	2.62580E-07	4.87060E-07	5.79823E-07	6.00832E-07
35		6.87683E-09	2.40331E-07	4.22532E-07	4.91216E-07	5.06163E-07
36		5.72319E-09	2.73287E-07	5.30210E-07	6.48296E-07	6.87530E-07

5

PLANT NAME: KISS. UTILITIES

POLLUTANT: SO2 AIR QUALITY UNITS: GM/M\*\*3

MAXIMUM MEAN CONC= 6.9604E-07 DIRECTION= 36 DISTANCE= 3.0 KM

YEAR= 75

DIR	RANGE	ANNUAL MEAN CONCENTRATION AT EACH RECEPTOR				
		3.0 KM	3.5 KM	4.0 KM	4.5 KM	5.0 KM
1		5.12388E-07	4.84915E-07	4.59952E-07	4.36619E-07	4.16706E-07
2		4.27819E-07	4.06330E-07	3.87422E-07	3.69528E-07	3.54491E-07
3		3.45695E-07	3.22127E-07	3.00557E-07	2.80912E-07	2.64303E-07
4		3.88067E-07	3.74310E-07	3.61398E-07	3.47928E-07	3.36038E-07
5		4.39552E-07	4.28969E-07	4.16831E-07	4.02227E-07	3.88002E-07
6		3.42231E-07	3.37636E-07	3.32524E-07	3.25121E-07	3.18178E-07
7		3.46532E-07	3.42886E-07	3.37900E-07	3.30152E-07	3.22645E-07
8		2.98748E-07	2.91891E-07	2.83617E-07	2.73800E-07	2.64486E-07
9		2.88831E-07	2.95663E-07	2.99572E-07	2.99038E-07	2.97642E-07
10		2.66389E-07	2.60095E-07	2.53449E-07	2.45706E-07	2.38718E-07
11		4.07040E-07	4.06077E-07	4.03780E-07	3.98409E-07	3.92940E-07
12		4.67884E-07	4.57409E-07	4.43873E-07	4.27732E-07	4.11957E-07
13		4.73282E-07	4.64852E-07	4.53322E-07	4.38270E-07	4.23340E-07
14		4.01127E-07	3.86446E-07	3.69400E-07	3.50723E-07	3.32869E-07
15		2.99191E-07	2.99129E-07	2.96632E-07	2.90577E-07	2.83838E-07
16		3.41687E-07	3.52824E-07	3.60273E-07	3.61494E-07	3.60838E-07
17		3.33280E-07	3.48486E-07	3.61727E-07	3.68730E-07	3.74118E-07
18		4.27246E-07	4.67443E-07	5.01246E-07	5.22754E-07	5.39546E-07
19		2.93464E-07	3.10765E-07	3.25097E-07	3.33219E-07	3.39437E-07
20		3.62380E-07	3.91933E-07	4.20525E-07	4.42690E-07	4.63171E-07
21		4.21540E-07	4.38539E-07	4.54385E-07	4.65024E-07	4.74931E-07
22		4.81819E-07	5.04683E-07	5.27296E-07	5.42203E-07	5.55429E-07
23		6.32755E-07	6.52922E-07	6.69994E-07	6.78833E-07	6.86279E-07
24		5.49220E-07	5.50599E-07	5.51263E-07	5.47815E-07	5.44660E-07
25		4.24443E-07	4.40418E-07	4.55046E-07	4.63468E-07	4.70347E-07
26		3.80981E-07	3.81860E-07	3.82429E-07	3.80365E-07	3.78693E-07
27		5.71030E-07	5.89336E-07	6.02808E-07	6.06978E-07	6.08256E-07
28		4.53311E-07	4.48277E-07	4.43065E-07	4.34981E-07	4.27487E-07
29		4.01985E-07	3.96580E-07	3.92006E-07	3.85123E-07	3.78947E-07
30		5.26289E-07	5.42593E-07	5.55324E-07	5.60153E-07	5.62798E-07
31		3.97954E-07	3.92036E-07	3.87348E-07	3.81173E-07	3.76560E-07
32		4.00601E-07	4.07810E-07	4.13688E-07	4.14135E-07	4.13816E-07
33		4.98293E-07	4.89639E-07	4.80545E-07	4.68461E-07	4.57005E-07
34		5.94795E-07	5.76763E-07	5.57362E-07	5.36409E-07	5.17495E-07
35		5.03119E-07	4.91458E-07	4.78772E-07	4.63799E-07	4.49482E-07
36		6.96041E-07	6.89124E-07	6.78750E-07	6.63046E-07	6.47244E-07



PLANT NAME: KISS. UTILITIES

POLLUTANT: SO2 AIR QUALITY UNITS: GM/M\*\*3

MAXIMUM MEAN CONC= 7.0338E-07 DIRECTION= 18 DISTANCE= 2.5 KM

YEAR= 76

DIR	ANNUAL MEAN CONCENTRATION AT EACH RECEPTOR					
	RANGE	0.5 KM	1.0 KM	1.5 KM	2.0 KM	2.5 KM
1		3.70035E-09	2.17201E-07	3.96011E-07	4.52181E-07	4.55981E-07
2		3.51158E-09	1.79626E-07	3.44909E-07	4.07411E-07	4.20003E-07
3		4.60094E-09	1.66481E-07	3.14587E-07	3.64856E-07	3.65131E-07
4		3.87624E-09	1.55738E-07	2.84173E-07	3.31344E-07	3.41696E-07
5		5.04742E-09	1.89030E-07	3.48035E-07	4.15531E-07	4.34527E-07
6		5.46012E-09	1.80106E-07	3.30862E-07	3.88649E-07	4.00534E-07
7		4.72089E-09	1.34712E-07	2.45965E-07	2.86914E-07	2.95527E-07
8		6.00962E-09	1.20598E-07	2.35929E-07	2.91871E-07	3.10264E-07
9		7.81973E-09	1.52782E-07	2.98930E-07	3.82725E-07	4.24670E-07
10		2.93997E-09	1.09266E-07	2.15639E-07	2.75958E-07	3.08993E-07
11		1.70222E-09	9.84401E-08	1.94555E-07	2.50339E-07	2.82592E-07
12		3.36418E-09	1.35455E-07	2.65864E-07	3.40693E-07	3.79167E-07
13		5.27805E-09	1.63869E-07	3.11715E-07	3.97110E-07	4.33357E-07
14		5.67739E-09	1.63677E-07	3.04399E-07	3.92914E-07	4.30561E-07
15		4.40259E-09	1.36838E-07	2.40873E-07	3.12043E-07	3.45697E-07
16		3.34676E-09	1.11247E-07	2.03859E-07	2.81952E-07	3.37911E-07
17		2.93623E-09	1.20041E-07	2.39053E-07	3.31481E-07	3.99682E-07
18		2.94320E-09	1.62733E-07	3.81756E-07	5.64864E-07	7.03376E-07
19		5.91018E-09	1.56517E-07	3.18635E-07	4.30625E-07	4.98204E-07
20		1.29111E-08	1.97859E-07	3.69345E-07	4.85620E-07	5.49957E-07
21		9.06522E-09	1.70209E-07	2.83387E-07	3.63112E-07	4.07354E-07
22		1.26224E-08	1.89755E-07	3.03262E-07	3.71414E-07	4.08962E-07
23		7.69839E-09	1.80808E-07	3.22440E-07	3.99625E-07	4.45393E-07
24		2.40006E-09	1.59432E-07	3.18450E-07	4.04653E-07	4.49424E-07
25		3.46958E-09	1.57772E-07	2.99390E-07	3.59011E-07	3.75221E-07
26		5.13835E-09	1.62955E-07	2.84978E-07	3.39745E-07	3.59427E-07
27		5.02540E-09	1.77209E-07	3.24963E-07	3.96121E-07	4.27956E-07
28		4.46325E-09	1.80252E-07	3.30736E-07	3.84132E-07	3.90716E-07
29		4.04920E-09	1.76378E-07	3.24305E-07	3.87419E-07	4.11738E-07
30		5.13401E-09	1.79551E-07	3.30204E-07	4.09064E-07	4.52558E-07
31		8.48516E-09	1.76651E-07	3.25556E-07	3.95365E-07	4.24279E-07
32		9.78577E-09	1.91092E-07	3.43025E-07	4.02218E-07	4.19543E-07
33		6.34514E-09	1.71061E-07	2.99938E-07	3.55564E-07	3.75420E-07
34		5.76036E-09	2.02602E-07	3.54729E-07	4.20687E-07	4.42452E-07
35		5.82121E-09	2.08404E-07	3.38571E-07	3.83159E-07	3.92409E-07
36		5.61147E-09	2.45528E-07	4.52327E-07	5.49977E-07	5.93616E-07

PLANT NAME: KISS. UTILITIES                      POLLUTANT: SO2                      AIR QUALITY UNITS: GM/M\*\*3  
 MAXIMUM MEAN CONC= 9.5880E-07                      DIRECTION= 18                      DISTANCE= 5.0 KM  
 YEAR= 76

DIR	ANNUAL MEAN CONCENTRATION AT EACH RECEPTOR					
	RANGE	3.0 KM	3.5 KM	4.0 KM	4.5 KM	5.0 KM
1		4.46671E-07	4.33525E-07	4.21988E-07	4.09143E-07	3.97549E-07
2		4.16237E-07	4.05094E-07	3.92923E-07	3.79001E-07	3.65570E-07
3		3.49100E-07	3.28252E-07	3.08720E-07	2.90425E-07	2.74570E-07
4		3.41063E-07	3.35233E-07	3.28779E-07	3.20197E-07	3.11676E-07
5		4.35105E-07	4.26850E-07	4.16617E-07	4.03317E-07	3.90180E-07
6		3.97859E-07	3.89853E-07	3.81796E-07	3.71666E-07	3.62271E-07
7		2.94669E-07	2.90468E-07	2.86772E-07	2.81824E-07	2.77623E-07
8		3.10981E-07	3.02745E-07	2.92195E-07	2.79833E-07	2.67954E-07
9		4.45083E-07	4.51396E-07	4.52121E-07	4.46514E-07	4.39172E-07
10		3.29604E-07	3.41152E-07	3.48282E-07	3.48978E-07	3.47517E-07
11		3.05118E-07	3.19751E-07	3.30368E-07	3.34722E-07	3.36609E-07
12		4.01901E-07	4.13596E-07	4.19727E-07	4.18506E-07	4.14730E-07
13		4.45304E-07	4.42387E-07	4.33708E-07	4.20456E-07	4.06081E-07
14		4.41158E-07	4.35643E-07	4.23604E-07	4.06716E-07	3.88950E-07
15		3.58692E-07	3.58967E-07	3.54011E-07	3.44576E-07	3.34115E-07
16		3.79914E-07	4.08368E-07	4.28844E-07	4.39275E-07	4.45158E-07
17		4.52799E-07	4.89640E-07	5.15787E-07	5.27670E-07	5.33021E-07
18		8.07842E-07	8.76542E-07	9.23971E-07	9.47224E-07	9.58798E-07
19		5.37007E-07	5.51956E-07	5.56053E-07	5.51284E-07	5.42920E-07
20		5.85018E-07	5.99060E-07	6.04591E-07	6.01353E-07	5.95265E-07
21		4.32052E-07	4.42802E-07	4.48177E-07	4.47401E-07	4.44926E-07
22		4.31760E-07	4.43466E-07	4.50943E-07	4.52416E-07	4.52300E-07
23		4.80589E-07	5.06280E-07	5.27237E-07	5.38883E-07	5.46898E-07
24		4.78300E-07	4.96510E-07	5.10089E-07	5.15233E-07	5.17611E-07
25		3.78863E-07	3.78721E-07	3.79776E-07	3.79041E-07	3.79195E-07
26		3.67911E-07	3.71033E-07	3.73272E-07	3.72076E-07	3.70762E-07
27		4.51190E-07	4.69800E-07	4.87025E-07	4.97293E-07	5.05271E-07
28		3.84517E-07	3.73956E-07	3.64002E-07	3.52939E-07	3.42693E-07
29		4.21042E-07	4.20421E-07	4.16598E-07	4.09096E-07	4.00931E-07
30		4.80996E-07	4.98201E-07	5.10844E-07	5.15864E-07	5.18571E-07
31		4.38305E-07	4.43695E-07	4.46166E-07	4.42994E-07	4.38403E-07
32		4.23103E-07	4.19899E-07	4.15377E-07	4.07757E-07	4.00137E-07
33		3.80713E-07	3.77737E-07	3.72172E-07	3.63185E-07	3.54005E-07
34		4.48188E-07	4.46596E-07	4.44464E-07	4.39843E-07	4.35557E-07
35		3.92444E-07	3.89785E-07	3.88461E-07	3.84793E-07	3.81939E-07
36		6.19360E-07	6.54803E-07	6.47816E-07	6.53123E-07	6.56693E-07

PLANT NAME: KISS. UTILITIES      POLLUTANT: SO2      AIR QUALITY UNITS: GM/M\*\*3  
 MAXIMUM MEAN CONC= 8.0513E-07      DIRECTION= 36      DISTANCE= 2.5 KM  
 YEAR= 77

DIR	ANNUAL MEAN CONCENTRATION AT EACH RECEPTOR					
	RANGE	0.5 KM	1.0 KM	1.5 KM	2.0 KM	2.5 KM
1		6.09537E-09	2.42164E-07	4.48229E-07	5.03964E-07	4.97049E-07
2		3.15922E-09	1.66912E-07	2.92562E-07	3.32268E-07	3.38670E-07
3		2.97935E-09	1.63787E-07	2.77015E-07	3.04768E-07	2.97394E-07
4		4.12708E-09	1.94538E-07	3.33511E-07	3.76710E-07	3.80792E-07
5		5.43618E-09	2.07193E-07	3.47199E-07	4.07273E-07	4.28957E-07
6		7.49443E-09	2.12662E-07	3.29180E-07	3.74161E-07	3.88136E-07
7		9.00905E-09	1.96207E-07	2.85791E-07	3.08589E-07	3.07431E-07
8		5.46466E-09	1.48047E-07	2.41517E-07	2.82503E-07	2.97494E-07
9		3.77230E-09	1.49424E-07	2.94307E-07	3.78852E-07	4.28392E-07
10		3.23945E-09	1.36086E-07	2.63583E-07	3.21781E-07	3.40298E-07
11		4.32520E-09	1.57522E-07	2.94027E-07	3.54955E-07	3.73701E-07
12		6.24088E-09	1.89599E-07	3.58416E-07	4.29705E-07	4.47585E-07
13		5.26805E-09	1.69322E-07	3.29755E-07	3.99359E-07	4.17228E-07
14		5.66461E-09	1.49990E-07	2.95835E-07	3.61470E-07	3.81407E-07
15		4.65388E-09	1.40811E-07	2.84448E-07	3.46549E-07	3.61095E-07
16		3.40501E-09	1.31146E-07	2.53506E-07	3.10989E-07	3.33490E-07
17		4.50233E-09	1.44785E-07	2.84826E-07	3.64114E-07	4.02552E-07
18		4.52995E-09	1.41950E-07	2.84829E-07	4.09788E-07	5.11905E-07
19		3.64693E-09	1.06024E-07	1.71953E-07	2.28420E-07	2.67395E-07
20		3.30219E-09	9.55898E-08	1.63543E-07	2.29022E-07	2.77549E-07
21		2.88820E-09	8.67794E-08	1.65365E-07	2.34733E-07	2.87433E-07
22		3.00492E-09	1.07087E-07	2.09519E-07	2.75921E-07	3.16563E-07
23		4.68855E-09	1.74430E-07	3.58545E-07	4.62300E-07	5.17751E-07
24		5.29973E-09	1.79624E-07	3.67574E-07	4.75938E-07	5.31827E-07
25		4.80421E-09	1.84429E-07	3.47323E-07	4.20215E-07	4.50495E-07
26		4.95882E-09	2.07892E-07	3.89853E-07	4.57310E-07	4.75207E-07
27		5.54159E-09	2.44291E-07	5.21469E-07	6.69656E-07	7.41395E-07
28		6.50943E-09	2.05816E-07	3.84093E-07	4.55589E-07	4.72322E-07
29		7.30248E-09	2.12619E-07	3.49659E-07	3.94110E-07	3.98309E-07
30		9.63426E-09	2.86298E-07	4.88929E-07	5.74953E-07	6.04146E-07
31		9.65201E-09	2.60981E-07	4.08474E-07	4.60658E-07	4.71429E-07
32		4.51400E-09	1.73672E-07	2.93118E-07	3.52351E-07	3.73374E-07
33		2.42852E-09	1.47307E-07	2.62023E-07	3.14471E-07	3.30032E-07
34		2.28024E-09	1.38119E-07	2.67064E-07	3.34039E-07	3.61811E-07
35		4.05244E-09	1.69803E-07	3.36491E-07	4.09589E-07	4.32292E-07
36		8.08863E-09	2.88415E-07	6.05726E-07	7.50547E-07	8.05129E-07

PLANT NAME: KISS. UTILITIES

POLLUTANT: SO2

AIR QUALITY UNITS: GM/M\*\*3

MAXIMUM MEAN CONC= 8.3639E-07 DIRECTION= 36 DISTANCE= 4.0 KM

YEAR= 77

DIR	RANGE	ANNUAL MEAN CONCENTRATION AT EACH RECEPTOR				
		3.0 KM	3.5 KM	4.0 KM	4.5 KM	5.0 KM
1		4.73584E-07	4.46424E-07	4.22236E-07	3.99509E-07	3.79936E-07
2		3.36887E-07	3.31831E-07	3.27077E-07	3.20710E-07	3.14648E-07
3		2.82002E-07	2.65641E-07	2.51452E-07	2.38564E-07	2.27714E-07
4		3.76258E-07	3.68963E-07	3.62712E-07	3.55194E-07	3.48563E-07
5		4.38417E-07	4.41403E-07	4.43028E-07	4.40680E-07	4.38069E-07
6		3.93899E-07	3.95733E-07	3.97087E-07	3.95104E-07	3.93004E-07
7		3.00866E-07	2.92624E-07	2.85160E-07	2.76547E-07	2.68723E-07
8		3.02992E-07	3.03858E-07	3.03877E-07	3.00848E-07	2.97893E-07
9		4.61882E-07	4.82655E-07	4.96387E-07	4.99487E-07	4.98831E-07
10		3.42641E-07	3.36445E-07	3.27980E-07	3.16878E-07	3.05937E-07
11		3.76972E-07	3.72823E-07	3.67024E-07	3.57921E-07	3.48676E-07
12		4.45462E-07	4.34190E-07	4.21380E-07	4.06388E-07	3.92233E-07
13		4.13164E-07	3.97887E-07	3.80026E-07	3.60911E-07	3.42645E-07
14		3.82409E-07	3.73434E-07	3.61734E-07	3.47878E-07	3.34103E-07
15		3.57458E-07	3.46068E-07	3.33174E-07	3.18556E-07	3.04665E-07
16		3.43448E-07	3.47110E-07	3.48578E-07	3.45239E-07	3.41170E-07
17		4.21835E-07	4.29214E-07	4.31062E-07	4.25824E-07	4.18678E-07
18		5.95869E-07	6.58124E-07	7.05090E-07	7.30610E-07	7.46743E-07
19		2.94067E-07	3.10354E-07	3.21163E-07	3.25038E-07	3.26387E-07
20		3.12965E-07	3.36541E-07	3.53163E-07	3.60946E-07	3.65174E-07
21		3.29790E-07	3.62367E-07	3.89293E-07	4.06560E-07	4.19940E-07
22		3.47105E-07	3.71013E-07	3.92754E-07	4.08322E-07	4.22116E-07
23		5.56272E-07	5.84868E-07	6.10501E-07	6.27214E-07	6.41593E-07
24		5.65604E-07	5.85519E-07	6.00136E-07	6.06015E-07	6.09495E-07
25		4.67780E-07	4.78097E-07	4.86382E-07	4.88347E-07	4.88790E-07
26		4.78275E-07	4.74462E-07	4.70411E-07	4.64094E-07	4.58591E-07
27		7.79822E-07	7.96875E-07	8.05990E-07	8.04295E-07	7.99556E-07
28		4.70464E-07	4.60702E-07	4.50484E-07	4.38601E-07	4.27818E-07
29		3.89320E-07	3.75123E-07	3.61257E-07	3.46765E-07	3.33665E-07
30		6.10348E-07	6.03862E-07	5.94258E-07	5.80172E-07	5.66396E-07
31		4.68309E-07	4.59367E-07	4.50752E-07	4.40337E-07	4.30831E-07
32		3.79319E-07	3.78126E-07	3.75054E-07	3.68450E-07	3.61683E-07
33		3.34755E-07	3.35708E-07	3.36619E-07	3.34204E-07	3.31638E-07
34		3.75861E-07	3.83062E-07	3.88999E-07	3.90822E-07	3.92094E-07
35		4.38496E-07	4.37858E-07	4.36888E-07	4.32521E-07	4.28442E-07
36		8.27917E-07	8.34271E-07	8.36388E-07	8.29768E-07	8.21863E-07

PLANT NAME: KISS. UTILITIES      POLLUTANT: SO2      AIR QUALITY UNITS: GM/M\*\*3  
 MAXIMUM MEAN CONC= 8.5493E-07      DIRECTION= 27      DISTANCE= 2.5 KM  
 YEAR= 78

DIR	ANNUAL MEAN CONCENTRATION AT EACH RECEPTOR					
	RANGE	0.5 KM	1.0 KM	1.5 KM	2.0 KM	2.5 KM
1		1.63725E-08	2.29036E-07	3.51837E-07	3.91592E-07	3.89887E-07
2		1.01263E-08	1.82969E-07	2.82261E-07	3.28025E-07	3.41073E-07
3		5.72110E-09	1.44085E-07	2.04561E-07	2.32440E-07	2.37803E-07
4		4.87596E-09	1.45141E-07	2.20311E-07	2.71475E-07	2.98632E-07
5		5.52706E-09	1.48059E-07	2.14693E-07	2.54210E-07	2.71305E-07
6		4.81171E-09	1.41779E-07	1.99479E-07	2.31745E-07	2.46332E-07
7		1.89282E-09	1.03274E-07	1.52993E-07	1.73930E-07	1.80231E-07
8		1.52259E-09	9.48876E-08	1.59828E-07	1.87637E-07	1.94681E-07
9		5.30938E-09	1.11987E-07	1.83722E-07	2.31551E-07	2.63024E-07
10		4.95246E-09	9.30500E-08	1.48528E-07	1.79550E-07	1.95178E-07
11		2.89684E-09	7.40053E-08	1.21257E-07	1.53344E-07	1.71945E-07
12		2.67631E-09	8.99821E-08	1.76770E-07	2.39351E-07	2.77010E-07
13		2.59544E-09	1.18940E-07	2.31608E-07	2.84404E-07	2.99943E-07
14		2.40481E-09	1.15774E-07	2.41624E-07	2.98383E-07	3.12379E-07
15		1.66399E-09	8.36738E-08	1.84346E-07	2.39331E-07	2.66807E-07
16		9.80732E-10	6.24842E-08	1.49470E-07	2.02065E-07	2.32723E-07
17		7.92228E-10	6.75138E-08	1.78722E-07	2.54142E-07	3.03269E-07
18		1.17482E-09	1.00488E-07	2.78828E-07	4.25234E-07	5.31744E-07
19		2.33473E-09	9.64134E-08	2.12972E-07	3.04906E-07	3.62862E-07
20		5.95724E-09	1.42470E-07	2.45643E-07	3.24565E-07	3.74179E-07
21		1.07560E-08	2.18349E-07	3.26073E-07	3.86965E-07	4.17048E-07
22		1.10577E-08	2.54763E-07	3.94153E-07	4.58218E-07	4.81822E-07
23		9.30913E-09	2.69042E-07	4.69616E-07	5.63219E-07	5.94852E-07
24		8.21622E-09	2.82112E-07	4.91614E-07	5.69856E-07	5.84495E-07
25		7.12554E-09	2.92030E-07	4.88748E-07	5.50605E-07	5.56044E-07
26		8.87363E-09	3.72434E-07	6.36477E-07	7.28170E-07	7.43786E-07
27		9.38575E-09	3.90055E-07	6.91617E-07	8.16816E-07	8.54931E-07
28		7.18697E-09	3.04988E-07	5.24377E-07	6.15255E-07	6.35845E-07
29		5.93978E-09	2.57933E-07	4.32949E-07	4.80202E-07	4.70669E-07
30		6.22605E-09	2.75067E-07	4.93765E-07	5.54840E-07	5.58118E-07
31		5.73622E-09	2.58240E-07	4.66747E-07	5.24329E-07	5.28386E-07
32		4.85232E-09	2.12071E-07	3.84165E-07	4.48613E-07	4.62775E-07
33		6.14310E-09	2.17893E-07	3.79971E-07	4.62224E-07	4.99238E-07
34		7.65758E-09	2.49557E-07	4.40078E-07	5.28691E-07	5.57241E-07
35		1.13973E-08	2.84243E-07	4.92206E-07	5.68717E-07	5.77492E-07
36		1.70111E-08	2.97813E-07	5.15429E-07	6.05154E-07	6.24095E-07

PLANT NAME: KISS. UTILITIES      POLLUTANT: SO2      AIR QUALITY UNITS: GM/M\*\*3  
 MAXIMUM MEAN CONC= 8.6541E-07      DIRECTION= 27      DISTANCE= 3.0 KM  
 YEAR= 78

DIR	RANGE	ANNUAL MEAN CONCENTRATION AT EACH RECEPTOR				
		3.0 KM	3.5 KM	4.0 KM	4.5 KM	5.0 KM
1		3.77054E-07	3.60941E-07	3.45654E-07	3.29985E-07	3.15727E-07
2		3.42505E-07	3.38225E-07	3.32660E-07	3.24094E-07	3.15209E-07
3		2.34279E-07	2.26415E-07	2.17953E-07	2.08798E-07	2.00180E-07
4		3.13420E-07	3.19848E-07	3.22906E-07	3.21449E-07	3.18744E-07
5		2.78280E-07	2.79549E-07	2.79267E-07	2.76095E-07	2.72407E-07
6		2.51922E-07	2.51718E-07	2.49770E-07	2.45358E-07	2.40565E-07
7		1.81521E-07	1.79917E-07	1.77743E-07	1.74203E-07	1.70491E-07
8		1.94378E-07	1.90502E-07	1.86129E-07	1.80657E-07	1.75370E-07
9		2.85085E-07	2.97834E-07	3.05644E-07	3.07378E-07	3.06374E-07
10		2.04667E-07	2.09900E-07	2.13375E-07	2.13554E-07	2.12653E-07
11		1.83404E-07	1.89594E-07	1.93496E-07	1.94244E-07	1.93990E-07
12		2.99447E-07	3.10169E-07	3.15189E-07	3.14196E-07	3.10736E-07
13		2.99880E-07	2.91691E-07	2.81242E-07	2.69268E-07	2.57491E-07
14		3.09533E-07	2.98897E-07	2.86461E-07	2.72961E-07	2.60129E-07
15		2.82386E-07	2.89903E-07	2.93389E-07	2.91736E-07	2.88400E-07
16		2.52795E-07	2.64731E-07	2.72424E-07	2.74868E-07	2.75515E-07
17		3.41031E-07	3.68650E-07	3.90783E-07	4.04505E-07	4.14526E-07
18		6.13617E-07	6.71631E-07	7.15042E-07	7.39414E-07	7.54889E-07
19		3.99186E-07	4.18151E-07	4.28112E-07	4.29036E-07	4.26092E-07
20		4.08698E-07	4.31667E-07	4.49343E-07	4.58721E-07	4.64929E-07
21		4.37640E-07	4.52042E-07	4.64852E-07	4.72312E-07	4.78192E-07
22		4.97171E-07	5.09330E-07	5.22081E-07	5.29903E-07	5.36789E-07
23		6.06286E-07	6.08154E-07	6.08251E-07	6.03112E-07	5.97853E-07
24		5.82514E-07	5.75139E-07	5.69237E-07	5.61476E-07	5.55480E-07
25		5.50347E-07	5.43547E-07	5.39924E-07	5.34033E-07	5.30034E-07
26		7.39201E-07	7.28317E-07	7.19503E-07	7.07625E-07	6.97554E-07
27		8.65411E-07	8.62809E-07	8.58411E-07	8.47370E-07	8.36071E-07
28		6.31850E-07	6.17574E-07	6.02252E-07	5.84028E-07	5.66956E-07
29		4.45928E-07	4.18415E-07	3.93799E-07	3.71180E-07	3.51824E-07
30		5.51309E-07	5.43278E-07	5.38344E-07	5.31794E-07	5.26861E-07
31		5.23767E-07	5.18287E-07	5.14675E-07	5.07680E-07	5.01315E-07
32		4.63454E-07	4.59989E-07	4.56788E-07	4.50226E-07	4.44090E-07
33		5.20519E-07	5.33505E-07	5.44122E-07	5.47561E-07	5.49218E-07
34		5.65621E-07	5.66044E-07	5.65943E-07	5.61185E-07	5.56684E-07
35		5.66209E-07	5.49103E-07	5.34353E-07	5.19576E-07	5.07708E-07
36		6.18325E-07	6.91883E-07	5.84338E-07	5.64903E-07	5.47115E-07

tel

PLANT NAME: KISS. UTILITIES      POLLUTANT: SO2      AIR QUALITY UNITS: GM/M\*\*3  
 YEARLY SECOND MAXIMUM 24-HOUR CONC= 1.1245E-05      DIRECTION= 18      DISTANCE= 2.5 KM      DAY=279  
 YEAR= 74

SECOND HIGHEST 24-HOUR CONCENTRATION AT EACH RECEPTOR

RANGE	0.5 KM	1.0 KM	1.5 KM	2.0 KM	2.5 KM
DIR					
1	1.8873E-07 ( 80)	2.9136E-06 (152)	4.5887E-06 (152)	4.8538E-06 (152)	4.8881E-06 (354)
2	2.4344E-07 ( 80)	2.9518E-06 (124)	4.5410E-06 (152)	4.9208E-06 ( 50)	4.6545E-06 ( 50)
3	1.8782E-07 (188)	3.1963E-06 ( 97)	3.1221E-06 (125)	2.9348E-06 (212)	3.3562E-06 ( 98)
4	1.3573E-07 (174)	2.8664E-06 (146)	4.5813E-06 (153)	4.8734E-06 (153)	4.2076E-06 (125)
5	3.9434E-07 (176)	4.3971E-06 (146)	5.4167E-06 (174)	5.3071E-06 (174)	4.9610E-06 (162)
6	2.2662E-07 (206)	4.9329E-06 (176)	4.8973E-06 ( 90)	5.1563E-06 ( 88)	4.9214E-06 (176)
7	2.1278E-07 (192)	3.6788E-06 (169)	4.9871E-06 (192)	4.6705E-06 ( 89)	4.9974E-06 (203)
8	2.4462E-07 (145)	3.3643E-06 (123)	4.2629E-06 (193)	4.9875E-06 (132)	5.2053E-06 (168)
9	2.2367E-07 (123)	2.5960E-06 ( 89)	3.5861E-06 (193)	4.3965E-06 (193)	4.2640E-06 (193)
10	2.9796E-07 ( 89)	2.8147E-06 (150)	3.5405E-06 ( 89)	4.1114E-06 ( 89)	4.3292E-06 ( 89)
11	2.4384E-07 (173)	3.7143E-06 ( 99)	4.1290E-06 (163)	4.2338E-06 ( 76)	4.6449E-06 ( 76)
12	2.9050E-07 (151)	6.1701E-06 (145)	6.1436E-06 (191)	6.1167E-06 (191)	5.8445E-06 (335)
13	3.4372E-07 (211)	5.3627E-06 (145)	5.2230E-06 (114)	4.9714E-06 (114)	5.1189E-06 (337)
14	1.3212E-07 (207)	3.9809E-06 (121)	5.0245E-06 (145)	4.9872E-06 (167)	4.6335E-06 (291)
15	1.0183E-07 (163)	2.9971E-06 (211)	4.2885E-06 (163)	4.4251E-06 ( 41)	4.1880E-06 (163)
16	8.9207E-08 (163)	2.4398E-06 (107)	3.2168E-06 (120)	4.0519E-06 ( 76)	4.0452E-06 ( 76)
17	3.0316E-08 (100)	3.5594E-06 (120)	5.1547E-06 (107)	4.7862E-06 ( 57)	4.6524E-06 (107)
18	5.7613E-08 (211)	3.5681E-06 (128)	6.9953E-06 (297)	9.1534E-06 (279)	1.1245E-05 (279)
19	9.3871E-08 (181)	3.2551E-06 (128)	3.7493E-06 (279)	4.5530E-06 ( 51)	4.3851E-06 (108)
20	2.4975E-07 (211)	3.2649E-06 (276)	3.6427E-06 (109)	4.9118E-06 (274)	6.2539E-06 (296)
21	2.2169E-07 (211)	4.1854E-06 (108)	5.3576E-06 (100)	6.2511E-06 (109)	6.8764E-06 (330)
22	4.4733E-07 (225)	4.6739E-06 (100)	6.0489E-06 (109)	5.8733E-06 (171)	5.6312E-06 (283)
23	3.9615E-07 (225)	4.2341E-06 (225)	5.3999E-06 (195)	6.6310E-06 (195)	6.3656E-06 (195)
24	2.2687E-07 (238)	2.6777E-06 (171)	4.3558E-06 (195)	5.7239E-06 (195)	5.7544E-06 (195)
25	1.7681E-07 ( 67)	1.9451E-06 (227)	3.8468E-06 (235)	5.0067E-06 (340)	4.6276E-06 (262)
26	1.2499E-07 (238)	3.4369E-06 (140)	3.8681E-06 (225)	4.3227E-06 (300)	4.2025E-06 (300)
27	2.1425E-07 (156)	3.8087E-06 (140)	5.3404E-06 (111)	5.2970E-06 (111)	4.9911E-06 (111)
28	2.3729E-07 (165)	2.7327E-06 (141)	4.3702E-06 (215)	5.5036E-06 (215)	5.5343E-06 (219)
29	2.4620E-07 (165)	3.6971E-06 (165)	4.2839E-06 (246)	5.2523E-06 (243)	5.2081E-06 (243)
30	2.1200E-07 (169)	2.7914E-06 ( 62)	5.8327E-06 (139)	6.7094E-06 (139)	6.1166E-06 ( 62)
31	7.4165E-07 (135)	3.4653E-06 (220)	4.0035E-06 ( 65)	4.6444E-06 ( 62)	4.5690E-06 ( 62)
32	1.6086E-06 (135)	4.4120E-06 (158)	5.7574E-06 (159)	5.0734E-06 (159)	4.6681E-06 (134)
33	5.9718E-07 (220)	3.7591E-06 (131)	5.1607E-06 (227)	4.9314E-06 (131)	5.3067E-06 (250)
34	2.4524E-07 (207)	2.8243E-06 ( 94)	5.0664E-06 ( 94)	5.3100E-06 (132)	5.4847E-06 ( 94)
35	2.0621E-07 (221)	2.6287E-06 ( 94)	3.8246E-06 (213)	4.3289E-06 (213)	3.8737E-06 (213)
36	1.0100E-07 (221)	2.6904E-06 (152)	5.0947E-06 ( 91)	5.5383E-06 ( 91)	5.3925E-06 (135)

133

PLANT NAME: KISS. UTILITIES      POLLUTANT: SO2      AIR QUALITY UNITS: GM/M\*\*3  
 YEARLY SECOND MAXIMUM 24-HOUR CONC= 1.2189E-05      DIRECTION= 18      DISTANCE= 3.5 KM      DAY=279  
 YEAR= 74

RANGE DIR	SECOND HIGHEST 24-HOUR CONCENTRATION AT EACH RECEPTOR				
	3.0 KM	3.5 KM	4.0 KM	4.5 KM	5.0 KM
1	5.0491E-06 (354)	4.9019E-06 (354)	4.6468E-06 (354)	4.3511E-06 ( 50)	3.9485E-06 ( 50)
2	4.1995E-06 ( 50)	3.7224E-06 ( 50)	3.2945E-06 ( 50)	2.9237E-06 ( 50)	2.6063E-06 ( 50)
3	3.2987E-06 ( 34)	3.2083E-06 ( 98)	2.9582E-06 ( 98)	2.8786E-06 ( 50)	2.8600E-06 ( 50)
4	3.6257E-06 (153)	3.4175E-06 ( 38)	3.8078E-06 ( 38)	4.0194E-06 ( 38)	4.1354E-06 ( 38)
5	4.5122E-06 (162)	3.9521E-06 (162)	4.0122E-06 ( 39)	4.1902E-06 ( 39)	4.2269E-06 (146)
6	4.3957E-06 (176)	3.9034E-06 (176)	3.8780E-06 (174)	3.9536E-06 (174)	4.0042E-06 (174)
7	4.2161E-06 (203)	4.4486E-06 (174)	4.5978E-06 (174)	4.6073E-06 (174)	4.5571E-06 (174)
8	4.9265E-06 (193)	5.9816E-06 (146)	6.0866E-06 (132)	5.8877E-06 (132)	5.6688E-06 (132)
9	3.8484E-06 ( 7)	3.8971E-06 ( 89)	4.1079E-06 ( 89)	4.1586E-06 ( 89)	4.1498E-06 ( 89)
10	4.3026E-06 ( 89)	4.1513E-06 (335)	4.1547E-06 (335)	4.1144E-06 (335)	4.0519E-06 (335)
11	5.0577E-06 (335)	5.3875E-06 ( 99)	5.0690E-06 (342)	5.5587E-06 (342)	5.8819E-06 (342)
12	5.5611E-06 (145)	5.0664E-06 (336)	5.8032E-06 (335)	5.5838E-06 ( 40)	5.8802E-06 ( 40)
13	4.8006E-06 ( 96)	5.0841E-06 ( 40)	5.7342E-06 ( 40)	5.9917E-06 (337)	5.8522E-06 (337)
14	4.6064E-06 (343)	5.1363E-06 (343)	5.4890E-06 (343)	5.6262E-06 (343)	5.6613E-06 (343)
15	4.1494E-06 (280)	4.7967E-06 (280)	5.1749E-06 (280)	5.3531E-06 (280)	5.3914E-06 (280)
16	3.7953E-06 ( 57)	3.7412E-06 ( 96)	4.0768E-06 ( 96)	4.2193E-06 ( 96)	4.2566E-06 ( 96)
17	4.0105E-06 (107)	4.2314E-06 (332)	4.4074E-06 (332)	4.5414E-06 (311)	4.8073E-06 (311)
18	1.2145E-05 (279)	1.2189E-05 (279)	1.1867E-05 (279)	1.1358E-05 (279)	1.0766E-05 (279)
19	4.9041E-06 (313)	5.4539E-06 (313)	5.7770E-06 (313)	5.9303E-06 (313)	5.9614E-06 (313)
20	6.9883E-06 (276)	6.3395E-06 (276)	5.7085E-06 (276)	5.1333E-06 (276)	4.8841E-06 (360)
21	7.0430E-06 (330)	6.7932E-06 (330)	6.4121E-06 (330)	6.4270E-06 (348)	6.2659E-06 (277)
22	6.0368E-06 (294)	6.2378E-06 (294)	6.2202E-06 (294)	6.0727E-06 (294)	5.8603E-06 (294)
23	5.9012E-06 (285)	6.2834E-06 (285)	6.4114E-06 (285)	6.3779E-06 (285)	6.2635E-06 (285)
24	5.2810E-06 (195)	4.6818E-06 (195)	4.4613E-06 ( 8)	4.3895E-06 ( 8)	4.6616E-06 ( 73)
25	4.6085E-06 (110)	4.4522E-06 (110)	4.2389E-06 (110)	4.0326E-06 (110)	4.1304E-06 (236)
26	3.8243E-06 (300)	3.5277E-06 (215)	3.5700E-06 (215)	3.5892E-06 (215)	3.4430E-06 (302)
27	4.4922E-06 (140)	4.2310E-06 (101)	4.0528E-06 (101)	3.8234E-06 (101)	3.5774E-06 (101)
28	5.1207E-06 (219)	4.6844E-06 (215)	4.3299E-06 (219)	4.0879E-06 (159)	4.0371E-06 (159)
29	4.7436E-06 (102)	5.0800E-06 (139)	4.7225E-06 ( 24)	5.0145E-06 ( 24)	5.1917E-06 ( 24)
30	5.3280E-06 ( 62)	4.6538E-06 ( 62)	4.5172E-06 (139)	4.6302E-06 (219)	4.6602E-06 (361)
31	4.3598E-06 ( 65)	4.5128E-06 ( 37)	4.9080E-06 ( 37)	5.1312E-06 ( 37)	5.1179E-06 (131)
32	4.5848E-06 (134)	4.6019E-06 (103)	4.7355E-06 (103)	4.7555E-06 (103)	4.7458E-06 (103)
33	4.5941E-06 (250)	4.2089E-06 ( 94)	4.1338E-06 ( 94)	4.0428E-06 ( 94)	3.9461E-06 ( 94)
34	5.3366E-06 ( 94)	5.2362E-06 ( 93)	5.1744E-06 ( 93)	5.0515E-06 ( 93)	4.9101E-06 ( 93)
35	3.7995E-06 ( 27)	3.8036E-06 (188)	4.1944E-06 ( 21)	4.4439E-06 ( 27)	4.3897E-06 ( 27)
36	5.0023E-06 (176)	5.1942E-06 (176)	5.2762E-06 (176)	5.2695E-06 (176)	5.1967E-06 (176)

74



PLANT NAME: KISS. UTILITIES      POLLUTANT: SO2      AIR QUALITY UNITS: GM/M\*\*3  
 YEARLY SECOND MAXIMUM 24-HOUR CONC= 8.2554E-06      DIRECTION= 36      DISTANCE= 2.0 KM      DAY=290  
 YEAR= 75

SECOND HIGHEST 24-HOUR CONCENTRATION AT EACH RECEPTOR

RANGE	0.5 KM	1.0 KM	1.5 KM	2.0 KM	2.5 KM
DIR					
1	1.9505E-07 (207)	4.9164E-06 (167)	7.1687E-06 (167)	6.7936E-06 (167)	5.7740E-06 (167)
2	4.1772E-07 (207)	4.9857E-06 (119)	5.2473E-06 (215)	4.8105E-06 (151)	4.3281E-06 (151)
3	2.0006E-07 (215)	2.7332E-06 (215)	3.5732E-06 (260)	4.5092E-06 (202)	4.5411E-06 (202)
4	2.4828E-07 (215)	2.5368E-06 (203)	5.1119E-06 (188)	4.8410E-06 ( 82)	4.5550E-06 ( 82)
5	2.5922E-07 (219)	4.4266E-06 (203)	5.8531E-06 (186)	5.4227E-06 (186)	5.1354E-06 ( 89)
6	2.8498E-07 (203)	3.7239E-06 (186)	5.0757E-06 (110)	4.6756E-06 (110)	4.3768E-06 (100)
7	2.9667E-07 (158)	4.2713E-06 (158)	6.0374E-06 (110)	5.2433E-06 (158)	5.3179E-06 (158)
8	2.7906E-07 (157)	4.8583E-06 (225)	4.5077E-06 ( 40)	5.2268E-06 ( 40)	4.8103E-06 ( 40)
9	1.7406E-07 (157)	3.7339E-06 (225)	4.0513E-06 (124)	4.3329E-06 ( 78)	5.2975E-06 (325)
10	2.8108E-07 (138)	2.3836E-06 (129)	3.5504E-06 (129)	4.1575E-06 (186)	4.3529E-06 (124)
11	2.5092E-07 (156)	3.2103E-06 (128)	5.1298E-06 (128)	6.2014E-06 ( 93)	6.7545E-06 ( 93)
12	2.4628E-07 (156)	4.4548E-06 (180)	5.9998E-06 (163)	5.9430E-06 ( 59)	6.2617E-06 ( 59)
13	2.9261E-07 (105)	3.6828E-06 (180)	5.1324E-06 (163)	5.5345E-06 ( 67)	7.1412E-06 ( 67)
14	1.2973E-07 (105)	3.6616E-06 (231)	6.1418E-06 (231)	5.7478E-06 (231)	5.1819E-06 (355)
15	1.3835E-07 (156)	2.9255E-06 (156)	4.1812E-06 ( 97)	4.3059E-06 (164)	4.2397E-06 (164)
16	9.9510E-08 (155)	2.5707E-06 (102)	3.8138E-06 ( 96)	4.6111E-06 ( 95)	4.9031E-06 ( 95)
17	1.1721E-07 (155)	3.0302E-06 (230)	3.6469E-06 (230)	4.0608E-06 ( 97)	3.8696E-06 ( 97)
18	6.5337E-08 ( 85)	2.6912E-06 (106)	3.7966E-06 (155)	4.9423E-06 ( 85)	4.3180E-06 (303)
19	7.6665E-08 (106)	2.1316E-06 (244)	3.8042E-06 (106)	4.0382E-06 (131)	3.6656E-06 (131)
20	5.7468E-08 (141)	1.9876E-06 (244)	2.7841E-06 (141)	3.5481E-06 (131)	3.4032E-06 (131)
21	8.0053E-08 (141)	2.7295E-06 (141)	3.8935E-06 (141)	5.0790E-06 (277)	5.0624E-06 (277)
22	1.6676E-07 (182)	4.5241E-06 (182)	5.1703E-06 (145)	4.9064E-06 (182)	4.4136E-06 (283)
23	1.1145E-07 (145)	3.3318E-06 ( 45)	5.5179E-06 (145)	5.0288E-06 (284)	4.8790E-06 (182)
24	1.7738E-07 (146)	2.9495E-06 (172)	5.1141E-06 (174)	5.5348E-06 (284)	6.0752E-06 (182)
25	2.3852E-07 (146)	2.9716E-06 (103)	4.3317E-06 (144)	4.6251E-06 (144)	4.3466E-06 (144)
26	2.5578E-07 (232)	3.4949E-06 (234)	4.3080E-06 (234)	3.5867E-06 (234)	3.8771E-06 (287)
27	2.1984E-07 (112)	4.6285E-06 (234)	5.7496E-06 (234)	5.2495E-06 (234)	5.1006E-06 (340)
28	1.6331E-07 (234)	4.4068E-06 (205)	4.6750E-06 (114)	5.7241E-06 (288)	5.3114E-06 (205)
29	8.0646E-08 (234)	4.0324E-06 (205)	4.8503E-06 (214)	5.2181E-06 (214)	4.8717E-06 (288)
30	1.4426E-07 (225)	3.7396E-06 (113)	6.4710E-06 (113)	7.2144E-06 (113)	7.5412E-06 ( 87)
31	2.0153E-07 (120)	2.7505E-06 (227)	3.5907E-06 (234)	4.0355E-06 (234)	3.8034E-06 (117)
32	2.2183E-07 (227)	2.3294E-06 (227)	3.2522E-06 (246)	3.1027E-06 (265)	3.4182E-06 ( 10)
33	2.2820E-07 (204)	3.0036E-06 (210)	4.9645E-06 (123)	5.4808E-06 ( 10)	6.8434E-06 ( 10)
34	2.4288E-07 (109)	3.9204E-06 (115)	5.8969E-06 (151)	6.5528E-06 (151)	6.4191E-06 (261)
35	4.1923E-07 ( 83)	4.5134E-06 (147)	4.8723E-06 (223)	4.9933E-06 (223)	4.5564E-06 ( 72)
36	2.5271E-07 ( 83)	4.7194E-06 (115)	6.4964E-06 (115)	8.2554E-06 (290)	7.3952E-06 (109)

15

PLANT NAME: KISS. UTILITIES      POLLUTANT: SO2      AIR QUALITY UNITS: GM/M\*\*3  
 YEARLY SECOND MAXIMUM 24-HOUR CONC= 8.6977E-06      DIRECTION= 18      DISTANCE= 5.0 KM      DAY=303  
 YEAR= 75

SECOND HIGHEST 24-HOUR CONCENTRATION AT EACH RECEPTOR

RANGE	3.0 KM	3.5 KM	4.0 KM	4.5 KM	5.0 KM
DIR					
1	5.0576E-06 (331)	5.3069E-06 (331)	5.2479E-06 (119)	4.5814E-06 (119)	4.5362E-06 ( 20)
2	4.3301E-06 ( 20)	4.6566E-06 ( 20)	4.7624E-06 ( 20)	4.7280E-06 ( 20)	4.6103E-06 ( 20)
3	4.2476E-06 (202)	3.8730E-06 (202)	3.5160E-06 (202)	3.1971E-06 (202)	3.1015E-06 ( 36)
4	4.1830E-06 ( 82)	4.1122E-06 (188)	3.7674E-06 ( 25)	3.7088E-06 ( 25)	3.6525E-06 ( 25)
5	4.9191E-06 ( 89)	5.3649E-06 ( 61)	4.8735E-06 ( 25)	4.3174E-06 ( 25)	4.3870E-06 (351)
6	3.9278E-06 (100)	3.8399E-06 ( 43)	3.8708E-06 (110)	3.9568E-06 (110)	4.0561E-06 (110)
7	5.0270E-06 (178)	5.1342E-06 ( 73)	5.1792E-06 ( 73)	5.1184E-06 ( 73)	5.0162E-06 ( 73)
8	4.3281E-06 ( 81)	4.2676E-06 (157)	4.1294E-06 (325)	4.1329E-06 (325)	4.0945E-06 (325)
9	6.0374E-06 (325)	6.5394E-06 (325)	6.8653E-06 (325)	6.9475E-06 (325)	6.9393E-06 (325)
10	4.6253E-06 (124)	4.6458E-06 (124)	4.5618E-06 (124)	4.4233E-06 (124)	4.2610E-06 (124)
11	6.8661E-06 ( 93)	6.7252E-06 ( 93)	6.4878E-06 ( 93)	6.1673E-06 ( 93)	5.8383E-06 ( 93)
12	5.9723E-06 ( 59)	6.0910E-06 ( 13)	6.1071E-06 ( 13)	5.7567E-06 (317)	5.3680E-06 (317)
13	7.9224E-06 ( 67)	7.9213E-06 (317)	7.4916E-06 (317)	7.0019E-06 (317)	6.5067E-06 (317)
14	5.5578E-06 (139)	4.7696E-06 (297)	5.3448E-06 (297)	5.6224E-06 (297)	5.7560E-06 (297)
15	3.8067E-06 ( 14)	4.0240E-06 ( 14)	4.5718E-06 (297)	4.5156E-06 (125)	4.3026E-06 (352)
16	5.2158E-06 ( 94)	5.4134E-06 (102)	5.1016E-06 (102)	4.8479E-06 (102)	4.6661E-06 (102)
17	5.3919E-06 ( 95)	5.7221E-06 ( 95)	5.9778E-06 ( 95)	6.0637E-06 ( 95)	6.0906E-06 ( 95)
18	5.9425E-06 (303)	7.1563E-06 (303)	8.0150E-06 (303)	8.4629E-06 (303)	8.6977E-06 (303)
19	3.5596E-06 ( 2)	3.8920E-06 (353)	4.3747E-06 (363)	4.6831E-06 ( 64)	4.4395E-06 ( 64)
20	3.4252E-06 (292)	3.8246E-06 (111)	4.3838E-06 (111)	4.4573E-06 ( 21)	4.1824E-06 ( 52)
21	4.6207E-06 (277)	4.3091E-06 (303)	4.3051E-06 (303)	4.2075E-06 ( 17)	4.3966E-06 ( 17)
22	4.5508E-06 (283)	4.5421E-06 (283)	4.4819E-06 (283)	4.5900E-06 (240)	4.8151E-06 (240)
23	5.3249E-06 (305)	6.0809E-06 (304)	6.2000E-06 (304)	6.1427E-06 (304)	6.0075E-06 (304)
24	6.1885E-06 (182)	5.9640E-06 (182)	5.6416E-06 (182)	5.2967E-06 (182)	4.9643E-06 (182)
25	3.9395E-06 (144)	3.9080E-06 ( 74)	3.8828E-06 ( 74)	4.1611E-06 (251)	4.2181E-06 (181)
26	4.0407E-06 (287)	3.9483E-06 (207)	3.5312E-06 (112)	3.4939E-06 (169)	3.3024E-06 (287)
27	4.9307E-06 (247)	4.8373E-06 (247)	4.6548E-06 (247)	4.4913E-06 (263)	4.6293E-06 (112)
28	5.1945E-06 (288)	4.8200E-06 (222)	4.5198E-06 (222)	4.5057E-06 (313)	4.6133E-06 (313)
29	4.3329E-06 (288)	4.2186E-06 (172)	3.9453E-06 ( 86)	3.7857E-06 ( 86)	3.8841E-06 (114)
30	7.0898E-06 (117)	6.5284E-06 (117)	6.0404E-06 (117)	6.4238E-06 ( 9)	6.7795E-06 ( 9)
31	3.5754E-06 (104)	3.5927E-06 (196)	3.9839E-06 ( 47)	4.2167E-06 ( 47)	4.3755E-06 ( 47)
32	4.4870E-06 ( 10)	5.3298E-06 ( 10)	6.2520E-06 (109)	6.8759E-06 (265)	7.1619E-06 (265)
33	7.3833E-06 ( 10)	7.3601E-06 ( 10)	7.1066E-06 ( 10)	6.7446E-06 ( 10)	6.3418E-06 ( 10)
34	6.2967E-06 (266)	6.1733E-06 (266)	5.9213E-06 (266)	5.6136E-06 (266)	5.2920E-06 (266)
35	5.0858E-06 ( 72)	5.2402E-06 ( 72)	5.2101E-06 ( 72)	5.0543E-06 ( 72)	4.8460E-06 ( 72)
36	6.4276E-06 (109)	6.3686E-06 ( 55)	6.2081E-06 ( 55)	5.9594E-06 ( 4)	6.0833E-06 ( 4)

16

PLANT NAME: KISS. UTILITIES      POLLUTANT: SO2      AIR QUALITY UNITS: GM/M\*\*3  
 YEARLY SECOND MAXIMUM 24-HOUR CONC= 8.3351E-06      DIRECTION= 18      DISTANCE= 2.5 KM      DAY=336  
 YEAR= 76

SECOND HIGHEST 24-HOUR CONCENTRATION AT EACH RECEPTOR						
RANGE	0.5 KM	1.0 KM	1.5 KM	2.0 KM	2.5 KM	
DIR						
1	1.7533E-07 (152)	3.8319E-06 ( 32)	6.0482E-06 ( 32)	5.4960E-06 (152)	4.3747E-06 (215)	
2	2.1490E-07 (186)	2.9183E-06 (199)	4.4026E-06 (186)	5.0156E-06 (186)	4.7684E-06 (186)	
3	1.8587E-07 (226)	2.9649E-06 ( 49)	4.9775E-06 (211)	5.6711E-06 (186)	5.1960E-06 (214)	
4	2.5039E-07 (226)	3.7306E-06 (116)	4.8155E-06 ( 95)	4.8280E-06 ( 95)	4.2120E-06 (116)	
5	2.3820E-07 ( 69)	4.8803E-06 (117)	6.8558E-06 ( 76)	7.6230E-06 ( 76)	7.3857E-06 ( 76)	
6	4.3400E-07 (116)	3.5624E-06 ( 81)	5.3661E-06 ( 76)	6.0230E-06 (194)	6.0904E-06 (194)	
7	3.3263E-07 (116)	1.9797E-06 (116)	4.4151E-06 (133)	5.0355E-06 (133)	4.6119E-06 (133)	
8	2.9258E-07 (139)	3.5768E-06 (198)	5.3587E-06 (145)	4.9718E-06 (198)	4.9165E-06 (195)	
9	9.1731E-07 (145)	6.4979E-06 (139)	6.9578E-06 (139)	6.8454E-06 (197)	8.1343E-06 (197)	
10	1.2464E-07 (204)	2.4667E-06 ( 17)	4.0986E-06 (198)	4.7565E-06 (198)	4.6757E-06 (198)	
11	1.2464E-07 (204)	2.3595E-06 (213)	3.4016E-06 (103)	4.1560E-06 (198)	4.2861E-06 (275)	
12	1.9363E-07 (221)	3.0494E-06 ( 93)	4.7384E-06 (235)	4.6041E-06 (235)	4.7939E-06 ( 39)	
13	5.0480E-07 (200)	3.3694E-06 (235)	3.9790E-06 (323)	5.6821E-06 (362)	5.3334E-06 (361)	
14	4.0398E-07 (200)	3.6852E-06 (208)	4.4813E-06 ( 96)	5.7735E-06 (295)	5.5835E-06 (295)	
15	2.5060E-07 (207)	3.5713E-06 (208)	4.3483E-06 ( 96)	4.8294E-06 ( 67)	5.0917E-06 (100)	
16	2.3278E-07 (247)	2.4530E-06 (220)	3.3555E-06 (124)	3.7390E-06 (356)	4.0302E-06 (306)	
17	2.1637E-07 (219)	3.0474E-06 (157)	3.6137E-06 (114)	4.3705E-06 (114)	4.4206E-06 (255)	
18	2.4067E-07 (157)	3.7681E-06 (157)	5.1369E-06 (118)	6.1092E-06 (336)	8.3351E-06 (336)	
19	4.5461E-07 (184)	3.5167E-06 (191)	4.8110E-06 (287)	5.6430E-06 (318)	8.2844E-06 (318)	
20	9.7342E-07 (184)	4.4339E-06 (157)	7.0750E-06 (140)	7.1188E-06 (286)	6.6581E-06 (292)	
21	3.8174E-07 (199)	3.8880E-06 (164)	4.6437E-06 ( 51)	4.6003E-06 ( 51)	4.5778E-06 ( 98)	
22	2.2305E-07 (245)	3.4827E-06 (199)	4.5446E-06 (243)	4.7450E-06 (165)	5.7973E-06 (232)	
23	2.6252E-07 (245)	3.7188E-06 (101)	5.9395E-06 (240)	6.8488E-06 (240)	6.6987E-06 (240)	
24	1.6004E-07 (226)	3.2077E-06 (101)	6.3041E-06 (242)	6.5907E-06 (242)	5.7637E-06 (242)	
25	1.1759E-07 (245)	2.9178E-06 (225)	5.4862E-06 (243)	6.4403E-06 (243)	6.0708E-06 (225)	
26	1.7296E-07 (114)	3.2371E-06 (226)	4.8495E-06 (268)	6.0591E-06 (278)	6.4314E-06 (278)	
27	2.8852E-07 (114)	3.8160E-06 (114)	3.9444E-06 (268)	4.0198E-06 (268)	4.0189E-06 ( 80)	
28	2.2835E-07 (114)	4.3290E-06 ( 63)	4.4272E-06 (204)	4.6758E-06 (120)	4.9427E-06 (269)	
29	1.6303E-07 (229)	3.1413E-06 (204)	4.6588E-06 (108)	4.7376E-06 (298)	4.5147E-06 (127)	
30	2.4982E-07 (245)	2.7922E-06 (120)	4.1879E-06 (268)	4.2485E-06 (107)	4.5380E-06 ( 64)	
31	2.6888E-07 (135)	2.6281E-06 (154)	3.6525E-06 (126)	4.0308E-06 (135)	4.6855E-06 (135)	
32	2.8622E-07 (192)	3.8511E-06 (192)	3.8932E-06 (189)	4.2387E-06 (152)	4.7038E-06 (135)	
33	4.0934E-07 (192)	4.3187E-06 (156)	4.4349E-06 (189)	4.4879E-06 (153)	3.8095E-06 ( 24)	
34	2.9283E-07 (192)	4.3427E-06 (228)	6.2019E-06 (185)	5.8975E-06 (228)	5.0970E-06 (144)	
35	4.0887E-07 (144)	3.7209E-06 (156)	4.4802E-06 (185)	4.5967E-06 (228)	3.9935E-06 ( 27)	
36	2.0346E-07 (222)	3.9879E-06 (223)	5.9017E-06 (215)	5.7880E-06 (182)	5.0898E-06 (188)	

17

PLANT NAME: KISS. UTILITIES      POLLUTANT: SO2      AIR QUALITY UNITS: GM/M\*\*3  
 YEARLY SECOND MAXIMUM 24-HOUR CONC= 1.0041E-05      DIRECTION= 18      DISTANCE= 4.0 KM      DAY=336  
 YEAR= 76

SECOND HIGHEST 24-HOUR CONCENTRATION AT EACH RECEPTOR

RANGE	3.0 KM	3.5 KM	4.0 KM	4.5 KM	5.0 KM
DIR					
1	4.0991E-06 (215)	3.9246E-06 (215)	3.8759E-06 ( 50)	3.7308E-06 (215)	3.8591E-06 ( 53)
2	4.8913E-06 (187)	4.2853E-06 ( 69)	4.2324E-06 ( 69)	4.1148E-06 ( 69)	3.9887E-06 ( 69)
3	4.6458E-06 (214)	4.5745E-06 (144)	4.5582E-06 (144)	4.2089E-06 ( 69)	3.8175E-06 ( 69)
4	4.0393E-06 ( 49)	4.3768E-06 (355)	4.6326E-06 (355)	4.7510E-06 (355)	4.7735E-06 (355)
5	6.7869E-06 ( 76)	6.1398E-06 (117)	5.9073E-06 ( 69)	5.3465E-06 ( 69)	5.2272E-06 (116)
6	5.7983E-06 (194)	5.4516E-06 (194)	5.1441E-06 (194)	4.8554E-06 (194)	4.6301E-06 (194)
7	3.9629E-06 (133)	4.4063E-06 (198)	4.2635E-06 (145)	3.7822E-06 (145)	3.3723E-06 (145)
8	4.8023E-06 (197)	4.5562E-06 (197)	4.2389E-06 (197)	4.1357E-06 (122)	4.0729E-06 (122)
9	8.7725E-06 (197)	8.1880E-06 (196)	7.5294E-06 (196)	7.4952E-06 (117)	7.5905E-06 (117)
10	4.5807E-06 ( 8)	4.6557E-06 ( 8)	5.2553E-06 (361)	5.6433E-06 (361)	5.4016E-06 ( 17)
11	4.5198E-06 (300)	5.1835E-06 (300)	5.6477E-06 (300)	5.8691E-06 (300)	5.9790E-06 (300)
12	5.4965E-06 ( 39)	5.9608E-06 ( 39)	6.2558E-06 ( 39)	6.3291E-06 ( 39)	6.3147E-06 ( 39)
13	5.6680E-06 (361)	5.6363E-06 (361)	5.4595E-06 (361)	5.2143E-06 (361)	4.9428E-06 (361)
14	5.1157E-06 (295)	5.0807E-06 (364)	5.0448E-06 (364)	5.2344E-06 (352)	5.3903E-06 (352)
15	5.2797E-06 ( 67)	5.8159E-06 (327)	5.9168E-06 (100)	5.7298E-06 (100)	5.4747E-06 (100)
16	5.0836E-06 (306)	5.4662E-06 (356)	5.5253E-06 ( 5)	5.7257E-06 ( 5)	5.8575E-06 ( 5)
17	4.5598E-06 (337)	5.1976E-06 (337)	5.2619E-06 ( 77)	5.0238E-06 ( 77)	5.2948E-06 ( 19)
18	9.6011E-06 (336)	1.0028E-05 (336)	1.0041E-05 (336)	9.8083E-06 (336)	9.4408E-06 (336)
19	9.0371E-06 (302)	8.6235E-06 (302)	8.7069E-06 (292)	8.7109E-06 (292)	8.5950E-06 (292)
20	7.7648E-06 (292)	7.6959E-06 (286)	7.1938E-06 (286)	6.6607E-06 (286)	6.4723E-06 (318)
21	5.3725E-06 ( 98)	5.7275E-06 ( 98)	5.7211E-06 ( 57)	5.5782E-06 ( 57)	5.3664E-06 ( 57)
22	5.2867E-06 (166)	4.6559E-06 (166)	4.1859E-06 (166)	4.0986E-06 (348)	3.9560E-06 (348)
23	6.2101E-06 (242)	5.7957E-06 (242)	5.5276E-06 (232)	5.6100E-06 (232)	5.5682E-06 (232)
24	5.9543E-06 (297)	5.5069E-06 (101)	5.2492E-06 (119)	5.0870E-06 (119)	4.9113E-06 (119)
25	5.2865E-06 (243)	4.7874E-06 (307)	4.6308E-06 (307)	4.4040E-06 (307)	4.1493E-06 (307)
26	6.2661E-06 (278)	5.8579E-06 (278)	5.3953E-06 (278)	4.9415E-06 (278)	4.5203E-06 (278)
27	3.9344E-06 ( 80)	4.2551E-06 (114)	4.5644E-06 (241)	4.4164E-06 (241)	4.5081E-06 (148)
28	4.4227E-06 ( 63)	4.1775E-06 ( 64)	4.2118E-06 ( 64)	4.1278E-06 ( 64)	3.9803E-06 ( 64)
29	4.7910E-06 (127)	4.7797E-06 (127)	4.6449E-06 (127)	4.4447E-06 (127)	4.2148E-06 (127)
30	4.4596E-06 (120)	4.4762E-06 ( 80)	5.1694E-06 ( 25)	5.7976E-06 ( 25)	5.7650E-06 ( 64)
31	5.0842E-06 (135)	5.1731E-06 (135)	5.1856E-06 (136)	5.7939E-06 (136)	6.1353E-06 (168)
32	4.7683E-06 ( 47)	4.8960E-06 ( 47)	4.9398E-06 (135)	4.8182E-06 (135)	4.6784E-06 (135)
33	3.4095E-06 (360)	3.7378E-06 ( 24)	3.5351E-06 ( 24)	3.3110E-06 ( 24)	3.0871E-06 ( 24)
34	4.3302E-06 (282)	4.5647E-06 (282)	4.3369E-06 (144)	4.2588E-06 (331)	4.2811E-06 (331)
35	4.2201E-06 ( 27)	4.2338E-06 ( 27)	4.1776E-06 ( 27)	4.0914E-06 ( 27)	3.9942E-06 ( 27)
36	5.1206E-06 (215)	5.1036E-06 (214)	5.8369E-06 (188)	5.7425E-06 (188)	5.8829E-06 (333)

18

PLANT NAME: KISS. UTILITIES                      POLLUTANT: SO2                      AIR QUALITY UNITS: GM/M\*\*3  
 YEARLY SECOND MAXIMUM 24-HOUR CONC= 9.9046E-06    DIRECTION= 27    DISTANCE= 2.5 KM    DAY=217  
 YEAR= 77

DIR	SECOND HIGHEST 24-HOUR CONCENTRATION AT EACH RECEPTOR					
	RANGE	0.5 KM	1.0 KM	1.5 KM	2.0 KM	2.5 KM
1	3.6663E-07 ( 87)	4.2350E-06 (236)	7.1904E-06 (207)	6.9633E-06 (207)	5.9877E-06 (207)	
2	9.6178E-08 (248)	3.6783E-06 (145)	4.2830E-06 (145)	4.4797E-06 (285)	4.6758E-06 (230)	
3	1.7283E-07 (180)	3.5084E-06 (189)	4.7071E-06 (251)	4.5161E-06 (145)	4.3627E-06 (285)	
4	2.4149E-07 (229)	3.9927E-06 (252)	5.7584E-06 (252)	5.8560E-06 (145)	5.2338E-06 (157)	
5	2.4178E-07 (180)	3.4581E-06 (171)	5.9971E-06 (172)	6.9729E-06 (177)	6.3732E-06 (177)	
6	3.6864E-07 (190)	3.4813E-06 (158)	4.5398E-06 (208)	4.3120E-06 ( 77)	5.2114E-06 (172)	
7	4.4506E-07 (190)	4.2072E-06 (114)	5.3379E-06 (114)	5.4490E-06 ( 3)	5.7692E-06 ( 3)	
8	2.0511E-07 (169)	2.9863E-06 (167)	4.1748E-06 (174)	3.7927E-06 (300)	3.9619E-06 ( 3)	
9	2.1908E-07 (134)	3.0205E-06 (174)	4.9918E-06 (128)	5.5619E-06 (176)	6.3600E-06 ( 81)	
10	1.8321E-07 (134)	2.1584E-06 (176)	3.2975E-06 (174)	4.4799E-06 (275)	4.6330E-06 ( 10)	
11	2.4822E-07 (187)	2.6709E-06 (178)	5.4880E-06 (127)	7.1187E-06 (127)	7.4256E-06 (127)	
12	3.5990E-07 (187)	3.8173E-06 (161)	6.1959E-06 (178)	6.2042E-06 (164)	5.8884E-06 (164)	
13	3.6909E-07 (187)	3.0066E-06 (187)	5.4697E-06 ( 19)	5.7257E-06 (330)	6.5407E-06 (330)	
14	2.7212E-07 (187)	3.0101E-06 (172)	4.0924E-06 (173)	4.3887E-06 (340)	5.1476E-06 (340)	
15	1.8141E-07 (267)	2.9387E-06 (164)	4.2712E-06 (134)	4.3156E-06 ( 32)	5.1403E-06 ( 32)	
16	2.4438E-07 (267)	3.5677E-06 (164)	5.3363E-06 (315)	5.4023E-06 (203)	5.2360E-06 ( 96)	
17	2.0153E-07 (184)	4.3937E-06 (163)	5.4140E-06 (163)	5.1284E-06 ( 98)	5.2627E-06 (341)	
18	2.5578E-07 (184)	3.0958E-06 (163)	4.2336E-06 (163)	5.5422E-06 (143)	6.9881E-06 ( 38)	
19	2.6609E-07 (257)	3.7398E-06 (186)	2.4826E-06 ( 29)	3.4085E-06 ( 99)	3.5259E-06 ( 99)	
20	2.1081E-07 (186)	4.1124E-06 (187)	3.2201E-06 ( 30)	4.4361E-06 ( 30)	4.8030E-06 ( 30)	
21	1.0594E-07 (156)	2.6710E-06 (187)	2.9809E-06 (105)	3.4988E-06 (205)	4.1595E-06 ( 39)	
22	1.6310E-07 ( 99)	2.5546E-06 (142)	3.9447E-06 (133)	4.0217E-06 (142)	4.7991E-06 (276)	
23	2.2000E-07 (101)	4.0608E-06 (142)	6.1862E-06 (133)	6.6562E-06 (293)	6.7498E-06 (293)	
24	3.1219E-07 (255)	4.8435E-06 (101)	6.3789E-06 (278)	8.3932E-06 (278)	8.7908E-06 (278)	
25	2.9194E-07 (101)	4.6243E-06 (101)	6.1394E-06 (101)	6.0075E-06 (101)	5.4752E-06 (101)	
26	2.1303E-07 (244)	3.7219E-06 (244)	6.2352E-06 (243)	5.6050E-06 (243)	4.8102E-06 (243)	
27	3.6458E-07 (242)	3.0511E-06 (243)	7.5373E-06 (217)	9.5342E-06 (217)	9.9046E-06 (217)	
28	3.7404E-07 (214)	3.3268E-06 (136)	4.2749E-06 (138)	4.5990E-06 (221)	4.6631E-06 (221)	
29	3.7404E-07 (214)	3.5412E-06 (227)	4.8406E-06 (258)	4.9691E-06 ( 86)	4.8750E-06 (258)	
30	3.7512E-07 (136)	6.3627E-06 (136)	9.1001E-06 (136)	8.9139E-06 (136)	8.3590E-06 ( 62)	
31	3.2834E-07 (111)	6.0624E-06 (112)	6.9807E-06 (209)	6.2750E-06 (121)	5.0235E-06 (112)	
32	2.1384E-07 (209)	2.9116E-06 (209)	4.2801E-06 (229)	4.0581E-06 (237)	3.8181E-06 (199)	
33	1.7118E-07 (181)	3.2394E-06 (188)	4.7240E-06 (202)	5.1155E-06 (202)	4.8703E-06 (202)	
34	1.7040E-07 (193)	3.0255E-06 (229)	3.8457E-06 (206)	4.8748E-06 ( 87)	4.9893E-06 ( 92)	
35	2.0724E-07 (265)	2.8364E-06 (189)	3.8415E-06 (207)	4.1057E-06 (206)	4.3298E-06 ( 88)	
36	3.2492E-07 (236)	5.9965E-06 (214)	9.0212E-06 (207)	9.6529E-06 (207)	9.0176E-06 (207)	

19

PLANT NAME: KISS. UTILITIES                      POLLUTANT: SO2                      AIR QUALITY UNITS: GM/M\*\*3  
 YEARLY SECOND MAXIMUM 24-HOUR CONC= 1.0442E-05      DIRECTION= 36      DISTANCE= 3.0 KM      DAY= 65  
 YEAR= 77

		SECOND HIGHEST 24-HOUR CONCENTRATION AT EACH RECEPTOR				
RANGE	3.0 KM	3.5 KM	4.0 KM	4.5 KM	5.0 KM	
DIR						
1	5.0340E-06 (339)	4.9745E-06 (339)	4.7823E-06 (339)	4.5286E-06 (339)	4.3637E-06 ( 65)	
2	4.0468E-06 (230)	3.9490E-06 ( 49)	4.0334E-06 ( 50)	4.2700E-06 ( 50)	4.3969E-06 ( 50)	
3	4.1332E-06 (285)	3.7216E-06 (285)	3.4660E-06 (170)	3.2010E-06 (170)	3.1609E-06 (146)	
4	5.4762E-06 (148)	4.8488E-06 (148)	4.5436E-06 (339)	4.2617E-06 (339)	3.9700E-06 (339)	
5	5.7212E-06 (158)	6.2879E-06 (158)	5.7507E-06 (172)	5.1556E-06 (172)	5.1442E-06 ( 81)	
6	4.8370E-06 (172)	4.4429E-06 (157)	4.5262E-06 (157)	4.5400E-06 (157)	4.5391E-06 (157)	
7	5.7172E-06 ( 3)	5.4661E-06 ( 3)	5.1637E-06 ( 3)	4.8490E-06 ( 3)	4.6145E-06 ( 78)	
8	3.9613E-06 ( 3)	4.2105E-06 (115)	4.8649E-06 (115)	5.2526E-06 (115)	5.3540E-06 (300)	
9	7.2261E-06 ( 36)	7.5197E-06 ( 81)	7.5142E-06 ( 81)	7.3172E-06 ( 81)	7.0981E-06 (128)	
10	5.1082E-06 ( 10)	5.3579E-06 ( 10)	5.4761E-06 ( 10)	5.4314E-06 ( 10)	5.3323E-06 ( 10)	
11	7.1389E-06 (127)	6.6064E-06 (127)	6.0401E-06 (127)	5.5018E-06 (127)	5.0121E-06 (127)	
12	5.5032E-06 (161)	4.8967E-06 ( 19)	4.5954E-06 ( 19)	4.3209E-06 ( 47)	4.0685E-06 ( 47)	
13	6.7068E-06 (330)	6.4830E-06 (330)	6.1255E-06 (330)	5.7202E-06 (330)	5.3111E-06 (330)	
14	5.3874E-06 (340)	5.2886E-06 (340)	5.0606E-06 (340)	5.0010E-06 (290)	4.9859E-06 (290)	
15	5.0013E-06 (117)	4.6679E-06 (286)	4.6889E-06 ( 48)	4.7936E-06 ( 48)	4.8034E-06 ( 48)	
16	6.3454E-06 ( 96)	7.0821E-06 ( 96)	7.2749E-06 (315)	7.0518E-06 (315)	6.9974E-06 (305)	
17	5.5622E-06 (341)	5.5015E-06 (341)	5.3204E-06 ( 31)	5.5540E-06 ( 31)	5.6599E-06 ( 31)	
18	8.1761E-06 ( 38)	9.0371E-06 ( 38)	9.6417E-06 ( 38)	9.8833E-06 ( 38)	9.9707E-06 ( 38)	
19	3.9071E-06 ( 40)	4.1783E-06 ( 40)	4.2542E-06 ( 40)	4.2070E-06 ( 40)	4.0869E-06 ( 40)	
20	4.9413E-06 ( 30)	5.0661E-06 ( 30)	5.3233E-06 ( 39)	5.8410E-06 (277)	6.1995E-06 (277)	
21	4.8076E-06 ( 39)	5.2272E-06 ( 41)	5.5787E-06 (205)	5.8989E-06 (205)	6.3689E-06 (102)	
22	5.0643E-06 (276)	4.9657E-06 (276)	4.8448E-06 (133)	4.6086E-06 (133)	4.9842E-06 (242)	
23	6.6239E-06 (103)	7.2835E-06 (103)	7.4194E-06 (142)	7.0700E-06 (142)	6.7213E-06 (142)	
24	8.6068E-06 (278)	8.2082E-06 (278)	8.3467E-06 (277)	8.4067E-06 (102)	7.7977E-06 (102)	
25	4.8769E-06 (101)	4.6513E-06 (100)	4.4768E-06 (100)	4.2413E-06 (100)	4.0610E-06 (297)	
26	4.5858E-06 (242)	4.3274E-06 (242)	4.0333E-06 (242)	3.7620E-06 (242)	3.7677E-06 ( 97)	
27	9.5380E-06 (217)	8.8577E-06 (217)	8.4011E-06 (240)	8.2126E-06 (240)	7.9762E-06 (240)	
28	4.5134E-06 (155)	4.3984E-06 (111)	4.5534E-06 (112)	4.4442E-06 (112)	4.2922E-06 (112)	
29	4.7257E-06 (112)	4.4939E-06 (112)	4.2053E-06 (112)	3.9038E-06 (112)	3.7868E-06 ( 54)	
30	8.5408E-06 (258)	8.8504E-06 ( 86)	8.9487E-06 ( 86)	8.8022E-06 ( 86)	8.5506E-06 ( 86)	
31	4.7693E-06 ( 87)	5.0948E-06 ( 87)	5.2452E-06 ( 87)	5.2284E-06 ( 87)	5.0714E-06 (121)	
32	4.5152E-06 ( 87)	5.2420E-06 ( 93)	5.4607E-06 ( 87)	5.5986E-06 ( 87)	5.6327E-06 ( 87)	
33	4.5268E-06 (249)	4.2128E-06 ( 93)	4.0461E-06 (202)	4.0752E-06 ( 63)	3.9699E-06 ( 93)	
34	5.1456E-06 ( 92)	4.7452E-06 (206)	4.6681E-06 ( 88)	4.6518E-06 ( 88)	4.5661E-06 ( 88)	
35	4.7459E-06 ( 88)	4.7956E-06 ( 88)	4.6843E-06 ( 88)	4.4893E-06 ( 88)	4.3883E-06 (250)	
36	1.0442E-05 ( 65)	1.0197E-05 ( 94)	9.7786E-06 ( 94)	9.6877E-06 (233)	1.0199E-05 (233)	

88

PLANT NAME: KISS. UTILITIES      POLLUTANT: SO2      AIR QUALITY UNITS: GM/M\*\*3  
 YEARLY SECOND MAXIMUM 24-HOUR CONC= 9.7511E-06      DIRECTION= 36      DISTANCE= 2.0 KM      DAY=102  
 YEAR= 78

SECOND HIGHEST 24-HOUR CONCENTRATION AT EACH RECEPTOR

RANGE	0.5 KM	1.0 KM	1.5 KM	2.0 KM	2.5 KM
DIR					
1	6.6684E-07 (212)	4.4711E-06 (186)	4.8122E-06 (184)	5.3957E-06 (247)	5.3214E-06 ( 44)
2	2.7929E-07 (183)	3.8027E-06 (119)	6.0879E-06 ( 25)	7.2907E-06 ( 25)	6.9143E-06 (184)
3	2.8993E-07 (187)	2.7579E-06 (136)	4.7117E-06 (136)	4.5588E-06 (136)	4.6369E-06 (119)
4	2.6206E-07 (145)	2.6508E-06 (184)	5.0109E-06 (135)	6.0498E-06 (119)	4.9566E-06 (119)
5	2.6216E-07 (175)	2.9127E-06 (119)	3.9711E-06 ( 69)	5.6045E-06 (135)	4.8465E-06 (135)
6	2.4570E-07 (116)	4.3671E-06 (116)	4.8664E-06 (116)	4.3259E-06 (135)	4.0070E-06 (134)
7	1.0976E-07 (135)	2.3528E-06 (111)	3.2937E-06 (116)	3.4260E-06 (121)	3.2238E-06 (121)
8	1.1671E-07 (116)	2.1805E-06 (111)	4.9358E-06 (111)	5.3251E-06 (111)	4.8992E-06 (111)
9	2.3241E-07 (156)	2.6727E-06 (134)	3.5541E-06 ( 52)	5.0793E-06 ( 26)	5.2763E-06 ( 20)
10	2.3241E-07 (156)	2.3801E-06 (248)	3.7014E-06 ( 9)	4.1203E-06 (116)	3.5446E-06 ( 20)
11	2.8265E-07 (182)	2.4583E-06 (160)	2.1291E-06 (248)	2.6204E-06 ( 53)	3.0450E-06 ( 53)
12	2.2480E-07 (160)	3.1444E-06 (249)	4.6982E-06 (279)	4.8076E-06 (279)	5.2567E-06 ( 28)
13	1.9089E-07 (249)	5.0520E-06 (117)	6.1675E-06 (249)	6.1264E-06 (279)	5.6115E-06 (255)
14	2.4378E-07 (250)	4.0838E-06 (231)	5.7819E-06 (117)	6.5938E-06 (279)	6.9950E-06 ( 76)
15	1.8446E-07 (249)	2.7343E-06 (231)	4.5583E-06 (254)	4.7761E-06 (250)	4.4100E-06 (250)
16	7.4735E-08 (249)	1.7918E-06 (254)	3.8538E-06 (308)	4.6337E-06 (307)	4.6886E-06 ( 81)
17	1.9948E-08 (250)	1.3448E-06 (125)	2.8794E-06 (308)	3.6948E-06 ( 11)	4.4867E-06 ( 41)
18	3.4222E-08 (175)	2.1561E-06 (125)	4.0649E-06 (324)	5.7855E-06 ( 11)	7.0285E-06 (304)
19	1.2399E-07 (161)	2.3285E-06 (144)	2.8584E-06 (145)	3.9183E-06 ( 40)	5.7720E-06 (304)
20	2.5828E-07 (161)	2.6182E-06 (144)	4.6537E-06 (145)	4.8205E-06 (125)	4.3532E-06 (316)
21	3.0411E-07 (161)	3.5276E-06 (145)	5.1552E-06 (316)	5.0304E-06 (145)	3.9409E-06 ( 77)
22	2.8612E-07 (182)	3.7556E-06 (161)	5.6565E-06 (217)	5.3393E-06 (269)	5.3902E-06 (269)
23	2.6895E-07 (186)	3.5607E-06 (251)	6.2772E-06 (269)	7.9810E-06 (269)	7.3548E-06 (237)
24	2.5833E-07 ( 89)	3.6387E-06 (130)	5.6445E-06 (106)	6.5815E-06 (262)	7.0210E-06 (114)
25	2.2237E-07 (245)	4.0337E-06 (179)	5.4992E-06 (162)	6.0255E-06 (147)	6.1638E-06 (363)
26	2.8523E-07 (245)	4.5824E-06 (195)	8.2899E-06 (149)	9.1331E-06 (149)	8.2397E-06 (163)
27	2.7790E-07 (202)	5.1089E-06 (202)	7.2683E-06 (140)	8.3179E-06 (204)	8.5151E-06 (204)
28	2.9976E-07 ( 93)	4.1501E-06 (176)	5.1672E-06 ( 93)	6.3061E-06 ( 93)	6.5364E-06 ( 93)
29	2.4717E-07 (190)	4.1021E-06 (144)	5.4130E-06 (205)	5.5318E-06 (203)	5.1918E-06 (113)
30	2.4370E-07 (150)	3.9551E-06 (216)	6.3684E-06 (216)	5.7662E-06 ( 78)	5.6932E-06 ( 78)
31	1.7041E-07 (150)	3.9866E-06 (216)	6.4316E-06 (107)	6.6430E-06 (222)	6.4818E-06 ( 78)
32	2.3428E-07 (108)	3.4295E-06 (108)	5.7646E-06 (201)	5.6351E-06 (201)	4.7128E-06 (201)
33	2.6778E-07 (207)	5.4547E-06 (190)	5.5908E-06 (100)	5.9121E-06 (100)	6.0250E-06 ( 19)
34	3.1242E-07 (180)	5.8058E-06 (207)	5.7767E-06 (207)	5.6915E-06 (199)	5.8013E-06 (154)
35	5.1600E-07 (180)	5.2485E-06 (129)	7.4507E-06 (120)	7.0323E-06 (120)	6.5825E-06 (102)
36	1.1166E-06 (187)	4.8125E-06 (102)	9.3820E-06 (102)	9.7511E-06 (102)	9.2162E-06 (338)

18

PLANT NAME: KISS. UTILITIES                      POLLUTANT: SO2                      AIR QUALITY UNITS: GM/M\*\*3  
 YEARLY SECOND MAXIMUM 24-HOUR CONC= 9.9757E-06    DIRECTION= 27    DISTANCE= 4.0 KM    DAY=169  
 YEAR= 78

SECOND HIGHEST 24-HOUR CONCENTRATION AT EACH RECEPTOR

RANGE	3.0 KM	3.5 KM	4.0 KM	4.5 KM	5.0 KM
DIR					
1	4.6968E-06 (247)	4.4485E-06 (338)	4.6181E-06 (338)	4.6343E-06 (338)	4.5827E-06 (338)
2	6.5626E-06 (184)	6.1960E-06 ( 25)	5.5858E-06 ( 25)	5.8117E-06 (355)	5.9349E-06 (355)
3	3.6590E-06 (119)	2.9002E-06 (119)	2.7390E-06 (355)	2.8697E-06 ( 74)	3.0111E-06 ( 74)
4	5.3498E-06 ( 85)	5.5764E-06 ( 85)	5.5652E-06 ( 85)	5.4181E-06 ( 85)	5.1990E-06 ( 85)
5	5.3100E-06 (355)	5.4236E-06 (355)	5.3300E-06 (355)	5.1269E-06 (355)	5.0085E-06 (213)
6	4.1156E-06 (134)	4.0951E-06 (134)	4.0099E-06 (134)	3.8687E-06 (134)	3.7268E-06 ( 20)
7	2.9835E-06 ( 69)	3.1408E-06 ( 13)	3.4857E-06 (353)	3.4749E-06 (353)	3.5643E-06 ( 55)
8	4.3980E-06 (111)	3.9771E-06 (111)	3.7029E-06 ( 45)	3.8478E-06 ( 45)	3.9220E-06 ( 45)
9	6.6314E-06 ( 26)	6.6850E-06 ( 26)	6.6514E-06 ( 86)	6.8716E-06 ( 86)	6.9616E-06 ( 86)
10	4.3453E-06 ( 20)	4.7459E-06 ( 20)	4.9339E-06 ( 20)	4.9769E-06 ( 20)	4.9378E-06 ( 20)
11	3.1291E-06 ( 53)	3.0141E-06 ( 53)	2.8332E-06 ( 53)	2.9408E-06 ( 63)	3.0418E-06 ( 63)
12	6.1736E-06 ( 28)	6.6638E-06 ( 28)	6.9006E-06 ( 28)	6.8977E-06 ( 28)	6.7944E-06 ( 28)
13	5.0129E-06 ( 53)	4.8005E-06 ( 53)	4.4865E-06 ( 53)	4.1438E-06 ( 53)	3.8069E-06 ( 53)
14	7.1252E-06 ( 76)	6.8461E-06 ( 76)	6.4357E-06 ( 76)	5.9859E-06 ( 76)	5.5411E-06 ( 76)
15	3.9424E-06 (250)	4.3316E-06 (307)	4.9328E-06 (307)	5.2883E-06 (307)	5.4837E-06 (307)
16	4.1223E-06 (346)	4.5459E-06 (346)	4.7832E-06 (346)	5.0398E-06 (280)	5.1935E-06 (280)
17	5.2176E-06 (288)	5.6171E-06 (288)	5.8007E-06 (288)	6.0839E-06 (305)	6.4884E-06 (305)
18	7.7408E-06 (288)	8.4179E-06 (325)	8.8772E-06 (325)	9.0623E-06 (325)	9.0064E-06 (288)
19	6.1477E-06 (304)	6.1448E-06 (304)	6.2198E-06 ( 36)	6.5277E-06 ( 36)	6.6585E-06 ( 36)
20	4.5946E-06 ( 36)	5.1393E-06 ( 36)	5.3805E-06 ( 36)	5.4215E-06 ( 36)	5.5007E-06 (296)
21	4.3357E-06 ( 77)	4.3828E-06 ( 77)	4.1016E-06 ( 4)	4.0767E-06 ( 77)	3.9412E-06 ( 88)
22	5.3494E-06 (271)	5.3417E-06 (271)	5.2275E-06 (271)	5.0510E-06 (271)	4.9953E-06 (302)
23	6.6401E-06 (267)	6.1839E-06 (318)	6.9692E-06 (104)	7.2646E-06 (104)	7.3868E-06 (104)
24	6.0195E-06 (114)	5.1552E-06 (114)	4.8371E-06 (234)	4.9874E-06 (234)	5.0438E-06 (234)
25	6.8623E-06 (363)	7.0690E-06 (363)	7.0306E-06 (363)	6.8343E-06 (363)	6.5596E-06 (363)
26	7.9746E-06 (149)	7.2173E-06 (149)	7.0146E-06 (364)	7.0542E-06 (364)	6.9788E-06 (364)
27	8.9402E-06 (171)	9.5112E-06 (171)	9.9757E-06 (169)	9.7528E-06 (169)	9.4590E-06 (169)
28	6.1653E-06 ( 93)	6.4216E-06 (113)	6.7201E-06 (113)	6.8152E-06 (113)	6.7750E-06 (113)
29	5.3907E-06 (205)	4.7643E-06 (205)	4.2296E-06 (205)	3.8188E-06 (205)	3.6509E-06 (299)
30	5.1214E-06 ( 78)	4.6489E-06 ( 83)	4.7686E-06 ( 7)	4.9185E-06 ( 7)	4.6582E-06 (203)
31	5.8894E-06 ( 78)	5.1815E-06 ( 78)	4.7611E-06 ( 80)	4.5931E-06 ( 80)	4.3693E-06 ( 80)
32	4.4781E-06 (190)	4.5604E-06 ( 8)	4.8393E-06 ( 8)	4.9526E-06 ( 8)	4.9664E-06 ( 8)
33	6.2964E-06 ( 19)	6.4249E-06 (124)	6.6066E-06 (124)	6.5270E-06 ( 73)	6.4784E-06 (124)
34	5.7558E-06 (210)	5.8091E-06 (199)	5.6371E-06 (199)	5.4844E-06 (331)	5.6287E-06 (331)
35	6.2602E-06 (102)	5.8872E-06 (102)	5.4347E-06 (160)	5.3104E-06 (102)	5.2292E-06 ( 74)
36	9.7847E-06 ( 25)	9.0085E-06 ( 25)	8.2120E-06 ( 25)	7.4651E-06 ( 25)	6.7905E-06 ( 25)

22



PLANT NAME: KISS. UTILITIES                      POLLUTANT: SO2                      AIR QUALITY UNITS: GM/M\*\*3  
 YEARLY SECOND MAXIMUM    3-HOUR CONC= 3.8763E-05    DIRECTION= 18    DISTANCE= 2.5 KM    DAY=297    TIME PERIOD= 5  
 YEAR= 74

DIR	SECOND HIGHEST 3-HOUR CONCENTRATION AT EACH RECEPTOR									
	RANGE	0.5 KM	1.0 KM	1.5 KM	2.0 KM	2.5 KM				
1	1.5099E-06	( 80, 4)	1.9848E-05	(196, 4)	2.4802E-05	(196, 4)	3.0948E-05	(354, 5)	3.1182E-05	( 50, 6)
2	1.9476E-06	( 80, 4)	2.3125E-05	(152, 4)	2.9710E-05	(152, 4)	2.7555E-05	( 78, 4)	2.7410E-05	( 78, 4)
3	1.4989E-06	(188, 4)	2.5570E-05	( 97, 5)	1.8597E-05	( 97, 5)	1.8039E-05	( 34, 5)	1.7833E-05	( 34, 5)
4	1.0858E-06	(174, 5)	2.8096E-05	(125, 5)	2.9796E-05	(153, 4)	2.9441E-05	(125, 5)	2.7752E-05	(132, 4)
5	3.1547E-06	(176, 4)	2.8044E-05	(176, 4)	3.3743E-05	(146, 5)	3.2349E-05	(146, 5)	2.8729E-05	(146, 5)
6	1.8129E-06	(206, 4)	2.3331E-05	(168, 4)	3.0071E-05	( 90, 5)	2.7611E-05	(230, 5)	2.3678E-05	(230, 5)
7	1.5735E-06	(188, 5)	2.0143E-05	(151, 4)	2.4743E-05	(151, 4)	2.4494E-05	( 89, 5)	2.5754E-05	(203, 4)
8	1.9568E-06	(145, 5)	1.8081E-05	(169, 4)	2.2565E-05	(106, 4)	2.3106E-05	(106, 4)	1.9876E-05	(203, 4)
9	1.7889E-06	(123, 4)	2.0374E-05	( 89, 5)	1.6379E-05	(223, 4)	1.7829E-05	( 7, 4)	1.9967E-05	( 7, 4)
10	2.3805E-06	( 89, 5)	1.9228E-05	(163, 5)	2.1093E-05	(201, 4)	2.1769E-05	( 99, 6)	2.1380E-05	( 99, 6)
11	1.9501E-06	(173, 4)	2.5845E-05	(163, 5)	2.7697E-05	(150, 5)	2.8119E-05	(202, 4)	2.6316E-05	(167, 5)
12	2.3239E-06	(151, 5)	2.9089E-05	(150, 5)	2.9428E-05	(191, 4)	2.6038E-05	(201, 4)	2.3821E-05	(201, 4)
13	2.7497E-06	(211, 4)	2.5493E-05	(151, 5)	2.6858E-05	(114, 4)	2.6315E-05	(163, 4)	2.2586E-05	(196, 6)
14	1.0569E-06	(207, 6)	2.3591E-05	(196, 5)	2.5325E-05	(145, 5)	2.6074E-05	(291, 4)	2.4975E-05	(206, 6)
15	7.6402E-07	(196, 5)	2.3976E-05	(211, 4)	2.5572E-05	( 69, 5)	2.1204E-05	(196, 5)	2.1484E-05	(163, 6)
16	7.0636E-07	(163, 5)	1.1897E-05	(196, 5)	1.9483E-05	( 72, 4)	2.0325E-05	(107, 4)	1.8365E-05	( 57, 5)
17	2.4251E-07	(100, 5)	2.3923E-05	(124, 4)	3.3177E-05	(124, 4)	2.9343E-05	(124, 4)	2.4881E-05	(124, 4)
18	4.5643E-07	(198, 4)	2.8545E-05	(128, 5)	3.1928E-05	(124, 4)	3.8717E-05	(297, 5)	3.8763E-05	(297, 5)
19	7.5096E-07	(181, 6)	2.6037E-05	(128, 5)	2.0604E-05	(319, 4)	2.0979E-05	(265, 4)	2.1383E-05	(265, 4)
20	1.9980E-06	(211, 5)	2.4304E-05	(108, 5)	2.0171E-05	(276, 5)	2.1047E-05	(296, 5)	2.1421E-05	(257, 4)
21	1.7735E-06	(211, 5)	2.0873E-05	(109, 5)	2.4546E-05	(115, 4)	2.8778E-05	(330, 4)	3.0947E-05	(277, 5)
22	3.5767E-06	(225, 5)	2.4457E-05	(117, 5)	3.2150E-05	(100, 4)	2.9077E-05	(100, 4)	2.3991E-05	(100, 4)
23	3.1686E-06	(225, 5)	2.2271E-05	( 67, 6)	3.1931E-05	(171, 5)	3.7368E-05	(278, 5)	3.7233E-05	(278, 5)
24	1.8147E-06	(238, 4)	1.9453E-05	(111, 5)	2.1750E-05	(110, 4)	2.0803E-05	(180, 5)	2.1380E-05	(195, 3)
25	1.4145E-06	( 67, 6)	1.5560E-05	(227, 5)	2.0796E-05	(262, 4)	2.4660E-05	(262, 4)	2.3090E-05	(262, 4)
26	9.9994E-07	(238, 4)	1.8438E-05	(140, 5)	2.4671E-05	(224, 5)	2.6178E-05	(140, 5)	2.2904E-05	(301, 5)
27	1.7140E-06	(156, 4)	2.7751E-05	(205, 4)	3.1104E-05	(140, 4)	2.8494E-05	(140, 4)	2.3742E-05	(287, 4)
28	1.7711E-06	(165, 4)	1.8692E-05	(246, 4)	2.7841E-05	(246, 4)	2.3735E-05	(133, 5)	1.8258E-05	(287, 4)
29	1.7711E-06	(165, 4)	1.8283E-05	(170, 4)	2.2617E-05	(321, 4)	2.8654E-05	(243, 5)	2.8762E-05	(243, 5)
30	1.6960E-06	(169, 4)	2.0019E-05	(211, 5)	2.4291E-05	( 62, 5)	2.3915E-05	( 62, 5)	2.3056E-05	(239, 6)
31	5.9332E-06	(135, 5)	2.0035E-05	(211, 5)	2.4557E-05	(164, 4)	2.1956E-05	( 65, 4)	2.0468E-05	( 65, 4)
32	1.2869E-05	(135, 5)	2.9983E-05	(103, 5)	3.2205E-05	(243, 4)	2.8441E-05	(159, 4)	2.3790E-05	(159, 4)
33	4.7516E-06	(220, 5)	2.2718E-05	(243, 4)	2.9226E-05	(227, 4)	2.7496E-05	(214, 4)	2.4793E-05	( 94, 4)
34	1.9562E-06	(207, 4)	1.6689E-05	(207, 4)	2.2897E-05	(227, 4)	2.7763E-05	(132, 1)	3.1602E-05	(132, 1)
35	1.6489E-06	(221, 4)	2.0531E-05	( 94, 5)	2.9208E-05	(152, 5)	2.6918E-05	(152, 5)	2.3303E-05	(158, 4)
36	8.0647E-07	(221, 4)	1.8225E-05	(176, 3)	2.4774E-05	( 9, 5)	2.6433E-05	( 9, 5)	2.3510E-05	( 9, 5)

23

PLANT NAME: KISS. UTILITIES      POLLUTANT: SO2      AIR QUALITY UNITS: GM/M\*\*3  
 YEARLY SECOND MAXIMUM    3-HOUR CONC= 3.5682E-05    DIRECTION= 18    DISTANCE= 3.0 KM    DAY=279    TIME PERIOD= 6  
 YEAR= 74

DIR	SECOND HIGHEST 3-HOUR CONCENTRATION AT EACH RECEPTOR				
	RANGE	3.0 KM	3.5 KM	4.0 KM	4.5 KM
1	3.0189E-05 ( 50, 6)	2.8020E-05 ( 50, 6)	2.5654E-05 ( 50, 6)	2.3366E-05 ( 50, 6)	2.1262E-05 ( 50, 6)
2	2.4643E-05 ( 78, 4)	2.4191E-05 ( 38, 4)	2.1714E-05 ( 50, 5)	1.9276E-05 ( 50, 5)	1.7201E-05 ( 50, 5)
3	1.6773E-05 ( 84, 4)	1.4612E-05 ( 84, 4)	1.4952E-05 ( 34, 5)	1.4041E-05 ( 34, 5)	1.3380E-05 ( 34, 4)
4	2.6129E-05 (153, 4)	2.2015E-05 (153, 4)	2.0619E-05 (143, 6)	2.1799E-05 (132, 4)	1.9987E-05 (132, 4)
5	2.5066E-05 (146, 5)	2.1771E-05 (146, 5)	1.9016E-05 (146, 5)	1.7657E-05 (349, 8)	1.8702E-05 ( 50, 7)
6	2.3463E-05 ( 88, 6)	2.3490E-05 ( 88, 6)	2.2748E-05 ( 88, 6)	2.1636E-05 ( 88, 6)	2.0378E-05 ( 88, 6)
7	2.0467E-05 (203, 4)	1.8451E-05 (174, 6)	1.8475E-05 (324, 6)	1.8983E-05 ( 88, 7)	1.9557E-05 ( 89, 5)
8	1.9022E-05 (106, 4)	1.6622E-05 (193, 5)	1.6303E-05 (146, 1)	1.9680E-05 (146, 1)	2.2512E-05 (146, 1)
9	1.9569E-05 ( 7, 4)	1.8065E-05 ( 7, 4)	1.9864E-05 (325, 7)	2.2510E-05 ( 89, 7)	2.3520E-05 ( 89, 7)
10	2.1151E-05 (113, 6)	2.1861E-05 (113, 6)	2.1986E-05 ( 99, 5)	1.8530E-05 ( 99, 5)	1.6634E-05 (336, 6)
11	2.2251E-05 (167, 5)	2.0089E-05 (351, 6)	2.0158E-05 (351, 6)	2.0454E-05 (335, 3)	2.0224E-05 (335, 3)
12	2.0561E-05 (201, 4)	1.8715E-05 (145, 4)	1.6105E-05 (336, 7)	1.7282E-05 (336, 7)	1.8192E-05 (316, 6)
13	2.1945E-05 (337, 4)	2.1568E-05 (196, 6)	1.9619E-05 (196, 6)	1.7586E-05 (196, 6)	1.8281E-05 ( 40, 7)
14	2.3282E-05 (325, 4)	2.2408E-05 (206, 6)	2.3451E-05 (325, 1)	2.3649E-05 (325, 1)	2.3489E-05 (325, 1)
15	2.0699E-05 (163, 6)	1.8430E-05 ( 69, 5)	1.7660E-05 (280, 4)	1.8097E-05 (280, 4)	1.8080E-05 (280, 4)
16	1.7576E-05 ( 57, 5)	1.5859E-05 ( 57, 5)	1.6178E-05 (275, 2)	1.7167E-05 ( 96, 2)	1.7864E-05 ( 96, 2)
17	2.1201E-05 (148, 4)	1.9033E-05 ( 51, 5)	1.8011E-05 ( 57, 4)	1.8466E-05 (311, 2)	1.9711E-05 (311, 2)
18	3.5682E-05 (279, 6)	3.1239E-05 ( 51, 5)	2.8118E-05 (297, 4)	2.7099E-05 (297, 4)	2.5884E-05 (297, 4)
19	2.0975E-05 (108, 3)	2.0829E-05 ( 51, 5)	1.9900E-05 (108, 3)	1.8693E-05 (108, 3)	1.7933E-05 (330, 7)
20	2.4200E-05 (296, 6)	2.5169E-05 (296, 5)	2.3907E-05 (296, 5)	2.3479E-05 (297, 1)	2.6232E-05 (297, 1)
21	2.9617E-05 (277, 5)	2.7303E-05 (277, 5)	2.4883E-05 (277, 5)	2.2591E-05 (277, 5)	2.0509E-05 (277, 5)
22	2.1744E-05 (267, 4)	2.1823E-05 (283, 5)	2.1778E-05 (258, 5)	2.1294E-05 (283, 5)	2.3669E-05 (148, 1)
23	3.4784E-05 (195, 4)	2.9446E-05 (195, 4)	2.4898E-05 (195, 4)	2.1172E-05 (195, 4)	1.9843E-05 (285, 5)
24	1.9943E-05 (195, 3)	1.8476E-05 (117, 6)	1.7580E-05 (117, 6)	1.6001E-05 (255, 6)	1.6013E-05 ( 18, 7)
25	2.0074E-05 (262, 4)	1.7074E-05 (262, 4)	1.6505E-05 (198, 4)	1.5665E-05 (198, 4)	1.6604E-05 (340, 7)
26	2.1933E-05 (301, 5)	2.0147E-05 (301, 5)	1.8264E-05 (301, 5)	1.6671E-05 (302, 6)	1.7538E-05 (194, 7)
27	2.0497E-05 (287, 4)	1.8331E-05 (184, 3)	1.6152E-05 (357, 4)	1.4318E-05 (101, 4)	1.3529E-05 (159, 7)
28	1.6564E-05 (321, 5)	1.6733E-05 (215, 6)	1.5581E-05 (357, 5)	1.6085E-05 (102, 3)	1.6567E-05 (102, 3)
29	2.5639E-05 (139, 5)	2.1327E-05 (139, 5)	2.0898E-05 (102, 7)	2.1541E-05 ( 24, 6)	2.1458E-05 ( 24, 6)
30	1.9912E-05 ( 65, 4)	1.8214E-05 (184, 4)	1.9168E-05 (184, 4)	1.9431E-05 (184, 4)	1.9248E-05 (184, 4)
31	1.8546E-05 ( 52, 4)	1.8390E-05 (207, 7)	1.7760E-05 ( 49, 5)	1.7712E-05 (207, 7)	1.6993E-05 (207, 7)
32	1.9402E-05 (159, 4)	1.8392E-05 (131, 3)	1.6192E-05 ( 24, 5)	1.6385E-05 ( 24, 5)	1.6316E-05 (131, 3)
33	2.3370E-05 ( 94, 4)	2.0089E-05 ( 63, 4)	1.9373E-05 ( 94, 4)	1.7531E-05 ( 94, 4)	1.6330E-05 ( 27, 1)
34	3.1721E-05 (186, 4)	2.9162E-05 (186, 4)	2.6119E-05 (186, 4)	2.3158E-05 (186, 4)	2.1057E-05 (177, 2)
35	1.9904E-05 (309, 5)	1.7516E-05 ( 21, 2)	2.1738E-05 ( 27, 4)	2.1397E-05 ( 27, 4)	2.0710E-05 ( 27, 4)
36	2.1379E-05 ( 28, 5)	2.1466E-05 (185, 5)	2.2300E-05 (209, 8)	2.2590E-05 ( 28, 5)	2.1915E-05 ( 28, 5)

24

PLANT NAME: KISS. UTILITIES                      POLLUTANT: SO2                      AIR QUALITY UNITS: GM/M\*\*3  
 YEARLY SECOND MAXIMUM    3-HOUR CONC= 3.8864E-05    DIRECTION= 8    DISTANCE= 1.0 KM    DAY=225    TIME PERIOD= 5  
 YEAR= 75

DIR	SECOND HIGHEST 3-HOUR CONCENTRATION AT EACH RECEPTOR									
	RANGE	0.5 KM	1.0 KM	1.5 KM	2.0 KM	2.5 KM				
1	1.5604E-06	(207, 5)	2.5567E-05	(215, 5)	3.3629E-05	(167, 4)	3.2996E-05	( 92, 4)	2.8828E-05	( 92, 4)
2	3.3418E-06	(207, 5)	2.4622E-05	(207, 5)	2.6972E-05	(223, 5)	2.7132E-05	(207, 5)	2.3885E-05	(207, 5)
3	1.4112E-06	(126, 4)	1.7439E-05	(166, 5)	2.5647E-05	(166, 5)	2.6414E-05	( 66, 5)	2.6209E-05	( 66, 5)
4	1.9492E-06	(217, 4)	1.6353E-05	(217, 4)	2.9697E-05	(188, 4)	2.9812E-05	(188, 4)	2.5609E-05	(188, 4)
5	1.8616E-06	(219, 5)	3.0038E-05	(203, 4)	3.0161E-05	(186, 4)	3.2557E-05	( 89, 5)	3.3670E-05	( 89, 5)
6	2.0973E-06	(219, 5)	2.3964E-05	(191, 4)	3.1302E-05	(191, 4)	2.7216E-05	(191, 4)	2.8521E-05	( 37, 6)
7	1.3941E-06	(203, 4)	2.9949E-05	(110, 4)	3.3761E-05	(186, 5)	2.9810E-05	(186, 5)	2.5023E-05	(110, 4)
8	1.4251E-06	(157, 4)	3.8864E-05	(225, 5)	3.5162E-05	(157, 5)	2.9854E-05	(157, 5)	2.5941E-05	(157, 4)
9	1.1818E-06	(124, 5)	1.8278E-05	(157, 5)	2.3571E-05	(124, 5)	2.6371E-05	( 1, 5)	2.7117E-05	( 1, 5)
10	2.2476E-06	(138, 5)	1.6169E-05	(145, 5)	2.4419E-05	(186, 6)	3.3259E-05	(186, 6)	2.7147E-05	(138, 5)
11	1.4869E-06	(163, 4)	2.4867E-05	(164, 5)	3.4312E-05	(128, 5)	3.2177E-05	(129, 4)	2.6623E-05	( 93, 6)
12	1.9117E-06	(163, 5)	2.5992E-05	(180, 5)	2.7297E-05	(129, 4)	2.5833E-05	( 55, 5)	2.7132E-05	( 55, 5)
13	1.9996E-06	(156, 5)	2.3089E-05	(105, 4)	3.1856E-05	(128, 4)	3.2883E-05	(244, 5)	2.9202E-05	(244, 5)
14	8.6842E-07	(116, 4)	1.8175E-05	(225, 4)	2.6050E-05	(139, 4)	2.7242E-05	(139, 4)	2.4980E-05	(291, 5)
15	1.1018E-06	(156, 5)	1.6880E-05	( 96, 5)	2.6262E-05	(231, 5)	2.6258E-05	( 94, 4)	2.2920E-05	(361, 4)
16	5.4968E-07	(139, 4)	1.5787E-05	(230, 4)	2.0654E-05	( 96, 5)	2.5256E-05	(102, 4)	2.6617E-05	(102, 4)
17	7.1371E-07	(155, 4)	1.8517E-05	( 85, 5)	2.1042E-05	(155, 4)	1.9721E-05	( 95, 4)	1.8192E-05	( 95, 4)
18	5.2087E-07	( 85, 5)	2.0587E-05	(106, 5)	2.4519E-05	(106, 5)	2.6937E-05	( 85, 5)	2.1384E-05	( 85, 5)
19	6.1240E-07	(106, 5)	1.7053E-05	(244, 4)	2.9420E-05	(106, 5)	3.0444E-05	(131, 4)	2.7304E-05	(131, 4)
20	4.5974E-07	(141, 4)	1.5901E-05	(244, 4)	1.5868E-05	(320, 4)	1.8898E-05	( 21, 4)	1.8950E-05	( 17, 4)
21	6.3983E-07	(141, 4)	1.7001E-05	(181, 5)	2.4744E-05	(141, 4)	2.5157E-05	(320, 4)	2.3686E-05	(184, 4)
22	1.1087E-06	(294, 4)	1.8466E-05	(182, 5)	2.2300E-05	(182, 5)	2.4694E-05	(294, 4)	2.4030E-05	( 96, 4)
23	7.7208E-07	(145, 5)	1.7753E-05	(219, 6)	2.5068E-05	( 45, 5)	2.9036E-05	(338, 4)	2.7129E-05	(338, 4)
24	1.4164E-06	(146, 4)	2.3288E-05	(170, 5)	3.0031E-05	(103, 5)	2.6288E-05	(300, 5)	2.6441E-05	(284, 5)
25	1.9081E-06	(146, 4)	2.2954E-05	(103, 5)	3.3222E-05	(144, 5)	3.2992E-05	(144, 5)	2.8342E-05	(144, 5)
26	1.7994E-06	(225, 5)	2.1520E-05	(146, 4)	2.5288E-05	(234, 5)	2.2016E-05	(234, 5)	2.0230E-05	(112, 4)
27	1.4310E-06	(232, 5)	2.5149E-05	(112, 5)	3.0172E-05	(112, 5)	2.8006E-05	(112, 5)	2.5549E-05	(112, 5)
28	1.2932E-06	(234, 4)	2.5638E-05	(214, 4)	2.9470E-05	(197, 5)	3.1158E-05	(197, 5)	2.8248E-05	(197, 5)
29	6.1982E-07	(234, 4)	1.8718E-05	(205, 5)	2.1389E-05	( 86, 4)	2.3014E-05	(205, 6)	2.4148E-05	(196, 6)
30	1.0902E-06	(225, 4)	1.9595E-05	(117, 4)	2.7669E-05	(260, 5)	2.8019E-05	(117, 4)	2.3735E-05	(260, 5)
31	1.6122E-06	(120, 5)	1.7735E-05	(114, 5)	2.0204E-05	(117, 4)	1.9343E-05	(117, 5)	1.8923E-05	( 19, 4)
32	1.7735E-06	(227, 4)	1.6358E-05	(120, 5)	1.8992E-05	(121, 5)	1.8564E-05	( 53, 5)	1.8496E-05	(316, 4)
33	1.8193E-06	(204, 4)	2.1524E-05	(147, 4)	2.7208E-05	(123, 4)	2.5554E-05	(123, 4)	2.3235E-05	(210, 5)
34	1.9416E-06	(109, 4)	2.8178E-05	(147, 6)	2.8641E-05	(151, 4)	3.0214E-05	(359, 8)	2.9389E-05	(151, 4)
35	3.3536E-06	( 83, 4)	3.0379E-05	(109, 4)	2.7655E-05	(120, 4)	2.4328E-05	(109, 4)	2.0657E-05	( 55, 3)
36	2.0184E-06	( 83, 4)	2.7472E-05	(190, 5)	3.2509E-05	(218, 5)	3.5338E-05	(190, 5)	2.8707E-05	(190, 5)

25

PLANT NAME: KISS. UTILITIES      POLLUTANT: SO2      AIR QUALITY UNITS: GM/M\*\*3  
 YEARLY SECOND MAXIMUM    3-HOUR CONC= 3.2142E-05    DIRECTION= 5    DISTANCE= 3.0 KM    DAY= 89    TIME PERIOD= 5  
 YEAR= 75

RANGE	SECOND HIGHEST 3-HOUR CONCENTRATION AT EACH RECEPTOR				
	3.0 KM	3.5 KM	4.0 KM	4.5 KM	5.0 KM
DIR					
1	2.4894E-05 (167, 4)	2.0685E-05 (167, 4)	1.9178E-05 (191, 3)	1.7908E-05 ( 50, 2)	1.9270E-05 (331, 4)
2	2.1390E-05 ( 4, 5)	1.9954E-05 ( 4, 5)	1.9745E-05 ( 50, 4)	1.9798E-05 (119, 4)	2.0280E-05 ( 19, 7)
3	2.4354E-05 ( 66, 5)	2.1997E-05 ( 66, 5)	1.9741E-05 ( 66, 5)	1.7714E-05 ( 66, 5)	1.5935E-05 ( 66, 5)
4	2.1157E-05 (188, 4)	2.0783E-05 ( 50, 5)	1.9951E-05 ( 50, 5)	1.8846E-05 ( 50, 5)	1.7654E-05 ( 50, 5)
5	3.2142E-05 ( 89, 5)	2.8567E-05 ( 25, 5)	2.4990E-05 ( 61, 1)	2.5598E-05 ( 4, 6)	2.5885E-05 ( 61, 2)
6	2.4041E-05 ( 43, 6)	2.3425E-05 ( 43, 6)	2.2250E-05 ( 43, 6)	2.0863E-05 ( 43, 6)	1.9438E-05 ( 43, 6)
7	2.1459E-05 (101, 5)	2.0717E-05 (101, 5)	2.3535E-05 ( 66, 7)	2.5369E-05 ( 66, 7)	2.6265E-05 ( 73, 5)
8	2.3381E-05 ( 61, 4)	2.0872E-05 ( 81, 6)	2.1529E-05 ( 81, 6)	2.1483E-05 ( 81, 6)	2.1011E-05 ( 81, 6)
9	2.4868E-05 ( 1, 5)	2.1881E-05 ( 1, 5)	2.0688E-05 (139, 1)	2.2036E-05 (325, 7)	2.3324E-05 (325, 7)
10	2.2180E-05 ( 93, 5)	2.2699E-05 (124, 6)	2.2102E-05 (186, 6)	1.8971E-05 (186, 6)	1.7368E-05 ( 73, 7)
11	2.3639E-05 ( 78, 6)	2.6137E-05 ( 93, 6)	2.4586E-05 ( 93, 6)	2.2868E-05 ( 93, 6)	2.1158E-05 ( 93, 6)
12	2.6125E-05 ( 55, 5)	2.4146E-05 ( 55, 5)	2.2034E-05 ( 55, 5)	2.1758E-05 ( 6, 5)	2.1414E-05 ( 67, 7)
13	2.5873E-05 (244, 5)	2.4036E-05 ( 67, 5)	2.3565E-05 ( 67, 5)	2.2645E-05 ( 67, 5)	2.3741E-05 ( 1, 8)
14	2.5002E-05 (355, 3)	2.3988E-05 (231, 5)	2.0554E-05 (291, 5)	1.8652E-05 (291, 5)	1.7952E-05 (297, 8)
15	1.9573E-05 ( 61, 4)	1.8936E-05 ( 61, 4)	2.0049E-05 (361, 4)	1.8523E-05 (361, 4)	1.7083E-05 (361, 4)
16	2.5422E-05 ( 65, 3)	2.3221E-05 ( 15, 3)	2.3954E-05 ( 15, 3)	2.3985E-05 ( 15, 3)	2.3832E-05 ( 15, 3)
17	1.8199E-05 ( 94, 2)	2.2669E-05 (353, 8)	2.6533E-05 ( 94, 2)	2.8443E-05 ( 94, 2)	2.9578E-05 ( 94, 2)
18	1.6896E-05 ( 85, 5)	2.1058E-05 (112, 1)	2.5921E-05 (112, 1)	2.8922E-05 (112, 1)	3.0468E-05 (303, 7)
19	2.3666E-05 (303, 4)	2.0221E-05 ( 64, 4)	2.3133E-05 (303, 4)	2.2087E-05 (303, 4)	2.3596E-05 (363, 1)
20	2.0782E-05 ( 17, 4)	2.0873E-05 ( 17, 4)	2.0230E-05 ( 17, 4)	2.0695E-05 ( 52, 6)	2.1167E-05 ( 52, 6)
21	2.1316E-05 (184, 4)	1.8477E-05 (184, 4)	1.7950E-05 (270, 8)	1.8169E-05 (285, 4)	1.8055E-05 ( 21, 7)
22	2.2613E-05 (283, 5)	2.1542E-05 (283, 5)	2.0139E-05 (283, 5)	2.1632E-05 (319, 6)	2.2158E-05 (319, 6)
23	2.3585E-05 (338, 4)	2.1077E-05 (305, 5)	2.0463E-05 (305, 5)	2.0860E-05 (123, 2)	2.1317E-05 (180, 7)
24	2.4222E-05 (174, 4)	2.4260E-05 (174, 4)	2.3620E-05 (174, 4)	2.3823E-05 (213, 1)	2.2198E-05 (182, 6)
25	2.3423E-05 (144, 5)	1.9258E-05 (144, 5)	1.6930E-05 (239, 6)	1.7367E-05 (239, 6)	1.7365E-05 (239, 6)
26	1.7052E-05 (199, 5)	1.8451E-05 (210, 6)	1.9253E-05 (210, 6)	1.7987E-05 (287, 4)	1.6643E-05 (287, 4)
27	2.3380E-05 (112, 5)	2.1301E-05 (112, 5)	1.9889E-05 (203, 6)	1.8594E-05 (203, 6)	2.0047E-05 (287, 6)
28	2.4463E-05 (197, 5)	2.0920E-05 (197, 5)	1.8272E-05 (114, 4)	1.6512E-05 (205, 6)	1.5594E-05 (205, 6)
29	1.9730E-05 (196, 6)	1.9483E-05 ( 86, 5)	1.9922E-05 (114, 7)	2.0324E-05 ( 86, 5)	1.9988E-05 ( 86, 5)
30	2.2325E-05 (113, 5)	2.2032E-05 ( 9, 7)	2.6277E-05 ( 9, 7)	2.5962E-05 (107, 7)	2.7345E-05 (107, 7)
31	1.7556E-05 (104, 4)	1.6782E-05 ( 19, 4)	1.4897E-05 ( 19, 4)	1.3815E-05 (265, 8)	1.4232E-05 (167, 1)
32	1.6751E-05 ( 53, 5)	1.9637E-05 (109, 1)	2.3742E-05 (109, 1)	2.6152E-05 (109, 1)	2.7977E-05 (109, 2)
33	2.0995E-05 (359, 4)	2.1583E-05 (149, 4)	2.1066E-05 (149, 4)	1.9956E-05 (149, 4)	1.9612E-05 (217, 7)
34	2.9043E-05 ( 8, 4)	3.0276E-05 ( 8, 4)	3.0228E-05 ( 8, 4)	2.8441E-05 (359, 8)	2.6300E-05 (359, 8)
35	2.1002E-05 (120, 4)	2.0247E-05 ( 72, 6)	1.9947E-05 ( 72, 6)	1.9944E-05 ( 71, 5)	1.9758E-05 ( 71, 5)
36	2.4136E-05 (290, 5)	2.2915E-05 (290, 5)	2.1372E-05 (290, 5)	2.1732E-05 ( 13, 2)	2.1764E-05 ( 13, 2)

26

PLANT NAME: KISS. UTILITIES      POLLUTANT: SO2      AIR QUALITY UNITS: GM/M\*\*3  
 YEARLY SECOND MAXIMUM    3-HOUR CONC= 4.2207E-05    DIRECTION= 9    DISTANCE= 1.5 KM    DAY=196    TIME PERIOD= 5  
 YEAR= 76

DIR	SECOND HIGHEST		3-HOUR CONCENTRATION AT EACH RECEPTOR							
	RANGE	0.5 KM	1.0 KM	1.5 KM	2.0 KM	2.5 KM				
1	1.1412E-06	(152, 6)	2.3389E-05	(152, -6)	2.9833E-05	(152, 6)	2.5186E-05	(152, 6)	2.1879E-05	(299, 4)
2	1.6131E-06	(186, 4)	1.8115E-05	(221, 5)	2.9426E-05	(187, 4)	2.8074E-05	( 90, 5)	2.5545E-05	(187, 4)
3	1.4869E-06	(226, 4)	1.9805E-05	(213, 4)	2.5280E-05	( 69, 4)	2.7480E-05	(187, 4)	2.5417E-05	(214, 3)
4	2.0031E-06	(226, 4)	2.5076E-05	(213, 4)	2.6215E-05	( 95, 5)	2.5021E-05	(273, 4)	2.3361E-05	(273, 4)
5	1.8809E-06	( 69, 5)	2.0780E-05	(117, 5)	3.0679E-05	( 95, 5)	2.9097E-05	( 95, 5)	2.5886E-05	( 32, 6)
6	3.4720E-06	(116, 5)	2.1255E-05	(116, 5)	3.0784E-05	( 76, 6)	3.1876E-05	(117, 5)	3.1972E-05	( 76, 6)
7	2.6611E-06	(116, 5)	1.6862E-05	(145, 4)	2.3520E-05	(315, 5)	2.6784E-05	(133, 3)	2.5569E-05	(133, 3)
8	4.0418E-06	(145, 4)	2.2895E-05	(198, 4)	2.7204E-05	(145, 5)	2.6694E-05	(197, 3)	2.3858E-05	(198, 4)
9	6.7098E-06	(145, 4)	3.6026E-05	(196, 5)	4.2207E-05	(196, 5)	3.4060E-05	(139, 5)	2.7226E-05	(196, 5)
10	9.9714E-07	(204, 6)	1.6258E-05	( 17, 5)	2.5923E-05	(207, 4)	2.6297E-05	(198, 3)	2.6526E-05	(198, 3)
11	9.9714E-07	(204, 6)	1.8422E-05	(213, 5)	2.4674E-05	(213, 5)	2.4747E-05	(275, 5)	2.5418E-05	(275, 5)
12	1.5490E-06	(221, 4)	2.1930E-05	(221, 4)	2.2921E-05	(213, 5)	2.3053E-05	( 77, 6)	2.3881E-05	(323, 5)
13	2.0714E-06	(221, 4)	2.3989E-05	(221, 4)	2.7277E-05	(118, 5)	2.3191E-05	(323, 4)	2.1572E-05	(362, 1)
14	2.0306E-06	(200, 4)	2.0330E-05	(157, 5)	2.4701E-05	(295, 4)	2.5218E-05	(236, 4)	2.8644E-05	(295, 4)
15	2.0048E-06	(207, 4)	1.9744E-05	(124, 5)	2.4681E-05	( 96, 5)	2.6498E-05	(208, 4)	2.0781E-05	(208, 4)
16	1.8622E-06	(247, 4)	1.7146E-05	(247, 4)	2.2459E-05	(301, 4)	2.5081E-05	(301, 4)	2.2844E-05	(301, 4)
17	1.7310E-06	(219, 4)	2.4303E-05	(157, 4)	1.8898E-05	(220, 5)	2.3407E-05	(255, 3)	1.9836E-05	(157, 4)
18	1.6851E-06	(157, 4)	2.7757E-05	(191, 4)	2.2993E-05	(308, 1)	2.7675E-05	(308, 1)	2.8677E-05	(302, 1)
19	2.7146E-06	(157, 5)	2.1292E-05	(125, 5)	2.4084E-05	(287, 4)	2.4790E-05	(287, 4)	2.6515E-05	(302, 3)
20	7.7873E-06	(184, 6)	3.0677E-05	(157, 5)	3.2678E-05	(140, 4)	3.1304E-05	(100, 5)	3.0833E-05	(100, 5)
21	3.0539E-06	(199, 6)	2.5032E-05	(204, 4)	2.1743E-05	(100, 4)	1.8165E-05	(109, 5)	1.9343E-05	( 57, 5)
22	1.7844E-06	(245, 4)	2.7862E-05	(199, 6)	2.7138E-05	(263, 5)	2.4375E-05	(263, 5)	2.0756E-05	(164, 5)
23	2.0974E-06	(245, 4)	2.0378E-05	(264, 5)	3.0455E-05	(264, 5)	2.7474E-05	(242, 4)	2.2671E-05	(242, 4)
24	1.1198E-06	(226, 5)	1.9191E-05	(119, 5)	2.5074E-05	(230, 4)	2.4816E-05	(230, 4)	2.2007E-05	(344, 5)
25	9.1942E-07	(245, 4)	1.6194E-05	(245, 4)	2.6102E-05	(141, 4)	2.4656E-05	( 43, 5)	2.2487E-05	(307, 5)
26	1.3363E-06	(114, 5)	1.7616E-05	(268, 5)	2.8632E-05	(268, 5)	3.0036E-05	(290, 4)	2.8783E-05	(290, 4)
27	2.0280E-06	(114, 5)	1.7475E-05	(252, 4)	2.1747E-05	(204, 5)	1.9685E-05	(106, 4)	1.8890E-05	(167, 6)
28	1.7755E-06	(248, 4)	2.0471E-05	( 63, 6)	2.3665E-05	(251, 5)	2.4072E-05	(298, 5)	2.2510E-05	(204, 5)
29	1.3042E-06	(229, 4)	2.1833E-05	(251, 5)	2.7193E-05	(251, 5)	2.1425E-05	(251, 5)	1.9947E-05	(134, 6)
30	1.9986E-06	(245, 5)	1.9313E-05	(248, 5)	2.3865E-05	(218, 4)	2.2969E-05	( 62, 4)	1.9947E-05	( 64, 4)
31	2.1510E-06	(135, 5)	1.9282E-05	(135, 5)	2.4043E-05	(180, 5)	2.3863E-05	( 86, 4)	2.4171E-05	(126, 4)
32	2.2667E-06	(192, 4)	2.0600E-05	(192, 4)	2.6935E-05	(189, 5)	3.0326E-05	(269, 4)	2.7840E-05	(168, 4)
33	3.2641E-06	(192, 4)	2.6538E-05	(156, 4)	2.4692E-05	(134, 5)	2.0237E-05	( 24, 5)	2.0061E-05	(153, 4)
34	2.3407E-06	(192, 4)	2.6389E-05	(134, 5)	2.8042E-05	(228, 4)	2.3589E-05	(228, 4)	2.2075E-05	( 61, 8)
35	3.2702E-06	(144, 4)	2.2391E-05	(223, 5)	2.6861E-05	(148, 5)	2.7339E-05	(148, 5)	2.3913E-05	(102, 4)
36	1.6277E-06	(222, 5)	2.7007E-05	(222, 5)	3.5686E-05	(222, 5)	3.2044E-05	(222, 5)	3.0277E-05	(216, 4)

28

PLANT NAME: KISS. UTILITIES                      POLLUTANT: SO2                      AIR QUALITY UNITS: GM/M\*\*3  
 YEARLY SECOND MAXIMUM    3-HOUR CONC= 3.3049E-05    DIRECTION= 18    DISTANCE= 3.5 KM    DAY=302    TIME PERIOD= 1  
 YEAR= 76

DIR	SECOND HIGHEST		3-HOUR CONCENTRATION AT EACH RECEPTOR							
	RANGE	3.0 KM	3.5 KM	4.0 KM	4.5 KM	5.0 KM				
1	2.5649E-05	( 32, 5)	2.2395E-05	( 32, 5)	1.9633E-05	( 32, 5)	2.0898E-05	(234, 7)	2.3528E-05	(234, 7)
2	2.1502E-05	( 69, 4)	1.9295E-05	( 69, 4)	1.9223E-05	( 68, 5)	1.7356E-05	(363, 8)	1.6906E-05	(139, 2)
3	2.3175E-05	(214, 3)	2.0416E-05	(214, 3)	1.8786E-05	( 97, 6)	1.7896E-05	( 69, 4)	1.6033E-05	( 69, 4)
4	2.2186E-05	( 69, 5)	2.2187E-05	(355, 7)	2.2214E-05	(355, 7)	2.2644E-05	( 49, 7)	2.2226E-05	( 8, 4)
5	2.3703E-05	(145, 2)	2.3962E-05	( 69, 5)	2.1028E-05	(116, 8)	2.2915E-05	(116, 8)	2.2876E-05	(145, 2)
6	2.9383E-05	( 76, 6)	2.6481E-05	( 76, 6)	2.3789E-05	( 76, 6)	2.1394E-05	( 76, 6)	1.9300E-05	( 76, 6)
7	2.2457E-05	( 53, 6)	2.1338E-05	( 53, 6)	2.2767E-05	(198, 2)	2.3127E-05	(145, 4)	2.0853E-05	(145, 4)
8	2.3311E-05	(122, 6)	2.4904E-05	(122, 6)	2.3196E-05	(197, 3)	2.1049E-05	(197, 3)	1.9101E-05	(197, 3)
9	2.4419E-05	(196, 6)	2.4218E-05	(196, 6)	2.3351E-05	(196, 6)	2.5959E-05	(117, 8)	2.5197E-05	(117, 6)
10	2.5654E-05	(198, 3)	2.4236E-05	(361, 7)	2.6664E-05	( 93, 7)	2.9492E-05	( 93, 7)	3.1480E-05	( 93, 7)
11	2.4262E-05	(275, 5)	2.3107E-05	(305, 4)	2.2662E-05	(305, 4)	2.4168E-05	(300, 7)	2.5682E-05	(300, 7)
12	2.2292E-05	( 30, 4)	2.2027E-05	( 30, 4)	2.3027E-05	(249, 4)	2.3864E-05	(249, 4)	2.5248E-05	( 39, 2)
13	2.3499E-05	(362, 1)	2.2464E-05	(151, 4)	2.0383E-05	(151, 4)	2.0934E-05	(313, 1)	2.0591E-05	(362, 1)
14	2.5522E-05	( 8, 8)	2.4443E-05	( 8, 8)	2.2933E-05	( 8, 8)	2.4518E-05	(352, 1)	2.6583E-05	(352, 1)
15	1.9995E-05	( 54, 1)	1.9739E-05	( 54, 1)	1.8913E-05	( 54, 1)	1.8524E-05	( 99, 8)	1.8303E-05	( 99, 8)
16	2.4193E-05	( 5, 3)	2.5125E-05	( 5, 3)	2.5189E-05	( 5, 3)	2.6099E-05	(306, 1)	2.7300E-05	(306, 1)
17	1.9180E-05	(114, 3)	1.8777E-05	(357, 1)	2.2336E-05	(357, 1)	2.4351E-05	(357, 1)	2.4926E-05	(255, 3)
18	3.2257E-05	(302, 1)	3.3049E-05	(302, 1)	3.1885E-05	(313, 4)	3.1409E-05	(302, 1)	3.3042E-05	(285, 7)
19	2.7020E-05	(302, 3)	2.6018E-05	(302, 3)	2.4526E-05	(302, 3)	2.3057E-05	(297, 2)	2.2284E-05	( 58, 4)
20	2.9419E-05	(100, 5)	2.7347E-05	(100, 5)	2.5219E-05	(100, 5)	2.3600E-05	( 82, 7)	2.2317E-05	( 38, 6)
21	2.1667E-05	( 57, 5)	2.1066E-05	( 19, 6)	2.1212E-05	( 19, 6)	2.0778E-05	( 19, 6)	1.9942E-05	( 57, 5)
22	2.1086E-05	(166, 4)	2.1058E-05	(348, 8)	2.1390E-05	(159, 7)	2.3313E-05	(159, 7)	2.4587E-05	(159, 7)
23	2.2200E-05	( 55, 4)	2.1378E-05	(240, 4)	2.1677E-05	(232, 2)	2.2054E-05	( 55, 4)	2.2466E-05	(232, 2)
24	2.3761E-05	(344, 5)	2.1841E-05	(165, 6)	2.2464E-05	(165, 6)	2.1594E-05	(344, 5)	2.0265E-05	(344, 5)
25	1.8713E-05	(141, 4)	1.7596E-05	(303, 5)	1.7573E-05	(303, 5)	1.7108E-05	(303, 5)	1.6409E-05	(303, 5)
26	2.5479E-05	(290, 4)	2.1972E-05	(290, 4)	2.0524E-05	( 56, 6)	1.9998E-05	(252, 7)	2.0197E-05	( 59, 4)
27	1.8456E-05	(167, 6)	1.8542E-05	(114, 7)	2.1117E-05	(121, 6)	2.1562E-05	(121, 6)	2.1555E-05	(121, 6)
28	1.8725E-05	( 64, 6)	1.7705E-05	( 84, 5)	1.7071E-05	(269, 6)	1.7225E-05	(269, 6)	1.6996E-05	(269, 6)
29	2.0383E-05	(168, 6)	2.0868E-05	(168, 6)	2.0555E-05	(168, 6)	1.9983E-05	( 86, 6)	2.0623E-05	(345, 4)
30	2.0540E-05	( 62, 4)	1.9385E-05	(126, 6)	2.0014E-05	(126, 6)	1.9986E-05	(126, 6)	1.9558E-05	(126, 6)
31	1.9788E-05	(126, 4)	1.8421E-05	(135, 4)	1.8476E-05	(135, 4)	1.9277E-05	( 90, 7)	2.0255E-05	( 90, 7)
32	2.3670E-05	(168, 4)	2.0412E-05	( 2, 5)	1.8302E-05	( 27, 1)	1.7793E-05	( 26, 8)	1.8390E-05	( 26, 8)
33	2.1561E-05	(360, 5)	2.1835E-05	(360, 5)	2.1314E-05	(360, 5)	2.0391E-05	(360, 5)	1.9292E-05	(360, 5)
34	2.3889E-05	(331, 5)	2.2076E-05	(281, 4)	1.9697E-05	( 61, 8)	1.8234E-05	( 61, 8)	1.8721E-05	(294, 2)
35	2.2467E-05	(172, 3)	2.1862E-05	(172, 3)	2.0683E-05	(172, 3)	1.9316E-05	(172, 3)	1.7945E-05	(172, 3)
36	2.8195E-05	(216, 4)	2.5363E-05	(216, 4)	2.4472E-05	(334, 3)	2.4462E-05	( 49, 4)	2.4474E-05	(334, 3)

22

PLANT NAME: KISS. UTILITIES      POLLUTANT: SO2      AIR QUALITY UNITS: GM/M\*\*3  
 YEARLY SECOND MAXIMUM 3-HOUR CONC= 4.3495E-05      DIRECTION= 30      DISTANCE= 1.5 KM      DAY=136      TIME PERIOD= 4  
 YEAR= 77

DIR	SECOND HIGHEST		3-HOUR CONCENTRATION AT EACH RECEPTOR							
	RANGE	0.5 KM	1.0 KM	1.5 KM	2.0 KM	2.5 KM				
1	2.5032E-06	(236, 6)	2.1689E-05	( 87, 4)	2.5934E-05	(231, 4)	2.6690E-05	(230, 5)	2.6300E-05	(188, 6)
2	7.4448E-07	(229, 4)	2.4861E-05	(248, 5)	2.9308E-05	(248, 5)	2.2957E-05	(248, 5)	1.9666E-05	(230, 5)
3	1.3826E-06	(180, 4)	2.4415E-05	(184, 4)	3.2557E-05	(213, 4)	3.0440E-05	(251, 5)	2.8315E-05	(175, 6)
4	1.9319E-06	(229, 4)	3.1512E-05	(252, 4)	3.7875E-05	(145, 5)	3.3754E-05	(252, 4)	2.7112E-05	(145, 5)
5	1.9328E-06	(180, 4)	2.2806E-05	(176, 4)	2.7609E-05	(177, 4)	2.4704E-05	(144, 4)	2.1724E-05	(282, 5)
6	2.6912E-06	(114, 5)	1.8398E-05	(173, 4)	2.5339E-05	(127, 4)	2.5873E-05	(251, 6)	2.5763E-05	( 78, 5)
7	3.5604E-06	(190, 5)	2.6316E-05	(190, 5)	2.5894E-05	(158, 4)	2.7503E-05	(127, 4)	2.8067E-05	(253, 6)
8	1.6407E-06	(169, 4)	2.1530E-05	(190, 5)	2.2537E-05	(176, 5)	2.3148E-05	(176, 5)	2.0341E-05	(176, 5)
9	1.7526E-06	(134, 5)	2.0865E-05	(300, 4)	2.8673E-05	(174, 5)	2.8482E-05	(176, 5)	2.4903E-05	(176, 5)
10	1.4657E-06	(134, 5)	1.3132E-05	(309, 4)	1.8374E-05	(161, 5)	2.3412E-05	(309, 4)	2.2356E-05	( 36, 3)
11	1.9858E-06	(187, 4)	1.6982E-05	(256, 5)	2.2245E-05	(127, 6)	3.0477E-05	(127, 6)	3.2298E-05	(127, 6)
12	2.8792E-06	(187, 4)	2.7228E-05	(178, 5)	3.3764E-05	(178, 5)	3.0414E-05	( 74, 5)	2.6179E-05	( 74, 5)
13	2.9526E-06	(187, 4)	2.4051E-05	(187, 4)	2.7222E-05	(178, 5)	2.5902E-05	(175, 5)	2.4954E-05	( 19, 3)
14	2.1753E-06	(187, 4)	2.3042E-05	(173, 5)	2.9669E-05	(117, 4)	2.8312E-05	(117, 4)	2.3678E-05	(117, 4)
15	1.4512E-06	(267, 4)	1.9022E-05	(163, 4)	2.3500E-05	(163, 4)	2.0657E-05	( 32, 5)	2.0564E-05	( 32, 5)
16	1.9550E-06	(267, 4)	2.4081E-05	(203, 5)	2.5998E-05	(203, 4)	2.3766E-05	(203, 5)	2.0677E-05	( 29, 5)
17	1.6122E-06	(184, 5)	2.0561E-05	(203, 5)	2.6348E-05	( 98, 5)	2.7491E-05	(315, 4)	2.5668E-05	( 98, 5)
18	2.0462E-06	(184, 5)	2.3911E-05	(187, 5)	2.0931E-05	(341, 5)	2.5480E-05	(341, 5)	2.4157E-05	(341, 5)
19	2.1287E-06	(257, 5)	2.9640E-05	(168, 4)	1.4576E-05	( 29, 4)	1.7582E-05	(220, 5)	1.6942E-05	(220, 5)
20	1.6865E-06	(186, 4)	2.3317E-05	( 99, 5)	2.1682E-05	(154, 4)	2.6652E-05	( 30, 4)	2.6329E-05	( 30, 4)
21	8.4752E-07	(156, 4)	2.0911E-05	(168, 4)	2.3791E-05	(105, 4)	2.3762E-05	(205, 5)	2.1816E-05	(105, 4)
22	1.3017E-06	( 99, 4)	1.9925E-05	( 99, 4)	2.1517E-05	( 99, 4)	2.1128E-05	(304, 5)	2.3425E-05	(276, 6)
23	1.7393E-06	(101, 5)	2.2109E-05	(142, 5)	3.2808E-05	(100, 4)	3.1060E-05	(133, 4)	2.7802E-05	(293, 5)
24	1.7282E-06	(255, 5)	2.6068E-05	(101, 5)	2.9875E-05	(278, 5)	3.6159E-05	(278, 5)	3.5799E-05	(278, 5)
25	1.6251E-06	(221, 5)	2.9676E-05	(101, 4)	3.7558E-05	(101, 4)	3.4462E-05	(101, 4)	3.2003E-05	(100, 6)
26	1.4261E-06	(221, 5)	2.0902E-05	(238, 5)	2.5196E-05	(243, 4)	2.5574E-05	(218, 4)	2.2925E-05	(218, 4)
27	2.9166E-06	(242, 5)	2.2188E-05	(243, 4)	3.7340E-05	(217, 4)	3.5419E-05	(198, 5)	3.1239E-05	(224, 4)
28	2.9923E-06	(214, 5)	2.1134E-05	(139, 5)	2.2654E-05	(136, 5)	2.0520E-05	(228, 4)	1.8981E-05	(228, 4)
29	2.4715E-06	(217, 5)	2.2405E-05	(140, 5)	2.2945E-05	(136, 4)	2.1518E-05	(121, 4)	2.2032E-05	(227, 5)
30	2.3875E-06	(216, 5)	3.9226E-05	(216, 5)	4.3495E-05	(136, 4)	4.2668E-05	(136, 4)	3.6836E-05	(136, 4)
31	2.6267E-06	(111, 5)	3.2075E-05	(111, 5)	3.9073E-05	(209, 5)	3.0565E-05	(209, 5)	2.7009E-05	(237, 5)
32	1.5917E-06	(209, 5)	2.1025E-05	(229, 4)	2.1509E-05	(313, 5)	2.5656E-05	(313, 5)	2.4424E-05	(313, 5)
33	1.3694E-06	(181, 4)	2.5916E-05	(188, 5)	2.7169E-05	( 93, 5)	2.6597E-05	(210, 6)	2.4685E-05	( 93, 5)
34	1.3632E-06	(193, 4)	1.9551E-05	(229, 5)	1.9937E-05	( 92, 5)	2.5964E-05	(206, 6)	2.7409E-05	(206, 6)
35	1.6560E-06	(265, 4)	1.7833E-05	(265, 5)	2.2409E-05	(189, 5)	2.2099E-05	(215, 5)	1.9902E-05	(250, 4)
36	2.5032E-06	(236, 6)	2.5922E-05	(214, 4)	3.8436E-05	(262, 4)	3.9145E-05	(262, 4)	3.5545E-05	( 65, 4)

29

PLANT NAME: KISS. UTILITIES      POLLUTANT: SO2      AIR QUALITY UNITS: GM/M\*\*3  
 YEARLY SECOND MAXIMUM    3-HOUR CONC= 3.2751E-05    DIRECTION= 24    DISTANCE= 3.0 KM    DAY=141    TIME PERIOD= 4  
 YEAR= 77

DIR	SECOND HIGHEST 3-HOUR CONCENTRATION AT EACH RECEPTOR									
	RANGE	3.0 KM	3.5 KM	4.0 KM	4.5 KM	5.0 KM				
1	2.4036E-05	(188, 6)	2.1050E-05	(188, 6)	1.9295E-05	(65, 6)	1.9506E-05	(65, 6)	1.9293E-05	(65, 6)
2	1.8424E-05	(95, 3)	1.8450E-05	(72, 5)	1.7787E-05	(285, 5)	1.6093E-05	(50, 4)	1.6341E-05	(50, 4)
3	2.6663E-05	(175, 6)	2.3871E-05	(175, 6)	2.2035E-05	(212, 3)	2.0130E-05	(285, 4)	1.7725E-05	(285, 4)
4	2.3810E-05	(157, 6)	2.2286E-05	(157, 6)	2.3312E-05	(157, 8)	2.4462E-05	(148, 5)	2.1906E-05	(148, 5)
5	2.0312E-05	(172, 3)	1.9862E-05	(172, 3)	2.0258E-05	(80, 8)	2.2216E-05	(80, 8)	2.2834E-05	(282, 5)
6	2.4391E-05	(78, 5)	2.2530E-05	(78, 5)	2.0690E-05	(78, 5)	1.8983E-05	(77, 6)	1.7905E-05	(233, 5)
7	2.7707E-05	(3, 5)	2.7182E-05	(3, 5)	2.6263E-05	(3, 5)	2.5142E-05	(3, 5)	2.3934E-05	(3, 5)
8	2.1596E-05	(20, 5)	2.3348E-05	(115, 7)	2.5540E-05	(3, 6)	2.3618E-05	(3, 6)	2.1777E-05	(3, 6)
9	2.5480E-05	(352, 4)	2.5332E-05	(352, 4)	2.4427E-05	(352, 4)	2.5118E-05	(177, 8)	2.6761E-05	(292, 7)
10	2.6554E-05	(36, 3)	2.7127E-05	(20, 6)	2.5499E-05	(20, 6)	2.3721E-05	(20, 6)	2.1968E-05	(20, 6)
11	3.1285E-05	(127, 6)	2.9105E-05	(127, 6)	2.6717E-05	(127, 6)	2.4418E-05	(127, 6)	2.2309E-05	(127, 6)
12	2.4279E-05	(161, 4)	2.1765E-05	(25, 5)	2.0428E-05	(25, 5)	1.8967E-05	(25, 5)	1.7527E-05	(25, 5)
13	2.3495E-05	(352, 5)	2.2300E-05	(352, 5)	2.0768E-05	(352, 5)	1.9174E-05	(352, 5)	1.8372E-05	(66, 5)
14	1.9946E-05	(173, 5)	2.0202E-05	(330, 3)	1.9422E-05	(330, 3)	1.9347E-05	(79, 7)	2.0540E-05	(79, 7)
15	2.0418E-05	(1, 5)	1.9105E-05	(286, 2)	1.9738E-05	(1, 5)	1.9124E-05	(286, 2)	1.8686E-05	(362, 6)
16	1.9324E-05	(29, 5)	2.2883E-05	(305, 1)	2.4081E-05	(96, 1)	2.5976E-05	(96, 1)	2.7142E-05	(96, 1)
17	2.2142E-05	(98, 5)	2.1493E-05	(317, 4)	2.0465E-05	(317, 4)	1.9136E-05	(317, 4)	1.8434E-05	(17, 3)
18	2.2365E-05	(315, 3)	2.1511E-05	(363, 1)	2.3861E-05	(30, 2)	2.6633E-05	(30, 2)	2.8602E-05	(30, 2)
19	1.9495E-05	(41, 4)	2.0415E-05	(41, 4)	2.0434E-05	(41, 4)	1.9936E-05	(41, 4)	1.9408E-05	(8, 4)
20	2.4067E-05	(30, 4)	2.2708E-05	(277, 1)	2.7017E-05	(277, 1)	2.4561E-05	(99, 5)	2.2886E-05	(30, 8)
21	2.0841E-05	(337, 4)	1.9919E-05	(67, 4)	2.0063E-05	(304, 6)	2.2778E-05	(205, 1)	2.5002E-05	(205, 1)
22	2.3838E-05	(304, 5)	2.3698E-05	(276, 6)	2.2421E-05	(276, 6)	2.1014E-05	(242, 2)	2.2107E-05	(62, 1)
23	2.6742E-05	(304, 4)	2.6367E-05	(304, 4)	2.4361E-05	(100, 4)	2.1736E-05	(100, 4)	2.0044E-05	(322, 4)
24	3.2751E-05	(141, 4)	2.7188E-05	(141, 4)	2.2685E-05	(141, 4)	2.0903E-05	(277, 5)	2.0695E-05	(294, 7)
25	3.0299E-05	(219, 4)	2.5377E-05	(219, 4)	2.3473E-05	(219, 3)	2.1770E-05	(219, 3)	2.3921E-05	(69, 2)
26	1.9383E-05	(218, 4)	1.6912E-05	(243, 4)	1.8206E-05	(240, 7)	2.1087E-05	(240, 7)	2.2902E-05	(130, 5)
27	2.7761E-05	(224, 4)	2.8677E-05	(217, 6)	2.8860E-05	(217, 6)	2.8269E-05	(217, 6)	2.7253E-05	(217, 6)
28	1.7565E-05	(325, 5)	1.6800E-05	(120, 7)	1.9290E-05	(120, 7)	2.0494E-05	(120, 7)	2.1444E-05	(258, 7)
29	1.9953E-05	(86, 4)	1.9871E-05	(86, 4)	1.9171E-05	(86, 4)	1.8184E-05	(86, 4)	1.7899E-05	(53, 7)
30	3.0707E-05	(136, 4)	2.7585E-05	(86, 5)	2.6123E-05	(122, 6)	2.5639E-05	(122, 6)	2.4758E-05	(122, 6)
31	2.2546E-05	(237, 5)	1.9031E-05	(112, 4)	1.7458E-05	(121, 6)	1.7267E-05	(246, 3)	1.7178E-05	(246, 3)
32	2.1519E-05	(71, 5)	2.2513E-05	(71, 5)	2.2574E-05	(71, 5)	2.2565E-05	(87, 8)	2.3986E-05	(87, 8)
33	2.2644E-05	(55, 2)	2.1300E-05	(55, 2)	1.9705E-05	(55, 2)	1.7402E-05	(210, 6)	1.6591E-05	(55, 2)
34	2.5475E-05	(206, 6)	2.4733E-05	(113, 4)	2.3691E-05	(113, 4)	2.2357E-05	(113, 4)	2.0937E-05	(113, 4)
35	1.7825E-05	(250, 4)	1.6365E-05	(55, 3)	1.5404E-05	(55, 3)	1.6211E-05	(65, 2)	1.7798E-05	(65, 2)
36	3.0111E-05	(207, 6)	2.9126E-05	(339, 4)	2.7885E-05	(339, 4)	2.6580E-05	(354, 8)	2.8720E-05	(354, 8)

30



PLANT NAME: KISS. UTILITIES      POLLUTANT: SO2      AIR QUALITY UNITS: GM/M\*\*3  
 YEARLY SECOND MAXIMUM      3-HOUR CONC= 4.2854E-05      DIRECTION= 26      DISTANCE= 1.5 KM      DAY=143      TIME PERIOD= 5  
 YEAR= 78

DIR	SECOND HIGHEST		3-HOUR CONCENTRATION AT EACH RECEPTOR							
	RANGE	0.5 KM	1.0 KM	1.5 KM	2.0 KM	2.5 KM				
1	5.1648E-06	(212, 5)	2.2497E-05	(187, 5)	2.9093E-05	(136, 5)	3.1851E-05	(212, 5)	2.6918E-05	(212, 5)
2	2.2343E-06	(183, 5)	1.9313E-05	(180, 4)	2.7489E-05	(155, 4)	2.9819E-05	(184, 5)	2.9119E-05	( 25, 6)
3	2.3189E-06	(187, 5)	1.7707E-05	( 98, 4)	2.4374E-05	(119, 4)	2.2907E-05	(119, 4)	1.8728E-05	(136, 4)
4	2.0964E-06	(145, 4)	1.9724E-05	(229, 4)	2.4305E-05	(121, 5)	2.6312E-05	(211, 6)	2.6682E-05	(122, 5)
5	2.0973E-06	(175, 5)	2.0565E-05	(184, 4)	2.6922E-05	(184, 4)	3.1325E-05	(133, 4)	2.7445E-05	(353, 4)
6	1.7755E-06	( 97, 5)	2.0722E-05	(134, 5)	2.2095E-05	(135, 5)	2.1677E-05	( 56, 5)	2.2009E-05	( 69, 6)
7	7.5641E-07	(135, 4)	1.7402E-05	(248, 5)	2.3750E-05	(121, 6)	2.5695E-05	(116, 5)	2.3586E-05	(116, 5)
8	4.6412E-07	(116, 4)	1.7227E-05	(176, 4)	2.1312E-05	( 26, 6)	2.5603E-05	(110, 5)	2.2929E-05	(111, 6)
9	3.8900E-06	(116, 5)	2.0905E-05	(116, 5)	2.2886E-05	(134, 5)	2.0817E-05	( 86, 4)	1.9404E-05	( 52, 7)
10	3.0179E-06	(116, 5)	1.7218E-05	(248, 4)	1.8795E-05	( 57, 4)	2.0554E-05	( 57, 4)	1.8395E-05	( 57, 4)
11	2.2612E-06	(182, 4)	1.9667E-05	(160, 5)	1.5297E-05	(274, 4)	1.5436E-05	(134, 4)	1.4135E-05	(134, 4)
12	1.7984E-06	(160, 5)	2.1732E-05	( 99, 4)	2.0519E-05	(280, 5)	2.1714E-05	(279, 4)	2.0702E-05	( 53, 1)
13	1.5000E-06	(249, 4)	2.5355E-05	(117, 5)	3.5554E-05	(249, 4)	2.9334E-05	(249, 4)	2.6470E-05	(359, 5)
14	1.9498E-06	(250, 4)	2.3572E-05	(110, 4)	2.8934E-05	(231, 5)	2.6974E-05	( 76, 2)	2.9053E-05	(279, 5)
15	1.4571E-06	(249, 4)	1.8464E-05	(254, 4)	2.8911E-05	(110, 4)	2.2474E-05	( 81, 4)	1.9305E-05	( 58, 5)
16	5.9398E-07	(249, 4)	1.3514E-05	(164, 4)	2.1288E-05	(308, 5)	2.6295E-05	(308, 5)	2.4994E-05	(308, 5)
17	1.5958E-07	(250, 4)	1.0728E-05	(125, 5)	1.7254E-05	(322, 5)	2.1734E-05	(322, 5)	2.1522E-05	(322, 5)
18	2.7378E-07	(175, 4)	1.6499E-05	(125, 5)	2.6581E-05	(324, 4)	3.0915E-05	(324, 4)	2.8884E-05	(281, 4)
19	9.9195E-07	(161, 5)	1.3524E-05	(115, 4)	1.5743E-05	(316, 5)	2.1211E-05	(145, 4)	2.2831E-05	(278, 5)
20	2.0662E-06	(161, 5)	1.6937E-05	(252, 5)	2.2462E-05	(125, 4)	2.4940E-05	(125, 4)	2.3092E-05	(125, 4)
21	2.4329E-06	(161, 5)	2.5966E-05	(145, 5)	3.3499E-05	(258, 4)	3.3805E-05	(258, 4)	2.7931E-05	(145, 5)
22	2.2889E-06	(182, 5)	2.7112E-05	(161, 5)	2.9580E-05	(217, 5)	2.6948E-05	(252, 5)	2.4609E-05	( 64, 4)
23	2.1516E-06	(186, 5)	2.3249E-05	(179, 4)	2.7037E-05	(281, 5)	3.0788E-05	(244, 5)	2.9509E-05	(244, 5)
24	2.0280E-06	( 99, 5)	2.8478E-05	(130, 5)	2.9906E-05	(106, 5)	2.8157E-05	(240, 6)	2.6527E-05	( 77, 5)
25	1.7762E-06	(245, 5)	2.2607E-05	(106, 5)	3.0543E-05	(131, 5)	2.7975E-05	(164, 5)	2.6502E-05	(131, 5)
26	2.2543E-06	(245, 5)	3.1751E-05	(169, 5)	4.2854E-05	(143, 5)	3.8947E-05	(169, 5)	3.4328E-05	(169, 5)
27	2.2177E-06	(202, 5)	2.8420E-05	( 93, 5)	3.2305E-05	(140, 5)	3.2711E-05	(131, 4)	2.8332E-05	(131, 4)
28	2.2764E-06	(148, 5)	2.9495E-05	(146, 5)	3.4534E-05	(146, 5)	3.0501E-05	( 94, 5)	2.7129E-05	( 24, 5)
29	1.9770E-06	(190, 5)	2.2503E-05	(205, 5)	2.6773E-05	(189, 4)	2.8686E-05	(176, 5)	2.4160E-05	( 72, 4)
30	1.9495E-06	(150, 4)	2.1339E-05	(218, 4)	2.9943E-05	(189, 4)	2.9983E-05	(226, 6)	2.7987E-05	(218, 4)
31	1.3633E-06	(150, 4)	2.0001E-05	(151, 5)	3.3026E-05	(216, 4)	3.0726E-05	(203, 5)	2.6365E-05	(203, 5)
32	1.8742E-06	(108, 4)	2.4159E-05	(222, 4)	3.1436E-05	(201, 4)	3.2208E-05	(173, 5)	2.6908E-05	(241, 4)
33	2.1394E-06	(207, 5)	3.2360E-05	(108, 4)	3.6622E-05	(207, 5)	3.1504E-05	(100, 5)	3.0092E-05	(100, 5)
34	2.1287E-06	(205, 4)	3.2791E-05	(190, 4)	3.2743E-05	(154, 4)	3.6251E-05	(154, 4)	3.3534E-05	(154, 4)
35	2.6580E-06	(103, 4)	2.9581E-05	(101, 4)	3.9594E-05	(160, 4)	3.8127E-05	(129, 4)	3.1705E-05	(129, 4)
36	8.2591E-06	(103, 4)	2.9682E-05	(103, 5)	3.8400E-05	( 25, 7)	4.2462E-05	(103, 4)	3.5821E-05	(103, 4)

31

PLANT NAME: KISS. UTILITIES      POLLUTANT: SO2      AIR QUALITY UNITS: GM/M\*\*3  
 YEARLY SECOND MAXIMUM    3-HOUR CONC= 3.2959E-05    DIRECTION= 36    DISTANCE= 4.5 KM    DAY= 73    TIME PERIOD= 8  
 YEAR= 78

DIR	SECOND HIGHEST		3-HOUR CONCENTRATION AT EACH RECEPTOR							
	RANGE	3.0 KM	3.5 KM	4.0 KM	4.5 KM	5.0 KM				
1	2.3982E-05	( 44, 5)	2.0592E-05	(136, 5)	1.7298E-05	(136, 5)	1.5066E-05	( 25, 6)	1.5807E-05	(354, 8)
2	2.7044E-05	( 25, 6)	2.4455E-05	( 25, 6)	2.2817E-05	(354, 7)	2.1301E-05	( 75, 5)	1.9675E-05	( 75, 5)
3	1.7658E-05	( 97, 4)	1.7062E-05	(133, 7)	1.7941E-05	(133, 7)	1.7808E-05	( 73, 6)	1.6806E-05	( 73, 6)
4	2.2230E-05	(122, 5)	2.1907E-05	(211, 6)	2.1389E-05	( 85, 6)	2.0589E-05	( 85, 6)	1.9574E-05	( 85, 6)
5	2.4727E-05	(353, 4)	2.1624E-05	(353, 4)	2.0420E-05	(213, 8)	2.1021E-05	( 69, 2)	2.1460E-05	( 69, 2)
6	2.3454E-05	(134, 5)	2.1266E-05	(134, 5)	1.9253E-05	(134, 5)	1.7883E-05	(110, 6)	1.7734E-05	(110, 6)
7	2.2418E-05	(121, 6)	1.9399E-05	(121, 6)	1.7747E-05	(199, 6)	1.7261E-05	(199, 6)	1.6556E-05	(199, 6)
8	1.9800E-05	(111, 6)	1.6747E-05	(111, 6)	1.4458E-05	( 26, 5)	1.3490E-05	(118, 7)	1.4397E-05	(118, 7)
9	1.8664E-05	( 13, 8)	1.8027E-05	( 86, 4)	1.9417E-05	( 86, 2)	2.1359E-05	( 86, 2)	2.2680E-05	( 86, 2)
10	1.8316E-05	( 75, 6)	1.8895E-05	( 75, 6)	1.8870E-05	( 75, 6)	2.1424E-05	( 21, 1)	2.3485E-05	( 21, 1)
11	1.3605E-05	(328, 4)	1.4047E-05	( 15, 6)	1.5563E-05	( 15, 6)	1.6262E-05	( 15, 6)	1.6351E-05	( 37, 6)
12	1.9720E-05	(280, 5)	2.0777E-05	( 14, 8)	2.1511E-05	( 14, 8)	2.1561E-05	( 14, 8)	2.0772E-05	( 53, 1)
13	2.4757E-05	(359, 5)	2.2060E-05	(359, 5)	1.9320E-05	(359, 5)	1.7695E-05	( 15, 2)	1.6479E-05	(117, 5)
14	2.4463E-05	(117, 1)	2.7034E-05	(117, 1)	2.5928E-05	( 76, 2)	2.3872E-05	( 76, 2)	2.1912E-05	( 76, 2)
15	1.8211E-05	(359, 4)	1.8188E-05	(306, 8)	2.0319E-05	(305, 8)	2.2507E-05	(305, 8)	2.3892E-05	(306, 8)
16	2.1472E-05	( 81, 4)	1.9377E-05	(307, 5)	1.9135E-05	(307, 5)	1.9727E-05	(307, 7)	2.0466E-05	(304, 2)
17	1.9499E-05	(322, 5)	1.9867E-05	(346, 4)	1.7909E-05	(351, 7)	1.9452E-05	(346, 4)	2.0531E-05	(305, 2)
18	2.5507E-05	(324, 4)	2.4083E-05	(304, 6)	2.6519E-05	( 3, 8)	2.9294E-05	( 3, 8)	2.9696E-05	( 4, 2)
19	2.4010E-05	(304, 4)	2.4857E-05	(290, 7)	2.7964E-05	(290, 7)	2.8074E-05	(305, 5)	2.6907E-05	(305, 5)
20	2.0496E-05	(315, 5)	2.0072E-05	(315, 5)	2.1827E-05	( 64, 2)	2.0464E-05	( 35, 5)	2.1547E-05	(292, 7)
21	2.3179E-05	(243, 5)	2.1826E-05	(243, 5)	2.1539E-05	(362, 5)	2.0767E-05	(305, 6)	2.1596E-05	(305, 6)
22	2.1866E-05	(253, 5)	2.0319E-05	(253, 5)	2.0413E-05	(336, 7)	2.3220E-05	(316, 7)	2.4393E-05	(316, 7)
23	2.5981E-05	(244, 5)	2.2280E-05	(244, 5)	2.4488E-05	(318, 6)	2.6055E-05	(267, 4)	2.3948E-05	(318, 8)
24	2.3880E-05	(262, 3)	2.2362E-05	(240, 6)	1.9948E-05	(295, 4)	1.8819E-05	(262, 3)	1.9933E-05	( 60, 8)
25	2.2232E-05	(363, 5)	2.1406E-05	(363, 5)	2.0231E-05	(363, 5)	1.8960E-05	(141, 3)	1.9872E-05	(141, 3)
26	3.0587E-05	(163, 6)	2.6501E-05	(169, 5)	2.9137E-05	(163, 6)	2.7549E-05	(163, 6)	2.5835E-05	(163, 6)
27	3.0051E-05	(171, 6)	2.7463E-05	(169, 6)	2.6918E-05	(171, 6)	2.4419E-05	(171, 6)	2.6418E-05	(169, 6)
28	2.4771E-05	( 94, 5)	2.1061E-05	( 94, 5)	1.8630E-05	( 93, 4)	1.7091E-05	( 82, 5)	1.6861E-05	(202, 6)
29	2.0704E-05	( 72, 4)	2.1248E-05	(113, 4)	1.9559E-05	(239, 6)	1.6885E-05	(239, 6)	1.4890E-05	(203, 6)
30	2.4241E-05	(158, 6)	2.1224E-05	(158, 6)	1.9370E-05	( 83, 6)	1.9072E-05	( 83, 6)	1.8869E-05	( 7, 7)
31	2.1872E-05	(203, 5)	2.1713E-05	(107, 7)	2.3062E-05	(107, 4)	2.4028E-05	(337, 7)	2.5542E-05	(337, 7)
32	2.3866E-05	(241, 4)	2.2087E-05	(173, 5)	1.8836E-05	(173, 5)	2.0505E-05	( 24, 8)	2.0474E-05	( 66, 5)
33	2.9254E-05	( 19, 4)	2.7821E-05	( 19, 4)	2.5983E-05	( 19, 4)	2.4066E-05	( 19, 4)	2.3982E-05	(124, 6)
34	2.9141E-05	(154, 4)	2.5431E-05	(199, 4)	2.3737E-05	(213, 1)	2.7284E-05	( 67, 4)	2.7493E-05	(198, 8)
35	2.9690E-05	(183, 3)	3.0010E-05	(183, 3)	2.5973E-05	(160, 4)	2.2085E-05	(160, 4)	2.0789E-05	( 44, 4)
36	3.0738E-05	(103, 4)	2.6631E-05	(103, 4)	3.0475E-05	( 73, 8)	3.2959E-05	( 73, 8)	3.2505E-05	( 25, 7)

32

COMPOSITE ANNUAL CONCENTRATION TABLE,UG/CU.M

DIR	ANNUAL MEAN CONCENTRATION AT EACH RECEPTOR					
	RANGE	0.5 KM	1.0 KM	1.5 KM	2.0 KM	2.5 KM
1		0.	0.	0.	1.	1.
2		0.	0.	0.	0.	0.
3		0.	0.	0.	0.	0.
4		0.	0.	0.	0.	0.
5		0.	0.	0.	0.	0.
6		0.	0.	0.	0.	0.
7		0.	0.	0.	0.	0.
8		0.	0.	0.	0.	0.
9		0.	0.	0.	0.	0.
10		0.	0.	0.	0.	0.
11		0.	0.	0.	0.	0.
12		0.	0.	0.	0.	0.
13		0.	0.	0.	0.	0.
14		0.	0.	0.	0.	0.
15		0.	0.	0.	0.	0.
16		0.	0.	0.	0.	0.
17		0.	0.	0.	0.	0.
18		0.	0.	0.	1.	1.
19		0.	0.	0.	0.	0.
20		0.	0.	0.	0.	1.
21		0.	0.	0.	0.	0.
22		0.	0.	0.	0.	0.
23		0.	0.	0.	1.	1.
24		0.	0.	0.	1.	1.
25		0.	0.	0.	1.	1.
26		0.	0.	1.	1.	1.
27		0.	0.	1.	1.	1.
28		0.	0.	1.	1.	1.
29		0.	0.	0.	0.	0.
30		0.	0.	0.	1.	1.
31		0.	0.	0.	1.	1.
32		0.	0.	0.	0.	0.
33		0.	0.	0.	0.	0.
34		0.	0.	0.	1.	1.
35		0.	0.	0.	1.	1.
36		0.	0.	1.	1.	1.

33

COMPOSITE ANNUAL CONCENTRATION TABLE,UG/CU.M

DIR	RANGE	ANNUAL MEAN CONCENTRATION AT EACH RECEPTOR				
		3.0 KM	3.5 KM	4.0 KM	4.5 KM	5.0 KM
1		1.	0.	0.	0.	0.
2		0.	0.	0.	0.	0.
3		0.	0.	0.	0.	0.
4		0.	0.	0.	0.	0.
5		0.	0.	0.	0.	0.
6		0.	0.	0.	0.	0.
7		0.	0.	0.	0.	0.
8		0.	0.	0.	0.	0.
9		0.	0.	0.	0.	0.
10		0.	0.	0.	0.	0.
11		0.	0.	0.	0.	0.
12		0.	0.	0.	0.	0.
13		0.	0.	0.	0.	0.
14		0.	0.	0.	0.	0.
15		0.	0.	0.	0.	0.
16		0.	0.	0.	0.	0.
17		0.	0.	1.	1.	1.
18		1.	1.	1.	1.	1.
19		1.	1.	1.	1.	1.
20		1.	1.	1.	1.	1.
21		0.	0.	0.	0.	0.
22		1.	1.	1.	1.	1.
23		1.	1.	1.	1.	1.
24		1.	1.	1.	1.	1.
25		1.	1.	1.	1.	1.
26		1.	1.	1.	1.	1.
27		1.	1.	1.	1.	1.
28		1.	1.	1.	1.	1.
29		0.	0.	0.	0.	0.
30		1.	1.	1.	1.	1.
31		1.	1.	1.	1.	1.
32		0.	0.	0.	0.	0.
33		1.	1.	1.	1.	1.
34		1.	1.	1.	1.	1.
35		1.	1.	1.	1.	1.
36		1.	1.	1.	1.	1.

34

COMPOSITE HIGHEST, SECOND-HIGHEST 24-HOUR CONCENTRATION TABLE, UG/CU.M

RANGE DIR	SECOND HIGHEST 24-HOUR CONCENTRATION AT EACH RECEPTOR				
	0.5 KM	1.0 KM	1.5 KM	2.0 KM	2.5 KM
1	1.	5.	7.	7.	6.
2	0.	5.	6.	7.	7.
3	0.	4.	5.	6.	5.
4	0.	4.	6.	6.	5.
5	0.	5.	7.	8.	7.
6	0.	5.	5.	6.	6.
7	0.	4.	6.	5.	6.
8	0.	5.	5.	5.	5.
9	1.	6.	7.	7.	8.
10	0.	3.	4.	5.	5.
11	0.	4.	5.	7.	7.
12	0.	6.	6.	6.	6.
13	1.	5.	6.	6.	7.
14	0.	4.	6.	7.	7.
15	0.	4.	5.	5.	5.
16	0.	4.	5.	5.	5.
17	0.	4.	5.	5.	5.
18	0.	4.	7.	9.	11.
19	0.	4.	5.	6.	8.
20	1.	4.	7.	7.	7.
21	0.	4.	5.	6.	7.
22	0.	5.	6.	6.	6.
23	0.	4.	6.	8.	7.
24	0.	5.	6.	8.	9.
25	0.	5.	6.	6.	6.
26	0.	5.	8.	9.	8.
27	0.	5.	8.	10.	10.
28	0.	4.	5.	6.	7.
29	0.	4.	5.	6.	5.
30	0.	6.	9.	9.	8.
31	1.	6.	7.	7.	6.
32	2.	4.	6.	6.	5.
33	1.	5.	6.	6.	7.
34	0.	6.	6.	7.	6.
35	1.	5.	7.	7.	7.
36	1.	6.	9.	10.	9.

35

COMPOSITE HIGHEST, SECOND-HIGHEST 24-HOUR CONCENTRATION TABLE, UG/CU.M

SECOND HIGHEST 24-HOUR CONCENTRATION AT EACH RECEPTOR

RANGE	3.0 KM	3.5 KM	4.0 KM	4.5 KM	5.0 KM
DIR					
1	5.	5.	5.	5.	5.
2	7.	6.	6.	6.	6.
3	5.	5.	5.	4.	4.
4	5.	6.	6.	5.	5.
5	7.	6.	6.	5.	5.
6	6.	5.	5.	5.	5.
7	6.	5.	5.	5.	5.
8	5.	6.	6.	6.	6.
9	9.	8.	8.	7.	8.
10	5.	5.	5.	6.	5.
11	7.	7.	6.	6.	6.
12	6.	7.	7.	7.	7.
13	8.	8.	7.	7.	7.
14	7.	7.	6.	6.	6.
15	5.	6.	6.	6.	5.
16	6.	7.	7.	7.	7.
17	6.	6.	6.	6.	6.
18	12.	<u>12.</u>	12.	11.	11.
19	9.	9.	9.	9.	9.
20	8.	8.	7.	7.	6.
21	7.	7.	6.	6.	6.
22	6.	6.	6.	6.	6.
23	7.	7.	7.	7.	7.
24	9.	8.	8.	8.	8.
25	7.	7.	7.	7.	7.
26	8.	7.	7.	7.	7.
27	10.	10.	10.	10.	9.
28	6.	6.	7.	7.	7.
29	5.	5.	5.	5.	5.
30	9.	9.	9.	9.	9.
31	6.	5.	5.	6.	6.
32	5.	5.	6.	7.	7.
33	7.	7.	7.	7.	6.
34	6.	6.	6.	6.	6.
35	6.	6.	5.	5.	5.
36	10.	10.	10.	10.	10.

DAY 279/1974

The following ISCST run refines this area and accounts for the momentum term in the plume rise equation.

36

COMPOSITE HIGHEST, SECOND-HIGHEST 3-HOUR CONCENTRATION TABLE, UG/CU.M

RANGE DIR	SECOND HIGHEST		3-HOUR CONCENTRATION AT EACH RECEPTOR		
	0.5 KM	1.0 KM	1.5 KM	2.0 KM	2.5 KM
1	5.	26.	34.	33.	31.
2	3.	25.	30.	30.	29.
3	2.	26.	33.	30.	28.
4	2.	32.	38.	34.	28.
5	3.	30.	34.	33.	34.
6	3.	24.	31.	32.	32.
7	4.	30.	34.	30.	28.
8	4.	39.	35.	30.	26.
9	7.	36.	42.	34.	27.
10	3.	19.	26.	33.	27.
11	2.	26.	34.	32.	32.
12	3.	29.	34.	30.	27.
13	3.	25.	36.	33.	29.
14	2.	24.	30.	28.	29.
15	2.	24.	29.	26.	23.
16	2.	24.	26.	26.	27.
17	2.	24.	33.	29.	26.
18	2.	29.	32.	39.	39.
19	3.	30.	29.	30.	27.
20	8.	31.	33.	31.	31.
21	3.	26.	33.	34.	31.
22	4.	28.	32.	29.	25.
23	3.	23.	33.	37.	37.
24	2.	28.	30.	36.	36.
25	2.	30.	38.	34.	32.
26	2.	32.	43.	39.	34.
27	3.	28.	37.	35.	31.
28	3.	29.	35.	31.	28.
29	2.	23.	27.	29.	29.
30	2.	39.	43.	43.	37.
31	6.	32.	39.	31.	27.
32	13.	30.	32.	32.	28.
33	5.	32.	37.	32.	30.
34	2.	33.	33.	36.	34.
35	3.	30.	40.	38.	32.
36	8.	30.	38.	42.	36.

37

COMPOSITE HIGHEST, SECOND-HIGHEST 3-HOUR CONCENTRATION TABLE, UG/CU.M

RANGE DIR	SECOND HIGHEST		3-HOUR CONCENTRATION AT EACH RECEPTOR		
	3.0 KM	3.5 KM	4.0 KM	4.5 KM	5.0 KM
1	30.	28.	26.	23.	24.
2	27.	24.	23.	21.	20.
3	27.	24.	22.	20.	18.
4	26.	22.	23.	24.	22.
5	32.	29.	25.	26.	26.
6	29.	26.	24.	22.	20.
7	28.	27.	26.	25.	26.
8	23.	25.	26.	24.	23.
9	25.	25.	24.	26.	27.
10	27.	27.	27.	29.	31.
11	31.	29.	27.	24.	26.
12	26.	24.	23.	24.	25.
13	26.	24.	24.	23.	24.
14	26.	27.	26.	25.	27.
15	21.	20.	20.	23.	24.
16	25.	25.	25.	26.	27.
17	22.	23.	27.	28.	30.
18	36.	33.	32.	31.	33.
19	27.	26.	28.	28.	27.
20	29.	27.	27.	25.	26.
21	30.	27.	25.	23.	25.
22	24.	24.	22.	23.	25.
23	35.	29.	25.	26.	24.
24	33.	27.	24.	24.	22.
25	30.	25.	23.	22.	24.
26	31.	27.	29.	28.	26.
27	30.	29.	29.	28.	27.
28	25.	21.	19.	20.	21.
29	26.	21.	21.	22.	21.
30	31.	28.	26.	26.	27.
31	23.	22.	23.	24.	26.
32	24.	23.	24.	26.	28.
33	29.	28.	26.	24.	24.
34	32.	30.	30.	28.	27.
35	30.	30.	26.	22.	21.
36	31.	29.	30.	33.	33.

38



\*\*\* KISSIMMEE DAY 279/1974

\*\*\*

```
CALCULATE (CONCENTRATION=1,DEPOSITION=2)
RECEPTOR GRID SYSTEM (RECTANGULAR=1 OR 3, POLAR=2 OR 4)
DISCRETE RECEPTOR SYSTEM (RECTANGULAR=1,POLAR=2)
TERRAIN ELEVATIONS ARE READ (YES=1,NO=0)
CALCULATIONS ARE WRITTEN TO TAPE (YES=1,NO=0)
LIST ALL INPUT DATA (NO=0,YES=1,MET DATA ALSO=2)
ISW(1) = 1
ISW(2) = 4
ISW(3) = 1
ISW(4) = 0
ISW(5) = 0
ISW(6) = 1

COMPUTE AVERAGE CONCENTRATION (OR TOTAL DEPOSITION)
WITH THE FOLLOWING TIME PERIODS:
HOURLY (YES=1,NO=0)
2-HOUR (YES=1,NO=0)
3-HOUR (YES=1,NO=0)
4-HOUR (YES=1,NO=0)
6-HOUR (YES=1,NO=0)
8-HOUR (YES=1,NO=0)
12-HOUR (YES=1,NO=0)
24-HOUR (YES=1,NO=0)
PRINT *N*-DAY TABLE(S) (YES=1,NO=0)
ISW(7) = 0
ISW(8) = 0
ISW(9) = 0
ISW(10) = 0
ISW(11) = 0
ISW(12) = 0
ISW(13) = 0
ISW(14) = 1
ISW(15) = 0

PRINT THE FOLLOWING TYPES OF TABLES WHOSE TIME PERIODS ARE
SPECIFIED BY ISW(7) THROUGH ISW(14):
DAILY TABLES (YES=1,NO=0)
HIGHEST & SECOND HIGHEST TABLES (YES=1,NO=0)
MAXIMUM 50 TABLES (YES=1,NO=0)
METEOROLOGICAL DATA INPUT METHOD (PRE-PROCESSED=1,CARD=2)
RURAL-URBAN OPTION (RURAL=0,URBAN MODE 1=1,URBAN MODE 2=2)
WIND PROFILE EXPONENT VALUES (DEFAULTS=1,USER ENTERS=2,3)
VERTICAL POT. TEMP. GRADIENT VALUES (DEFAULTS=1,USER ENTERS=2,3)
SCALE EMISSION RATES FOR ALL SOURCES (NO=0,YES>0)
PROGRAM CALCULATES FINAL PLUME RISE ONLY (YES=1,NO=2)
PROGRAM ADJUSTS ALL STACK HEIGHTS FOR DOWNWASH (YES=2,NO=1)
ISW(16) = 1
ISW(17) = 0
ISW(18) = 0
ISW(19) = 1
ISW(20) = 0
ISW(21) = 1
ISW(22) = 1
ISW(23) = 0
ISW(24) = 1
ISW(25) = 1

NUMBER OF INPUT SOURCES
NUMBER OF SOURCE GROUPS (=0,ALL SOURCES)
TIME PERIOD INTERVAL TO BE PRINTED (=0,ALL INTERVALS)
NUMBER OF X (RANGE) GRID VALUES
NUMBER OF Y (THETA) GRID VALUES
NUMBER OF DISCRETE RECEPTORS
SOURCE EMISSION RATE UNITS CONVERSION FACTOR
ENTRAINMENT COEFFICIENT FOR UNSTABLE ATMOSPHERE
ENTRAINMENT COEFFICIENT FOR STABLE ATMOSPHERE
HEIGHT ABOVE GROUND AT WHICH WIND SPEED WAS MEASURED ZR = 7.00 METERS
LOGICAL UNIT NUMBER OF METEOROLOGICAL DATA
DECAY COEFFICIENT FOR PHYSICAL OR CHEMICAL DEPLETION DECAY = 0.000000E+00
SURFACE STATION NO.
YEAR OF SURFACE DATA
UPPER AIR STATION NO.
YEAR OF UPPER AIR DATA
ALLOCATED DATA STORAGE
REQUIRED DATA STORAGE FOR THIS PROBLEM RUN
NSOURC = 1
NGROUP = 0
IPERD = 0
NXPNTS = 11
NYPNTS = 3
NXWYPT = 0
TK = .10000E+07
BETA1 = 0.600
BETA2 = 0.600
IMET = 0
ISS = 12815
ISY = 74
IUS = 12842
IUY = 74
LIMIT = 43500 WORDS
MIMIT = 328 WORDS
```

39

\*\*\* KISSIMMEE DAY 279/1974

\*\*\*

\*\*\* METEOROLOGICAL DAYS TO BE PROCESSED \*\*\*  
(IF=1)

0000000000	0000000000	0000000000	0000000000	0000000000
0000000000	0000000000	0000000000	0000000000	0000000000
0000000000	0000000000	0000000000	0000000000	0000000000
0000000000	0000000000	0000000000	0000000000	0000000000
0000000000	0000000000	0000000000	0000000000	0000000000
0000000000	0000000000	0000000010	0000000000	0000000000
0000000000	0000000000	0000000000	0000000000	0000000000
0000000000	000000			

\*\*\* UPPER BOUND OF FIRST THROUGH FIFTH WIND SPEED CATEGORIES \*\*\*  
(METERS/SEC)

1.54, 3.09, 5.14, 8.23, 10.80,

\*\*\* WIND PROFILE EXPONENTS \*\*\*

STABILITY CATEGORY	WIND SPEED CATEGORY					
	1	2	3	4	5	6
A	.10000E+00	.10000E+00	.10000E+00	.10000E+00	.10000E+00	.10000E+00
B	.15000E+00	.15000E+00	.15000E+00	.15000E+00	.15000E+00	.15000E+00
C	.20000E+00	.20000E+00	.20000E+00	.20000E+00	.20000E+00	.20000E+00
D	.25000E+00	.25000E+00	.25000E+00	.25000E+00	.25000E+00	.25000E+00
E	.30000E+00	.30000E+00	.30000E+00	.30000E+00	.30000E+00	.30000E+00
F	.30000E+00	.30000E+00	.30000E+00	.30000E+00	.30000E+00	.30000E+00

\*\*\* VERTICAL POTENTIAL TEMPERATURE GRADIENTS \*\*\*  
(DEGREES KELVIN PER METER)

STABILITY CATEGORY	WIND SPEED CATEGORY					
	1	2	3	4	5	6
A	.00000E+00	.00000E+00	.00000E+00	.00000E+00	.00000E+00	.00000E+00
B	.00000E+00	.00000E+00	.00000E+00	.00000E+00	.00000E+00	.00000E+00
C	.00000E+00	.00000E+00	.00000E+00	.00000E+00	.00000E+00	.00000E+00
D	.00000E+00	.00000E+00	.00000E+00	.00000E+00	.00000E+00	.00000E+00
E	.20000E-01	.20000E-01	.20000E-01	.20000E-01	.20000E-01	.20000E-01
F	.35000E-01	.35000E-01	.35000E-01	.35000E-01	.35000E-01	.35000E-01

40

\*\*\* KISSIMMEE DAY 279/1974

\*\*\*

\*\*\* RANGES OF POLAR GRID SYSTEM \*\*\*  
(METERS)

3900., 4000., 4100., 4200., 4300., 4400., 4500., 4600., 4700., 4800.,  
4900.,

\*\*\* RADIAL ANGLES OF POLAR GRID SYSTEM \*\*\*  
(DEGREES)

180., 182., 184.,

41

\*\*\* KISSIMMEE DAY 279/1974

\*\*\*

SOURCE # 1---UNIT 1

\*\*\* SOURCE DATA \*\*\*

SOURCE NUMBER	T Y	W A	NUMBER PART.	EMISSION RATE		X (M)	Y (M)	BASE ELEV. (M)	HEIGHT (M)	TEMP.	EXIT VEL.		BLDG. HEIGHT (M)	BLDG. LENGTH (M)	BLDG. WIDTH (M)
				TYPE=0,1 (G/S)	TYPE=2 (G/S)					TYPE=0 (DEG.K)	TYPE=0 (M/S)	VERT.DIM. TYPE=1 (M)			
1	0	0	0	48.900		0.	0.	0.0	9.14	422.0	38.03	2.44	0.00	0.00	0.00

eth

DAILY: 279  
 24-HR/PD 1  
 SGROUP# 1  
 YEAR 1974  
 \*\*\* KISSIMMEE DAY 279/1974

\*\*\*

\* DAILY 24-HOUR AVERAGE CONCENTRATION (MICROGRAMS/CUBIC METER) \*  
 \* ENDING WITH HOUR 24 FOR DAY 279 \*  
 \* FROM ALL SOURCES \*  
 \* FOR THE RECEPTOR GRID \*

\* MAXIMUM VALUE EQUALS 10.3 AND OCCURRED AT ( 4000.0, 182.0) \*

DIRECTION / (DEGREES) /	RANGE (METERS)								
	3900.0	4000.0	4100.0	4200.0	4300.0	4400.0	4500.0	4600.0	4700.0
184.0 /	9.2	9.2	9.2	9.2	9.2	9.2	9.1	9.1	9.0
182.0 /	10.3	10.3	10.3	10.3	10.3	10.3	10.2	10.2	10.1
180.0 /	9.6	9.6	9.6	9.6	9.6	9.5	9.5	9.5	9.4

43

DAILY: 279  
24-HR/PD 1  
SGROUP# 1  
YEAR 1974

\*\*\* KISSIMMEE DAY 279/1974

\*\*\*

\* DAILY 24-HOUR AVERAGE CONCENTRATION (MICROGRAMS/CUBIC METER) \*  
\* ENDING WITH HOUR 24 FOR DAY 279 \*  
\* FROM ALL SOURCES \*  
\* FOR THE RECEPTOR GRID \*

\* MAXIMUM VALUE EQUALS 10.3 AND OCCURRED AT ( 4000.0, 182.0) \*

DIRECTION / RANGE (METERS)  
(DEGREES) / 4800.0 4900.0

-----  
184.0 / 9.0 8.9  
182.0 / 10.1 10.0  
180.0 / 9.4 9.3

47

EXISTING AND SURROUNDING SOURCES





RING DISTANCES(KM)= 0.10 0.30 0.50 0.70 0.90

STACK # 1--COMBUSTION TURBINE  
STACK # 2--KISS. UTIL. UNIT#7  
STACK # 3--KISS. UTIL. UNITS#8,#9  
STACK # 4--KISS. UTIL. UNITS#10,#11  
STACK # 5--KISS. UTIL. UNITS#14-#18  
STACK # 6--KISS. UTIL. UNITS#19-#20

STACK	MONTH	EMISSION RATE (GMS/SEC)	HEIGHT (METERS)	DIAMETER (METERS)	EXIT VELOCITY (M/SEC)	TEMP (DEG.K)	VOLUMETRIC FLOW (M**3/SEC)
1	ALL	48.9000	9.14	2.44	38.03	422.00	177.83
2	ALL	0.8700	13.11	0.61	16.30	466.50	4.76
3	ALL	3.3600	16.15	0.85	17.60	477.60	9.99
4	ALL	2.2800	7.01	0.76	9.60	466.50	4.35
5	ALL	5.3700	13.41	0.80	8.70	505.40	4.37
6	ALL	2.8900	8.69	0.90	17.20	505.40	10.94

46

PLANT NAME: KISS. UTILITIES      POLLUTANT: SO2      AIR QUALITY UNITS: GM/M\*\*3  
 MAXIMUM MEAN CONC= 8.0673E-06      DIRECTION= 18      DISTANCE= 0.5 KM  
 YEAR= 74

DIR	RANGE	ANNUAL MEAN CONCENTRATION AT EACH RECEPTOR				
		0.1 KM	0.3 KM	0.5 KM	0.7 KM	0.9 KM
1		3.94047E-07	5.90615E-06	5.73657E-06	4.63632E-06	3.80970E-06
2		3.38612E-07	4.95829E-06	4.99106E-06	4.16915E-06	3.50125E-06
3		2.79438E-07	4.22725E-06	4.32418E-06	3.63989E-06	3.08068E-06
4		3.06107E-07	4.54864E-06	4.58201E-06	3.78769E-06	3.15872E-06
5		3.84323E-07	4.92985E-06	4.86695E-06	4.00239E-06	3.32256E-06
6		3.89023E-07	5.02919E-06	5.05781E-06	4.21517E-06	3.54859E-06
7		3.55545E-07	4.48994E-06	4.35552E-06	3.58128E-06	3.00576E-06
8		3.08707E-07	4.03610E-06	3.94399E-06	3.26037E-06	2.75356E-06
9		2.72489E-07	3.93654E-06	4.00897E-06	3.40032E-06	2.91940E-06
10		2.97951E-07	4.10936E-06	4.16097E-06	3.45498E-06	2.86373E-06
11		3.64990E-07	4.23194E-06	4.13559E-06	3.47492E-06	2.97118E-06
12		4.11647E-07	4.83857E-06	4.86383E-06	4.10994E-06	3.49013E-06
13		3.93164E-07	4.74315E-06	4.68946E-06	3.86901E-06	3.20739E-06
14		3.55423E-07	4.99078E-06	4.99852E-06	4.06316E-06	3.30028E-06
15		2.72299E-07	4.27752E-06	4.45873E-06	3.68416E-06	3.02744E-06
16		2.43630E-07	4.10549E-06	4.14792E-06	3.38093E-06	2.81088E-06
17		2.55312E-07	5.15862E-06	5.44948E-06	4.54596E-06	3.84218E-06
18		2.85053E-07	6.98533E-06	8.06734E-06	7.09297E-06	6.22043E-06
19		2.60797E-07	4.95345E-06	5.43467E-06	4.62669E-06	3.92461E-06
20		2.92621E-07	5.60787E-06	6.39449E-06	5.70653E-06	5.06800E-06
21		3.61073E-07	5.80845E-06	6.15098E-06	5.29959E-06	4.59709E-06
22		4.46503E-07	6.82548E-06	7.17073E-06	6.15646E-06	5.32364E-06
23		4.64749E-07	7.15947E-06	7.37299E-06	6.17726E-06	5.24012E-06
24		4.17053E-07	6.56124E-06	6.74057E-06	5.64486E-06	4.77370E-06
25		3.91513E-07	6.31567E-06	6.76913E-06	5.83319E-06	5.01782E-06
26		4.61743E-07	5.87744E-06	5.94848E-06	4.99577E-06	4.26962E-06
27		4.96765E-07	6.54674E-06	6.81704E-06	5.79479E-06	4.93912E-06
28		4.42227E-07	6.09763E-06	6.29617E-06	5.29121E-06	4.44138E-06
29		4.10104E-07	5.70008E-06	5.85031E-06	4.88917E-06	4.09869E-06
30		4.53198E-07	6.17898E-06	6.45246E-06	5.44689E-06	4.60866E-06
31		5.07914E-07	5.88214E-06	5.90846E-06	4.90066E-06	4.10818E-06
32		5.76243E-07	5.57241E-06	5.51611E-06	4.61172E-06	3.92398E-06
33		5.39704E-07	5.19750E-06	5.01557E-06	4.11082E-06	3.44359E-06
34		4.56214E-07	6.17757E-06	6.32132E-06	5.26540E-06	4.40060E-06
35		4.34996E-07	5.87890E-06	5.87907E-06	4.84566E-06	4.03635E-06
36		4.35477E-07	7.10329E-06	7.43535E-06	6.26296E-06	5.28663E-06

147

PLANT NAME: KISS. UTILITIES      POLLUTANT: SO2      AIR QUALITY UNITS: GM/M\*\*3  
 MAXIMUM MEAN CONC= 8.9968E-06      DIRECTION= 36      DISTANCE= 0.3 KM  
 YEAR= 75

DIR	ANNUAL MEAN CONCENTRATION AT EACH RECEPTOR					
	RANGE	0.1 KM	0.3 KM	0.5 KM	0.7 KM	0.9 KM
1		6.79781E-07	7.38675E-06	6.93115E-06	5.51287E-06	4.47713E-06
2		5.63330E-07	6.05201E-06	5.68735E-06	4.55215E-06	3.72380E-06
3		4.62249E-07	4.97501E-06	4.54043E-06	3.59293E-06	2.91864E-06
4		4.49751E-07	5.27746E-06	4.92884E-06	3.95071E-06	3.24983E-06
5		4.55838E-07	5.80844E-06	5.77183E-06	4.79758E-06	4.00116E-06
6		3.99793E-07	4.64941E-06	4.42197E-06	3.59037E-06	2.98893E-06
7		4.01773E-07	4.65934E-06	4.63452E-06	3.85046E-06	3.23751E-06
8		3.52545E-07	4.15923E-06	4.11450E-06	3.35938E-06	2.76783E-06
9		2.86703E-07	3.78406E-06	3.82871E-06	3.20844E-06	2.72926E-06
10		3.07055E-07	3.80642E-06	3.56930E-06	2.83341E-06	2.31878E-06
11		3.97484E-07	5.45477E-06	5.34787E-06	4.38798E-06	3.67494E-06
12		4.77234E-07	6.54095E-06	6.35248E-06	5.13585E-06	4.19772E-06
13		4.96219E-07	6.49938E-06	6.19431E-06	4.98541E-06	4.08682E-06
14		4.44896E-07	5.70798E-06	5.39789E-06	4.26718E-06	3.41814E-06
15		3.44101E-07	4.55705E-06	4.49113E-06	3.66688E-06	3.02479E-06
16		3.18752E-07	4.59380E-06	4.66620E-06	3.90191E-06	3.31504E-06
17		3.19213E-07	4.54505E-06	4.70357E-06	3.99041E-06	3.45945E-06
18		2.97257E-07	5.26420E-06	5.99157E-06	5.33953E-06	4.75003E-06
19		2.43949E-07	4.23069E-06	4.49190E-06	3.80108E-06	3.25010E-06
20		2.60127E-07	5.03683E-06	5.83248E-06	5.26915E-06	4.72391E-06
21		3.38294E-07	5.78597E-06	6.29619E-06	5.47628E-06	4.76250E-06
22		4.34734E-07	6.71577E-06	7.22377E-06	6.30344E-06	5.53587E-06
23		5.34040E-07	8.37973E-06	8.82740E-06	7.59106E-06	6.57341E-06
24		5.37835E-07	7.62684E-06	7.79013E-06	6.58113E-06	5.61766E-06
25		4.27105E-07	6.03848E-06	6.35483E-06	5.48192E-06	4.75325E-06
26		3.94558E-07	5.70239E-06	5.80044E-06	4.84078E-06	4.06799E-06
27		4.80302E-07	7.62871E-06	8.14420E-06	6.97058E-06	5.94764E-06
28		4.79091E-07	6.51153E-06	6.35890E-06	5.15938E-06	4.26611E-06
29		4.31423E-07	5.73424E-06	5.56579E-06	4.55208E-06	3.81537E-06
30		4.44142E-07	6.98012E-06	7.26513E-06	6.10799E-06	5.18262E-06
31		4.40314E-07	5.66177E-06	5.61453E-06	4.67047E-06	3.96274E-06
32		4.65428E-07	5.45786E-06	5.35275E-06	4.46425E-06	3.82610E-06
33		5.90483E-07	6.84287E-06	6.36894E-06	5.04228E-06	4.13260E-06
34		6.76601E-07	7.86456E-06	7.45682E-06	6.01608E-06	4.97327E-06
35		6.65022E-07	7.41602E-06	7.09775E-06	5.71449E-06	4.67814E-06
36		7.20536E-07	8.99684E-06	8.85797E-06	7.24184E-06	6.01854E-06

878

PLANT NAME: KISS. UTILITIES      POLLUTANT: SO2      AIR QUALITY UNITS: GM/M\*\*3  
 MAXIMUM MEAN CONC= 1.1954E-05      DIRECTION= 18      DISTANCE= 0.5 KM  
 YEAR= 76

DIR	RANGE	ANNUAL MEAN CONCENTRATION AT EACH RECEPTOR				
		0.1 KM	0.3 KM	0.5 KM	0.7 KM	0.9 KM
1		5.36371E-07	6.56214E-06	6.30856E-06	5.09575E-06	4.20890E-06
2		4.66657E-07	5.85672E-06	5.61985E-06	4.50522E-06	3.66570E-06
3		4.35504E-07	4.97493E-06	4.61135E-06	3.66280E-06	2.98261E-06
4		4.16393E-07	4.89415E-06	4.79399E-06	3.91313E-06	3.23694E-06
5		4.60784E-07	5.63178E-06	5.58671E-06	4.59986E-06	3.82943E-06
6		4.37325E-07	5.20889E-06	5.21423E-06	4.34565E-06	3.66637E-06
7		3.36657E-07	4.12823E-06	4.14762E-06	3.44177E-06	2.88984E-06
8		3.24119E-07	4.27021E-06	4.16824E-06	3.32471E-06	2.68014E-06
9		3.64283E-07	5.47009E-06	5.63241E-06	4.67297E-06	3.89797E-06
10		2.66304E-07	4.18429E-06	4.32362E-06	3.62184E-06	3.06638E-06
11		2.38980E-07	4.11635E-06	4.32125E-06	3.64134E-06	3.09536E-06
12		3.20131E-07	5.21439E-06	5.35892E-06	4.46081E-06	3.73309E-06
13		3.80321E-07	6.21767E-06	6.21571E-06	5.00547E-06	4.02968E-06
14		3.68463E-07	6.02888E-06	5.97353E-06	4.83614E-06	3.92478E-06
15		2.91657E-07	5.20589E-06	5.40381E-06	4.48510E-06	3.68666E-06
16		2.39791E-07	5.47122E-06	6.17927E-06	5.35192E-06	4.54270E-06
17		2.68591E-07	6.47820E-06	7.27771E-06	6.25526E-06	5.28901E-06
18		3.51324E-07	1.02792E-05	1.19544E-05	1.04091E-05	8.85606E-06
19		3.68616E-07	7.94089E-06	8.47033E-06	6.98957E-06	5.70349E-06
20		4.41940E-07	7.65187E-06	8.02398E-06	6.70053E-06	5.58237E-06
21		3.98341E-07	6.02229E-06	6.24517E-06	5.31621E-06	4.52079E-06
22		4.37697E-07	6.04053E-06	6.31557E-06	5.39134E-06	4.58747E-06
23		4.46902E-07	6.74641E-06	7.40011E-06	6.47703E-06	5.61754E-06
24		4.21440E-07	6.52155E-06	6.94613E-06	5.95070E-06	5.09737E-06
25		4.21004E-07	5.58363E-06	5.92600E-06	5.12327E-06	4.40913E-06
26		4.36309E-07	5.38983E-06	5.57527E-06	4.74763E-06	4.05029E-06
27		4.62217E-07	6.38667E-06	6.80548E-06	5.86914E-06	5.04956E-06
28		4.58110E-07	5.78438E-06	5.62179E-06	4.55584E-06	3.73020E-06
29		4.44299E-07	6.13521E-06	6.24864E-06	5.17429E-06	4.29438E-06
30		4.47567E-07	6.56674E-06	7.07169E-06	6.14912E-06	5.33549E-06
31		4.60708E-07	6.27882E-06	6.36618E-06	5.24594E-06	4.36714E-06
32		4.90309E-07	6.10071E-06	6.15216E-06	5.07705E-06	4.22159E-06
33		4.54720E-07	5.65983E-06	5.62785E-06	4.59413E-06	3.78104E-06
34		4.87422E-07	6.50987E-06	6.93433E-06	5.89637E-06	4.96645E-06
35		5.13822E-07	5.87155E-06	5.79156E-06	4.78473E-06	4.04295E-06
36		5.86232E-07	8.24868E-06	8.70565E-06	7.39448E-06	6.31519E-06

b7c

PLANT NAME: KISS. UTILITIES      POLLUTANT: SO2      AIR QUALITY UNITS: GM/M\*\*3  
 MAXIMUM MEAN CONC= 1.0971E-05      DIRECTION= 36      DISTANCE= 0.5 KM  
 YEAR= 77

DIR	RANGE	ANNUAL MEAN CONCENTRATION AT EACH RECEPTOR				
		0.1 KM	0.3 KM	0.5 KM	0.7 KM	0.9 KM
1		6.60364E-07	7.03036E-06	6.47816E-06	5.11062E-06	4.15588E-06
2		4.73056E-07	5.07373E-06	4.94959E-06	4.06614E-06	3.38356E-06
3		4.37215E-07	4.51641E-06	4.25743E-06	3.44315E-06	2.83129E-06
4		4.81250E-07	5.42896E-06	5.27230E-06	4.38400E-06	3.70935E-06
5		5.05303E-07	6.01202E-06	5.94890E-06	4.97407E-06	4.22093E-06
6		5.12505E-07	5.52898E-06	5.49630E-06	4.62879E-06	3.94662E-06
7		4.70529E-07	4.41269E-06	4.25452E-06	3.57204E-06	3.02717E-06
8		3.84555E-07	4.12960E-06	3.92202E-06	3.24059E-06	2.75247E-06
9		3.83214E-07	5.52867E-06	5.64533E-06	4.79159E-06	4.11994E-06
10		3.50218E-07	4.71376E-06	4.50775E-06	3.63022E-06	2.97131E-06
11		3.82204E-07	4.96780E-06	4.70104E-06	3.77159E-06	3.10126E-06
12		4.64455E-07	5.94434E-06	5.78478E-06	4.74561E-06	3.94780E-06
13		4.46692E-07	6.01550E-06	5.82303E-06	4.64213E-06	3.71795E-06
14		4.13753E-07	5.72261E-06	5.76125E-06	4.72454E-06	3.85261E-06
15		3.95630E-07	5.00382E-06	4.70458E-06	3.72577E-06	3.00733E-06
16		3.74050E-07	4.78557E-06	4.61766E-06	3.75089E-06	3.12771E-06
17		3.96302E-07	5.76607E-06	5.84809E-06	4.85830E-06	4.06551E-06
18		3.56653E-07	7.22065E-06	8.19676E-06	7.26041E-06	6.35357E-06
19		2.41538E-07	4.29411E-06	4.59971E-06	3.95247E-06	3.36286E-06
20		2.06474E-07	4.02662E-06	4.52321E-06	4.00548E-06	3.48628E-06
21		2.19971E-07	4.35343E-06	5.10863E-06	4.62095E-06	4.10769E-06
22		2.99022E-07	4.87792E-06	5.44573E-06	4.79461E-06	4.21996E-06
23		4.49116E-07	7.21923E-06	8.02291E-06	7.07358E-06	6.22776E-06
24		4.86376E-07	7.57223E-06	8.18276E-06	7.13464E-06	6.20280E-06
25		4.99085E-07	6.45579E-06	6.63611E-06	5.61236E-06	4.78715E-06
26		5.55523E-07	6.95489E-06	7.00001E-06	5.81558E-06	4.87802E-06
27		6.27273E-07	1.00613E-05	1.06180E-05	8.96957E-06	7.56837E-06
28		5.45054E-07	6.87047E-06	6.77354E-06	5.56011E-06	4.61417E-06
29		5.49674E-07	5.77196E-06	5.49056E-06	4.47087E-06	3.70103E-06
30		6.88761E-07	7.84890E-06	7.72202E-06	6.39144E-06	5.37303E-06
31		6.16712E-07	6.76732E-06	6.59604E-06	5.40611E-06	4.50896E-06
32		4.17553E-07	5.41535E-06	5.40314E-06	4.51515E-06	3.81075E-06
33		3.35306E-07	4.82981E-06	4.78464E-06	3.97480E-06	3.36141E-06
34		3.47662E-07	5.27373E-06	5.41844E-06	4.61709E-06	3.97760E-06
35		4.75889E-07	6.46543E-06	6.46916E-06	5.35214E-06	4.48964E-06
36		7.34848E-07	1.05314E-05	1.09713E-05	9.28678E-06	7.89376E-06

50

PLANT NAME: KISS. UTILITIES      POLLUTANT: SO2      AIR QUALITY UNITS: GM/M\*\*3  
 MAXIMUM MEAN CONC= 1.1860E-05      DIRECTION= 27      DISTANCE= 0.3 KM  
 YEAR= 78

DIR	RANGE	ANNUAL MEAN CONCENTRATION AT EACH RECEPTOR				
		0.1 KM	0.3 KM	0.5 KM	0.7 KM	0.9 KM
1		5.75149E-07	5.74012E-06	5.37812E-06	4.33423E-06	3.54104E-06
2		4.20699E-07	4.65051E-06	4.40428E-06	3.56444E-06	2.94248E-06
3		3.05409E-07	3.60221E-06	3.40152E-06	2.71728E-06	2.20196E-06
4		2.90489E-07	4.24350E-06	4.40856E-06	3.73804E-06	3.16963E-06
5		2.96538E-07	3.99395E-06	4.06533E-06	3.39168E-06	2.83979E-06
6		2.68659E-07	3.49504E-06	3.49099E-06	2.90325E-06	2.43976E-06
7		1.89820E-07	2.71519E-06	2.68826E-06	2.20138E-06	1.82962E-06
8		1.76940E-07	2.71340E-06	2.61451E-06	2.09708E-06	1.72456E-06
9		2.19363E-07	3.87437E-06	4.19140E-06	3.58536E-06	3.03242E-06
10		1.90819E-07	2.96344E-06	3.18233E-06	2.72441E-06	2.31173E-06
11		1.66316E-07	2.89604E-06	3.13199E-06	2.70198E-06	2.29522E-06
12		2.17629E-07	4.08162E-06	4.27372E-06	3.56134E-06	2.94613E-06
13		2.93916E-07	4.43099E-06	4.38829E-06	3.53303E-06	2.83211E-06
14		3.05918E-07	4.52295E-06	4.45822E-06	3.60200E-06	2.90330E-06
15		2.38992E-07	3.88239E-06	3.99471E-06	3.34921E-06	2.81090E-06
16		1.86407E-07	3.58090E-06	3.92579E-06	3.38218E-06	2.88329E-06
17		1.95432E-07	5.10021E-06	5.97147E-06	5.25145E-06	4.50984E-06
18		2.51123E-07	7.73245E-06	9.19358E-06	8.15119E-06	7.04351E-06
19		2.38700E-07	5.80943E-06	6.34082E-06	5.35988E-06	4.45434E-06
20		3.02429E-07	5.83921E-06	6.28508E-06	5.38318E-06	4.57835E-06
21		4.30742E-07	6.65252E-06	7.03454E-06	6.03577E-06	5.14510E-06
22		5.46370E-07	7.67164E-06	8.10424E-06	6.99715E-06	6.00374E-06
23		6.62207E-07	8.73261E-06	8.70833E-06	7.26831E-06	6.12575E-06
24		7.35318E-07	8.42796E-06	8.13212E-06	6.69650E-06	5.64740E-06
25		7.66580E-07	8.02565E-06	7.60447E-06	6.26247E-06	5.34557E-06
26		9.18440E-07	1.05117E-05	1.01474E-05	8.29143E-06	6.95512E-06
27		9.41646E-07	1.18603E-05	1.15737E-05	9.39321E-06	7.79052E-06
28		7.38468E-07	9.11261E-06	8.76443E-06	7.07938E-06	5.83881E-06
29		6.33076E-07	7.02109E-06	6.45164E-06	5.04734E-06	4.06846E-06
30		6.84272E-07	7.91788E-06	7.89087E-06	6.63374E-06	5.68149E-06
31		6.51723E-07	7.41030E-06	7.28847E-06	6.05604E-06	5.14354E-06
32		5.47414E-07	6.64134E-06	6.68308E-06	5.63047E-06	4.78546E-06
33		5.35542E-07	7.30011E-06	7.60975E-06	6.50360E-06	5.57677E-06
34		6.10588E-07	7.87486E-06	7.95378E-06	6.68306E-06	5.66959E-06
35		7.15434E-07	8.05862E-06	7.63032E-06	6.19825E-06	5.15498E-06
36		7.36866E-07	8.44743E-06	8.20678E-06	6.70484E-06	5.53099E-06

51

PLANT NAME: KISS. UTILITIES      POLLUTANT: SO2      AIR QUALITY UNITS: GM/M\*\*3  
 YEARLY SECOND MAXIMUM 24-HOUR CONC= 1.2979E-04      DIRECTION= 18      DISTANCE= 0.5 KM      DAY=279  
 YEAR= 74

RANGE	SECOND HIGHEST 24-HOUR CONCENTRATION AT EACH RECEPTOR					
	0.1 KM	0.3 KM	0.5 KM	0.7 KM	0.9 KM	
DIR						
1	7.1035E-06 (135)	5.3770E-05 (152)	5.3207E-05 (104)	4.2548E-05 (104)	3.3900E-05 (104)	
2	6.0889E-06 (228)	4.6043E-05 (38)	3.5015E-05 (143)	3.7239E-05 (38)	3.2257E-05 (230)	
3	4.7438E-06 (124)	4.0233E-05 (175)	5.6460E-05 (34)	5.0492E-05 (34)	4.2920E-05 (34)	
4	7.0954E-06 (146)	4.8545E-05 (39)	5.0477E-05 (147)	5.2265E-05 (147)	4.9030E-05 (147)	
5	8.8534E-06 (125)	5.7316E-05 (39)	5.4513E-05 (80)	4.5176E-05 (147)	3.5765E-05 (174)	
6	8.6051E-06 (168)	6.4371E-05 (90)	5.4928E-05 (90)	4.3014E-05 (90)	3.5997E-05 (90)	
7	9.3383E-06 (192)	5.5212E-05 (90)	4.6156E-05 (90)	3.6606E-05 (90)	3.1046E-05 (90)	
8	7.1279E-06 (192)	6.1500E-05 (168)	4.5374E-05 (168)	4.2132E-05 (146)	3.6382E-05 (132)	
9	5.2566E-06 (167)	5.1948E-05 (7)	5.1816E-05 (7)	4.4024E-05 (87)	3.5938E-05 (87)	
10	8.1535E-06 (150)	5.3031E-05 (335)	6.1873E-05 (39)	5.6972E-05 (39)	4.7427E-05 (39)	
11	1.1018E-05 (99)	6.3351E-05 (351)	7.5019E-05 (99)	5.4954E-05 (99)	4.3048E-05 (99)	
12	1.7757E-05 (145)	6.4103E-05 (150)	6.4109E-05 (145)	4.8025E-05 (145)	3.9099E-05 (145)	
13	1.4407E-05 (150)	5.5382E-05 (145)	5.3145E-05 (55)	5.1892E-05 (355)	4.6817E-05 (355)	
14	1.0220E-05 (163)	5.8565E-05 (280)	6.9610E-05 (280)	5.7405E-05 (280)	4.5068E-05 (350)	
15	9.3773E-06 (163)	5.2867E-05 (41)	5.5981E-05 (96)	4.9333E-05 (96)	4.0205E-05 (96)	
16	6.0677E-06 (107)	5.7397E-05 (107)	4.6532E-05 (107)	3.9137E-05 (96)	3.2199E-05 (96)	
17	5.3872E-06 (72)	6.7367E-05 (107)	7.8474E-05 (311)	6.6288E-05 (57)	5.4184E-05 (332)	
18	5.9252E-06 (100)	1.2426E-04 (279)	1.2979E-04 (279)	1.0211E-04 (279)	8.1981E-05 (313)	
19	6.1060E-06 (198)	8.0391E-05 (313)	8.8984E-05 (279)	6.9568E-05 (279)	5.6063E-05 (312)	
20	5.6821E-06 (100)	6.5231E-05 (276)	6.8451E-05 (348)	6.6955E-05 (348)	5.9085E-05 (348)	
21	7.9970E-06 (225)	7.3747E-05 (330)	8.1175E-05 (277)	6.2957E-05 (277)	4.8548E-05 (277)	
22	1.2095E-05 (225)	7.2105E-05 (100)	7.6398E-05 (277)	6.1005E-05 (277)	4.9997E-05 (267)	
23	1.0799E-05 (67)	7.4726E-05 (171)	8.2070E-05 (295)	6.9224E-05 (295)	5.6662E-05 (295)	
24	8.4130E-06 (171)	6.8350E-05 (195)	7.3190E-05 (194)	5.5245E-05 (194)	4.2143E-05 (194)	
25	4.7846E-06 (235)	5.3921E-05 (340)	5.8653E-05 (110)	4.4418E-05 (110)	3.4757E-05 (248)	
26	6.8101E-06 (172)	5.0880E-05 (300)	4.8680E-05 (365)	4.3101E-05 (302)	3.7964E-05 (302)	
27	9.5567E-06 (111)	5.6424E-05 (140)	5.0492E-05 (101)	4.4880E-05 (361)	4.2987E-05 (361)	
28	6.9537E-06 (111)	6.1111E-05 (215)	6.4359E-05 (102)	5.4580E-05 (102)	4.3499E-05 (102)	
29	8.4741E-06 (139)	5.0361E-05 (102)	6.0495E-05 (139)	5.2385E-05 (102)	4.5760E-05 (102)	
30	1.0990E-05 (211)	7.2133E-05 (139)	5.6463E-05 (361)	4.3718E-05 (62)	3.5701E-05 (219)	
31	1.0503E-05 (220)	5.8486E-05 (65)	5.2206E-05 (70)	4.2093E-05 (37)	3.7454E-05 (37)	
32	1.1591E-05 (135)	6.7081E-05 (134)	6.1750E-05 (248)	5.4750E-05 (248)	4.6846E-05 (216)	
33	9.1306E-06 (135)	6.6015E-05 (250)	6.7826E-05 (94)	5.4789E-05 (63)	4.1685E-05 (63)	
34	7.3048E-06 (94)	6.3727E-05 (93)	6.5129E-05 (93)	5.1415E-05 (334)	4.0031E-05 (334)	
35	7.5730E-06 (188)	4.6493E-05 (94)	5.2099E-05 (175)	4.9719E-05 (176)	4.4708E-05 (95)	
36	8.1476E-06 (135)	6.8347E-05 (176)	8.4361E-05 (176)	7.3085E-05 (176)	5.9775E-05 (176)	

252

PLANT NAME: KISS. UTILITIES

POLLUTANT: SO2

AIR QUALITY UNITS: GM/M\*\*3

YEARLY SECOND MAXIMUM 24-HOUR CONC= 8.5687E-05 DIRECTION= 18 DISTANCE= 0.5 KM DAY=293

YEAR= 75

	SECOND HIGHEST 24-HOUR CONCENTRATION AT EACH RECEPTOR							
RANGE	0.1 KM	0.3 KM	0.5 KM	0.7 KM	0.9 KM			
DIR								
1	1.4183E-05 (167)	7.0473E-05 (167)	6.9188E-05 (331)	5.0975E-05 (119)	4.0120E-05 ( 20)			
2	1.4399E-05 (215)	5.8855E-05 ( 20)	6.2430E-05 (119)	4.3490E-05 (119)	3.3497E-05 (119)			
3	8.3953E-06 ( 89)	4.4796E-05 ( 89)	3.9038E-05 ( 89)	3.1468E-05 ( 9)	2.5255E-05 (267)			
4	7.2991E-06 (203)	4.8354E-05 ( 82)	4.1090E-05 ( 50)	3.1337E-05 ( 66)	2.5871E-05 ( 66)			
5	9.8454E-06 (203)	4.8854E-05 (160)	4.4695E-05 (351)	4.0575E-05 (351)	3.4659E-05 (351)			
6	8.9305E-06 (157)	4.9191E-05 (188)	4.0163E-05 (100)	3.1997E-05 (192)	2.6763E-05 (192)			
7	1.0128E-05 (110)	6.8747E-05 (158)	6.0451E-05 (178)	4.7989E-05 (325)	4.1427E-05 (325)			
8	1.3696E-05 (225)	5.9094E-05 ( 81)	6.5228E-05 (157)	4.8505E-05 (157)	4.0182E-05 (157)			
9	1.0719E-05 (225)	4.6972E-05 ( 78)	4.8423E-05 ( 78)	3.9679E-05 ( 78)	3.4009E-05 (325)			
10	8.2741E-06 (129)	5.3053E-05 ( 78)	5.3294E-05 (124)	4.2219E-05 (124)	3.3418E-05 (124)			
11	8.5707E-06 (128)	6.3519E-05 ( 13)	7.2578E-05 ( 13)	5.9575E-05 ( 13)	4.6717E-05 ( 13)			
12	1.2501E-05 (180)	7.4376E-05 ( 13)	8.2202E-05 ( 13)	6.8310E-05 (297)	5.8107E-05 (354)			
13	1.0391E-05 (180)	7.4819E-05 ( 67)	8.1376E-05 (317)	6.1636E-05 (317)	4.8373E-05 (298)			
14	8.8382E-06 (231)	6.7204E-05 (139)	6.3434E-05 (291)	5.0296E-05 (291)	3.9623E-05 (291)			
15	7.9549E-06 (155)	5.9117E-05 ( 14)	6.4653E-05 (125)	5.3211E-05 (352)	4.2111E-05 (352)			
16	8.2176E-06 (102)	5.3496E-05 ( 95)	6.3405E-05 (353)	5.3451E-05 (353)	4.2269E-05 (353)			
17	8.5630E-06 (230)	5.1685E-05 (353)	6.6450E-05 (353)	6.1317E-05 (353)	5.5659E-05 (353)			
18	8.5751E-06 (155)	8.0293E-05 (268)	8.5687E-05 (293)	7.1867E-05 (293)	6.2354E-05 (293)			
19	4.4800E-06 (163)	5.1181E-05 (353)	6.2998E-05 (353)	5.4066E-05 ( 64)	4.7143E-05 ( 5)			
20	5.5061E-06 (181)	5.1968E-05 ( 52)	6.8683E-05 (292)	6.4912E-05 ( 5)	6.1051E-05 (257)			
21	7.5929E-06 (141)	5.7803E-05 (111)	6.0797E-05 (111)	5.4122E-05 (273)	4.4294E-05 (273)			
22	9.6530E-06 (182)	5.2749E-05 (285)	5.6453E-05 ( 2)	4.6748E-05 ( 5)	4.3022E-05 ( 5)			
23	9.5466E-06 (103)	6.1859E-05 (182)	6.3954E-05 (174)	5.1374E-05 (309)	4.8653E-05 ( 52)			
24	1.0706E-05 (170)	7.4791E-05 (182)	6.9122E-05 (182)	5.1573E-05 (305)	4.2293E-05 (305)			
25	9.3623E-06 (103)	5.3601E-05 (144)	5.9679E-05 (323)	4.3793E-05 (181)	3.5076E-05 (251)			
26	1.1117E-05 (234)	4.7772E-05 (287)	4.5250E-05 (112)	3.4296E-05 (173)	2.6816E-05 (287)			
27	1.2363E-05 (112)	6.1201E-05 (247)	6.5029E-05 (247)	5.2364E-05 (247)	4.3227E-05 ( 77)			
28	8.6324E-06 (214)	7.0737E-05 (288)	6.0239E-05 (288)	4.4025E-05 (222)	3.4999E-05 (222)			
29	5.8329E-06 (263)	5.8574E-05 (205)	4.5467E-05 (214)	3.4760E-05 (363)	3.0580E-05 (313)			
30	8.0642E-06 (113)	8.3998E-05 ( 87)	8.0012E-05 (117)	5.9437E-05 (117)	4.6712E-05 (117)			
31	6.5571E-06 (114)	4.6869E-05 (117)	5.0669E-05 (104)	4.2991E-05 (104)	3.5485E-05 (104)			
32	5.8479E-06 (259)	4.0249E-05 ( 88)	4.3514E-05 (196)	3.6295E-05 ( 10)	3.2943E-05 ( 10)			
33	8.5792E-06 (210)	7.9172E-05 ( 10)	8.0166E-05 ( 10)	6.8323E-05 (364)	5.5422E-05 (364)			
34	8.4170E-06 (210)	7.2261E-05 (194)	7.1572E-05 (266)	5.7204E-05 (266)	4.4844E-05 ( 48)			
35	1.0446E-05 (210)	5.7955E-05 (194)	6.2846E-05 ( 55)	5.2983E-05 (194)	4.3983E-05 (194)			
36	1.1964E-05 (167)	7.1976E-05 (109)	6.5642E-05 ( 89)	5.9521E-05 ( 89)	4.9008E-05 ( 89)			

53



PLANT NAME: KISS. UTILITIES      POLLUTANT: SO2      AIR QUALITY UNITS: GM/M\*\*3  
 YEARLY SECOND MAXIMUM 24-HOUR CONC= 1.3271E-04      DIRECTION= 18      DISTANCE= 0.5 KM      DAY=340  
 YEAR= 76

SECOND HIGHEST 24-HOUR CONCENTRATION AT EACH RECEPTOR

RANGE	0.1 KM	0.3 KM	0.5 KM	0.7 KM	0.9 KM
DIR					
1	8.3098E-06 (102)	5.0949E-05 (215)	4.8132E-05 ( 50)	4.1850E-05 ( 50)	3.4077E-05 (299)
2	7.3163E-06 (187)	6.3095E-05 (187)	5.5306E-05 (363)	4.4913E-05 (363)	3.6071E-05 (363)
3	8.0708E-06 (213)	5.8282E-05 (214)	5.4448E-05 ( 91)	4.4914E-05 (144)	3.4338E-05 (144)
4	9.6371E-06 (213)	5.5424E-05 (355)	6.8027E-05 (299)	5.8326E-05 (299)	4.6413E-05 (299)
5	8.7906E-06 ( 95)	6.4796E-05 (117)	6.4606E-05 (145)	5.1845E-05 (145)	4.1983E-05 ( 69)
6	9.6870E-06 ( 81)	5.5919E-05 (145)	5.4244E-05 (194)	4.2769E-05 (194)	3.5831E-05 (194)
7	6.1883E-06 ( 81)	5.2062E-05 (145)	4.4949E-05 (132)	3.7826E-05 (132)	3.6136E-05 (342)
8	8.9896E-06 (198)	5.6925E-05 (195)	5.1139E-05 (122)	3.7831E-05 (197)	3.2137E-05 (198)
9	1.3807E-05 (139)	9.5890E-05 (196)	7.8661E-05 (196)	6.4104E-05 (361)	5.3661E-05 (361)
10	5.0725E-06 (198)	5.9965E-05 ( 17)	5.4478E-05 ( 17)	4.4336E-05 ( 16)	3.8432E-05 ( 16)
11	4.9108E-06 ( 93)	5.3945E-05 (198)	6.0822E-05 (326)	5.5393E-05 (326)	4.7006E-05 (326)
12	6.9281E-06 (235)	5.7511E-05 (343)	7.3104E-05 (343)	6.3488E-05 (343)	5.1844E-05 (343)
13	8.5807E-06 (157)	6.3413E-05 ( 18)	7.5721E-05 (310)	6.8037E-05 (310)	5.6114E-05 (362)
14	9.4328E-06 (157)	7.3565E-05 (295)	6.9076E-05 (295)	5.3461E-05 (295)	4.1555E-05 (295)
15	8.9328E-06 ( 96)	6.4433E-05 ( 67)	6.9248E-05 (327)	5.5387E-05 (100)	4.4650E-05 ( 99)
16	6.3737E-06 (220)	6.2719E-05 (335)	8.3422E-05 (335)	7.2803E-05 (335)	5.8692E-05 (335)
17	4.0767E-06 (124)	6.9647E-05 ( 77)	7.4648E-05 (336)	6.4756E-05 ( 19)	5.6626E-05 ( 19)
18	5.9648E-06 (131)	1.1545E-04 (336)	1.3271E-04 (340)	1.1640E-04 (302)	8.9292E-05 (302)
19	7.7339E-06 (157)	9.7964E-05 (302)	1.0305E-04 (292)	8.5959E-05 (292)	6.9518E-05 (292)
20	1.1644E-05 (140)	8.5134E-05 (318)	9.6916E-05 (318)	7.8382E-05 (318)	6.2376E-05 (292)
21	1.0440E-05 (164)	6.6070E-05 ( 57)	7.3699E-05 ( 57)	5.9461E-05 ( 57)	4.6261E-05 (166)
22	9.2402E-06 (199)	7.0934E-05 (166)	5.6909E-05 (166)	4.8831E-05 ( 5)	4.1390E-05 ( 5)
23	9.4675E-06 (242)	7.0092E-05 (130)	8.2172E-05 (130)	6.9835E-05 (231)	5.8310E-05 (231)
24	1.0029E-05 (101)	6.5025E-05 (165)	6.9343E-05 (165)	5.7915E-05 (165)	4.8668E-05 (161)
25	7.9979E-06 (245)	6.5064E-05 (243)	5.2750E-05 (307)	4.4659E-05 (290)	3.6736E-05 (290)
26	7.4226E-06 (126)	7.4210E-05 (278)	6.7715E-05 (278)	5.0703E-05 (278)	3.8484E-05 (278)
27	7.6108E-06 (126)	4.9869E-05 (126)	5.0080E-05 ( 84)	4.3717E-05 ( 84)	3.8375E-05 (241)
28	6.2566E-06 (251)	5.4099E-05 (269)	5.0675E-05 (269)	3.9870E-05 ( 64)	3.0963E-05 (269)
29	7.0738E-06 (108)	6.2186E-05 (127)	5.6129E-05 ( 72)	4.9917E-05 (345)	4.1384E-05 (345)
30	7.7512E-06 (245)	5.1226E-05 ( 64)	4.7917E-05 (120)	4.6691E-05 ( 64)	4.1035E-05 (262)
31	7.3859E-06 (154)	7.1406E-05 (135)	7.3737E-05 (135)	5.9113E-05 (135)	4.8818E-05 (168)
32	8.8453E-06 (192)	5.6184E-05 (168)	5.1765E-05 (168)	4.2531E-05 (169)	3.4515E-05 (169)
33	1.0762E-05 (189)	5.1710E-05 (228)	5.6948E-05 (282)	5.3031E-05 (282)	4.4910E-05 (282)
34	1.0779E-05 (134)	5.9205E-05 (228)	6.6066E-05 (144)	5.8176E-05 (144)	4.9036E-05 (144)
35	9.1676E-06 (134)	5.4291E-05 (228)	6.0637E-05 (172)	4.9932E-05 ( 48)	4.1176E-05 (137)
36	9.5159E-06 (228)	6.2494E-05 (215)	7.3371E-05 (363)	6.3640E-05 (363)	5.2836E-05 (363)

54

PLANT NAME: KISS. UTILITIES      POLLUTANT: SO2      AIR QUALITY UNITS: GM/M\*\*3  
 YEARLY SECOND MAXIMUM 24-HOUR CONC= 1.2595E-04      DIRECTION= 18      DISTANCE= 0.5 KM      DAY=344  
 YEAR= 77

DIR	SECOND HIGHEST 24-HOUR CONCENTRATION AT EACH RECEPTOR					
	RANGE	0.1 KM	0.3 KM	0.5 KM	0.7 KM	0.9 KM
1	1.1054E-05 (236)	7.5769E-05 (207)	6.3959E-05 (339)	4.9802E-05 (339)	3.8267E-05 (65)	
2	9.9343E-06 (145)	5.2809E-05 (285)	4.3609E-05 (230)	3.4910E-05 (339)	2.9819E-05 (28)	
3	1.0053E-05 (248)	4.9650E-05 (285)	6.2548E-05 (234)	5.8855E-05 (251)	4.7589E-05 (251)	
4	1.0073E-05 (252)	6.3370E-05 (145)	5.2598E-05 (148)	3.7887E-05 (148)	3.0592E-05 (157)	
5	7.4923E-06 (177)	7.4527E-05 (177)	7.4175E-05 (172)	6.0772E-05 (172)	5.0891E-05 (172)	
6	7.8030E-06 (114)	6.0200E-05 (77)	6.4513E-05 (78)	5.6816E-05 (78)	4.8760E-05 (157)	
7	9.1548E-06 (114)	5.4247E-05 (3)	5.3964E-05 (3)	4.4033E-05 (299)	4.2266E-05 (299)	
8	7.3511E-06 (176)	4.8765E-05 (176)	4.0520E-05 (129)	3.2880E-05 (20)	3.0604E-05 (284)	
9	8.3468E-06 (174)	7.2032E-05 (81)	7.6940E-05 (81)	6.6888E-05 (36)	5.4511E-05 (36)	
10	5.3014E-06 (174)	4.6928E-05 (7)	6.0303E-05 (7)	5.2646E-05 (7)	4.2749E-05 (7)	
11	5.9579E-06 (114)	7.2358E-05 (51)	6.8248E-05 (51)	5.2403E-05 (127)	4.0196E-05 (51)	
12	8.5788E-06 (161)	6.3729E-05 (161)	5.3156E-05 (164)	4.2521E-05 (59)	3.6621E-05 (59)	
13	8.9486E-06 (178)	6.8777E-05 (330)	6.6750E-05 (330)	5.0629E-05 (330)	3.9082E-05 (21)	
14	7.1696E-06 (172)	6.6033E-05 (360)	6.0788E-05 (254)	5.0695E-05 (254)	4.0245E-05 (254)	
15	8.7687E-06 (163)	5.4212E-05 (117)	5.6585E-05 (1)	5.0781E-05 (59)	4.0504E-05 (59)	
16	1.2818E-05 (163)	6.7232E-05 (96)	7.2463E-05 (341)	6.8868E-05 (305)	5.7491E-05 (315)	
17	1.3731E-05 (203)	7.2391E-05 (341)	7.1879E-05 (315)	6.1307E-05 (305)	5.1977E-05 (305)	
18	7.2994E-06 (98)	1.0531E-04 (344)	1.2595E-04 (344)	1.0553E-04 (344)	8.3771E-05 (344)	
19	4.0865E-06 (104)	5.8040E-05 (40)	6.5032E-05 (40)	5.2231E-05 (40)	4.0120E-05 (40)	
20	4.8231E-06 (223)	6.9092E-05 (39)	8.2633E-05 (39)	6.8496E-05 (39)	5.3588E-05 (39)	
21	6.2782E-06 (105)	6.4446E-05 (39)	6.8882E-05 (39)	5.6130E-05 (33)	4.6752E-05 (66)	
22	6.8668E-06 (142)	5.6580E-05 (304)	6.1737E-05 (304)	5.0229E-05 (304)	3.9727E-05 (304)	
23	9.0884E-06 (142)	7.6242E-05 (103)	8.1925E-05 (131)	7.4374E-05 (103)	5.9886E-05 (103)	
24	1.1382E-05 (101)	9.0274E-05 (278)	8.7970E-05 (131)	7.6923E-05 (131)	5.9956E-05 (102)	
25	1.1183E-05 (101)	6.2250E-05 (255)	6.0185E-05 (132)	4.7493E-05 (218)	3.8421E-05 (218)	
26	9.7022E-06 (255)	5.7662E-05 (255)	5.7327E-05 (130)	4.9657E-05 (130)	4.0459E-05 (130)	
27	7.8458E-06 (243)	1.0760E-04 (217)	9.3387E-05 (217)	8.2705E-05 (242)	6.8182E-05 (242)	
28	8.2594E-06 (109)	5.6668E-05 (222)	6.3928E-05 (222)	5.5094E-05 (222)	4.5535E-05 (222)	
29	9.4369E-06 (140)	6.1454E-05 (86)	5.7764E-05 (123)	4.7366E-05 (123)	3.7883E-05 (123)	
30	1.4359E-05 (136)	9.7978E-05 (258)	8.1840E-05 (86)	6.7745E-05 (86)	5.6369E-05 (86)	
31	1.3583E-05 (112)	5.2512E-05 (229)	5.8176E-05 (192)	4.9666E-05 (192)	4.2094E-05 (246)	
32	7.3255E-06 (112)	5.2602E-05 (229)	5.4485E-05 (249)	4.7747E-05 (274)	4.0058E-05 (274)	
33	5.6644E-06 (202)	5.2560E-05 (210)	5.4055E-05 (63)	4.7211E-05 (63)	3.9110E-05 (63)	
34	5.5291E-06 (207)	5.8548E-05 (206)	5.4472E-05 (92)	4.8572E-05 (153)	4.5890E-05 (153)	
35	8.7585E-06 (189)	5.9817E-05 (206)	5.4739E-05 (64)	5.1474E-05 (235)	4.6341E-05 (235)	
36	1.4476E-05 (207)	1.0507E-04 (207)	1.1176E-04 (335)	9.7557E-05 (335)	8.4235E-05 (233)	

55

PLANT NAME: KISS. UTILITIES      POLLUTANT: SO2      AIR QUALITY UNITS: GM/M\*\*3  
 YEARLY SECOND MAXIMUM 24-HOUR CONC= 1.4110E-04      DIRECTION= 18      DISTANCE= 0.5 KM      DAY=325  
 YEAR= 78

RANGE	SECOND HIGHEST 24-HOUR CONCENTRATION AT EACH RECEPTOR					
	0.1 KM	0.3 KM	0.5 KM	0.7 KM	0.9 KM	
DIR						
1	1.2993E-05 (187)	5.8147E-05 (184)	4.9428E-05 (247)	4.1446E-05 ( 75)	3.5919E-05 ( 75)	
2	1.0949E-05 (119)	7.5965E-05 (355)	7.1683E-05 (160)	6.2573E-05 (160)	5.2102E-05 (160)	
3	8.4984E-06 (184)	5.8939E-05 (119)	5.0481E-05 (355)	4.2616E-05 (355)	3.5428E-05 ( 74)	
4	8.2345E-06 (184)	6.6618E-05 (334)	7.3615E-05 (334)	5.8467E-05 (135)	4.5030E-05 (135)	
5	8.9812E-06 (119)	6.0005E-05 (355)	6.5277E-05 (355)	5.2536E-05 (355)	4.0761E-05 (355)	
6	9.6007E-06 (116)	4.7277E-05 ( 20)	5.5775E-05 ( 20)	4.6498E-05 (287)	4.1229E-05 ( 69)	
7	5.8379E-06 (250)	4.4962E-05 (111)	5.2546E-05 (353)	4.4998E-05 ( 50)	3.9784E-05 ( 13)	
8	5.5594E-06 (110)	4.9941E-05 (111)	3.6867E-05 ( 14)	2.9225E-05 ( 14)	2.4313E-05 (214)	
9	5.6995E-06 (134)	8.0940E-05 ( 26)	8.7982E-05 ( 20)	7.6173E-05 ( 20)	6.9784E-05 ( 51)	
10	5.1915E-06 (183)	4.7406E-05 ( 9)	5.3282E-05 ( 14)	4.4347E-05 ( 14)	3.5211E-05 ( 14)	
11	3.8496E-06 (183)	5.2013E-05 ( 14)	6.0028E-05 ( 14)	5.3533E-05 ( 15)	4.4251E-05 ( 15)	
12	5.5476E-06 (279)	5.5438E-05 ( 15)	7.3890E-05 ( 50)	6.7356E-05 ( 50)	5.6132E-05 ( 50)	
13	1.1504E-05 (249)	6.7990E-05 (279)	6.2434E-05 ( 10)	6.0701E-05 (313)	5.5523E-05 (313)	
14	1.0182E-05 (249)	7.1705E-05 (279)	6.5058E-05 ( 29)	5.3592E-05 ( 29)	4.3783E-05 (313)	
15	7.6131E-06 (231)	6.4425E-05 (307)	8.0681E-05 ( 27)	6.2075E-05 ( 27)	4.7049E-05 ( 27)	
16	5.1758E-06 ( 81)	4.9366E-05 ( 81)	5.4143E-05 (346)	4.5988E-05 (346)	3.8196E-05 (346)	
17	3.4203E-06 (141)	6.9603E-05 (344)	8.6420E-05 ( 41)	7.4660E-05 (291)	6.3063E-05 (292)	
18	4.3752E-06 (141)	1.1376E-04 (325)	1.4110E-04 (325)	1.2128E-04 (325)	9.8128E-05 (325)	
19	3.9972E-06 ( 81)	7.8723E-05 ( 35)	9.3993E-05 ( 36)	8.1120E-05 ( 36)	6.5894E-05 ( 36)	
20	6.4747E-06 (145)	7.2125E-05 ( 36)	9.2467E-05 ( 35)	7.1976E-05 ( 36)	5.6110E-05 ( 36)	
21	8.2303E-06 (145)	5.8121E-05 ( 23)	6.2467E-05 (362)	5.2045E-05 (362)	4.9124E-05 (283)	
22	9.2035E-06 (186)	7.2541E-05 (235)	6.4087E-05 (363)	6.0492E-05 (271)	5.0095E-05 (277)	
23	8.9648E-06 (106)	7.8206E-05 (237)	7.1599E-05 (267)	6.3036E-05 ( 32)	5.5893E-05 ( 32)	
24	1.0517E-05 ( 89)	6.7950E-05 (114)	6.3230E-05 (234)	5.3181E-05 (234)	4.2502E-05 (234)	
25	9.2131E-06 (143)	7.6352E-05 (363)	8.1398E-05 (147)	6.5083E-05 (147)	5.2589E-05 (147)	
26	1.1877E-05 (195)	9.8870E-05 (143)	8.5785E-05 (167)	6.6809E-05 (149)	5.2763E-05 (166)	
27	1.1590E-05 (202)	9.2326E-05 (168)	1.0705E-04 (168)	8.7521E-05 (169)	6.8298E-05 (168)	
28	1.0322E-05 (146)	8.6194E-05 ( 24)	8.8332E-05 ( 24)	6.9104E-05 ( 24)	5.4108E-05 (202)	
29	8.7888E-06 (176)	7.2042E-05 (113)	6.0886E-05 (170)	5.3410E-05 (170)	4.3679E-05 (170)	
30	9.8319E-06 (216)	6.6388E-05 ( 78)	6.2801E-05 ( 68)	5.2923E-05 (203)	4.0352E-05 (123)	
31	9.6997E-06 (151)	7.1070E-05 (123)	7.8301E-05 ( 84)	6.6451E-05 ( 84)	5.3222E-05 ( 84)	
32	8.1935E-06 (108)	6.4048E-05 (222)	6.2519E-05 (173)	5.3950E-05 ( 8)	4.5964E-05 (159)	
33	1.0823E-05 (158)	7.7349E-05 (124)	9.5728E-05 (124)	8.3036E-05 (124)	6.7571E-05 (124)	
34	9.9005E-06 (191)	7.0326E-05 (128)	7.3235E-05 (210)	6.6957E-05 (210)	6.1150E-05 (198)	
35	1.1788E-05 (120)	8.3384E-05 (102)	6.5942E-05 (160)	4.7493E-05 ( 59)	4.0953E-05 ( 59)	
36	1.2108E-05 (102)	7.5986E-05 (338)	7.5231E-05 (338)	6.0688E-05 (338)	5.0097E-05 (339)	

56

PLANT NAME: KISS. UTILITIES      POLLUTANT: SO2      AIR QUALITY UNITS: GM/M\*\*3  
 YEARLY SECOND MAXIMUM 3-HOUR CONC= 3.4050E-04      DIRECTION= 18      DISTANCE= 0.3 KM      DAY=298      TIME PERIOD= 4  
 YEAR= 74

DIR	SECOND HIGHEST		3-HOUR CONCENTRATION AT EACH RECEPTOR							
	RANGE	0.1 KM	0.3 KM	0.5 KM	0.7 KM	0.9 KM				
1	5.1734E-05	(196, 4)	2.9919E-04	(135, 4)	2.5985E-04	(334, 8)	2.2872E-04	(334, 8)	1.8501E-04	(334, 8)
2	4.4742E-05	( 80, 4)	2.2041E-04	( 38, 4)	2.0200E-04	( 78, 4)	1.7006E-04	( 38, 4)	1.3549E-04	( 82, 5)
3	3.1773E-05	(125, 5)	2.1044E-04	( 84, 4)	2.2646E-04	(126, 3)	2.1724E-04	(126, 3)	1.8543E-04	(126, 3)
4	4.7737E-05	(146, 5)	2.4805E-04	(143, 6)	3.1528E-04	( 39, 2)	2.9924E-04	(143, 6)	2.4398E-04	(143, 6)
5	6.4528E-05	(174, 5)	2.9217E-04	(146, 5)	2.7443E-04	( 39, 3)	2.5358E-04	( 39, 3)	2.1085E-04	( 39, 3)
6	6.3878E-05	(168, 4)	2.5200E-04	(230, 5)	2.4321E-04	( 90, 6)	2.0033E-04	(144, 3)	1.7327E-04	(350, 1)
7	5.8700E-05	(151, 4)	2.2093E-04	( 90, 5)	2.2125E-04	(163, 3)	1.7903E-04	(163, 3)	1.4615E-04	(168, 3)
8	3.9633E-05	( 87, 5)	2.1899E-04	(203, 4)	2.0215E-04	(193, 5)	1.5750E-04	(193, 5)	1.4762E-04	( 44, 6)
9	4.1070E-05	(167, 4)	2.1527E-04	( 7, 4)	2.1518E-04	(192, 3)	1.7592E-04	( 53, 6)	1.4925E-04	(335, 2)
10	5.6486E-05	(163, 5)	2.9686E-04	(113, 6)	2.5972E-04	( 99, 5)	1.9484E-04	( 39, 6)	1.6355E-04	( 39, 6)
11	6.8260E-05	(163, 5)	2.6906E-04	(202, 4)	2.5459E-04	(351, 6)	2.0463E-04	(351, 6)	1.5844E-04	(351, 6)
12	9.7313E-05	(145, 4)	2.5033E-04	(201, 4)	2.1192E-04	(161, 8)	1.9272E-04	(326, 5)	1.5422E-04	(269, 6)
13	6.0249E-05	(163, 4)	2.4118E-04	( 96, 5)	2.2168E-04	(196, 6)	1.6676E-04	( 40, 2)	1.4661E-04	(281, 2)
14	5.9060E-05	(163, 4)	2.5894E-04	(325, 4)	2.7697E-04	(206, 6)	2.2341E-04	(325, 4)	1.8031E-04	( 40, 4)
15	4.5662E-05	(163, 5)	2.3372E-04	( 69, 5)	2.3293E-04	( 69, 5)	1.7677E-04	(290, 2)	1.5581E-04	(280, 4)
16	4.3561E-05	(196, 5)	2.2007E-04	( 72, 4)	1.9904E-04	(352, 4)	1.5845E-04	(338, 5)	1.2178E-04	(352, 4)
17	3.6860E-05	(107, 5)	2.3679E-04	(107, 4)	2.4320E-04	( 57, 4)	2.0373E-04	( 13, 2)	1.8057E-04	( 13, 2)
18	3.5176E-05	(198, 4)	3.4050E-04	(298, 4)	3.2028E-04	(298, 4)	2.5386E-04	(297, 3)	2.0761E-04	(297, 4)
19	3.2185E-05	(100, 5)	2.4144E-04	(108, 3)	2.0350E-04	(313, 6)	1.8330E-04	( 72, 7)	1.5316E-04	(108, 3)
20	3.0702E-05	(128, 5)	2.3210E-04	(257, 4)	2.4662E-04	(296, 5)	2.2989E-04	(320, 1)	2.1880E-04	(320, 1)
21	4.6424E-05	(225, 5)	2.6124E-04	(238, 5)	2.3354E-04	(348, 3)	2.0415E-04	(330, 4)	1.6169E-04	(348, 6)
22	6.8516E-05	(100, 4)	2.9249E-04	(100, 4)	2.5107E-04	(258, 5)	1.8917E-04	(277, 7)	1.6384E-04	(252, 3)
23	6.8344E-05	(225, 5)	2.6518E-04	(278, 5)	2.7963E-04	(195, 4)	2.3820E-04	(320, 6)	2.0670E-04	(320, 6)
24	4.1429E-05	(111, 5)	2.2094E-04	(195, 3)	2.1294E-04	(117, 4)	1.8698E-04	(286, 5)	1.6578E-04	( 73, 8)
25	2.9893E-05	(235, 5)	2.3950E-04	(235, 5)	2.1343E-04	(235, 5)	1.7065E-04	( 73, 6)	1.6520E-04	( 18, 6)
26	4.1830E-05	(140, 5)	2.7421E-04	(301, 5)	2.2584E-04	(224, 5)	1.8612E-04	(333, 6)	1.5740E-04	( 73, 5)
27	6.1452E-05	(140, 4)	2.5795E-04	(111, 4)	2.0056E-04	(243, 6)	1.9928E-04	(184, 6)	1.8409E-04	(361, 7)
28	4.3714E-05	(246, 4)	2.1793E-04	(133, 5)	2.1577E-04	(264, 6)	1.8782E-04	(149, 6)	1.5587E-04	(149, 6)
29	4.6117E-05	(241, 5)	2.7069E-04	(243, 5)	2.1982E-04	( 52, 6)	2.0598E-04	(142, 7)	1.7945E-04	(142, 7)
30	6.5872E-05	(241, 5)	2.5249E-04	(241, 5)	2.3214E-04	(361, 5)	2.1012E-04	(240, 6)	1.7573E-04	(240, 6)
31	6.2600E-05	(220, 4)	2.3929E-04	( 52, 4)	2.4165E-04	( 70, 6)	2.1398E-04	(137, 4)	1.8140E-04	(137, 4)
32	8.4972E-05	(243, 4)	2.4828E-04	(159, 4)	2.1077E-04	(131, 3)	1.7723E-04	( 24, 5)	1.5972E-04	( 75, 1)
33	6.8807E-05	(243, 4)	2.5524E-04	( 94, 4)	2.1348E-04	( 67, 5)	1.5440E-04	( 94, 4)	1.4010E-04	(349, 4)
34	3.6102E-05	( 94, 5)	2.9445E-04	( 94, 5)	2.8544E-04	(132, 1)	2.1375E-04	(186, 4)	1.6379E-04	( 53, 1)
35	4.6253E-05	( 94, 5)	2.3730E-04	(152, 5)	2.0699E-04	(353, 5)	1.8786E-04	(342, 2)	1.6410E-04	(176, 8)
36	5.3121E-05	(152, 5)	2.5306E-04	( 9, 5)	2.8641E-04	(176, 1)	2.4351E-04	(176, 1)	1.9379E-04	(176, 1)

57

PLANT NAME: KISS. UTILITIES      POLLUTANT: SO2      AIR QUALITY UNITS: GM/M\*\*3  
 YEARLY SECOND MAXIMUM    3-HOUR CONC= 3.2295E-04    DIRECTION= 25    DISTANCE= 0.3 KM    DAY=144    TIME PERIOD= 5  
 YEAR= 75

DIR	SECOND HIGHEST		3-HOUR CONCENTRATION AT EACH RECEPTOR							
	RANGE	0.1 KM	0.3 KM	0.5 KM	0.7 KM	0.9 KM				
1	7.3279E-05	(215, 5)	2.8351E-04	(119, 5)	2.4981E-04	(119, 6)	1.9505E-04	(119, 6)	1.5003E-04	(119, 6)
2	6.8592E-05	(119, 5)	2.3649E-04	(207, 5)	2.2354E-04	( 20, 2)	1.7905E-04	( 20, 2)	1.4276E-04	(119, 4)
3	4.6346E-05	(166, 5)	2.5017E-04	( 66, 5)	2.6432E-04	(186, 3)	2.3475E-04	( 89, 4)	1.8613E-04	( 89, 4)
4	4.5547E-05	(203, 4)	2.6689E-04	(188, 4)	2.0325E-04	( 83, 6)	1.5771E-04	( 93, 2)	1.4227E-04	(311, 3)
5	5.0154E-05	(186, 5)	2.6752E-04	( 89, 5)	2.3389E-04	( 93, 3)	1.7631E-04	(351, 5)	1.5736E-04	(256, 6)
6	5.9748E-05	(110, 4)	2.3529E-04	(110, 4)	1.9654E-04	( 37, 6)	1.5817E-04	( 43, 6)	1.2308E-04	(138, 3)
7	7.3350E-05	(110, 4)	2.9616E-04	( 73, 5)	2.7373E-04	(150, 4)	2.2376E-04	( 73, 5)	1.7253E-04	( 73, 5)
8	1.0956E-04	(225, 5)	2.9532E-04	(133, 4)	2.7298E-04	( 81, 6)	2.2370E-04	( 81, 6)	1.7415E-04	( 81, 6)
9	6.3243E-05	(157, 4)	2.5659E-04	(267, 4)	2.1039E-04	( 1, 5)	2.0109E-04	(325, 5)	1.5789E-04	(325, 5)
10	5.0991E-05	(129, 4)	2.5753E-04	(138, 5)	2.4583E-04	(124, 6)	1.7635E-04	(186, 6)	1.2871E-04	(123, 7)
11	6.1075E-05	(164, 5)	2.6005E-04	( 93, 6)	2.2798E-04	(317, 7)	1.8825E-04	(298, 2)	1.6485E-04	( 6, 6)
12	6.8649E-05	(180, 5)	2.6226E-04	(317, 5)	2.8427E-04	(356, 5)	2.4720E-04	(356, 5)	1.9874E-04	(356, 5)
13	5.7386E-05	(128, 4)	3.1935E-04	(317, 4)	2.7755E-04	(105, 6)	2.2954E-04	(317, 4)	1.7479E-04	(317, 4)
14	4.6224E-05	(155, 5)	2.8170E-04	(355, 3)	2.4246E-04	(231, 5)	1.6941E-04	(110, 6)	1.5774E-04	(110, 6)
15	5.2458E-05	(155, 5)	2.4552E-04	(231, 5)	2.2074E-04	(268, 5)	1.9279E-04	(268, 5)	1.5608E-04	(268, 5)
16	4.6098E-05	( 96, 5)	2.6226E-04	(102, 4)	2.4942E-04	( 94, 3)	2.1535E-04	( 94, 3)	1.7075E-04	(353, 1)
17	5.4020E-05	( 85, 5)	1.9845E-04	( 95, 4)	2.1904E-04	(353, 2)	1.8497E-04	(353, 2)	1.5983E-04	(352, 8)
18	5.9246E-05	(106, 5)	2.3446E-04	(131, 4)	2.3083E-04	(303, 8)	2.4209E-04	( 23, 2)	2.4270E-04	(268, 7)
19	3.3953E-05	(163, 5)	2.7844E-04	(303, 4)	2.5805E-04	( 5, 3)	2.2198E-04	(303, 4)	1.6843E-04	(303, 4)
20	3.4457E-05	(181, 5)	2.2683E-04	( 17, 4)	2.5517E-04	(292, 7)	2.3936E-04	( 5, 5)	2.2437E-04	(257, 6)
21	4.6995E-05	(181, 5)	2.7191E-04	(320, 4)	2.3423E-04	(273, 5)	2.1383E-04	(273, 5)	1.7659E-04	(273, 5)
22	4.1374E-05	(145, 5)	2.4930E-04	(285, 5)	2.2316E-04	(321, 4)	1.9542E-04	(305, 8)	1.6782E-04	( 17, 7)
23	4.9020E-05	(236, 5)	2.5766E-04	(338, 4)	2.3910E-04	(306, 6)	2.1755E-04	( 22, 8)	1.9625E-04	(131, 6)
24	7.6428E-05	(103, 5)	2.9309E-04	(300, 5)	2.7079E-04	(307, 5)	2.1643E-04	(182, 6)	1.7457E-04	(305, 6)
25	6.8930E-05	(103, 5)	3.2295E-04	(144, 5)	2.2921E-04	(239, 6)	1.9414E-04	(181, 6)	1.5925E-04	(359, 1)
26	5.1551E-05	(112, 4)	2.2646E-04	(112, 4)	2.2954E-04	(287, 4)	1.7480E-04	(247, 5)	1.4420E-04	(173, 5)
27	6.0657E-05	(112, 5)	2.8053E-04	(114, 4)	2.2771E-04	(347, 4)	2.1501E-04	(287, 6)	2.0120E-04	(287, 6)
28	5.5050E-05	(143, 5)	2.9326E-04	(197, 5)	2.3466E-04	(126, 6)	1.9714E-04	( 98, 7)	1.8047E-04	(126, 6)
29	3.9440E-05	(249, 4)	2.4715E-04	(205, 6)	2.3962E-04	( 86, 5)	1.9852E-04	( 86, 5)	1.5668E-04	(246, 4)
30	4.3349E-05	(198, 5)	2.7447E-04	(117, 5)	2.7147E-04	(103, 6)	2.1525E-04	( 87, 5)	1.6531E-04	( 87, 5)
31	4.6286E-05	(144, 4)	1.9932E-04	(340, 4)	2.0649E-04	( 19, 4)	1.8318E-04	( 19, 4)	1.6001E-04	( 19, 4)
32	4.3995E-05	(260, 4)	2.0159E-04	( 53, 5)	2.1401E-04	(108, 8)	1.7641E-04	(108, 8)	1.3774E-04	(108, 8)
33	5.3882E-05	(123, 4)	2.4958E-04	(121, 5)	2.5536E-04	(359, 6)	2.1115E-04	(359, 6)	1.6979E-04	(364, 8)
34	5.4048E-05	(210, 5)	2.9866E-04	( 8, 4)	2.9094E-04	(194, 3)	2.2764E-04	( 83, 3)	1.8323E-04	( 83, 3)
35	5.1757E-05	(147, 5)	2.6136E-04	(120, 4)	2.1686E-04	( 11, 3)	2.0377E-04	(194, 1)	1.6297E-04	( 71, 5)
36	7.0137E-05	(119, 5)	3.1209E-04	(218, 5)	3.0611E-04	( 13, 2)	2.3639E-04	(290, 4)	1.8024E-04	(290, 4)

58

PLANT NAME: KISS. UTILITIES

POLLUTANT: SO2

AIR QUALITY UNITS: GM/M\*\*3

YEARLY SECOND MAXIMUM 3-HOUR CONC= 3.2270E-04 DIRECTION= 36 DISTANCE= 0.3 KM DAY=216 TIME PERIOD= 4  
YEAR= 76

DIR	SECOND HIGHEST		3-HOUR CONCENTRATION AT EACH RECEPTOR							
	RANGE	0.1 KM	0.3 KM	0.5 KM	0.7 KM	0.9 KM				
1	5.0311E-05	(152, 6)	2.2286E-04	(187, 3)	2.0950E-04	( 53, 3)	1.7687E-04	( 53, 3)	1.4374E-04	( 17, 1)
2	3.9693E-05	(182, 4)	2.6630E-04	(187, 4)	2.1336E-04	( 68, 5)	1.8064E-04	(363, 8)	1.3839E-04	(363, 8)
3	4.6111E-05	(147, 4)	2.5035E-04	(214, 3)	2.1860E-04	(299, 8)	1.9022E-04	(299, 8)	1.5251E-04	(299, 8)
4	5.8273E-05	( 95, 5)	2.3709E-04	(273, 4)	2.3308E-04	(355, 7)	2.1080E-04	(182, 5)	1.7488E-04	(182, 5)
5	5.5637E-05	(117, 5)	2.6061E-04	(145, 2)	2.7885E-04	(258, 4)	2.2642E-04	(145, 2)	1.7681E-04	(198, 8)
6	4.9706E-05	(116, 5)	2.6522E-04	(315, 5)	2.5989E-04	(139, 4)	2.1647E-04	(145, 3)	1.7428E-04	(139, 4)
7	4.2356E-05	(198, 4)	2.4760E-04	(133, 3)	2.4240E-04	(350, 5)	2.0364E-04	(350, 5)	1.6068E-04	( 73, 6)
8	5.6627E-05	(198, 4)	2.6299E-04	(122, 6)	2.6207E-04	(197, 3)	1.9435E-04	(132, 7)	1.7740E-04	(132, 7)
9	7.6406E-05	(196, 5)	2.5802E-04	(196, 5)	2.7842E-04	(361, 4)	2.1972E-04	(117, 6)	1.8183E-04	( 70, 1)
10	3.9481E-05	(139, 5)	2.5215E-04	(213, 6)	2.4265E-04	(366, 6)	2.1774E-04	(366, 6)	1.7559E-04	( 16, 6)
11	3.5093E-05	(221, 4)	2.7210E-04	(275, 5)	2.3409E-04	(275, 5)	2.0096E-04	(366, 8)	1.7224E-04	( 17, 6)
12	4.2884E-05	(122, 5)	2.3825E-04	(323, 5)	2.4721E-04	(249, 4)	2.0783E-04	( 77, 6)	1.5979E-04	(320, 8)
13	6.4034E-05	(118, 5)	2.4219E-04	(151, 4)	2.4888E-04	(362, 1)	1.9636E-04	( 1, 5)	1.5847E-04	( 1, 5)
14	5.2409E-05	(118, 5)	2.8594E-04	(309, 5)	2.3724E-04	( 18, 2)	1.9510E-04	( 18, 2)	1.5186E-04	( 18, 2)
15	4.8774E-05	( 96, 5)	2.7884E-04	( 67, 5)	2.5035E-04	(124, 6)	2.0383E-04	(124, 6)	1.5976E-04	(124, 6)
16	4.3020E-05	(124, 5)	2.5296E-04	(356, 3)	2.5824E-04	(356, 3)	2.3048E-04	(311, 3)	1.9895E-04	(311, 3)
17	3.2155E-05	(225, 4)	2.0894E-04	(114, 3)	2.4611E-04	( 19, 8)	2.1758E-04	( 19, 8)	1.7632E-04	( 19, 8)
18	3.7467E-05	(203, 4)	3.0539E-04	(313, 4)	3.1544E-04	(335, 6)	2.7513E-04	(340, 5)	2.2754E-04	(335, 6)
19	4.4835E-05	(125, 5)	2.4537E-04	(302, 3)	2.4488E-04	(286, 7)	2.1102E-04	(286, 7)	1.7520E-04	( 5, 8)
20	6.4119E-05	(140, 4)	3.1162E-04	(100, 5)	3.0738E-04	(286, 5)	2.3743E-04	(321, 7)	1.8655E-04	(321, 7)
21	4.2706E-05	(164, 5)	2.3874E-04	( 19, 6)	2.2319E-04	( 51, 5)	2.0126E-04	(255, 7)	1.6282E-04	( 60, 2)
22	6.7704E-05	(166, 4)	2.5489E-04	(166, 4)	2.3800E-04	( 57, 4)	1.9940E-04	( 57, 4)	1.6844E-04	(308, 3)
23	4.9937E-05	(199, 6)	2.6069E-04	(118, 6)	3.1444E-04	(232, 2)	2.8652E-04	(344, 6)	2.3655E-04	(344, 6)
24	4.0294E-05	(101, 4)	2.4861E-04	(165, 6)	2.7580E-04	(257, 1)	2.4266E-04	(165, 6)	1.9012E-04	(165, 6)
25	4.8973E-05	(245, 4)	2.2576E-04	(141, 4)	2.0097E-04	(303, 5)	1.8878E-04	(341, 3)	1.5723E-04	(162, 4)
26	4.5816E-05	(268, 5)	2.6987E-04	(290, 4)	2.3610E-04	(240, 6)	2.0482E-04	(240, 6)	1.6171E-04	( 59, 4)
27	4.5760E-05	(126, 5)	2.4146E-04	( 80, 5)	2.2759E-04	(241, 5)	2.0818E-04	( 68, 3)	2.1047E-04	( 68, 3)
28	4.5503E-05	(204, 5)	2.3157E-04	(298, 5)	2.2134E-04	( 64, 6)	1.8123E-04	(269, 6)	1.4234E-04	(269, 6)
29	4.4903E-05	(245, 5)	2.5609E-04	(279, 4)	2.5184E-04	(279, 4)	1.9728E-04	(345, 4)	1.7564E-04	(290, 8)
30	4.9993E-05	(253, 5)	2.2363E-04	(248, 5)	2.3416E-04	( 64, 4)	2.0936E-04	(126, 6)	1.6650E-04	(143, 3)
31	4.6571E-05	(148, 4)	2.4878E-04	(126, 4)	2.4984E-04	(136, 7)	2.4164E-04	(136, 7)	2.0721E-04	(136, 7)
32	5.5543E-05	(148, 4)	2.6254E-04	(168, 4)	2.5515E-04	(169, 4)	2.2378E-04	(169, 4)	1.8060E-04	(169, 4)
33	7.2896E-05	(134, 5)	2.3186E-04	(153, 4)	2.3354E-04	(360, 5)	2.1338E-04	(320, 2)	1.7725E-04	( 24, 5)
34	6.4536E-05	(192, 4)	2.2521E-04	(228, 4)	2.4691E-04	(149, 4)	1.9866E-04	(149, 4)	1.7702E-04	(331, 7)
35	5.0343E-05	(102, 4)	2.5150E-04	(102, 4)	2.3660E-04	( 48, 6)	2.0171E-04	( 48, 6)	1.6047E-04	( 48, 6)
36	5.8243E-05	(152, 5)	3.2270E-04	(216, 4)	3.0778E-04	( 75, 4)	2.6462E-04	(363, 4)	2.1222E-04	( 75, 4)

59

PLANT NAME: KISS. UTILITIES      POLLUTANT: SO2      AIR QUALITY UNITS: GM/M\*\*3  
 YEARLY SECOND MAXIMUM 3-HOUR CONC= 3.7183E-04      DIRECTION= 24      DISTANCE= 0.3 KM      DAY=278      TIME PERIOD= 5  
 YEAR= 77

RANGE	SECOND HIGHEST 3-HOUR CONCENTRATION AT EACH RECEPTOR				
	0.1 KM	0.3 KM	0.5 KM	0.7 KM	0.9 KM
DIR					
1	5.6116E-05 (145, 4)	2.7902E-04 (188, 6)	2.2841E-04 ( 58, 4)	1.8481E-04 ( 79, 3)	1.5993E-04 ( 79, 3)
2	6.7441E-05 (248, 5)	2.3121E-04 (285, 5)	2.1347E-04 ( 72, 5)	1.8719E-04 ( 43, 8)	1.6300E-04 ( 43, 8)
3	6.9240E-05 (248, 5)	2.9955E-04 (175, 6)	2.4634E-04 (175, 6)	1.9286E-04 (285, 4)	1.5215E-04 ( 25, 1)
4	7.1918E-05 (145, 5)	3.2235E-04 (145, 5)	2.6249E-04 (145, 5)	2.0935E-04 (148, 5)	1.7246E-04 (145, 5)
5	5.6177E-05 (180, 4)	2.4808E-04 (231, 5)	2.1150E-04 (231, 5)	1.8999E-04 (115, 1)	1.6757E-04 (282, 5)
6	4.6180E-05 (127, 4)	2.6223E-04 (251, 6)	2.4328E-04 ( 78, 5)	1.9168E-04 (188, 3)	1.6069E-04 (188, 3)
7	5.5228E-05 (174, 4)	2.8327E-04 (127, 4)	2.9385E-04 ( 3, 5)	2.3790E-04 ( 3, 5)	1.8967E-04 ( 3, 5)
8	4.0051E-05 (174, 5)	2.2685E-04 (176, 5)	2.1862E-04 ( 3, 6)	1.7951E-04 (146, 4)	1.4851E-04 (146, 4)
9	4.6695E-05 (174, 5)	2.8575E-04 (176, 5)	2.7154E-04 ( 81, 6)	2.1675E-04 (128, 6)	1.6936E-04 (306, 2)
10	2.9329E-05 (115, 5)	2.4772E-04 ( 20, 6)	2.3632E-04 ( 36, 6)	1.9148E-04 ( 36, 6)	1.4795E-04 ( 36, 6)
11	4.4251E-05 (178, 5)	3.0659E-04 ( 51, 5)	2.9967E-04 (128, 3)	2.2785E-04 (127, 6)	1.8115E-04 ( 76, 1)
12	6.0346E-05 (100, 5)	2.5321E-04 (178, 5)	2.2593E-04 (115, 3)	2.0025E-04 (271, 6)	1.7304E-04 (271, 6)
13	6.9196E-05 (178, 5)	2.5470E-04 (115, 4)	2.2704E-04 ( 47, 4)	1.9363E-04 ( 96, 6)	1.6123E-04 ( 96, 6)
14	5.0811E-05 (173, 5)	2.3271E-04 (117, 4)	2.7231E-04 (360, 1)	2.3250E-04 (360, 1)	1.8498E-04 (360, 1)
15	4.7142E-05 (172, 4)	2.2433E-04 (163, 4)	2.1798E-04 ( 74, 4)	1.8056E-04 (286, 2)	1.4850E-04 (362, 6)
16	5.9988E-05 (203, 5)	2.2682E-04 (315, 1)	2.4326E-04 (305, 4)	2.0871E-04 (341, 2)	1.6340E-04 (341, 2)
17	5.5319E-05 (203, 4)	2.4912E-04 ( 98, 5)	2.2015E-04 ( 66, 6)	1.9024E-04 ( 66, 6)	1.5641E-04 ( 2, 1)
18	4.2331E-05 ( 97, 4)	2.3907E-04 (345, 4)	2.7232E-04 ( 39, 1)	2.3481E-04 (290, 3)	1.9304E-04 (336, 7)
19	2.8184E-05 (186, 4)	2.0693E-04 ( 41, 4)	2.2542E-04 ( 41, 4)	2.1336E-04 (322, 8)	1.7123E-04 ( 11, 4)
20	3.8585E-05 (223, 5)	2.4713E-04 (154, 4)	2.6183E-04 ( 12, 6)	2.0139E-04 ( 99, 5)	1.5920E-04 ( 99, 5)
21	4.9846E-05 (105, 4)	2.1445E-04 ( 39, 7)	2.3067E-04 ( 39, 7)	1.8185E-04 ( 39, 7)	1.3843E-04 ( 39, 7)
22	4.4682E-05 ( 98, 4)	2.4563E-04 (224, 5)	2.3554E-04 (103, 4)	1.7944E-04 (276, 6)	1.4318E-04 (304, 3)
23	4.6083E-05 (142, 5)	2.9914E-04 (100, 4)	2.6288E-04 (303, 6)	2.2083E-04 (322, 4)	1.8448E-04 (261, 6)
24	5.5613E-05 (255, 5)	3.7183E-04 (278, 5)	2.7845E-04 (293, 6)	2.2915E-04 (278, 5)	1.7342E-04 (278, 5)
25	6.7507E-05 (101, 4)	3.1506E-04 (100, 6)	2.6177E-04 (279, 5)	2.2022E-04 (257, 6)	1.9129E-04 (100, 6)
26	4.7322E-05 (255, 5)	2.4256E-04 (222, 5)	2.6668E-04 (245, 5)	2.2838E-04 (245, 5)	1.8198E-04 (245, 5)
27	5.3275E-05 (243, 4)	3.2375E-04 (217, 4)	3.3379E-04 (239, 6)	2.6870E-04 (239, 6)	2.2371E-04 (130, 3)
28	5.6858E-05 (136, 5)	2.2424E-04 (260, 6)	2.5466E-04 (222, 6)	2.0882E-04 (222, 6)	1.8060E-04 (138, 7)
29	5.8802E-05 (227, 5)	2.3507E-04 (227, 5)	2.4713E-04 (281, 6)	1.9913E-04 (112, 6)	1.6840E-04 (123, 3)
30	6.3419E-05 (216, 5)	3.5728E-04 (136, 4)	2.9879E-04 (122, 6)	2.4052E-04 (122, 6)	2.0103E-04 ( 62, 6)
31	7.2613E-05 (111, 5)	2.7582E-04 (192, 6)	2.5105E-04 ( 43, 7)	2.4796E-04 ( 43, 7)	2.1404E-04 ( 43, 7)
32	4.4067E-05 (209, 5)	2.7989E-04 (313, 5)	2.2726E-04 (237, 5)	2.0352E-04 (334, 3)	1.7271E-04 (334, 3)
33	3.4987E-05 (108, 5)	2.4084E-04 ( 93, 5)	2.1961E-04 (210, 6)	1.9301E-04 (146, 7)	1.5958E-04 (146, 7)
34	3.8754E-05 (207, 4)	2.6263E-04 (206, 6)	2.6439E-04 ( 87, 5)	1.9734E-04 ( 87, 5)	1.5615E-04 ( 87, 5)
35	4.6971E-05 (183, 5)	2.2530E-04 (250, 4)	2.2804E-04 (114, 3)	1.9427E-04 ( 63, 4)	1.6807E-04 (114, 1)
36	6.9404E-05 ( 94, 5)	3.4363E-04 (262, 4)	3.0701E-04 ( 95, 2)	2.6641E-04 (233, 3)	2.4189E-04 (234, 7)

69

PLANT NAME: KISS. UTILITIES                      POLLUTANT: SO2                      AIR QUALITY UNITS: GM/M\*\*3  
 YEARLY SECOND MAXIMUM    3-HOUR CONC=    3.5230E-04    DIRECTION= 26    DISTANCE= 0.3 KM    DAY=169    TIME PERIOD= 5  
 YEAR= 78

RANGE	SECOND HIGHEST 3-HOUR CONCENTRATION AT EACH RECEPTOR				
	0.1 KM	0.3 KM	0.5 KM	0.7 KM	0.9 KM
DIR					
1	6.6106E-05 (212, 5)	2.5501E-04 (212, 5)	2.6051E-04 (335, 1)	2.4540E-04 (335, 1)	2.0619E-04 (335, 1)
2	5.3613E-05 (119, 4)	2.4940E-04 ( 75, 5)	2.8973E-04 (155, 4)	2.2284E-04 ( 54, 7)	1.9977E-04 ( 69, 1)
3	4.7922E-05 (119, 4)	1.9467E-04 ( 73, 6)	1.9939E-04 ( 73, 6)	1.6000E-04 ( 74, 5)	1.2814E-04 ( 74, 5)
4	4.7858E-05 (119, 5)	2.5490E-04 (122, 5)	2.3940E-04 (334, 4)	2.0788E-04 (334, 4)	1.7055E-04 (334, 4)
5	5.6993E-05 (184, 4)	2.7439E-04 (353, 4)	2.3477E-04 (343, 5)	2.1430E-04 (334, 7)	1.8939E-04 (334, 7)
6	4.3956E-05 (134, 5)	2.3752E-04 ( 69, 6)	2.3168E-04 ( 20, 1)	1.8906E-04 ( 20, 1)	1.6813E-04 (214, 3)
7	3.8841E-05 (111, 5)	2.2344E-04 (121, 6)	2.3659E-04 ( 50, 8)	2.3944E-04 (353, 5)	1.8889E-04 (353, 5)
8	4.2809E-05 (250, 5)	2.2764E-04 (111, 6)	2.0973E-04 (339, 5)	1.7921E-04 (339, 5)	1.4927E-04 (335, 6)
9	4.8162E-05 (116, 5)	2.2404E-04 ( 86, 4)	2.2754E-04 ( 13, 8)	2.1266E-04 ( 51, 1)	1.7269E-04 ( 14, 3)
10	3.9568E-05 (116, 5)	2.0531E-04 ( 20, 4)	2.3217E-04 ( 20, 4)	1.8307E-04 ( 9, 3)	1.4040E-04 ( 9, 3)
11	2.8344E-05 (182, 4)	1.7129E-04 (182, 4)	1.7729E-04 ( 50, 2)	1.6762E-04 ( 37, 6)	1.3036E-04 ( 37, 6)
12	3.6173E-05 (160, 5)	2.3585E-04 (116, 8)	2.7654E-04 (116, 8)	2.3382E-04 ( 14, 8)	1.8287E-04 ( 14, 8)
13	5.9944E-05 (117, 5)	3.0898E-04 (249, 4)	2.5681E-04 (117, 5)	1.9014E-04 ( 63, 6)	1.5951E-04 (313, 5)
14	5.8948E-05 (231, 5)	2.8972E-04 (117, 1)	2.4587E-04 ( 76, 2)	1.9775E-04 ( 29, 3)	1.6755E-04 (313, 4)
15	4.6748E-05 (254, 4)	2.2477E-04 ( 81, 4)	2.1120E-04 ( 27, 2)	1.9251E-04 (307, 6)	1.5565E-04 (307, 6)
16	3.6044E-05 (110, 4)	2.4378E-04 (308, 5)	2.4917E-04 (361, 6)	2.3201E-04 (361, 6)	1.9425E-04 (361, 6)
17	1.9103E-05 (110, 3)	2.3006E-04 (322, 5)	2.7029E-04 (280, 3)	2.4687E-04 (280, 3)	2.0417E-04 (280, 3)
18	3.3221E-05 ( 81, 5)	2.9731E-04 (305, 4)	2.8764E-04 (344, 3)	2.8585E-04 (305, 4)	2.2596E-04 ( 27, 3)
19	2.3529E-05 (125, 5)	2.8846E-04 (304, 4)	2.9766E-04 (304, 4)	2.3588E-04 (304, 4)	1.8282E-04 (304, 4)
20	3.7472E-05 (145, 5)	2.4516E-04 ( 35, 5)	2.4551E-04 (344, 5)	1.9602E-04 (344, 5)	1.6185E-04 (275, 2)
21	5.9001E-05 (145, 5)	3.0105E-04 (258, 4)	2.4856E-04 (362, 5)	2.0537E-04 ( 23, 2)	1.7899E-04 (283, 3)
22	6.2553E-05 (252, 5)	2.7577E-04 (252, 5)	2.6737E-04 (269, 6)	2.0921E-04 (269, 6)	1.7126E-04 ( 2, 6)
23	5.6943E-05 (263, 5)	2.9590E-04 (323, 5)	2.6011E-04 (267, 4)	2.1428E-04 (267, 6)	1.8815E-04 (261, 4)
24	6.4803E-05 ( 89, 5)	2.7209E-04 ( 87, 4)	2.5945E-04 (295, 4)	2.1631E-04 (295, 4)	1.7024E-04 (295, 4)
25	5.7597E-05 (106, 4)	2.7463E-04 (310, 4)	2.7647E-04 (243, 6)	2.1771E-04 (147, 3)	1.8659E-04 ( 48, 3)
26	6.8826E-05 (169, 5)	3.5230E-04 (169, 5)	2.6588E-04 (169, 5)	2.4431E-04 (163, 6)	1.8456E-04 (163, 6)
27	7.6014E-05 (202, 5)	3.2078E-04 (171, 6)	3.1315E-04 (171, 6)	2.6341E-04 ( 92, 6)	2.1613E-04 ( 92, 6)
28	7.6093E-05 (146, 5)	2.6946E-04 ( 94, 5)	2.5582E-04 (202, 6)	2.1371E-04 (202, 6)	1.7684E-04 ( 24, 5)
29	6.1563E-05 (190, 5)	2.7249E-04 (239, 6)	2.3643E-04 (203, 6)	1.7775E-04 (165, 5)	1.4429E-04 (165, 5)
30	6.1286E-05 (218, 4)	3.0274E-04 ( 78, 5)	2.6819E-04 (124, 1)	2.4422E-04 ( 83, 6)	1.9290E-04 ( 83, 6)
31	5.6769E-05 (216, 4)	2.8690E-04 (218, 4)	2.3227E-04 (123, 8)	1.9637E-04 ( 96, 6)	1.6961E-04 (174, 6)
32	5.6989E-05 (222, 4)	3.1290E-04 (222, 4)	3.3992E-04 (173, 5)	1.9009E-04 (123, 7)	1.6693E-04 (245, 6)
33	7.3566E-05 (108, 4)	3.0118E-04 (207, 5)	2.6069E-04 (208, 7)	2.3109E-04 (208, 7)	1.8746E-04 (208, 7)
34	6.7138E-05 (101, 4)	3.3713E-04 (199, 4)	2.6211E-04 (199, 3)	2.3169E-04 (210, 4)	1.9746E-04 (198, 4)
35	7.1540E-05 (196, 4)	3.1810E-04 (129, 4)	2.7416E-04 (209, 4)	2.0317E-04 (183, 3)	1.5332E-04 (209, 4)
36	6.2915E-05 (103, 5)	3.4986E-04 ( 25, 7)	3.0920E-04 ( 25, 7)	2.2816E-04 ( 25, 7)	1.8568E-04 (311, 5)

61



COMPOSITE ANNUAL CONCENTRATION TABLE, UG/CU.M

ANNUAL MEAN CONCENTRATION AT EACH RECEPTOR

DIR	RANGE	0.1 KM	0.3 KM	0.5 KM	0.7 KM	0.9 KM
1		1.	7.	7.	6.	4.
2		1.	6.	6.	5.	4.
3		0.	5.	5.	4.	3.
4		0.	5.	5.	4.	4.
5		1.	6.	6.	5.	4.
6		1.	6.	5.	5.	4.
7		0.	5.	5.	4.	3.
8		0.	4.	4.	3.	3.
9		0.	6.	6.	5.	4.
10		0.	5.	5.	4.	3.
11		0.	5.	5.	4.	4.
12		0.	7.	6.	5.	4.
13		0.	6.	6.	5.	4.
14		0.	6.	6.	5.	4.
15		0.	5.	5.	4.	4.
16		0.	5.	6.	5.	5.
17		0.	6.	7.	6.	5.
18		0.	10.	12.	10.	9.
19		0.	8.	8.	7.	6.
20		0.	8.	8.	7.	6.
21		0.	7.	7.	6.	5.
22		1.	8.	8.	7.	6.
23		1.	9.	9.	8.	7.
24		1.	8.	8.	7.	6.
25		1.	8.	8.	6.	5.
26		1.	11.	10.	8.	7.
27		1.	12.	12.	9.	8.
28		1.	9.	9.	7.	6.
29		1.	7.	6.	5.	4.
30		1.	8.	8.	7.	6.
31		1.	7.	7.	6.	5.
32		1.	7.	7.	6.	5.
33		1.	7.	8.	7.	6.
34		1.	8.	8.	7.	6.
35		1.	8.	8.	6.	5.
36		1.	11.	11.	9.	8.

27

COMPOSITE HIGHEST, SECOND-HIGHEST 24-HOUR CONCENTRATION TABLE, UG/CU.M

SECOND HIGHEST 24-HOUR CONCENTRATION AT EACH RECEPTOR

RANGE	0.1 KM	0.3 KM	0.5 KM	0.7 KM	0.9 KM
DIR					
1	14.	76.	69.	51.	40.
2	14.	76.	72.	63.	52.
3	10.	59.	63.	59.	48.
4	10.	67.	74.	58.	49.
5	10.	75.	74.	61.	51.
6	10.	64.	65.	57.	49.
7	10.	69.	60.	48.	42.
8	14.	61.	65.	49.	40.
9	14.	96.	88.	76.	70.
10	8.	60.	62.	57.	47.
11	11.	72.	75.	60.	47.
12	18.	74.	82.	68.	58.
13	14.	75.	81.	68.	56.
14	10.	74.	70.	57.	45.
15	9.	64.	81.	62.	47.
16	13.	67.	83.	73.	59.
17	14.	72.	86.	75.	63.
18	9.	124.	141.	121.	98.
19	8.	98.	103.	86.	70.
20	12.	85.	97.	78.	62.
21	10.	74.	81.	63.	49.
22	12.	73.	76.	61.	50.
23	11.	78.	82.	74.	60.
24	11.	90.	88.	77.	60.
25	11.	76.	81.	65.	53.
26	12.	99.	86.	67.	53.
27	12.	108.	107.	88.	68.
28	10.	86.	88.	69.	54.
29	9.	72.	61.	53.	46.
30	14.	98.	82.	68.	56.
31	14.	71.	78.	66.	53.
32	12.	67.	63.	55.	47.
33	11.	79.	96.	83.	68.
34	11.	72.	73.	67.	61.
35	12.	83.	66.	53.	46.
36	14.	105.	112.	98.	84.

63

COMPOSITE HIGHEST, SECOND-HIGHEST 3-HOUR CONCENTRATION TABLE, UG/CU.M

RANGE	SECOND HIGHEST		3-HOUR CONCENTRATION AT EACH RECEPTOR		
	0.1 KM	0.3 KM	0.5 KM	0.7 KM	0.9 KM
DIR					
1	73.	299.	261.	245.	206.
2	69.	266.	290.	223.	200.
3	69.	300.	264.	235.	186.
4	72.	322.	315.	299.	244.
5	65.	292.	279.	254.	211.
6	64.	265.	260.	216.	174.
7	73.	296.	294.	239.	190.
8	110.	295.	273.	224.	177.
9	76.	286.	278.	220.	182.
10	56.	297.	260.	218.	176.
11	68.	307.	300.	228.	181.
12	97.	262.	284.	247.	199.
13	69.	319.	278.	230.	175.
14	59.	290.	277.	232.	185.
15	52.	279.	250.	204.	160.
16	60.	262.	258.	232.	199.
17	55.	249.	270.	247.	204.
18	59.	341.	320.	286.	243.
19	45.	288.	298.	236.	183.
20	64.	312.	307.	239.	224.
21	59.	301.	249.	214.	179.
22	69.	292.	267.	209.	171.
23	68.	299.	314.	287.	237.
24	76.	372.	278.	243.	190.
25	69.	323.	276.	220.	191.
26	69.	352.	267.	244.	185.
27	76.	324.	334.	269.	224.
28	76.	293.	256.	214.	181.
29	62.	272.	252.	206.	179.
30	83.	357.	299.	244.	201.
31	73.	287.	251.	248.	214.
32	85.	313.	255.	224.	181.
33	74.	301.	261.	231.	187.
34	67.	337.	291.	232.	197.
35	72.	318.	274.	204.	168.
36	70.	350.	309.	266.	242.

207

\*\*\* KISSIMMEE DAY 325

SO2

\*\*\*

SOURCE # 1---KISS. UTILITIES PT01-04 UNIT #7  
 SOURCE # 2---KISS. UTILITIES PT01-05,PT01-06 UNITS #8  
 SOURCE # 3---KISS. UTILITIES PT01-07,PT01-08 UNITS #1  
 SOURCE # 4---KISS. UTILITIES PT01-11-PT01-15 UNITS #1  
 SOURCE # 5---KISS. UTILITIES UNITS #19-#20  
 SOURCE # 6---CITY OF ST. CLOUD PT02-02,PT02-04  
 SOURCE # 7---CITY OF ST. CLOUD PT02-05,PT02-06  
 SOURCE # 8---CITY OF ST. CLOUD PT02-07,PT02-08  
 SOURCE # 11---STOKELY VAN CAMP PT07-01  
 SOURCE # 12---CW BAILEY PT11-01  
 SOURCE # 13---FLA POWER COPR PT14-01-PT14-06  
 SOURCE # 15---DIXIE ASPHALT PT41-01  
 SOURCE # 16---ST. CLOUD HOSPITAL PT10-02,PT10-03  
 SOURCE # 17---KISS. UTILITIES COMBUSTION TURBINE

\*\*\* SOURCE DATA \*\*\*

SOURCE NUMBER	T Y	W A	NUMBER PART. CATS.	EMISSION RATE	X (M)	Y (M)	BASE ELEV. (M)	HEIGHT (M)	TEMP.	EXIT VEL.	BLDG. DIAM. (M)	BLDG. HEIGHT (M)	BLDG. LENGTH (M)	BLDG. WIDTH (M)
				TYPE=0,1 (G/S)					TYPE=0 (DEG.K)	TYPE=0 (M/S)				
	P K	E E		TYPE=2 (G/S) *PER M**2					VERT.DIM. TYPE=1 (M)	HORZ.DIM. TYPE=1,2 (M)	TYPE=0 (M)	TYPE=0 (M)	TYPE=0 (M)	TYPE=0 (M)
1	0	0	0	0.870	460100.	3129300.	0.0	13.11	466.5	16.30	0.61	0.00	0.00	0.00
2	0	0	0	3.360	460100.	3129300.	0.0	16.15	477.6	17.60	0.85	0.00	0.00	0.00
3	0	0	0	2.280	460100.	3129300.	0.0	7.01	466.5	9.60	0.76	0.00	0.00	0.00
4	0	0	0	5.370	460100.	3129300.	0.0	13.41	505.4	8.70	0.80	0.00	0.00	0.00
5	0	0	0	2.890	460100.	3129300.	0.0	8.69	505.4	17.20	0.90	0.00	0.00	0.00
6	0	0	0	4.660	471800.	3124900.	0.0	7.92	727.6	34.70	0.76	0.00	0.00	0.00
7	0	0	0	3.780	471800.	3124900.	0.0	8.53	699.8	1.17	0.64	0.00	0.00	0.00
8	0	0	0	6.550	471800.	3124900.	0.0	11.89	727.6	29.51	1.07	0.00	0.00	0.00
11	0	0	0	2.520	451100.	3125800.	0.0	7.32	513.7	11.50	0.46	0.00	0.00	0.00
12	0	0	0	0.130	470800.	3133800.	0.0	9.45	1005.7	11.60	0.61	0.00	0.00	0.00
13	0	0	0	34.020	446300.	3126000.	0.0	7.92	703.7	18.06	4.24	0.00	0.00	0.00
15	0	0	0	0.260	463200.	3143000.	0.0	7.92	394.3	26.95	1.10	0.00	0.00	0.00
16	0	0	0	0.060	470300.	3124100.	0.0	5.49	505.4	15.00	0.46	0.00	0.00	0.00
17	0	0	0	48.900	460100.	3129300.	0.0	9.14	422.0	38.03	2.44	0.00	0.00	0.00

65

DAILY: 325  
 24-HR/PD 1  
 SGROUP# 1  
 YEAR 1978  
 \*\*\* KISSIMMEE DAY 325

SO<sub>2</sub>

\*\*\*

\* DAILY 24-HOUR AVERAGE CONCENTRATION (MICROGRAMS/CUBIC METER) \*  
 \* ENDING WITH HOUR 24 FOR DAY 325 \*

\* FROM ALL SOURCES \*  
 \* FOR THE RECEPTOR GRID \*

\* MAXIMUM VALUE EQUALS 135.0 AND OCCURRED AT ( 460100.0, 3128800.0) \*

	Y-AXIS (METERS)					X-AXIS (METERS)				
(METERS) /	459600.0	459700.0	459800.0	459900.0	460000.0	460100.0	460200.0	460300.0	460400.0	
3128900.0 /	9.1	9.3	15.4	26.3	13.3	131.8	30.8	11.3	13.1	
3128800.0 /	7.1	8.4	37.6	6.4	27.2	135.0	60.2	13.4	10.9	
3128700.0 /	5.3	26.3	24.5	2.3	37.4	128.2	80.6	13.2	10.5	
3128600.0 /	15.3	31.4	8.7	3.9	42.9	117.8	90.4	17.1	13.0	
3128500.0 /	25.9	19.7	2.6	7.1	45.1	106.8	92.8	24.6	12.3	
3128400.0 /	24.1	8.8	1.3	10.5	45.4	96.3	90.7	32.1	10.5	
3128300.0 /	15.5	3.3	1.6	13.4	44.6	86.9	86.2	37.7	10.7	
3128200.0 /	8.1	1.3	2.6	15.8	43.3	78.6	80.9	41.2	12.7	
3128100.0 /	3.7	0.8	3.9	17.5	41.9	71.6	75.4	43.2	15.7	
3128000.0 /	1.6	0.9	5.2	18.7	40.5	65.6	70.1	44.0	18.6	

76

\*\*\* KISSIMMEE INTERACTION WITH ST. CLOUD DAY 113/78

\*\*\*

SOURCE # 1---KISS. UTILITIES PT01-04 UNIT #7  
 SOURCE # 2---KISS. UTILITIES PT01-05,PT01-06 UNITS #8  
 SOURCE # 3---KISS. UTILITIES PT01-07,PT01-08 UNITS #1  
 SOURCE # 4---KISS. UTILITIES PT01-11-PT01-15 UNITS #1  
 SOURCE # 5---KISS. UTILITIES UNITS #19-#20  
 SOURCE # 6---KISS. UTILITIES COMBUSTION TURBINE  
 SOURCE # 7---CITY OF ST. CLOUD PT02-02,PT02-04  
 SOURCE # 8---CITY OF ST. CLOUD PT02-05,PT02-06  
 SOURCE # 9---CITY OF ST. CLOUD PT02-07,PT02-08

\*\*\* SOURCE DATA \*\*\*

SOURCE NUMBER	T Y	W A	NUMBER PART.	EMISSION RATE TYPE=0,1 (G/S)		X (M)	Y (M)	BASE ELEV. (M)	HEIGHT (M)	TEMP. TYPE=0 (DEG.K)	EXIT VEL. TYPE=0 (M/S)	BLDG. HEIGHT (M)	BLDG. LENGTH (M)	BLDG. WIDTH (M)	
				TYPE=2 (G/S)	VERT.DIM. TYPE=1 (M)					HORZ.DIM. TYPE=1,2 (M)	DIAM. TYPE=0 (M)				TYPE=0 TYPE=0 (M)
1	0	0	0	0.870		0.	0.	0.0	13.11	466.5	16.30	0.61	0.00	0.00	0.00
2	0	0	0	3.360		0.	0.	0.0	16.15	477.6	17.60	0.85	0.00	0.00	0.00
3	0	0	0	2.280		0.	0.	0.0	7.01	466.5	9.60	0.76	0.00	0.00	0.00
4	0	0	0	5.370		0.	0.	0.0	13.41	505.4	8.70	0.80	0.00	0.00	0.00
5	0	0	0	2.890		0.	0.	0.0	8.69	505.4	17.20	0.90	0.00	0.00	0.00
6	0	0	0	48.900		0.	0.	0.0	9.14	422.0	38.03	2.44	0.00	0.00	0.00
7	0	0	0	4.660	-4400.	11700.	0.0	0.0	7.92	727.6	34.70	0.76	0.00	0.00	0.00
8	0	0	0	3.780	-4400.	11700.	0.0	0.0	8.53	699.8	1.17	0.64	0.00	0.00	0.00
9	0	0	0	6.550	-4400.	11700.	0.0	0.0	11.89	727.6	29.51	1.07	0.00	0.00	0.00

UN

DAILY: 113  
24-HR/PD 1  
SGROUP# 3  
YEAR 1978

\*\*\* KISSIMMEE INTERACTION WITH ST. CLOUD DAY 113/78

\*\*\*

\* DAILY 24-HOUR AVERAGE CONCENTRATION (MICROGRAMS/CUBIC METER) \*  
\* ENDING WITH HOUR 24 FOR DAY 113 \*

\* FROM SOURCES: 1, -9,  
\* FOR THE RECEPTOR GRID \*

\* MAXIMUM VALUE EQUALS 75.8 AND OCCURRED AT ( 500.0, 290.0) \*

DIRECTION / RANGE (METERS)  
(DEGREES) / 100.0 300.0 500.0 700.0 900.0

---

295.0 /	4.1	42.6	43.4	35.0	27.8
290.0 /	4.4	68.0	75.8	63.9	51.8
285.0 /	3.0	64.1	70.0	56.6	44.0

68

\*\*\* KISSIMMEE INTERACTION WITH FPC DAY 158/75

\*\*\*

SOURCE # 1---KISS. UTILITIES PT01-04 UNIT #7  
 SOURCE # 2---KISS. UTILITIES PT01-05,PT01-06 UNITS #8  
 SOURCE # 3---KISS. UTILITIES PT01-07,PT01-08 UNITS #1  
 SOURCE # 4---KISS. UTILITIES PT01-11-PT01-15 UNITS #1  
 SOURCE # 5---KISS. UTILITIES UNITS #19-#20  
 SOURCE # 6---KISS. UTILITIES COMBUSTION TURBINE  
 SOURCE # 7---FLA POWER COPR PT14-01-PT14-06

\*\*\* SOURCE DATA \*\*\*

SOURCE NUMBER	T P	W K	NUMBER PART.	EMISSION RATE		X (M)	Y (M)	BASE ELEV. (M)	HEIGHT (M)	TEMP.	EXIT VEL.	BLDG. HEIGHT (M)	BLDG. LENGTH (M)	BLDG. WIDTH (M)	
				TYPE=0,1 (G/S)	TYPE=2 (G/S)					TYPE=0 (DEG.K)	TYPE=0 (M/S)				
	E	E	CATS.	*PER	M**2				VERT.DIM. TYPE=1 (M)	HORZ.DIM. TYPE=1,2 (M)	DIAM. TYPE=0 (M)	TYPE=0 (M)	TYPE=0 (M)	TYPE=0 (M)	
1	0	0	0	0.870		0.	0.	0.0	13.11	466.5	16.30	0.61	0.00	0.00	0.00
2	0	0	0	3.360		0.	0.	0.0	16.15	477.6	17.60	0.85	0.00	0.00	0.00
3	0	0	0	2.280		0.	0.	0.0	7.01	466.5	9.60	0.76	0.00	0.00	0.00
4	0	0	0	5.370		0.	0.	0.0	13.41	505.4	8.70	0.80	0.00	0.00	0.00
5	0	0	0	2.890		0.	0.	0.0	8.69	505.4	17.20	0.90	0.00	0.00	0.00
6	0	0	0	48.900		0.	0.	0.0	9.14	422.0	38.03	2.44	0.00	0.00	0.00
7	0	0	0	34.020	-13800.		-3300.	0.0	7.92	703.7	18.06	4.24	0.00	0.00	0.00

69



DAILY: 158  
24-HR/PD 1  
SGROUP# 3  
YEAR 1975

\*\*\* KISSIMMEE INTERACTION WITH FPC DAY 158/75

\*\*\*

\* DAILY 24-HOUR AVERAGE CONCENTRATION (MICROGRAMS/CUBIC METER) \*

\* ENDING WITH HOUR 24 FOR DAY 158 \*

\* FROM SOURCES: 1, -7,

\* FOR THE RECEPTOR GRID \*

\* MAXIMUM VALUE EQUALS 69.3 AND OCCURRED AT ( 500.0, 70.0) \*

DIRECTION / (DEGREES) /	100.0	300.0	500.0	700.0	RANGE (METERS) 900.0
----------------------------	-------	-------	-------	-------	-------------------------

80.0 /	5.4	41.5	38.7	29.9	23.3
75.0 /	8.4	64.0	62.3	50.0	40.0
70.0 /	9.3	65.8	69.3	60.0	51.7
65.0 /	7.6	42.7	47.0	43.7	40.7

06

SOURCE # 1---KISS. UTILITIES PT01-04 UNIT #7  
 SOURCE # 2---KISS. UTILITIES PT01-05,PT01-06 UNITS #8  
 SOURCE # 3---KISS. UTILITIES PT01-07,PT01-08 UNITS #1  
 SOURCE # 4---KISS. UTILITIES PT01-11-PT01-15 UNITS #1  
 SOURCE # 5---KISS. UTILITIES UNITS #19-#20  
 SOURCE # 6---KISS. UTILITIES COMBUSTION TURBINE  
 SOURCE # 7---CITY OF ST. CLOUD PT02-02,PT02-04  
 SOURCE # 8---CITY OF ST. CLOUD PT02-05,PT02-06  
 SOURCE # 9---CITY OF ST. CLOUD PT02-07,PT02-08  
 SOURCE # 10---FLA. DEPT. OF AGRIC. PT05-01  
 SOURCE # 11---KISS. COMMUNITY HOSP. PT06-01  
 SOURCE # 12---STOKELY VAN CAMP PT07-01  
 SOURCE # 13---CW BAILEY PT11-01  
 SOURCE # 14---FLA POWER COPR PT14-01-PT14-06  
 SOURCE # 15---OWENS ILL PT32-01,PT32-02  
 SOURCE # 16---DIXIE ASPHALT PT41-01  
 SOURCE # 17---GOULD BATTERY PT56-01  
 SOURCE # 18---GOULD BATTERY PT56-03  
 SOURCE # 19---GOULD BATTERY PT56-05  
 SOURCE # 20---ST. CLOUD HOSPITAL PT10-02,PT10-03

\*\*\* SOURCE DATA \*\*\*

SOURCE NUMBER	T W P K E E	Y A NUMBER PART. CATS.	EMISSION RATE TYPE=0,1 (G/S)		BASE ELEV. HEIGHT (M) (M)		TEMP. TYPE=0 (DEG.K)	EXIT VEL. TYPE=0 (M/S)	BLDG. DIAM. TYPE=0 (M)	BLDG. HEIGHT TYPE=0 (M)	BLDG. LENGTH TYPE=0 (M)	BLDG. WIDTH TYPE=0 (M)	
			TYPE=2 (G/S)	X (M)	Y (M)	VERT.DIM. TYPE=1 (M)							HORZ.DIM. TYPE=1,2 (M)
1	0 0	0	0.520	460100.	3129300.	0.0	13.11	466.5	16.30	0.61	0.00	0.00	0.00
2	0 0	0	2.010	460100.	3129300.	0.0	16.15	477.6	17.60	0.85	0.00	0.00	0.00
3	0 0	0	1.360	460100.	3129300.	0.0	7.01	466.5	9.60	0.76	0.00	0.00	0.00
4	0 0	0	3.210	460100.	3129300.	0.0	13.41	505.4	8.70	0.80	0.00	0.00	0.00
5	0 0	0	1.730	460100.	3129300.	0.0	8.69	505.4	17.20	0.90	0.00	0.00	0.00
6	0 0	0	1.980	460100.	3129300.	0.0	9.14	422.0	38.03	2.44	0.00	0.00	0.00
7	0 0	0	2.820	471800.	3124900.	0.0	7.92	727.6	34.70	0.76	0.00	0.00	0.00
8	0 0	0	2.270	471800.	3124900.	0.0	8.53	699.8	1.17	0.64	0.00	0.00	0.00
9	0 0	0	3.780	471800.	3124900.	0.0	11.89	727.6	29.51	1.07	0.00	0.00	0.00
10	0 0	0	0.190	458700.	3133400.	0.0	9.14	727.6	5.47	0.55	0.00	0.00	0.00
11	0 0	0	0.190	459900.	3130300.	0.0	7.62	755.4	13.78	0.40	0.00	0.00	0.00
12	0 0	0	0.130	451100.	3125800.	0.0	7.32	513.7	11.50	0.46	0.00	0.00	0.00
13	0 0	0	0.320	470800.	3133800.	0.0	9.45	1005.7	11.60	0.61	0.00	0.00	0.00
14	0 0	0	40.900	446300.	3126000.	0.0	7.92	703.7	18.06	4.24	0.00	0.00	0.00
15	0 0	0	1.500	460700.	3142000.	0.0	9.14	299.8	4.17	0.91	0.00	0.00	0.00
16	0 0	0	1.440	463200.	3143000.	0.0	7.92	354.3	26.95	1.10	0.00	0.00	0.00
17	0 0	0	0.170	460400.	3142600.	0.0	7.01	301.5	18.52	0.98	0.00	0.00	0.00

71

\*\*\* KISSIMMEE DAY 325 TSP

\*\*\*

\*\*\* SOURCE DATA \*\*\*

SOURCE NUMBER	T P	W K	Y A	NUMBER PART.	EMISSION RATE		X (M)	Y (M)	BASE ELEV. (M)	HEIGHT (M)	TEMP.	EXIT VEL.	BLDG. DIAM. (M)	BLDG. HEIGHT (M)	BLDG. LENGTH (M)	BLDG. WIDTH (M)
					TYPE=0,1 (G/S)	TYPE=2 (G/S)					TYPE=0 (DEG.K)	TYPE=0 (M/S)				
	E	E		CATS.	*PER M**2					VERT.DIM. TYPE=1 (M)	HORZ.DIM. TYPE=1,2 (M)	TYPE=0	TYPE=0	TYPE=0	TYPE=0	
18	0	0	0	0	0.140	460400.	3142600.	0.0	4.57	294.3	15.00	0.30	0.00	0.00	0.00	
19	0	0	0	0	0.060	460400.	3142600.	0.0	9.14	305.4	13.95	0.76	0.00	0.00	0.00	
20	0	0	0	0	0.060	470300.	3124100.	0.0	5.49	505.4	15.00	0.46	0.00	0.00	0.00	

EV

DAILY: 325  
 24-HR/PD 1  
 SGROUP# 1  
 YEAR 1978  
 \*\*\* KISSIMMEE DAY 325 TSP

\*\*\*

\* DAILY 24-HOUR AVERAGE CONCENTRATION (MICROGRAMS/CUBIC METER) \*  
 \* ENDING WITH HOUR 24 FOR DAY 325 \*  
 \* FROM ALL SOURCES \*  
 \* FOR THE RECEPTOR GRID \*

\* MAXIMUM VALUE EQUALS 81.7 AND OCCURRED AT ( 460100.0, 3128800.0) \*

Y-AXIS / X-AXIS (METERS)  
 (METERS) / 459600.0 459700.0 459800.0 459900.0 460000.0 460100.0 460200.0 460300.0 460400.0

Y-AXIS (METERS)	459600.0	459700.0	459800.0	459900.0	460000.0	460100.0	460200.0	460300.0	460400.0
3129400.0 /	0.3	0.5	1.2	2.3	2.2	1.0	0.6	0.6	0.5
3129300.0 /	0.3	0.5	1.1	2.0	2.0	1.1	0.6	0.6	0.5
3129200.0 /	0.3	0.6	1.1	2.5	4.4	1.6	1.0	0.6	0.6
3129100.0 /	0.4	1.2	6.0	9.6	7.1	27.8	3.7	3.0	0.6
3129000.0 /	2.1	6.8	8.3	17.5	3.6	64.8	5.7	9.4	3.1
3128900.0 /	5.8	6.2	10.2	17.1	9.4	79.9	19.1	7.3	8.3
3128800.0 /	4.6	5.6	23.4	5.1	17.6	81.7	36.7	8.5	7.0
3128700.0 /	3.6	16.3	15.6	2.6	23.6	77.6	48.9	8.4	6.8
3128600.0 /	9.6	19.4	6.1	3.4	26.8	71.4	54.8	10.8	8.2
3128500.0 /	15.9	12.4	2.4	5.3	28.1	64.8	56.2	15.3	7.8

23

DAILY: 325  
24-HR/PD 1  
SGROUP# 1  
YEAR 1978  
\*\*\* KISSIMMEE DAY 325 TSP

\*\*\*

\* DAILY 24-HOUR AVERAGE CONCENTRATION (MICROGRAMS/CUBIC METER) \*  
\* ENDING WITH HOUR 24 FOR DAY 325 \*  
\* FROM ALL SOURCES \*  
\* FOR THE RECEPTOR GRID \*  
\* MAXIMUM VALUE EQUALS 81.7 AND OCCURRED AT ( 460100.0, 3128800.0) \*

Y-AXIS /  
(METERS) / 460500.0

X-AXIS (METERS)

-----  
3129400.0 / 0.5  
3129300.0 / 0.5  
3129200.0 / 0.5  
3129100.0 / 0.5  
3129000.0 / 0.6  
3128900.0 / 2.5  
3128800.0 / 6.1  
3128700.0 / 6.3  
3128600.0 / 5.0  
3128500.0 / 5.6

74

LONG-TERM MODELS

- ISCLT INPUT DATA -

NUMBER OF SOURCES = 14  
 NUMBER OF X AXIS GRID SYSTEM POINTS = 10  
 NUMBER OF Y AXIS GRID SYSTEM POINTS = 10  
 NUMBER OF SPECIAL POINTS = 0  
 NUMBER OF SEASONS = 1  
 NUMBER OF WIND SPEED CLASSES = 6  
 NUMBER OF STABILITY CLASSES = 5  
 NUMBER OF WIND DIRECTION CLASSES = 16  
 FILE NUMBER OF DATA FILE USED FOR REPORTS = 1  
 THE PROGRAM IS RUN IN RURAL MODE  
 CONCENTRATION (DEPOSITION) UNITS CONVERSION FACTOR = 0.10000000E+07  
 ACCELERATION OF GRAVITY (METERS/SEC\*\*2) = 9.800  
 HEIGHT OF MEASUREMENT OF WIND SPEED (METERS) = 10.000  
 ENTRAINMENT PARAMETER FOR UNSTABLE CONDITIONS = 0.600  
 ENTRAINMENT PARAMETER FOR STABLE CONDITIONS = 0.600  
 CORRECTION ANGLE FOR GRID SYSTEM VERSUS DIRECTION DATA NORTH (DEGREES) = 0.000  
 DECAY COEFFICIENT = 0.00000000E+00  
 PROGRAM OPTION SWITCHES = 1, 1, 1, 0, 0, 3, 2, 2, 3, 0, 0, 0, 0, -1, -1, 0, 0, 1, 0, 0,  
 ALL SOURCES ARE USED TO FORM SOURCE COMBINATION 1  
 DISTANCE X AXIS GRID SYSTEM POINTS (METERS )= 455600.00, 456600.00, 457600.00, 458600.00, 459600.00, 460600.00,  
 461600.00, 462600.00, 463600.00, 464600.00,  
 DISTANCE Y AXIS GRID SYSTEM POINTS (METERS )= 3124800.00, 3125800.00, 3126800.00, 3127800.00, 3128800.00, 3129800.00,  
 3130800.00, 3131800.00, 3132800.00, 3133800.00,

- AMBIENT AIR TEMPERATURE (DEGREES KELVIN) -

	STABILITY CATEGORY 1	STABILITY CATEGORY 2	STABILITY CATEGORY 3	STABILITY CATEGORY 4	STABILITY CATEGORY 5	STABILITY CATEGORY 6
SEASON 1	300.0000	300.0000	300.0000	295.0000	290.0000	

- MIXING LAYER HEIGHT (METERS) -

	SEASON 1					
	WIND SPEED CATEGORY 1	WIND SPEED CATEGORY 2	WIND SPEED CATEGORY 3	WIND SPEED CATEGORY 4	WIND SPEED CATEGORY 5	WIND SPEED CATEGORY 6
STABILITY CATEGORY 10	0.213800E+04	0.213800E+04	0.213800E+04	0.213800E+04	0.213800E+04	0.213800E+04
STABILITY CATEGORY 20	0.142500E+04	0.142500E+04	0.142500E+04	0.142500E+04	0.142500E+04	0.142500E+04
STABILITY CATEGORY 30	0.142500E+04	0.142500E+04	0.142500E+04	0.142500E+04	0.142500E+04	0.142500E+04
STABILITY CATEGORY 40	0.142500E+04	0.142500E+04	0.142500E+04	0.142500E+04	0.142500E+04	0.142500E+04
STABILITY CATEGORY 50	0.100000E+05	0.100000E+05	0.100000E+05	0.100000E+05	0.100000E+05	0.100000E+05

75

- ISCLT INPUT DATA (CONT.) -

- FREQUENCY OF OCCURRENCE OF WIND SPEED, DIRECTION AND STABILITY -

SEASON 1

STABILITY CATEGORY 1

DIRECTION (DEGREES)	WIND SPEED CATEGORY 1 ( 0.7500MPS)	WIND SPEED CATEGORY 2 ( 2.5000MPS)	WIND SPEED CATEGORY 3 ( 4.3000MPS)	WIND SPEED CATEGORY 4 ( 6.8000MPS)	WIND SPEED CATEGORY 5 ( 9.5000MPS)	WIND SPEED CATEGORY 6 (12.5000MPS)
0.000	0.00025400	0.00047900	0.00000000	0.00000000	0.00000000	0.00000000
22.500	0.00021800	0.00043400	0.00000000	0.00000000	0.00000000	0.00000000
45.000	0.00020300	0.00063900	0.00000000	0.00000000	0.00000000	0.00000000
67.500	0.00013300	0.00027400	0.00000000	0.00000000	0.00000000	0.00000000
90.000	0.00042800	0.00068500	0.00000000	0.00000000	0.00000000	0.00000000
112.500	0.00019200	0.00029700	0.00000000	0.00000000	0.00000000	0.00000000
135.000	0.00011500	0.00031900	0.00000000	0.00000000	0.00000000	0.00000000
157.500	0.00021200	0.00054800	0.00000000	0.00000000	0.00000000	0.00000000
180.000	0.00023500	0.00052500	0.00000000	0.00000000	0.00000000	0.00000000
202.500	0.00020100	0.00034200	0.00000000	0.00000000	0.00000000	0.00000000
225.000	0.00019100	0.00043400	0.00000000	0.00000000	0.00000000	0.00000000
247.500	0.00018700	0.00041100	0.00000000	0.00000000	0.00000000	0.00000000
270.000	0.00025500	0.00034200	0.00000000	0.00000000	0.00000000	0.00000000
292.500	0.00014500	0.00047900	0.00000000	0.00000000	0.00000000	0.00000000
315.000	0.00019200	0.00029700	0.00000000	0.00000000	0.00000000	0.00000000
337.500	0.00012500	0.00022800	0.00000000	0.00000000	0.00000000	0.00000000

SEASON 1

STABILITY CATEGORY 2

DIRECTION (DEGREES)	WIND SPEED CATEGORY 1 ( 0.7500MPS)	WIND SPEED CATEGORY 2 ( 2.5000MPS)	WIND SPEED CATEGORY 3 ( 4.3000MPS)	WIND SPEED CATEGORY 4 ( 6.8000MPS)	WIND SPEED CATEGORY 5 ( 9.5000MPS)	WIND SPEED CATEGORY 6 (12.5000MPS)
0.000	0.00107600	0.00219099	0.00152900	0.00000000	0.00000000	0.00000000
22.500	0.00093100	0.00125500	0.00079900	0.00000000	0.00000000	0.00000000
45.000	0.00083000	0.00187100	0.00152900	0.00000000	0.00000000	0.00000000
67.500	0.00097400	0.00139200	0.00143800	0.00000000	0.00000000	0.00000000
90.000	0.00113100	0.00262399	0.00250999	0.00000000	0.00000000	0.00000000
112.500	0.00083300	0.00209899	0.00127800	0.00000000	0.00000000	0.00000000
135.000	0.00078200	0.00230499	0.00171100	0.00000000	0.00000000	0.00000000
157.500	0.00088300	0.00148300	0.00180300	0.00000000	0.00000000	0.00000000
180.000	0.00092300	0.00301199	0.00260099	0.00000000	0.00000000	0.00000000
202.500	0.00056600	0.00162000	0.00127800	0.00000000	0.00000000	0.00000000
225.000	0.00067500	0.00166600	0.00120900	0.00000000	0.00000000	0.00000000
247.500	0.00057700	0.00150600	0.00136900	0.00000000	0.00000000	0.00000000
270.000	0.00065700	0.00152900	0.00116400	0.00000000	0.00000000	0.00000000
292.500	0.00072990	0.00148300	0.00111800	0.00000000	0.00000000	0.00000000
315.000	0.00077200	0.00182500	0.00136900	0.00000000	0.00000000	0.00000000
337.500	0.00050600	0.00155200	0.00095800	0.00000000	0.00000000	0.00000000

96



- ISCLT INPUT DATA (CONT.) -

- FREQUENCY OF OCCURRENCE OF WIND SPEED, DIRECTION AND STABILITY -

SEASON 1

STABILITY CATEGORY 3

DIRECTION (DEGREES)	WIND SPEED CATEGORY 1 ( 0.7500MPS)	WIND SPEED CATEGORY 2 ( 2.5000MPS)	WIND SPEED CATEGORY 3 ( 4.3000MPS)	WIND SPEED CATEGORY 4 ( 6.8000MPS)	WIND SPEED CATEGORY 5 ( 9.5000MPS)	WIND SPEED CATEGORY 6 (12.5000MPS)
0.000	0.00043200	0.00273799	0.00620698	0.00063900	0.00000000	0.00000000
22.500	0.00046900	0.00225899	0.00428999	0.00045600	0.00006800	0.00000000
45.000	0.00056700	0.00321699	0.00570499	0.00095800	0.00000000	0.00000000
67.500	0.00044300	0.00287499	0.00590998	0.00118700	0.00002300	0.00000000
90.000	0.00056600	0.00351399	0.00928698	0.00230499	0.00002300	0.00000000
112.500	0.00032500	0.00198499	0.00463199	0.00132300	0.00000000	0.00000000
135.000	0.00049400	0.00225899	0.00472299	0.00086700	0.00000000	0.00000000
157.500	0.00029200	0.00219099	0.00492899	0.00089000	0.00002300	0.00000000
180.000	0.00039700	0.00292099	0.00883098	0.00175700	0.00016000	0.00000000
202.500	0.00027200	0.00162000	0.00381099	0.00066200	0.00002300	0.00000000
225.000	0.00025700	0.00173400	0.00321699	0.00079900	0.00002300	0.00000000
247.500	0.00023400	0.00143800	0.00294399	0.00057000	0.00004600	0.00000000
270.000	0.00024600	0.00159700	0.00369699	0.00079900	0.00013700	0.00000000
292.500	0.00018800	0.00116400	0.00323999	0.00063900	0.00002300	0.00000000
315.000	0.00023500	0.00146000	0.00442699	0.00098100	0.00002300	0.00000000
337.500	0.00022000	0.00157400	0.00381099	0.00018300	0.00000000	0.00000000

SEASON 1

STABILITY CATEGORY 4

DIRECTION (DEGREES)	WIND SPEED CATEGORY 1 ( 0.7500MPS)	WIND SPEED CATEGORY 2 ( 2.5000MPS)	WIND SPEED CATEGORY 3 ( 4.3000MPS)	WIND SPEED CATEGORY 4 ( 6.8000MPS)	WIND SPEED CATEGORY 5 ( 9.5000MPS)	WIND SPEED CATEGORY 6 (12.5000MPS)
0.000	0.00092300	0.00419899	0.01868795	0.01702296	0.00157400	0.00004600
22.500	0.00067500	0.00417599	0.00949297	0.00981198	0.00127800	0.00018300
45.000	0.00096000	0.00529399	0.01106697	0.00969798	0.00061600	0.00004600
67.500	0.00096100	0.00467799	0.00985797	0.00775798	0.00029700	0.00004600
90.000	0.00104400	0.00572699	0.01572196	0.01266397	0.00038800	0.00000000
112.500	0.00069900	0.00323999	0.00937798	0.00828298	0.00022800	0.00000000
135.000	0.00049900	0.00319499	0.00873998	0.00570499	0.00031900	0.00004600
157.500	0.00050800	0.00330899	0.00853398	0.00835198	0.00105000	0.00004600
180.000	0.00093600	0.00467799	0.01435296	0.01375997	0.00237299	0.00013700
202.500	0.00030700	0.00200799	0.00543099	0.00488299	0.00093600	0.00009100
225.000	0.00070500	0.00237299	0.00705098	0.00654898	0.00102700	0.00022800
247.500	0.00041400	0.00273799	0.00584199	0.00451799	0.00102700	0.00018300
270.000	0.00057600	0.00292099	0.00775798	0.00928698	0.00175700	0.00025100
292.500	0.00045700	0.00234999	0.00574999	0.00748398	0.00152900	0.00022800
315.000	0.00046000	0.00207599	0.00508899	0.00830598	0.00109500	0.00002300
337.500	0.00048800	0.00212199	0.00593298	0.00618398	0.00034200	0.00009100

77

- ISCLT INPUT DATA (CONT.) -

- FREQUENCY OF OCCURRENCE OF WIND SPEED, DIRECTION AND STABILITY -

SEASON 1

STABILITY CATEGORY 5

DIRECTION (DEGREES)	WIND SPEED CATEGORY 1 ( 0.7500MPS)	WIND SPEED CATEGORY 2 ( 2.5000MPS)	WIND SPEED CATEGORY 3 ( 4.3000MPS)	WIND SPEED CATEGORY 4 ( 6.8000MPS)	WIND SPEED CATEGORY 5 ( 9.5000MPS)	WIND SPEED CATEGORY 6 (12.5000MPS)
0.000	0.01233297	0.02523693	0.01181997	0.00000000	0.00000000	0.00000000
22.500	0.01131597	0.02078795	0.00419899	0.00000000	0.00000000	0.00000000
45.000	0.01238997	0.02598993	0.00387899	0.00000000	0.00000000	0.00000000
67.500	0.01144697	0.02149495	0.00394799	0.00000000	0.00000000	0.00000000
90.000	0.01342797	0.02619594	0.00563599	0.00000000	0.00000000	0.00000000
112.500	0.00845298	0.01332597	0.00385599	0.00000000	0.00000000	0.00000000
135.000	0.00765898	0.01197997	0.00308099	0.00000000	0.00000000	0.00000000
157.500	0.00710998	0.01327997	0.00178000	0.00000000	0.00000000	0.00000000
180.000	0.01033097	0.02067395	0.00333199	0.00000000	0.00000000	0.00000000
202.500	0.00326299	0.00625198	0.00116400	0.00000000	0.00000000	0.00000000
225.000	0.00367199	0.00821498	0.00212199	0.00000000	0.00000000	0.00000000
247.500	0.00448799	0.00823698	0.00209899	0.00000000	0.00000000	0.00000000
270.000	0.00535199	0.01081597	0.00570499	0.00000000	0.00000000	0.00000000
292.500	0.00445199	0.00853398	0.00444999	0.00000000	0.00000000	0.00000000
315.000	0.00192800	0.00342299	0.00292099	0.00000000	0.00000000	0.00000000
337.500	0.00329399	0.00679998	0.00435799	0.00000000	0.00000000	0.00000000

- VERTICAL POTENTIAL TEMPERATURE GRADIENT (DEGREES KELVIN/METER) -

STABILITY CATEGORY	WIND SPEED CATEGORY 1	WIND SPEED CATEGORY 2	WIND SPEED CATEGORY 3	WIND SPEED CATEGORY 4	WIND SPEED CATEGORY 5	WIND SPEED CATEGORY 6
STABILITY CATEGORY 10	0.000000E+000	0.000000E+000	0.000000E+000	0.000000E+000	0.000000E+000	0.000000E+000
STABILITY CATEGORY 20	0.000000E+000	0.000000E+000	0.000000E+000	0.000000E+000	0.000000E+000	0.000000E+000
STABILITY CATEGORY 30	0.000000E+000	0.000000E+000	0.000000E+000	0.000000E+000	0.000000E+000	0.000000E+000
STABILITY CATEGORY 40	0.000000E+000	0.000000E+000	0.000000E+000	0.000000E+000	0.000000E+000	0.000000E+000
STABILITY CATEGORY 50	0.200000E-010	0.200000E-010	0.200000E-010	0.200000E-010	0.200000E-010	0.200000E-010

- WIND PROFILE POWER LAW EXPONENTS -

STABILITY CATEGORY	WIND SPEED CATEGORY 1	WIND SPEED CATEGORY 2	WIND SPEED CATEGORY 3	WIND SPEED CATEGORY 4	WIND SPEED CATEGORY 5	WIND SPEED CATEGORY 6
STABILITY CATEGORY 10	1.000000E+000	1.000000E+000	1.000000E+000	1.000000E+000	1.000000E+000	1.000000E+000
STABILITY CATEGORY 20	0.150000E+000	0.150000E+000	0.150000E+000	0.150000E+000	0.150000E+000	0.150000E+000
STABILITY CATEGORY 30	0.200000E+000	0.200000E+000	0.200000E+000	0.200000E+000	0.200000E+000	0.200000E+000
STABILITY CATEGORY 40	0.250000E+000	0.250000E+000	0.250000E+000	0.250000E+000	0.250000E+000	0.250000E+000
STABILITY CATEGORY 50	0.300000E+000	0.300000E+000	0.300000E+000	0.300000E+000	0.300000E+000	0.300000E+000

86

202.500	0.00326299	0.00625198	0.00116400	0.00000000	0.00000000	0.00000000
225.000	0.00367199	0.00821498	0.00212199	0.00000000	0.00000000	0.00000000
247.500	0.00448799	0.00823698	0.00209899	0.00000000	0.00000000	0.00000000
270.000	0.00535199	0.01081597	0.00570499	0.00000000	0.00000000	0.00000000
292.500	0.00445199	0.00853398	0.00444999	0.00000000	0.00000000	0.00000000
315.000	0.00192800	0.00342299	0.00292099	0.00000000	0.00000000	0.00000000
337.500	0.00329399	0.00679998	0.00435799	0.00000000	0.00000000	0.00000000

- VERTICAL POTENTIAL TEMPERATURE GRADIENT (DEGREES KELVIN/METER) -

WIND SPEED WIND SPEED WIND SPEED WIND SPEED WIND SPEED WIND SPEED  
CATEGORY 1 CATEGORY 2 CATEGORY 3 CATEGORY 4 CATEGORY 5 CATEGORY 6

STABILITY CATEGORY 10	0.000000E+000	0.000000E+000	0.000000E+000	0.000000E+000	0.000000E+000	0.000000E+000
STABILITY CATEGORY 20	0.000000E+000	0.000000E+000	0.000000E+000	0.000000E+000	0.000000E+000	0.000000E+000
STABILITY CATEGORY 30	0.000000E+000	0.000000E+000	0.000000E+000	0.000000E+000	0.000000E+000	0.000000E+000
STABILITY CATEGORY 40	0.000000E+000	0.000000E+000	0.000000E+000	0.000000E+000	0.000000E+000	0.000000E+000
STABILITY CATEGORY 50	0.200000E-010	0.200000E-010	0.200000E-010	0.200000E-010	0.200000E-010	0.200000E-010

- WIND PROFILE POWER LAW EXPONENTS -

WIND SPEED WIND SPEED WIND SPEED WIND SPEED WIND SPEED WIND SPEED  
CATEGORY 1 CATEGORY 2 CATEGORY 3 CATEGORY 4 CATEGORY 5 CATEGORY 6

STABILITY CATEGORY 10	0.100000E+000	0.100000E+000	0.100000E+000	0.100000E+000	0.100000E+000	0.100000E+000
STABILITY CATEGORY 20	0.150000E+000	0.150000E+000	0.150000E+000	0.150000E+000	0.150000E+000	0.150000E+000
STABILITY CATEGORY 30	0.200000E+000	0.200000E+000	0.200000E+000	0.200000E+000	0.200000E+000	0.200000E+000
STABILITY CATEGORY 40	0.250000E+000	0.250000E+000	0.250000E+000	0.250000E+000	0.250000E+000	0.250000E+000
STABILITY CATEGORY 50	0.300000E+000	0.300000E+000	0.300000E+000	0.300000E+000	0.300000E+000	0.300000E+000

ORLANDO UTILITIES PT 33-01 - PT 33-03 - SOURCE INPUT DATA -

C T SOURCE SOURCE X Y EMISSION BASE /  
A A NUMBER TYPE COORDINATE COORDINATE HEIGHT ELEV- /  
R P (M) (M) (M) ATION /  
D E (M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X	2	STACK	463300.00	3159000.00	34.40	0.00	GAS EXIT TEMP (DEG K)= 422.00, GAS EXIT VEL. (M/SEC)= 10.16, STACK DIAMETER (M)= 2.440, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0
							- SOURCE STRENGTHS ( GRAMS PER SEC ) -
							SEASON 1 SEASON 2 SEASON 3 SEASON 4
							3.22000E+00

KISSIMMEE UTILITIES PT01-04 - SOURCE INPUT DATA (CONT.) -

C T SOURCE SOURCE X Y EMISSION BASE /  
A A NUMBER TYPE COORDINATE COORDINATE HEIGHT ELEV- /  
R P (M) (M) (M) ATION /  
D E (M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X	5	STACK	460100.00	3129300.00	13.11	0.00	GAS EXIT TEMP (DEG K)= 466.50, GAS EXIT VEL. (M/SEC)= 16.30, STACK DIAMETER (M)= 0.610, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0
							- SOURCE STRENGTHS ( GRAMS PER SEC ) -

79

SEASON 1 SEASON 2 SEASON 3 SEASON 4  
4.46000E+00

KISSIMMEE UTILITIES PT01-05, PT01-06 - SOURCE INPUT DATA (CONT.) -

C T SOURCE SOURCE X Y EMISSION BASE /  
A A NUMBER TYPE COORDINATE COORDINATE HEIGHT ELEV- /  
R P (M) (M) (M) ATION /  
D E (M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X 6 STACK 460100.00 3129300.00 16.15 0.00 GAS EXIT TEMP (DEG K)= 477.60, GAS EXIT VEL. (M/SEC)= 17.60,  
STACK DIAMETER (M)= 0.850, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
- SOURCE STRENGTHS ( GRAMS PER SEC ) -  
SEASON 1 SEASON 2 SEASON 3 SEASON 4  
1.70900E+01

KISSIMMEE UTILITIES PT 01-07, PT01-08 - SOURCE INPUT DATA (CONT.) -

C T SOURCE SOURCE X Y EMISSION BASE /  
A A NUMBER TYPE COORDINATE COORDINATE HEIGHT ELEV- /  
R P (M) (M) (M) ATION /  
D E (M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X 7 STACK 460100.00 3129300.00 7.01 0.00 GAS EXIT TEMP (DEG K)= 466.50, GAS EXIT VEL. (M/SEC)= 9.60,  
STACK DIAMETER (M)= 0.760, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
- SOURCE STRENGTHS ( GRAMS PER SEC ) -  
SEASON 1 SEASON 2 SEASON 3 SEASON 4  
1.05800E+01

KISSIMMEE UTILITIES PT01-11-01-15 - SOURCE INPUT DATA (CONT.) -

C T SOURCE SOURCE X Y EMISSION BASE /  
A A NUMBER TYPE COORDINATE COORDINATE HEIGHT ELEV- /  
R P (M) (M) (M) ATION /  
D E (M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X 8 STACK 460100.00 3129300.00 13.41 0.00 GAS EXIT TEMP (DEG K)= 505.40, GAS EXIT VEL. (M/SEC)= 8.70,  
STACK DIAMETER (M)= 0.800, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
- SOURCE STRENGTHS ( GRAMS PER SEC ) -  
SEASON 1 SEASON 2 SEASON 3 SEASON 4  
1.13400E+01

- SOURCE INPUT DATA (CONT.) -

80

C T SOURCE SOURCE X Y EMISSION BASE /  
 A A NUMBER TYPE COORDINATE COORDINATE HEIGHT ELEV- /  
 R P (M) (M) (M) ATION /  
 D E **KISSIMMEE UTILITIES UNITS #19 and #20** (M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X 9 STACK 460100.00 3129300.00 8.69 0.00 GAS EXIT TEMP (DEG K)= 505.40, GAS EXIT VEL. (M/SEC)= 17.20,  
 STACK DIAMETER (M)= 0.900, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
 ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
 - SOURCE STRENGTHS (GRAMS PER SEC ) -  
 SEASON 1 SEASON 2 SEASON 3 SEASON 4  
 1.46600E+01

**CITY OF ST. CLOUD PTO2-02, PTO2-04** - SOURCE INPUT DATA (CONT.) -

C T SOURCE SOURCE X Y EMISSION BASE /  
 A A NUMBER TYPE COORDINATE COORDINATE HEIGHT ELEV- /  
 R P (M) (M) (M) ATION /  
 D E (M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X 10 STACK 471800.00 3124900.00 7.92 0.00 GAS EXIT TEMP (DEG K)= 727.60, GAS EXIT VEL. (M/SEC)= 34.70,  
 STACK DIAMETER (M)= 0.760, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
 ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
 - SOURCE STRENGTHS (GRAMS PER SEC ) -  
 SEASON 1 SEASON 2 SEASON 3 SEASON 4  
 3.90500E+01

**CITY OF ST. CLOUD PTO2-05, PTO2-06** - SOURCE INPUT DATA (CONT.) -

C T SOURCE SOURCE X Y EMISSION BASE /  
 A A NUMBER TYPE COORDINATE COORDINATE HEIGHT ELEV- /  
 R P (M) (M) (M) ATION /  
 D E (M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X 11 STACK 471800.00 3124900.00 8.53 0.00 GAS EXIT TEMP (DEG K)= 699.80, GAS EXIT VEL. (M/SEC)= 1.17,  
 STACK DIAMETER (M)= 0.640, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
 ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
 - SOURCE STRENGTHS (GRAMS PER SEC ) -  
 SEASON 1 SEASON 2 SEASON 3 SEASON 4  
 3.16800E+01

**CITY OF ST. CLOUD PTO2-07, PTO2-08** - SOURCE INPUT DATA (CONT.) -

C T SOURCE SOURCE X Y EMISSION BASE /  
 A A NUMBER TYPE COORDINATE COORDINATE HEIGHT ELEV- /  
 R P (M) (M) (M) ATION /  
 D E (M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X 12 STACK 471800.00 3124900.00 11.89 0.00 GAS EXIT TEMP (DEG K)= 727.60, GAS EXIT VEL. (M/SEC)= 29.51,  
 STACK DIAMETER (M)= 1.070, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF

81

1\*\*\*\* ISCLT \*\*\*\*\* ISCLT -- ANNUAL NOX

ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
- SOURCE STRENGTHS ( GRAMS PER SEC ) -  
SEASON 1 SEASON 2 SEASON 3 SEASON 4  
5.48900E+01

\*\*\*\*\* PAGE 1 \*\*\*\*

1\*\*\*\* ISCLT \*\*\*\*\* ISCLT -- ANNUAL NOX

\*\*\*\*\* PAGE 14 \*\*\*\*

*Florida Power Corp PT 14-01 thru 14-06*

- SOURCE INPUT DATA (CONT.) -

C T SOURCE SOURCE X Y EMISSION BASE /  
A A NUMBER TYPE COORDINATE COORDINATE HEIGHT ELEV- /  
R P (M) (M) (M) ATION /  
D E (M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X 15 STACK 446300.00 3126000.00 7.92 0.00

GAS EXIT TEMP (DEG K)= 703.70, GAS EXIT VEL. (M/SEC)= 18.06,  
STACK DIAMETER (M)= 4.240, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
- SOURCE STRENGTHS ( GRAMS PER SEC ) -  
SEASON 1 SEASON 2 SEASON 3 SEASON 4  
8.23300E+01

1\*\*\*\* ISCLT \*\*\*\*\* ISCLT -- ANNUAL NOX

\*\*\*\*\* PAGE 15 \*\*\*\*

*KISSIMEE UTILITIES -- NEW COMBUSTION TURBINE*

- SOURCE INPUT DATA (CONT.) -

C T SOURCE SOURCE X Y EMISSION BASE /  
A A NUMBER TYPE COORDINATE COORDINATE HEIGHT ELEV- /  
R P (M) (M) (M) ATION /  
D E (M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X 18 STACK 460100.00 3129300.00 9.14 0.00

GAS EXIT TEMP (DEG K)= 422.00, GAS EXIT VEL. (M/SEC)= 38.03,  
STACK DIAMETER (M)= 2.440, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
- SOURCE STRENGTHS ( GRAMS PER SEC ) -  
SEASON 1 SEASON 2 SEASON 3 SEASON 4  
3.85000E+01

1\*\*\*\* ISCLT \*\*\*\*\* ISCLT -- ANNUAL NOX

\*\*\*\*\* PAGE 16 \*\*\*\*

*SOUTHER FAVIT PT 39-01*

- SOURCE INPUT DATA (CONT.) -

C T SOURCE SOURCE X Y EMISSION BASE /  
A A NUMBER TYPE COORDINATE COORDINATE HEIGHT ELEV- /  
R P (M) (M) (M) ATION /  
D E (M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X 41 STACK 462900.00 3153300.00 16.20 0.00

GAS EXIT TEMP (DEG K)= 388.70, GAS EXIT VEL. (M/SEC)= 15.63,  
STACK DIAMETER (M)= 1.460, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
- SOURCE STRENGTHS ( GRAMS PER SEC ) -  
SEASON 1 SEASON 2 SEASON 3 SEASON 4  
1.27000E+00

28

COCA COLA PT 23-02

- SOURCE INPUT DATA (CONT.) -

C T SOURCE	SOURCE	X	Y	EMISSION	BASE /
A A NUMBER	TYPE	COORDINATE	COORDINATE	HEIGHT	ELEV- /
R P		(M)	(M)	(M)	ATION /
D E					(M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X 57 STACK 421300.00 3103600.00 17.40 0.00 GAS EXIT TEMP (DEG K)= 547.00, GAS EXIT VEL. (M/SEC)= 15.24,  
 STACK DIAMETER (M)= 1.830, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
 - SOURCE STRENGTHS ( GRAMS PER SEC ) -  
 SEASON 1 SEASON 2 SEASON 3 SEASON 4  
 2.07000E+00

CITY OF ORLANDO INCINERATORS PT 61-01-61-08

- SOURCE INPUT DATA (CONT.) -

C T SOURCE	SOURCE	X	Y	EMISSION	BASE /
A A NUMBER	TYPE	COORDINATE	COORDINATE	HEIGHT	ELEV- /
R P		(M)	(M)	(M)	ATION /
D E					(M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X 100 STACK 456300.00 3152700.00 11.60 0.00 GAS EXIT TEMP (DEG K)= 922.00, GAS EXIT VEL. (M/SEC)= 12.50,  
 STACK DIAMETER (M)= 1.130, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
 - SOURCE STRENGTHS ( GRAMS PER SEC ) -  
 SEASON 1 SEASON 2 SEASON 3 SEASON 4  
 3.22000E+00

83

\*\* ANNUAL GROUND LEVEL CONCENTRATION ( MICROGRAMS PER CUBIC METER ) FROM ALL SOURCES COMBINED \*\*

- GRID SYSTEM RECEPTORS -  
- X AXIS (DISTANCE, METERS) -

Y AXIS (DISTANCE , METERS )	455600.000	456600.000	457600.000	458600.000	459600.000	460600.000	461600.000	462600.000	463600.000
3133800.000	7.203840	7.964563	8.739365	10.094641	12.641409	11.831429	7.906047	6.718377	6.766826
3132800.000	8.158581	9.024574	10.281042	11.513060	15.680794	14.248495	7.985918	8.064526	7.872984
3131800.000	9.220030	10.622097	12.266405	14.717760	20.462940	17.504848	10.435093	10.003328	9.036943
3130800.000	11.287207	12.482058	15.444592	19.514755	27.810764	19.813309	14.907787	11.940344	10.217138
3129800.000	15.011848	18.458504	23.717342	30.883835	41.979912	32.367508	19.995598	15.218042	12.624662
3128800.000	16.168568	20.197514	26.816319	38.308418	68.864471	27.363506	21.915806	16.040699	13.286333
3127800.000	14.456395	17.129650	22.702099	32.408699	38.785179	24.626392	13.384481	13.274551	12.466822
3126800.000	13.851397	16.693878	20.721905	23.239521	28.532719	23.279018	12.975653	11.292343	11.945793
3125800.000	13.539406	15.729925	17.290092	18.354015	22.694443	20.341648	12.536428	12.001600	11.948391
3124800.000	12.916681	13.981201	14.924110	16.399517	19.236763	18.162243	13.646818	12.377136	12.907539

- GRID SYSTEM RECEPTORS -  
- X AXIS (DISTANCE, METERS) -

Y AXIS (DISTANCE , METERS )	464600.000
3133800.000	6.747674
3132800.000	7.515856
3131800.000	8.364370
3130800.000	9.566696
3129800.000	11.270599
3128800.000	11.962540
3127800.000	11.676460
3126800.000	12.386490
3125800.000	13.252758
3124800.000	13.973961

84



202.500	0.00326299	0.00625198	0.00116400	0.00000000	0.00000000	0.00000000
225.000	0.00367199	0.00821498	0.00212199	0.00000000	0.00000000	0.00000000
247.500	0.00448799	0.00823698	0.00209899	0.00000000	0.00000000	0.00000000
270.000	0.00535199	0.01081597	0.00570499	0.00000000	0.00000000	0.00000000
292.500	0.00445199	0.00853398	0.00444999	0.00000000	0.00000000	0.00000000
315.000	0.00192800	0.00342299	0.00292099	0.00000000	0.00000000	0.00000000
337.500	0.00329399	0.00679998	0.00435799	0.00000000	0.00000000	0.00000000

- VERTICAL POTENTIAL TEMPERATURE GRADIENT (DEGREES KELVIN/METER) -

WIND SPEED	WIND SPEED	WIND SPEED	WIND SPEED	WIND SPEED	WIND SPEED
CATEGORY 1	CATEGORY 2	CATEGORY 3	CATEGORY 4	CATEGORY 5	CATEGORY 6
STABILITY CATEGORY 10	0.000000E+000	0.000000E+000	0.000000E+000	0.000000E+000	0.000000E+000
STABILITY CATEGORY 20	0.000000E+000	0.000000E+000	0.000000E+000	0.000000E+000	0.000000E+000
STABILITY CATEGORY 30	0.000000E+000	0.000000E+000	0.000000E+000	0.000000E+000	0.000000E+000
STABILITY CATEGORY 40	0.000000E+000	0.000000E+000	0.000000E+000	0.000000E+000	0.000000E+000
STABILITY CATEGORY 50	0.200000E-010	0.200000E-010	0.200000E-010	0.200000E-010	0.200000E-010

- WIND PROFILE POWER LAW EXPONENTS -

WIND SPEED	WIND SPEED	WIND SPEED	WIND SPEED	WIND SPEED	WIND SPEED
CATEGORY 1	CATEGORY 2	CATEGORY 3	CATEGORY 4	CATEGORY 5	CATEGORY 6
STABILITY CATEGORY 10	0.100000E+000	0.100000E+000	0.100000E+000	0.100000E+000	0.100000E+000
STABILITY CATEGORY 20	0.150000E+000	0.150000E+000	0.150000E+000	0.150000E+000	0.150000E+000
STABILITY CATEGORY 30	0.200000E+000	0.200000E+000	0.200000E+000	0.200000E+000	0.200000E+000
STABILITY CATEGORY 40	0.250000E+000	0.250000E+000	0.250000E+000	0.250000E+000	0.250000E+000
STABILITY CATEGORY 50	0.300000E+000	0.300000E+000	0.300000E+000	0.300000E+000	0.300000E+000

ORLANDO UTILITIES PT 33-01 - 33-03 - SOURCE INPUT DATA -

C T SOURCE SOURCE	X	Y	EMISSION	BASE /
A A NUMBER TYPE	COORDINATE	COORDINATE	HEIGHT	ELEV- /
R P	(M)	(M)	(M)	ATION /
D E				(M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X	1	STACK	463300.00	3159000.00	34.40	0.00	GAS EXIT TEMP (DEG K)= 422.00, GAS EXIT VEL. (M/SEC)= 17.00, STACK DIAMETER (M)= 1.830, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0
							- SOURCE STRENGTHS ( GRAMS PER SEC ) -
							SEASON 1 SEASON 2 SEASON 3 SEASON 4
							2.25000E+00

ORLANDO UTILITIES PT 33-04 - SOURCE INPUT DATA (CONT.) -

C T SOURCE SOURCE	X	Y	EMISSION	BASE /
A A NUMBER TYPE	COORDINATE	COORDINATE	HEIGHT	ELEV- /
R P	(M)	(M)	(M)	ATION /
D E				(M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X	2	STACK	463300.00	3159000.00	34.40	0.00	GAS EXIT TEMP (DEG K)= 422.00, GAS EXIT VEL. (M/SEC)= 10.16, STACK DIAMETER (M)= 2.440, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0
							- SOURCE STRENGTHS ( GRAMS PER SEC ) -

85

SEASON 1 SEASON 2 SEASON 3 SEASON 4  
2.85000E+00

1\*\*\*\* ISCLT \*\*\*\*\* ISCLT -- ANNUAL TSP

\*\*\*\*\* PAGE 7 \*\*\*\*

STANDARD SAND SILICA DT14-01 - SOURCE INPUT DATA (CONT.) -

C T SOURCE SOURCE X Y EMISSION BASE /  
A A NUMBER TYPE COORDINATE COORDINATE HEIGHT ELEV- /  
R P (M) (M) (M) ATION /  
D E (M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X 3 STACK 441500.00 3118200.00 9.10 0.00 GAS EXIT TEMP (DEG K)= 380.40, GAS EXIT VEL. (M/SEC)= 24.13,  
STACK DIAMETER (M)= 0.430, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
- SOURCE STRENGTHS (GRAMS PER SEC ) -  
SEASON 1 SEASON 2 SEASON 3 SEASON 4  
1.04000E+00

1\*\*\*\* ISCLT \*\*\*\*\* ISCLT -- ANNUAL TSP

\*\*\*\*\* PAGE 8 \*\*\*\*

STANDARD SAND SILICA PT14-02 - SOURCE INPUT DATA (CONT.) -

C T SOURCE SOURCE X Y EMISSION BASE /  
A A NUMBER TYPE COORDINATE COORDINATE HEIGHT ELEV- /  
R P (M) (M) (M) ATION /  
D E (M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X 4 STACK 441500.00 3118200.00 9.10 0.00 GAS EXIT TEMP (DEG K)= 350.90, GAS EXIT VEL. (M/SEC)= 26.55,  
STACK DIAMETER (M)= 1.400, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
- SOURCE STRENGTHS (GRAMS PER SEC ) -  
SEASON 1 SEASON 2 SEASON 3 SEASON 4  
1.04000E+00

1\*\*\*\* ISCLT \*\*\*\*\* ISCLT -- ANNUAL TSP

\*\*\*\*\* PAGE 9 \*\*\*\*

KISSIMMEE UTILITIES OT35-01-3803 - SOURCE INPUT DATA (CONT.) -

C T SOURCE SOURCE X Y EMISSION BASE /  
A A NUMBER TYPE COORDINATE COORDINATE HEIGHT ELEV- /  
R P (M) (M) (M) ATION /  
D E (M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X 5 STACK 460100.00 3129300.00 13.11 0.00 GAS EXIT TEMP (DEG K)= 466.50, GAS EXIT VEL. (M/SEC)= 16.30,  
STACK DIAMETER (M)= 0.610, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
- SOURCE STRENGTHS (GRAMS PER SEC ) -  
SEASON 1 SEASON 2 SEASON 3 SEASON 4  
5.30000E-01

1\*\*\*\* ISCLT \*\*\*\*\* ISCLT -- ANNUAL TSP

\*\*\*\*\* PAGE 10 \*\*\*\*

- SOURCE INPUT DATA (CONT.) -

96

KISSIMMEE UTILITIES PTOI-05, PTOI-06

C T SOURCE SOURCE X Y EMISSION BASE /  
 A A NUMBER TYPE COORDINATE COORDINATE HEIGHT ELEV- /  
 R P (M) (M) (M) ATION /  
 D E (M) /

- SOURCE DETAILS DEPENDING ON TYPE -

-----  
 X 6 STACK 460100.00 3129300.00 16.15 0.00 GAS EXIT TEMP (DEG K)= 477.60, GAS EXIT VEL. (M/SEC)= 17.60,  
 STACK DIAMETER (M)= 0.850, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
 ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
 - SOURCE STRENGTHS ( GRAMS PER SEC ) -  
 SEASON 1 SEASON 2 SEASON 3 SEASON 4  
 2.02000E+00

KISSIMMEE UTILITIES PTOI-07, PTOI-08 - SOURCE INPUT DATA (CONT.) -

C T SOURCE SOURCE X Y EMISSION BASE /  
 A A NUMBER TYPE COORDINATE COORDINATE HEIGHT ELEV- /  
 R P (M) (M) (M) ATION /  
 D E (M) /

- SOURCE DETAILS DEPENDING ON TYPE -

-----  
 X 7 STACK 460100.00 3129300.00 7.01 0.00 GAS EXIT TEMP (DEG K)= 466.50, GAS EXIT VEL. (M/SEC)= 9.60,  
 STACK DIAMETER (M)= 0.760, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
 ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
 - SOURCE STRENGTHS ( GRAMS PER SEC ) -  
 SEASON 1 SEASON 2 SEASON 3 SEASON 4  
 1.36000E+00

KISSIMMEE UTILITIES PTOI-11-01-15 - SOURCE INPUT DATA (CONT.) -

C T SOURCE SOURCE X Y EMISSION BASE /  
 A A NUMBER TYPE COORDINATE COORDINATE HEIGHT ELEV- /  
 R P (M) (M) (M) ATION /  
 D E (M) /

- SOURCE DETAILS DEPENDING ON TYPE -

-----  
 X 8 STACK 460100.00 3129300.00 13.41 0.00 GAS EXIT TEMP (DEG K)= 505.40, GAS EXIT VEL. (M/SEC)= 8.70,  
 STACK DIAMETER (M)= 0.800, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
 ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
 - SOURCE STRENGTHS ( GRAMS PER SEC ) -  
 SEASON 1 SEASON 2 SEASON 3 SEASON 4  
 3.15000E+00

KISSIMMEE UTILITIES UNITS #19 and #20 - SOURCE INPUT DATA (CONT.) -

C T SOURCE SOURCE X Y EMISSION BASE /  
 A A NUMBER TYPE COORDINATE COORDINATE HEIGHT ELEV- /  
 R P (M) (M) (M) ATION /  
 D E (M) /

- SOURCE DETAILS DEPENDING ON TYPE -

-----  
 X 9 STACK 460100.00 3129300.00 8.69 0.00 GAS EXIT TEMP (DEG K)= 505.40, GAS EXIT VEL. (M/SEC)= 17.20,  
 STACK DIAMETER (M)= 0.900, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF

67

ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
- SOURCE STRENGTHS ( GRAMS PER SEC ) -  
SEASON 1 SEASON 2 SEASON 3 SEASON 4  
1.74000E+00

1\*\*\*\* ISCLT \*\*\*\*\* ISCLT -- ANNUAL TSP

\*\*\*\*\* PAGE 14 \*\*\*\*

CITY OF ST. CLOUD PT02-02, PT03-04 - SOURCE INPUT DATA (CONT.) -

C T SOURCE SOURCE X Y EMISSION BASE /  
A A NUMBER TYPE COORDINATE COORDINATE HEIGHT ELEV- /  
R P (M) (M) (M) ATION /  
D E (M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X 10 STACK 471800.00 3124900.00 7.92 0.00 GAS EXIT TEMP (DEG K)= 727.60, GAS EXIT VEL. (M/SEC)= 34.70,  
STACK DIAMETER (M)= 0.760, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
- SOURCE STRENGTHS ( GRAMS PER SEC ) -  
SEASON 1 SEASON 2 SEASON 3 SEASON 4  
2.82000E+00

1\*\*\*\* ISCLT \*\*\*\*\* ISCLT -- ANNUAL TSP

\*\*\*\*\* PAGE 15 \*\*\*\*

CITY OF ST. CLOUD PT02-05, PT03-06 - SOURCE INPUT DATA (CONT.) -

C T SOURCE SOURCE X Y EMISSION BASE /  
A A NUMBER TYPE COORDINATE COORDINATE HEIGHT ELEV- /  
R P (M) (M) (M) ATION /  
D E (M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X 11 STACK 471800.00 3124900.00 8.53 0.00 GAS EXIT TEMP (DEG K)= 699.80, GAS EXIT VEL. (M/SEC)= 1.17,  
STACK DIAMETER (M)= 0.640, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
- SOURCE STRENGTHS ( GRAMS PER SEC ) -  
SEASON 1 SEASON 2 SEASON 3 SEASON 4  
2.27000E+00

1\*\*\*\* ISCLT \*\*\*\*\* ISCLT -- ANNUAL TSP

\*\*\*\*\* PAGE 16 \*\*\*\*

CITY OF ST. CLOUD PT02-07, PT02-08 - SOURCE INPUT DATA (CONT.) -

C T SOURCE SOURCE X Y EMISSION BASE /  
A A NUMBER TYPE COORDINATE COORDINATE HEIGHT ELEV- /  
R P (M) (M) (M) ATION /  
D E (M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X 12 STACK 471800.00 3124900.00 11.89 0.00 GAS EXIT TEMP (DEG K)= 727.60, GAS EXIT VEL. (M/SEC)= 29.51,  
STACK DIAMETER (M)= 1.070, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
- SOURCE STRENGTHS ( GRAMS PER SEC ) -  
SEASON 1 SEASON 2 SEASON 3 SEASON 4  
3.78000E+00

1\*\*\*\* ISCLT \*\*\*\*\* ISCLT -- ANNUAL TSP

\*\*\*\*\* PAGE 17 \*\*\*\*

98

STOKELY VAN CAMP PT07-01

- SOURCE INPUT DATA (CONT.) -

C T SOURCE SOURCE X Y EMISSION BASE /  
 A A NUMBER TYPE COORDINATE COORDINATE HEIGHT ELEV- /  
 R P (M) (M) (M) ATION /  
 D E (M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X 13 STACK 451100.00 3125800.00 7.32 0.00 GAS EXIT TEMP (DEG K)= 513.70, GAS EXIT VEL. (M/SEC)= 11.50,  
 STACK DIAMETER (M)= 0.460, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
 ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
 - SOURCE STRENGTHS ( GRAMS PER SEC ) -  
 SEASON 1 SEASON 2 SEASON 3 SEASON 4  
 1.30000E-01

1\*\*\*\* ISCLT \*\*\*\*\* ISCLT -- ANNUAL TSP

\*\*\*\*\* PAGE 18 \*\*\*\*

CW DAILEY PT11-01

- SOURCE INPUT DATA (CONT.) -

C T SOURCE SOURCE X Y EMISSION BASE /  
 A A NUMBER TYPE COORDINATE COORDINATE HEIGHT ELEV- /  
 R P (M) (M) (M) ATION /  
 D E (M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X 14 STACK 470800.00 3133800.00 9.45 0.00 GAS EXIT TEMP (DEG K)=1005.70, GAS EXIT VEL. (M/SEC)= 11.60,  
 STACK DIAMETER (M)= 0.610, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
 ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
 - SOURCE STRENGTHS ( GRAMS PER SEC ) -  
 SEASON 1 SEASON 2 SEASON 3 SEASON 4  
 3.20000E-01

1\*\*\*\* ISCLT \*\*\*\*\* ISCLT -- ANNUAL TSP

\*\*\*\*\* PAGE 19 \*\*\*\*

FLA. POWER CORP. PT14-01-14-06

- SOURCE INPUT DATA (CONT.) -

C T SOURCE SOURCE X Y EMISSION BASE /  
 A A NUMBER TYPE COORDINATE COORDINATE HEIGHT ELEV- /  
 R P (M) (M) (M) ATION /  
 D E (M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X 15 STACK 446300.00 3126000.00 7.92 0.00 GAS EXIT TEMP (DEG K)= 703.70, GAS EXIT VEL. (M/SEC)= 18.06,  
 STACK DIAMETER (M)= 4.240, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
 ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
 - SOURCE STRENGTHS ( GRAMS PER SEC ) -  
 SEASON 1 SEASON 2 SEASON 3 SEASON 4  
 4.09000E+01

1\*\*\*\* ISCLT \*\*\*\*\* ISCLT -- ANNUAL TSP

\*\*\*\*\* PAGE 20 \*\*\*\*

DIXIE ASPHALT PT 41-01

- SOURCE INPUT DATA (CONT.) -

C T SOURCE SOURCE X Y EMISSION BASE /  
 A A NUMBER TYPE COORDINATE COORDINATE HEIGHT ELEV- /  
 R P (M) (M) (M) ATION /  
 D E (M) /

- SOURCE DETAILS DEPENDING ON TYPE -

89

1\*\*\*\* ISCLT \*\*\*\*\* ISCLT -- ANNUAL TSP

\*\*\*\*\* PAGE 21 \*\*\*\*

X 16 STACK 463200.00 3143000.00 7.92 0.00 GAS EXIT TEMP (DEG K)= 394.30, GAS EXIT VEL. (M/SEC)= 26.95,  
 STACK DIAMETER (M)= 1.100, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
 ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
 - SOURCE STRENGTHS (GRAMS PER SEC ) -  
 SEASON 1 SEASON 2 SEASON 3 SEASON 4  
 1.44000E+00

1\*\*\*\* ISCLT \*\*\*\*\* ISCLT -- ANNUAL TSP

\*\*\*\*\* PAGE 21 \*\*\*\*

- SOURCE INPUT DATA (CONT.) -

ST CLOUD HOSPITAL PT 10-02, PT10-03

C T	SOURCE	SOURCE	X	Y	EMISSION	BASE /
A A	NUMBER	TYPE	COORDINATE	COORDINATE	HEIGHT	ELEV- /
R P			(M)	(M)	(M)	ATION /
D E						(M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X 17 STACK 470300.00 3124100.00 5.49 0.00 GAS EXIT TEMP (DEG K)= 505.40, GAS EXIT VEL. (M/SEC)= 15.00,  
 STACK DIAMETER (M)= 0.460, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
 ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
 - SOURCE STRENGTHS (GRAMS PER SEC ) -  
 SEASON 1 SEASON 2 SEASON 3 SEASON 4  
 6.00000E-02

KILGIMMER UTILITIES NEW COMBUSTION TURBINE

1\*\*\*\* ISCLT \*\*\*\*\* ISCLT -- ANNUAL TSP

\*\*\*\*\* PAGE 22 \*\*\*\*

- SOURCE INPUT DATA (CONT.) -

C T	SOURCE	SOURCE	X	Y	EMISSION	BASE /
A A	NUMBER	TYPE	COORDINATE	COORDINATE	HEIGHT	ELEV- /
R P			(M)	(M)	(M)	ATION /
D E						(M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X 18 STACK 460100.00 3129300.00 9.14 0.00 GAS EXIT TEMP (DEG K)= 422.00, GAS EXIT VEL. (M/SEC)= 38.03,  
 STACK DIAMETER (M)= 2.440, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
 ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
 - SOURCE STRENGTHS (GRAMS PER SEC ) -  
 SEASON 1 SEASON 2 SEASON 3 SEASON 4  
 1.98000E+00

1\*\*\*\* ISCLT \*\*\*\*\* ISCLT -- ANNUAL TSP

\*\*\*\*\* PAGE 23 \*\*\*\*

- SOURCE INPUT DATA (CONT.) -

FLA DEPT AGRICULTURE PT05-01

C T	SOURCE	SOURCE	X	Y	EMISSION	BASE /
A A	NUMBER	TYPE	COORDINATE	COORDINATE	HEIGHT	ELEV- /
R P			(M)	(M)	(M)	ATION /
D E						(M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X 19 STACK 458700.00 3153400.00 9.14 0.00 GAS EXIT TEMP (DEG K)= 727.60, GAS EXIT VEL. (M/SEC)= 5.47,  
 STACK DIAMETER (M)= 0.550, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
 ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
 - SOURCE STRENGTHS (GRAMS PER SEC ) -  
 SEASON 1 SEASON 2 SEASON 3 SEASON 4  
 1.90000E-01

9b

KISSIMMEE COMMUNITY HOSPITAL PT06-01 - SOURCE INPUT DATA (CONT.) -

C T	SOURCE	SOURCE	X	Y	EMISSION	BASE /
A A	NUMBER	TYPE	COORDINATE	COORDINATE	HEIGHT	ELEV- /
R P			(M)	(M)	(M)	ATION /
D E						(M) /
X	20	STACK	459900.00	3130300.00	7.62	0.00

GAS EXIT TEMP (DEG K)= 744.50, GAS EXIT VEL. (M/SEC)= 13.78,  
 STACK DIAMETER (M)= 0.400, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
 ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
 - SOURCE STRENGTHS ( GRAMS PER SEC ) -  
 SEASON 1 SEASON 2 SEASON 3 SEASON 4  
 1.90000E-01

OWBUS ILLINOIS PT32-01, PT32-02 - SOURCE INPUT DATA (CONT.) -

C T	SOURCE	SOURCE	X	Y	EMISSION	BASE /
A A	NUMBER	TYPE	COORDINATE	COORDINATE	HEIGHT	ELEV- /
R P			(M)	(M)	(M)	ATION /
D E						(M) /
X	21	STACK	460700.00	3142000.00	9.14	0.00

GAS EXIT TEMP (DEG K)= 299.80, GAS EXIT VEL. (M/SEC)= 4.17,  
 STACK DIAMETER (M)= 0.910, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
 ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
 - SOURCE STRENGTHS ( GRAMS PER SEC ) -  
 SEASON 1 SEASON 2 SEASON 3 SEASON 4  
 1.50000E+00

GOULD BATTERY PT56-01 - SOURCE INPUT DATA (CONT.) -

C T	SOURCE	SOURCE	X	Y	EMISSION	BASE /
A A	NUMBER	TYPE	COORDINATE	COORDINATE	HEIGHT	ELEV- /
R P			(M)	(M)	(M)	ATION /
D E						(M) /
X	22	STACK	460400.00	3142600.00	7.01	0.00

GAS EXIT TEMP (DEG K)= 301.50, GAS EXIT VEL. (M/SEC)= 18.52,  
 STACK DIAMETER (M)= 0.980, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
 ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
 - SOURCE STRENGTHS ( GRAMS PER SEC ) -  
 SEASON 1 SEASON 2 SEASON 3 SEASON 4  
 1.70000E-01

GOULD BATTERY PT56-03 - SOURCE INPUT DATA (CONT.) -

C T	SOURCE	SOURCE	X	Y	EMISSION	BASE /
A A	NUMBER	TYPE	COORDINATE	COORDINATE	HEIGHT	ELEV- /
R P			(M)	(M)	(M)	ATION /
D E						(M) /

91

D E (M) /

X 23 STACK 460400.00 3142600.00 4.57 0.00 GAS EXIT TEMP (DEG K)= 294.30, GAS EXIT VEL. (M/SEC)= 15.00,  
 STACK DIAMETER (M)= 0.300, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
 ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
 - SOURCE STRENGTHS (GRAMS PER SEC ) -  
 SEASON 1 SEASON 2 SEASON 3 SEASON 4  
 1.40000E-01

1\*\*\*\* ISCLT \*\*\*\*\* ISCLT -- ANNUAL TSP

\*\*\*\*\* PAGE 28 \*\*\*\*

GOULD BATTERY PT56-05

- SOURCE INPUT DATA (CONT.) -

C T SOURCE SOURCE X Y EMISSION BASE /  
 A A NUMBER TYPE COORDINATE COORDINATE HEIGHT ELEV- /  
 R P (M) (M) (M) ATION /  
 D E (M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X 24 STACK 460400.00 3142600.00 9.14 0.00 GAS EXIT TEMP (DEG K)= 305.40, GAS EXIT VEL. (M/SEC)= 13.95,  
 STACK DIAMETER (M)= 0.760, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
 ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
 - SOURCE STRENGTHS (GRAMS PER SEC ) -  
 SEASON 1 SEASON 2 SEASON 3 SEASON 4  
 6.00000E-02

1\*\*\*\* ISCLT \*\*\*\*\* ISCLT -- ANNUAL TSP

\*\*\*\*\* PAGE 29 \*\*\*\*

FLA. MIN. MAT'L'S PT11-01

- SOURCE INPUT DATA (CONT.) -

C T SOURCE SOURCE X Y EMISSION BASE /  
 A A NUMBER TYPE COORDINATE COORDINATE HEIGHT ELEV- /  
 R P (M) (M) (M) ATION /  
 D E (M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X 25 STACK 462000.00 3149000.00 12.20 0.00 GAS EXIT TEMP (DEG K)= 299.80, GAS EXIT VEL. (M/SEC)= 0.32,  
 STACK DIAMETER (M)= 1.220, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
 ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
 - SOURCE STRENGTHS (GRAMS PER SEC ) -  
 SEASON 1 SEASON 2 SEASON 3 SEASON 4  
 1.04000E+00

1\*\*\*\* ISCLT \*\*\*\*\* ISCLT -- ANNUAL TSP

\*\*\*\*\* PAGE 30 \*\*\*\*

FLA. MIN. MAT'L'S PT12-01

- SOURCE INPUT DATA (CONT.) -

C T SOURCE SOURCE X Y EMISSION BASE /  
 A A NUMBER TYPE COORDINATE COORDINATE HEIGHT ELEV- /  
 R P (M) (M) (M) ATION /  
 D E (M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X 26 STACK 444500.00 3160000.00 10.10 0.00 GAS EXIT TEMP (DEG K)= 299.80, GAS EXIT VEL. (M/SEC)= 0.24,  
 STACK DIAMETER (M)= 1.100, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
 ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
 - SOURCE STRENGTHS (GRAMS PER SEC ) -  
 SEASON 1 SEASON 2 SEASON 3 SEASON 4

22



8.60000E-01

INLAWD MAT'LS PT20-01

- SOURCE INPUT DATA (CONT.) -

C T	SOURCE	SOURCE	X	Y	EMISSION	BASE /
A A	NUMBER	TYPE	COORDINATE	COORDINATE	HEIGHT	ELEV- /
R P			(M)	(M)	(M)	ATION /
D E						(M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X 27 STACK 459900.00 3160900.00 16.20 0.00 GAS EXIT TEMP (DEG K)= 299.80, GAS EXIT VEL. (M/SEC)= 1.57,  
 STACK DIAMETER (M)= 0.370, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
 ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
 - SOURCE STRENGTHS (GRAMS PER SEC ) -  
 SEASON 1 SEASON 2 SEASON 3 SEASON 4  
 7.50000E-01

ORLANDO PAVING PT21-01

- SOURCE INPUT DATA (CONT.) -

C T	SOURCE	SOURCE	X	Y	EMISSION	BASE /
A A	NUMBER	TYPE	COORDINATE	COORDINATE	HEIGHT	ELEV- /
R P			(M)	(M)	(M)	ATION /
D E						(M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X 28 STACK 453900.00 3160700.00 12.80 0.00 GAS EXIT TEMP (DEG K)= 331.50, GAS EXIT VEL. (M/SEC)= 8.55,  
 STACK DIAMETER (M)= 2.260, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
 ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
 - SOURCE STRENGTHS (GRAMS PER SEC ) -  
 SEASON 1 SEASON 2 SEASON 3 SEASON 4  
 1.04000E+00

KISSAM ROCK IND PT23-01

- SOURCE INPUT DATA (CONT.) -

C T	SOURCE	SOURCE	X	Y	EMISSION	BASE /
A A	NUMBER	TYPE	COORDINATE	COORDINATE	HEIGHT	ELEV- /
R P			(M)	(M)	(M)	ATION /
D E						(M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X 29 STACK 461300.00 3157900.00 18.30 0.00 GAS EXIT TEMP (DEG K)= 299.80, GAS EXIT VEL. (M/SEC)= 1.34,  
 STACK DIAMETER (M)= 0.400, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
 ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
 - SOURCE STRENGTHS (GRAMS PER SEC ) -  
 SEASON 1 SEASON 2 SEASON 3 SEASON 4  
 1.24000E+00

FLA ROCK IND PT24-01

- SOURCE INPUT DATA (CONT.) -

C T	SOURCE	SOURCE	X	Y	EMISSION	BASE /
-----	--------	--------	---	---	----------	--------

93

A A NUMBER TYPE COORDINATE COORDINATE HEIGHT ELEV- / - SOURCE DETAILS DEPENDING ON TYPE -  
 R P (M) (M) (M) ATION /  
 D E (M) /

---

X 30 STACK 459200.00 3174200.00 3.70 0.00 GAS EXIT TEMP (DEG K)= 299.80, GAS EXIT VEL. (M/SEC)= 17.35,  
 STACK DIAMETER (M)= 0.580, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
 ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
 - SOURCE STRENGTHS ( GRAMS PER SEC ) -  
 SEASON 1 SEASON 2 SEASON 3 SEASON 4  
 1.24000E+00

1 \*\*\*\*\* ISCLT \*\*\*\*\* ISCLT -- ANNUAL TSP

\*\*\*\*\* PAGE 35 \*\*\*\*

FLA ROCK IND PT24-02, PT 24-03 - SOURCE INPUT DATA (CONT.) -

C T SOURCE SOURCE X Y EMISSION BASE /  
 A A NUMBER TYPE COORDINATE COORDINATE HEIGHT ELEV- / - SOURCE DETAILS DEPENDING ON TYPE -  
 R P (M) (M) (M) ATION /  
 D E (M) /

---

X 31 STACK 459200.00 3174200.00 16.80 0.00 GAS EXIT TEMP (DEG K)= 299.80, GAS EXIT VEL. (M/SEC)= 35.07,  
 STACK DIAMETER (M)= 0.090, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
 ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
 - SOURCE STRENGTHS ( GRAMS PER SEC ) -  
 SEASON 1 SEASON 2 SEASON 3 SEASON 4  
 2.48000E+00

1 \*\*\*\*\* ISCLT \*\*\*\*\* ISCLT -- ANNUAL TSP

\*\*\*\*\* PAGE 36 \*\*\*\*

RINKER MAT'LS PT25-01 - SOURCE INPUT DATA (CONT.) -

C T SOURCE SOURCE X Y EMISSION BASE /  
 A A NUMBER TYPE COORDINATE COORDINATE HEIGHT ELEV- / - SOURCE DETAILS DEPENDING ON TYPE -  
 R P (M) (M) (M) ATION /  
 D E (M) /

---

X 32 STACK 458300.00 3165000.00 3.40 0.00 GAS EXIT TEMP (DEG K)= 297.00, GAS EXIT VEL. (M/SEC)= 43.12,  
 STACK DIAMETER (M)= 0.370, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
 ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
 - SOURCE STRENGTHS ( GRAMS PER SEC ) -  
 SEASON 1 SEASON 2 SEASON 3 SEASON 4  
 1.44000E+00

1 \*\*\*\*\* ISCLT \*\*\*\*\* ISCLT -- ANNUAL TSP

\*\*\*\*\* PAGE 37 \*\*\*\*

RINKER MAT'LS PT25-02 - SOURCE INPUT DATA (CONT.) -

C T SOURCE SOURCE X Y EMISSION BASE /  
 A A NUMBER TYPE COORDINATE COORDINATE HEIGHT ELEV- / - SOURCE DETAILS DEPENDING ON TYPE -  
 R P (M) (M) (M) ATION /  
 D E (M) /

---

X 33 STACK 458300.00 3165000.00 24.90 0.00 GAS EXIT TEMP (DEG K)= 299.80, GAS EXIT VEL. (M/SEC)= 0.11,  
 STACK DIAMETER (M)= 1.220, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
 ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0

94

- SOURCE STRENGTHS ( GRAMS PER SEC ) -  
SEASON 1 SEASON 2 SEASON 3 SEASON 4  
1.15000E+00

1\*\*\*\* ISCLT \*\*\*\*\* ISCLT -- ANNUAL TSP

\*\*\*\*\* PAGE 38 \*\*\*\*

LONG STAR PT27-01

- SOURCE INPUT DATA (CONT.) -

C T SOURCE SOURCE X Y EMISSION BASE /  
A A NUMBER TYPE COORDINATE COORDINATE HEIGHT ELEV- /  
R P (M) (M) (M) ATION /  
D E (M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X 34 STACK 462600.00 3154200.00 14.60 0.00 GAS EXIT TEMP (DEG K)= 299.80, GAS EXIT VEL. (M/SEC)= 0.52,  
STACK DIAMETER (M)= 0.910, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0

- SOURCE STRENGTHS ( GRAMS PER SEC ) -  
SEASON 1 SEASON 2 SEASON 3 SEASON 4  
9.50000E-01

1\*\*\*\* ISCLT \*\*\*\*\* ISCLT -- ANNUAL TSP

\*\*\*\*\* PAGE 39 \*\*\*\*

ORLANDO PAVING PT31-01

- SOURCE INPUT DATA (CONT.) -

C T SOURCE SOURCE X Y EMISSION BASE /  
A A NUMBER TYPE COORDINATE COORDINATE HEIGHT ELEV- /  
R P (M) (M) (M) ATION /  
D E (M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X 35 STACK 465300.00 3145900.00 9.10 0.00 GAS EXIT TEMP (DEG K)= 644.30, GAS EXIT VEL. (M/SEC)= 5.75,  
STACK DIAMETER (M)= 0.460, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0

- SOURCE STRENGTHS ( GRAMS PER SEC ) -  
SEASON 1 SEASON 2 SEASON 3 SEASON 4  
1.21000E+00

1\*\*\*\* ISCLT \*\*\*\*\* ISCLT -- ANNUAL TSP

\*\*\*\*\* PAGE 40 \*\*\*\*

KIMBER MAT'LS PT 36-01

- SOURCE INPUT DATA (CONT.) -

C T SOURCE SOURCE X Y EMISSION BASE /  
A A NUMBER TYPE COORDINATE COORDINATE HEIGHT ELEV- /  
R P (M) (M) (M) ATION /  
D E (M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X 36 STACK 470700.00 3163900.00 2.70 0.00 GAS EXIT TEMP (DEG K)= 299.80, GAS EXIT VEL. (M/SEC)= 4.22,  
STACK DIAMETER (M)= 1.070, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0

- SOURCE STRENGTHS ( GRAMS PER SEC ) -  
SEASON 1 SEASON 2 SEASON 3 SEASON 4  
1.15000E+00

1\*\*\*\* ISCLT \*\*\*\*\* ISCLT -- ANNUAL TSP

\*\*\*\*\* PAGE 41 \*\*\*\*

- SOURCE INPUT DATA (CONT.) -

95

RINKER MAT'LS PT 37-01

C T SOURCE	SOURCE	X	Y	EMISSION	BASE /
A A NUMBER	TYPE	COORDINATE	COORDINATE	HEIGHT	ELEV- /
R P		(M)	(M)	(M)	ATION /
D E				(M)	/

- SOURCE DETAILS DEPENDING ON TYPE -

X 37 STACK 462500.00 3154300.00 20.40 0.00 GAS EXIT TEMP (DEG K)= 298.20, GAS EXIT VEL. (M/SEC)= 0.13,  
 STACK DIAMETER (M)= 4.850, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
 - SOURCE STRENGTHS (GRAMS PER SEC ) -  
 SEASON 1 SEASON 2 SEASON 3 SEASON 4  
 1.32000E+00

1\*\*\*\* ISCLT \*\*\*\*\* ISCLT -- ANNUAL TSP

\*\*\*\*\* PAGE 42 \*\*\*\*

RINKER MAT'LS PT 37-02

- SOURCE INPUT DATA (CONT.) -

C T SOURCE	SOURCE	X	Y	EMISSION	BASE /
A A NUMBER	TYPE	COORDINATE	COORDINATE	HEIGHT	ELEV- /
R P		(M)	(M)	(M)	ATION /
D E				(M)	/

- SOURCE DETAILS DEPENDING ON TYPE -

X 38 STACK 462500.00 3154300.00 20.40 0.00 GAS EXIT TEMP (DEG K)= 297.00, GAS EXIT VEL. (M/SEC)= 0.17,  
 STACK DIAMETER (M)= 1.340, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
 - SOURCE STRENGTHS (GRAMS PER SEC ) -  
 SEASON 1 SEASON 2 SEASON 3 SEASON 4  
 1.32000E+00

1\*\*\*\* ISCLT \*\*\*\*\* ISCLT -- ANNUAL TSP

\*\*\*\*\* PAGE 43 \*\*\*\*

RINKER MAT'LS PT 38-02

- SOURCE INPUT DATA (CONT.) -

C T SOURCE	SOURCE	X	Y	EMISSION	BASE /
A A NUMBER	TYPE	COORDINATE	COORDINATE	HEIGHT	ELEV- /
R P		(M)	(M)	(M)	ATION /
D E				(M)	/

- SOURCE DETAILS DEPENDING ON TYPE -

X 39 STACK 450600.00 3145500.00 15.20 0.00 GAS EXIT TEMP (DEG K)= 299.80, GAS EXIT VEL. (M/SEC)= 0.24,  
 STACK DIAMETER (M)= 4.180, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
 - SOURCE STRENGTHS (GRAMS PER SEC ) -  
 SEASON 1 SEASON 2 SEASON 3 SEASON 4  
 1.76000E+00

1\*\*\*\* ISCLT \*\*\*\*\* ISCLT -- ANNUAL TSP

\*\*\*\*\* PAGE 44 \*\*\*\*

RINKER MAT'LS PT 38-03, PT 38-04

- SOURCE INPUT DATA (CONT.) -

C T SOURCE	SOURCE	X	Y	EMISSION	BASE /
A A NUMBER	TYPE	COORDINATE	COORDINATE	HEIGHT	ELEV- /
R P		(M)	(M)	(M)	ATION /
D E				(M)	/

- SOURCE DETAILS DEPENDING ON TYPE -

X 40 STACK 450600.00 3145500.00 26.50 0.00 GAS EXIT TEMP (DEG K)= 299.80, GAS EXIT VEL. (M/SEC)= 0.02,

96

STACK DIAMETER (M)= 4.390, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
- SOURCE STRENGTHS ( GRAMS PER SEC ) -  
SEASON 1 SEASON 2 SEASON 3 SEASON 4  
2.88000E+00

1\*\*\*\* ISCLT \*\*\*\*\* ISCLT -- ANNUAL TSP

\*\*\*\*\* PAGE 45 \*\*\*\*

SOUTHERN FRUIT PT39-01

- SOURCE INPUT DATA (CONT.) -

C T SOURCE SOURCE X Y EMISSION BASE /  
A A NUMBER TYPE COORDINATE COORDINATE HEIGHT ELEV- /  
R P (M) (M) (M) ATION /  
D E (M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X 41 STACK 462900.00 3153300.00 16.20 0.00 GAS EXIT TEMP (DEG K)= 388.70, GAS EXIT VEL. (M/SEC)= 15.63,  
STACK DIAMETER (M)= 1.460, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
- SOURCE STRENGTHS ( GRAMS PER SEC ) -  
SEASON 1 SEASON 2 SEASON 3 SEASON 4  
1.58000E+00

1\*\*\*\* ISCLT \*\*\*\*\* ISCLT -- ANNUAL TSP

\*\*\*\*\* PAGE 46 \*\*\*\*

CHARNS CONCRETE PIPE PT50-01

- SOURCE INPUT DATA (CONT.) -

C T SOURCE SOURCE X Y EMISSION BASE /  
A A NUMBER TYPE COORDINATE COORDINATE HEIGHT ELEV- /  
R P (M) (M) (M) ATION /  
D E (M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X 42 STACK 454600.00 3167800.00 15.20 0.00 GAS EXIT TEMP (DEG K)= 297.00, GAS EXIT VEL. (M/SEC)= 0.59,  
STACK DIAMETER (M)= 1.520, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
- SOURCE STRENGTHS ( GRAMS PER SEC ) -  
SEASON 1 SEASON 2 SEASON 3 SEASON 4  
9.50000E-01

1\*\*\*\* ISCLT \*\*\*\*\* ISCLT -- ANNUAL TSP

\*\*\*\*\* PAGE 47 \*\*\*\*

WINTER GARDEN CITRUS PT53-01, PT53-02

- SOURCE INPUT DATA (CONT.) -

C T SOURCE SOURCE X Y EMISSION BASE /  
A A NUMBER TYPE COORDINATE COORDINATE HEIGHT ELEV- /  
R P (M) (M) (M) ATION /  
D E (M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X 43 STACK 443800.00 3159600.00 24.40 0.00 GAS EXIT TEMP (DEG K)= 338.70, GAS EXIT VEL. (M/SEC)= 8.08,  
STACK DIAMETER (M)= 1.190, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
- SOURCE STRENGTHS ( GRAMS PER SEC ) -  
SEASON 1 SEASON 2 SEASON 3 SEASON 4  
2.48000E+00

1\*\*\*\* ISCLT \*\*\*\*\* ISCLT -- ANNUAL TSP

\*\*\*\*\* PAGE 48 \*\*\*\*

66

WINTER GARDEN CITRUS PT53-06, PT53-12

- SOURCE INPUT DATA (CONT.) -

C T	SOURCE	SOURCE	X	Y	EMISSION	BASE /
A A	NUMBER	TYPE	COORDINATE	COORDINATE	HEIGHT	ELEV- /
R P			(M)	(M)	(M)	ATION /
D E						(M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X 44 STACK 443800.00 3159600.00 15.20 0.00 GAS EXIT TEMP (DEG K)= 308.20, GAS EXIT VEL. (M/SEC)= 17.85,  
 STACK DIAMETER (M)= 1.160, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
 ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
 - SOURCE STRENGTHS (GRAMS PER SEC ) -  
 SEASON 1 SEASON 2 SEASON 3 SEASON 4  
 2.54000E+00

WINTER GARDEN CITRUS PT53-14

- SOURCE INPUT DATA (CONT.) -

C T	SOURCE	SOURCE	X	Y	EMISSION	BASE /
A A	NUMBER	TYPE	COORDINATE	COORDINATE	HEIGHT	ELEV- /
R P			(M)	(M)	(M)	ATION /
D E						(M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X 45 STACK 443800.00 3159600.00 24.40 0.00 GAS EXIT TEMP (DEG K)= 340.40, GAS EXIT VEL. (M/SEC)= 17.11,  
 STACK DIAMETER (M)= 0.820, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
 ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
 - SOURCE STRENGTHS (GRAMS PER SEC ) -  
 SEASON 1 SEASON 2 SEASON 3 SEASON 4  
 3.17000E+00

A1 Block PT58-01

- SOURCE INPUT DATA (CONT.) -

C T	SOURCE	SOURCE	X	Y	EMISSION	BASE /
A A	NUMBER	TYPE	COORDINATE	COORDINATE	HEIGHT	ELEV- /
R P			(M)	(M)	(M)	ATION /
D E						(M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X 46 STACK 462500.00 3155000.00 16.80 0.00 GAS EXIT TEMP (DEG K)= 299.80, GAS EXIT VEL. (M/SEC)= 0.20,  
 STACK DIAMETER (M)= 1.220, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
 ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
 - SOURCE STRENGTHS (GRAMS PER SEC ) -  
 SEASON 1 SEASON 2 SEASON 3 SEASON 4  
 1.87000E+00

A4 Block PT58-02

- SOURCE INPUT DATA (CONT.) -

C T	SOURCE	SOURCE	X	Y	EMISSION	BASE /
A A	NUMBER	TYPE	COORDINATE	COORDINATE	HEIGHT	ELEV- /
R P			(M)	(M)	(M)	ATION /
D E						(M) /

- SOURCE DETAILS DEPENDING ON TYPE -

88

X 47 STACK 462500.00 3155000.00 16.80 0.00 GAS EXIT TEMP (DEG K)= 299.80, GAS EXIT VEL. (M/SEC)= 0.30,  
 STACK DIAMETER (M)= 1.220, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
 ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
 - SOURCE STRENGTHS (GRAMS PER SEC ) -  
 SEASON 1 SEASON 2 SEASON 3 SEASON 4  
 2.16000E+00

MEDUSA CEMENT PT59-01

- SOURCE INPUT DATA (CONT.) -

C T SOURCE	SOURCE	X	Y	EMISSION	BASE /
A A NUMBER	TYPE	COORDINATE	COORDINATE	HEIGHT	ELEV- /
R P		(M)	(M)	(M)	ATION /
D E				(M)	/

- SOURCE DETAILS DEPENDING ON TYPE -

X 48 STACK 462600.00 3154400.00 11.30 0.00 GAS EXIT TEMP (DEG K)= 299.80, GAS EXIT VEL. (M/SEC)= 19.40,  
 STACK DIAMETER (M)= 0.300, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
 ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
 - SOURCE STRENGTHS (GRAMS PER SEC ) -  
 SEASON 1 SEASON 2 SEASON 3 SEASON 4  
 1.12000E+00

MEDUSA CEMENT PT59-02

- SOURCE INPUT DATA (CONT.) -

C T SOURCE	SOURCE	X	Y	EMISSION	BASE /
A A NUMBER	TYPE	COORDINATE	COORDINATE	HEIGHT	ELEV- /
R P		(M)	(M)	(M)	ATION /
D E				(M)	/

- SOURCE DETAILS DEPENDING ON TYPE -

X 49 STACK 462600.00 3154400.00 0.60 0.00 GAS EXIT TEMP (DEG K)= 299.80, GAS EXIT VEL. (M/SEC)= 10.78,  
 STACK DIAMETER (M)= 0.090, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
 ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
 - SOURCE STRENGTHS (GRAMS PER SEC ) -  
 SEASON 1 SEASON 2 SEASON 3 SEASON 4  
 8.60000E-01

FLA. ROCK IND PT71-02, PT71-01

- SOURCE INPUT DATA (CONT.) -

C T SOURCE	SOURCE	X	Y	EMISSION	BASE /
A A NUMBER	TYPE	COORDINATE	COORDINATE	HEIGHT	ELEV- /
R P		(M)	(M)	(M)	ATION /
D E				(M)	/

- SOURCE DETAILS DEPENDING ON TYPE -

X 50 STACK 463000.00 3145500.00 16.80 0.00 GAS EXIT TEMP (DEG K)= 299.80, GAS EXIT VEL. (M/SEC)= 1.62,  
 STACK DIAMETER (M)= 0.370, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
 ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
 - SOURCE STRENGTHS (GRAMS PER SEC ) -  
 SEASON 1 SEASON 2 SEASON 3 SEASON 4  
 1.96000E+00

69

FLA. ROCK IND PT71-05

- SOURCE INPUT DATA (CONT.) -

C T	SOURCE	SOURCE	X	Y	EMISSION	BASE /
A A	NUMBER	TYPE	COORDINATE	COORDINATE	HEIGHT	ELEV- /
R P			(M)	(M)	(M)	ATION /
D E						(M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X 51 STACK 463000.00 3145500.00 16.80 0.00 GAS EXIT TEMP (DEG K)= 299.80, GAS EXIT VEL. (M/SEC)= 1.62,  
 STACK DIAMETER (M)= 0.370, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
 ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
 - SOURCE STRENGTHS (GRAMS PER SEC ) -  
 SEASON 1 SEASON 2 SEASON 3 SEASON 4  
 1.12000E+00

STANDARD SAND SILICA PT4-03

- SOURCE INPUT DATA (CONT.) -

C T	SOURCE	SOURCE	X	Y	EMISSION	BASE /
A A	NUMBER	TYPE	COORDINATE	COORDINATE	HEIGHT	ELEV- /
R P			(M)	(M)	(M)	ATION /
D E						(M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X 52 STACK 441500.00 3118200.00 25.90 0.00 GAS EXIT TEMP (DEG K)= 377.60, GAS EXIT VEL. (M/SEC)= 26.94,  
 STACK DIAMETER (M)= 0.490, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
 ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
 - SOURCE STRENGTHS (GRAMS PER SEC ) -  
 SEASON 1 SEASON 2 SEASON 3 SEASON 4  
 1.76000E+00

STANDARD SAND SILICA PT14-04

- SOURCE INPUT DATA (CONT.) -

C T	SOURCE	SOURCE	X	Y	EMISSION	BASE /
A A	NUMBER	TYPE	COORDINATE	COORDINATE	HEIGHT	ELEV- /
R P			(M)	(M)	(M)	ATION /
D E						(M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X 53 STACK 441500.00 3118200.00 25.90 0.00 GAS EXIT TEMP (DEG K)= 314.80, GAS EXIT VEL. (M/SEC)= 8.85,  
 STACK DIAMETER (M)= 1.220, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
 ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
 - SOURCE STRENGTHS (GRAMS PER SEC ) -  
 SEASON 1 SEASON 2 SEASON 3 SEASON 4  
 8.10000E-01

SWIFT AGRICHEM PT17-01

- SOURCE INPUT DATA (CONT.) -

C T	SOURCE	SOURCE	X	Y	EMISSION	BASE /
A A	NUMBER	TYPE	COORDINATE	COORDINATE	HEIGHT	ELEV- /

- SOURCE DETAILS DEPENDING ON TYPE -

100



R P (M) (M) (M) ATION /  
D E (M) /

X 54 STACK 427900.00 3097400.00 10.10 0.00 GAS EXIT TEMP (DEG K)= 297.00, GAS EXIT VEL. (M/SEC)= 6.61,  
STACK DIAMETER (M)= 0.550, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
- SOURCE STRENGTHS (GRAMS PER SEC ) -  
SEASON 1 SEASON 2 SEASON 3 SEASON 4  
9.50000E-01

- SOURCE INPUT DATA (CONT.) -

SWIFT AGRICHEM PT17-04

C T SOURCE SOURCE X Y EMISSION BASE /  
A A NUMBER TYPE COORDINATE COORDINATE HEIGHT ELEV- /  
R P (M) (M) (M) ATION /  
D E (M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X 55 STACK 427900.00 3097400.00 10.10 0.00 GAS EXIT TEMP (DEG K)= 294.30, GAS EXIT VEL. (M/SEC)= 17.64,  
STACK DIAMETER (M)= 0.340, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
- SOURCE STRENGTHS (GRAMS PER SEC ) -  
SEASON 1 SEASON 2 SEASON 3 SEASON 4  
8.90000E-01

- SOURCE INPUT DATA (CONT.) -

COCA COLA PT23-01

C T SOURCE SOURCE X Y EMISSION BASE /  
A A NUMBER TYPE COORDINATE COORDINATE HEIGHT ELEV- /  
R P (M) (M) (M) ATION /  
D E (M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X 56 STACK 421300.00 3103600.00 28.30 0.00 GAS EXIT TEMP (DEG K)= 333.20, GAS EXIT VEL. (M/SEC)= 16.84,  
STACK DIAMETER (M)= 1.070, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
- SOURCE STRENGTHS (GRAMS PER SEC ) -  
SEASON 1 SEASON 2 SEASON 3 SEASON 4  
1.56000E+00

- SOURCE INPUT DATA (CONT.) -

COCA COLA PT23-02

C T SOURCE SOURCE X Y EMISSION BASE /  
A A NUMBER TYPE COORDINATE COORDINATE HEIGHT ELEV- /  
R P (M) (M) (M) ATION /  
D E (M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X 57 STACK 421300.00 3103600.00 17.40 0.00 GAS EXIT TEMP (DEG K)= 547.00, GAS EXIT VEL. (M/SEC)= 15.24,  
STACK DIAMETER (M)= 1.830, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
- SOURCE STRENGTHS (GRAMS PER SEC ) -

101

SEASON 1 SEASON 2 SEASON 3 SEASON 4  
1.04000E+00

*COCA COLA PT23-03*

- SOURCE INPUT DATA (CONT.) -

C T SOURCE SOURCE X Y EMISSION BASE /  
A A NUMBER TYPE COORDINATE COORDINATE HEIGHT ELEV- /  
R P (M) (M) (M) ATION /  
D E (M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X 58 STACK 421300.00 3103600.00 30.50 0.00 GAS EXIT TEMP (DEG K)= 334.80, GAS EXIT VEL. (M/SEC)= 15.16,  
STACK DIAMETER (M)= 0.980, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
- SOURCE STRENGTHS (GRAMS PER SEC ) -  
SEASON 1 SEASON 2 SEASON 3 SEASON 4  
9.50000E-01

*BORDO CITRUS PT33-01*

- SOURCE INPUT DATA (CONT.) -

C T SOURCE SOURCE X Y EMISSION BASE /  
A A NUMBER TYPE COORDINATE COORDINATE HEIGHT ELEV- /  
R P (M) (M) (M) ATION /  
D E (M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X 59 STACK 438000.00 3109000.00 14.60 0.00 GAS EXIT TEMP (DEG K)= 349.80, GAS EXIT VEL. (M/SEC)= 8.41,  
STACK DIAMETER (M)= 1.680, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
- SOURCE STRENGTHS (GRAMS PER SEC ) -  
SEASON 1 SEASON 2 SEASON 3 SEASON 4  
1.30000E+00

*BORDO CITRUS PT33-02*

- SOURCE INPUT DATA (CONT.) -

C T SOURCE SOURCE X Y EMISSION BASE /  
A A NUMBER TYPE COORDINATE COORDINATE HEIGHT ELEV- /  
R P (M) (M) (M) ATION /  
D E (M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X 60 STACK 438000.00 3109000.00 14.60 0.00 GAS EXIT TEMP (DEG K)= 349.80, GAS EXIT VEL. (M/SEC)= 8.41,  
STACK DIAMETER (M)= 1.680, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
- SOURCE STRENGTHS (GRAMS PER SEC ) -  
SEASON 1 SEASON 2 SEASON 3 SEASON 4  
1.58000E+00

- SOURCE INPUT DATA (CONT.) -

102

ADAMS PACKING PT37-01

C T	SOURCE	SOURCE	X	Y	EMISSION	BASE /
A A	NUMBER	TYPE	COORDINATE	COORDINATE	HEIGHT	ELEV- /
R P			(M)	(M)	(M)	ATION /
D E						(M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X 61 STACK 421700.00 3104200.00 28.00 0.00 GAS EXIT TEMP (DEG K)= 347.00, GAS EXIT VEL. (M/SEC)= 7.20,  
 STACK DIAMETER (M)= 1.430, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
 ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
 - SOURCE STRENGTHS ( GRAMS PER SEC ) -  
 SEASON 1 SEASON 2 SEASON 3 SEASON 4  
 9.80000E-01

HOLLY HILL FRUIT PT61-04

- SOURCE INPUT DATA (CONT.) -

C T	SOURCE	SOURCE	X	Y	EMISSION	BASE /
A A	NUMBER	TYPE	COORDINATE	COORDINATE	HEIGHT	ELEV- /
R P			(M)	(M)	(M)	ATION /
D E						(M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X 62 STACK 441000.00 3115400.00 18.00 0.00 GAS EXIT TEMP (DEG K)= 344.30, GAS EXIT VEL. (M/SEC)= 18.98,  
 STACK DIAMETER (M)= 0.850, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
 ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
 - SOURCE STRENGTHS ( GRAMS PER SEC ) -  
 SEASON 1 SEASON 2 SEASON 3 SEASON 4  
 2.22000E+00

MASASPHALT PT82-01

- SOURCE INPUT DATA (CONT.) -

C T	SOURCE	SOURCE	X	Y	EMISSION	BASE /
A A	NUMBER	TYPE	COORDINATE	COORDINATE	HEIGHT	ELEV- /
R P			(M)	(M)	(M)	ATION /
D E						(M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X 63 STACK 423100.00 3101500.00 12.20 0.00 GAS EXIT TEMP (DEG K)= 335.90, GAS EXIT VEL. (M/SEC)= 2.58,  
 STACK DIAMETER (M)= 3.670, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
 ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
 - SOURCE STRENGTHS ( GRAMS PER SEC ) -  
 SEASON 1 SEASON 2 SEASON 3 SEASON 4  
 1.41000E+00

KISSAM CONCRBTE PT05-01

- SOURCE INPUT DATA (CONT.) -

C T	SOURCE	SOURCE	X	Y	EMISSION	BASE /
A A	NUMBER	TYPE	COORDINATE	COORDINATE	HEIGHT	ELEV- /
R P			(M)	(M)	(M)	ATION /
D E						(M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X 64 STACK 465100.00 3170400.00 18.30 0.00 GAS EXIT TEMP (DEG K)= 299.80, GAS EXIT VEL. (M/SEC)= 2.26,  
 STACK DIAMETER (M)= 0.300, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF

103

ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
- SOURCE STRENGTHS ( GRAMS PER SEC ) -  
SEASON 1 SEASON 2 SEASON 3 SEASON 4  
1.09000E+00

COCA-COLA PT06-01

- SOURCE INPUT DATA (CONT.) -

C T SOURCE SOURCE X Y EMISSION BASE /  
A A NUMBER TYPE COORDINATE COORDINATE HEIGHT ELEV- /  
R P (M) (M) (M) ATION /  
D E (M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X 65 STACK 459400.00 3170500.00 25.90 0.00 GAS EXIT TEMP (DEG K)= 346.50, GAS EXIT VEL. (M/SEC)= 10.00,  
STACK DIAMETER (M)= 0.350, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
- SOURCE STRENGTHS ( GRAMS PER SEC ) -  
SEASON 1 SEASON 2 SEASON 3 SEASON 4  
1.38000E+00

ALCOMA PACKING PT01-05

- SOURCE INPUT DATA (CONT.) -

C T SOURCE SOURCE X Y EMISSION BASE /  
A A NUMBER TYPE COORDINATE COORDINATE HEIGHT ELEV- /  
R P (M) (M) (M) ATION /  
D E (M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X 66 STACK 451600.00 3085500.00 27.10 0.00 GAS EXIT TEMP (DEG K)= 333.20, GAS EXIT VEL. (M/SEC)= 10.30,  
STACK DIAMETER (M)= 0.970, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
- SOURCE STRENGTHS ( GRAMS PER SEC ) -  
SEASON 1 SEASON 2 SEASON 3 SEASON 4  
1.84000E+00

OWENS ILL PT07-01

- SOURCE INPUT DATA (CONT.) -

C T SOURCE SOURCE X Y EMISSION BASE /  
A A NUMBER TYPE COORDINATE COORDINATE HEIGHT ELEV- /  
R P (M) (M) (M) ATION /  
D E (M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X 67 STACK 423400.00 3102800.00 22.90 0.00 GAS EXIT TEMP (DEG K)= 616.50, GAS EXIT VEL. (M/SEC)= 10.20,  
STACK DIAMETER (M)= 0.910, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
- SOURCE STRENGTHS ( GRAMS PER SEC ) -  
SEASON 1 SEASON 2 SEASON 3 SEASON 4  
1.35000E+00

104

OWENS ILL PT07-02

- SOURCE INPUT DATA (CONT.) -

C T	SOURCE	SOURCE	X	Y	EMISSION	BASE /
A A	NUMBER	TYPE	COORDINATE	COORDINATE	HEIGHT	ELEV- /
R P			(M)	(M)	(M)	ATION /
D E						(M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X 68 STACK 423400.00 3102800.00 30.50 0.00 GAS EXIT TEMP (DEG K)= 667.60, GAS EXIT VEL. (M/SEC)= 8.74,  
 STACK DIAMETER (M)= 0.910, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
 ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0

- SOURCE STRENGTHS ( GRAMS PER SEC ) -

SEASON 1	SEASON 2	SEASON 3	SEASON 4
1.32000E+00			

105

Page 106 was removed intentionally.

\*\* ANNUAL GROUND LEVEL CONCENTRATION ( MICROGRAMS PER CUBIC METER ) FROM ALL SOURCES COMBINED \*\*

Y AXIS (DISTANCE	455600.000	456600.000	457600.000	458600.000	459600.000	460600.000	461600.000	462600.000	463600.000
, METERS )	- CONCENTRATION -								
3133800.000	2.245856	2.427762	2.680215	3.378129	3.260363	3.045914	2.366919	2.121501	2.001059
3132800.000	2.341279	2.533473	2.908910	3.611741	3.649281	3.339121	2.293711	2.234515	2.087627
3131800.000	2.444424	2.698689	3.045435	3.561871	4.352484	3.759547	2.598719	2.452543	2.192334
3130800.000	2.707517	2.926487	3.466785	4.242141	5.697381	4.196010	3.252588	2.695564	2.307661
3129800.000	3.205897	3.776152	4.698115	6.039921	8.169916	6.169805	4.028359	3.135576	2.599305
3128800.000	3.332613	3.975383	5.088609	7.076319	12.141668	5.159636	4.198111	3.176387	2.621487
3127800.000	3.044877	3.453615	4.352426	5.928562	7.002213	4.597054	2.691142	2.605469	2.385247
3126800.000	2.914648	3.329578	3.938472	4.337887	5.140557	4.224217	2.512691	2.164910	2.155696
3125800.000	2.224825	3.117635	3.327342	3.462482	4.072254	3.628188	2.336672	2.154866	2.013765
3124800.000	2.653468	2.774981	2.877188	3.055317	3.417007	3.175718	2.403286	2.101062	2.034462

- GRID SYSTEM RECEPTORS -  
- X AXIS (DISTANCE, METERS) -

Y AXIS (DISTANCE	464600.000
, METERS )	- CONCENTRATION -
3133800.000	1.856926
3132800.000	1.899871
3131800.000	1.962985
3130800.000	2.076941
3129800.000	2.257932
3128800.000	2.285676
3127800.000	2.162861
3126800.000	2.095856
3125800.000	2.051329
3124800.000	2.010640

107

202.500	0.00326299	0.00625198	0.00116400	0.00000000	0.00000000	0.00000000
225.000	0.00367199	0.00821498	0.00212199	0.00000000	0.00000000	0.00000000
247.500	0.00448799	0.00823698	0.00209899	0.00000000	0.00000000	0.00000000
270.000	0.00535199	0.01081597	0.00570499	0.00000000	0.00000000	0.00000000
292.500	0.00445199	0.00853398	0.00444999	0.00000000	0.00000000	0.00000000
315.000	0.00192800	0.00342299	0.00292099	0.00000000	0.00000000	0.00000000
337.500	0.00329399	0.00679998	0.00435799	0.00000000	0.00000000	0.00000000

- VERTICAL POTENTIAL TEMPERATURE GRADIENT (DEGREES KELVIN/METER) -

	WIND SPEED	WIND SPEED	WIND SPEED	WIND SPEED	WIND SPEED	WIND SPEED
	CATEGORY 1	CATEGORY 2	CATEGORY 3	CATEGORY 4	CATEGORY 5	CATEGORY 6
STABILITY CATEGORY 10	0.000000E+000	0.000000E+000	0.000000E+000	0.000000E+000	0.000000E+000	0.000000E+000
STABILITY CATEGORY 20	0.000000E+000	0.000000E+000	0.000000E+000	0.000000E+000	0.000000E+000	0.000000E+000
STABILITY CATEGORY 30	0.000000E+000	0.000000E+000	0.000000E+000	0.000000E+000	0.000000E+000	0.000000E+000
STABILITY CATEGORY 40	0.000000E+000	0.000000E+000	0.000000E+000	0.000000E+000	0.000000E+000	0.000000E+000
STABILITY CATEGORY 50	0.200000E-010	0.200000E-010	0.200000E-010	0.200000E-010	0.200000E-010	0.200000E-010

- WIND PROFILE POWER LAW EXPONENTS -

	WIND SPEED	WIND SPEED	WIND SPEED	WIND SPEED	WIND SPEED	WIND SPEED
	CATEGORY 1	CATEGORY 2	CATEGORY 3	CATEGORY 4	CATEGORY 5	CATEGORY 6
STABILITY CATEGORY 10	0.100000E+000	0.100000E+000	0.100000E+000	0.100000E+000	0.100000E+000	0.100000E+000
STABILITY CATEGORY 20	0.150000E+000	0.150000E+000	0.150000E+000	0.150000E+000	0.150000E+000	0.150000E+000
STABILITY CATEGORY 30	0.200000E+000	0.200000E+000	0.200000E+000	0.200000E+000	0.200000E+000	0.200000E+000
STABILITY CATEGORY 40	0.250000E+000	0.250000E+000	0.250000E+000	0.250000E+000	0.250000E+000	0.250000E+000
STABILITY CATEGORY 50	0.300000E+000	0.300000E+000	0.300000E+000	0.300000E+000	0.300000E+000	0.300000E+000

ORLANDO UTILITIES PT 3301-33-03 - SOURCE INPUT DATA -

C T	SOURCE	SOURCE	X	Y	EMISSION	BASE /
A A	NUMBER	TYPE	COORDINATE	COORDINATE	HEIGHT	ELEV- /
R P			(M)	(M)	(M)	ATION /
D E						(M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X	1	STACK	463300.00	3159000.00	34.40	0.00	GAS EXIT TEMP (DEG K)= 422.00, GAS EXIT VEL. (M/SEC)= 17.00, STACK DIAMETER (M)= 1.830, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0
							- SOURCE STRENGTHS (GRAMS PER SEC)
							SEASON 1 SEASON 2 SEASON 3 SEASON 4
							6.30000E+01

ORLANDO UTILITIES PT 33-04, PT 33-05 - SOURCE INPUT DATA (CONT.) -

C T	SOURCE	SOURCE	X	Y	EMISSION	BASE /
A A	NUMBER	TYPE	COORDINATE	COORDINATE	HEIGHT	ELEV- /
R P			(M)	(M)	(M)	ATION /
D E						(M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X	2	STACK	463300.00	3159000.00	34.40	0.00	GAS EXIT TEMP (DEG K)= 422.00, GAS EXIT VEL. (M/SEC)= 10.16, STACK DIAMETER (M)= 2.440, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0
							- SOURCE STRENGTHS (GRAMS PER SEC)

108



SEASON 1 SEASON 2 SEASON 3 SEASON 4  
7.86500E+01

ORLANDO UTILITIES PT 83-06

- SOURCE INPUT DATA (CONT.) -

C T SOURCE SOURCE X Y EMISSION BASE /  
A A NUMBER TYPE COORDINATE COORDINATE HEIGHT ELEV- /  
R P (M) (M) (M) ATION /  
D E (M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X 3 STACK 463300.00 3159000.00 33.20 0.00 GAS EXIT TEMP (DEG K)= 727.60, GAS EXIT VEL. (M/SEC)= 13.02,  
STACK DIAMETER (M)= 2.900, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
- SOURCE STRENGTHS (GRAMS PER SEC ) -  
SEASON 1 SEASON 2 SEASON 3 SEASON 4  
8.00000E+00

STANDARD SAND SILICA PT 14-04

- SOURCE INPUT DATA (CONT.) -

C T SOURCE SOURCE X Y EMISSION BASE /  
A A NUMBER TYPE COORDINATE COORDINATE HEIGHT ELEV- /  
R P (M) (M) (M) ATION /  
D E (M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X 4 STACK 441500.00 3118200.00 25.90 0.00 GAS EXIT TEMP (DEG K)= 314.80, GAS EXIT VEL. (M/SEC)= 8.85,  
STACK DIAMETER (M)= 1.220, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
- SOURCE STRENGTHS (GRAMS PER SEC ) -  
SEASON 1 SEASON 2 SEASON 3 SEASON 4  
6.90000E+00

KISS, MHEE UTILITIES PT 01-04

- SOURCE INPUT DATA (CONT.) -

C T SOURCE SOURCE X Y EMISSION BASE /  
A A NUMBER TYPE COORDINATE COORDINATE HEIGHT ELEV- /  
R P (M) (M) (M) ATION /  
D E (M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X 5 STACK 460100.00 3129300.00 13.11 0.00 GAS EXIT TEMP (DEG K)= 466.50, GAS EXIT VEL. (M/SEC)= 16.30,  
STACK DIAMETER (M)= 0.610, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
- SOURCE STRENGTHS (GRAMS PER SEC ) -  
SEASON 1 SEASON 2 SEASON 3 SEASON 4  
8.70000E-01

- SOURCE INPUT DATA (CONT.) -

109

KISSIMMEE UTILITIES PTOI-05, PTOI-06

C T	SOURCE	SOURCE	X	Y	EMISSION	BASE /
A A	NUMBER	TYPE	COORDINATE	COORDINATE	HEIGHT	ELEV- /
R P			(M)	(M)	(M)	ATION /
D E						(M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X 6 STACK 460100.00 3129300.00 16.15 0.00 GAS EXIT TEMP (DEG K)= 477.60, GAS EXIT VEL. (M/SEC)= 17.60,  
 STACK DIAMETER (M)= 0.850, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
 ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
 - SOURCE STRENGTHS (GRAMS PER SEC ) -  
 SEASON 1 SEASON 2 SEASON 3 SEASON 4  
 3.36000E+00

KISSIMMEE UTILITIES PTOI-07, PTOI-08

- SOURCE INPUT DATA (CONT.) -

C T	SOURCE	SOURCE	X	Y	EMISSION	BASE /
A A	NUMBER	TYPE	COORDINATE	COORDINATE	HEIGHT	ELEV- /
R P			(M)	(M)	(M)	ATION /
D E						(M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X 7 STACK 460100.00 3129300.00 7.01 0.00 GAS EXIT TEMP (DEG K)= 466.50, GAS EXIT VEL. (M/SEC)= 9.60,  
 STACK DIAMETER (M)= 0.760, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
 ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
 - SOURCE STRENGTHS (GRAMS PER SEC ) -  
 SEASON 1 SEASON 2 SEASON 3 SEASON 4  
 2.28000E+00

KISSIMMEE UTILITIES PTOI-11 - 01-15

- SOURCE INPUT DATA (CONT.) -

C T	SOURCE	SOURCE	X	Y	EMISSION	BASE /
A A	NUMBER	TYPE	COORDINATE	COORDINATE	HEIGHT	ELEV- /
R P			(M)	(M)	(M)	ATION /
D E						(M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X 8 STACK 460100.00 3129300.00 13.41 0.00 GAS EXIT TEMP (DEG K)= 505.40, GAS EXIT VEL. (M/SEC)= 8.70,  
 STACK DIAMETER (M)= 0.800, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
 ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
 - SOURCE STRENGTHS (GRAMS PER SEC ) -  
 SEASON 1 SEASON 2 SEASON 3 SEASON 4  
 5.37000E+00

KISSIMMEE UTILITIES UNITS #19 and #20

- SOURCE INPUT DATA (CONT.) -

C T	SOURCE	SOURCE	X	Y	EMISSION	BASE /
A A	NUMBER	TYPE	COORDINATE	COORDINATE	HEIGHT	ELEV- /
R P			(M)	(M)	(M)	ATION /
D E						(M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X 9 STACK 460100.00 3129300.00 8.69 0.00 GAS EXIT TEMP (DEG K)= 505.40, GAS EXIT VEL. (M/SEC)= 17.20,  
 STACK DIAMETER (M)= 0.900, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF

110

ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
- SOURCE STRENGTHS ( GRAMS PER SEC ) -  
SEASON 1 SEASON 2 SEASON 3 SEASON 4  
2.89000E+00

CITY OF ST. CLOUD P102-02, 02-04 - SOURCE INPUT DATA (CONT.) -

C T SOURCE SOURCE X Y EMISSION BASE /  
A A NUMBER TYPE COORDINATE COORDINATE HEIGHT ELEV- /  
R P (M) (M) (M) ATION /  
D E (M) /  
- SOURCE DETAILS DEPENDING ON TYPE -

X 10 STACK 471800.00 3124900.00 7.92 0.00 GAS EXIT TEMP (DEG K)= 727.60, GAS EXIT VEL. (M/SEC)= 34.70,  
STACK DIAMETER (M)= 0.760, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
- SOURCE STRENGTHS ( GRAMS PER SEC ) -  
SEASON 1 SEASON 2 SEASON 3 SEASON 4  
4.66000E+00

CITY OF ST. CLOUD P102-05, P102-06 - SOURCE INPUT DATA (CONT.) -

C T SOURCE SOURCE X Y EMISSION BASE /  
A A NUMBER TYPE COORDINATE COORDINATE HEIGHT ELEV- /  
R P (M) (M) (M) ATION /  
D E (M) /  
- SOURCE DETAILS DEPENDING ON TYPE -

X 11 STACK 471800.00 3124900.00 8.53 0.00 GAS EXIT TEMP (DEG K)= 699.80, GAS EXIT VEL. (M/SEC)= 1.17,  
STACK DIAMETER (M)= 0.640, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
- SOURCE STRENGTHS ( GRAMS PER SEC ) -  
SEASON 1 SEASON 2 SEASON 3 SEASON 4  
3.78000E+00

CITY OF ST. CLOUD P102-07, P102-08 - SOURCE INPUT DATA (CONT.) -

C T SOURCE SOURCE X Y EMISSION BASE /  
A A NUMBER TYPE COORDINATE COORDINATE HEIGHT ELEV- /  
R P (M) (M) (M) ATION /  
D E (M) /  
- SOURCE DETAILS DEPENDING ON TYPE -

X 12 STACK 471800.00 3124900.00 11.89 0.00 GAS EXIT TEMP (DEG K)= 727.60, GAS EXIT VEL. (M/SEC)= 29.51,  
STACK DIAMETER (M)= 1.070, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
- SOURCE STRENGTHS ( GRAMS PER SEC ) -  
SEASON 1 SEASON 2 SEASON 3 SEASON 4  
6.55000E+00

STOKELY VAN CAMP PT07-01

- SOURCE INPUT DATA (CONT.) -

C T	SOURCE	SOURCE	X	Y	EMISSION	BASE /
A A	NUMBER	TYPE	COORDINATE	COORDINATE	HEIGHT	ELEV- /
R P			(M)	(M)	(M)	ATION /
D E						(M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X 13 STACK 451100.00 3125800.00 7.32 0.00 GAS EXIT TEMP (DEG K)= 513.70, GAS EXIT VEL. (M/SEC)= 11.50,  
 STACK DIAMETER (M)= 0.460, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
 ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
 - SOURCE STRENGTHS (GRAMS PER SEC ) -  
 SEASON 1 SEASON 2 SEASON 3 SEASON 4  
 2.52000E+00

CW BILBY PT11-01

- SOURCE INPUT DATA (CONT.) -

C T	SOURCE	SOURCE	X	Y	EMISSION	BASE /
A A	NUMBER	TYPE	COORDINATE	COORDINATE	HEIGHT	ELEV- /
R P			(M)	(M)	(M)	ATION /
D E						(M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X 14 STACK 470800.00 3133800.00 9.45 0.00 GAS EXIT TEMP (DEG K)=1005.70, GAS EXIT VEL. (M/SEC)= 11.60,  
 STACK DIAMETER (M)= 0.610, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
 ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
 - SOURCE STRENGTHS (GRAMS PER SEC ) -  
 SEASON 1 SEASON 2 SEASON 3 SEASON 4  
 1.30000E-01

FLA. POWER CORP. PT14-01-14-06

- SOURCE INPUT DATA (CONT.) -

C T	SOURCE	SOURCE	X	Y	EMISSION	BASE /
A A	NUMBER	TYPE	COORDINATE	COORDINATE	HEIGHT	ELEV- /
R P			(M)	(M)	(M)	ATION /
D E						(M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X 15 STACK 446300.00 3126000.00 7.92 0.00 GAS EXIT TEMP (DEG K)= 703.70, GAS EXIT VEL. (M/SEC)= 18.06,  
 STACK DIAMETER (M)= 4.240, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
 ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
 - SOURCE STRENGTHS (GRAMS PER SEC ) -  
 SEASON 1 SEASON 2 SEASON 3 SEASON 4  
 3.40200E+01

DIXIE ASPHALT PT4-01

- SOURCE INPUT DATA (CONT.) -

C T	SOURCE	SOURCE	X	Y	EMISSION	BASE /
A A	NUMBER	TYPE	COORDINATE	COORDINATE	HEIGHT	ELEV- /
R P			(M)	(M)	(M)	ATION /
D E						(M) /

- SOURCE DETAILS DEPENDING ON TYPE -

112

1\*\*\*\* ISCLT \*\*\*\*\* ISCLT -- ANNUAL S02  
*DIXIE ASPHALT PT 41-01*

\*\*\*\*\* PAGE 14 \*\*\*\*

X 16 STACK 463200.00 3143000.00 7.92

0.00 GAS EXIT TEMP (DEG K)= 394.30, GAS EXIT VEL. (M/SEC)= 26.95,  
STACK DIAMETER (M)= 1.100, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
- SOURCE STRENGTHS (GRAMS PER SEC ) -  
SEASON 1 SEASON 2 SEASON 3 SEASON 4  
2.60000E-01

1\*\*\*\* ISCLT \*\*\*\*\* ISCLT -- ANNUAL S02

\*\*\*\*\* PAGE 21 \*\*\*\*

*ST CLOUD HOSPITAL PT 10-02, PT 10-03*

- SOURCE INPUT DATA (CONT.) -

C T SOURCE SOURCE X Y EMISSION BASE /  
A A NUMBER TYPE COORDINATE COORDINATE HEIGHT ELEV- /  
R P (M) (M) (M) ATION /  
D E (M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X 17 STACK 470300.00 3124100.00 5.49 0.00

GAS EXIT TEMP (DEG K)= 505.40, GAS EXIT VEL. (M/SEC)= 15.00,  
STACK DIAMETER (M)= 0.460, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
- SOURCE STRENGTHS (GRAMS PER SEC ) -  
SEASON 1 SEASON 2 SEASON 3 SEASON 4  
6.00000E-02

1\*\*\*\* ISCLT \*\*\*\*\* ISCLT -- ANNUAL S02

\*\*\*\*\* PAGE 22 \*\*\*\*

*KISSIMMEE UTILITIES NEW COMBUSTION TURBINE*

- SOURCE INPUT DATA (CONT.) -

C T SOURCE SOURCE X Y EMISSION BASE /  
A A NUMBER TYPE COORDINATE COORDINATE HEIGHT ELEV- /  
R P (M) (M) (M) ATION /  
D E (M) /

- SOURCE DETAILS DEPENDING ON TYPE -

X 18 STACK 460100.00 3129300.00 9.14 0.00

GAS EXIT TEMP (DEG K)= 422.00, GAS EXIT VEL. (M/SEC)= 38.03,  
STACK DIAMETER (M)= 2.440, HEIGHT OF ASSO. BLDG. (M)= 0.00, WIDTH OF  
ASSO. BLDG. (M)= 0.00, WAKE EFFECTS FLAG = 0  
- SOURCE STRENGTHS (GRAMS PER SEC ) -  
SEASON 1 SEASON 2 SEASON 3 SEASON 4  
4.89000E+01

113

\*\* ANNUAL GROUND LEVEL CONCENTRATION ( MICROGRAMS PER CUBIC METER ) FROM ALL SOURCES COMBINED \*\*

- GRID SYSTEM RECEPTORS -  
- X AXIS (DISTANCE, METERS) -

Y AXIS (DISTANCE , METERS )	455600.000	456600.000	457600.000	456600.000	459600.000	460600.000	461600.000	462600.000	463600.000
	- CONCENTRATION -								
3133800.000	3.674304	3.908367	4.148832	4.581690	5.418777	5.192412	3.960702	3.612009	3.603863
3132800.000	3.894543	4.140950	4.487364	4.829161	6.097342	5.690645	3.811295	3.866843	3.803264
3131800.000	4.159456	4.528245	4.958326	5.588191	7.217253	6.386456	4.363052	4.287263	3.972458
3130800.000	4.721351	4.993611	5.755788	6.814646	8.997168	6.773283	5.457381	4.663729	4.153190
3129800.000	5.818188	6.675803	7.994432	9.787376	12.650610	9.974773	6.710643	5.492033	4.780505
3128800.000	6.107369	7.094499	8.752081	11.702003	19.907223	8.427357	7.125950	5.651487	4.876876
3127800.000	5.516002	6.109768	7.509365	10.043007	11.655142	7.712202	4.715505	4.693777	4.440250
3126800.000	5.324643	5.993368	6.990936	7.513328	8.966705	7.454960	4.466377	3.947322	4.012264
3125800.000	5.264185	5.748311	6.012345	6.168860	7.439410	6.682451	4.208803	3.932830	3.730122
3124800.000	5.022981	5.160911	5.284714	5.628808	6.481002	6.049376	4.440091	3.853153	3.763406

- GRID SYSTEM RECEPTORS -  
- X AXIS (DISTANCE, METERS) -

Y AXIS (DISTANCE , METERS )	464600.000
	- CONCENTRATION -
3133800.000	3.444981
3132800.000	3.529097
3131800.000	3.631041
3130800.000	3.849785
3129800.000	4.272913
3128800.000	4.356063
3127800.000	4.096053
3126800.000	3.935273
3125800.000	3.811047
3124800.000	3.700760

114

P 408 530 348

RECEIPT FOR CERTIFIED MAIL

NO INSURANCE COVERAGE PROVIDED—  
NOT FOR INTERNATIONAL MAIL

(See Reverse)

Sent to	
James C. Welsh	
Street and No.	
P. O. Box 1608	
P.O., State and ZIP Code	
Kissimmee, FL 32741	
Postage	\$
Certified Fee	
Special Delivery Fee	
Restricted Delivery Fee	
Return Receipt Showing to whom and Date Delivered	
Return Receipt Showing to whom, Date, and Address of Delivery	
TOTAL Postage and Fees	\$
Postmark or Date	
10/6/83	

PS Form 3800, Feb. 1982

PS Form 3811, Jan. 1979

SENDER: Complete items 1, 2, and 3. Add your address in the "RETURN TO" space on reverse.

1. The following service is requested (check one.)

Show to whom and date delivered.....¢

Show to whom, date and address of delivery.....¢

RESTRICTED DELIVERY  
Show to whom and date delivered.....¢

RESTRICTED DELIVERY.  
Show to whom, date, and address of delivery.\$ \_\_\_\_

(CONSULT POSTMASTER FOR FEES)

2. ARTICLE ADDRESSED TO:

Mr. James C. Welsh  
P. O. Box 1608  
Kissimmee, Florida 32741

3. ARTICLE DESCRIPTION:

REGISTERED NO.	CERTIFIED NO.	INSURED NO.
	P408530348	

(Always obtain signature of addressee or agent)

I have received the article described above.

SIGNATURE  Addressee  Authorized agent

*James C. Welsh*

4. DATE OF DELIVERY

5. ADDRESS (Complete only if requested)

6. UNABLE TO DELIVER BECAUSE:

POSTMARK

KISSIMMEE FL 32741

OCT 13 1983

INITIALS

☆GPO : 1979-300-459

DER PERMIT APPLICATION TRACKING SYSTEM MASTER RECORD

FILE#000000074856 COE# DER PROCESSOR:CLAIRE FANCY DER OFFICE:TLH  
FILE NAME:KISSIMMEE UTILITIES DATE FIRST REC: 09/06/83 APPLICATION TYPE:AC  
APPL NAME:KISSIMMEE UTILITIES UN #1 APPL PHONE:(305)847-2821 PROJECT COUNTY:49  
ADDR:P. O. BOX 1608 CITY:KISSIMMEE ST:FLZIP:32744  
AGNT NAME: AGNT PHONE:( ) - ST: ZIP:  
ADDR: CITY: ST: ZIP:

ADDITIONAL INFO REQ: / / / / / / REC: / / / / / /  
APPL COMPLETE DATE: / / COMMENTS NEC:Y DATE REQ: / / DATE REC: / /  
LETTER OF INTENT NEC:Y DATE WHEN INTENT ISSUED: / / WAIVER DATE: / /

HEARING REQUEST DATES: / / / / / /  
HEARING WITHDRAWN/DENIED/ORDER -- DATES: / / / / / /  
HEARING ORDER OR FINAL ACTION DUE DATE: / / MANUAL TRACKING DESIRED:N

THIS RECORD HAS BEEN SUCESSFULLY ADDED 09/06/83 15:41:08  
FEE PD DATE#1: / / \$ RECEIPT# REFUND DATE: / / REFUND \$  
FEE PD DATE#2: / / \$ RECEIPT# REFUND DATE: / / REFUND \$  
APPL:ACTIVE/INACTIVE/DENIED/WITHDRAWN/TRANSFERRED/EXEMPT/ISSUED:TR DATE:09/06/83  
REMARKS:ORL, CHECK #1190 ATTACHED TO APPLICATION;

DER  
SEP 9 1983  
BAQM



KISSIMMEE ELECTRIC  
CONSTRUCTION FUNDS, SERIES 1982  
P.O. BOX 1608  
KISSIMMEE, FL 32741

1190

9/1/19 83

63-27/631

PAY One Thousand Dollars 00/100 ----- \$ 1,000.00

EXCHANGE BANK & TRUST COMPANY OF FLORIDA  
TAMPA, FLORIDA 33601

Department of Environmental Regulation  
3319 Maguire Blvd., Suite 232  
Orlando, Florida 32803

TO THE  
ORDER  
OF

*George P. Gentry*  
*[Signature]*



R11DCO 024

STATE OF FLORIDA  
DEPARTMENT OF ENVIRONMENTAL REGULATION

Nº 33694

RECEIPT FOR APPLICATION FEES AND MISCELLANEOUS REVENUE

Received from Kissimmee Electric Date Sept. 9, 1983  
Address P.O. Box 1608 Kissimmee, FL 32741 Dollars \$ 1,000.00  
Applicant Name & Address Kissimmee Utilities  
Source of Revenue \_\_\_\_\_  
Revenue Code 001001 Application Number AC 49-74856  
By Dorinda H. Adams



UNITED STATES ENVIRONMENTAL PROTECTION AGENCY  
Office of Air Quality Planning and Standards  
Research Triangle Park, North Carolina 27711

APR 28 1983

DER

MAY 02 1983

BAQM

Ms. Teresa M. Heron  
Department of Environmental Regulation  
State of Florida  
2600 Blair Stone Road  
Tallahassee, Florida 32301

Dear Ms. Heron:

As you requested in our phone conversation of April 26, 1983, I am sending you this letter to confirm the correct ISO adjustment equation for the new source performance standard for stationary gas turbines. The equation as it appears in the Federal Register of September 10, 1979, (44 FR 52800) is incorrect. The correct equation is as follows:

$$NO_x = (NO_{xOBS}) \left( \frac{P_{Pref.}}{P_{OBS}} \right)^{0.5} e^{19(H_{OBS} - 0.00633)} \left( \frac{288^{\circ}K}{T_{amb.}} \right)^{1.53}$$


Also, as we discussed, the allowance for fuel  $NO_x$  in the standard must be based on the amount of bound nitrogen actually present in the fuel being burned in the gas turbine. There is no bound nitrogen in natural gas (the primary fuel for the Kissimee Utility gas turbine) and only a negligible amount in most #2 distillate (the emergency fuel). Thus, for most (if not all) of this gas turbine operating time, a fuel  $NO_x$  allowance will be inappropriate and allowable  $NO_x$  emissions will be 79 ppmv. However, the permit does require the fuel nitrogen to be measured (p.4 of 5), so the allowance for it can be applied when appropriate. It should be noted that the plant must file a report whenever the plant burns fuel with a nitrogen level giving a higher fuel  $NO_x$  allowance than that provided during compliance tests.

You commented that the proposed standards allowed only the gas turbine heat rate to be used in determining allowable  $NO_x$  emissions, but that this limitation does not appear in the promulgated standards (Part 60, Subpart GG). The limitation is defined in Part 60, Subpart GG as follows:

1. The standard is defined by the formula in 60.332(a)(1), when  $y$  = manufacturer heat rate ... for the affected facility.
2. The affected facility is, per 60.330, all stationary gas turbines.
3. And, in 60.331(a) "Stationary gas turbine" means any ... gas turbine portion of a combined cycle steam/electric generating system .... portability.

If you have any further questions, please contact me at (919) 541-5596,  
or call Doug Bell at (919) 541-5578.

Sincerely yours,

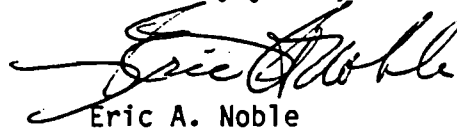A handwritten signature in cursive script that reads "Eric A. Noble". The signature is written in black ink and is positioned above the typed name.

Eric A. Noble  
Industrial Studies Branch  
Emission Standards and  
Engineering Division

P 408 530 348

RECEIPT FOR CERTIFIED MAIL

NO INSURANCE COVERAGE PROVIDED—  
NOT FOR INTERNATIONAL MAIL

(See Reverse)

Sent to	
James C. Welsh	
Street and No.	
P. O. Box 1608	
P.O., State and ZIP Code	
Kissimmee, FL 32741	
Postage	\$
Certified Fee	
Special Delivery Fee	
Restricted Delivery Fee	
Return Receipt Showing to whom and Date Delivered	
Return Receipt Showing to whom, Date, and Address of Delivery	
TOTAL Postage and Fees	\$
Postmark or Date	
10/6/83	

PS Form 3800, Feb. 1982

PS Form 3811, Jan. 1979

● SENDER: Complete items 1, 2, and 3.  
Add your address in the "RETURN TO" space on reverse.

1. The following service is requested (check one.)

Show to whom and date delivered.....¢

Show to whom, date and address of delivery.....¢

RESTRICTED DELIVERY  
Show to whom and date delivered.....¢

RESTRICTED DELIVERY.  
Show to whom, date, and address of delivery.\$

(CONSULT POSTMASTER FOR FEES)

2. ARTICLE ADDRESSED TO:  
Mr. James C. Welsh  
P. O. Box 1608  
Kissimmee, Florida 32741

3. ARTICLE DESCRIPTION:

REGISTERED NO.	CERTIFIED NO.	INSURED NO.
	P408530348	

(Always obtain signature of addressee or agent)

I have received the article described above.

SIGNATURE  Addressee  Authorized agent

4. DATE OF DELIVERY

5. ADDRESS (Complete only if requested)

6. UNABLE TO DELIVER BECAUSE:

POSTMARK  
KISSIMMEE FL  
OCT 13 1983

CLERK'S INITIALS

RETURN RECEIPT, REGISTERED, INSURED AND CERTIFIED MAIL



☆GPO : 1979-300-459

No. 0158242

**RECEIPT FOR CERTIFIED MAIL**  
 NO INSURANCE COVERAGE PROVIDED—  
 NOT FOR INTERNATIONAL MAIL  
 (See Reverse)

SENT TO		Mr. James C. Welsh	
STREET AND NO.			
P.O., STATE AND ZIP CODE			
POSTAGE		\$	
CONSULT POSTMASTER FOR FEES	CERTIFIED FEE	\$	
	SPECIAL DELIVERY	\$	
	RESTRICTED DELIVERY	\$	
	OPTIONAL SERVICES	SHOW TO WHOM AND DATE DELIVERED	\$
		SHOW TO WHOM, DATE, AND ADDRESS OF DELIVERY	\$
		SHOW TO WHOM AND DATE DELIVERED WITH RESTRICTED DELIVERY	\$
SHOW TO WHOM, DATE AND ADDRESS OF DELIVERY WITH RESTRICTED DELIVERY		\$	
TOTAL POSTAGE AND FEES	\$		
POSTMARK OR DATE		1/5/84	

PS Form 3800, Apr. 1976

PS Form 3811, Jan. 1979 RETURN RECEIPT, REGISTERED, INSURED AND CERTIFIED MAIL	● SENDER: Complete Items 1, 2, and 3. Add your address in the "RETURN TO" space on reverse.							
	1. The following service is requested (check one.) <input checked="" type="checkbox"/> Show to whom and date delivered..... \$ <input type="checkbox"/> Show to whom, date and address of delivery..... \$ <input type="checkbox"/> RESTRICTED DELIVERY Show to whom and date delivered..... \$ <input type="checkbox"/> RESTRICTED DELIVERY. Show to whom, date, and address of delivery. \$							
	(CONSULT POSTMASTER FOR FEES)							
	2. ARTICLE ADDRESSED TO: Mr. James C. Welsh P. O. Box 1608 Kissimmee, Florida 32741							
	3. ARTICLE DESCRIPTION: <table border="1" style="width: 100%;"> <tr> <td>REGISTERED NO.</td> <td>CERTIFIED NO.</td> <td>INSURED NO.</td> </tr> <tr> <td></td> <td>0158242</td> <td></td> </tr> </table> (Always obtain signature of addressee or agent)		REGISTERED NO.	CERTIFIED NO.	INSURED NO.		0158242	
	REGISTERED NO.	CERTIFIED NO.	INSURED NO.					
	0158242							
I have received the article described above. SIGNATURE <input type="checkbox"/> Addressee <input type="checkbox"/> Authorized agent 								
4. DATE OF DELIVERY 								
5. ADDRESS (Complete only if required)								
6. UNABLE TO DELIVER BECAUSE:								
CLERK'S INITIALS								

# CALL TOLL FREE 1

## We're Open Late.

### You Can Call In Your Action Ad

8 a.m.-6 p.m. Monday-Wednesday.

8 a.m.-8 p.m. Thursday & Friday.

8 a.m.-12 Noon Saturday.

In Orange and S. Seminole Counties

**Call 420-5757**

Outside of Orange and S. Seminole Counties

**Call toll-free 1-800-432-6868**

**The Orlando Sentinel**

12-83

## 1 LEGAL NOTICES

### PUBLIC NOTICE

A modification to an existing air pollution source is being proposed by Kissimmee Utilities located in the City of Kissimmee, Osceola County, Florida. The proposed modification is the construction of a 49.9 MW combined cycle gas turbine. The modification will increase emissions of air pollutants, in tons per year, by the following amounts:

PM	SO <sub>2</sub>	NO <sub>x</sub>	CO	VOC
96	1702	1029	349	83

The proposed modification has been reviewed by the Florida Department of Environmental Regulation (FDER) under Chapter 403, Florida Statutes, and Federal regulation 40 CFR 52.21, Prevention of Significant Deterioration (PSD). The Department has made a preliminary determination that the construction can be approved provided certain conditions are met. A summary of the basis for the determination and the application for State and Federal permits submitted by Kissimmee Utilities are available for public review at the following offices:

Bureau of Air Quality Management	St. Johns River District Department of Environmental Regulation
2600 Blair Stone Road Tallahassee, Florida 32301	3319 Maguire Blvd., Suite 232 Orlando, Florida 32803

Kissimmee Public Library

305 E. Broadway

Kissimmee, Florida 32741

The maximum percentages of allowable PSD increments consumed by the proposed modification will be as follows:

	Annual	24-Hour	3-Hour
PM	Negligible	Negligible	NA
SO <sub>2</sub>	5	11	9

Any person may submit written comments to FDER regarding the proposed modification. All comments, postmarked not later than 30 days from the date of notice, will be considered by FDER in making a final determination regarding approval for construction of this source. Those comments will be made available for public review on request. Furthermore, a public hearing can be requested by any person. Such request should be submitted within 14 days of the date of this notice. Letters should be addressed to:

Mr. C.H. Fancy, P.E.  
Deputy Chief  
Bureau of Air Quality Management  
Department of Environmental Regulation  
2600 Blair Stone Road  
Tallahassee, Florida 32301

OS-403

Jan. 15, 1984

No. 0158268

RECEIPT FOR CERTIFIED MAIL

NO INSURANCE COVERAGE PROVIDED—  
NOT FOR INTERNATIONAL MAIL  
(See Reverse)

SENT TO		Alex Alderman		
STREET AND NO.				
P.O., STATE AND ZIP CODE				
POSTAGE		\$		
CONSULT POSTMASTER FOR FEES	CERTIFIED FEE		¢	
	SPECIAL DELIVERY		¢	
	RESTRICTED DELIVERY		¢	
	OPTIONAL SERVICES	RETURN RECEIPT SERVICE		¢
		SHOW TO WHOM AND DATE DELIVERED		¢
		SHOW TO WHOM, DATE, AND ADDRESS OF DELIVERY		¢
SHOW TO WHOM AND DATE DELIVERED WITH RESTRICTED DELIVERY			¢	
SHOW TO WHOM, DATE AND ADDRESS OF DELIVERY WITH RESTRICTED DELIVERY		¢		
TOTAL POSTAGE AND FEES		\$		
POSTMARK OR DATE		3/16/84		

PS Form 3800, Apr. 1976

PS Form 3811, Jan. 1979

SENDER: Complete items 1, 2, and 3.  
Add your address in the "RETURN TO" space on reverse.

1. The following service is requested (check one.)  
 Show to whom and date delivered. .... ¢  
 Show to whom, date and address of delivery. .... ¢  
 RESTRICTED DELIVERY  
 Show to whom and date delivered. .... ¢  
 RESTRICTED DELIVERY.  
 Show to whom, date, and address of delivery. \$ \_\_\_\_  
 (CONSULT POSTMASTER FOR FEES)

2. ARTICLE ADDRESSED TO:  
 Mr. Alex Alderman  
 P. O. Box 1608  
 Kissimmee, FL 32741

3. ARTICLE DESCRIPTION:  

REGISTERED NO.	CERTIFIED NO.	INSURED NO.
	0158268	

 (Always obtain signature of addressee or agent)

I have received the article described above.  
 SIGNATURE  Addressee  Authorized agent

4. *Charles J. ...*  
 DATE OF DELIVERY: MAR 19 1984

5. ADDRESS (Complete only if required)

6. UNABLE TO DELIVER BECAUSE \_\_\_\_\_  
 CLERK'S INITIALS \_\_\_\_\_

STARBUCKS




GPO : 1979-300-459

No. 0158261

**RECEIPT FOR CERTIFIED MAIL**  
**NO INSURANCE COVERAGE PROVIDED—**  
**NOT FOR INTERNATIONAL MAIL**  
 (See Reverse)


SENT TO		Mr. James C. Welsh
STREET AND NO.		
P.O., STATE AND ZIP CODE		
POSTAGE		\$
CONSULT POSTMASTER FOR FEES	CERTIFIED FEE	¢
	SPECIAL DELIVERY	¢
	RESTRICTED DELIVERY	¢
	OPTIONAL SERVICES	
	RETURN RECEIPT SERVICE	
	SHOW TO WHOM AND DATE DELIVERED	¢
	SHOW TO WHOM, DATE, AND ADDRESS OF DELIVERY	¢
	SHOW TO WHOM AND DATE DELIVERED WITH RESTRICTED DELIVERY	¢
	SHOW TO WHOM, DATE AND ADDRESS OF DELIVERY WITH RESTRICTED DELIVERY	¢
TOTAL POSTAGE AND FEES		\$
POSTMARK OR DATE		4/10/84

PS Form 3800, Apr. 1976


PS Form 3811, Jan. 1978 RETURN RECEIPT, REGISTERED, INSURED AND CERTIFIED MAIL	● SENDER: Complete items 1, 2, and 3. Add your address in the "RETURN TO" space on reverse.								
	1. The following service is requested (check one.) <input checked="" type="checkbox"/> Show to whom and date delivered.....¢ <input type="checkbox"/> Show to whom, date and address of delivery.....¢ <input type="checkbox"/> RESTRICTED DELIVERY Show to whom and date delivered.....¢ <input type="checkbox"/> RESTRICTED DELIVERY. Show to whom, date, and address of delivery.\$ ____  (CONSULT POSTMASTER FOR FEES)								
	2. ARTICLE ADDRESSED TO: Mr. James C. Welsh P.O. Box 1608 Kissimmee, FL 32741								
	3. ARTICLE DESCRIPTION: <table border="1"> <tr> <td>REGISTERED NO.</td> <td>CERTIFIED NO.</td> <td>INSURED NO.</td> </tr> <tr> <td></td> <td>0158261</td> <td></td> </tr> </table> (Always obtain signature of addressee or agent)			REGISTERED NO.	CERTIFIED NO.	INSURED NO.		0158261	
	REGISTERED NO.	CERTIFIED NO.	INSURED NO.						
		0158261							
I have received the article described above. SIGNATURE <input type="checkbox"/> Addressee <input type="checkbox"/> Authorized agent 									
4. DATE OF DELIVERY: APR 12 1984									
5. ADDRESS (Complete only if requested): 									
6. UNABLE TO DELIVER BECAUSE: 									




*Samples ports shall not be located within 5 feet of diameter of the air discharged atmosphere.*

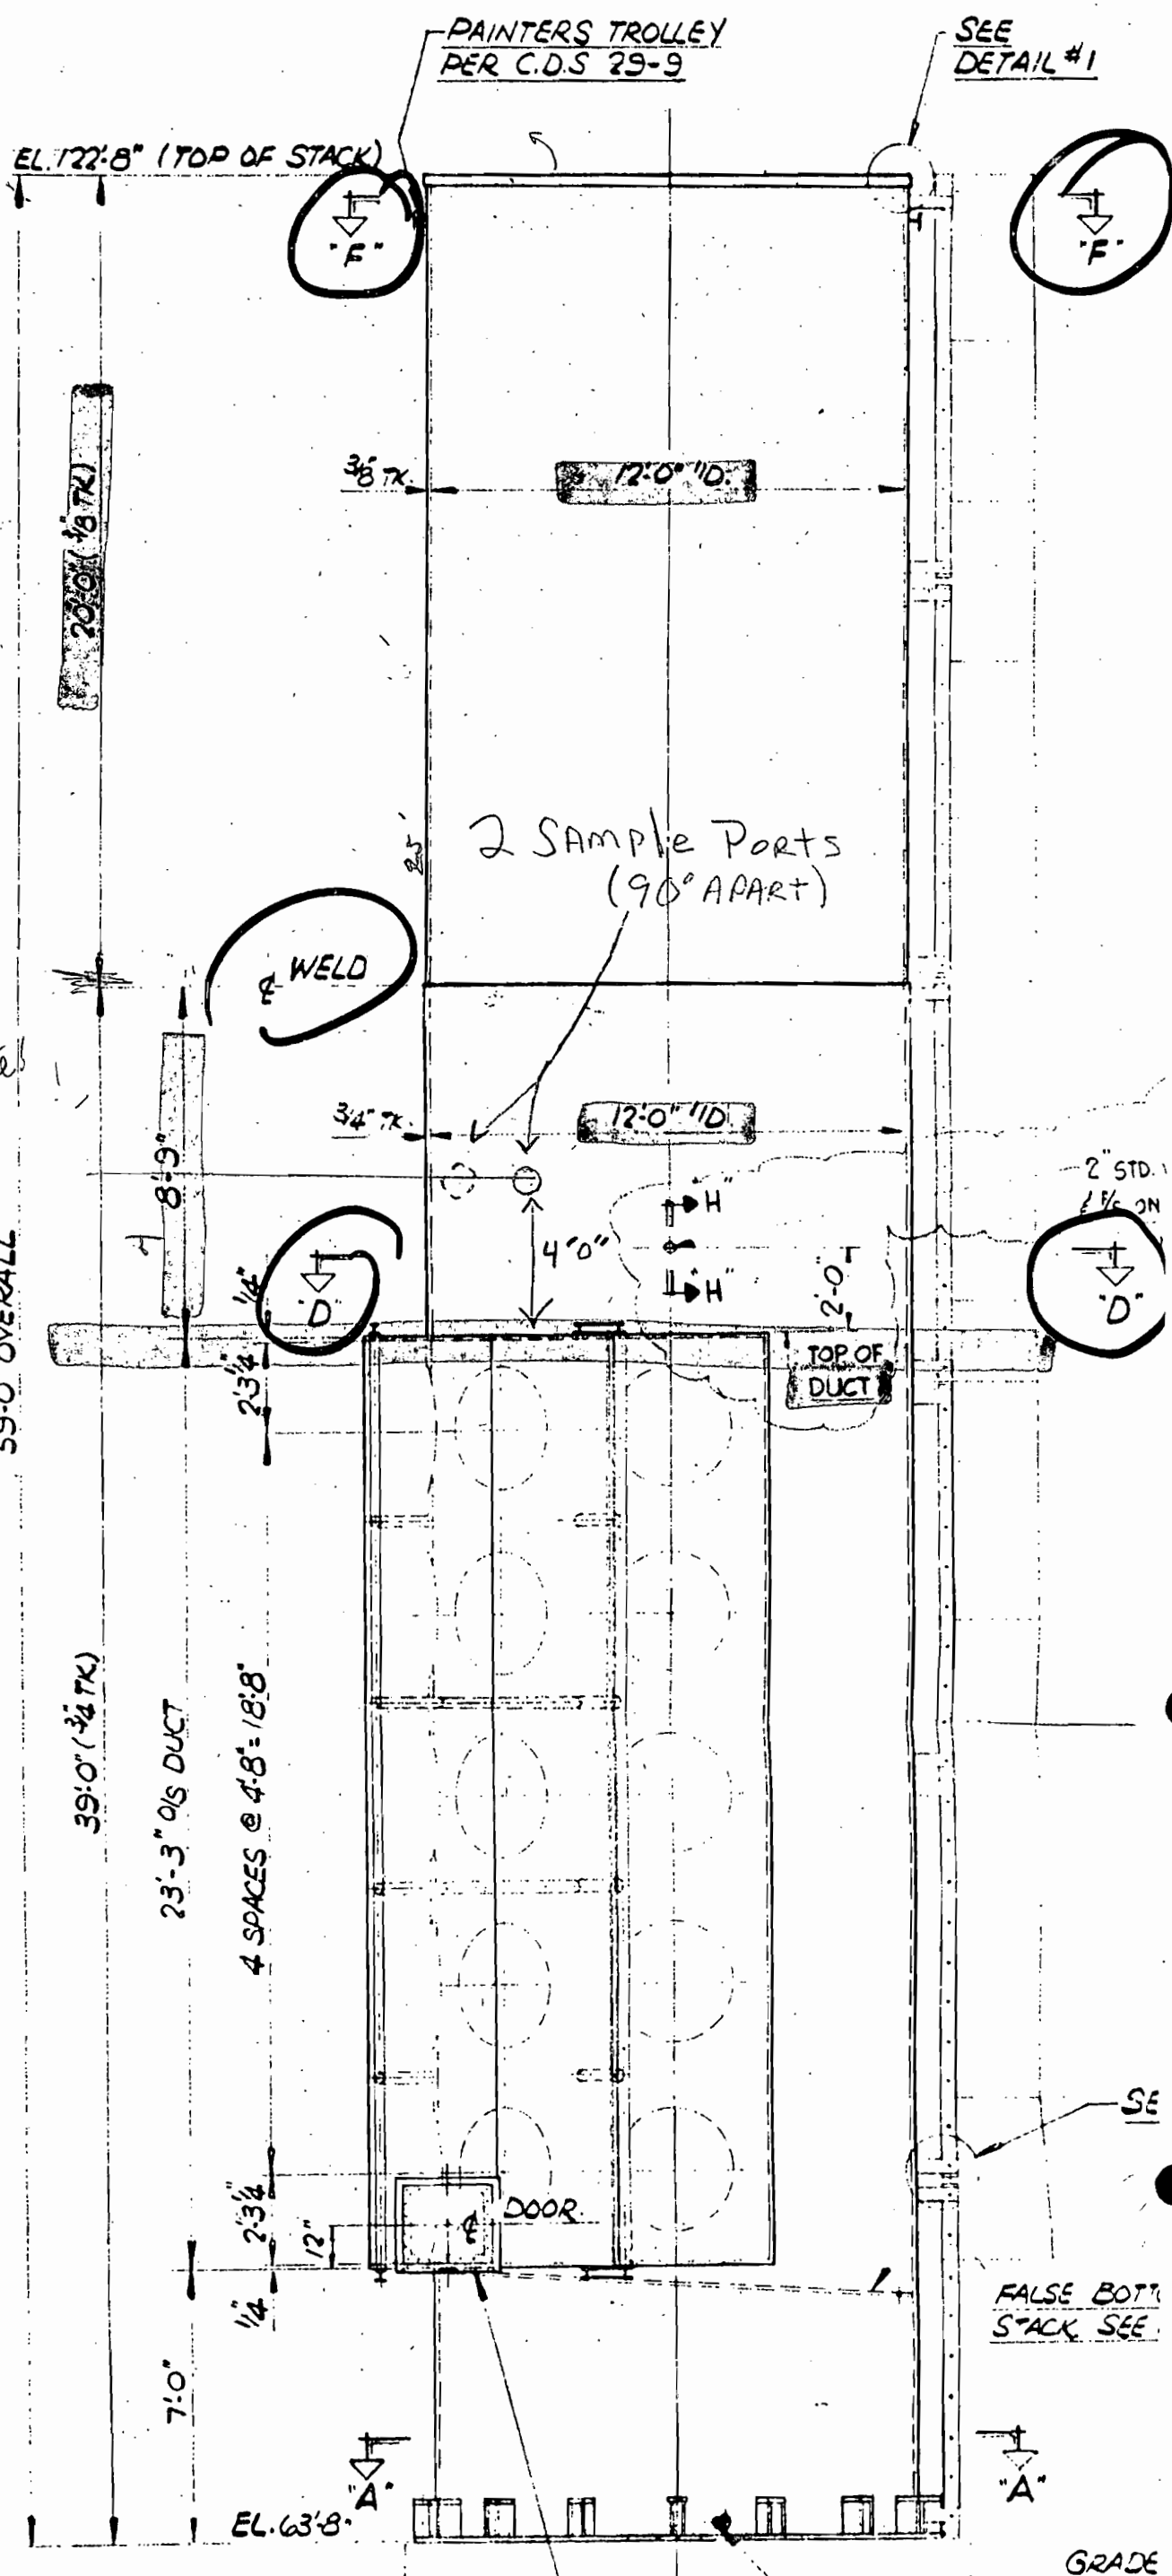

5

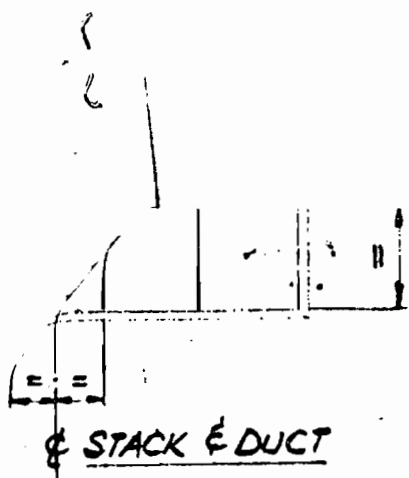

STRUT ARRGT. ①

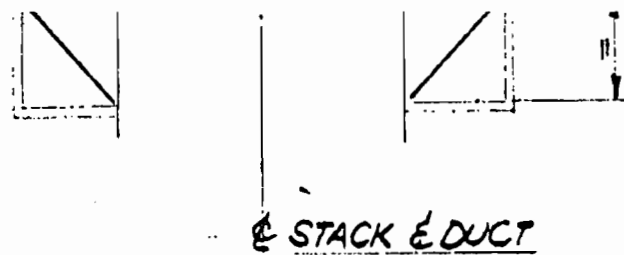

STRUT ARRGT. ②


4.1.1.

Sampling site as close as practical to the exhaust of the turbine.

Sampling site shall be located upstream of the point of introduction of dilution air into the duct.

Sample ports may be located before or after the upturn elbow. Sample ports shall not be located within 5 feet or 2 diameters of the gas discharge to the atm.

Minimum diameter of the sample ports shall be 3 inch nominal pipe size

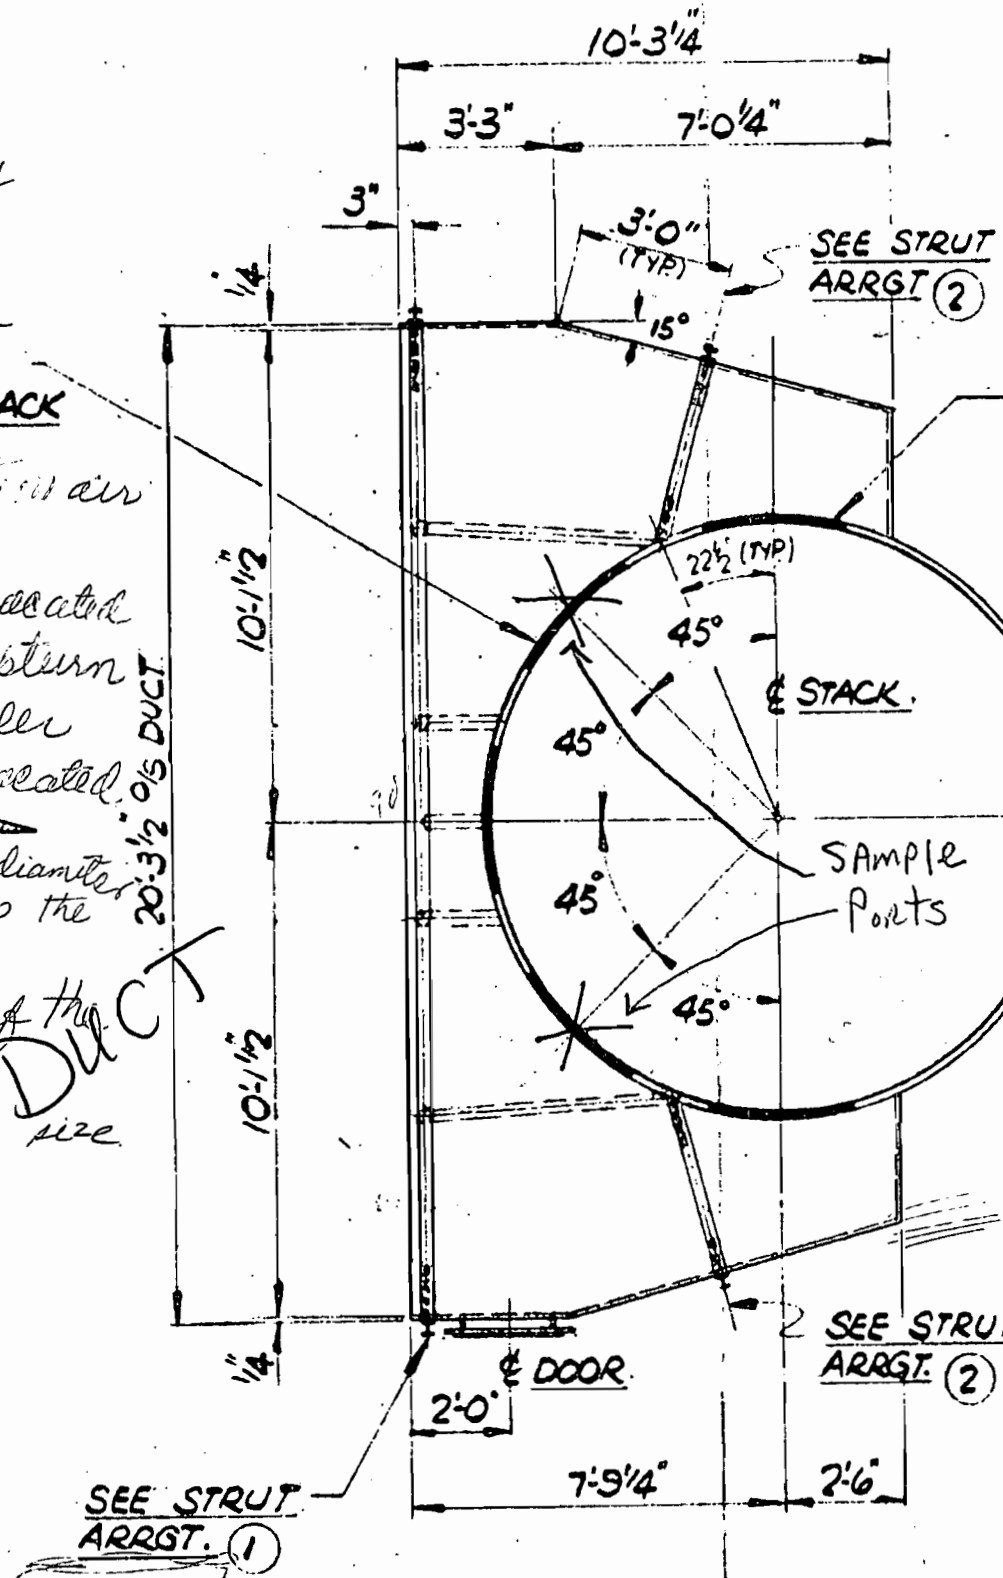

SHOP & ERECTOR NOTE:  
SHOP TO CUT 10" LG. HOLES IN STACK & ER ON 12" CTRS. FOR 3-C HOLES IN STACK & ER TO COMPLETE CUT AFT ERECTION.

Slack 12 ft in diameter  
STACK & LADGE  
1" HOLE IN FALSE BOTTOM.

2 sample port 90 degree

SECTION "D-D"



**ENVIRONMENTAL SCIENCE  
AND ENGINEERING, INC.**

June 7, 1984

Mr. Ed Palagy  
Florida Department of Environmental Regulation  
2600 Blair Stone Road  
Tallahassee, Florida 32301

PER  
8/12/84  
DQM

Dear Mr. Palagy:

Enclosed please find a Test Protocol for NSPS testing at Kissimmee Utilities on their gas fired turbine/combined cycle boiler system. Also, please find a stack schematic showing sample port locations.

Please contact us as soon as possible regarding the acceptability of the protocol. We will then establish a test date mutually acceptable to all parties.

Sincerely,

Peter F. Burnette  
Department Manager  
Source Testing Department

cc: David A. Buff, ESE  
Glen Massiongale, Kissimmee Utilities

MEMO

From: Ed Palagy

To: TERESA

THIS LOOK

OK TO  
YOU?

Ed