

MEMORANDUM

TO: Scott M. Sheplak, P.E.
FROM: Michael P. Halpin, P.E.
DATE: November 19, 1998

Re: Intent package for DRAFT Permit No.: 1010017-003-AV
Florida Power Corporation
Anclote Power Plant

Permit Clock: N/A

This permit is for the initial Title V air operation permit for the subject facility. It is a Revised Draft, withdrawing the original Draft permit clerked on August 19, 1997.

This revision is intended to address comments received from FPC's Mr. Scott H. Osbourn, Senior Environmental Engineer in a letter dated October 13, 1997 as well as other issues which have arisen since original issuance.

This facility reported that each emissions unit was in compliance at the time of the application.

Please be advised that in the original Draft permit, the use of Used Oil was an issue of significance to FPC. In this revision, the wording allows FPC to combust up to 30 million gallons of used oil annually (provided that certain standards of quality are met), with a 10% heat input limitation. The 30 million gallon limitation is more restrictive than the 10% heat input limitation, presuming that FPC's used oil delivery (pumping) system to the boilers is small. However, in the event that FPC wished to be able to combust large quantities of Used Oil in short time periods (e.g.: full output while firing both units solely on Used Oil for about 500 hours equates to approximately 30 million gallons), the 10% heat input limitation would become restrictive.

I recommend that this Intent to Issue be sent out as attached.


Michael P. Halpin, P.E.



Department of Environmental Protection

Lawton Chiles
Governor

Twin Towers Office Building
2600 Blair Stone Road
Tallahassee, Florida 32399-2400

Virginia B. Wetherell
Secretary


P.E. Certification Statement

Permittee:
Florida Power Corporation
Anclote Power Plant

Revised DRAFT Permit No.: 1010017-003-AV
Facility ID No.: 1010017

Project type: Initial Title V Air Operation Permit

I HEREBY CERTIFY that the engineering features described in the above referenced application and subject to the proposed permit conditions provide reasonable assurance of compliance with applicable provisions of Chapter 403, Florida Statutes, and Florida Administrative Code Chapters 62-4 and 62-204 through 62-297. However, I have not evaluated and I do not certify aspects of the proposed outside of my area of expertise (including but not limited to the electrical, mechanical, structural, hydrological, and geological features).

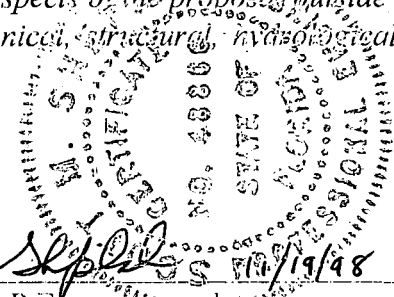
Scott M. Sheplak
Scott M. Sheplak, P.E. date
Registration Number: 0048866

Permitting Authority:
Department of Environmental Protection
Bureau of Air Regulation
111 South Magnolia Drive, Suite 4
Tallahassee, Florida 32301
Telephone: 850/921-9532
Fax: 850/922-6979

STATEMENT OF BASIS

Florida Power Corporation

Anclote Power Plant

Facility ID No.: 1010017

Pasco County

Initial Title V Air Operation Permit

Revised DRAFT Permit No.: 1010017-003-AV

This Title V air operation permit is issued under the provisions of Chapter 403, Florida Statutes (F.S.), and Florida Administrative Code (F.A.C.) Chapters 62-4, 62-210, 62-213, and 62-214. The above named permittee is hereby authorized to perform the work or operate the facility shown on the application and approved drawing(s), plans, and other documents, attached hereto or on file with the permitting authority, in accordance with the terms and conditions of this permit.

This facility consists of two fuel oil fired steam electric generating stations, E.U. ID No. -001 (Unit No. 1) and -002 (Unit No. 2). Unit No. 1 and No. 2 power turbines which drive generators with a nameplate ratings of 535(summer)/540(winter) megawatt and 525(summer)/ 530(winter) megawatt, respectively. Units No. 1 and No. 2 share a common stack. Relocatable diesel fired generator(s) with a maximum heat input of 25.74 MMBtu/hour and a maximum rating of 2460 Kilowatts are permitted to be located at the facility.

Fossil fuel fired steam generator # 1 is a nominal 535(summer)/540(winter) megawatt (electric) steam generator designated as Anclote Unit # 1. The emission unit is fired on No. 6 or lighter grades of fuel oil and on-specification used oil, with a maximum heat input of 4964.4 MMBtu per hour. Fossil fuel fired steam generator # 2 is a nominal 525(summer)/ 530(winter) megawatt (electric) steam generator designated as Anclote Unit # 2. The emission unit is fired on No. 6 or lighter grades of fuel oil and on-specification used oil, as permitted herein, with a maximum heat input of 4850 MMBtu per hour. Each boiler/steam generator, units #1 and #2, drives a turbine generator and both units share a common 499 foot exhaust stack. Emissions from these units are uncontrolled. The emissions units are regulated under Rule 62-296.405, F.A.C., Fossil Fuel Steam Generators with More than 250 million Btu per Hour Heat Input. Fossil fuel fired steam generator # 1 began commercial operation on October 16, 1974; and, fossil fuel fired steam generator # 2 began commercial operation on October 31, 1978.

The relocatable diesel generator(s) have a maximum heat input of 25.74 million Btu per hour (MMBtu/hour) while being fueled by 186.3 gallons of new No. 2 fuel oil per hour with a maximum rating of 2460 kilowatts. Emissions from the generators are uncontrolled. These emissions units are regulated under Rule 62-210.300, F.A.C., Permits Required. The generators may be relocated at any of the following facilities:

1. Crystal River Plant, Powerline Road, Red Level, Citrus County.
2. Bartow Plant, Weedon Island, St. Petersburg, Pinellas County.
3. Higgins Plant, Shore Drive, Oldsmar, Pinellas County.
4. Bayboro Plant, 13th Ave. & 2nd St. South, St. Petersburg, Pinellas County.
5. Wildwood Reclamation Facility, State Road 462, 1 mi. east of U.S. 301, Wildwood, Sumter County.
6. The future FPC Polk County Site, County Road 555, 1 mi. southwest of Homeland, Polk County.

Also included in this permit are miscellaneous unregulated and insignificant emissions units and/or activities.

Based on the initial Title V permit application received June 14, 1996, this facility is a major source of hazardous air pollutants (HAPs).

Z 333 638 486

US Postal Service
Receipt for Certified Mail

No Insurance Coverage Provided.
 Do not use for International Mail (See reverse)

Sent to	
Mr. W. Jeffrey Pardue	
Street & Number	
3201 34th Street South	
Post Office, State, & ZIP Code	
St. Petersburg, FL 33711	
Postage	\$
Certified Fee	
Special Delivery Fee	
Restricted Delivery Fee	
Return Receipt Showing to Whom & Date Delivered	
Return Receipt Showing to Whom, Date, & Addressee's Address	
TOTAL Postage & Fees	\$
Postmark or Date	
11/25/98	
FPC - Anclote Power Plant	
ID#1010017-003-AV	

PS Form 3800, April 1995

Is your RETURN ADDRESS completed on the reverse side?

SENDER:

- Complete items 1 and/or 2 for additional services.
- Complete items 3, 4a, and 4b.
- Print your name and address on the reverse of this form so that we can return this card to you.
- Attach this form to the front of the mailpiece, or on the back if space does not permit.
- Write "Return Receipt Requested" on the mailpiece below the article number.
- The Return Receipt will show to whom the article was delivered and the date delivered.

I also wish to receive the following services (for an extra fee):

- 1. Addressee's Address
- 2. Restricted Delivery

Consult postmaster for fee.

3. Article Addressed to:
 Mr. W. Jeffrey Pardue, C.E.
 Director of Environmental
 Services
 Florida Power Corporation
 3201 34th Street South
 St. Petersburg, FL 33711

4a. Article Number
 P. Z 333 638 486

4b. Service Type
 Registered Certified
 Express Mail Insured
 Return Receipt for Merchandise COD

7. Date of Delivery

5. Received By: (Print Name)

8. Addressee's Address (Only if requested and fee is paid)

6. Signature: (Addressee or Agent)

X

Thank you for using Return Receipt Service.

UNITED STATES POSTAL SERVICE



First-Class-Mail
Postage & Fees Paid
USPS
Permit No. G-10

• Print your name, address, and ZIP Code in this box •


DEPARTMENT OF ENVIRONMENTAL PROTECTION
DIVISION OF AIR RESOURCES MANAGEMENT
BUREAU OF AIR REGULATION - TITLE V
2600 BLAIR STONE ROAD
TALLAHASSEE, FLORIDA 32399-2400

A

BUREAU OF
AIR REGULATION

DEC 02 1998

RECEIVED





Department of Environmental Protection

Lawton Chiles
Governor

Twin Towers Office Building
2600 Blair Stone Road
Tallahassee, Florida 32399-2400

Virginia B. Wetherell
Secretary

November 24, 1998

Mr. W. Jeffrey Pardue, C.E.P.
Director of Environmental Services
Florida Power Corporation
3201 34th Street South
St. Petersburg, Florida 33711

Re: Title V Revised DRAFT Permit No.: 1010017-003-AV
Anclote Power Plant

Dear Mr. Pardue:

One copy of the Title V Revised DRAFT Air Operation Permit for the Anclote Power Plant located at 1729 Baileys Bluff Road, Holiday, Pasco County, is enclosed. The previous DRAFT Title V operation permit clerked on August 19, 1997, is withdrawn.

The "PUBLIC NOTICE OF INTENT TO ISSUE TITLE V AIR OPERATION PERMIT" must be published as soon as possible upon receipt of this letter. This issue is important in order for you to receive your Title IV Acid Rain permit by January 1, 2000. Proof of publication, i.e., newspaper affidavit, must be provided to the permitting authority's office within 7 (seven) days of publication. Failure to publish the notice and provide proof of publication within the allotted time may result in the denial of the permit.

Please submit any written comments you wish to have considered concerning the permitting authority's proposed action to Scott M. Sheplak, P.E., at the above letterhead address. If you have any other questions, please contact Michael P. Halpin, P.E. at 850/921-9530.

Sincerely,

C. H. Fancy, P.E.
Chief
Bureau of Air Regulation

CHF/h

Enclosures

cc: Ms. Carla E. Pierce, U.S. EPA, Region 4 (INTERNET E-mail Memorandum)
Ms. Gracy Danois, U.S. EPA, Region 4 (INTERNET E-mail Memorandum)

"Protect, Conserve and Manage Florida's Environment and Natural Resources"

Printed on recycled paper.

In the Matter of an
Application for Permit by:

Florida Power Corporation
3201 34th Street South
St. Petersburg, Florida 33711

Revised DRAFT Permit No.: 1010017-003-AV
Anclote Power Plant
Pasco County

INTENT TO ISSUE TITLE V AIR OPERATION PERMIT

The Department of Environmental Protection (permitting authority) gives notice of its intent to issue a Title V air operation permit (copy of Revised DRAFT Permit enclosed) for the Title V source detailed in the application specified above, for the reasons stated below.

The applicant, Florida Power Corporation, applied on June 12, 1996, to the permitting authority for a Title V air operation permit for the Anclote Power Plant located at 1729 Baileys Bluff Road, Holiday, Pasco County.

The permitting authority has permitting jurisdiction under the provisions of Chapter 403, Florida Statutes (F.S.), and Chapters 62-4, 62-210, 62-213, and 62-214, F.A.C. This source is not exempt from Title V permitting procedures. The permitting authority has determined that a Title V air operation permit is required to commence or continue operations at the described facility.

The permitting authority intends to issue this Title V air operation permit based on the belief that reasonable assurances have been provided to indicate that operation of the source will not adversely impact air quality, and the source will comply with all appropriate provisions of Chapters 62-4, 62-204, 62-210, 62-212, 62-213, 62-214, 62-256, 62-257, 62-281, 62-296, and 62-297, F.A.C.

Pursuant to Sections 403.815 and 403.087, F.S., and Rules 62-110.106 and 62-210.350(3), F.A.C., you (the applicant) are required to publish at your own expense the enclosed "PUBLIC NOTICE OF INTENT TO ISSUE TITLE V AIR OPERATION PERMIT." The notice shall be published one time only as soon as possible in the legal advertisement section of a newspaper of general circulation in the area affected. For the purpose of these rules, "publication in a newspaper of general circulation in the area affected" means publication in a newspaper meeting the requirements of Sections 50.011 and 50.031, F.S., in the county where the activity is to take place. Where there is more than one newspaper of general circulation in the county, the newspaper used must be one with significant circulation in the area that may be affected by the permit. If you are uncertain that a newspaper meets these requirements, please contact the permitting authority at the address or telephone number listed below. The applicant shall provide proof of publication to the Department's Bureau of Air Regulation, 2600 Blair Stone Road, Mail Station #5505, Tallahassee, Florida 32399-2400 (Telephone: 850/488-1344; Fax: 850/922-6979), within 7 (seven) days of publication. Failure to publish the notice and provide proof of publication within the allotted time may result in the denial of the permit pursuant to Rule 62-110.106, F.A.C.

The permitting authority will issue the Title V PROPOSED Permit, and subsequent Title V FINAL Permit, in accordance with the conditions of the attached Title V Revised DRAFT Permit unless a response received in accordance with the following procedures results in a different decision or significant change of terms or conditions.

The permitting authority will accept written comments concerning the proposed permit issuance action for a period of 30 (thirty) days from the date of publication of the "PUBLIC NOTICE OF INTENT TO ISSUE TITLE V AIR OPERATION PERMIT." Written comments should be provided to the permitting authority office. Any written comments filed shall be made available for public inspection. If written comments received result in a significant change in this Revised DRAFT Permit, the permitting authority shall issue another Revised DRAFT Permit and require, if applicable, another Public Notice.

A person whose substantial interests are affected by the proposed permitting decision may petition for an administrative hearing in accordance with Sections 120.569 and 120.57, F.S. The petition must contain the information set forth below and must be filed (received) in the Office of General Counsel of the Department of Environmental Protection, 3900 Commonwealth Boulevard, Mail Station #35, Tallahassee, Florida 32399-3000 (Telephone: 850/488-9730; Fax: 850/487-4938). Petitions filed by the permit applicant or any of the parties listed below must be filed within fourteen days of receipt of this notice of intent. Petitions filed by any persons other than those entitled to written notice under Section 120.60(3), F.S., must be filed within fourteen days of publication of the public notice or within fourteen days of receipt of this notice of intent, whichever occurs first. Under Section 120.60(3), F.S., however, any person who asked the permitting authority for notice of agency action may file a petition within fourteen days of receipt of that notice, regardless of the date of publication. A petitioner shall mail a copy of the petition to the applicant at the address indicated above, at the time of filing. The failure of any person to file a petition within the appropriate time period shall constitute a waiver of that person's right to request an administrative determination (hearing) under Sections 120.569 and 120.57, F.S., or to intervene in this proceeding and participate as a party to it. Any subsequent intervention will be only at the approval of the presiding officer upon the filing of a motion in compliance with Rule 28-106.205, F.A.C.

A petition that disputes the material facts on which the permitting authority's action is based must contain the following information:

(a) The name and address of each agency affected and each agency's file or identification number, if known;

(b) The name, address, and telephone number of the petitioner; the name, address and telephone number of the petitioner's representative, if any, which shall be the address for service purposes during the course of the proceeding; and an explanation of how the petitioner's substantial interests will be affected by the agency determination;

(c) A statement of how and when each petitioner received notice of the agency action or proposed action;

(d) A statement of all disputed issues of material fact. If there are none, the petition must so indicate;

(e) A concise statement of the ultimate facts alleged, as well as the rules and statutes which entitle the petitioner to relief;

(f) A demand for relief.

A petition that does not dispute the material facts upon which the permitting authority's action is based shall state that no such facts are in dispute and otherwise shall contain the same information as set forth above, as required by Rule 28-106.301, F.A.C.

Because the administrative hearing process is designed to formulate final agency action, the filing of a petition means that the permitting authority's final action may be different from the position taken by it in this notice of intent. Persons whose substantial interests will be affected by any such final decision of the permitting authority on the application have the right to petition to become a party to the proceeding, in accordance with the requirements set forth above.

Mediation will not be available in this proceeding.

In addition to the above, a person subject to regulation has a right to apply to the Department of Environmental Protection for a variance from or waiver of the requirements of particular rules, on certain conditions, under Section 120.542, F.S. The relief provided by this state statute applies only to state rules, not statutes, and not to any federal regulatory requirements. Applying for a variance or waiver does not substitute or extend the time for filing a petition for an administrative hearing or exercising any other right that a person may have in relation to the action proposed in this notice of intent.

The application for a variance or waiver is made by filing a petition with the Office of General Counsel of the Department of Environmental Protection, 3900 Commonwealth Boulevard, Mail Station #35, Tallahassee, Florida 32399-3000. The petition must specify the following information:

(a) The name, address, and telephone number of the petitioner;

(b) The name, address, and telephone number of the attorney or qualified representative of the petitioner, if any;

(c) Each rule or portion of a rule from which a variance or waiver is requested;

(d) The citation to the statute underlying (implemented by) the rule identified in (c) above;

(e) The type of action requested;

(f) The specific facts that would justify a variance or waiver for the petitioner;

(g) The reason why the variance or waiver would serve the purposes of the underlying statute (implemented by the rule); and,

(h) A statement whether the variance or waiver is permanent or temporary and, if temporary, a statement of the dates showing the duration of the variance or waiver requested.

The Department will grant a variance or waiver when the petition demonstrates both that the application of the rule would create a substantial hardship or violate principles of fairness, as each of those terms is defined in Section 120.542(2), F.S., and that the purpose of the underlying statute will be or has been achieved by other means by the petitioner.

Persons subject to regulation pursuant to any federally delegated or approved air program should be aware that Florida is specifically not authorized to issue variances or waivers from any requirements of any such federally delegated or approved program. The requirements of the program remain fully enforceable by the Administrator of the United States Environmental Protection Agency and by any person under the Clean Air Act unless and until the Administrator separately approves any variance or waiver in accordance with the procedures of the federal program.

Finally, pursuant to 42 United States Code (U.S.C.) Section 7661d(b)(2), any person may petition the Administrator of the EPA within 60 (sixty) days of the expiration of the Administrator's 45 (forty-five) day review period as established at 42 U.S.C. Section 7661d(b)(1), to object to issuance of any permit. Any petition shall be based only on objections to the permit that were raised with reasonable specificity during the 30 (thirty) day public comment period provided in this notice, unless the petitioner demonstrates to the Administrator of the EPA that it was impracticable to raise such objections within the comment period or unless the grounds for such objection arose after the comment period. Filing of a petition with the Administrator of the EPA does not stay the effective date of any permit properly issued pursuant to the provisions of Chapter 62-213, F.A.C. Petitions filed with the Administrator of EPA must meet the requirements of 42 U.S.C. Section 7661d(b)(2) and must be filed with the Administrator of the EPA at: U.S. EPA, 401 M Street, S.W., Washington, D.C. 20460.

Executed in Tallahassee, Florida.

**STATE OF FLORIDA DEPARTMENT
OF ENVIRONMENTAL PROTECTION**



C. H. Fancy, P.E.

Chief

Bureau of Air Regulation

CERTIFICATE OF SERVICE

The undersigned duly designated deputy agency clerk hereby certifies that this INTENT TO ISSUE TITLE V AIR OPERATION PERMIT (including the PUBLIC NOTICE and the Revised DRAFT permit) and all copies were sent by certified mail before the close of business on 11/25/98 to the person(s) listed:

Mr. W. Jeffrey Pardue, C.E.P. , Florida Power Corporation

In addition, the undersigned duly designated deputy agency clerk hereby certifies that copies of this INTENT TO ISSUE TITLE V AIR OPERATION PERMIT (including the PUBLIC NOTICE and the Revised DRAFT permit) were sent by U.S. mail on the same date to the person(s) listed:

Mr. Kennard F. Kosky, P.E., Golder Associates, Inc.
Mr. Bill Thomas, DEP - SWD
Mrs. Gail Kamaras, LEAF (only the Intent to Issue)

Clerk Stamp

FILING AND ACKNOWLEDGMENT FILED, on this date, pursuant to Section 120.52(7), Florida Statutes, with the designated agency Clerk, receipt of which is hereby acknowledged.

Barbara J. Bentwell 11/25/98
(Clerk) (Date)

PUBLIC NOTICE OF INTENT TO ISSUE TITLE V AIR OPERATION PERMIT

STATE OF FLORIDA
DEPARTMENT OF ENVIRONMENTAL PROTECTION

Title V Revised DRAFT Permit No.: 1010017-003-AV
Anclote Power Plant
Pasco County

The Department of Environmental Protection (permitting authority) gives notice of its intent to issue a Title V air operation permit to Florida Power Corporation for the Anclote Power Plant located at 1729 Baileys Bluff Road, Holiday, Pasco County. The applicant's name and address are: Florida Power Corporation, 3201 34th Street South, St. Petersburg, Florida 33711.

The permitting authority will issue the Title V PROPOSED Permit, and subsequent Title V FINAL Permit, in accordance with the conditions of the Title V Revised DRAFT Permit unless a response received in accordance with the following procedures results in a different decision or significant change of terms or conditions.

The permitting authority will accept written comments concerning the proposed Title V Revised DRAFT Permit issuance action for a period of 30 (thirty) days from the date of publication of this Notice. Written comments should be provided to the Department's Bureau of Air Regulation, 2600 Blair Stone Road, Mail Station #5505, Tallahassee, Florida 32399-2400. Any written comments filed shall be made available for public inspection. If written comments received result in a significant change in this Revised DRAFT Permit, the permitting authority shall issue another Revised DRAFT Permit and require, if applicable, another Public Notice.

A person whose substantial interests are affected by the proposed permitting decision may petition for an administrative hearing in accordance with Sections 120.569 and 120.57 of the Florida Statutes (F.S.). The petition must contain the information set forth below and must be filed (received) in Office of General Counsel of the Department of Environmental Protection, 3900 Commonwealth Boulevard, Mail Station #35, Tallahassee, Florida 32399-3000 (Telephone: 850/488-9730; Fax: 850/487-4938). Petitions filed by any persons other than those entitled to written notice under Section 120.60(3), F.S., must be filed within fourteen days of publication of the public notice or within fourteen days of receipt of the notice of intent, whichever occurs first. Under Section 120.60(3), F.S., however, any person who asked the permitting authority for notice of agency action may file a petition within fourteen days of receipt of that notice, regardless of the date of publication. A petitioner shall mail a copy of the petition to the applicant at the address indicated above, at the time of filing. The failure of any person to file a petition within the applicable time period shall constitute a waiver of that person's right to request an administrative determination (hearing) under Sections 120.569 and 120.57, F.S., or to intervene in this proceeding and participate as a party to it. Any subsequent intervention will be only at the approval of the presiding officer upon the filing of a motion in compliance with Rule 28-106.205, F.A.C.

A petition that disputes the material facts on which the permitting authority's action is based must contain the following information:

(a) The name and address of each agency affected and each agency's file or identification number, if known;

(b) The name, address and telephone number of the petitioner; name address and telephone number of the petitioner's representative, if any, which shall be the address for service purposes during

the course of the proceeding; and an explanation of how petitioner's substantial rights will be affected by the agency determination;

(c) A statement of how and when the petitioner received notice of the agency action or proposed action;

(d) A statement of all disputed issues of material fact. If there are none, the petition must so state;

(e) A concise statement of the ultimate facts alleged, as well as the rules and statutes which entitle petitioner to relief; and

(f) A demand for relief.

A petition that does not dispute the material facts upon which the permitting authority's action is based shall state that no such facts are in dispute and otherwise shall contain the same information as set forth above, as required by Rule 28-106.301, F.A.C.

Because the administrative hearing process is designed to formulate final agency action, the filing of a petition means that the permitting authority's final action may be different from the position taken by it in this notice of intent. Persons whose substantial interests will be affected by any such final decision of the permitting authority on the application have the right to petition to become a party to the proceeding, in accordance with the requirements set forth above.

Mediation is not available for this proceeding.

In addition to the above, pursuant to 42 United States Code (U.S.C.) Section 7661d(b)(2), any person may petition the Administrator of the EPA within 60 (sixty) days of the expiration of the Administrator's 45 (forty-five) day review period as established at 42 U.S.C. Section 7661d(b)(1), to object to issuance of any permit. Any petition shall be based only on objections to the permit that were raised with reasonable specificity during the 30 (thirty) day public comment period provided in this notice, unless the petitioner demonstrates to the Administrator of the EPA that it was impracticable to raise such objections within the comment period or unless the grounds for such objection arose after the comment period. Filing of a petition with the Administrator of the EPA does not stay the effective date of any permit properly issued pursuant to the provisions of Chapter 62-213, F.A.C. Petitions filed with the Administrator of EPA must meet the requirements of 42 U.S.C. Section 7661d(b)(2) and must be filed with the Administrator of the EPA at: U.S. EPA, 401 M Street, S.W., Washington, D.C. 20460.

A complete project file is available for public inspection during normal business hours, 8:00 a.m. to 5:00 p.m., Monday through Friday, except legal holidays, at:

Permitting Authority:

Department of Environmental Protection
Bureau of Air Regulation
111 South Magnolia Drive, Suite 4
Tallahassee, Florida 32301
Telephone: 850/488-1344
Fax: 850/922-6979

Department of Environmental Protection
Southwest District
8407 Laurel Fair Circle
Tampa, Florida 33619
Telephone: 813/744-6100
Fax: 813/744-6458

The complete project file includes the Revised DRAFT Permit, the application, and the information submitted by the responsible official, exclusive of confidential records under Section 403.111, F.S. Interested persons may contact Scott M. Sheplak, P.E., at the above address, or call 850/921-9532, for additional information.

Florida Power Corporation
Anclote Power Plant

Facility ID No.: 1010017
Pasco County

Initial Title V Air Operation Permit
Revised DRAFT Permit No.: 1010017-003-AV

Permitting Authority:

State of Florida
Department of Environmental Protection
Division of Air Resources Management
Bureau of Air Regulation
Title V Section

Mail Station #5505
2600 Blair Stone Road
Tallahassee, Florida 32399-2400

Telephone: 850/488-1344
Fax: 850/922-6979

Initial Title V Air Operation Permit
Revised DRAFT Permit No.: 1010017-003-AV

Table of Contents

<u>Section</u>	<u>Page Number</u>
Placard Page	1
I. Facility Information	2 - 3
A. Facility Description.	
B. Summary of Emissions Unit ID Nos. and Brief Descriptions.	
C. Relevant Documents.	
II. Facility-wide Conditions	4 - 6
III. Emissions Unit(s) and Conditions	
A. Fuel Oil Fired Steam Generators (E.U. ID Nos. -001 and -002).....	7 - 18
B. Diesel Fired Generators (3 - 820 Kilowatt each).....	19 - 24
IV. Acid Rain Part	
A. Acid Rain, Phase II	25 - 26
V. Attachments	
Table 1-1, Summary of Air Pollutant Standards and Terms	
Table 1-2, Summary of Air Pollutant Standards and Terms (Additional Standards for On-Specification Used Oil (OSUO))	
Table 2-1, Summary of Compliance Requirements	
Appendix I-1. List of Insignificant Emissions Units and/or Activities	
Appendix U-1. List of Unregulated Emissions Units and/or Activities	
Appendix H-1. Permit History/ID Number Changes	
Appendix SS-1, Stack Sampling Facilities	
Appendix TV-1, Title V Conditions	



Department of Environmental Protection

Lawton Chiles
Governor

Twin Towers Office Building
2600 Blair Stone Road
Tallahassee, Florida 32399-2400

Virginia B. Wetherell
Secretary

Permittee: Florida Power Corporation
Anclote Power Plant

Revised DRAFT Permit No.: 1010017-003-AV
Facility ID No.: 1010017
SIC Nos.: 4911
Project: Initial Title V Air Operation Permit

This permit is for the operation of the Anclote Power Plant. This facility is located at 1729 Baileys Bluff Road, Holiday, Pasco County; UTM Coordinates: Zone 17, 324.4 km East and 3118.7 km North; Latitude: 28° 48' 17" North and Longitude: 82° 47' 08" West.

STATEMENT OF BASIS: This Title V air operation permit is issued under the provisions of Chapter 403, Florida Statutes (F.S.), and Florida Administrative Code (F.A.C.) Chapters 62-4, 62-210, 62-213, and 62-214. The above named permittee is hereby authorized to perform the work or operate the facility shown on the application and approved drawing(s), plans, and other documents, attached hereto or on file with the permitting authority, in accordance with the terms and conditions of this permit.

Referenced attachments made a part of this permit:

Appendix U-1, List of Unregulated Emissions Units and/or Activities
Appendix I-1, List of Insignificant Emissions Units and/or Activities
APPENDIX TV-1, TITLE V CONDITIONS (version dated 12/02/97)
APPENDIX SS-1, STACK SAMPLING FACILITIES (version dated 10/07/96)
Phase II Acid Rain Application/Compliance Plan received December 14, 1995.

Effective Date: January 1, 2000
Renewal Application Due Date: July 5, 2004
Expiration Date: December 31, 2004

Howard L. Rhodes, Director
Division of Air Resources
Management

HLR/sms/mpb

Section I. Facility Information.
Subsection A. Facility Description.

This facility consists of two fuel oil fired steam electric generating stations, E.U. ID No. -001 (Unit No. 1) and -002 (Unit No. 2). Unit No. 1 consists of a Combustion Engineering, Inc., Type CCRR boiler/steam generator and steam turbine which drives a generator with a nameplate rating of 535(summer)/540(winter) Megawatts. Unit No. 2 consists of a Combustion Engineering, Inc., Type CCRR boiler/steam generator and steam turbine which drives a generator with a nameplate rating of 525(summer)/530(winter) Megawatts. Units No. 1 and No. 2 share a common stack. Also included in this permit are miscellaneous unregulated and insignificant emissions units and/or activities. Relocatable diesel fired generator(s) with a maximum heat input of 25.74 MMBtu/hour and a maximum rating of 2460 Kilowatts are permitted to be located at this facility and may be relocated to other FPC facilities.

Based on the initial Title V permit application received on June 14, 1996, this facility is a major source of hazardous air pollutants (HAPs).

Subsection B. Summary of Emissions Unit ID No(s). and Brief Description(s).

E.U. ID No.	Brief Description
-001	Fuel Oil Fired Steam Electric Generator No. 1
-002	Fuel Oil Fired Steam Electric Generator No. 2
-7775047 -001	Relocatable Diesel Generator(s)

- Unregulated Emissions Units and/or Activities
- xxx Surface Coating and Solvent Cleaning
 - xxx Fuel Storage Tanks
 - xxx Emergency Generators
 - xxx General Purpose Engines
 - xxx Helper Cooling Towers

Please reference the Permit No., Facility ID No., and appropriate Emissions Unit(s) ID No(s). on all correspondence, test report submittals, applications, etc.

Subsection C. Relevant Documents.

The documents listed below are not a part of this permit; however, they are specifically related to this permitting action.

These documents are provided to the permittee for information purposes only:

Table 1-1, Summary of Air Pollutant Standards and Terms

Table 2-1, Summary of Compliance Requirements

Appendix A-1, Abbreviations, Acronyms, Citations, and Identification Numbers

Appendix H-1, Permit History/ID Number Changes

These documents are on file with the permitting authority:

Initial Title V Permit Application received June 14, 1996.

Letter from Mr. Scott H. Osbourn dated and received by fax on October 13, 1997.

Phase II Acid Rain Application submitted on December 14, 1995.

Section II. Facility-wide Conditions.

The following conditions apply facility-wide:

1. APPENDIX TV-1, TITLE V CONDITIONS is a part of this permit.
{Permitting note: APPENDIX TV-1, TITLE V CONDITIONS, is distributed to the permittee only. Other persons requesting copies of these conditions shall be provided a copy when requested or otherwise appropriate.}
2. **Not federally enforceable.** General Pollutant Emission Limiting Standards. Objectionable Odor Prohibited. The permittee shall not cause, suffer, allow, or permit the discharge of air pollutants which cause or contribute to an objectionable odor.
[Rule 62-296.320(2), F.A.C.]
3. General Particulate Emission Limiting Standards. General Visible Emissions Standard.
Except for emissions units that are subject to a particulate matter or opacity limit set forth or established by rule and reflected by conditions in this permit, no person shall cause, let, permit, suffer or allow to be discharged into the atmosphere the emissions of air pollutants from any activity, the density of which is equal to or greater than that designated as Number 1 on the Ringelmann Chart (20 percent opacity). EPA Method 9 is the method of compliance pursuant to Chapter 62-297, F.A.C.
[Rule 62-296.320(4)(b)1. & 4., F.A.C.]
4. Prevention of Accidental Releases (Section 112(r) of CAA). If required by 40 CFR 68, the permittee shall submit to the implementing agency:
 - a. a risk management plan (RMP) when, and if, such requirement becomes applicable; and
 - b. certification forms and/or RMPs according to the promulgated rule schedule.[40 CFR 68]
5. Unregulated Emissions Units and/or Activities. Appendix U-1, List of Unregulated Emissions Units and/or Activities, is a part of this permit.
[Rule 62-213.440(1), F.A.C.]
6. Insignificant Emissions Units and/or Activities. Appendix I-1, List of Insignificant Emissions Units and/or Activities, is a part of this permit.
[Rules 62-213.440(1), 62-213.430(6), and 62-4.040(1)(b), F.A.C.]

7. General Pollutant Emission Limiting Standards. Volatile Organic Compounds (VOC) Emissions or Organic Solvents (OS) Emissions. The permittee shall not store, pump, handle, process, load, unload or use in any process or installation, volatile organic compounds (VOC) or organic solvents (OS) without applying known and existing vapor emission control devices or systems deemed necessary and ordered by the Department. [Rule 62-296.320(1)(a), F.A.C.]

8. **Not federally enforceable.** Reasonable precautions to prevent emissions of unconfined particulate matter at this facility shall include:

- a. Maintenance of paved areas as needed,
- b. Regular mowing of grass and care of vegetation, and
- c. Limiting access to plant property by unnecessary vehicles.

[Rule 62-296.320(4)(c)2., F.A.C.; Proposed by applicant in the initial Title V permit application received June 14, 1996]

9. When appropriate, any recording, monitoring, or reporting requirements that are time-specific shall be in accordance with the effective date of the permit, which defines day one.

[Rule 62-213.440, F.A.C.]

10. The permittee shall submit all compliance related notifications and reports required of this permit to the Department's Southwest District office:

Department of Environmental Protection
Southwest District Office
3804 Coconut Palm Drive
Tampa, Florida 33619-8218
Telephone: 813/744-6100
Fax: 813/744-6458

11. Any reports, data, notifications, certifications, and requests required to be sent to the United States Environmental Protection Agency, Region 4, should be sent to:

United States Environmental Protection Agency
Region 4
Air, Pesticides & Toxics Management Division
Air and EPCRA Enforcement Branch, Air Compliance Section
61 Forsyth Street
Atlanta, Georgia 32303
Telephone: 404/562-9099
Fax: 404/562-9095

12. Statement of Compliance. The annual statement of compliance pursuant to Rule 62-213.440(3), F.A.C., shall be submitted within sixty (60) days after the end of the calendar year.
{See condition No. 52., Appendix TV-1, Title V Conditions}
[Rule 62-214.420(11), F.A.C.]

Section III. Emissions Unit(s) and Conditions.

Subsection A. This section addresses the following emissions units.

E.U. ID No.	Brief Description
-001	Fossil Fuel Fired Steam Generator # 1
-002	Fossil Fuel Fired Steam Generator # 2

Fossil fuel fired steam generator # 1 is a nominal 535(summer)/540(winter) megawatt (electric) steam generator designated as Anclote Unit # 1. The emission unit is fired on new No. 6 or lighter grades of fuel oil and on-specification used oil, as permitted herein, with a maximum heat input of 4964 MMBtu per hour.

Fossil fuel fired steam generator # 2 is a nominal 525(summer)/530(winter) megawatt (electric) steam generator designated as Anclote Unit # 2. The emission unit is fired on new No. 6 or lighter grades of fuel oil and on-specification used oil, as permitted herein, with a maximum heat input of 4850 MMBtu per hour. Each boiler/steam generator, units #1 and #2, drives a turbine generator and both units share a common 499 foot exhaust stack. Emissions from these units are uncontrolled.

{Permitting note(s): The emissions units are regulated under the Federal Acid Rain Program, and Rule 62-296.405, F.A.C., Fossil Fuel Steam Generators with More than 250 million Btu per Hour Heat Input. Fossil fuel fired steam generator # 1 began commercial operation on October 16, 1974; and, fossil fuel fired steam generator # 2 began commercial operation on October 31, 1978.}

The following specific conditions apply to the emissions units listed above:

Essential Potential to Emit (PTE) Parameters

A.1. Permitted Capacity. The maximum operation heat input rates are as follows:

Unit No.	MMBtu/hr Heat Input	Fuel Type
1	4964	No. 1, 2, 3, 4, 5 or 6 Fuel Oil & On-Specification Used Oil
2	4850	No. 1, 2, 3, 4, 5, or 6 Fuel Oil & On-specification Used Oil

* The on-specification used oil burned at this facility may be generated on or off-site.
 [Rules 62-4.160(2), 62-210.200(PTE) and 62-296.405, F.A.C.]

{Permitting note: The heat input limitations have been placed in the permit to identify the capacity of each emissions unit for purposes of confirming that emissions testing is conducted within 90-100 percent of the emission unit's rated capacity (or to limit future operation to 110 percent of the test load), to establish appropriate limits and to aid in determining future rule applicability.}
 [Rule 62-4.160(2), and Rule 62-297.310(2), F.A.C.]

A.2. Emissions Unit Operating Rate Limitation After Testing. See specific condition **A.22.**
 [Rule 62-297.310(2), F.A.C.]

A.3. Methods of Operation. Fuel(s).

a. Startup: The only fuels allowed to be burned are new #6 or lighter grades of fuel oils. On-specification used oil shall only be burned if the PCB's are less than 2 ppm and may be blended with new #6 or lighter grades of fuel oil. The maximum sulfur content is 2.5 percent, by weight.

b. Normal: The only fuels allowed to be burned are new #6 or lighter grades of fuel oils and on-specification used oil. The maximum sulfur content is 2.5 percent, by weight.

c. **Not federally enforceable.** The maximum amount of on-specification used oil, whether generated on or off-site, that can be burned facility-wide shall not exceed 10 percent of the heat input or 30 million gallons per year cumulatively.

[Rule 62-213.410, F.A.C.; and, AO 51-254492A & 1010017-001-AO]

A.4. Hours of Operation. These emissions units may operate continuously, i.e., 8,760 hours/year.
[Rule 62-210.200(PTE), F.A.C.]

Emission Limitations and Standards

{Permitting Note: The attached Table 1-1, Summary of Air Pollutant Standards and Terms, summarizes information for convenience purposes only. This table does not supersede any of the terms or conditions of this permit.}

A.5. Visible Emissions. Visible emissions shall not exceed 40 percent opacity. Emissions units governed by this visible emissions standard shall conduct a compliance test for particulate matter emissions annually. Failure of the facility to demonstrate compliance with the particulate matter allowable in specific condition **A.7.** or the opacity standard of this condition shall constitute grounds for revocation of this condition.
[Rule 62-296.405(1)(a), F.A.C.; and, OGC File Nos. 86-1574 and 86-1575/Orders dated December 11, 1986.]

A.6. Visible Emissions - Soot Blowing and Load Change. Visible emissions shall not exceed 60 percent opacity during the 3-hours in any 24 hour period of excess emissions allowed for boiler cleaning (soot blowing) and load change. A load change occurs when the operational capacity of a unit is in the 10 percent to 100 percent capacity range, other than startup or shutdown, which exceeds 10 percent of the unit's rated capacity and which occurs at a rate of 0.5 percent per minute or more.
[Rule 62-210.700(3), F.A.C.]

A.7. Particulate Matter. Particulate matter emissions shall not exceed 0.1 pound per million Btu heat input, as measured by applicable compliance methods. See specific condition **A.18.**
[Rule 62-296.405(1)(b), F.A.C.]

A.8. Particulate Matter - Soot Blowing and Load Change. Particulate matter emissions shall not exceed an average of 0.3 pound per million Btu heat input during the 3-hours in any 24-hour period of excess emissions allowed for boiler cleaning (soot blowing) and load change.
[Rule 62-210.700(3), F.A.C.]

A.9. Sulfur Dioxide. When burning fuel oils, sulfur dioxide emissions shall not exceed 2.75 pounds per million Btu heat input, as measured by applicable compliance methods. See specific conditions **A.19.** and **A.20.**
[Rule 62-296.405(1)(c)1.j., F.A.C.]

A.10. Sulfur Dioxide - Sulfur Content. The sulfur content of fuel oils, on-specification used oil, or any combination of the two burned in these units, shall not exceed 2.5 percent, by weight. See specific condition **A.20.**

[Rule 62-296.405(1)(e)3., F.A.C.; and, requested by the applicant in Title V Application dated June 12, 1996.]

Excess Emissions

A.11. Excess emissions resulting from malfunction shall be permitted provided that best operational practices to minimize emissions are adhered to and the duration of excess emissions shall be minimized but in no case exceed two hours in any 24 hour period unless specifically authorized by the Department for longer duration. [Rule 62-210.700(1), F.A.C.]

A.12. Excess emissions resulting from startup or shutdown shall be permitted provided that best operational practices to minimize emissions are adhered to and the duration of excess emissions shall be minimized. [Rule 62-210.700(2), F.A.C.]

A.13. Excess emissions which are caused entirely or in part by poor maintenance, poor operation, or any other equipment or process failure which may reasonably be prevented during startup, shutdown or malfunction shall be prohibited. [Rule 62-210.700(4), F.A.C.]

Monitoring of Operations

A.14. Sulfur Dioxide. **The permittee elected to demonstrate compliance by accepting a liquid fuel sulfur limit that will be verified with a fuel analysis provided by the vendor or permittee upon each fuel delivery.** This protocol is allowed because the emissions units do not have an operating flue gas desulfurization device. See specific conditions **A.10.**, **A.19.** and **A.20.** [Rule 62-296.405(1)(f)1.b., F.A.C.]

A.15. Determination of Process Variables.

(a) **Required Equipment.** The owner or operator of an emissions unit for which compliance tests are required shall install, operate, and maintain equipment or instruments necessary to determine process variables, such as process weight input or heat input, when such data are needed in conjunction with emissions data to determine the compliance of the emissions unit with applicable emission limiting standards.

(b) **Accuracy of Equipment.** Equipment or instruments used to directly or indirectly determine process variables, including devices such as belt scales, weight hoppers, flow meters, and tank scales, shall be calibrated and adjusted to indicate the true value of the parameter being measured with sufficient accuracy to allow the applicable process variable to be determined within 10% of its true value. [Rule 62-297.310(5), F.A.C.]

Test Methods and Procedures

{Permitting Note: The attached Table 2-1, Summary of Compliance Requirements, summarizes information for convenience purposes only. This table does not supersede any of the terms or conditions of this permit.}

A.16. Visible emissions. The test method for visible emissions shall be DEP Method 9, incorporated in Chapter 62-297, F.A.C. A transmissometer may be used and calibrated according to Rule 62-297.520, F.A.C. See specific condition **A.17.**
[Rule 62-296.405(1)(e)1., F.A.C.]

A.17. DEP Method 9. The provisions of EPA Method 9 (40 CFR 60, Appendix A) are adopted by reference with the following exceptions:

1. EPA Method 9, Section 2.4, Recording Observations. Opacity observations shall be made and recorded by a certified observer at sequential fifteen second intervals during the required period of observation.

2. EPA Method 9, Section 2.5, Data Reduction. For a set of observations to be acceptable, the observer shall have made and recorded, or verified the recording of, at least 90 percent of the possible individual observations during the required observation period. For single-valued opacity standards (e.g., 20 percent opacity), the test result shall be the highest valid six-minute average for the set of observations taken. For multiple-valued opacity standards (e.g., 20 percent opacity, except that an opacity of 40 percent is permissible for not more than two minutes per hour) opacity shall be computed as follows:

a. For the basic part of the standard (i.e., 20 percent opacity) the opacity shall be determined as specified above for a single-valued opacity standard.

b. For the short-term average part of the standard, opacity shall be the highest valid short-term average (i.e., two-minute, three-minute average) for the set of observations taken.

In order to be valid, any required average (i.e., a six-minute or two-minute average) shall be based on all of the valid observations in the sequential subset of observations selected, and the selected subset shall contain at least 90 percent of the observations possible for the required averaging time. Each required average shall be calculated by summing the opacity value of each of the valid observations in the appropriate subset, dividing this sum by the number of valid observations in the subset, and rounding the result to the nearest whole number. The number of missing observations in the subset shall be indicated in parenthesis after the subset average value.

[Rule 62-297.401, F.A.C.]

A.18. Particulate Matter. The test methods for particulate emissions shall be EPA Methods 17, 5, 5B, or 5F, incorporated by reference in Chapter 62-297, F.A.C. The minimum sample volume shall be 30 dry standard cubic feet. EPA Method 5 may be used with filter temperature no more than 320 degrees Fahrenheit. For EPA Method 17, stack temperature shall be less than 375 degrees Fahrenheit. The owner or operator may use EPA Method 5 to demonstrate compliance. EPA Method 3 or 3A with Orsat analysis shall be used when the oxygen based F-factor, computed according to EPA Method 19, is used in lieu of heat input. Acetone wash shall be used with EPA Method 5 or 17.

[Rules 62-296.405(1)(e)2. and 62-297.401, F.A.C.]

A.19. Sulfur Dioxide. The test methods for sulfur dioxide emissions shall be EPA Methods 6, 6A, 6B, or 6C, incorporated by reference in Chapter 62-297, F.A.C. Fuel sampling and analysis may be used as an alternate sampling procedure if such a procedure is incorporated into the operation permit for the emissions unit. If the emissions unit obtains an alternate procedure under the provisions of Rule 62-297.620, F.A.C., the procedure shall become a condition of the emissions unit's permit. The Department will retain the authority to require EPA Method 6 or 6C if it has reason to believe that exceedences of the sulfur dioxide emissions limiting standard are occurring. Results of an approved fuel sampling and analysis program shall have the same effect as EPA Method 6 test results for purposes of demonstrating compliance or noncompliance with sulfur dioxide standards. **The permittee may use the EPA test methods, referenced above, to demonstrate compliance; however, as an alternate sampling procedure authorized by permit, the permittee elected to demonstrate compliance by accepting a liquid fuel sulfur limit that will be verified with a fuel analysis provided by the vendor upon each fuel delivery.** See specific conditions A.9., A.10. and A.20.

[Rules 62-213.440, 62-296.405(1)(e)3. and 62-297.401, F.A.C.; and, Permits 1010017-001-AO and AO 51-254492A.]

A.20. Sulfur Content of Liquid Fuel. The fuel sulfur content, percent by weight, for liquid fuels shall be evaluated using either ASTM D2622-94, ASTM D4294-90, both ASTM D4057-88 and ASTM D129-95, or the latest edition(s).

[Rules 62-213.440, 62-296.405(1)(e)3, 62-296.405(1)(f)1.b. and 62-297.440, F.A.C.]

A.21. Required Number of Test Runs. For mass emission limitations, a compliance test shall consist of three complete and separate determinations of the total air pollutant emission rate through the test section of the stack or duct and three complete and separate determinations of any applicable process variables corresponding to the three distinct time periods during which the stack emission rate was measured provided, however, that three complete and separate determinations shall not be required if the process variables are not subject to variation during a compliance test, or if three determinations are not necessary in order to calculate the unit's emission rate. The three required test runs shall be completed within one consecutive five day period. In the event that a sample is lost or one of the three runs must be discontinued because of circumstances beyond the control of the owner or operator, and a valid third run cannot be obtained within the five day period allowed for the test, the Secretary or his or her designee may accept the results of the two complete runs as proof of compliance, provided that the arithmetic mean of the results of the two complete runs is at least 20 percent below the allowable emission limiting standards.

[Rule 62-297.310(1), F.A.C.]

A.22. Operating Rate During Testing. Testing of emissions shall be conducted with the emissions unit operation at permitted capacity, which is defined as 90 to 100 percent of the maximum operation rate allowed by the permit. If it is impracticable to test at permitted capacity, an emissions unit may be tested at less than the minimum permitted capacity; in this case, subsequent emissions unit operation is limited to 110 percent of the test load until a new test is conducted. Once the emissions unit is so limited, operation at higher capacities is allowed for no more than 15 consecutive days for the purpose of additional compliance testing to regain the authority to operate at the permitted capacity.

[Rules 62-297.310(2) & (2)(b), F.A.C.]

A.23. Calculation of Emission Rate. The indicated emission rate or concentration shall be the arithmetic average of the emission rate or concentration determined by each of the separate test runs unless otherwise specified in a particular test method or applicable rule.

[Rule 62-297.310(3), F.A.C.]

A.24. Applicable Test Procedures.

(a) Required Sampling Time.

1. Unless otherwise specified in the applicable rule, the required sampling time for each test run shall be no less than one hour and no greater than four hours, and the sampling time at each sampling point shall be of equal intervals of at least two minutes.

2. Opacity Compliance Tests. The required minimum period of observation for a compliance test shall be sixty (60) minutes for emissions units which emit or have the potential to emit 100 tons per year or more of particulate matter, and thirty (30) minutes for emissions units which have potential emissions less than 100 tons per year of particulate matter and are not subject to a multiple-valued opacity standard. The opacity test observation period shall include the period during which the highest opacity emissions can reasonably be expected to occur. Exceptions to these requirements are as follows:

c. The minimum observation period for opacity tests conducted by employees or agents of the Department to verify the day-to-day continuing compliance of a unit or activity with an applicable opacity standard shall be twelve minutes.

(b) Minimum Sample Volume. Unless otherwise specified in the applicable rule, the minimum sample volume per run shall be 25 dry standard cubic feet.

(c) Required Flow Rate Range. For EPA Method 5 particulate sampling, acid mist/sulfur dioxide, and fluoride sampling which uses Greenburg Smith type impingers, the sampling nozzle and sampling time shall be selected such that the average sampling rate will be between 0.5 and 1.0 actual cubic feet per minute, and the required minimum sampling volume will be obtained.

(d) Calibration of Sampling Equipment. Calibration of the sampling train equipment shall be conducted in accordance with the schedule shown in Table 297.310-1.

(e) Allowed Modification to EPA Method 5. When EPA Method 5 is required, the following modification is allowed: the heated filter may be separated from the impingers by a flexible tube.

[Rule 62-297.310(4), F.A.C.]

A.25. Required Stack Sampling Facilities. When a mass emissions stack test is required, the permittee shall comply with the requirements contained in Appendix SS-1, Stack Sampling Facilities, attached to this permit.

[Rule 62-297.310(6), F.A.C.]

A.26. Frequency of Compliance Tests. The following provisions apply only to those emissions units that are subject to an emissions limiting standard for which compliance testing is required.

(a) General Compliance Testing.

2. For excess emission limitations for particulate matter specified in Rule 62-210.700, F.A.C., a compliance test shall be conducted annually while the emissions unit is operating under soot blowing conditions in each federal fiscal year during which soot blowing is part of normal emissions unit operation, except that such test shall not be required in any federal fiscal year in which a fossil fuel steam generator does not burn liquid for more than 400 hours other than during startup.

3. The owner or operator of an emissions unit that is subject to any emission limiting standard shall conduct a compliance test that demonstrates compliance with the applicable emission limiting standard prior to obtaining a renewed operation permit. Emissions units that are required to conduct an annual compliance test may submit the most recent annual compliance test to satisfy the requirements of this provision. In renewing an air operation permit pursuant to Rule 62-210.300(2)(a)3.b., c., or d., F.A.C., the Department shall not require submission of emission compliance test results for any emissions unit that, during the year prior to renewal:

a. Did not operate; or

b. In the case of a fuel burning emissions unit, burned liquid fuel for a total of no more than 400 hours.

TABLE 297.310-1
 CALIBRATION SCHEDULE

ITEM	MINIMUM CALIBRATION FREQUENCY	REFERENCE INSTRUMENT	TOLERANCE
Liquid in glass thermometer	Annually	ASTM Hg in glass ref. thermometer or equivalent, or thermometric points	+/-2%
Bimetallic thermometer	Quarterly	Calib. liq. in glass thermometer	5 degrees F
Thermocouple	Annually	ASTM Hg in glass ref. thermometer, NBS calibrated reference and potentiometer	5 degrees F
Barometer	Monthly	Hg barometer or NOAA station	+/-1% scale
Pitot Tube	When required or when damaged	By construction or measurements in wind tunnel D greater than 16" and standard pitot tube	See EPA Method 2, Fig. 2-2 & 2-3
Probe Nozzles	Before each test or when nicked, dented, or corroded	Micrometer	+/-0.001" mean of at least three readings Max. deviation between readings .004"
Dry Gas Meter and Orifice Meter	1. Full Scale: When received, When 5% change observed, Annually 2. One Point: Semiannually 3. Check after each test series	Spirometer or calibrated wet test or dry gas test meter	2%
		Comparison check	5%

4. During each federal fiscal year (October 1 - September 30), unless otherwise specified by rule, order, or permit, the owner or operator of each emissions unit shall have a formal compliance test conducted for:

a. Visible emissions, if there is an applicable standard;

b. Each of the following pollutants, if there is an applicable standard, and if the emissions unit emits or has the potential to emit: 5 tons per year or more of lead or lead compounds measured as elemental lead; or 100 tons per year or more of any other regulated air pollutant.

5. An annual compliance test for particulate matter emissions shall not be required for any fuel burning emissions unit that, in a federal fiscal year, does not burn liquid fuel, other than during startup, for a total of more than 400 hours.

9. The owner or operator shall notify the Department, at least 15 days prior to the date on which each formal compliance test is to begin, of the date, time, and place of each such test, and the test contact person who will be responsible for coordinating and having such test conducted for the owner or operator.

(b) Special Compliance Tests. When the Department, after investigation, has good reason (such as complaints, increased visible emissions or questionable maintenance of control equipment) to believe that any applicable emission standard contained in a Department rule or in a permit issued pursuant to those rules is being violated, it may require the owner or operator of the emissions unit to conduct compliance tests which identify the nature and quantity of pollutant emissions from the emissions unit and to provide a report on the results of said tests to the Department.

(c) Waiver of Compliance Test Requirements. If the owner or operator of an emissions unit that is subject to a compliance test requirement demonstrates to the Department, pursuant to the procedure established in Rule 62-297.620, F.A.C., that the compliance of the emissions unit with an applicable weight emission limiting standard can be adequately determined by means other than the designated test procedure, such as specifying a surrogate standard of no visible emissions for particulate matter sources equipped with a bag house or specifying a fuel analysis for sulfur dioxide emissions, the Department shall waive the compliance test requirements for such emissions units and order that the alternate means of determining compliance be used, provided, however, the provisions of Rule 62-297.310(7)(b), F.A.C., shall apply.

[Rule 62-297.310(7), F.A.C.; SIP approved]

A.27. Compliance Testing for Visible Emissions. By this permit, annual emissions compliance testing for visible emissions is not required for these emissions units while burning only liquid fuel(s) for less than 400 hours per year.

[Rule 62-297.310(7)(a)4., F.A.C.]

A.28. Compliance Testing for PM. Annual and permit renewal compliance testing for particulate matter emissions is not required for these emissions units while burning only liquid fuel(s) for less than 400 hours per year.

[Rules 62-297.310(7)(a)3. & 5., F.A.C.]

Record keeping and Reporting Requirements

A.29. Excess Emissions Notification. In the case of excess emissions resulting from malfunctions, each owner or operator shall notify the Department's Southwest District Office in accordance with Rule 62-4.130, F.A.C. A full written report on the malfunctions shall be submitted in a quarterly report, if requested by the Department's Southwest District Office.

[Rule 62-210.700(6), F.A.C.]

A.30. Submit to the Department's Southwest District Office a written report of emissions in excess of emission limiting standards as set forth in Rule 62-296.405(1), F.A.C., for each calendar quarter. The nature and cause of the excess emissions shall be explained. This report does not relieve the owner or operator of the legal liability for violations. All recorded data shall be maintained on file by the Source for a period of five years. [Rules 62-213.440 and 62-296.405(1)(g), F.A.C.]

A.31. Test Reports.

- (a) The owner or operator of an emissions unit for which a compliance test is required shall file a report with the Department's Southwest District Office on the results of each such test.
- (b) The required test report shall be filed with the Department's Southwest District Office as soon as practical but no later than 45 days after the last sampling run of each test is completed.
- (c) The test report shall provide sufficient detail on the emissions unit tested and the test procedures used to allow the Department's Southwest District Office to determine if the test was properly conducted and the test results properly computed. As a minimum, the test report, other than for an EPA or DEP Method 9 test, shall provide the following information:
1. The type, location, and designation of the emissions unit tested.
 2. The facility at which the emissions unit is located.
 3. The owner or operator of the emissions unit.
 4. The normal type and amount of fuels used and materials processed, and the types and amounts of fuels used and material processed during each test run.
 5. The means, raw data and computations used to determine the amount of fuels used and materials processed, if necessary to determine compliance with an applicable emission limiting standard.
 6. The type of air pollution control devices installed on the emissions unit, their general condition, their normal operating parameters (pressure drops, total operating current and GPM scrubber water), and their operating parameters during each test run.
 7. A sketch of the duct within 8 stack diameters upstream and 2 stack diameters downstream of the sampling ports, including the distance to any upstream and downstream bends or other flow disturbances.
 8. The date, starting time and duration of each sampling run.
 9. The test procedures used, including any alternative procedures authorized pursuant to Rule 62-297.620, F.A.C. Where optional procedures are authorized in this chapter, indicate which option was used.
 10. The number of points sampled and configuration and location of the sampling plane.
 11. For each sampling point for each run, the dry gas meter reading, velocity head, pressure drop across the stack, temperatures, average meter temperatures and sample time per point.
 12. The type, manufacturer and configuration of the sampling equipment used.
 13. Data related to the required calibration of the test equipment.
 14. Data on the identification, processing and weights of all filters used.
 15. Data on the types and amounts of any chemical solutions used.
 16. Data on the amount of pollutant collected from each sampling probe, the filters, and the impingers, are reported separately for the compliance test.
 17. The names of individuals who furnished the process variable data, conducted the test, analyzed the samples and prepared the report.
 18. All measured and calculated data required to be determined by each applicable test procedure for each run.
 19. The detailed calculations for one run that relate the collected data to the calculated emission rate.
 20. The applicable emission standard, and the resulting maximum allowable emission rate for the emissions unit, plus the test result in the same form and unit of measure.

21. A certification that, to the knowledge of the owner or his authorized agent, all data submitted are true and correct. When a compliance test is conducted for the Department or its agent, the person who conducts the test shall provide the certification with respect to the test procedures used. The owner or his authorized agent shall certify that all data required and provided to the person conducting the test are true and correct to his knowledge.

[Rules 62-213.440 and 62-297.310(8), F.A.C.]

Addition limitations for On-Specification Used Oil

A.32. Not federally enforceable. On-specification used oil generated at this facility or off-site may only be burned in these emissions units if compliance with all the conditions of this permit and the following additional conditions are demonstrated:

- a. On-specification Used Oil Allowed as Fuel: This permit allows the burning of used fuel oil meeting EPA "on-specification" used oil specifications, with a maximum sulfur content of 2.5 percent, by weight, and a PCB concentration of less than 50 ppm. On-specification used oil shall meet the following specifications [40 CFR 279, Subpart B.]

1. Arsenic shall not exceed 5.0 ppm;
2. Cadmium shall not exceed 2.0 ppm;
3. Chromium shall not exceed 10.0 ppm;
4. Lead shall not exceed 100.0 ppm;
5. Total halogens shall not exceed 1000 ppm;
6. Flash point shall not be less than 100 degrees F.

Used oil that does not meet the specifications for on-specification used oil shall not be burned at this facility.

- b. Quantity Limited: The maximum amount of on-specification used oil, whether generated on or off-site, that can be burned facility-wide shall not exceed 10 percent of the heat input or 30 million gallons per year cumulatively.
- c. Used Oil Containing PCBs \geq 50 ppm Not Allowed: Used oil containing a PCB concentration of 50 ppm or greater shall not be burned at this facility. Used oil shall not be blended to meet this requirement or any part of this condition .
- d. PCB Concentration of 2 to 50 ppm: On-specification used oil with a PCB concentration of 2 to less than 50 ppm shall be burned only at normal source operating temperatures. On specification used oil with a PCB concentration of 2 to less than 50 ppm shall not be burned during periods of startup or shutdown.

Before accepting from each marketer the first shipment of on-specification used oil with a PCB concentration of 2 to less than 50 ppm, the owner or operator shall provide each marketer with a one-time written and signed notice certifying that the owner or operator will burn the used oil in a qualified combustion device. The notice must state that EPA or a RCRA-delegated state agency has been given a description of the used oil management activities at the facility and that an industrial boiler or furnace will be used to burn the used

oil with a PCB concentration of 2 to less than 50 ppm. The description of the used oil management activities shall be submitted to the Administrator, Hazardous Waste Regulation Section, Florida Department of Environmental Protection, 2600 Blair Stone Road, Tallahassee, FL 32399-2400. [40 CFR 279 and 761.20(e)]

- e. Certification Required: The owner or operator shall receive from the marketer, for each load of used oil received, a certification that the used oil meets the specifications for on-specification used oil and contains a PCB concentration of less than 50 ppm. This certification shall also describe the basis for the certification, such as analytical results. Note that a claim that used oil does not contain quantifiable levels of PCBs (that is, that the used oil contains less than 2 ppm of PCBs) must be documented by testing or other information. The first person making the claim that the used oil does not contain PCBs is responsible for furnishing the documentation. The documentation can be tests, personal or special knowledge of the source and composition of the used oil, or a certification from the person generating the used oil claiming that the used oil contains no detectable PCBs.
- f. Testing Required: If the owner or operator does not receive certification from the marketer as described above, the owner or operator shall properly sample and test each load of used oil received for the following parameters:

Arsenic, cadmium, chromium, lead, total halogens, flash point, PCBs*, and percent sulfur content by weight, ash, and BTU value (BTU per gallon).

Testing (sampling, extraction and analysis) shall be performed using approved methods specified in EPA Publication SW-846 (Test Methods for Evaluating Solid Waste, Physical/Chemical Methods).

* Testing for PCB's is not necessary if quantifiable levels are less than 2 ppm (ref. to specific condition A.32.e., above)

If the owner or operator relies on certification from the marketer, the owner or operator shall be responsible for ensuring that the certification complies with all the requirements of this condition and all conditions of this permit.

If the analytical results show that the used oil does not meet the specification for on-specification used oil, or that it contains a PCB concentration greater than or equal to 50 ppm, the owner or operator shall immediately notify and provide the analytical results to the Department's Southwest District Office. The owner or operator shall immediately cease burning of the used oil.

- g. Special Record Keeping Requirements: The owner or operator shall obtain, make, and keep the following records related to the use of used oil: [40 CFR 761.20(e)]

- (1) The gallons of on-specification used oil received and burned each month. (This record shall be completed no later than the fifteenth day of the succeeding month.)
- (2) The total gallons of on-specification used oil burned in the preceding consecutive 12-month period. (This record shall be completed no later than the fifteenth day of the succeeding month.)

- (3) The name and address of all marketers delivering used oil to the facility.
- (4) Copies of the marketer certifications, if obtained, and any supporting information.
- (5) Documentation that the used oil contains less than 2 ppm PCBs, if claimed, including the name and address of the person making the claim.
- (6) Results of the analyses required above.
- (7) A copy of the notice to EPA and a copy of the one-time written notice provided to each marketer.

The records shall be retained in a form suitable for inspection at the facility by the Department, and shall be retained for 5 years.

- h. Reporting Required: The owner or operator shall submit, with the Annual Operation Report (AOR) form, the total amount of on-specification used oil received, and the total amount of on-specification used oil burned during the previous calendar year to the Southwest District Office. The AOR shall include the total amount of lead emitted as a result of burning on-specification used oil during the calendar year on a monthly basis.

[Rules 62-4.070(3), 62-212.400(2)(f)1. and 62-213.440, F.A.C.; and, AO 51-254492A & 1010017-001-AO]

Section III. Emissions Units and Conditions.

Subsection B. This section addresses the following emissions units.

E.U. ID No.	Brief Description
-7775047 -001	Relocatable Diesel Fired Generator(s)

These relocatable emissions units are Caterpillar Model 3508-DITA 820 kilowatt diesel generators. The maximum heat input is 25.74 million Btu per hour (MMBtu/hour) while being fueled by 186.3 gallons of new No. 2 fuel oil per hour with a maximum rating of 2460 kilowatts. Emissions from the generators are uncontrolled. The generators may be relocated at any of the following facilities:

1. Crystal River Plant, Powerline Road, Red Level, Citrus County.
2. Bartow Plant, Weedon Island, St. Petersburg, Pinellas County.
3. Higgins Plant, Shore Drive, Oldsmar, Pinellas County.
4. Bayboro Plant, 13th Ave. & 2nd St. South, St. Petersburg, Pinellas County.
5. Wildwood Reclamation Facility, State Road 462, 1 mi. east of U.S. 301, Wildwood, Sumter County.
6. The future FPC Polk County Site, County Road 555, 1 mi. southwest of Homeland, Polk County.

{Permitting notes: These emissions units are regulated under Rule 62-210.300, F.A.C., Permits Required. Each generator has its own stack. The heat input limitations have been placed in the permit to identify the capacity of each emissions unit for purposes of confirming that emissions testing is conducted within 90-100 percent of the emission unit's rated capacity (or to limit future operation to 110 percent of the test load), to establish appropriate limits and to aid in determining future rule applicability.}

[Rule 62-4.160(2), and Rule 62-297.310(2), F.A.C.]

The following specific conditions apply to the emissions units listed above regardless of location:

Essential Potential to Emit (PTE) Parameters

B.1. Permitted Capacity. The maximum operation heat input rates are as follows:

[Rules 62-4.160(2) and 62-210.200(PTE), F.A.C.]

Unit No.	MMBtu/hr/generator(s) Heat Input	Fuel Type
-7775047 -001	25.74	New Low Sulfur No. 2 Fuel Oil

B.2. Emissions Unit Operating Rate Limitation After Testing. See specific condition **B.13.**

[Rule 62-297.310(2), F.A.C.]

B.3. Methods of Operation - Fuels. Only new low sulfur No. 2 fuel oil shall be fired in the diesel generator(s).

[Rule 62-213.410, F.A.C.]

B.4. Hours of Operation. The hours of operation expressed as “engine-hours” shall not exceed 2970 hours in any consecutive 12 month period. The total hours of operation expressed as “engine-hours” shall be the summation of the individual hours of operation of each generator.
[Rules 62-4.160(2) and 62-210.200(PTE), F.A.C.; and, AO 09-205952.]

Emission Limitations and Standards

{Permitting Note: The attached Table 1-1, Summary of Air Pollutant Standards and Terms, summarizes information for convenience purposes only. This table does not supersede any of the terms or conditions of this permit.}

B.5. Visible Emissions. Visible emissions from each generator shall not be equal to or greater than 20 percent opacity.
[Rule 62-296.320(4)(b)1., F.A.C.; and, AO 09-205952.]

B.6. Sulfur Dioxide - Sulfur Content. The sulfur content of the new No. 2 fuel oil shall not exceed 0.50 percent, by weight.
[Requested in initial Title V permit application dated June 12, 1996; and, AC 09-202080.]

Excess Emissions

B.7. Excess emissions from these emissions units resulting from startup, shutdown or malfunction shall be permitted provided that best operational practices to minimize emissions are adhered to and the duration of excess emissions shall be minimized but in no case exceed two hours in any 24 hour period unless specifically authorized by the Department for longer duration.
[Rule 62-210.700(1), F.A.C.]

B.8. Excess emissions which are caused entirely or in part by poor maintenance, poor operation, or any other equipment or process failure which may reasonably be prevented during startup, shutdown or malfunction shall be prohibited.
[Rule 62-210.700(4), F.A.C.]

Monitoring of Operations

B.9. The permittee shall demonstrate compliance with the liquid fuel sulfur limit by means of a fuel analysis provided by the vendor or permittee upon each fuel delivery. See specific condition **B.12.**
[Rule 62-213.440, F.A.C.]

B.10. Determination of Process Variables.

(a) Required Equipment. The owner or operator of an emissions unit for which compliance tests are required shall install, operate, and maintain equipment or instruments necessary to determine process variables, such as process weight input or heat input, when such data are needed in conjunction with emissions data to determine the compliance of the emissions unit with applicable emission limiting standards.

(b) Accuracy of Equipment. Equipment or instruments used to directly or indirectly determine process variables, including devices such as belt scales, weight hoppers, flow meters, and tank scales, shall be calibrated and adjusted to indicate the true value of the parameter being measured with sufficient accuracy to allow the applicable process variable to be determined within 10% of its true value.

[Rule 62-297.310(5), F.A.C.]

Test Methods and Procedures

{Permitting Note: The attached Table 2-1, Summary of Compliance Requirements, summarizes information for convenience purposes only. This table does not supersede any of the terms or conditions of this permit.}

B.11. The test method for visible emissions shall be EPA Method 9, incorporated and adopted by reference in Chapter 62-297, F.A.C.

[Rules 62-296.320(4)(b)4.a. and 62-297.401, F.A.C.]

B.12. The fuel sulfur content, percent by weight, for liquid fuels shall be evaluated using either ASTM D2622-94, ASTM D4294-90, both ASTM D4057-88 and ASTM D129-95, or the latest edition(s).

[Rules 62-213.440 and 62-297.440, F.A.C.]

B.13. Operating Rate During Testing. Testing of emissions shall be conducted with the generator(s) operating at 90 to 100 percent of the maximum fuel firing rate of 186.3 gallons per hour. If it is impracticable to test at permitted capacity, an emissions unit may be tested at less than the minimum permitted capacity (i.e., at less than 90 percent of the maximum operation rate allowed by the permit); in this case, subsequent emissions unit operations may be limited to 110 percent of the test load until a new test is conducted, provided however, operations do not exceed 100 percent of the maximum operation rate allowed by the permit. Once the emissions unit is so limited, operation at higher capacities is allowed for no more than 15 consecutive days for the purpose of additional compliance testing to regain the authority to operate at the permitted capacity. Failure to submit the actual operating rate may invalidate the test.

[Rules 62-297.310(2), F.A.C.; and, Permit AO 09-205952.]

B.14. Applicable Test Procedures.

(a) Required Sampling Time.

2. Opacity Compliance Tests. When either EPA Method 9 or DEP Method 9 is specified as the applicable opacity test method, the required minimum period of observation for a compliance test shall be sixty (60) minutes for emissions units which emit or have the potential to emit 100 tons per year or more of particulate matter, and thirty (30) minutes for emissions units which have potential emissions less than 100 tons per year of particulate matter and are not subject to a multiple-valued opacity standard. The opacity test observation period shall include the period during which the highest opacity emissions can reasonably be expected to occur. Exceptions to these requirements are as follows:

c. The minimum observation period for opacity tests conducted by employees or agents of the Department to verify the day-to-day continuing compliance of a unit or activity with an applicable opacity standard shall be twelve minutes.

[Rule 62-297.310(4)(a)2.c., F.A.C.]

B.15. Frequency of Compliance Tests. The following provisions apply only to those emissions units that are subject to an emissions limiting standard for which compliance testing is required.

(a) General Compliance Testing.

3. The owner or operator of an emissions unit that is subject to any emission limiting standard shall conduct a compliance test that demonstrates compliance with the applicable emission limiting standard prior to obtaining a renewed operation permit. Emissions units that are required to conduct an annual compliance test may submit the most recent annual compliance test to satisfy the requirements of this provision. In renewing an air operation permit pursuant to Rule 62-210.300(2)(a)3.b., c., or d., F.A.C., the

Department shall not require submission of emission compliance test results for any emissions unit that, during the year prior to renewal:

- a. Did not operate; or
 - b. In the case of a fuel burning emissions unit, burned liquid fuel for a total of no more than 400 hours.
4. During each federal fiscal year (October 1 - September 30), unless otherwise specified by rule, order, or permit, the owner or operator of each emissions unit shall have a formal compliance test conducted for:
- a. Visible emissions, if there is an applicable standard;
 - b. Each of the following pollutants, if there is an applicable standard, and if the emissions unit emits or has the potential to emit: 5 tons per year or more of lead or lead compounds measured as elemental lead; or 100 tons per year or more of any other regulated air pollutant.
8. Any combustion turbine that does not operate for more than 400 hours per year shall conduct a visible emissions compliance test once per each five-year period, coinciding with the term of its air operation permit.
9. The owner or operator shall notify the Department, at least 15 days prior to the date on which each formal compliance test is to begin, of the date, time, and place of each such test, and the test contact person who will be responsible for coordinating and having such test conducted for the owner or operator. For each generator located in Pinellas County, FPC shall provide the same notification to the Air Quality Division of the Pinellas County Department of Environmental Management.

(b) Special Compliance Tests. When the Department, after investigation, has good reason (such as complaints, increased visible emissions or questionable maintenance of control equipment) to believe that any applicable emission standard contained in a Department rule or in a permit issued pursuant to those rules is being violated, it may require the owner or operator of the emissions unit to conduct compliance tests which identify the nature and quantity of pollutant emissions from the emissions unit and to provide a report on the results of said tests to the Department.

(c) Waiver of Compliance Test Requirements. If the owner or operator of an emissions unit that is subject to a compliance test requirement demonstrates to the Department, pursuant to the procedure established in Rule 62-297.620, F.A.C., that the compliance of the emissions unit with an applicable weight emission limiting standard can be adequately determined by means other than the designated test procedure, such as specifying a surrogate standard of no visible emissions for particulate matter sources equipped with a bag house or specifying a fuel analysis for sulfur dioxide emissions, the Department shall waive the compliance test requirements for such emissions units and order that the alternate means of determining compliance be used, provided, however, the provisions of Rule 62-297.310(7)(b), F.A.C., shall apply.
[Rule 62-297.310(7), F.A.C.; SIP approved; and, AO 09-205952.]

B.16. Visible Emissions Testing - Annual. By this permit, annual emissions compliance testing for visible emissions is not required for these emissions units while burning liquid fuels for less than 400 hours per year.
[Rules 62-297.310(7)(a)4. & 8., F.A.C.]

B.17. After each relocation, each generator shall be tested within 30 days of startup for opacity and the fuel shall be analyzed for the sulfur content. See specific conditions **B.6.**, **B.9.**, and **B.12.**
[Rules 62-4.070(3) and 62-297.310(7)(b), F.A.C.; and, AO 09-205952.]

Recordkeeping and Reporting Requirements

B.18. Malfunction Reporting. In the case of excess emissions resulting from malfunctions, the owner or operator shall notify the Department's Southwest District Office, if a generator is located in Pasco County, in accordance with Rule 62-4.130, F.A.C. A full written report on the malfunctions shall be submitted in a quarterly report, if requested by the Department.
[Rule 62-210.700(6), F.A.C.]

B.19. Test Reports.

- (a) Each generator shall be tested on an annual basis within 30 days of the date October 25.
- (b) The owner or operator of an emissions unit for which a compliance test is required shall file a report with the Department on the results of each such test.
- (c) The required test report shall be filed with the Southwest District Office and the Air Quality Division of the Pinellas County Department of Environmental Management, if a generator is located in Pinellas County, as soon as practical but no later than 45 days after the last sampling run of each test is completed.
- (d) The test reports for a unit that has been relocated shall be submitted to the Southwest District Office and the Air Quality Division of the Pinellas County Department of Environmental Management, if a generator is located in Pinellas County, within 45 days of testing.
[Rule 62-297.310(8), F.A.C.; and, AO 09-25952.]

B.20. To demonstrate compliance with specific condition **B.4.**, records shall indicate the daily hours of operation for each of the generators, the daily hours of operation expressed as "engine- hours" for each month. The records shall be maintained for a minimum of 5 years and made available to the Southwest District Office and the Air Quality Division of the Pinellas County Department of Environmental Management upon request.
[Rules 62-213.440 and 62-297.310(8), F.A.C.; and, AO 09-205952.]

B.21. To demonstrate compliance with specific condition **B.6.**, records of the sulfur content, in percent by weight, of all the fuel burned shall be kept based on either vendor provided as-delivered or as-received fuel sample analysis. The records shall be maintained for a minimum of 5 years and made available to the Southwest District Office and the Air Quality Division of the Pinellas County Department of Environmental Management upon request.
[Rule 62-297.310(8), F.A.C.; and, AO 09-205952.]

Source Obligation

B.22. Specific conditions in construction permit AC 09-202080, limiting the "engine hours", were accepted by the applicant to escape Prevention of Significant Deterioration review. If Florida Power Corporation requests a relaxation of any of the federally enforceable emission limits in this permit, the relaxation of limits may be subject to the preconstruction review requirements of Rule 62-212.400(5), F.A.C., as though construction had not yet begun.
[Rule 62-212.400(2)(g), F.A.C.; and, AC 09-202080 and AO 09-205952.]

Notification

B.23. Florida Power Corporation shall notify the Department's Southwest District Office, in writing, at least 15 days prior to the date on which any diesel generator is to be relocated. The notification shall specify the following;

- a. which generator, by serial number, is being relocated,
- b. which location the generator is being relocated from and which location it is being relocated to, and
- c. the approximate startup date at the new location.

If a diesel generator is to be relocated within Pinellas County, then Florida Power Corporation shall provide the same notification to the Air Quality Division of the Pinellas County Department of Environmental Management.

[Rule 62-4.070(3), F.A.C.; and, AC 09-202080]

Section IV. This section is the Acid Rain Part.

Operated by: Florida Power Corporation
ORIS code: 8048

Subsection A. This subsection addresses Acid Rain, Phase II.

The emissions units listed below are regulated under Acid Rain Part, Phase II.

E.U. ID No.	Description
-001	Fossil Fuel Fired Steam Generator No. 1
-002	Fossil Fuel Fired Steam Generator No. 2

1. The Phase II permit application submitted for this facility, as approved by the Department, is a part of this permit. The owners and operators of these acid rain units must comply with the standard requirements and special provisions set forth in the application listed below:

a. DEP Form No. 62-210.900(1)(a), dated 07/01/95.

[Chapter 62-213, F.A.C. and Rule 62-214.320, F.A.C.]

2. Sulfur dioxide (SO₂) allowance allocations for each Acid Rain unit:

E.U. ID No.	EPA I.D.	Year	2000	2001	2002	2003	2004
-001	1	SO ₂ allowances, under Table 2, 3, or 4 of 40 CFR 73	12931*	12931*	12931*	12931*	12931*
-002	2	SO ₂ allowances, under Table 2, 3, or 4 of 40 CFR 73	12853*	12853*	12853*	12853*	12853*

*The number of allowances held by an Acid Rain source in a unit account may differ from the number allocated by the USEPA under Table 2, 3, or 4 of 40 CFR 73.

3. Emission Allowances. Emissions from sources subject to the Federal Acid Rain Program (Title IV) shall not exceed any allowances that the source lawfully holds under the Federal Acid Rain Program. Allowances shall not be used to demonstrate compliance with a non-Title IV applicable requirement of the Act.

- a. No permit revision shall be required for increases in emissions that are authorized by allowances acquired pursuant to the Federal Acid Rain Program, provided that such increases do not require a permit revision pursuant to Rule 62-213.440(3), F.A.C.
- b. No limit shall be placed on the number of allowances held by the source under the Federal Acid Rain program.
- c. Allowances shall be accounted for under the Federal Acid Rain Program.

[Rule 62-213.440(1)(c), F.A.C.]

4. Fast-Track Revisions of Acid Rain Parts. Those Acid Rain sources making a change described in Rule 62-214.370(4), F.A.C., may request such changes as provided in Rule 62-213.413, Fast-Track Revisions of Acid Rain Parts.

[Rules 62-213.413 and 62-214.370(4), F.A.C.]

5. Comments, notes, and justifications: None.

Florida Power Corporation
Anclote Power Plant

Facility ID No.: 1010017
Pasco County

Initial Title V Air Operation Permit
Revised DRAFT Permit No.: 1010017-003-AV

Permitting Authority:

State of Florida
Department of Environmental Protection
Division of Air Resources Management
Bureau of Air Regulation
Title V Section


Mail Station #5505
2600 Blair Stone Road
Tallahassee, Florida 32399-2400

Telephone: 850/488-1344
Fax: 850/922-6979

Initial Title V Air Operation Permit
Revised DRAFT Permit No.: 1010017-003-AV

Table of Contents

<u>Section</u>	<u>Page Number</u>
Placard Page	1
I. Facility Information	2 - 3
A. Facility Description.	
B. Summary of Emissions Unit ID Nos. and Brief Descriptions.	
C. Relevant Documents.	
II. Facility-wide Conditions	4 - 6
III. Emissions Unit(s) and Conditions	
A. Fuel Oil Fired Steam Generators (E.U. ID Nos. -001 and -002).....	7 - 18
B. Diesel Fired Generators (3 - 820 Kilowatt each).....	19 - 24
IV. Acid Rain Part	
A. Acid Rain, Phase II	25 - 26
V. Attachments	
Table 1-1, Summary of Air Pollutant Standards and Terms	
Table 1-2, Summary of Air Pollutant Standards and Terms (Additional Standards for On-Specification Used Oil (OSUO))	
Table 2-1, Summary of Compliance Requirements	
Appendix I-1. List of Insignificant Emissions Units and/or Activities	
Appendix U-1. List of Unregulated Emissions Units and/or Activities	
Appendix H-1. Permit History/ID Number Changes	
Appendix SS-1, Stack Sampling Facilities	
Appendix TV-1, Title V Conditions	



Department of Environmental Protection

Lawton Chiles
Governor

Twin Towers Office Building
2600 Blair Stone Road
Tallahassee, Florida 32399-2400

Virginia B. Wetherell
Secretary

Permittee:
Florida Power Corporation
Anclote Power Plant

Revised DRAFT Permit No.: 1010017-003-AV
Facility ID No.: 1010017
SIC Nos.: 4911
Project: Initial Title V Air Operation Permit

This permit is for the operation of the Anclote Power Plant. This facility is located at 1729 Baileys Bluff Road, Holiday, Pasco County; UTM Coordinates: Zone 17, 324.4 km East and 3118.7 km North; Latitude: 28° 48' 17" North and Longitude: 82° 47' 08" West.

STATEMENT OF BASIS: This Title V air operation permit is issued under the provisions of Chapter 403, Florida Statutes (F.S.), and Florida Administrative Code (F.A.C.) Chapters 62-4, 62-210, 62-213; and 62-214. The above named permittee is hereby authorized to perform the work or operate the facility shown on the application and approved drawing(s), plans, and other documents, attached hereto or on file with the permitting authority, in accordance with the terms and conditions of this permit.

Referenced attachments made a part of this permit:

Appendix U-1, List of Unregulated Emissions Units and/or Activities
Appendix I-1, List of Insignificant Emissions Units and/or Activities
APPENDIX TV-1, TITLE V CONDITIONS (version dated 12/02/97)
APPENDIX SS-1, STACK SAMPLING FACILITIES (version dated 10/07/96)
Phase II Acid Rain Application/Compliance Plan received December 14, 1995.

Effective Date: January 1, 2000
Renewal Application Due Date: July 5, 2004
Expiration Date: December 31, 2004

Howard L. Rhodes, Director
Division of Air Resources
Management

HLR/sms/mpb

Section I. Facility Information.
Subsection A. Facility Description.

This facility consists of two fuel oil fired steam electric generating stations, E.U. ID No. -001 (Unit No. 1) and -002 (Unit No. 2). Unit No. 1 consists of a Combustion Engineering, Inc., Type CCRR boiler/steam generator and steam turbine which drives a generator with a nameplate rating of 535(summer)/540(winter) Megawatts. Unit No. 2 consists of a Combustion Engineering, Inc., Type CCRR boiler/steam generator and steam turbine which drives a generator with a nameplate rating of 525(summer)/530(winter) Megawatts. Units No. 1 and No. 2 share a common stack. Also included in this permit are miscellaneous unregulated and insignificant emissions units and/or activities. Relocatable diesel fired generator(s) with a maximum heat input of 25.74 MMBtu/hour and a maximum rating of 2460 Kilowatts are permitted to be located at this facility and may be relocated to other FPC facilities.

Based on the initial Title V permit application received on June 14, 1996, this facility is a major source of hazardous air pollutants (HAPs).

Subsection B. Summary of Emissions Unit ID No(s). and Brief Description(s).

E.U. ID No.	Brief Description
-001	Fuel Oil Fired Steam Electric Generator No. 1
-002	Fuel Oil Fired Steam Electric Generator No. 2
-7775047 -001	Relocatable Diesel Generator(s)

- Unregulated Emissions Units and/or Activities
- xxx Surface Coating and Solvent Cleaning
 - xxx Fuel Storage Tanks
 - xxx Emergency Generators
 - xxx General Purpose Engines
 - xxx Helper Cooling Towers

Please reference the Permit No., Facility ID No., and appropriate Emissions Unit(s) ID No(s). on all correspondence, test report submittals, applications, etc.

Subsection C. Relevant Documents.

The documents listed below are not a part of this permit; however, they are specifically related to this permitting action.

These documents are provided to the permittee for information purposes only:

Table 1-1, Summary of Air Pollutant Standards and Terms

Table 2-1, Summary of Compliance Requirements

Appendix A-1, Abbreviations, Acronyms, Citations, and Identification Numbers

Appendix H-1, Permit History/ID Number Changes

These documents are on file with the permitting authority:

Initial Title V Permit Application received June 14, 1996.

Letter from Mr. Scott H. Osbourn dated and received by fax on October 13, 1997.

Phase II Acid Rain Application submitted on December 14, 1995.

Section II. Facility-wide Conditions.

The following conditions apply facility-wide:

1. APPENDIX TV-1, TITLE V CONDITIONS is a part of this permit.
{Permitting note: APPENDIX TV-1, TITLE V CONDITIONS, is distributed to the permittee only. Other persons requesting copies of these conditions shall be provided a copy when requested or otherwise appropriate.}
2. **Not federally enforceable.** General Pollutant Emission Limiting Standards. Objectionable Odor Prohibited. The permittee shall not cause, suffer, allow, or permit the discharge of air pollutants which cause or contribute to an objectionable odor.
[Rule 62-296.320(2), F.A.C.]
3. General Particulate Emission Limiting Standards. General Visible Emissions Standard.
Except for emissions units that are subject to a particulate matter or opacity limit set forth or established by rule and reflected by conditions in this permit, no person shall cause, let, permit, suffer or allow to be discharged into the atmosphere the emissions of air pollutants from any activity, the density of which is equal to or greater than that designated as Number 1 on the Ringelmann Chart (20 percent opacity). EPA Method 9 is the method of compliance pursuant to Chapter 62-297, F.A.C.
[Rule 62-296.320(4)(b)1. & 4., F.A.C.]
4. Prevention of Accidental Releases (Section 112(r) of CAA). If required by 40 CFR 68, the permittee shall submit to the implementing agency:
 - a. a risk management plan (RMP) when, and if, such requirement becomes applicable; and
 - b. certification forms and/or RMPs according to the promulgated rule schedule.[40 CFR 68]
5. Unregulated Emissions Units and/or Activities. Appendix U-1, List of Unregulated Emissions Units and/or Activities, is a part of this permit.
[Rule 62-213.440(1), F.A.C.]
6. Insignificant Emissions Units and/or Activities. Appendix I-1, List of Insignificant Emissions Units and/or Activities, is a part of this permit.
[Rules 62-213.440(1), 62-213.430(6), and 62-4.040(1)(b), F.A.C.]

7. General Pollutant Emission Limiting Standards. Volatile Organic Compounds (VOC) Emissions or Organic Solvents (OS) Emissions. The permittee shall not store, pump, handle, process, load, unload or use in any process or installation, volatile organic compounds (VOC) or organic solvents (OS) without applying known and existing vapor emission control devices or systems deemed necessary and ordered by the Department.
[Rule 62-296.320(1)(a), F.A.C.]

8. Not federally enforceable. Reasonable precautions to prevent emissions of unconfined particulate matter at this facility shall include:

- a. Maintenance of paved areas as needed,
- b. Regular mowing of grass and care of vegetation, and
- c. Limiting access to plant property by unnecessary vehicles.

[Rule 62-296.320(4)(c)2., F.A.C.; Proposed by applicant in the initial Title V permit application received June 14, 1996]

9. When appropriate, any recording, monitoring, or reporting requirements that are time-specific shall be in accordance with the effective date of the permit, which defines day one.

[Rule 62-213.440, F.A.C.]

10. The permittee shall submit all compliance related notifications and reports required of this permit to the Department's Southwest District office:

Department of Environmental Protection
Southwest District Office
3804 Coconut Palm Drive
Tampa, Florida 33619-8218
Telephone: 813/744-6100
Fax: 813/744-6458

11. Any reports, data, notifications, certifications, and requests required to be sent to the United States Environmental Protection Agency, Region 4, should be sent to:

United States Environmental Protection Agency
Region 4
Air, Pesticides & Toxics Management Division
Air and EPCRA Enforcement Branch, Air Compliance Section
61 Forsyth Street
Atlanta, Georgia 32303
Telephone: 404/562-9099
Fax: 404/562-9095

12. Statement of Compliance. The annual statement of compliance pursuant to Rule 62-213.440(3), F.A.C., shall be submitted within sixty (60) days after the end of the calendar year.
{See condition No. 52., Appendix TV-1, Title V Conditions}
[Rule 62-214.420(11), F.A.C.]

Section III. Emissions Unit(s) and Conditions.

Subsection A. This section addresses the following emissions units.

E.U. ID No.	Brief Description
-001	Fossil Fuel Fired Steam Generator # 1
-002	Fossil Fuel Fired Steam Generator # 2

Fossil fuel fired steam generator # 1 is a nominal 535(summer)/540(winter) megawatt (electric) steam generator designated as Anclote Unit # 1. The emission unit is fired on new No. 6 or lighter grades of fuel oil and on-specification used oil, as permitted herein, with a maximum heat input of 4964 MMBtu per hour.

Fossil fuel fired steam generator # 2 is a nominal 525(summer)/530(winter) megawatt (electric) steam generator designated as Anclote Unit # 2. The emission unit is fired on new No. 6 or lighter grades of fuel oil and on-specification used oil, as permitted herein, with a maximum heat input of 4850 MMBtu per hour. Each boiler/steam generator, units #1 and #2, drives a turbine generator and both units share a common 499 foot exhaust stack. Emissions from these units are uncontrolled.

{Permitting note(s): The emissions units are regulated under the Federal Acid Rain Program, and Rule 62-296.405, F.A.C., Fossil Fuel Steam Generators with More than 250 million Btu per Hour Heat Input. Fossil fuel fired steam generator # 1 began commercial operation on October 16, 1974; and, fossil fuel fired steam generator # 2 began commercial operation on October 31, 1978.}

The following specific conditions apply to the emissions units listed above:

Essential Potential to Emit (PTE) Parameters

A.1. Permitted Capacity. The maximum operation heat input rates are as follows:

Unit No.	MMBtu/hr Heat Input	Fuel Type
1	4964	No. 1, 2, 3, 4, 5 or 6 Fuel Oil & On-Specification Used Oil
2	4850	No. 1, 2, 3, 4, 5, or 6 Fuel Oil & On-specification Used Oil

* The on-specification used oil burned at this facility may be generated on or off-site.
[Rules 62-4.160(2), 62-210.200(PTE) and 62-296.405, F.A.C.]

{Permitting note: The heat input limitations have been placed in the permit to identify the capacity of each emissions unit for purposes of confirming that emissions testing is conducted within 90-100 percent of the emission unit's rated capacity (or to limit future operation to 110 percent of the test load), to establish appropriate limits and to aid in determining future rule applicability.}
[Rule 62-4.160(2), and Rule 62-297.310(2), F.A.C.]

A.2. Emissions Unit Operating Rate Limitation After Testing. See specific condition A.22.
[Rule 62-297.310(2), F.A.C.]

A.3. Methods of Operation. Fuel(s).

a. Startup: The only fuels allowed to be burned are new #6 or lighter grades of fuel oils. On-specification used oil shall only be burned if the PCB's are less than 2 ppm and may be blended with new #6 or lighter grades of fuel oil. The maximum sulfur content is 2.5 percent, by weight.

b. Normal: The only fuels allowed to be burned are new #6 or lighter grades of fuel oils and on-specification used oil. The maximum sulfur content is 2.5 percent, by weight.

c. **Not federally enforceable.** The maximum amount of on-specification used oil, whether generated on or off-site, that can be burned facility-wide shall not exceed 10 percent of the heat input or 30 million gallons per year cumulatively.

[Rule 62-213.410, F.A.C.; and, AO 51-254492A & 1010017-001-AO]

A.4. Hours of Operation. These emissions units may operate continuously, i.e., 8,760 hours/year.

[Rule 62-210.200(PTE), F.A.C.]

Emission Limitations and Standards

{Permitting Note: The attached Table 1-1, Summary of Air Pollutant Standards and Terms, summarizes information for convenience purposes only. This table does not supersede any of the terms or conditions of this permit.}

A.5. Visible Emissions. Visible emissions shall not exceed 40 percent opacity. Emissions units governed by this visible emissions standard shall conduct a compliance test for particulate matter emissions annually. Failure of the facility to demonstrate compliance with the particulate matter allowable in specific condition A.7. or the opacity standard of this condition shall constitute grounds for revocation of this condition.

[Rule 62-296.405(1)(a), F.A.C.; and, OGC File Nos. 86-1574 and 86-1575/Orders dated December 11, 1986.]

A.6. Visible Emissions - Soot Blowing and Load Change. Visible emissions shall not exceed 60 percent opacity during the 3-hours in any 24 hour period of excess emissions allowed for boiler cleaning (soot blowing) and load change. A load change occurs when the operational capacity of a unit is in the 10 percent to 100 percent capacity range, other than startup or shutdown, which exceeds 10 percent of the unit's rated capacity and which occurs at a rate of 0.5 percent per minute or more.

[Rule 62-210.700(3), F.A.C.]

A.7. Particulate Matter. Particulate matter emissions shall not exceed 0.1 pound per million Btu heat input, as measured by applicable compliance methods. See specific condition A.18.

[Rule 62-296.405(1)(b), F.A.C.]

A.8. Particulate Matter - Soot Blowing and Load Change. Particulate matter emissions shall not exceed an average of 0.3 pound per million Btu heat input during the 3-hours in any 24-hour period of excess emissions allowed for boiler cleaning (soot blowing) and load change.

[Rule 62-210.700(3), F.A.C.]

A.9. Sulfur Dioxide. When burning fuel oils, sulfur dioxide emissions shall not exceed 2.75 pounds per million Btu heat input, as measured by applicable compliance methods. See specific conditions A.19. and A.20.

[Rule 62-296.405(1)(c)1.j., F.A.C.]

A.10. Sulfur Dioxide - Sulfur Content. The sulfur content of fuel oils, on-specification used oil, or any combination of the two burned in these units, shall not exceed 2.5 percent, by weight. See specific condition **A.20.**

[Rule 62-296.405(1)(e)3., F.A.C.; and, requested by the applicant in Title V Application dated June 12, 1996.]

Excess Emissions

A.11. Excess emissions resulting from malfunction shall be permitted provided that best operational practices to minimize emissions are adhered to and the duration of excess emissions shall be minimized but in no case exceed two hours in any 24 hour period unless specifically authorized by the Department for longer duration. [Rule 62-210.700(1), F.A.C.]

A.12. Excess emissions resulting from startup or shutdown shall be permitted provided that best operational practices to minimize emissions are adhered to and the duration of excess emissions shall be minimized. [Rule 62-210.700(2), F.A.C.]

A.13. Excess emissions which are caused entirely or in part by poor maintenance, poor operation, or any other equipment or process failure which may reasonably be prevented during startup, shutdown or malfunction shall be prohibited. [Rule 62-210.700(4), F.A.C.]

Monitoring of Operations

A.14. Sulfur Dioxide. **The permittee elected to demonstrate compliance by accepting a liquid fuel sulfur limit that will be verified with a fuel analysis provided by the vendor or permittee upon each fuel delivery.** This protocol is allowed because the emissions units do not have an operating flue gas desulfurization device. See specific conditions **A.10.**, **A.19.** and **A.20.** [Rule 62-296.405(1)(f)1.b., F.A.C.]

A.15. Determination of Process Variables.

(a) Required Equipment. The owner or operator of an emissions unit for which compliance tests are required shall install, operate, and maintain equipment or instruments necessary to determine process variables, such as process weight input or heat input, when such data are needed in conjunction with emissions data to determine the compliance of the emissions unit with applicable emission limiting standards.

(b) Accuracy of Equipment. Equipment or instruments used to directly or indirectly determine process variables, including devices such as belt scales, weight hoppers, flow meters, and tank scales, shall be calibrated and adjusted to indicate the true value of the parameter being measured with sufficient accuracy to allow the applicable process variable to be determined within 10% of its true value. [Rule 62-297.310(5), F.A.C.]

Test Methods and Procedures

{Permitting Note: The attached Table 2-1, Summary of Compliance Requirements, summarizes information for convenience purposes only. This table does not supersede any of the terms or conditions of this permit.}

A.16. Visible emissions. The test method for visible emissions shall be DEP Method 9, incorporated in Chapter 62-297, F.A.C. A transmissometer may be used and calibrated according to Rule 62-297.520, F.A.C. See specific condition **A.17.**
[Rule 62-296.405(1)(e)1., F.A.C.]

A.17. DEP Method 9. The provisions of EPA Method 9 (40 CFR 60, Appendix A) are adopted by reference with the following exceptions:

1. EPA Method 9, Section 2.4, Recording Observations. Opacity observations shall be made and recorded by a certified observer at sequential fifteen second intervals during the required period of observation.
2. EPA Method 9, Section 2.5, Data Reduction. For a set of observations to be acceptable, the observer shall have made and recorded, or verified the recording of, at least 90 percent of the possible individual observations during the required observation period. For single-valued opacity standards (e.g., 20 percent opacity), the test result shall be the highest valid six-minute average for the set of observations taken. For multiple-valued opacity standards (e.g., 20 percent opacity, except that an opacity of 40 percent is permissible for not more than two minutes per hour) opacity shall be computed as follows:
 - a. For the basic part of the standard (i.e., 20 percent opacity) the opacity shall be determined as specified above for a single-valued opacity standard.
 - b. For the short-term average part of the standard, opacity shall be the highest valid short-term average (i.e., two-minute, three-minute average) for the set of observations taken.

In order to be valid, any required average (i.e., a six-minute or two-minute average) shall be based on all of the valid observations in the sequential subset of observations selected, and the selected subset shall contain at least 90 percent of the observations possible for the required averaging time. Each required average shall be calculated by summing the opacity value of each of the valid observations in the appropriate subset, dividing this sum by the number of valid observations in the subset, and rounding the result to the nearest whole number. The number of missing observations in the subset shall be indicated in parenthesis after the subset average value.

[Rule 62-297.401, F.A.C.]

A.18. Particulate Matter. The test methods for particulate emissions shall be EPA Methods 17, 5, 5B, or 5F, incorporated by reference in Chapter 62-297, F.A.C. The minimum sample volume shall be 30 dry standard cubic feet. EPA Method 5 may be used with filter temperature no more than 320 degrees Fahrenheit. For EPA Method 17, stack temperature shall be less than 375 degrees Fahrenheit. The owner or operator may use EPA Method 5 to demonstrate compliance. EPA Method 3 or 3A with Orsat analysis shall be used when the oxygen based F-factor, computed according to EPA Method 19, is used in lieu of heat input. Acetone wash shall be used with EPA Method 5 or 17.

[Rules 62-296.405(1)(e)2. and 62-297.401, F.A.C.]

A.19. Sulfur Dioxide. The test methods for sulfur dioxide emissions shall be EPA Methods 6, 6A, 6B, or 6C, incorporated by reference in Chapter 62-297, F.A.C. Fuel sampling and analysis may be used as an alternate sampling procedure if such a procedure is incorporated into the operation permit for the emissions unit. If the emissions unit obtains an alternate procedure under the provisions of Rule 62-297.620, F.A.C., the procedure shall become a condition of the emissions unit's permit. The Department will retain the authority to require EPA Method 6 or 6C if it has reason to believe that exceedences of the sulfur dioxide emissions limiting standard are occurring. Results of an approved fuel sampling and analysis program shall have the same effect as EPA Method 6 test results for purposes of demonstrating compliance or noncompliance with sulfur dioxide standards. **The permittee may use the EPA test methods, referenced above, to demonstrate compliance; however, as an alternate sampling procedure authorized by permit, the permittee elected to demonstrate compliance by accepting a liquid fuel sulfur limit that will be verified with a fuel analysis provided by the vendor upon each fuel delivery.** See specific conditions A.9., A.10. and A.20.

[Rules 62-213.440, 62-296.405(1)(e)3. and 62-297.401, F.A.C.; and, Permits 1010017-001-AO and AO 51-254492A.]

A.20. Sulfur Content of Liquid Fuel. The fuel sulfur content, percent by weight, for liquid fuels shall be evaluated using either ASTM D2622-94, ASTM D4294-90, both ASTM D4057-88 and ASTM D129-95, or the latest edition(s).

[Rules 62-213.440, 62-296.405(1)(e)3, 62-296.405(1)(f)1.b. and 62-297.440, F.A.C.]

A.21. Required Number of Test Runs. For mass emission limitations, a compliance test shall consist of three complete and separate determinations of the total air pollutant emission rate through the test section of the stack or duct and three complete and separate determinations of any applicable process variables corresponding to the three distinct time periods during which the stack emission rate was measured provided, however, that three complete and separate determinations shall not be required if the process variables are not subject to variation during a compliance test, or if three determinations are not necessary in order to calculate the unit's emission rate. The three required test runs shall be completed within one consecutive five day period. In the event that a sample is lost or one of the three runs must be discontinued because of circumstances beyond the control of the owner or operator, and a valid third run cannot be obtained within the five day period allowed for the test, the Secretary or his or her designee may accept the results of the two complete runs as proof of compliance, provided that the arithmetic mean of the results of the two complete runs is at least 20 percent below the allowable emission limiting standards.

[Rule 62-297.310(1), F.A.C.]

A.22. Operating Rate During Testing. Testing of emissions shall be conducted with the emissions unit operation at permitted capacity, which is defined as 90 to 100 percent of the maximum operation rate allowed by the permit. If it is impracticable to test at permitted capacity, an emissions unit may be tested at less than the minimum permitted capacity; in this case, subsequent emissions unit operation is limited to 110 percent of the test load until a new test is conducted. Once the emissions unit is so limited, operation at higher capacities is allowed for no more than 15 consecutive days for the purpose of additional compliance testing to regain the authority to operate at the permitted capacity.

[Rules 62-297.310(2) & (2)(b), F.A.C.]

A.23. Calculation of Emission Rate. The indicated emission rate or concentration shall be the arithmetic average of the emission rate or concentration determined by each of the separate test runs unless otherwise specified in a particular test method or applicable rule.

[Rule 62-297.310(3), F.A.C.]

A.24. Applicable Test Procedures.

(a) Required Sampling Time.

1. Unless otherwise specified in the applicable rule, the required sampling time for each test run shall be no less than one hour and no greater than four hours, and the sampling time at each sampling point shall be of equal intervals of at least two minutes.

2. Opacity Compliance Tests. The required minimum period of observation for a compliance test shall be sixty (60) minutes for emissions units which emit or have the potential to emit 100 tons per year or more of particulate matter, and thirty (30) minutes for emissions units which have potential emissions less than 100 tons per year of particulate matter and are not subject to a multiple-valued opacity standard. The opacity test observation period shall include the period during which the highest opacity emissions can reasonably be expected to occur. Exceptions to these requirements are as follows:

c. The minimum observation period for opacity tests conducted by employees or agents of the Department to verify the day-to-day continuing compliance of a unit or activity with an applicable opacity standard shall be twelve minutes.

(b) Minimum Sample Volume. Unless otherwise specified in the applicable rule, the minimum sample volume per run shall be 25 dry standard cubic feet.

(c) Required Flow Rate Range. For EPA Method 5 particulate sampling, acid mist/sulfur dioxide, and fluoride sampling which uses Greenburg Smith type impingers, the sampling nozzle and sampling time shall be selected such that the average sampling rate will be between 0.5 and 1.0 actual cubic feet per minute, and the required minimum sampling volume will be obtained.

(d) Calibration of Sampling Equipment. Calibration of the sampling train equipment shall be conducted in accordance with the schedule shown in Table 297.310-1.

(e) Allowed Modification to EPA Method 5. When EPA Method 5 is required, the following modification is allowed: the heated filter may be separated from the impingers by a flexible tube.

[Rule 62-297.310(4), F.A.C.]

A.25. Required Stack Sampling Facilities. When a mass emissions stack test is required, the permittee shall comply with the requirements contained in Appendix SS-1, Stack Sampling Facilities, attached to this permit.
[Rule 62-297.310(6), F.A.C.]

A.26. Frequency of Compliance Tests. The following provisions apply only to those emissions units that are subject to an emissions limiting standard for which compliance testing is required.

(a) General Compliance Testing.

2. For excess emission limitations for particulate matter specified in Rule 62-210.700, F.A.C., a compliance test shall be conducted annually while the emissions unit is operating under soot blowing conditions in each federal fiscal year during which soot blowing is part of normal emissions unit operation, except that such test shall not be required in any federal fiscal year in which a fossil fuel steam generator does not burn liquid for more than 400 hours other than during startup.

3. The owner or operator of an emissions unit that is subject to any emission limiting standard shall conduct a compliance test that demonstrates compliance with the applicable emission limiting standard prior to obtaining a renewed operation permit. Emissions units that are required to conduct an annual compliance test may submit the most recent annual compliance test to satisfy the requirements of this provision. In renewing an air operation permit pursuant to Rule 62-210.300(2)(a)3.b., c., or d., F.A.C., the Department shall not require submission of emission compliance test results for any emissions unit that, during the year prior to renewal:

a. Did not operate; or

b. In the case of a fuel burning emissions unit, burned liquid fuel for a total of no more than 400 hours.

TABLE 297.310-1
 CALIBRATION SCHEDULE

ITEM	MINIMUM CALIBRATION FREQUENCY	REFERENCE INSTRUMENT	TOLERANCE
Liquid in glass thermometer	Annually	ASTM Hg in glass ref. thermometer or equivalent, or thermometric points	+/-2%
Bimetallic thermometer	Quarterly	Calib. liq. in glass thermometer	5 degrees F
Thermocouple	Annually	ASTM Hg in glass ref. thermometer, NBS calibrated reference and potentiometer	5 degrees F
Barometer	Monthly	Hg barometer or NOAA station	+/-1% scale
Pitot Tube	When required or when damaged	By construction or measurements in wind tunnel D greater than 16" and standard pitot tube	See EPA Method 2, Fig. 2-2 & 2-3
Probe Nozzles	Before each test or when nicked, dented, or corroded	Micrometer	+/-0.001" mean of at least three readings Max. deviation between readings .004"
Dry Gas Meter and Orifice Meter	1. Full Scale: When received, When 5% change observed, Annually 2. One Point: Semiannually 3. Check after each test series	Spirometer or calibrated wet test or dry gas test meter	2%
		Comparison check	5%

4. During each federal fiscal year (October 1 - September 30), unless otherwise specified by rule, order, or permit, the owner or operator of each emissions unit shall have a formal compliance test conducted for:

a. Visible emissions, if there is an applicable standard;

b. Each of the following pollutants, if there is an applicable standard, and if the emissions unit emits or has the potential to emit: 5 tons per year or more of lead or lead compounds measured as elemental lead; or 100 tons per year or more of any other regulated air pollutant.

5. An annual compliance test for particulate matter emissions shall not be required for any fuel burning emissions unit that, in a federal fiscal year, does not burn liquid fuel, other than during startup, for a total of more than 400 hours.

9. The owner or operator shall notify the Department, at least 15 days prior to the date on which each formal compliance test is to begin, of the date, time, and place of each such test, and the test contact person who will be responsible for coordinating and having such test conducted for the owner or operator.

(b) Special Compliance Tests. When the Department, after investigation, has good reason (such as complaints, increased visible emissions or questionable maintenance of control equipment) to believe that any applicable emission standard contained in a Department rule or in a permit issued pursuant to those rules is being violated, it may require the owner or operator of the emissions unit to conduct compliance tests which identify the nature and quantity of pollutant emissions from the emissions unit and to provide a report on the results of said tests to the Department.

(c) Waiver of Compliance Test Requirements. If the owner or operator of an emissions unit that is subject to a compliance test requirement demonstrates to the Department, pursuant to the procedure established in Rule 62-297.620, F.A.C., that the compliance of the emissions unit with an applicable weight emission limiting standard can be adequately determined by means other than the designated test procedure, such as specifying a surrogate standard of no visible emissions for particulate matter sources equipped with a bag house or specifying a fuel analysis for sulfur dioxide emissions, the Department shall waive the compliance test requirements for such emissions units and order that the alternate means of determining compliance be used, provided, however, the provisions of Rule 62-297.310(7)(b), F.A.C., shall apply.

[Rule 62-297.310(7), F.A.C.; SIP approved]

A.27. Compliance Testing for Visible Emissions. By this permit, annual emissions compliance testing for visible emissions is not required for these emissions units while burning only liquid fuel(s) for less than 400 hours per year.

[Rule 62-297.310(7)(a)4., F.A.C.]

A.28. Compliance Testing for PM. Annual and permit renewal compliance testing for particulate matter emissions is not required for these emissions units while burning only liquid fuel(s) for less than 400 hours per year.

[Rules 62-297.310(7)(a)3. & 5., F.A.C.]

Record keeping and Reporting Requirements

A.29. Excess Emissions Notification. In the case of excess emissions resulting from malfunctions, each owner or operator shall notify the Department's Southwest District Office in accordance with Rule 62-4.130, F.A.C. A full written report on the malfunctions shall be submitted in a quarterly report, if requested by the Department's Southwest District Office.

[Rule 62-210.700(6), F.A.C.]

A.30. Submit to the Department's Southwest District Office a written report of emissions in excess of emission limiting standards as set forth in Rule 62-296.405(1), F.A.C., for each calendar quarter. The nature and cause of the excess emissions shall be explained. This report does not relieve the owner or operator of the legal liability for violations. All recorded data shall be maintained on file by the Source for a period of five years. [Rules 62-213.440 and 62-296.405(1)(g), F.A.C.]

A.31. Test Reports.

- (a) The owner or operator of an emissions unit for which a compliance test is required shall file a report with the Department's Southwest District Office on the results of each such test.
- (b) The required test report shall be filed with the Department's Southwest District Office as soon as practical but no later than 45 days after the last sampling run of each test is completed.
- (c) The test report shall provide sufficient detail on the emissions unit tested and the test procedures used to allow the Department's Southwest District Office to determine if the test was properly conducted and the test results properly computed. As a minimum, the test report, other than for an EPA or DEP Method 9 test, shall provide the following information:
1. The type, location, and designation of the emissions unit tested.
 2. The facility at which the emissions unit is located.
 3. The owner or operator of the emissions unit.
 4. The normal type and amount of fuels used and materials processed, and the types and amounts of fuels used and material processed during each test run.
 5. The means, raw data and computations used to determine the amount of fuels used and materials processed, if necessary to determine compliance with an applicable emission limiting standard.
 6. The type of air pollution control devices installed on the emissions unit, their general condition, their normal operating parameters (pressure drops, total operating current and GPM scrubber water), and their operating parameters during each test run.
 7. A sketch of the duct within 8 stack diameters upstream and 2 stack diameters downstream of the sampling ports, including the distance to any upstream and downstream bends or other flow disturbances.
 8. The date, starting time and duration of each sampling run.
 9. The test procedures used, including any alternative procedures authorized pursuant to Rule 62-297.620, F.A.C. Where optional procedures are authorized in this chapter, indicate which option was used.
 10. The number of points sampled and configuration and location of the sampling plane.
 11. For each sampling point for each run, the dry gas meter reading, velocity head, pressure drop across the stack, temperatures, average meter temperatures and sample time per point.
 12. The type, manufacturer and configuration of the sampling equipment used.
 13. Data related to the required calibration of the test equipment.
 14. Data on the identification, processing and weights of all filters used.
 15. Data on the types and amounts of any chemical solutions used.
 16. Data on the amount of pollutant collected from each sampling probe, the filters, and the impingers, are reported separately for the compliance test.
 17. The names of individuals who furnished the process variable data, conducted the test, analyzed the samples and prepared the report.
 18. All measured and calculated data required to be determined by each applicable test procedure for each run.
 19. The detailed calculations for one run that relate the collected data to the calculated emission rate.
 20. The applicable emission standard, and the resulting maximum allowable emission rate for the emissions unit, plus the test result in the same form and unit of measure.

21. A certification that, to the knowledge of the owner or his authorized agent, all data submitted are true and correct. When a compliance test is conducted for the Department or its agent, the person who conducts the test shall provide the certification with respect to the test procedures used. The owner or his authorized agent shall certify that all data required and provided to the person conducting the test are true and correct to his knowledge.

[Rules 62-213.440 and 62-297.310(8), F.A.C.]

Addition limitations for On-Specification Used Oil

A.32. Not federally enforceable. On-specification used oil generated at this facility or off-site may only be burned in these emissions units if compliance with all the conditions of this permit and the following additional conditions are demonstrated:

- a. On-specification Used Oil Allowed as Fuel: This permit allows the burning of used fuel oil meeting EPA "on-specification" used oil specifications, with a maximum sulfur content of 2.5 percent, by weight, and a PCB concentration of less than 50 ppm. On-specification used oil shall meet the following specifications [40 CFR 279, Subpart B.]

1. Arsenic shall not exceed 5.0 ppm;
2. Cadmium shall not exceed 2.0 ppm;
3. Chromium shall not exceed 10.0 ppm;
4. Lead shall not exceed 100.0 ppm;
5. Total halogens shall not exceed 1000 ppm;
6. Flash point shall not be less than 100 degrees F.

Used oil that does not meet the specifications for on-specification used oil shall not be burned at this facility.

- b. Quantity Limited: The maximum amount of on-specification used oil, whether generated on or off-site, that can be burned facility-wide shall not exceed 10 percent of the heat input or 30 million gallons per year cumulatively.
- c. Used Oil Containing PCBs \geq 50 ppm Not Allowed: Used oil containing a PCB concentration of 50 ppm or greater shall not be burned at this facility. Used oil shall not be blended to meet this requirement or any part of this condition .
- d. PCB Concentration of 2 to 50 ppm: On-specification used oil with a PCB concentration of 2 to less than 50 ppm shall be burned only at normal source operating temperatures. On specification used oil with a PCB concentration of 2 to less than 50 ppm shall not be burned during periods of startup or shutdown.

Before accepting from each marketer the first shipment of on-specification used oil with a PCB concentration of 2 to less than 50 ppm, the owner or operator shall provide each marketer with a one-time written and signed notice certifying that the owner or operator will burn the used oil in a qualified combustion device. The notice must state that EPA or a RCRA-delegated state agency has been given a description of the used oil management activities at the facility and that an industrial boiler or furnace will be used to burn the used

oil with a PCB concentration of 2 to less than 50 ppm. The description of the used oil management activities shall be submitted to the Administrator, Hazardous Waste Regulation Section, Florida Department of Environmental Protection, 2600 Blair Stone Road, Tallahassee, FL 32399-2400. [40 CFR 279 and 761.20(e)]

- e. Certification Required: The owner or operator shall receive from the marketer, for each load of used oil received, a certification that the used oil meets the specifications for on-specification used oil and contains a PCB concentration of less than 50 ppm. This certification shall also describe the basis for the certification, such as analytical results. Note that a claim that used oil does not contain quantifiable levels of PCBs (that is, that the used oil contains less than 2 ppm of PCBs) must be documented by testing or other information. The first person making the claim that the used oil does not contain PCBs is responsible for furnishing the documentation. The documentation can be tests, personal or special knowledge of the source and composition of the used oil, or a certification from the person generating the used oil claiming that the used oil contains no detectable PCBs.
- f. Testing Required: If the owner or operator does not receive certification from the marketer as described above, the owner or operator shall properly sample and test each load of used oil received for the following parameters:

Arsenic, cadmium, chromium, lead, total halogens, flash point, PCBs*, and percent sulfur content by weight, ash, and BTU value (BTU per gallon).

Testing (sampling, extraction and analysis) shall be performed using approved methods specified in EPA Publication SW-846 (Test Methods for Evaluating Solid Waste, Physical/Chemical Methods).

* Testing for PCB's is not necessary if quantifiable levels are less than 2 ppm (ref. to specific condition A.32.e., above)

If the owner or operator relies on certification from the marketer, the owner or operator shall be responsible for ensuring that the certification complies with all the requirements of this condition and all conditions of this permit.

If the analytical results show that the used oil does not meet the specification for on-specification used oil, or that it contains a PCB concentration greater than or equal to 50 ppm, the owner or operator shall immediately notify and provide the analytical results to the Department's Southwest District Office. The owner or operator shall immediately cease burning of the used oil.

- g. Special Record Keeping Requirements: The owner or operator shall obtain, make, and keep the following records related to the use of used oil: [40 CFR 761.20(e)]
- (1) The gallons of on-specification used oil received and burned each month. (This record shall be completed no later than the fifteenth day of the succeeding month.)
 - (2) The total gallons of on-specification used oil burned in the preceding consecutive 12-month period. (This record shall be completed no later than the fifteenth day of the succeeding month.)

- (3) The name and address of all marketers delivering used oil to the facility.
- (4) Copies of the marketer certifications, if obtained, and any supporting information.
- (5) Documentation that the used oil contains less than 2 ppm PCBs, if claimed, including the name and address of the person making the claim.
- (6) Results of the analyses required above.
- (7) A copy of the notice to EPA and a copy of the one-time written notice provided to each marketer.

The records shall be retained in a form suitable for inspection at the facility by the Department, and shall be retained for 5 years.

- h. Reporting Required: The owner or operator shall submit, with the Annual Operation Report (AOR) form, the total amount of on-specification used oil received, and the total amount of on-specification used oil burned during the previous calendar year to the Southwest District Office. The AOR shall include the total amount of lead emitted as a result of burning on-specification used oil during the calendar year on a monthly basis.

[Rules 62-4.070(3), 62-212.400(2)(f)1. and 62-213.440, F.A.C.; and, AO 51-254492A & 1010017-001-AO]

Section III. Emissions Units and Conditions.

Subsection B. This section addresses the following emissions units.

<u>E.U. ID No.</u>	<u>Brief Description</u>
-7775047 -001	Relocatable Diesel Fired Generator(s)

These relocatable emissions units are Caterpillar Model 3508-DITA 820 kilowatt diesel generators. The maximum heat input is 25.74 million Btu per hour (MMBtu/hour) while being fueled by 186.3 gallons of new No. 2 fuel oil per hour with a maximum rating of 2460 kilowatts. Emissions from the generators are uncontrolled. The generators may be relocated at any of the following facilities:

1. Crystal River Plant, Powerline Road, Red Level, Citrus County.
2. Bartow Plant, Weedon Island, St. Petersburg, Pinellas County.
3. Higgins Plant, Shore Drive, Oldsmar, Pinellas County.
4. Bayboro Plant, 13th Ave. & 2nd St. South, St. Petersburg, Pinellas County.
5. Wildwood Reclamation Facility, State Road 462, 1 mi. east of U.S. 301, Wildwood, Sumter County.
6. The future FPC Polk County Site, County Road 555, 1 mi. southwest of Homeland, Polk County.

{Permitting notes: These emissions units are regulated under Rule 62-210.300, F.A.C., Permits Required. Each generator has its own stack. The heat input limitations have been placed in the permit to identify the capacity of each emissions unit for purposes of confirming that emissions testing is conducted within 90-100 percent of the emission unit's rated capacity (or to limit future operation to 110 percent of the test load), to establish appropriate limits and to aid in determining future rule applicability.}

[Rule 62-4.160(2), and Rule 62-297.310(2), F.A.C.]

The following specific conditions apply to the emissions units listed above regardless of location:

Essential Potential to Emit (PTE) Parameters

B.1. Permitted Capacity. The maximum operation heat input rates are as follows:

[Rules 62-4.160(2) and 62-210.200(PTE), F.A.C.]

<u>Unit No.</u>	<u>MMBtu/hr/generator(s) Heat Input</u>	<u>Fuel Type</u>
-7775047 -001	25.74	New Low Sulfur No. 2 Fuel Oil

B.2. Emissions Unit Operating Rate Limitation After Testing. See specific condition **B.13.**

[Rule 62-297.310(2), F.A.C.]

B.3. Methods of Operation - Fuels. Only new low sulfur No. 2 fuel oil shall be fired in the diesel generator(s).

[Rule 62-213.410, F.A.C.]

B.4. Hours of Operation. The hours of operation expressed as “engine-hours” shall not exceed 2970 hours in any consecutive 12 month period. The total hours of operation expressed as “engine-hours” shall be the summation of the individual hours of operation of each generator.
[Rules 62-4.160(2) and 62-210.200(PTE), F.A.C.; and, AO 09-205952.]

Emission Limitations and Standards

{Permitting Note: The attached Table 1-1, Summary of Air Pollutant Standards and Terms, summarizes information for convenience purposes only. This table does not supersede any of the terms or conditions of this permit.}

B.5. Visible Emissions. Visible emissions from each generator shall not be equal to or greater than 20 percent opacity.
[Rule 62-296.320(4)(b)1., F.A.C.; and, AO 09-205952.]

B.6. Sulfur Dioxide - Sulfur Content. The sulfur content of the new No. 2 fuel oil shall not exceed 0.50 percent, by weight.
[Requested in initial Title V permit application dated June 12, 1996; and, AC 09-202080.]

Excess Emissions

B.7. Excess emissions from these emissions units resulting from startup, shutdown or malfunction shall be permitted provided that best operational practices to minimize emissions are adhered to and the duration of excess emissions shall be minimized but in no case exceed two hours in any 24 hour period unless specifically authorized by the Department for longer duration.
[Rule 62-210.700(1), F.A.C.]

B.8. Excess emissions which are caused entirely or in part by poor maintenance, poor operation, or any other equipment or process failure which may reasonably be prevented during startup, shutdown or malfunction shall be prohibited.
[Rule 62-210.700(4), F.A.C.]

Monitoring of Operations

B.9. The permittee shall demonstrate compliance with the liquid fuel sulfur limit by means of a fuel analysis provided by the vendor or permittee upon each fuel delivery. See specific condition **B.12.**
[Rule 62-213.440, F.A.C.]

B.10. Determination of Process Variables.

(a) **Required Equipment.** The owner or operator of an emissions unit for which compliance tests are required shall install, operate, and maintain equipment or instruments necessary to determine process variables, such as process weight input or heat input, when such data are needed in conjunction with emissions data to determine the compliance of the emissions unit with applicable emission limiting standards.

(b) **Accuracy of Equipment.** Equipment or instruments used to directly or indirectly determine process variables, including devices such as belt scales, weight hoppers, flow meters, and tank scales, shall be calibrated and adjusted to indicate the true value of the parameter being measured with sufficient accuracy to allow the applicable process variable to be determined within 10% of its true value.

[Rule 62-297.310(5), F.A.C.]

Test Methods and Procedures

{Permitting Note: The attached Table 2-1, Summary of Compliance Requirements, summarizes information for convenience purposes only. This table does not supersede any of the terms or conditions of this permit.}

B.11. The test method for visible emissions shall be EPA Method 9, incorporated and adopted by reference in Chapter 62-297, F.A.C.

[Rules 62-296.320(4)(b)4.a. and 62-297.401, F.A.C.]

B.12. The fuel sulfur content, percent by weight, for liquid fuels shall be evaluated using either ASTM D2622-94, ASTM D4294-90, both ASTM D4057-88 and ASTM D129-95, or the latest edition(s).

[Rules 62-213.440 and 62-297.440, F.A.C.]

B.13. Operating Rate During Testing. Testing of emissions shall be conducted with the generator(s) operating at 90 to 100 percent of the maximum fuel firing rate of 186.3 gallons per hour. If it is impracticable to test at permitted capacity, an emissions unit may be tested at less than the minimum permitted capacity (i.e., at less than 90 percent of the maximum operation rate allowed by the permit); in this case, subsequent emissions unit operations may be limited to 110 percent of the test load until a new test is conducted, provided however, operations do not exceed 100 percent of the maximum operation rate allowed by the permit. Once the emissions unit is so limited, operation at higher capacities is allowed for no more than 15 consecutive days for the purpose of additional compliance testing to regain the authority to operate at the permitted capacity. Failure to submit the actual operating rate may invalidate the test.

[Rules 62-297.310(2), F.A.C.; and, Permit AO 09-205952.]

B.14. Applicable Test Procedures.

(a) Required Sampling Time.

2. Opacity Compliance Tests. When either EPA Method 9 or DEP Method 9 is specified as the applicable opacity test method, the required minimum period of observation for a compliance test shall be sixty (60) minutes for emissions units which emit or have the potential to emit 100 tons per year or more of particulate matter, and thirty (30) minutes for emissions units which have potential emissions less than 100 tons per year of particulate matter and are not subject to a multiple-valued opacity standard. The opacity test observation period shall include the period during which the highest opacity emissions can reasonably be expected to occur. Exceptions to these requirements are as follows:

c. The minimum observation period for opacity tests conducted by employees or agents of the Department to verify the day-to-day continuing compliance of a unit or activity with an applicable opacity standard shall be twelve minutes.

[Rule 62-297.310(4)(a)2.c., F.A.C.]

B.15. Frequency of Compliance Tests. The following provisions apply only to those emissions units that are subject to an emissions limiting standard for which compliance testing is required.

(a) General Compliance Testing.

3. The owner or operator of an emissions unit that is subject to any emission limiting standard shall conduct a compliance test that demonstrates compliance with the applicable emission limiting standard prior to obtaining a renewed operation permit. Emissions units that are required to conduct an annual compliance test may submit the most recent annual compliance test to satisfy the requirements of this provision. In renewing an air operation permit pursuant to Rule 62-210.300(2)(a)3.b., c., or d., F.A.C., the

Department shall not require submission of emission compliance test results for any emissions unit that, during the year prior to renewal:

- a. Did not operate; or
 - b. In the case of a fuel burning emissions unit, burned liquid fuel for a total of no more than 400 hours.
4. During each federal fiscal year (October 1 - September 30), unless otherwise specified by rule, order, or permit, the owner or operator of each emissions unit shall have a formal compliance test conducted for:
- a. Visible emissions, if there is an applicable standard;
 - b. Each of the following pollutants, if there is an applicable standard, and if the emissions unit emits or has the potential to emit: 5 tons per year or more of lead or lead compounds measured as elemental lead; or 100 tons per year or more of any other regulated air pollutant.
8. Any combustion turbine that does not operate for more than 400 hours per year shall conduct a visible emissions compliance test once per each five-year period, coinciding with the term of its air operation permit.
9. The owner or operator shall notify the Department, at least 15 days prior to the date on which each formal compliance test is to begin, of the date, time, and place of each such test, and the test contact person who will be responsible for coordinating and having such test conducted for the owner or operator. For each generator located in Pinellas County, FPC shall provide the same notification to the Air Quality Division of the Pinellas County Department of Environmental Management.

(b) Special Compliance Tests. When the Department, after investigation, has good reason (such as complaints, increased visible emissions or questionable maintenance of control equipment) to believe that any applicable emission standard contained in a Department rule or in a permit issued pursuant to those rules is being violated, it may require the owner or operator of the emissions unit to conduct compliance tests which identify the nature and quantity of pollutant emissions from the emissions unit and to provide a report on the results of said tests to the Department.

(c) Waiver of Compliance Test Requirements. If the owner or operator of an emissions unit that is subject to a compliance test requirement demonstrates to the Department, pursuant to the procedure established in Rule 62-297.620, F.A.C., that the compliance of the emissions unit with an applicable weight emission limiting standard can be adequately determined by means other than the designated test procedure, such as specifying a surrogate standard of no visible emissions for particulate matter sources equipped with a bag house or specifying a fuel analysis for sulfur dioxide emissions, the Department shall waive the compliance test requirements for such emissions units and order that the alternate means of determining compliance be used, provided, however, the provisions of Rule 62-297.310(7)(b), F.A.C., shall apply.
[Rule 62-297.310(7), F.A.C.; SIP approved; and, AO 09-205952.]

B.16. Visible Emissions Testing - Annual. By this permit, annual emissions compliance testing for visible emissions is not required for these emissions units while burning liquid fuels for less than 400 hours per year.
[Rules 62-297.310(7)(a)4. & 8., F.A.C.]

B.17. After each relocation, each generator shall be tested within 30 days of startup for opacity and the fuel shall be analyzed for the sulfur content. See specific conditions **B.6.**, **B.9.**, and **B.12.**
[Rules 62-4.070(3) and 62-297.310(7)(b), F.A.C.; and, AO 09-205952.]

Recordkeeping and Reporting Requirements

B.18. Malfunction Reporting. In the case of excess emissions resulting from malfunctions, the owner or operator shall notify the Department's Southwest District Office, if a generator is located in Pasco County, in accordance with Rule 62-4.130, F.A.C. A full written report on the malfunctions shall be submitted in a quarterly report, if requested by the Department.
[Rule 62-210.700(6), F.A.C.]

B.19. Test Reports.

- (a) Each generator shall be tested on an annual basis within 30 days of the date October 25.
- (b) The owner or operator of an emissions unit for which a compliance test is required shall file a report with the Department on the results of each such test.
- (c) The required test report shall be filed with the Southwest District Office and the Air Quality Division of the Pinellas County Department of Environmental Management, if a generator is located in Pinellas County, as soon as practical but no later than 45 days after the last sampling run of each test is completed.
- (d) The test reports for a unit that has been relocated shall be submitted to the Southwest District Office and the Air Quality Division of the Pinellas County Department of Environmental Management, if a generator is located in Pinellas County, within 45 days of testing.
[Rule 62-297.310(8), F.A.C.; and, AO 09-25952.]

B.20. To demonstrate compliance with specific condition **B.4.**, records shall indicate the daily hours of operation for each of the generators, the daily hours of operation expressed as "engine- hours" for each month. The records shall be maintained for a minimum of 5 years and made available to the Southwest District Office and the Air Quality Division of the Pinellas County Department of Environmental Management upon request.
[Rules 62-213.440 and 62-297.310(8), F.A.C.; and, AO 09-205952.]

B.21. To demonstrate compliance with specific condition **B.6.**, records of the sulfur content, in percent by weight, of all the fuel burned shall be kept based on either vendor provided as-delivered or as-received fuel sample analysis. The records shall be maintained for a minimum of 5 years and made available to the Southwest District Office and the Air Quality Division of the Pinellas County Department of Environmental Management upon request.
[Rule 62-297.310(8), F.A.C.; and, AO 09-205952.]

Source Obligation

B.22. Specific conditions in construction permit AC 09-202080, limiting the "engine hours", were accepted by the applicant to escape Prevention of Significant Deterioration review. If Florida Power Corporation requests a relaxation of any of the federally enforceable emission limits in this permit, the relaxation of limits may be subject to the preconstruction review requirements of Rule 62-212.400(5), F.A.C., as though construction had not yet begun.
[Rule 62-212.400(2)(g), F.A.C.; and, AC 09-202080 and AO 09-205952.]

Notification

B.23. Florida Power Corporation shall notify the Department's Southwest District Office, in writing, at least 15 days prior to the date on which any diesel generator is to be relocated. The notification shall specify the following;

- a. which generator, by serial number, is being relocated,
- b. which location the generator is being relocated from and which location it is being relocated to, and
- c. the approximate startup date at the new location.

If a diesel generator is to be relocated within Pinellas County, then Florida Power Corporation shall provide the same notification to the Air Quality Division of the Pinellas County Department of Environmental Management.

[Rule 62-4.070(3), F.A.C.; and, AC 09-202080]

Section IV. This section is the Acid Rain Part.

Operated by: Florida Power Corporation
ORIS code: 8048

Subsection A. This subsection addresses Acid Rain, Phase II.

The emissions units listed below are regulated under Acid Rain Part, Phase II.

E.U. ID No.	Description
-001	Fossil Fuel Fired Steam Generator No. 1
-002	Fossil Fuel Fired Steam Generator No. 2

1. The Phase II permit application submitted for this facility, as approved by the Department, is a part of this permit. The owners and operators of these acid rain units must comply with the standard requirements and special provisions set forth in the application listed below:

- a. DEP Form No. 62-210.900(1)(a), dated 07/01/95.

[Chapter 62-213, F.A.C. and Rule 62-214.320, F.A.C.]

2. Sulfur dioxide (SO₂) allowance allocations for each Acid Rain unit:

E.U. ID No.	EPA ID.	Year	2000	2001	2002	2003	2004
-001	1	SO ₂ allowances, under Table 2, 3, or 4 of 40 CFR 73	12931*	12931*	12931*	12931*	12931*
-002	2	SO ₂ allowances, under Table 2, 3, or 4 of 40 CFR 73	12853*	12853*	12853*	12853*	12853*

*The number of allowances held by an Acid Rain source in a unit account may differ from the number allocated by the USEPA under Table 2, 3, or 4 of 40 CFR 73.

3. Emission Allowances. Emissions from sources subject to the Federal Acid Rain Program (Title IV) shall not exceed any allowances that the source lawfully holds under the Federal Acid Rain Program. Allowances shall not be used to demonstrate compliance with a non-Title IV applicable requirement of the Act.

a. No permit revision shall be required for increases in emissions that are authorized by allowances acquired pursuant to the Federal Acid Rain Program, provided that such increases do not require a permit revision pursuant to Rule 62-213.440(3), F.A.C.

b. No limit shall be placed on the number of allowances held by the source under the Federal Acid Rain program.

c. Allowances shall be accounted for under the Federal Acid Rain Program.

[Rule 62-213.440(1)(c), F.A.C.]

4. Fast-Track Revisions of Acid Rain Parts. Those Acid Rain sources making a change described in Rule 62-214.370(4), F.A.C., may request such changes as provided in Rule 62-213.413, Fast-Track Revisions of Acid Rain Parts.

[Rules 62-213.413 and 62-214.370(4), F.A.C.]

5. Comments, notes, and justifications: None.

Appendix U-1. List of Unregulated Emissions Units and/or Activities.

Unregulated Emissions Units and/or Activities. An emissions unit which emits no “emissions-limited pollutant” and which is subject to no unit-specific work practice standard, though it may be subject to regulations applied on a facility-wide basis (e.g., unconfined emissions, odor, general opacity) or to regulations that require only that it be able to prove exemption from unit-specific emissions or work practice standards.

The below listed emissions units and/or activities are neither ‘regulated emissions units’ nor ‘insignificant emissions units’.

Emissions Unit	Description
-xxx	Surface Coating and Solvent Cleaning
-xxx	General Purpose Engines
-xxx	Fuel Storage Tanks
-xxx	Helper Cooling Towers
-xxx	Emergency Generators

Appendix I-1. List of Insignificant Emissions Units and/or Activities.

The facilities, emissions units, or pollutant-emitting activities listed in Rule 62-210.300(3)(a), F.A.C., Categorical Exemptions, are exempt from the permitting requirements of Chapters 62-210 and 62-4, F.A.C.; provided, however, that exempt emissions units shall be subject to any applicable emission limiting standards and the emissions from exempt emissions units or activities shall be considered in determining the potential emissions of the facility containing such emissions units. Emissions units and pollutant-emitting activities exempt from permitting under Rule 62-210.300(3)(a), F.A.C., shall not be exempt from the permitting requirements of Chapter 62-213, F.A.C., if they are contained within a Title V source; however, such emissions units and activities shall be considered insignificant for Title V purposes provided they also meet the criteria of Rule 62-213.430(6)(b), F.A.C. No emissions unit shall be entitled to an exemption from permitting under Rule 62.210.300(3)(a), F.A.C., if its emissions, in combination with the emissions of other units and activities at the facility, would cause the facility to emit or have the potential to emit any pollutant in such amount as to make the facility a Title V source.

The below listed emissions units and/or activities are considered insignificant pursuant to Rule 62-213.430(6), F.A.C.

1	Lube Oil System Vents
2	Lube Oil Reservoir Tank
3	Parts Washers/Degreasers
4	Waste Oil Storage Tanks
5	Portable Unleaded Gasoline Tank
6	Evaporation of non-hazardous boiler cleaning chemical
7	No. 2 Diesel Fuel Tank

Table 1-1, Summary of Air Pollutant Standards and Terms

Florida Power Corporation
Anclote Power Plant

Revised DRAFT Permit No.: 1010017-003-AV
Facility ID No.: 1010017

E.U. ID Nos. Brief Description

-001		Fossil Fuel Fired Steam Generator #1				Allowable Emissions		Equivalent Emissions		Regulatory Citation(s)	See Permit Condition(s)
Pollutant Name	Fuel(s) *	Hours/ Year *	Standards	lb/ hour	TPY	lb/hour **	TPY **				
Visible Emissions Steady state	F.O.	8760	40% Opacity					Rule 62-296.405(1)(a), F.A.C. Rule 62.210.700(3), F.A.C. Order No. 1574	A.5. A.6.		
Soot Blowing or Load Changing	F.O.		60% Opacity								
PM Emissions Steady State	F.O.	8760	0.1 lb/MMBtu			496	2,174	Rule 62.296.405(1)(b), F.A.C. Rule 62.210.700(3), F.A.C.	A.7. A.8.		
Soot Blowing or Load Changing	F.O.		0.3 lb/MMBtu			1,489					
Sulfur Dioxide	F.O.	8760	2.75 lb/MMBtu			13,652	59,796	Rules 62-213.440, 62-296.405(1)(e)3., 62-296.40591)(c)1.i., F.A.C.	A.9. A.10.		
	F.O.	8760	2.50% by wt.								

-002		Fossil Fuel Fired Steam Generator #2				Allowable Emissions		Equivalent Emissions		Regulatory Citation(s)	See Permit Condition(s)
Pollutant Name	Fuel(s) *	Hours/ Year *	Standards	lb/ hour	TPY	lb/hour **	TPY **				
Visible Emissions Steady state	F.O.	8760	40% Opacity					Rule 62-296.405(1)(a), F.A.C. Rule 62.210.700(3), F.A.C. Order No. 1574	A.5. A.6.		
Soot Blowing or Load Changing	F.O.		60% Opacity								
PM Emissions Steady State	F.O.	8760	0.1 lb/MMBtu			485	2,124	Rule 62.296.405(1)(b), F.A.C. Rule 62.210.700(3), F.A.C.	A.7. A.8.		
Soot Blowing or Load Changing	F.O.		0.3 lb/MMBtu			1,455					
Sulfur Dioxide	F.O.	8760	2.75 lb/MMBtu			13,652	59,796	Rules 62-213.440, 62-296.405(1)(e)3., 62-296.40591)(c)1.i.,	A.9. A.10.		
	F.O.	8760	2.50% by wt.								

-7775047-001		Relocatable Generator(s)				Allowable Emissions		Equivalent Emissions		Regulatory Citation(s)	See Permit Condition(s)
Pollutant Name	Fuel(s) *	Hours/ Year *	Standards	lb/ hour	TPY	lb/hour **	TPY **				
Visible Emissions	#2 F.O.	8760	20% Opacity					Rule 62-296.320(4)(b)1., F.A.C.	B.5.		
Sulfur Dioxide	#2 F.O.	8760	0.50% by wt.							Rule 62-296.320(4)(b)1., F.A.C.	B.6.

* No. 1, 2, 3, 4, 5, & 6 fuel oil and on-specification used oil. Maximum amount of used oil burned shall not exceed 10 percent of the total heat input per emissions unit, or 30 million gallons per year cumulatively at the site.

** The "Equivalent Emissions" listed are for informational purposes only.

This table summarizes information for convenience purposes only. This table does not supersede any of the terms or conditions of this permit.

Table 1-2, Summary of Air Pollutant Standards and Terms

Florida Power Corporation
Anclote Power Plant

Revised DRAFT Permit No.: 1010017-003-AV
Facility ID No.: 1010017

Additional Standards for On-Specification Used Oil (OSUO)

E.U. ID Nos. Brief Description

-001		Fossil Fuel Fired Steam Generator #1							
		Allowable Emissions				Equivalent Emissions			
Pollutant Name	Fuel(s)	Hours/Year*	Standards	lbs./hour	TPY	lbs./hour	TPY	Regulatory Citation(s)	See Permit Condition(s)
Arsenic	OSUO		5.0 ppm						
Cadmium	OSUO		2.0 ppm						
Chromium	OSUO		10.0 ppm						
Lead	OSUO		100.0 ppm						
Total Halogens	OSUO		1000 ppm						
Flash Point	OSUO		≥ 100 degrees F						
PCB	OSUO		≤ 49 ppm						
SO ₂			2.5 % by weight						

-002		Fossil Fuel Fired Steam Generator #2							
		Allowable Emissions				Equivalent Emissions			
Pollutant Name	Fuel(s)	Hours/Year*	Standards	lbs./hour	TPY	lbs./hour	TPY	Regulatory Citation(s)	See Permit Condition(s)
Arsenic	OSUO		5.0 ppm						
Cadmium	OSUO		2.0 ppm						
Chromium	OSUO		10.0 ppm						
Lead	OSUO		100.0 ppm						
Total Halogens	OSUO		1000 ppm						
Flash Point	OSUO		≥ 100 degrees F						
PCB	OSUO		≤ 49 ppm						
SO ₂			2.5 % by weight						

* The maximum quantity of used oil that may be burned in each emissions unit shall not exceed 10 percent of the total heat input per emissions unit, or 30 million gallons per year cumulatively at the site.

This table summarizes information for convenience purposes only. This table does not supersede any of the terms or conditions of this permit.

Appendix H-1, Permit History/ID Number Changes

Florida Power Corporation
Anclote

Permit No.: 1010017-003-AV
Facility ID No.: 1010017

Permit History (for tracking purposes):

<u>E.U. ID No.</u>	<u>Description</u>	<u>Permit No.</u>	<u>Issue Date</u>	<u>Expiration Date</u>	<u>Extended Date</u>	<u>Revised Date(s)</u>
-001	Steam Turbine Generator	AO51-254492	03/7/1995	03/6/1999		
		AO51-254492A	1/31/1996	03/6/2000		
-002	Oil Fired Steam Generator	AO51-169340	12/21/1989	12/18/1994	08/14/1996	01/31/1996
		1010017-001-AO	01/31/1996			

(if applicable) ID Number Changes (for tracking purposes):

From: **Facility ID No.:** 40TPA510017

To: **Facility ID No.:** 1010017

Phase II Permit Application

For more information, see instructions and refer to 40 CFR 72.30 and 72.31 and Chapter 62-214, F.A.C.

This submission is: New Revised

STEP 1

Identify the source by plant name, State, and ORIS code from NADB

Anclote Power Plant, FL, 8048

Compliance Plan

STEP 2

Enter the boiler ID# from NADB for each affected unit, and indicate whether a repowering plan is being submitted for the unit by entering "yes" or "no" at column c. For new units, enter the requested information in columns d and e

a Boiler ID#	b Unit Will Hold Allowances in Accordance with 40 CFR 72.9(c)(1)	c Repowering Plan	d New Units Commence Operation Date	e New Units Monitor Certification Deadline
••1	Yes	No		
••2	Yes	No		
	Yes			
	Yes			
	Yes			
	Yes			
	Yes			
	Yes			
	Yes			
	Yes			
	Yes			
	Yes			
	Yes			
	Yes			

For each unit that will be repowered, the Repowering Extension Plan form is included and the Repowering Technology Petition form has been submitted or will be submitted by June 1, 1997.

STEP 3

Check the box if the response in column c of Step 2 is "Yes" for any unit

Plant Name (from Step 1)
Anclote Power Plant

STEP 4
 Read the standard requirements and certification, enter the name of the designated representative, and sign and date

Standard Requirements

Permit Requirements.

- (1) The designated representative of each Acid Rain source and each Acid Rain unit at the source shall:
 - (i) Submit a complete Acid Rain part application (including a compliance plan) under 40 CFR part 72, Rules 62-214.320 and 330, F.A.C. in accordance with the deadlines specified in Rule 62-214.320, F.A.C.; and
 - (ii) Submit in a timely manner any supplemental information that the permitting authority determines is necessary in order to review an Acid Rain part application and issue or deny an Acid Rain permit;
- (2) The owners and operators of each Acid Rain source and each Acid Rain unit at the source shall:
 - (i) Operate the unit in compliance with a complete Acid Rain part application or a superseding Acid Rain part issued by the permitting authority; and
 - (ii) Have an Acid Rain Part.

Monitoring Requirements.

- (1) The owners and operators and, to the extent applicable, designated representative of each Acid Rain source and each Acid Rain unit at the source shall comply with the monitoring requirements as provided in 40 CFR part 75, and Rule 62-214.420, F.A.C.
- (2) The emissions measurements recorded and reported in accordance with 40 CFR part 75 shall be used to determine compliance by the unit with the Acid Rain emissions limitations and emissions reduction requirements for sulfur dioxide and nitrogen oxides under the Acid Rain Program.
- (3) The requirements of 40 CFR part 75 shall not affect the responsibility of the owners and operators to monitor emissions of other pollutants or other emissions characteristics at the unit under other applicable requirements of the Act and other provisions of the operating permit for the source.

Sulfur Dioxide Requirements.

- (1) The owners and operators of each source and each Acid Rain unit at the source shall:
 - (i) Hold allowances, as of the allowance transfer deadline, in the unit's compliance subaccount (after deductions under 40 CFR 73.34(c)) not less than the total annual emissions of sulfur dioxide for the previous calendar year from the unit; and
 - (ii) Comply with the applicable Acid Rain emissions limitations for sulfur dioxide.
- (2) Each ton of sulfur dioxide emitted in excess of the Acid Rain emissions limitations for sulfur dioxide shall constitute a separate violation of the Act.
- (3) An Acid Rain unit shall be subject to the requirements under paragraph (1) of the sulfur dioxide requirements as follows:
 - (i) Starting January 1, 2000, an Acid Rain unit under 40 CFR 72.6(a)(2); or
 - (ii) Starting on the later of January 1, 2000 or the deadline for monitor certification under 40 CFR part 75, an Acid Rain unit under 40 CFR 72.6(a)(3).
- (4) Allowances shall be held in, deducted from, or transferred among Allowance Tracking System accounts in accordance with the Acid Rain Program.
- (5) An allowance shall not be deducted in order to comply with the requirements under paragraph (1)(i) of the sulfur dioxide requirements prior to the calendar year for which the allowance was allocated.
- (6) An allowance allocated by the Administrator under the Acid Rain Program is a limited authorization to emit sulfur dioxide in accordance with the Acid Rain Program. No provision of the Acid Rain Program, the Acid Rain permit application, the Acid Rain permit, or the written exemption under 40 CFR 72.7 and 72.8 and no provision of law shall be construed to limit the authority of the United States to terminate or limit such authorization.
- (7) An allowance allocated by the Administrator under the Acid Rain Program does not constitute a property right.

Nitrogen Oxides Requirements. The owners and operators of the source and each Acid Rain unit at the source shall comply with the applicable Acid Rain emissions limitation for nitrogen oxides.

Excess Emissions Requirements.

- (1) The designated representative of an Acid Rain unit that has excess emissions in any calendar year shall submit a proposed offset plan, as required under 40 CFR part 77.
- (2) The owners and operators of an Acid Rain unit that has excess emissions in any calendar year shall:
 - (i) Pay without demand the penalty required, and pay upon demand the interest on that penalty, as required by 40 CFR part 77; and
 - (ii) Comply with the terms of an approved offset plan, as required by 40 CFR part 77.

Recordkeeping and Reporting Requirements.

- (1) Unless otherwise provided, the owners and operators of the source and each Acid Rain unit at the source shall keep on site at the source each of the following documents for a period of 5 years from the date the document is created. This period may be extended for cause, at any time prior to the end of 5 years, in writing by the Administrator or permitting authority:
 - (i) The certificate of representation for the designated representative for the source and each Acid Rain unit at the source and all documents that demonstrate the truth of the statements in the certificate of representation, in accordance with Rule 62-214.350, F.A.C.; provided that the certificate and documents shall be retained on site at the source beyond such 5-year period until such documents are superseded because of the submission of a new certificate of representation changing the designated representative;
 - (ii) All emissions monitoring information, in accordance with 40 CFR part 75;
 - (iii) Copies of all reports, compliance certifications, and other submissions and all records made or required under the Acid Rain Program; and,

Plant Name (from Step 1)
Anclote Power Plant

Recordkeeping and Reporting Requirements (cont.)

(iv) Copies of all documents used to complete an Acid Rain part application and any other submission under the Acid Rain Program or to demonstrate compliance with the requirements of the Acid Rain Program.

(2) The designated representative of an Acid Rain source and each Acid Rain unit at the source shall submit the reports and compliance certifications required under the Acid Rain Program, including those under 40 CFR part 72 subpart I and 40 CFR part 75.

Liability.

(1) Any person who knowingly violates any requirement or prohibition of the Acid Rain Program, a complete Acid Rain part application, an Acid Rain part, or a written exemption under 40 CFR 72.7 or 72.8, including any requirement for the payment of any penalty owed to the United States, shall be subject to enforcement pursuant to section 113(c) of the Act.

(2) Any person who knowingly makes a false, material statement in any record, submission, or report under the Acid Rain Program shall be subject to criminal enforcement pursuant to section 113(c) of the Act and 18 U.S.C. 1001.

(3) No permit revision shall excuse any violation of the requirements of the Acid Rain Program that occurs prior to the date that the revision takes effect.

(4) Each Acid Rain source and each Acid Rain unit shall meet the requirements of the Acid Rain Program.

(5) Any provision of the Acid Rain Program that applies to an Acid Rain source (including a provision applicable to the designated representative of an Acid Rain source) shall also apply to the owners and operators of such source and of the Acid Rain units at the source.

(6) Any provision of the Acid Rain Program that applies to an Acid Rain unit (including a provision applicable to the designated representative of an Acid Rain unit) shall also apply to the owners and operators of such unit. Except as provided under 40 CFR 72.44 (Phase II repowering extension plans), and except with regard to the requirements applicable to units with a common stack under 40 CFR part 75 (including 40 CFR 75.16, 75.17, and 75.18), the owners and operators and the designated representative of one Acid Rain unit shall not be liable for any violation by any other Acid Rain unit of which they are not owners or operators or the designated representative and that is located at a source of which they are not owners or operators or the designated representative.

(7) Each violation of a provision of 40 CFR parts 72, 73, 75, 77, and 78 by an Acid Rain source or Acid Rain unit, or by an owner or operator or designated representative of such source or unit, shall be a separate violation of the Act.

Effect on Other Authorities. No provision of the Acid Rain Program, an Acid Rain part application, an Acid Rain part, or a written exemption under 40 CFR 72.7 or 72.8 shall be construed as:

(1) Except as expressly provided in title IV of the Act, exempting or excluding the owners and operators and, to the extent applicable, the designated representative of an Acid Rain source or Acid Rain unit from compliance with any other provision of the Act, including the provisions of title I of the Act relating to applicable National Ambient Air Quality Standards or State Implementation Plans;

(2) Limiting the number of allowances a unit can hold; *provided*, that the number of allowances held by the unit shall not affect the source's obligation to comply with any other provisions of the Act;


(3) Requiring a change of any kind in any State law regulating electric utility rates and charges, affecting any State law regarding such State regulation, or limiting such State regulation, including any prudence review requirements under such State law;

(4) Modifying the Federal Power Act or affecting the authority of the Federal Energy Regulatory Commission under the Federal Power Act; or,

(5) Interfering with or impairing any program for competitive bidding for power supply in a State in which such program is established.

Certification

I am authorized to make this submission on behalf of the owners and operators of the Acid Rain source or Acid Rain units for which the submission is made. I certify under penalty of law that I have personally examined, and am familiar with, the statements and information submitted in this document and all its attachments. Based on my inquiry of those individuals with primary responsibility for obtaining the information, I certify that the statements and information are to the best of my knowledge and belief true, accurate, and complete. I am aware that there are significant penalties for submitting false statements and information or omitting required statements and information, including the possibility of fine or imprisonment.

Name <i>W. Jeffrey Pardue, C.E.P., Director, Environmental Services Dept.</i>	
Signature 	Date <i>12/14/95</i>

STEP 5 (optional)
Enter the source AIRS
and FINDS identification
numbers, if known

AIRS
FINDS



RECEIVED

FEB 25 1999

BUREAU OF
AIR REGULATION

February 23, 1999

Ms. Kathy Carter, Clerk
Office of General Counsel
Florida Department of Environmental Protection
Room 638
3900 Commonwealth Blvd.
Tallahassee, FL 32399-3000

Dear Ms. Carter:

RE: Florida Power Corporation, Anclote Facility
REQUEST FOR EXTENSION OF TIME on the *Intent to Issue Title V Air Operation Permit*,
REVISED Draft Permit No. 1010017-003-AV

On August 21, 1997, Florida Power Corporation (FPC) received the above-referenced Intent to Issue Title V Air Operation Permit. On September 4, 1997, FPC filed a Petition for Administrative Proceeding on this permit. On November 30, 1998, FPC received a REVISED Draft Permit from the Department. The Department's cover letter to the REVISED permit stated that the initial Draft permit had been withdrawn. A review of the REVISED permit conditions has revealed that several issues remain to be resolved. Accordingly, FPC requests an extension of time, pursuant to Florida Administrative Code Rule 62-110.106(4), to and including April 1, 1999, in which to file a Petition for Administrative Proceedings in the above-styled matter. Granting of this request will not prejudice either party, but will further both parties' mutual interest by hopefully avoiding the need to actually file a Petition for Administrative Proceeding in this matter. If the Department denies this request, FPC requests the opportunity to file a Petition for Administrative Proceeding within 10 days of such denial

If you should have any questions, please contact Mr. Scott Osbourn of FPC at (727) 826-4258.

Sincerely,

A handwritten signature in black ink, appearing to read "W. Jeffrey Pardue", written over a circular scribble.

W. Jeffrey Pardue, C.E.P.
Director, Environmental Services Department
Title V Responsible Official

A handwritten signature in black ink, appearing to read "Robert A. Manning", written in a cursive style.

Robert A. Manning, Esq.
Hopping Green Sams & Smith

cc: Scott Sheplak, DEP
Doug Beason, DEP OGC



RECEIVED

MAR 02 1999

BUREAU OF AIR REGULATION

February 24, 1999

Mr. Clair Fancy, Chief
Bureau of Air Regulation
Florida Department of Environmental Protection
2600 Blair Stone Rd.
Tallahassee, Florida 32399-2400

BAR conference room

March 17 (10-12 noon, 1-3 p.m.)

Dear Mr. Fancy:

Re: Status of Title V Permits

As you know, several of Florida Power Corporation's (FPC) Title V permits remain in the Initial Draft or Revised Draft stages and progress is being made very slowly. This is no one's fault in particular; it's difficult to establish any momentum when the involved parties are processing so many permits and some of the issues (e.g., periodic monitoring) are moving targets. As you and Mr. Scott Osbourn recently discussed, it may be helpful if all involved parties at FPC and the Department were to meet at one time to discuss any remaining unresolved issues.

FPC proposes, with your concurrence, to arrange for a one- or two-day meeting between FPC and the Department to resolve issues associated with the following Title V permits that remain in either the Initial Draft or Revised Draft stage: Anclote, Bartow, Crystal River, Suwannee, Tiger Bay, Bayboro and the University of Florida. It would be desirable to have you, Scott Sheplak and the permit engineers responsible for these facilities in attendance. Mr. Scott Osbourn and I will represent FPC.

It is FPC's desire to advance these Title V permits to the Final Permit stage as expeditiously as possible. FPC has recently requested additional extensions of time on the above-mentioned permits until April 1, 1999 and would like to resolve these permits prior to that date. We will contact you in the next day or two to coordinate a meeting date. If you should have any questions in the meantime, please contact either Scott Osbourn at (727) 826-4258 or me at (727) 826-4334.

Sincerely,

J. Michael Kennedy (handwritten signature)

J. Michael Kennedy, O.E.P.
Manager, Air Programs

cc: Scott Sheplak
Doug Beason, OGC
Jeffrey Brown, OGC
Robert Manning, HGS&S

processor
Andote Mike
Bartow Ed
Crystal Ed
Suwannee Bruce
Tiger Bay Jonathan
Bayboro Ed
Uoff Bruce

{ See responses to FPC comments for Bartow or Crystal River for consistency }



RECEIVED

FEB 12 1999

**BUREAU OF
AIR REGULATION**

February 11, 1999

Mr. Scott Sheplak, P.E.
Bureau of Air Regulation
Division of Air Resources Management
Department of Environmental Protection
2600 Blair Stone Rd., MS 5505
Tallahassee, Florida 32399-2400

Dear Mr. Sheplak:

Re: Anclote Facility
Revised DRAFT Permit No.: 1010017-003-AV

Florida Power Corporation (FPC) is providing comments related to the Revised DRAFT Title V permit referenced above. The comments are presented below in the same order as the conditions appear in the permit. FPC has filed a Request for Extension of Time until April 1, 1999. If we are unable to resolve each of the issues described below before this time, FPC intends to file an additional Request for Extension. Accordingly, at your earliest convenience after reviewing this letter, please contact me at (727) 826-4258 to discuss.

1. Page i. In the Table of Contents, Section III.B should read as follows: "Diesel Fired Generators (~~3~~ 820 Kilowatt each).
2. Page 1. The Statement of Basis should include clarifying language on the intent of the heat input limits. This has been done, where appropriate, in other Title V permits (see attached EPA letter regarding FPL resolution).
3. Page 7. The permitting note under the heat input limits (Condition A.1) is incomplete. The note should also include language regarding recordkeeping requirements (see attachment per no. 2 above).
4. Condition A.32 (pages 16-18). Condition A.32.g(2) requires used oil records to be kept for the "preceding consecutive 12-month period". FPC interprets this as a 12-month rolling period. This requirement is inconsistent with Conditions A32.b and A.32.h, that require recordkeeping on a calendar year basis. In order to be consistent with the references to calendar year in the other requirements, FPC requests that Condition A.32.g(2) be revised to a calendar year basis. Finally, FPC requests that the last sentence of Condition A.32.h

Mr. Sheplak
February 11, 1999
Page 2

be deleted. If lead meets the threshold for reporting in the AOR, it will be duly reported anyway.

5. Section III, Subsection B. The provisions governing the operation of these relocatable diesel generators when they are located at the Anclote facility should be essentially identical to the provisions contained in FPC's Final Title V permit for the Higgins Facility (see attached page from Final Title V permit for Higgins).
6. Table 1-1. The fuel oil sulfur content limit for Steam Units 1 and 2 should be 2.5%, not 2.50%. Finally, the hours per year of operation for the relocatable diesel generators should be 2,970 hr/yr, not 8,760 hr/yr.

FPC appreciates the opportunity to comment on the Revised DRAFT Title V permit. Thank you again for your prompt attention to this matter.

Sincerely,



Scott H. Osbourn
Senior Environmental Engineer

Attachments

cc: Robert Manning, HGS&S

2/16/99 cc: Scott Sheplak
Mike Helpin

ATTACHMENTS

Mr. R. Douglas Neeley
 March 10, 1998
 Page 6 of 9

BEST AVAILABLE COPY

and blending at the terminal is required to obtain a fuel mix equal to the applicable percent sulfur limit, an analysis of a fuel sample representative of fuel from the fuel storage tanks shall be performed by FPL prior to transferring oil to the Manatee plant. Reports of percent sulfur content of these analyses shall be maintained at the power plant facility.

The owner or operator shall maintain records of the as-fired fuel oil heating value, density or specific gravity, and the percent sulfur content. Fuel sulfur content, percent by weight, for liquid fuels shall be determined by either ASTM D2622-94, ASTM D4294-90 (95), ASTM D1552-95, ASTM D1266-91, or both ASTM D4057-88 and ASTM D129-95 (or latest editions) to analyze a representative sample of the fuel oil.

[Rules 62-213.440, 62-296.405(1)(e)3., 62-296.405(1)(f)1.b. and 62-297.440, F.A.C., and applicant agreement with EPA on March 3, 1998]

Lauderdale, Manatee, Martin, Putnam and Turkey Point

The heat input limitations have been placed in each permit to identify the capacity of each unit for the purposes of confirming that emissions testing is conducted within 90 to 100 percent of the unit's rated capacity (or to limit future operation to 110 percent of the test load), to establish appropriate emission limits and to aid in determining future rule applicability. A note will be added to the permitted capacity condition for each permit clarifying this, and an explanation that regular record keeping is not required for heat input will be added to the statement of basis. The following specific changes will be made:

Add to the statement of basis for each permit:

The heat input limitations have been placed in each permit to identify the capacity of each unit for the purposes of confirming that emissions testing is conducted within 90 to 100 percent of the unit's rated capacity (or to limit future operation to 110 percent of the test load), to establish appropriate emission limits and to aid in determining future rule applicability. A note below the permitted capacity condition clarifies this. Regular record keeping is not required for heat input. Instead the owner or operator is expected to determine heat input whenever emission testing is required, to demonstrate at what percentage of the rated capacity that the unit was tested. Rule 62-297.310(5), F.A.C., included in the permit, is requires measurement of process variables for emission tests. Such heat input determination may be based on measurements of fuel consumption by various methods including but not limited to fuel flow metering or tank drop measurements, using the heat value of the fuel determined by the fuel vendor or the owner or operator, to calculate average hourly heat input during the test.

Add to each permit below the condition titled Permitted Capacity:

{Permitting note: The heat input limitations have been placed in each permit to identify the capacity of each unit for the purposes of confirming that emissions testing is conducted within 90 to 100 percent of the unit's rated capacity (or to limit future operation to 110 percent of the test load), to establish appropriate emission limits and to aid in determining future rule applicability.}

Manatee, Martin, Port Everglades, Riviera and Turkey Point

No revisions of the permits are necessary to address the comment related to records of soot blowing and load changes. All parties in the meeting agreed that the current permit requirements related to reporting of excess emissions are sufficient to satisfy this comment. FPL will continue to document and report excess emission events. This issue is considered resolved, so no changes to the permits will be made.

Subsection C. This section addresses the following emissions units.

E.U. ID No.	Brief Description
-7775047 -001	Relocatable Diesel Fired Generator(s)

The relocatable diesel generator(s) will have a maximum (combined) heat input of 25.74 MMBtu/hour while being fueled by 186.3 gallons of new No. 2 fuel oil per hour with a maximum (combined) rating of 2460 kilowatts. Emissions from the generator(s) are uncontrolled. These conditions were requested in the Initial Title V Permit Application for the Anclote Power Plant received June 14, 1996. The generator(s) may be relocated at this facility and any of the following facilities:

1. Crystal River Plant, Powerline Road, Red Level, Citrus County.
2. Bartow Plant, Weedon Island, St. Petersburg, Pinellas County.
3. Anclote Power Plant, 1729 Baileys Bluff Road, Holliday, Pasco County.
4. Bayboro Plant, 13th Ave. & 2nd St. South, St. Petersburg, Pinellas County.
5. Wildwood Reclamation Facility, State Road 462, 1 mi. east of U.S. 301, Wildwood, Sumter County.
6. ~~The future FPC Polk County Site~~, *Hines Energy Complex*, County Road 555, 1 mi. southwest of Homeland, Polk County.

{Permitting notes: These emissions units are regulated under Rule 62-210.300, F.A.C., Permits Required. Each generator has its own stack.}

The following specific conditions apply to the emissions units listed above regardless of location:

Essential Potential to Emit (PTE) Parameters

C.1. These conditions become active and enforceable once FPC has given notification to the Air Quality Division of the Pinellas County Department of Environmental Management, if appropriate, that these units will be relocated to this facility. Notification shall be given as per specific condition C.24. [Rule 62-4.070(3), F.A.C.; Anclote Power Plant Permit AC 09-202080; and, Initial Title V Permit Application for the Anclote Power Plant received June 14, 1996.]

C.2. Permitted Capacity. The maximum operation heat input rates are as follows:
[Rules 62-4.160(2) and 62-210.200(PTE), F.A.C.]

Unit No.	MMBtu/hr/generator(s) Heat Input	Fuel Type
-7775047 -001	25.74	New Low Sulfur No. 2 Fuel Oil