



Department of Environmental Protection

Lawton Chiles
Governor

Twin Towers Office Building
2600 Blair Stone Road
Tallahassee, Florida 32399-2400
November 7, 1997

Virginia B. Wetherell
Secretary

Mr. Thomas W. Richards
Director of Operations
Fort Pierce Utilities Authority
P.O. Box 3191
Fort Pierce, Florida 34948

Re: PROPOSED Title V Permit No.: 1110003-003-AV
H. D. King Power Plant

Dear Mr. Richards:

One copy of the "PROPOSED PERMIT DETERMINATION" for the H. D. King Power Plant located at 311 North Indian River Drive, Fort Pierce, St. Lucie County, is enclosed. This letter is only a courtesy to inform you that the PROPOSED permit has become a PROPOSED permit.

An electronic version of this determination has been posted on the Division of Air Resources Management's world wide web site for the United States Environmental Protection Agency (USEPA) Region 4 office's review. The web site address is <http://www.dep.state.fl.us/air>.

Pursuant to Section 403.0872(6), Florida Statutes, if no objection to the PROPOSED permit is made by the USEPA within 45 days, the PROPOSED permit will become a FINAL permit no later than 55 days after the date on which the PROPOSED permit was mailed (posted) to USEPA. If USEPA has an objection to the PROPOSED permit, the FINAL permit will not be issued until the permitting authority receives written notice that the objection is resolved or withdrawn.

If you should have any questions, please contact Edward J. Svec at 850/488-1344.

Sincerely,

C. H. Fancy, P.E.
Chief
Bureau of Air Regulation

CHF/s

Enclosures

copy furnished to:

Ivan L. Clark, P.E., R. W. Beck
Isidore Goldman, P.E., FDEP SED
Ms. Yolanda Adams, USEPA, Region 4 (INTERNET E-mail Memorandum)
Ms. Carla E. Pierce, USEPA, Region 4 (INTERNET E-mail Memorandum)

P 265 301 573

US Postal Service

Receipt for Certified Mail

No Insurance Coverage Provided.

Do not use for International Mail (See reverse)

Sent to Mr. Ivan L. Clark	
Street & Number 112 S 17th St, Suite 190	
Post Office, State, & ZIP Code Denver, CO 80202-2615	
Postage	\$
Certified Fee	
Special Delivery Fee	
Restricted Delivery Fee	
Return Receipt Showing to Whom & Date Delivered	
Return Receipt Showing to Whom, Date, & Addressee's Address	
TOTAL Postage & Fees	\$
Postmark or Date 11/13/97 Fort Pierce Utilities - H-D-King ID# 1110003	

PS Form 3800, April 1995

P 265 301 574

US Postal Service

Receipt for Certified Mail

No Insurance Coverage Provided.

Do not use for International Mail (See reverse)

Sent to Mr. Isidore Goldman	
Street & Number 400 North Congress Ave	
Post Office, State, & ZIP Code West Palm Beach, FL 33401	
Postage	\$
Certified Fee	
Special Delivery Fee	
Restricted Delivery Fee	
Return Receipt Showing to Whom & Date Delivered	
Return Receipt Showing to Whom, Date, & Addressee's Address	
TOTAL Postage & Fees	\$
Postmark or Date 11/13/97 Fort Pierce Utilities - H-D-King ID# 1110003	

PS Form 3800, April 1995

P 265 301 572

US Postal Service

Receipt for Certified Mail

No Insurance Coverage Provided.

Do not use for International Mail (See reverse)

Sent to Mr. Thomas Richards	
Street & Number P.O. Box 3191	
Post Office, State, & ZIP Code Fort Pierce, FL 34948	
Postage	\$
Certified Fee	
Special Delivery Fee	
Restricted Delivery Fee	
Return Receipt Showing to Whom & Date Delivered	
Return Receipt Showing to Whom, Date, & Addressee's Address	
TOTAL Postage & Fees	\$
Postmark or Date 11/13/97 Fort Pierce - H-D-King ID# 1110003	

PS Form 3800, April 1995

Is your RETURN ADDRESS completed on the reverse

Complete items 1 and/or 2 for additional services.

Complete items 3, 4a, and 4b.

Print your name and address on the reverse of this form so that we can return this card to you.

Attach this form to the front of the mailpiece, or on the back if space does not permit.

Write "Return Receipt Requested" on the mailpiece below the article number.

The Return Receipt will show to whom the article was delivered and the date delivered.

I also wish to receive the following services (for an extra fee):

1. ☐ Addressee's Address2. ☐ Restricted Delivery

Consult postmaster for fee.

3. Article Addressed to:

Mr. Thomas W. Richards

Director of Operations

Fort Pierce Utilities Authority

P.O. Box 3191

Fort Pierce, Florida 34948

4a. Article Number

P 265 301 572

4b. Service Type

☐ Registered☐ Express Mail☐ Return Receipt for Merchandise☒ Certified☐ Insured☐ COD

7. Date of Delivery

9 NOV 17 1997

5. Received By: (Print Name)

8. Addressee's Address (Only if requested and fee is paid)

6. Signature: (Addressee or Agent)

X *Shawn Dawson*

PS Form 3811, December 1994

Domestic Return Receipt

Thank you for using Return Receipt Service.

Is your RETURN ADDRESS completed on the reverse

Complete items 1 and/or 2 for additional services.

Complete items 3, 4a, and 4b.

Print your name and address on the reverse of this form so that we can return this card to you.

Attach this form to the front of the mailpiece, or on the back if space does not permit.

Write "Return Receipt Requested" on the mailpiece below the article number.

The Return Receipt will show to whom the article was delivered and the date delivered.

I also wish to receive the following services (for an extra fee):

1. ☐ Addressee's Address2. ☐ Restricted Delivery

Consult postmaster for fee.

3. Article Addressed to:

Mr. Isidore Goldman, P.E.

Florida Department of Environ-

mental Protection

400 North Congress Avenue

West Palm Beach, Florida 33401

4a. Article Number

P 265 301 574

4b. Service Type

☐ Registered☐ Express Mail☐ Return Receipt for Merchandise☒ Certified☐ Insured☐ COD

7. Date of Delivery

11/17/97

5. Received By: (Print Name)

8. Addressee's Address (Only if requested and fee is paid)

6. Signature: (Addressee or Agent)


X *Shawn Dawson*

PS Form 3811, December 1994

Domestic Return Receipt

Thank you for using Return Receipt Service.

Florida's PROPOSED Permit Electronic Notification Cover Memorandum

TO: Yolanda Adams, U.S. EPA Region 4
CC: Carla E. Pierce, U.S. EPA Region 4
THRU: Scott Sheplak, P.E., Bureau of Air Regulation
FROM: Edward J. Svec, Permit Engineer 
DATE: 11/07/97
RE: U.S. EPA Region 4 PROPOSED Title V Operation Permit Review

The following PROPOSED Title V operation permit(s) and associated documents have been posted on the DEP World Wide Web Internet site for your review. Please provide any comments via Internet E-mail, within forty five (45) days of receiving this notice, to Scott Sheplak, at "SHEPLAK_S@dep.state.fl.us".

<u>Applicant Name</u>	<u>County</u>	<u>Method of Transmittal</u>	<u>Electronic File Name(s)</u>
Fort Pierce Utilities Authority H. D. King Power Plant	Putnam	INTERNET	1110003p.zip

This zipped file contains the following electronic files:

1110003p.doc
11100031.xls
11100032.xls
1110003e.doc
1110003u.doc
1110003h.doc
sob.doc

PROPOSED PERMIT DETERMINATION

PROPOSED Permit No.: 1110003-003-AV

Page 1 of 8

I. Public Notice.

An "INTENT TO ISSUE TITLE V AIR OPERATION PERMIT" to Fort Pierce Utilities Authority for the H. D. King Power Plant located at 311 North Indian River Drive, Fort Pierce, St. Lucie County was clerked on May 23, 1997. The "PUBLIC NOTICE OF INTENT TO ISSUE TITLE V AIR OPERATION PERMIT" was published in The Fort Pierce News Tribune on June 20, 1997. The PROPOSED Title V Air Operation Permit was available for public inspection at the Florida Department of Environmental Protection Southeast District office in West Palm Beach and the permitting authority's office in Tallahassee. Proof of publication of the "PUBLIC NOTICE OF INTENT TO ISSUE TITLE V AIR OPERATION PERMIT" was received on June 25, 1997.

II. Public Comment(s).

Comments were received and the DRAFT Title V Operation Permit was changed. The comments were not considered significant enough to reissue the DRAFT Title V Permit and require another Public Notice. Comments were received from one respondent(s) during the 30 (thirty) day public comment period. Listed below is each comment letter in the chronological order of receipt and a response to each comment in the order that the comment was received. The comment(s) will not be restated. Where duplicative comments exist, the original response is referenced.

A. Letter from Mr. Thomas W. Richards dated July 17, 1997, and received on July 18, 1997.

1.R: The "practical enforceability" you refer to for tons per year limits refers to "hollow" conditions where the tons per year limit stands alone. In this permit, all tons per year limits are also tied to a short term limits, such as pounds per hour or pounds per million Btu heat input, and as such are not "hollow" limits. The tons per year limits are federally enforceable and will remain so noted.

2.R: The emissions units permitted capacities are also defined by Rule 62-210.200(PTE), F.A.C., which is in the SIP and are therefore federally enforceable. No changes will be made.

3.R: Facility-wide condition 7 states that the permittee shall employ practices to minimize emissions of volatile organic compounds or organic solvents. It does not prohibit their use. Since the applicant was silent on these emissions in the initial Title V application, it is assumed that the amount of these emissions are trivial. No changes will be made to facility-wide condition 7.

4.R: The gas turbine is subject to 40 CFR 60, Subpart GG which sets the allowable emission rate for nitrogen oxides as a function of heat input rate. Without an hourly maximum heat input rate specified in the permit, the emission limit would be "hollow". Also, the heat input rate presented in the original application to construct the turbine was relied upon during the technical evaluation of the project prior to its construction. The condition will remain as noticed.

5.R: The Department agrees with the comment and as a result, specific condition **A.2.** is changed as follows:

From: **A.2. Emissions Unit Operating Rate Limitation After Testing.** See specific condition **A.24.**

[Rule 62-297.310(2), F.A.C.]

To: **A.2. Emissions Unit Operating Rate Limitation After Testing.** See specific condition **A.25.**

[Rule 62-297.310(2), F.A.C.]

6.R: The equation is quoted from 40 CFR 60.332(a)(1) and the limit is contained in permit AC 56-141460. Both apply to the emissions unit and no changes will be made.

7.R: Specific condition **A.16.** is a quote of 40 CFR 60.335(a) and requires that the analytical methods used to determine the nitrogen content of the fuels be accurate to within five percent and be approved by the Administrator. Specific condition **A.5.** references a formula which contains “plug-in values” for fuel nitrogen contents and specific condition **A.17.** contains the formula to convert measured NO_x emissions to ISO conditions. The Department does not see any redundancy and the condition will remain as noticed.

8.R: 40 CFR 60.335(f)(1) requires that the factors be approved by the Administrator prior to the initial performance test and that the approval of the custom ambient condition correction factors be published in the Federal Register. The Department will include this rule cite if these conditions have been satisfied.

9.R: The Department acknowledges the comment and will correct the formula contained in specific condition **A.17.** as follows:

From: $\text{NO}_X = [\text{NO}_X \text{ obs}] [(P_{\text{ref}})^{0.5} / P_{\text{obs}}] e^{19 [H_{\text{obs}} - 0.00633]} [288^\circ \text{K} / T_{\text{amb}}]^{1.53}$

To: $\text{NO}_X = [\text{NO}_X \text{ obs}] [(P_{\text{ref}}) / P_{\text{obs}}]^{0.5} e^{19(H_{\text{obs}} - 0.00633)} [288^\circ \text{K} / T_{\text{amb}}]^{1.53}$

10.R: Specific condition **A.18.** refers to the continuous monitoring system required under 40 CFR 60.334(a) (see specific condition **A.13.**). The monitoring device’s accuracy is checked against the results of the annual stack test and if the steam to fuel ratios need to be reestablished, they will be done at the four loads. The condition will remain as noticed.

11.R: The Department disagrees with this comment. The condition is quoted from the rule and the rule states that the span value is 300 ppm. The condition will remain as noticed.

12.R: The Department acknowledges the comment. The testing requirement was established by conditions in a federally enforceable air construction permit and as such is an applicable requirement of the Title V permit. The incorrect test was specified and as a result of the comment specific condition **A.24.** is changed as follows:

From: **A.24. Carbon Monoxide.** The test method for carbon monoxide shall be EPA Method 20, incorporated by reference in Chapter 62-297, F.A.C.
[AC 56-141460]

To: **A.24. Carbon Monoxide.** The test method for carbon monoxide shall be EPA Method 10, incorporated by reference in Chapter 62-297, F.A.C.
[AC 56-141460]

13.R: There are provisions in the rules which can grant the use of a test method other than those specified in the permit. One is the alternate sampling procedure which is stated in Rule 62-297.620, F.A.C. The other is the request by the permittee for the use of a newly promulgated test method which has been adopted by the Department. The Department feels that these rights do not have to be stated in the permit and the requested language will not be added.

14.R: This is a quote of the rule and will not be changed. This condition does not limit lead or NESHAP pollutants.

15.R: The Department agrees with the comment and as a result the paragraph numbered 8. in specific condition **A.30.** will be changes as follows:

From: **A.30.**

8. Any combustion turbine that does not operate for more than 400 hours per year shall term of its air operation permit.

...

To: **A.30. ...**

8. Any combustion turbine that does not operate for more than 400 hours per year shall conduct a visible emissions compliance test once per each five-year period, coinciding with the term of its air operation permit.

...

16.R: The Department assumes that the comment is referring to paragraph (b) of specific condition **A.30.** The Department disagrees with the comment. The paragraph is correctly quoted from the rule and will not be changed.

17.R: Specific condition **A.36.** is a quote of the rule and will not be changed. Paragraph 7 simply states that the sketch of the stack or duct show eight diameters upstream and two diameters downstream of the sampling ports.

18.R: See specific condition **B.32**. The condition will remain as noticed.

19.R: The Department agrees with the comment and as a result the paragraph numbered (a)2. in specific conditions **B.30.**, **C.30.** and **D.33.** will be changes as follows:

From: ...

(a) General Compliance Testing.

2. For excess emission limitations for particulate matter specified in Rule 62-210.700, F.A.C., a compliance test shall be conducted annually while the emissions unit is operating under soot blowing conditions in each federal fiscal year during which soot blowing is part of normal emissions unit operation, except that such test shall not be required in any federal fiscal year in which a fossil fuel steam generator does not burn liquid for more than 400 hours other than during startup.

...

To: ...

(a) General Compliance Testing.

2. For excess emission limitations for particulate matter specified in Rule 62-210.700, F.A.C., a compliance test shall be conducted annually while the emissions unit is operating under soot blowing conditions in each federal fiscal year during which soot blowing is part of normal emissions unit operation, except that such test shall not be required in any federal fiscal year in which a fossil fuel steam generator does not burn liquid fuel for more than 400 hours other than during startup.

...

20.R: The Department agrees with the comment and as a result the description of the emissions unit in **Subsection D.** is changed:

From: H. D. King Unit #8 is a nominal 56.1 megawatt (electric)fossil fuel fired steam generator. The emission unit is fired on natural gas with a maximum heat input of 611.0 MMBtu per hour. No. 6 residual fuel oil is fired as a secondary/emergency fuel. Emissions are discharged through a multicyclone collector.

To: H. D. King Unit #8 is a nominal 56.1 megawatt (electric)fossil fuel fired steam generator. The emission unit is fired on natural gas with a maximum heat input of 611.0 MMBtu per hour. No. 6 residual fuel oil is fired as a secondary/emergency fuel. Emissions are uncontrolled.

21.R: The Department does not agree that an hour limitation on Emissions Unit I.D. No. -008 is redundant. The emissions unit has pollutant limits expressed in pounds per hour and the absence of an allowable hours of operation would render these limits "hollow". However, the Department recognizes that if the unit were operated below a certain heat input, the emissions unit could operate continuously. As a result of this comment, specific condition **D.4.** is changed as follows:

From: **D.4. Hours of Operation.** This emissions unit hours of operation shall not exceed 7,422 hours/year. See specific condition **E.1**.

[Rule 62-210.200(PTE), F.A.C.; and, OGC Case No. 91-1610: Final Order filed 7/21/92]

To: **D.4. Hours of Operation.** This emissions unit may operate continuously, i.e., 8,760 hours/year and shall meet the requirements of specific condition **E.1**. See specific condition **E.1**.

[Rule 62-210.200(PTE), F.A.C.; and, OGC Case No. 91-1610: Final Order filed 7/21/92]

22.R: The Department acknowledges the comment. Particulate matter testing exemptions are already contained in specific conditions **D.33**. and **D.35**.

23.R: Specific condition **D.36**. addresses the monitoring requirements of 40 CFR 60.45. The EPA allows the use of 40 CFR 75 monitors to satisfy the requirements of 40 CFR 60, but this does not eliminate the 40 CFR 60 requirements. The Department will include carbon dioxide as an option and specific condition **D.36**. will be changed as follows:

From: **D.36.** The owner or operator shall install, calibrate, maintain, and operate continuous monitoring systems for measuring nitrogen oxide emissions, and oxygen.

[40 CFR 60.45(a) & (b)]

To: **D.36.** The owner or operator shall install, calibrate, maintain, and operate continuous monitoring systems for measuring nitrogen oxide emissions, and oxygen or carbon dioxide.

[40 CFR 60.45(a) & (b)]

24.R: The Department agrees with the comment and will change the first equation in specific condition **D.39**. as follows:

From:

$$F = 10^{-6} \frac{[227.2 (\text{pct. II}) + 95.5 (\text{pct. C}) + 35.6 (\text{pct. S}) + 8.7 (\text{pct. N}) - 28.7 (\text{pct. O})]}{\text{GCV}}$$

To:

$$F = 10^{-6} \frac{[227.2 (\text{pct. H}) + 95.5 (\text{pct. C}) + 35.6 (\text{pct. S}) + 8.7 (\text{pct. N}) - 28.7 (\text{pct. O})]}{\text{GCV}}$$

25.R: The Department has reviewed your comment and has concluded that the second formula for F_c in SI units, which appears in 40 CFR 60.45, must assume that the value for GCV is expressed in million joules. Since the value must be expressed in joules, the Department feels that the equation is redundant and as a result of the comment the following equation in specific condition **D.39.** will be deleted:

Delete:
$$F_c = \frac{20.0(\%C)}{\text{GCV}} \quad (\text{SI units})$$

26.R: The Department agrees with the comment and will change specific condition **E.1.** as follows:

From: E.1. The total combined heat input for Emissions Units -004, -007 and -008 (Units #6, #7, and #8) shall not exceed 4,534,903 million Btu per year.

[AC 56-141460, amended 11/9/90; and, OGC Case No. 91-1610: Final Order filed 7/21/92]

To: E.1. The total combined heat input for Emissions Units -004, -007 and -008 (Units #6, #7, and #8) shall not exceed 4,534,930 million Btu per year.

[AC 56-141460, amended 11/9/90; and, OGC Case No. 91-1610: Final Order filed 7/21/92]

27.R: The comment is correct in that general purpose internal combustion engines which do not exceed the cited fuel usage are included in the full exemptions listed in Rule 62-210.300(3)(a), F.A.C. The rule also states that in order to be exempt from Chapter 62-213, F.A.C., the emissions units must also meet the exemption requirements of Rule 62-213.430(6)(b), F.A.C. The combustion of fuel in the amount cited results in emissions above the potential to emit limits which preclude exemption from Title V. The emissions units will remain classified as unregulated.

28.R: The Department agrees with the comment and as a result the allowable emission standard for VOC in Table 1-1 for Emissions Unit I.D. No.-007 is changed from 0.226 to 0.266 pound per hour.

29.R: The Department agrees with the comment and as a result the allowable emission standard for particulate matter when firing oil will be changed from "0.1 lb/MMBtu 3 hrs/24 hrs" to "0.1 lb/MMBtu".

30.R: The Department disagrees with the comment. Fuel analysis is only used to demonstrate compliance with the fuel sulfur limit of the fuel oil allowed in the permit. The emissions unit is subject to the requirements of NSPS Subpart GG and it requires the use of Method 20 to demonstrate compliance with the SO₂ standards. The use of fuel analysis as a compliance method must be approved as an alternate sampling procedure in accordance with Rule 62-297.620, F.A.C.

31.R: The Department assumes that the comment is addressed toward Emissions Unit I.D. No. -003 and agrees with the comment. The compliance method for carbon monoxide, Emissions Unit I.D. No. -003, will change from "EPA Method 20" to "EPA Method 10".

32.R: The Department disagrees with the comment. The annual permitted tons per year emissions of particulate matter are less than 100 tons and by rule requires a compliance test prior to renewal. All three of these emissions units are permitted to fire fuel oil for a maximum of 400 hours per year. The exemption from particulate matter testing granted by the ASP is based on firing less than 400 hours per year of liquid fuel. Therefore the logical testing frequency for these units is upon renewal. These tables are for "convenience purposes only" and "does not supersede any of the terms or conditions" of the permit. If the emissions unit(s) fire natural gas with less than 400 hours liquid fuel, the ASP waives the particulate test requirement. The tables will remain as noticed.

B. The Department received some comments from Region 4, U.S. EPA, via the fax on August 7, 1997, regarding another PROPOSED permit (1050003-004-AV). In a teleconference call on the 8th, resolution was achieved on all of the issues, which included the following agreed to changes to all permits:

1. The citing of Rule 62-297.310(7)(a)10., F.A.C., will be deleted since no emissions units are exempt from permitting at a Title V source and the condition is only a statement referring the reader back to Rule 62-210.300(3)(a), F.A.C., which states the same.
2. In Rule 62-297.310(7)(b), F.A.C., 4th line, the word "**shall**" was changed to "**may**" because of what has been approved in the SIP. The citing will also contain the qualifier "**SIP approved**".
3. The addresses and appropriate particulars were added for the Department's District office and the U.S. EPA, Region 4 office in Section II. Facility-wide Conditions.
4. In Appendix TV-I:
 - a. Condition No. 11 has been flagged as "**Not federally enforceable.**"
 - b. Condition No. 55 was deleted due to duplicity with condition No. 17; and, the subsequent conditions have been renumbered.
 - c. Condition No. 54 has been flagged as "**Not federally enforceable.**"
 - d. Condition No. 56 (now No. 55) has been edited and the citing has a flag of "**(Chapter 62-281, F.A.C., is not federally enforceable)**".
 - e. Condition No. 57 (now No. 56) has been flagged as "**Not federally enforceable until SIP approved.**"
5. In Section II. Facility-wide conditions., condition No. 9 was created to define the effective date of the permit as day one for any reporting, monitoring, or recording requirements that are time-based.

6. Acid Rain Part: the following new conditions have been added to the part:

a. *(new)* **A.3. Emission Allowances.** Emissions from sources subject to the Federal Acid Rain Program (Title IV) shall not exceed any allowances that the source lawfully holds under the Federal Acid Rain Program. Allowances shall not be used to demonstrate compliance with a non-Title IV applicable requirement of the Act.

1. No permit revision shall be required for increases in emissions that are authorized by allowances acquired pursuant to the Federal Acid Rain Program, provided that such increases do not require a permit revision pursuant to Rule 62-213.400(3), F.A.C.

2. No limit shall be placed on the number of allowances held by the source under the Federal Acid Rain Program.

3. Allowances shall be accounted for under the Federal Acid Rain Program.

[Rule 62-213.440(1)(c), F.A.C.]

b. *(new)* **A.4. Statement of Compliance.** The annual statement of compliance pursuant to Rule 62-213.440(3), F.A.C., shall be submitted within 60 (sixty) days after the end of the calendar year. {See condition No. 51., Appendix TV-1, Title V Conditions.}

[Rule 62-214.420(11), F.A.C.]

In addition to the above, the following changes have been made for clarity:

1. In Section II. Facility-wide Conditions., the EPA compliance test method (**Method 9**) is stated as the method of compliance and the appropriate rule citing was added [Rule 62-296.320(4)(b)1. & 4., F.A.C.].

2. Due to the above changes made to Appendix TV-1, the version will carry the date of "08/11/97".

C. Document(s) on file with the permitting authority:

-Letter received July 18, 1997, from Mr. Thomas W. Richards.

III. Conclusion.

The permitting authority hereby issues the PROPOSED Permit No.: 1110003-003-AV, with any changes noted above.

STATEMENT OF BASIS

Fort Pierce Utility Authority
H. D. King Power Plant
Facility ID No.: 1110003
Putnam County

Initial Title V Air Operation Permit PROPOSED Permit No.: 1110003-003-AV

This Title V air operation permit is issued under the provisions of Chapter 403, Florida Statutes (F.S.), and Florida Administrative Code (F.A.C.) Chapters 62-4, 62-210, 62-213, and 62-214. The above named permittee is hereby authorized to perform the work or operate the facility shown on the application and approved drawing(s), plans, and other documents, attached hereto or on file with the permitting authority, in accordance with the terms and conditions of this permit.

This facility consists of one 16.5 megawatt (electric) 219 million Btu per hour fossil fuel fired steam generator; one 33 megawatt (electric) 470 million Btu per hour fossil fuel fired steam generator; one 56.1 megawatt (electric) 611 million Btu per hour fossil fuel fired steam generator; and one 23.4 megawatt (electric) combined cycle gas turbine with a 8.2 megawatt (electric) heat recovery steam generator (HRSG).

Unit #9 is a combined cycle gas turbine and a HRSG with a maximum heat input of 415 million Btu per hour. The HRSG is not supplementary-fired. The turbine is capable of producing 23.4 megawatts and the HRSG is capable of producing 8.2 megawatts of electric power. The primary fuel is natural gas with No. 2 fuel oil used as a backup fuel.

Fossil fuel fired steam generator # 6 is a nominal 16.5 megawatt (electric) steam generator designated as H. D. King Unit # 6. The emission unit is fired on natural gas with a maximum heat input of 218.9 MMBtu per hour. No. 6 residual fuel oil is fired as a secondary/emergency fuel.

Fossil fuel fired steam generator # 7 is a nominal 33.0 megawatt (electric) steam generator designated as H. D. King Unit # 7. The emission unit is fired on natural gas with a maximum heat input of 470.0 MMBtu per hour. No. 6 residual fuel oil is fired as a secondary/emergency fuel. Emissions are discharged through a multicyclone collector.

H. D. King Unit #8 is a nominal 56.1 megawatt (electric)fossil fuel fired steam generator. The emission unit is fired on natural gas with a maximum heat input of 611.0 MMBtu per hour. No. 6 residual fuel oil is fired as a secondary/emergency fuel. Emissions are uncontrolled.

Also included in this permit are miscellaneous unregulated/exempt emissions units and/or activities.

Based on the initial Title V permit application received June 14, 1996, this facility is not a major source of hazardous air pollutants (HAPs).

Fort Pierce Utilities Authority
H. D. King Power Plant
Facility ID No.: 1110003
St. Lucie County

Initial Title V Air Operation Permit
PROPOSED Permit No.: 1110003-003-AV

Permitting Authority:
State of Florida
Department of Environmental Protection
Division of Air Resources Management
Bureau of Air Regulation
Title V Section

Mail Station #5505
2600 Blair Stone Road
Tallahassee, Florida 32399-2400

Telephone: 850/488-1344
Fax: 850/922-6979

Compliance Authority:
Florida Department of Environmental Regulation
Southeast District
400 North Congress Avenue
P.O. Box 15425
West Palm Beach, Florida 33416-5425
Telephone: 561/681-6600
Fax: 561/681-6790

Initial Title V Air Operation Permit
PROPOSED Permit No.: 1110003-003-AV

Table of Contents

<u>Section</u>	<u>Page Number</u>
Placard Page	1
I. Facility Information	2 - 3
A. Facility Description.	
B. Summary of Emissions Unit ID No(s). and Brief Description(s).	
C. Relevant Documents.	
II. Facility-wide Conditions	4 - 5
III. Emissions Units and Conditions	
A. Emissions Unit -003 Combined Cycle Gas Turbine Unit #9.....	6 - 17
B. Emissions Unit -004 16.5 MW Boiler Unit #6	18 - 27
C. Emissions Unit -007 33.0 MW Boiler Unit #7	28 - 37
D. Emissions Unit -008 56.1 MW Boiler Unit #8	38 - 53
E. Common Conditions	54
IV. Acid Rain Part	
A. Acid Rain, Phase II	55 - 56



Department of Environmental Protection

Lawton Chiles
Governor

Twin Towers Office Building
2600 Blair Stone Road
Tallahassee, Florida 32399-2400

Virginia B. Wetherell
Secretary

Permittee:

Fort Pierce Utilities Authority
P. O. Box 3191
Fort Pierce, Florida 34948

PROPOSED Permit No.: 1110003-003-AV

Facility ID No.: 1110003

SIC Nos.: 49, 4911

Project: Initial Title V Air Operation Permit

This permit is for the operation of the H. D. King Power Plant. This facility is located at 311 North Indian River Drive, Fort Pierce, St. Lucie County; UTM Coordinates: Zone 17, 566.8 km East and 3036.3 km North; Latitude: 27° 27' 00" North and Longitude: 80° 19' 26" West.

STATEMENT OF BASIS: This Title V air operation permit is issued under the provisions of Chapter 403, Florida Statutes (F.S.), and Florida Administrative Code (F.A.C.) Chapters 62-4, 62-210, 62-213, and 62-214. The above named permittee is hereby authorized to perform the work or operate the facility shown on the application and approved drawing(s), plans, and other documents, attached hereto or on file with the permitting authority, in accordance with the terms and conditions of this permit.

Referenced attachments made a part of this permit:

Appendix U-1, List of Unregulated Emissions Units and/or Activities

Appendix E-1, List of Exempt Emissions Units and/or Activities

APPENDIX TV-1, TITLE V CONDITIONS (version dated 08/11/97)

APPENDIX SS-1, STACK SAMPLING FACILITIES (version dated 10/07/96)

TABLE 297.310-1, CALIBRATION SCHEDULE (version dated 10/07/96)

FIGURE 1 - SUMMARY REPORT-GASEOUS AND OPACITY EXCESS EMISSION AND
MONITORING SYSTEM PERFORMANCE REPORT (version dated 07/96)

Phase II Acid Rain Application/Compliance Plan received 12/18/95

Alternate Sampling Procedure: ASP Number 97-B-01

OGC Case No. 91-1610: Final Order filed 7/21/92

Effective Date: January 1, 1998

Renewal Application Due Date: July 5, 2002

Expiration Date: December 31, 2002

Howard L. Rhodes, Director
Division of Air Resources
Management

HLR/sms/es

Section I. Facility Information.

Subsection A. Facility Description.

This facility consists of one 16.5 megawatt (electric) 219 million Btu per hour fossil fuel fired steam generator; one 33 megawatt (electric) 470 million Btu per hour fossil fuel fired steam generator; one 56.1 megawatt (electric) 611 million Btu per hour fossil fuel fired steam generator; and one 23.4 megawatt (electric) combined cycle gas turbine with a 8.2 megawatt (electric) heat recovery steam generator (HRSG).

Also included in this permit are miscellaneous unregulated/exempt emissions units and/or activities.

Based on the initial Title V permit application received June 14, 1996, this facility is not a major source of hazardous air pollutants (HAPs).

Subsection B. Summary of Emissions Unit ID No(s). and Brief Description(s).

E.U.

ID No. Brief Description

-003	23.4 MW Combined Cycle Gas Turbine with 8.2 MW HRSG - Unit #9
-004	16.5 MW Boiler - Unit #6
-007	33.0 MW Boiler - Unit #7
-008	56.1 MW Boiler - Unit #8

Unregulated Emissions Units and/or Activities

-001	2.75 MW West Diesel #1
-002	2.75 MW East Diesel #2
-xxx	Cooling Tower
-xxx	General Purpose Internal Combustion Engines

Please reference the Permit No., Facility ID No., and appropriate Emissions Unit(s) ID No(s), on all correspondence, test report submittals, applications, etc.

Subsection C. Relevant Documents.

The documents listed below are not a part of this permit; however, they are specifically related to this permitting action.

These documents are provided to the permittee for information purposes only:

Table 1-1, Summary of Air Pollutant Standards and Terms

Table 2-1, Summary of Compliance Requirements

Appendix A-1, Abbreviations, Acronyms, Citations, and Identification Numbers

Appendix H-1, Permit History/ID Number Changes

These documents are on file with the permitting authority:

Initial Title V Permit Application received June 14, 1996

Additional Information Request dated January 27, 1997

Additional Information Response received February 24, 1997

Letter received July 18, 1997, from Mr. Thomas W. Richards.

Letter received November 6, 1997, from Mr. Thomas W. Richards.

Section II. Facility-wide Conditions.

The following conditions apply facility-wide:

1. APPENDIX TV-1, TITLE V CONDITIONS, is a part of this permit.

{Permitting note: APPENDIX TV-1, TITLE V CONDITIONS, is distributed to the permittee only. Other persons requesting copies of these conditions shall be provided a copy when requested or otherwise appropriate.}

2. **Not federally enforceable.** General Pollutant Emission Limiting Standards. Objectionable Odor Prohibited. The permittee shall not cause, suffer, allow, or permit the discharge of air pollutants which cause or contribute to an objectionable odor.

[Rule 62-296.320(2), F.A.C.]

3. General Particulate Emission Limiting Standards. General Visible Emissions Standard.

Except for emissions units that are subject to a particulate matter or opacity limit set forth or established by rule and reflected by conditions in this permit, no person shall cause, let, permit, suffer or allow to be discharged into the atmosphere the emissions of air pollutants from any activity, the density of which is equal to or greater than that designated as Number 1 on the Ringelmann Chart (20 percent opacity). EPA Method 9 is the method of compliance pursuant to Chapter 62-297, F.A.C.

[Rules 62-296.320(4)(b)1. & 4., F.A.C.]

4. Prevention of Accidental Releases (Section 112(r) of CAA). If required by 40 CFR 68, the permittee shall submit to the implementing agency:

- a. a risk management plan (RMP) when, and if, such requirement becomes applicable; and
- b. certification forms and/or RMPs according to the promulgated rule schedule.

[40 CFR 68]

5. Unregulated Emissions Units and/or Activities. Appendix U-1, List of Unregulated Emissions Units and/or Activities, is a part of this permit.

[Rule 62-213.440(1), F.A.C.]

6. Exempt Emissions Units and/or Activities. Appendix E-1, List of Exempt Emissions Units and/or Activities, is a part of this permit.

[Rules 62-213.440(1), 62-213.430(6), and 62-4.040(1)(b), F.A.C.]

7. **Not federally enforceable.** General Pollutant Emission Limiting Standards. Volatile Organic Compounds (VOC) Emissions or Organic Solvents (OS) Emissions. The permittee shall allow no person to store, pump, handle, process, load, unload or use in any process or installation, volatile organic compounds (VOC) or organic solvents (OS) without applying known and existing vapor emission control devices or systems deemed necessary and ordered by the Department.

[Rule 62-296.320(1)(a), F.A.C.]

8. Not federally enforceable. Reasonable precautions to prevent emissions of unconfined particulate matter at this facility include: paved fuel delivery roads and parking lots.

[Rule 62-296.320(4)(c)2., F.A.C.; Proposed by applicant in the initial Title V permit application received June 14, 1996]

9. When appropriate, any recording, monitoring, or reporting requirements that are time-specific shall be in accordance with the effective date of the permit, which defines day one.

[Rule 62-213.440, F.A.C.]

10. The permittee shall submit all compliance related notifications and reports required of this permit to the Department's Southeast District office:

Florida Department of Environmental Regulation
Southeast District
400 North Congress Avenue
P.O. Box 15425
West Palm Beach, Florida 33416-5425
Telephone: 561/681-6600
Fax: 561/681-6790

11. Any reports, data, notifications, certifications, and requests required to be sent to the United States Environmental Protection Agency, Region 4, should be sent to:

United States Environmental Protection Agency
Region 4
Air, Pesticides & Toxics Management Division
Operating Permits Section
61 Forsyth Street
Atlanta, Georgia 30303
Telephone: 404/562-9099
Fax: 404/562-9095

Section III. Emissions Unit(s) and Conditions.

Subsection A. This section addresses the following emissions unit.

E.U.

<u>ID No.</u>	<u>Brief Description</u>
----------------------	---------------------------------

-003	23.4 MW Combined Cycle Gas Turbine with 8.2 MW HRSG - Unit #9
------	---

Unit #9 is a combined cycle gas turbine and a HRSG with a maximum heat input of 415 million Btu per hour. The HRSG is not supplementary-fired. The turbine is capable of producing 23.4 megawatts and the HRSG is capable of producing 8.2 megawatts of electric power. The primary fuel is natural gas with No. 2 fuel oil used as a backup fuel.

{Permitting notes: (IMPORTANT REGULATORY CLASSIFICATIONS - The emissions unit is regulated under NSPS - 40 CFR 60, Subpart GG, Standards of Performance for Stationary Gas Turbines, adopted and incorporated by reference in Rule 62-204.800(7), F.A.C. Combined cycle gas turbine #9 began commercial operation in May, 1990.)}

The following specific conditions apply to the emissions unit(s) listed above:

Essential Potential to Emit (PTE) Parameters

A.1. Permitted Capacity. The maximum process/operation rate is 415 MMBtu per hour (lower heating value) heat input.

[Rules 62-4.160(2) and 62-210.200(PTE), F.A.C.]

A.2. Emissions Unit Operating Rate Limitation After Testing. See specific condition **A.25.**

[Rule 62-297.310(2), F.A.C.]

A.3. Methods of Operation. Fuels.

a. This emissions unit fires natural gas as the primary fuel.

b. This emissions unit fires No. 2 distillate oil as the emergency back-up fuel.

[Rules 62-210.200(PTE), 62-212.400, and 62-212.410, F.A.C.; and, AC 56-141460]

A.4. Hours of Operation. This emissions unit may operate continuously, i.e., 8,760 hours/year.

[Rule 62-210.200(PTE), F.A.C.]

Emission Limitations and Standards

{Permitting note: Table 1-1, Summary of Air Pollutant Standards and Terms, summarizes information for convenience purposes only. This table does not supersede any of the terms or conditions of this permit.}

A.5. Nitrogen Oxides. The NO_x emissions shall not exceed: $\text{STD} = 0.0075 (14.4)/Y + F$ where:

STD = allowable NO_x emissions (percent by volume at 15 percent oxygen on a dry basis).

Y = manufacturer's rated heat rate at manufacturer's rated load (kilojoules per watt hour) or, actual measured heat rate based on lower heating value of fuel as measured at actual peak load for the facility. The value of Y shall not exceed 14.4 kilojoules per watt hour.

F = NO_x emission allowance for fuel-bound nitrogen as defined in paragraph 40 CFR 60.332(a)(3).

or 84 ppmv at 15 percent oxygen on a dry basis.
[40 CFR 60.332(a)(1); and, AC 56-141460]

A.6. Sulfur Dioxide. Sulfur dioxide gases discharged to the atmosphere shall not exceed 0.015 percent by volume at 15 percent oxygen on a dry basis.
[40 CFR 60.333(a); and, AC 56-141460]

A.7. Sulfur Dioxide - Sulfur Content. The maximum sulfur content of the No. 2 distillate oil shall not exceed 0.5 percent by weight.
[AC 56-141460]

A.8. Visible Emissions. Visible emissions shall not exceed 15 percent opacity.
[AC 56-141460]

A.9. Carbon Monoxide. Carbon Monoxide emissions shall not exceed 32.85 pounds per hour and 110.4 tons per year.
[AC 56-141460]

Excess Emissions

A.10. Excess emissions from this emissions unit resulting from startup, shutdown or malfunction shall be permitted provided that best operational practices to minimize emissions are adhered to and the duration of excess emissions shall be minimized but in no case exceed two hours in any 24 hour period unless specifically authorized by the Department for longer duration.
[Rule 62-210.700(1), F.A.C.]

A.11. Excess emissions which are caused entirely or in part by poor maintenance, poor operation, or any other equipment or process failure which may reasonably be prevented during startup, shutdown or malfunction shall be prohibited.
[Rule 62-210.700(4), F.A.C.]

Monitoring of Operations

A.12. At all times, including periods of startup, shutdown and malfunction, owners and operators shall, to the extent practicable, maintain and operate any affected facility including associated pollution control equipment in a manner consistent with good air pollution control practice for minimizing emissions. Determination of whether acceptable operating and maintenance procedures are being used will be based on information available to the Administrator which may include, but is not limited to, monitoring results, opacity observations, review of operating and maintenance procedures, and inspection of the source.
[40 CFR 60.11(d)]

A.13. The owner or operator of any stationary gas turbine subject to the provisions of 40 CFR 60, Subpart GG and using steam injection to control NO_x emissions shall operate a continuous monitoring system to monitor and record the fuel consumption and the ratio of steam to fuel being fired in the turbine. This system shall be accurate to within ± 5.0 percent and shall be approved by the Administrator.
[40 CFR 60.334(a); and, AC 56-141460]

A.14. The owner or operator of any stationary gas turbine subject to the provisions of 40 CFR 60, Subpart GG shall monitor sulfur content and nitrogen content of the fuel being fired in the turbine. The frequency of determination of these values shall be as follows:

- (1) If the turbine is supplied its fuel from a bulk storage tank, the values shall be determined on each occasion that fuel is transferred to the storage tank from any other source.
- (2) If the turbine is supplied its fuel without intermediate bulk storage the values shall be determined and recorded daily. Owners, operators or fuel vendors may develop custom schedules for determination of the values based on the design and operation of the affected facility and the characteristics of the fuel supply. These custom schedules shall be substantiated with data and must be approved by the Administrator before they can be used to comply with 40 CFR 60.334(b).
[40 CFR 60.334(b)(1) & (2)]

A.15. Determination of Process Variables.

(a) Required Equipment. The owner or operator of an emissions unit for which compliance tests are required shall install, operate, and maintain equipment or instruments necessary to determine process variables, such as process weight input or heat input, when such data are needed in conjunction with emissions data to determine the compliance of the emissions unit with applicable emission limiting standards.

(b) Accuracy of Equipment. Equipment or instruments used to directly or indirectly determine process variables, including devices such as belt scales, weight hoppers, flow meters, and tank scales, shall be calibrated and adjusted to indicate the true value of the parameter being measured with sufficient accuracy to allow the applicable process variable to be determined within 10% of its true value.

[Rule 62-297.310(5), F.A.C.]

Test Methods and Procedures

{Permitting note: Table 2-1, Summary of Compliance Requirements, summarizes information for convenience purposes only. This table does not supersede any of the terms or conditions of this permit.}

A.16. To compute the nitrogen oxides emissions, the owner or operator shall use analytical methods and procedures that are accurate to within 5 percent and are approved by the Department to determine the nitrogen content of the fuel being fired.

[40 CFR 60.335(a)]

A.17. During performance tests to determine compliance, measured NO_x emissions at 15 percent oxygen will be adjusted to ISO ambient atmospheric conditions by the following correction factor:

$$\text{NO}_x = [\text{NO}_x \text{ obs}] [(P_{\text{ref}}) / P_{\text{obs}}]^{0.5} e^{19(H_{\text{obs}} - 0.00633)} [288^\circ \text{K} / T_{\text{amb}}]^{1.53}$$

where:

NO_x = Emissions of NO_x at 15 percent oxygen and ISO standard ambient conditions.

NO_x obs = Measured NO_x emission at 15 percent oxygen, ppmv.

P_{ref} = Reference combustor inlet absolute pressure at 101.3 kilopascals ambient pressure.

P_{obs} = Measured combustor inlet absolute pressure at test ambient pressure.

e = Transcendental constant (2.718)

H_{obs} = Specific humidity of ambient air at test.

T_{amb} = Temperature of ambient air at test.
[40 CFR 60.335(c)(1); and , AC 56-141460]

A.18. When determining compliance with 40 CFR 60.332, Subpart GG - Standards of Performance for Stationary Gas Turbines, the monitoring device of 60.334(a) shall be used to determine the fuel consumption and the steam-to-fuel ratio necessary to comply with the permitted NO_x standard at 30, 50, 75, and 100 percent of peak load or at four points in the normal operating range of the gas turbine, including the minimum point in the range and peak load. All loads shall be corrected to ISO conditions using the appropriate equations supplied by the manufacturer.
[40 CFR 60.335(c)(2)]

A.19. The owner or operator shall determine compliance with the nitrogen oxides and sulfur dioxide standards in 40 CFR 60.332 as follows:

c. U.S. EPA Method 20 (40 CFR 60, Appendix A) shall be used to determine the nitrogen oxides, sulfur dioxide, and oxygen concentrations. The span values shall be 300 ppm of nitrogen oxide and 21 percent oxygen. The NO_x emissions shall be determined at each of the load conditions specified in 40 CFR 60.335(c)(2).
[40 CFR 60.335(c)(3)]

A.20. The owner or operator may determine compliance with the sulfur dioxide standard by calculations based on the fuel analysis for sulfur content. Certified analyses by the appropriate test method from the fuel supplier is acceptable. See specific condition **A.21**.
[AC 56-141460A]

A.21. The fuel sulfur content of 0.5 percent, by weight, shall be evaluated using ASTM D1552, ASTM D1072, ASTM D3031, ASTM D4084, or ASTM D3246. See specific condition **A.7**.
[AC 56-141460A]

A.22. To meet the requirements of 40 CFR 60.334(b), the owner or operator shall use the methods specified in 40 CFR 60.335 (a) and 40 CFR 60.335(d) of 40 CFR 60.335 to determine the nitrogen and sulfur contents of the fuel being burned. The analysis may be performed by the owner or operator, a service contractor retained by the owner or operator, the fuel vendor, or any other qualified agency. See specific condition **A.14**.
[40 CFR 60.335(e)]

A.23. Visible Emissions. The test method for visible emissions shall be EPA Method 9, incorporated by reference in Chapter 62-297, F.A.C.
[AC 56-141460]

A.24. Carbon Monoxide. The test method for carbon monoxide shall be EPA Method 10, incorporated by reference in Chapter 62-297, F.A.C.
[AC 56-141460]

A.25. Operating Rate During Testing. Testing of emissions shall be conducted with the emissions unit operating at permitted capacity. If it is impracticable to test at permitted capacity, an emissions unit may be tested at less than the minimum permitted capacity (i.e., at less than 90 percent of the maximum operation rate allowed by the permit); in this case, subsequent emissions unit operation is limited to 110 percent of the test load until a new test is conducted, provided however, operations do not exceed 100 percent of the maximum operation rate allowed by the permit. Once the emissions unit is so limited, operation at higher capacities is allowed for no more than 15 consecutive days for the purpose of additional compliance testing to regain the authority to operate at the permitted capacity.
[Rule 62-297.310(2), F.A.C. and 1110003-002-AO]

A.26. Required Number of Test Runs. For mass emission limitations, a compliance test shall consist of three complete and separate determinations of the total air pollutant emission rate through the test section of the stack or duct and three complete and separate determinations of any applicable process variables corresponding to the three distinct time periods during which the stack emission rate was measured provided, however, that three complete and separate determinations shall not be required if the process variables are not subject to variation during a compliance test, or if three determinations are not necessary in order to calculate the unit's emission rate. The three required test runs shall be completed within one consecutive five day period. In the event that a sample is lost or one of the three runs must be discontinued because of circumstances beyond the control of the owner or operator, and a valid third run cannot be obtained within the five day period allowed for the test, the Secretary or his or her designee may accept the results of the two complete runs as proof of compliance, provided that the arithmetic mean of the results of the two complete runs is at least 20 percent below the allowable emission limiting standards.
[Rule 62-297.310(1), F.A.C.]

A.27. Calculation of Emission Rate. The indicated emission rate or concentration shall be the arithmetic average of the emission rate or concentration determined by each of the three separate test runs unless otherwise specified in a particular test method or applicable rule.
[Rule 62-297.310(3), F.A.C.]

A.28. Applicable Test Procedures.

(a) Required Sampling Time.

1. Unless otherwise specified in the applicable rule, the required sampling time for each test run shall be no less than one hour and no greater than four hours, and the sampling time at each sampling point shall be of equal intervals of at least two minutes.
2. Opacity Compliance Tests. When either EPA Method 9 or DEP Method 9 is specified as the applicable opacity test method, the required minimum period of observation for a

compliance test shall be sixty (60) minutes for emissions units which emit or have the potential to emit 100 tons per year or more of particulate matter, and thirty (30) minutes for emissions units which have potential emissions less than 100 tons per year of particulate matter and are not subject to a multiple-valued opacity standard. The opacity test observation period shall include the period during which the highest opacity emissions can reasonably be expected to occur. Exceptions to these requirements are as follows:

- c. The minimum observation period for opacity tests conducted by employees or agents of the Department to verify the day-to-day continuing compliance of a unit or activity with an applicable opacity standard shall be twelve minutes.
 - (b) Minimum Sample Volume. Unless otherwise specified in the applicable rule, the minimum sample volume per run shall be 25 dry standard cubic feet.
 - (c) Required Flow Rate Range. For EPA Method 5 particulate sampling, acid mist/sulfur dioxide, and fluoride sampling which uses Greenburg Smith type impingers, the sampling nozzle and sampling time shall be selected such that the average sampling rate will be between 0.5 and 1.0 actual cubic feet per minute, and the required minimum sampling volume will be obtained.
 - (d) Calibration of Sampling Equipment. Calibration of the sampling train equipment shall be conducted in accordance with the schedule shown in Table 297.310-1, attached to this permit.
 - (e) Allowed Modification to EPA Method 5. When EPA Method 5 is required, the following modification is allowed: the heated filter may be separated from the impingers by a flexible tube.
- [Rule 62-297.310(4), F.A.C.]

A.29. The permittee shall comply with the requirements contained in APPENDIX SS-1, Stack Sampling Facilities, attached to this permit.
[Rule 62-297.310(6), F.A.C.]

A.30. Frequency of Compliance Tests. The following provisions apply only to those emissions units that are subject to an emissions limiting standard for which compliance testing is required.

(a) General Compliance Testing.

3. The owner or operator of an emissions unit that is subject to any emission limiting standard shall conduct a compliance test that demonstrates compliance with the applicable emission limiting standard prior to obtaining a renewed operation permit. Emissions units that are required to conduct an annual compliance test may submit the most recent annual compliance test to satisfy the requirements of this provision. In renewing an air operation permit pursuant to Rule 62-210.300(2)(a)3.b., c., or d., F.A.C., the Department shall not require submission of emission compliance test results for any emissions unit that, during the year prior to renewal:

a. Did not operate; or

b. In the case of a fuel burning emissions unit, burned liquid and/or solid fuel for a total of no more than 400 hours.

4. During each federal fiscal year (October 1 -- September 30), unless otherwise specified by rule, order, or permit, the owner or operator of each emissions unit shall have a formal compliance test conducted for:

a. Visible emissions, if there is an applicable standard;

- b. Each of the following pollutants, if there is an applicable standard, and if the emissions unit emits or has the potential to emit: 5 tons per year or more of lead or lead compounds measured as elemental lead; 30 tons per year or more of acrylonitrile; or 100 tons per year or more of any other regulated air pollutant; and
- c. Each NESHAP pollutant, if there is an applicable emission standard.

5. An annual compliance test for particulate matter emissions shall not be required for any fuel burning emissions unit that, in a federal fiscal year, does not burn liquid and/or solid fuel, other than during startup, for a total of more than 400 hours.

8. Any combustion turbine that does not operate for more than 400 hours per year shall conduct a visible emissions compliance test once per each five-year period, coinciding with the term of its air operation permit.

9. The owner or operator shall notify the Department, at least 15 days prior to the date on which each formal compliance test is to begin, of the date, time, and place of each such test, and the test contact person who will be responsible for coordinating and having such test conducted for the owner or operator.

(b) Special Compliance Tests. When the Department, after investigation, has good reason (such as complaints, increased visible emissions or questionable maintenance of control equipment) to believe that any applicable emission standard contained in a Department rule or in a permit issued pursuant to those rules is being violated, it may require the owner or operator of the emissions unit to conduct compliance tests which identify the nature and quantity of pollutant emissions from the emissions unit and to provide a report on the results of said tests to the Department.

(c) Waiver of Compliance Test Requirements. If the owner or operator of an emissions unit that is subject to a compliance test requirement demonstrates to the Department, pursuant to the procedure established in Rule 62-297.620, F.A.C., that the compliance of the emissions unit with an applicable weight emission limiting standard can be adequately determined by means other than the designated test procedure, such as specifying a surrogate standard of no visible emissions for particulate matter sources equipped with a bag house or specifying a fuel analysis for sulfur dioxide emissions, the Department shall waive the compliance test requirements for such emissions units and order that the alternate means of determining compliance be used, provided, however, the provisions of Rule 62-297.310(7)(b), F.A.C., shall apply.

[Rule 62-297.310(7), F.A.C.; and, SIP approved]

Record Keeping and Reporting Requirements

A.31. For the purpose of reports required under 40 CFR 60.7(c), periods of excess emissions that shall be reported are defined as follows:

a. *Nitrogen oxides.* Any one-hour period during which the average steam-to-fuel ratio, as measured by the continuous monitoring system, falls below the steam-to-fuel ratio determined to demonstrate compliance with the permitted nitrogen oxide standard by the initial performance test required in 40 CFR 60.8 or any period during which the fuel-bound nitrogen of the fuel is greater than the maximum nitrogen content allowed by the fuel-bound nitrogen allowance used during the initial performance test. Each report shall include the average steam-to-fuel ratio, average fuel consumption, ambient conditions, gas turbine load, and nitrogen content of the fuel during the period of excess emissions, and the graphs or figures developed under 40 CFR 60.335(a).

[Rule 62-296.800, F.A.C.; and, 40 CFR 60.334(c)(1)]

A.32. The owner or operator required to install a continuous monitoring system (CMS) or monitoring device shall submit an excess emissions and monitoring systems performance report (excess emissions are defined in applicable subparts) and/or a summary report form [see 40 CFR 60.7(d)] to the Administrator semiannually, except when: more frequent reporting is specifically required by an applicable subpart; or, the CMS data are to be used directly for compliance determination, in which case quarterly reports shall be submitted; or, the Administrator, on a case-by-case basis, determines that more frequent reporting is necessary to accurately assess the compliance status of the source. All reports shall be postmarked by the 30th day following the end of each calendar half (or quarter, as appropriate).

Written reports of excess emissions shall include the following information:

(1) The magnitude of excess emissions computed in accordance with 40 CFR 60.13(h), any conversion factor(s) used, and the date and time of commencement and completion of each time period of excess emissions. The process operating time during the reporting period.

(2) Specific identification of each period of excess emissions that occurs during startups, shutdowns, and malfunctions of the affected facility. The nature and cause of any malfunction (if known), the corrective action taken or preventative measures adopted.

(3) The date and time identifying each period during which the continuous monitoring system was inoperative except for zero and span checks and the nature of the system repairs or adjustments.

(4) When no excess emissions have occurred or the continuous monitoring system(s) have not been inoperative, repaired, or adjusted, such information shall be stated in the report.

[40 CFR 60.7(c)(1), (2), (3), & (4)]

A.33. The summary report form shall contain the information and be in the format shown in Figure 1 (attached) unless otherwise specified by the Administrator. One summary report form shall be submitted for each pollutant monitored at each affected facility.

(1) If the total duration of excess emissions for the reporting period is less than 1 percent of the total operating time for the reporting period and CMS downtime for the reporting period is less than 5 percent of the total operating time for the reporting period, only the summary report form shall be submitted and the excess emission report described in 40 CFR 60.7(c) need not be submitted unless requested by the Administrator.

(2) If the total duration of excess emissions for the reporting period is 1 percent or greater of the total operating time for the reporting period or the total CMS downtime for the reporting period is 5 percent or greater of the total operating time for the reporting period, the summary report form and the excess emission report described in 40 CFR 60.7(c) shall both be submitted.

[40 CFR 60.7(d)(1) & (2)]

A.34. Malfunction Reporting. In the case of excess emissions resulting from malfunctions, each owner or operator shall notify the Department in accordance with Rule 62-4.130, F.A.C. A full written report on the malfunctions shall be submitted in a quarterly report, if requested by the Department.
[Rule 62-210.700(6), F.A.C.]

A.35. All recorded data shall be maintained on file by the Source for a period of five years.
[Rule 62-213.440, F.A.C.]

A.36. Test Reports.

(a) The owner or operator of an emissions unit for which a compliance test is required shall file a report with the Department on the results of each such test.

(b) The required test report shall be filed with the Department as soon as practical but no later than 45 days after the last sampling run of each test is completed.

(c) The test report shall provide sufficient detail on the emissions unit tested and the test procedures used to allow the Department to determine if the test was properly conducted and the test results properly computed. As a minimum, the test report, other than for an EPA or DEP Method 9 test, shall provide the following information:

1. The type, location, and designation of the emissions unit tested.
2. The facility at which the emissions unit is located.
3. The owner or operator of the emissions unit.
4. The normal type and amount of fuels used and materials processed, and the types and amounts of fuels used and material processed during each test run.
5. The means, raw data and computations used to determine the amount of fuels used and materials processed, if necessary to determine compliance with an applicable emission limiting standard.

6. The type of air pollution control devices installed on the emissions unit, their general condition, their normal operating parameters (pressure drops, total operating current and GPM scrubber water), and their operating parameters during each test run.
 7. A sketch of the duct within 8 stack diameters upstream and 2 stack diameters downstream of the sampling ports, including the distance to any upstream and downstream bends or other flow disturbances.
 8. The date, starting time and duration of each sampling run.
 9. The test procedures used, including any alternative procedures authorized pursuant to Rule 62-297.620, F.A.C. Where optional procedures are authorized in this chapter, indicate which option was used.
 10. The number of points sampled and configuration and location of the sampling plane.
 11. For each sampling point for each run, the dry gas meter reading, velocity head, pressure drop across the stack, temperatures, average meter temperatures and sample time per point.
 12. The type, manufacturer and configuration of the sampling equipment used.
 13. Data related to the required calibration of the test equipment.
 14. Data on the identification, processing and weights of all filters used.
 15. Data on the types and amounts of any chemical solutions used.
 16. Data on the amount of pollutant collected from each sampling probe, the filters, and the impingers, are reported separately for the compliance test.
 17. The names of individuals who furnished the process variable data, conducted the test, analyzed the samples and prepared the report.
 18. All measured and calculated data required to be determined by each applicable test procedure for each run.
 19. The detailed calculations for one run that relate the collected data to the calculated emission rate.
 20. The applicable emission standard, and the resulting maximum allowable emission rate for the emissions unit, plus the test result in the same form and unit of measure.
 21. A certification that, to the knowledge of the owner or his authorized agent, all data submitted are true and correct. When a compliance test is conducted for the Department or its agent, the person who conducts the test shall provide the certification with respect to the test procedures used. The owner or his authorized agent shall certify that all data required and provided to the person conducting the test are true and correct to his knowledge.
- [Rules 62-213.440 and 62-297.310(8), F.A.C.]

Miscellaneous Requirements.

A.37. Definitions. For the purposes of Rule 62-204.800(7), F.A.C., the definitions contained in the various provisions of 40 CFR 60, shall apply except that the term "Administrator" when used in 40 CFR 60, shall mean the Secretary or the Secretary's designee.
[40 CFR 60.2; and, Rule 62-204.800(7)(a), F.A.C.]

A.38. Circumvention. No owner or operator subject to the provisions of 40 CFR 60 shall build, erect, install, or use any article, machine, equipment or process, the use of which conceals an emission which would otherwise constitute a violation of an applicable standard. Such concealment includes, but is not limited to, the use of gaseous diluents to achieve compliance with an opacity standard or with a standard which is based on the concentration of a pollutant in the gases discharged to the atmosphere.
[40 CFR 60.12]

Section III. Emissions Unit(s) and Conditions.

Subsection B. This section addresses the following emissions unit.

E.U.

<u>ID No.</u>	<u>Brief Description</u>
---------------	--------------------------

-004	16.5 MW Boiler - Unit #6
------	--------------------------

Fossil fuel fired steam generator # 6 is a nominal 16.5 megawatt (electric) steam generator designated as H. D. King Unit # 6. The emission unit is fired on natural gas with a maximum heat input of 218.9 MMBtu per hour. No. 6 residual fuel oil is fired as a secondary/emergency fuel.

{Permitting note(s): The emissions unit is regulated under Rule 62-296.406, F.A.C., Fossil Fuel Steam Generators with Less than 250 million Btu per Hour Heat Input. Fossil fuel fired steam generator #6 began commercial operation in 1958.}

The following specific conditions apply to the emissions unit listed above:

Essential Potential to Emit (PTE) Parameters

B.1. Permitted Capacity. The maximum operation heat input rate is as follows:

<u>Unit No.</u>	<u>MMBtu/hr Heat Input</u>	<u>Fuel Type</u>
6	218.9	Natural Gas
	218.9	No. 6 Fuel Oil

See specific condition **E.1.**

[Rules 62-4.160(2), 62-210.200(PTE) and 62-296.406, F.A.C.; and, OGC Case No. 91-1610: Final Order filed 7/21/92]

B.2. Emissions Unit Operating Rate Limitation After Testing. See specific condition **B.26.**

[Rule 62-297.310(2), F.A.C.]

B.3. Methods of Operation. Fuels.

a. This emissions unit fires natural gas as the primary fuel.

b. This emissions unit fires No. 6 residual fuel oil as the emergency back-up fuel.

The use of No. 6 residual fuel oil is limited. See specific conditions **B.36.** and **E.2.**

[Rule 62-213.410, F.A.C.; and, OGC Case No. 91-1610: Final Order filed 7/21/92]

B.4. Hours of Operation. This emissions unit may operate continuously, i.e., 8,760 hours/year. See specific condition **E.1.**

[Rule 62-210.200(PTE), F.A.C.; and, OGC Case No. 91-1610: Final Order filed 7/21/92]

Emission Limitations and Standards

{Permitting note: Table 1-1, Summary of Air Pollutant Standards and Terms, summarizes information for convenience purposes only. This table does not supersede any of the terms or conditions of this permit.}

B.5. Visible Emissions. Visible emissions shall not exceed 5 percent opacity when firing natural gas. Visible emissions shall not exceed 20 percent opacity when firing fuel oil, except for one two-minute period per hour during which opacity shall not exceed 40 percent.
[OGC Case No. 91-1610: Final Order filed 7/21/92]

B.6. Visible emissions - Soot Blowing and Load Change. Visible emissions shall not exceed 60 percent opacity during the 3-hours in any 24 hour period of excess emissions allowed for boiler cleaning (soot blowing) and load change.

A load change occurs when the operational capacity of a unit is in the 10 percent to 100 percent capacity range, other than startup or shutdown, which exceeds 10 percent of the unit's rated capacity and which occurs at a rate of 0.5 percent per minute or more.
[Rule 62-210.700(3), F.A.C.]

B.7. Particulate Matter. Particulate Matter emissions shall not exceed 0.4 pound per hour when firing natural gas. See specific condition E.3.
[OGC Case No. 91-1610: Final Order filed 7/21/92]

B.8. Particulate Matter - Soot Blowing and Load Change. Particulate matter emissions shall not exceed an average of 0.3 pound per million Btu heat input during the 3-hours in any 24-hour period of excess emissions allowed for boiler cleaning (soot blowing) and load change. See specific condition E.3.
[Rule 62-210.700(3), F.A.C.]

B.9. Sulfur Dioxide. Sulfur Dioxide emissions shall not exceed 2.5 pounds per hour when firing natural gas and 0.80 pound per million Btu heat input when firing No. 6 residual fuel oil. See specific condition E.3.
[AC 56-141460A; and, OGC Case No. 91-1610: Final Order filed 7/21/92]

B.10. Nitrogen Oxides. Nitrogen Oxides emissions shall not exceed 1.31 pounds per hour when firing natural gas. See specific condition E.3.
[OGC Case No. 91-1610: Final Order filed 7/21/92]

B.11. Volatile Organic Compounds. Volatile Organic Compounds emissions shall not exceed 0.0236 pound per hour when firing natural gas. See specific condition E.3.
[OGC Case No. 91-1610: Final Order filed 7/21/92]

B.12. Carbon Monoxide. Carbon Monoxide emissions shall not exceed 0.15 pound per hour when firing natural gas. See specific condition **E.3.**

[OGC Case No. 91-1610: Final Order filed 7/21/92]

Excess Emissions

B.13. Excess emissions resulting from malfunction shall be permitted provided that best operational practices to minimize emissions are adhered to and the duration of excess emissions shall be minimized but in no case exceed two hours in any 24 hour period unless specifically authorized by the Department for longer duration.

[Rule 62-210.700(1), F.A.C.]

B.14. Excess emissions resulting from startup or shutdown shall be permitted provided that best operational practices to minimize emissions are adhered to and the duration of excess emissions shall be minimized.

[Rule 62-210.700(2), F.A.C.]

B.15. Excess emissions which are caused entirely or in part by poor maintenance, poor operation, or any other equipment or process failure which may reasonably be prevented during startup, shutdown or malfunction shall be prohibited.

[Rule 62-210.700(4), F.A.C.]

Monitoring of Operations

B.16. Determination of Process Variables.

(a) **Required Equipment.** The owner or operator of an emissions unit for which compliance tests are required shall install, operate, and maintain equipment or instruments necessary to determine process variables, such as process weight input or heat input, when such data are needed in conjunction with emissions data to determine the compliance of the emissions unit with applicable emission limiting standards.

(b) **Accuracy of Equipment.** Equipment or instruments used to directly or indirectly determine process variables, including devices such as belt scales, weight hoppers, flow meters, and tank scales, shall be calibrated and adjusted to indicate the true value of the parameter being measured with sufficient accuracy to allow the applicable process variable to be determined within 10% of its true value.

[Rule 62-297.310(5), F.A.C.]

Test Methods and Procedures

{Permitting note: Table 2-1, Summary of Compliance Requirements, summarizes information for convenience purposes only. This table does not supersede any of the terms or conditions of this permit.}

B.17. Visible emissions. The test method for visible emissions shall be EPA Method 9 when firing natural gas and DEP Method 9 when firing No. 6 residual fuel oil, incorporated in Chapter 62-297, F.A.C. See specific condition **B.18.**
[Rules 62-213.440 and 62-297.401, F.A.C.; and, OGC Case No. 91-1610: Final Order filed 7/21/92]

B.18. DEP Method 9. The provisions of EPA Method 9 (40 CFR 60, Appendix A) are adopted by reference with the following exceptions:

1. EPA Method 9, Section 2.4, Recording Observations. Opacity observations shall be made and recorded by a certified observer at sequential fifteen second intervals during the required period of observation.
2. EPA Method 9, Section 2.5, Data Reduction. For a set of observations to be acceptable, the observer shall have made and recorded, or verified the recording of, at least 90 percent of the possible individual observations during the required observation period. For single-valued opacity standards (e.g., 20 percent opacity), the test result shall be the highest valid six-minute average for the set of observations taken. For multiple-valued opacity standards (e.g., 20 percent opacity, except that an opacity of 40 percent is permissible for not more than two minutes per hour) opacity shall be computed as follows:
 - a. For the basic part of the standard (i.e., 20 percent opacity) the opacity shall be determined as specified above for a single-valued opacity standard.
 - b. For the short-term average part of the standard, opacity shall be the highest valid short-term average (i.e., two-minute, three-minute average) for the set of observations taken.

In order to be valid, any required average (i.e., a six-minute or two-minute average) shall be based on all of the valid observations in the sequential subset of observations selected, and the selected subset shall contain at least 90 percent of the observations possible for the required averaging time. Each required average shall be calculated by summing the opacity value of each of the valid observations in the appropriate subset, dividing this sum by the number of valid observations in the subset, and rounding the result to the nearest whole number. The number of missing observations in the subset shall be indicated in parenthesis after the subset average value.

[Rule 62-297.401, F.A.C.]

B.19. Particulate Matter. The test method for particulate matter shall be EPA Method 5, incorporated in Chapter 62-297, F.A.C.
[AC 56-141460A]

B.20. Sulfur Dioxide. The test method for sulfur dioxide shall be EPA Method 6 or 6C, incorporated in Chapter 62-297, F.A.C., or by calculation based on fuel analysis for sulfur content of the oil and natural gas. Certified analyses by the appropriate test method(s) from the fuel supplier is acceptable. See specific condition **B.21.**

[AC 56-141460A]

B.21. The fuel sulfur content of the oil or natural gas shall be evaluated using ASTM D1552, ASTM D1072, ASTM D3031, ASTM D4084, or ASTM D3246.

[AC 56-141460A]

B.22. The test method for nitrogen oxides shall be EPA Method 7 or 7E, incorporated in Chapter 62-297, F.A.C.

[AC 56-141460A]

B.23. The test method for volatile organic compounds shall be EPA Method 25A, incorporated in Chapter 62-297, F.A.C.

[AC 56-141460A]

B.24. The test method for carbon monoxide shall be EPA Method 10, incorporated in Chapter 62-297, F.A.C.

[AC 56-141460A]

B.25. Required Number of Test Runs. For mass emission limitations, a compliance test shall consist of three complete and separate determinations of the total air pollutant emission rate through the test section of the stack or duct and three complete and separate determinations of any applicable process variables corresponding to the three distinct time periods during which the stack emission rate was measured provided, however, that three complete and separate determinations shall not be required if the process variables are not subject to variation during a compliance test, or if three determinations are not necessary in order to calculate the unit's emission rate. The three required test runs shall be completed within one consecutive five day period. In the event that a sample is lost or one of the three runs must be discontinued because of circumstances beyond the control of the owner or operator, and a valid third run cannot be obtained within the five day period allowed for the test, the Secretary or his or her designee may accept the results of the two complete runs as proof of compliance, provided that the arithmetic mean of the results of the two complete runs is at least 20 percent below the allowable emission limiting standards.

[Rule 62-297.310(1), F.A.C.]

B.26. Operating Rate During Testing. Testing of emissions shall be conducted with the emissions unit operation at permitted capacity, which is defined as 90 to 100 percent of the maximum operation rate allowed by the permit. If it is impracticable to test at permitted capacity, an emissions unit may be tested at less than the minimum permitted capacity; in this case, subsequent emissions unit operation is limited to 110 percent of the test load until a new test is conducted. Once the emissions unit is so limited, operation at higher capacities is allowed for no more than 15 consecutive days for the purpose of additional compliance testing to regain the authority to operate at the permitted capacity.
[Rule 62-297.310(2) & (2)(b), F.A.C.]

B.27. Calculation of Emission Rate. The indicated emission rate or concentration shall be the arithmetic average of the emission rate or concentration determined by each of the separate test runs unless otherwise specified in a particular test method or applicable rule.
[Rule 62-297.310(3), F.A.C.]

B.28. Applicable Test Procedures.

(a) Required Sampling Time.

1. Unless otherwise specified in the applicable rule, the required sampling time for each test run shall be no less than one hour and no greater than four hours, and the sampling time at each sampling point shall be of equal intervals of at least two minutes.

2. **Opacity Compliance Tests.** When either EPA Method 9 or DEP Method 9 is specified as the applicable opacity test method, the required minimum period of observation for a compliance test shall be sixty (60) minutes for emissions units which emit or have the potential to emit 100 tons per year or more of particulate matter, and thirty (30) minutes for emissions units which have potential emissions less than 100 tons per year of particulate matter and are not subject to a multiple-valued opacity standard. The opacity test observation period shall include the period during which the highest opacity emissions can reasonably be expected to occur. Exceptions to these requirements are as follows:

c. The minimum observation period for opacity tests conducted by employees or agents of the Department to verify the day-to-day continuing compliance of a unit or activity with an applicable opacity standard shall be twelve minutes.

(b) Minimum Sample Volume. Unless otherwise specified in the applicable rule, the minimum sample volume per run shall be 25 dry standard cubic feet.

(c) Required Flow Rate Range. For EPA Method 5 particulate sampling, acid mist/sulfur dioxide, and fluoride sampling which uses Greenburg Smith type impingers, the sampling nozzle and sampling time shall be selected such that the average sampling rate will be between 0.5 and 1.0 actual cubic feet per minute, and the required minimum sampling volume will be obtained.

(d) Calibration of Sampling Equipment. Calibration of the sampling train equipment shall be conducted in accordance with the schedule shown in Table 297.310-1, attached to this permit.

(e) Allowed Modification to EPA Method 5. When EPA Method 5 is required, the following modification is allowed: the heated filter may be separated from the impingers by a flexible tube.

[Rule 62-297.310(4), F.A.C.]

B.29. Required Stack Sampling Facilities. When a mass emissions stack test is required, the permittee shall comply with the requirements contained in Appendix SS-1, Stack Sampling Facilities, attached to this permit.

[Rule 62-297.310(6), F.A.C.]

B.30. Frequency of Compliance Tests. The following provisions apply only to those emissions units that are subject to an emissions limiting standard for which compliance testing is required.

(a) General Compliance Testing.

2. For excess emission limitations for particulate matter specified in Rule 62-210.700, F.A.C., a compliance test shall be conducted annually while the emissions unit is operating under soot blowing conditions in each federal fiscal year during which soot blowing is part of normal emissions unit operation, except that such test shall not be required in any federal fiscal year in which a fossil fuel steam generator does not burn liquid fuel for more than 400 hours other than during startup.

3. The owner or operator of an emissions unit that is subject to any emission limiting standard shall conduct a compliance test that demonstrates compliance with the applicable emission limiting standard prior to obtaining a renewed operation permit. Emissions units that are required to conduct an annual compliance test may submit the most recent annual compliance test to satisfy the requirements of this provision. In renewing an air operation permit pursuant to Rule 62-210.300(2)(a)3.b., c., or d., F.A.C., the Department shall not require submission of emission compliance test results for any emissions unit that, during the year prior to renewal:

a. Did not operate; or

b. In the case of a fuel burning emissions unit, burned liquid fuel for a total of no more than 400 hours.

4. During each federal fiscal year (October 1 - September 30), unless otherwise specified by rule, order, or permit, the owner or operator of each emissions unit shall have a formal compliance test conducted for:

a. Visible emissions, if there is an applicable standard;

b. Each of the following pollutants, if there is an applicable standard, and if the emissions unit emits or has the potential to emit: 5 tons per year or more of lead or lead compounds measured as elemental lead; 30 tons per year or more of acrylonitrile; or 100 tons per year or more of any other regulated air pollutant; and

c. Each NESHAP pollutant, if there is an applicable emission standard.

5. An annual compliance test for particulate matter emissions shall not be required for any fuel burning emissions unit that, in a federal fiscal year, does not burn liquid fuel, other than during startup, for a total of more than 400 hours.

9. The owner or operator shall notify the Department, at least 15 days prior to the date on which each formal compliance test is to begin, of the date, time, and place of each such test, and the test contact person who will be responsible for coordinating and having such test conducted for the owner or operator.

(b) Special Compliance Tests. When the Department, after investigation, has good reason (such as complaints, increased visible emissions or questionable maintenance of control equipment) to believe that any applicable emission standard contained in a Department rule or in a permit issued pursuant to those rules is being violated, it may require the owner or operator of the emissions unit to conduct compliance tests which identify the nature and quantity of pollutant emissions from the emissions unit and to provide a report on the results of said tests to the Department.

(c) Waiver of Compliance Test Requirements. If the owner or operator of an emissions unit that is subject to a compliance test requirement demonstrates to the Department, pursuant to the procedure established in Rule 62-297.620, F.A.C., that the compliance of the emissions unit with an applicable weight emission limiting standard can be adequately determined by means other than the designated test procedure, such as specifying a surrogate standard of no visible emissions for particulate matter sources equipped with a bag house or specifying a fuel analysis for sulfur dioxide emissions, the Department shall waive the compliance test requirements for such emissions units and order that the alternate means of determining compliance be used, provided, however, the provisions of Rule 62-297.310(7)(b), F.A.C., shall apply.

[Rule 62-297.310(7), F.A.C.; and, SIP approved]

B.31. By this permit, annual emissions compliance testing for visible emissions is not required for these emissions units while burning:

- a. only gaseous fuel(s); or
- b. gaseous fuel(s) in combination with any amount of liquid fuel(s) for less than 400 hours per year; or
- c. only liquid fuel(s) for less than 400 hours per year.

[Rule 62-297.310(7)(a)4., F.A.C.]

B.32. Annual and permit renewal compliance testing for particulate matter emissions is not required for these emissions units while burning:

- a. only gaseous fuel(s); or
- b. gaseous fuel(s) in combination with any amount of liquid fuel(s) for less than 400 hours per year; or
- c. only liquid fuel(s) for less than 400 hours per year.

[Rules 62-297.310(7)(a)3. & 5., F.A.C.; and, ASP Number 97-B-01.]

Record keeping and Reporting Requirements

B.33. In the case of excess emissions resulting from malfunctions, each owner or operator shall notify the Department in accordance with Rule 62-4.130, F.A.C. A full written report on the malfunctions shall be submitted in a quarterly report, if requested by the Department.

[Rule 62-210.700(6), F.A.C.]

B.34. All recorded data shall be maintained on file by the Source for a period of five years.

[Rule 62-213.440, F.A.C.]

B.35. Test Reports.

- (a) The owner or operator of an emissions unit for which a compliance test is required shall file a report with the Department on the results of each such test.
- (b) The required test report shall be filed with the Department as soon as practical but no later than 45 days after the last sampling run of each test is completed.
- (c) The test report shall provide sufficient detail on the emissions unit tested and the test procedures used to allow the Department to determine if the test was properly conducted and the test results properly computed. As a minimum, the test report, other than for an EPA or DEP Method 9 test, shall provide the following information:
 - 1. The type, location, and designation of the emissions unit tested.
 - 2. The facility at which the emissions unit is located.
 - 3. The owner or operator of the emissions unit.
 - 4. The normal type and amount of fuels used and materials processed, and the types and amounts of fuels used and material processed during each test run.
 - 5. The means, raw data and computations used to determine the amount of fuels used and materials processed, if necessary to determine compliance with an applicable emission limiting standard.
 - 6. The type of air pollution control devices installed on the emissions unit, their general condition, their normal operating parameters (pressure drops, total operating current and GPM scrubber water), and their operating parameters during each test run.
 - 7. A sketch of the duct within 8 stack diameters upstream and 2 stack diameters downstream of the sampling ports, including the distance to any upstream and downstream bends or other flow disturbances.
 - 8. The date, starting time and duration of each sampling run.
 - 9. The test procedures used, including any alternative procedures authorized pursuant to Rule 62-297.620, F.A.C. Where optional procedures are authorized in this chapter, indicate which option was used.
 - 10. The number of points sampled and configuration and location of the sampling plane.
 - 11. For each sampling point for each run, the dry gas meter reading, velocity head, pressure drop across the stack, temperatures, average meter temperatures and sample time per point.
 - 12. The type, manufacturer and configuration of the sampling equipment used.
 - 13. Data related to the required calibration of the test equipment.
 - 14. Data on the identification, processing and weights of all filters used.
 - 15. Data on the types and amounts of any chemical solutions used.
 - 16. Data on the amount of pollutant collected from each sampling probe, the filters, and the impingers, are reported separately for the compliance test.
 - 17. The names of individuals who furnished the process variable data, conducted the test, analyzed the samples and prepared the report.
 - 18. All measured and calculated data required to be determined by each applicable test procedure for each run.

19. The detailed calculations for one run that relate the collected data to the calculated emission rate.

20. The applicable emission standard, and the resulting maximum allowable emission rate for the emissions unit, plus the test result in the same form and unit of measure.

21. A certification that, to the knowledge of the owner or his authorized agent, all data submitted are true and correct. When a compliance test is conducted for the Department or its agent, the person who conducts the test shall provide the certification with respect to the test procedures used. The owner or his authorized agent shall certify that all data required and provided to the person conducting the test are true and correct to his knowledge.

[Rules 62-213.440 and 62-297.310(8), F.A.C.]

B.36. The permittee must notify the DEP within 24 hours after commencement of oil firing and furnish the following information:

- a. Duration or projected duration of the event.
- b. Quantity of fuel oil burned or projected to be burned.
- c. A description of significant circumstances precipitating the event, which shall include:
 - (1) Availability of power for purchase
 - (2) Availability of electric transmission capacity relating to power purchases
 - (3) Availability of natural gas
 - (4) Availability of the permittee's generation sources

[OGC Case No. 91-1610: Final Order filed 7/21/92]

Section III. Emissions Unit(s) and Conditions.

Subsection C. This section addresses the following emissions unit.

E.U.

<u>ID No.</u>	<u>Brief Description</u>
-007	33.0 MW Boiler - Unit #7

Fossil fuel fired steam generator # 7 is a nominal 33.0 megawatt (electric) steam generator designated as H. D. King Unit # 7. The emission unit is fired on natural gas with a maximum heat input of 470.0 MMBtu per hour. No. 6 residual fuel oil is fired as a secondary/emergency fuel. Emissions are discharged through a multicyclone collector.

{Permitting note(s): The emissions unit is regulated under Acid Rain, Phase II; and Rule 62-296.405, F.A.C., Fossil Fuel Steam Generators with More than 250 million Btu per Hour Heat Input. Fossil fuel fired steam generator #7 began commercial operation in 1964.}

The following specific conditions apply to the emissions unit(s) listed above:

Essential Potential to Emit (PTE) Parameters

C.1. Permitted Capacity. The maximum operation heat input rate is as follows:

<u>Unit No.</u>	<u>MMBtu/hr Heat Input</u>	<u>Fuel Type</u>
7	470.0	Natural Gas
	470.0	No. 6 Fuel Oil

See specific condition E.1.

[Rules 62-4.160(2), 62-210.200(PTE) and 62-296.406, F.A.C.; and, OGC Case No. 91-1610: Final Order filed 7/21/92]

C.2. Emissions Unit Operating Rate Limitation After Testing. See specific condition C.26.

[Rule 62-297.310(2), F.A.C.]

C.3. Methods of Operation. Fuels.

a. This emissions unit fires natural gas as the primary fuel.

b. This emissions unit fires No. 6 residual fuel oil as the emergency back-up fuel.

The use of No. 6 residual fuel oil is limited. See specific conditions C.37. and E.2.

[Rule 62-213.410, F.A.C.; and, OGC Case No. 91-1610: Final Order filed 7/21/92]

C.4. Hours of Operation. This emissions unit may operate continuously, i.e., 8,760 hours/year. See specific condition **E.1.**

[Rule 62-210.200(PTE), F.A.C.; and, OGC Case No. 91-1610: Final Order filed 7/21/92]

Emission Limitations and Standards

{Permitting note: Table 1-1, Summary of Air Pollutant Standards and Terms, summarizes information for convenience purposes only. This table does not supersede any of the terms or conditions of this permit.}

C.5. Visible Emissions. Visible emissions shall not exceed 5 percent opacity when firing natural gas. Visible emissions shall not exceed 20 percent opacity when firing fuel oil, except for one two-minute period per hour during which opacity shall not exceed 40 percent.

[OGC Case No. 91-1610: Final Order filed 7/21/92]

C.6. Visible emissions - Soot Blowing and Load Change. Visible emissions shall not exceed 60 percent opacity during the 3-hours in any 24 hour period of excess emissions allowed for boiler cleaning (soot blowing) and load change.

A load change occurs when the operational capacity of a unit is in the 10 percent to 100 percent capacity range, other than startup or shutdown, which exceeds 10 percent of the unit's rated capacity and which occurs at a rate of 0.5 percent per minute or more.

[Rule 62-210.700(3), F.A.C.]

C.7. Particulate Matter. Particulate Matter emissions shall not exceed 0.568 pound per hour when firing natural gas and 0.1 pound per million Btu when firing No. 6 residual fuel oil. See specific condition **E.3.**

[OGC Case No. 91-1610: Final Order filed 7/21/92]

C.8. Particulate Matter - Soot Blowing and Load Change. Particulate matter emissions shall not exceed an average of 0.3 pound per million Btu heat input during the 3-hours in any 24-hour period of excess emissions allowed for boiler cleaning (soot blowing) and load change. See specific condition **E.3.**

[Rule 62-210.700(3), F.A.C.]

C.9. Sulfur Dioxide. Sulfur Dioxide emissions shall not exceed 2.5 pounds per hour when firing natural gas and 0.80 pound per million Btu heat input when firing No. 6 residual fuel oil. See specific condition **E.3.**

[AC 56-141460A; and, OGC Case No. 91-1610: Final Order filed 7/21/92]

C.10. Nitrogen Oxides. Nitrogen Oxides emissions shall not exceed 104.35 pounds per hour when firing natural gas. See specific condition **E.3.**

[OGC Case No. 91-1610: Final Order filed 7/21/92]

C.11. Volatile Organic Compounds. Volatile Organic Compounds emissions shall not exceed 0.266 pound per hour when firing natural gas. See specific condition **E.3.**
[OGC Case No. 91-1610: Final Order filed 7/21/92]

C.12. Carbon Monoxide. Carbon Monoxide emissions shall not exceed 7.589 pounds per hour when firing natural gas. See specific condition **E.3.**
[OGC Case No. 91-1610: Final Order filed 7/21/92]

Excess Emissions

C.13. Excess emissions resulting from malfunction shall be permitted provided that best operational practices to minimize emissions are adhered to and the duration of excess emissions shall be minimized but in no case exceed two hours in any 24 hour period unless specifically authorized by the Department for longer duration.
[Rule 62-210.700(1), F.A.C.]

C.14. Excess emissions resulting from startup or shutdown shall be permitted provided that best operational practices to minimize emissions are adhered to and the duration of excess emissions shall be minimized.
[Rule 62-210.700(2), F.A.C.]

C.15. Excess emissions which are caused entirely or in part by poor maintenance, poor operation, or any other equipment or process failure which may reasonably be prevented during startup, shutdown or malfunction shall be prohibited.
[Rule 62-210.700(4), F.A.C.]

Monitoring of Operations

C.16. Determination of Process Variables.

(a) **Required Equipment.** The owner or operator of an emissions unit for which compliance tests are required shall install, operate, and maintain equipment or instruments necessary to determine process variables, such as process weight input or heat input, when such data are needed in conjunction with emissions data to determine the compliance of the emissions unit with applicable emission limiting standards.

(b) **Accuracy of Equipment.** Equipment or instruments used to directly or indirectly determine process variables, including devices such as belt scales, weight hoppers, flow meters, and tank scales, shall be calibrated and adjusted to indicate the true value of the parameter being measured with sufficient accuracy to allow the applicable process variable to be determined within 10% of its true value.
[Rule 62-297.310(5), F.A.C.]

Test Methods and Procedures

{Permitting note: Table 2-1, Summary of Compliance Requirements, summarizes information for convenience purposes only. This table does not supersede any of the terms or conditions of this permit.}

C.17. Visible emissions. The test method for visible emissions shall be EPA Method 9 when firing natural gas and DEP Method 9 when firing No. 6 residual fuel-oil, incorporated in Chapter 62-297, F.A.C. See specific condition **C.18.**

[Rules 62-213.440 and 62-297.401, F.A.C.; and, OGC Case No. 91-1610: Final Order filed 7/21/92]

C.18. DEP Method 9. The provisions of EPA Method 9 (40 CFR 60, Appendix A) are adopted by reference with the following exceptions:

1. EPA Method 9, Section 2.4, Recording Observations. Opacity observations shall be made and recorded by a certified observer at sequential fifteen second intervals during the required period of observation.
2. EPA Method 9, Section 2.5, Data Reduction. For a set of observations to be acceptable, the observer shall have made and recorded, or verified the recording of, at least 90 percent of the possible individual observations during the required observation period. For single-valued opacity standards (e.g., 20 percent opacity), the test result shall be the highest valid six-minute average for the set of observations taken. For multiple-valued opacity standards (e.g., 20 percent opacity, except that an opacity of 40 percent is permissible for not more than two minutes per hour) opacity shall be computed as follows:
 - a. For the basic part of the standard (i.e., 20 percent opacity) the opacity shall be determined as specified above for a single-valued opacity standard.
 - b. For the short-term average part of the standard, opacity shall be the highest valid short-term average (i.e., two-minute, three-minute average) for the set of observations taken.

In order to be valid, any required average (i.e., a six-minute or two-minute average) shall be based on all of the valid observations in the sequential subset of observations selected, and the selected subset shall contain at least 90 percent of the observations possible for the required averaging time. Each required average shall be calculated by summing the opacity value of each of the valid observations in the appropriate subset, dividing this sum by the number of valid observations in the subset, and rounding the result to the nearest whole number. The number of missing observations in the subset shall be indicated in parenthesis after the subset average value.

[Rule 62-297.401, F.A.C.]

C.19. Particulate Matter. The test method for particulate matter shall be EPA Method 5, incorporated in Chapter 62-297, F.A.C.

[AC 56-141460A]

C.20. Sulfur Dioxide. The test method for sulfur dioxide shall be EPA Method 6 or 6C, incorporated in Chapter 62-297, F.A.C., or by calculation based on fuel analysis for sulfur content of the oil and natural gas. Certified analyses by the appropriate test method(s) from the fuel supplier is acceptable. See specific condition **C.21.**

[AC 56-141460A]

C.21. The fuel sulfur content of the oil or natural gas shall be evaluated using ASTM D1552, ASTM D1072, ASTM D3031, ASTM D4084, or ASTM D3246.

[AC 56-141460A]

C.22. The test method for nitrogen oxides shall be EPA Method 7 or 7E, incorporated in Chapter 62-297, F.A.C.

[AC 56-141460A]

C.23. The test method for volatile organic compounds shall be EPA Method 25A, incorporated in Chapter 62-297, F.A.C.

[AC 56-141460A]

C.24. The test method for carbon monoxide shall be EPA Method 10, incorporated in Chapter 62-297, F.A.C.

[AC 56-141460A]

C.25. Required Number of Test Runs. For mass emission limitations, a compliance test shall consist of three complete and separate determinations of the total air pollutant emission rate through the test section of the stack or duct and three complete and separate determinations of any applicable process variables corresponding to the three distinct time periods during which the stack emission rate was measured provided, however, that three complete and separate determinations shall not be required if the process variables are not subject to variation during a compliance test, or if three determinations are not necessary in order to calculate the unit's emission rate. The three required test runs shall be completed within one consecutive five day period. In the event that a sample is lost or one of the three runs must be discontinued because of circumstances beyond the control of the owner or operator, and a valid third run cannot be obtained within the five day period allowed for the test, the Secretary or his or her designee may accept the results of the two complete runs as proof of compliance, provided that the arithmetic mean of the results of the two complete runs is at least 20 percent below the allowable emission limiting standards.

[Rule 62-297.310(1), F.A.C.]

C.26. Operating Rate During Testing. Testing of emissions shall be conducted with the emissions unit operation at permitted capacity, which is defined as 90 to 100 percent of the maximum operation rate allowed by the permit. If it is impracticable to test at permitted capacity, an emissions unit may be tested at less than the minimum permitted capacity; in this case, subsequent emissions unit operation is limited to 110 percent of the test load until a new test is conducted. Once the emissions unit is so limited, operation at higher capacities is allowed for no more than 15 consecutive days for the purpose of additional compliance testing to regain the authority to operate at the permitted capacity.

[Rules 62-297.310(2) & (2)(b), F.A.C.]

C.27. Calculation of Emission Rate. The indicated emission rate or concentration shall be the arithmetic average of the emission rate or concentration determined by each of the separate test runs unless otherwise specified in a particular test method or applicable rule.

[Rule 62-297.310(3), F.A.C.]

C.28. Applicable Test Procedures.

(a) Required Sampling Time.

1. Unless otherwise specified in the applicable rule, the required sampling time for each test run shall be no less than one hour and no greater than four hours, and the sampling time at each sampling point shall be of equal intervals of at least two minutes.

2. Opacity Compliance Tests. When either EPA Method 9 or DEP Method 9 is specified as the applicable opacity test method, the required minimum period of observation for a compliance test shall be sixty (60) minutes for emissions units which emit or have the potential to emit 100 tons per year or more of particulate matter, and thirty (30) minutes for emissions units which have potential emissions less than 100 tons per year of particulate matter and are not subject to a multiple-valued opacity standard. The opacity test observation period shall include the period during which the highest opacity emissions can reasonably be expected to occur. Exceptions to these requirements are as follows:

c. The minimum observation period for opacity tests conducted by employees or agents of the Department to verify the day-to-day continuing compliance of a unit or activity with an applicable opacity standard shall be twelve minutes.

(b) Minimum Sample Volume. Unless otherwise specified in the applicable rule, the minimum sample volume per run shall be 25 dry standard cubic feet.

(c) Required Flow Rate Range. For EPA Method 5 particulate sampling, acid mist/sulfur dioxide, and fluoride sampling which uses Greenburg Smith type impingers, the sampling nozzle and sampling time shall be selected such that the average sampling rate will be between 0.5 and 1.0 actual cubic feet per minute, and the required minimum sampling volume will be obtained.

(d) Calibration of Sampling Equipment. Calibration of the sampling train equipment shall be conducted in accordance with the schedule shown in Table 297.310-1, attached to this permit.

(e) Allowed Modification to EPA Method 5. When EPA Method 5 is required, the following modification is allowed: the heated filter may be separated from the impingers by a flexible tube.

[Rule 62-297.310(4), F.A.C.]

C.29. Required Stack Sampling Facilities. When a mass emissions stack test is required, the permittee shall comply with the requirements contained in Appendix SS-1, Stack Sampling Facilities, attached to this permit.

[Rule 62-297.310(6), F.A.C.]

C.30. Frequency of Compliance Tests. The following provisions apply only to those emissions units that are subject to an emissions limiting standard for which compliance testing is required.

(a) General Compliance Testing.

2. For excess emission limitations for particulate matter specified in Rule 62-210.700, F.A.C., a compliance test shall be conducted annually while the emissions unit is operating under soot blowing conditions in each federal fiscal year during which soot blowing is part of normal emissions unit operation, except that such test shall not be required in any federal fiscal year in which a fossil fuel steam generator does not burn liquid fuel for more than 400 hours other than during startup.

3. The owner or operator of an emissions unit that is subject to any emission limiting standard shall conduct a compliance test that demonstrates compliance with the applicable emission limiting standard prior to obtaining a renewed operation permit. Emissions units that are required to conduct an annual compliance test may submit the most recent annual compliance test to satisfy the requirements of this provision. In renewing an air operation permit pursuant to Rule 62-210.300(2)(a)3.b., c., or d., F.A.C., the Department shall not require submission of emission compliance test results for any emissions unit that, during the year prior to renewal:

- a. Did not operate; or
- b. In the case of a fuel burning emissions unit, burned liquid fuel for a total of no more than 400 hours.

4. During each federal fiscal year (October 1 - September 30), unless otherwise specified by rule, order, or permit, the owner or operator of each emissions unit shall have a formal compliance test conducted for:

- a. Visible emissions, if there is an applicable standard;
- b. Each of the following pollutants, if there is an applicable standard, and if the emissions unit emits or has the potential to emit: 5 tons per year or more of lead or lead compounds measured as elemental lead; 30 tons per year or more of acrylonitrile; or 100 tons per year or more of any other regulated air pollutant; and
- c. Each NESHAP pollutant, if there is an applicable emission standard.

5. An annual compliance test for particulate matter emissions shall not be required for any fuel burning emissions unit that, in a federal fiscal year, does not burn liquid fuel, other than during startup, for a total of more than 400 hours.

9. The owner or operator shall notify the Department, at least 15 days prior to the date on which each formal compliance test is to begin, of the date, time, and place of each such test, and the test contact person who will be responsible for coordinating and having such test conducted for the owner or operator.

(b) Special Compliance Tests. When the Department, after investigation, has good reason (such as complaints, increased visible emissions or questionable maintenance of control equipment) to believe

that any applicable emission standard contained in a Department rule or in a permit issued pursuant to those rules is being violated, it may require the owner or operator of the emissions unit to conduct compliance tests which identify the nature and quantity of pollutant emissions from the emissions unit and to provide a report on the results of said tests to the Department.

(c) **Waiver of Compliance Test Requirements.** If the owner or operator of an emissions unit that is subject to a compliance test requirement demonstrates to the Department, pursuant to the procedure established in Rule 62-297.620, F.A.C., that the compliance of the emissions unit with an applicable weight emission limiting standard can be adequately determined by means other than the designated test procedure, such as specifying a surrogate standard of no visible emissions for particulate matter sources equipped with a bag house or specifying a fuel analysis for sulfur dioxide emissions, the Department shall waive the compliance test requirements for such emissions units and order that the alternate means of determining compliance be used, provided, however, the provisions of Rule 62-297.310(7)(b), F.A.C., shall apply.

[Rule 62-297.310(7), F.A.C.; and, SIP approved]

C.31. By this permit, annual emissions compliance testing for visible emissions is not required for these emissions units while burning:

- a. only gaseous fuel(s); or
- b. gaseous fuel(s) in combination with any amount of liquid fuel(s) for less than 400 hours per year; or
- c. only liquid fuel(s) for less than 400 hours per year.

[Rule 62-297.310(7)(a)4., F.A.C.]

C.32. Annual and permit renewal compliance testing for particulate matter emissions is not required for these emissions units while burning:

- a. only gaseous fuel(s); or
- b. gaseous fuel(s) in combination with any amount of liquid fuel(s) for less than 400 hours per year; or
- c. only liquid fuel(s) for less than 400 hours per year.

[Rules 62-297.310(7)(a)3. & 5., F.A.C.; and, ASP Number 97-B-01.]

Record keeping and Reporting Requirements

C.33. In the case of excess emissions resulting from malfunctions, each owner or operator shall notify the Department in accordance with Rule 62-4.130, F.A.C. A full written report on the malfunctions shall be submitted in a quarterly report, if requested by the Department.

[Rule 62-210.700(6), F.A.C.]

C.34. All recorded data shall be maintained on file by the Source for a period of five years.

[Rule 62-213.440, F.A.C.]

C.35. Submit to the Department a written report of emissions in excess of emission limiting standards as set forth in Rule 62-296.405(1), F.A.C., for each calendar quarter. The nature and cause of the excess emissions shall be explained. This report does not relieve the owner or operator of the legal liability for violations. All recorded data shall be maintained on file by the Source for a period of five years. [Rules 62-213.440 and 62-296.405(1)(g), F.A.C.]

C.36. Test Reports.

- (a) The owner or operator of an emissions unit for which a compliance test is required shall file a report with the Department on the results of each such test.
- (b) The required test report shall be filed with the Department as soon as practical but no later than 45 days after the last sampling run of each test is completed.
- (c) The test report shall provide sufficient detail on the emissions unit tested and the test procedures used to allow the Department to determine if the test was properly conducted and the test results properly computed. As a minimum, the test report, other than for an EPA or DEP Method 9 test, shall provide the following information:
 - 1. The type, location, and designation of the emissions unit tested.
 - 2. The facility at which the emissions unit is located.
 - 3. The owner or operator of the emissions unit.
 - 4. The normal type and amount of fuels used and materials processed, and the types and amounts of fuels used and material processed during each test run.
 - 5. The means, raw data and computations used to determine the amount of fuels used and materials processed, if necessary to determine compliance with an applicable emission limiting standard.
 - 6. The type of air pollution control devices installed on the emissions unit, their general condition, their normal operating parameters (pressure drops, total operating current and GPM scrubber water), and their operating parameters during each test run.
 - 7. A sketch of the duct within 8 stack diameters upstream and 2 stack diameters downstream of the sampling ports, including the distance to any upstream and downstream bends or other flow disturbances.
 - 8. The date, starting time and duration of each sampling run.
 - 9. The test procedures used, including any alternative procedures authorized pursuant to Rule 62-297.620, F.A.C. Where optional procedures are authorized in this chapter, indicate which option was used.
 - 10. The number of points sampled and configuration and location of the sampling plane.
 - 11. For each sampling point for each run, the dry gas meter reading, velocity head, pressure drop across the stack, temperatures, average meter temperatures and sample time per point.
 - 12. The type, manufacturer and configuration of the sampling equipment used.
 - 13. Data related to the required calibration of the test equipment.
 - 14. Data on the identification, processing and weights of all filters used.
 - 15. Data on the types and amounts of any chemical solutions used.

16. Data on the amount of pollutant collected from each sampling probe, the filters, and the impingers, are reported separately for the compliance test.

17. The names of individuals who furnished the process variable data, conducted the test, analyzed the samples and prepared the report.

18. All measured and calculated data required to be determined by each applicable test procedure for each run.

19. The detailed calculations for one run that relate the collected data to the calculated emission rate.

20. The applicable emission standard, and the resulting maximum allowable emission rate for the emissions unit, plus the test result in the same form and unit of measure.

21. A certification that, to the knowledge of the owner or his authorized agent, all data submitted are true and correct. When a compliance test is conducted for the Department or its agent, the person who conducts the test shall provide the certification with respect to the test procedures used. The owner or his authorized agent shall certify that all data required and provided to the person conducting the test are true and correct to his knowledge.

[Rules 62-213.440 and 62-297.310(8), F.A.C.]

C.37. The permittee must notify the DEP within 24 hours after commencement of oil firing and furnish the following information:

- a. Duration or projected duration of the event.
- b. Quantity of fuel oil burned or projected to be burned.
- c. A description of significant circumstances precipitating the event, which shall include:
 - (1) Availability of power for purchase
 - (2) Availability of electric transmission capacity relating to power purchases
 - (3) Availability of natural gas
 - (4) Availability of the permittee's generation sources

[OGC Case No. 91-1610: Final Order filed 7/21/92]

Section III. Emissions Unit(s) and Conditions.

Subsection D. This section addresses the following emissions unit.

E.U.

<u>ID No.</u>	<u>Brief Description</u>
-008	56.1 MW Boiler - Unit #8

H. D. King Unit #8 is a nominal 56.1 megawatt (electric)fossil fuel fired steam generator. The emission unit is fired on natural gas with a maximum heat input of 611.0 MMBtu per hour. No. 6 residual fuel oil is fired as a secondary/emergency fuel. Emissions are uncontrolled.

{Permitting note(s): The emissions unit is regulated under Acid Rain, Phase II; and NSPS - 40 CFR 60, Subpart D, Standards of Performance for Fossil-Fuel Fired Steam Generators for Which Construction is Commenced After August 17, 1971, adopted and incorporated by reference in Rule 62-204.800(7), F.A.C. Fossil fuel fired steam generator # 8 began commercial operation in May 1976.}

The following specific conditions apply to the emissions unit(s) listed above:

Essential Potential to Emit (PTE) Parameters

D.1. Permitted Capacity. The maximum operation heat input rate is as follows:

<u>Unit No.</u>	<u>MMBtu/hr Heat Input</u>	<u>Fuel Type</u>
8	611.0	Natural Gas
	611.0	No. 6 Fuel Oil

See specific condition **E.1.**

[Rules 62-4.160(2), 62-210.200(PTE) and 62-296.406, F.A.C.; and, OGC Case No. 91-1610: Final Order filed 7/21/92]

D.2. Emissions Unit Operating Rate Limitation After Testing. See specific condition **D.26.**
[Rule 62-297.310(2), F.A.C.]

D.3. Methods of Operation. Fuels.

- This emissions unit fires natural gas as the primary fuel.
 - This emissions unit fires No. 6 residual fuel oil as the emergency back-up fuel. The use of No. 6 residual fuel oil is limited. See specific conditions **D.45.** and **E.2.**
- [Rule 62-213.410, F.A.C.; and, OGC Case No. 91-1610: Final Order filed 7/21/92]

D.4. Hours of Operation. This emissions unit may operate continuously, i.e., 8,760 hours/year and shall meet the requirements of specific condition **E.1.** See specific condition **E.1.**
[Rule 62-210.200(PTE), F.A.C.; and, OGC Case No. 91-1610: Final Order filed 7/21/92]

Emission Limitations and Standards

{Permitting note: Table 1-1, Summary of Air Pollutant Standards and Terms, summarizes information for convenience purposes only. This table does not supersede any of the terms or conditions of this permit.}

D.5. Visible Emissions. Visible emissions shall not exceed 5 percent opacity when firing natural gas. Visible emissions shall not exceed 20 percent opacity when firing fuel oil, except for one six-minute period per hour during which opacity shall not exceed 27 percent.
[40 CFR 60.42(a)(2); and, OGC Case No. 91-1610: Final Order filed 7/21/92]

D.6. Visible emissions - Soot Blowing and Load Change. Visible emissions shall not exceed 60 percent opacity during the 3-hours in any 24 hour period of excess emissions allowed for boiler cleaning (soot blowing) and load change.

A load change occurs when the operational capacity of a unit is in the 10 percent to 100 percent capacity range, other than startup or shutdown, which exceeds 10 percent of the unit's rated capacity and which occurs at a rate of 0.5 percent per minute or more.
[Rule 62-210.700(3), F.A.C.]

D.7. Particulate Matter. Particulate Matter emissions shall not exceed 0.945 pound per hour when firing natural gas and 0.1 pound per million Btu when firing No. 6 residual fuel oil. See specific condition **E.3.**
[OGC Case No. 91-1610: Final Order filed 7/21/92]

D.8. Particulate Matter - Soot Blowing and Load Change. Particulate matter emissions shall not exceed an average of 0.3 pound per million Btu heat input during the 3-hours in any 24-hour period of excess emissions allowed for boiler cleaning (soot blowing) and load change. See specific condition **E.3.**
[Rule 62-210.700(3), F.A.C.]

D.9. Sulfur Dioxide. Sulfur Dioxide emissions shall not exceed 2.5 pounds per hour when firing natural gas and 0.80 pound per million Btu heat input when firing No. 6 residual fuel oil. See specific condition **E.3.**
[AC 56-141460A; and, OGC Case No. 91-1610: Final Order filed 7/21/92]

D.10. Nitrogen Oxides. On and after the date on which the performance test required to be conducted by 40 CFR 60.8 is completed, no owner or operator subject to the provisions of 40 CFR 60, Subpart D, shall cause to be discharged into the atmosphere from any affected facility any gases which contain nitrogen oxides, expressed as NO₂ in excess of:

- (1) 86 nanograms per joule heat input (0.20 lb per million Btu) derived from gaseous fossil fuel.
- (2) 129 nanograms per joule heat input (0.30 lb per million Btu) derived from liquid fossil fuel.

See specific condition **E.3.**

[40 CFR 60.44(a)(1) & (2); and, OGC Case No. 91-1610: Final Order filed 7/21/92]

D.11. Volatile Organic Compounds. Volatile Organic Compounds emissions shall not exceed 0.441 pound per hour when firing natural gas. See specific condition **E.3.**

[OGC Case No. 91-1610: Final Order filed 7/21/92]

D.12. Carbon Monoxide. Carbon Monoxide emissions shall not exceed 12.59 pounds per hour when firing natural gas. See specific condition **E.3.**

[OGC Case No. 91-1610: Final Order filed 7/21/92]

Excess Emissions

D.13. Periods of excess emissions and monitoring systems (MS) downtime that shall be reported are defined as follows:

(1) Opacity. Excess emissions are defined as any six-minute period during which the average opacity of emissions exceeds 20 percent opacity, except that one six-minute average per hour of up to 27 percent opacity need not be reported

(3) Nitrogen oxides. Excess emissions for affected facilities using a continuous monitoring system for measuring nitrogen oxides are defined as any three-hour period during which the average emissions (arithmetic average of three contiguous one-hour periods) exceed the applicable standards under 40 CFR 60.44.

[40 CFR 60.45(g)(1) & (3)]

D.14. Excess emissions resulting from malfunction shall be permitted provided that best operational practices to minimize emissions are adhered to and the duration of excess emissions shall be minimized but in no case exceed two hours in any 24 hour period unless specifically authorized by the Department for longer duration.

[Rule 62-210.700(1), F.A.C.]

D.15. Excess emissions resulting from startup or shutdown shall be permitted provided that best operational practices to minimize emissions are adhered to and the duration of excess emissions shall be minimized.

[Rule 62-210.700(2), F.A.C.]

D.16. Excess emissions which are caused entirely or in part by poor maintenance, poor operation, or any other equipment or process failure which may reasonably be prevented during startup, shutdown or malfunction shall be prohibited.

[Rule 62-210.700(4), F.A.C.]

Monitoring of Operations

D.17. Determination of Process Variables.

(a) Required Equipment. The owner or operator of an emissions unit for which compliance tests are required shall install, operate, and maintain equipment or instruments necessary to determine process variables, such as process weight input or heat input, when such data are needed in conjunction with emissions data to determine the compliance of the emissions unit with applicable emission limiting standards.

(b) Accuracy of Equipment. Equipment or instruments used to directly or indirectly determine process variables, including devices such as belt scales, weight hoppers, flow meters, and tank scales, shall be calibrated and adjusted to indicate the true value of the parameter being measured with sufficient accuracy to allow the applicable process variable to be determined within 10% of its true value.

[Rule 62-297.310(5), F.A.C.]

Test Methods and Procedures

{Permitting note: Table 2-1, Summary of Compliance Requirements, summarizes information for convenience purposes only. This table does not supersede any of the terms or conditions of this permit.}

D.18. Visible emissions. The test method for visible emissions shall be EPA Method 9 when firing natural gas and DEP Method 9 when firing No. 6 residual fuel oil, incorporated in Chapter 62-297, F.A.C. See specific condition **D.19.**

[Rules 62-213.440 and 62-297.401, F.A.C.; and, OGC Case No. 91-1610: Final Order filed 7/21/92]

D.19. DEP Method 9. The provisions of EPA Method 9 (40 CFR 60, Appendix A) are adopted by reference with the following exceptions:

1. EPA Method 9, Section 2.4, Recording Observations. Opacity observations shall be made and recorded by a certified observer at sequential fifteen second intervals during the required period of observation.
2. EPA Method 9, Section 2.5, Data Reduction. For a set of observations to be acceptable, the observer shall have made and recorded, or verified the recording of, at least 90 percent of the possible individual observations during the required observation period. For single-valued opacity standards (e.g., 20 percent opacity), the test result shall be the highest valid six-minute average for the set of observations taken. For multiple-valued opacity standards (e.g., 20 percent opacity, except that an

opacity of 40 percent is permissible for not more than two minutes per hour) opacity shall be computed as follows:

- a. For the basic part of the standard (i.e., 20 percent opacity) the opacity shall be determined as specified above for a single-valued opacity standard.
- b. For the short-term average part of the standard, opacity shall be the highest valid short-term average (i.e., two-minute, three-minute average) for the set of observations taken.

In order to be valid, any required average (i.e., a six-minute or two-minute average) shall be based on all of the valid observations in the sequential subset of observations selected, and the selected subset shall contain at least 90 percent of the observations possible for the required averaging time. Each required average shall be calculated by summing the opacity value of each of the valid observations in the appropriate subset, dividing this sum by the number of valid observations in the subset, and rounding the result to the nearest whole number. The number of missing observations in the subset shall be indicated in parenthesis after the subset average value.

[Rule 62-297.401, F.A.C.]

D.20. Particulate Matter. The test method for particulate matter shall be EPA Method 5, incorporated in Chapter 62-297, F.A.C.

[AC 56-141460A]

D.21. Sulfur Dioxide. The test method for sulfur dioxide shall be EPA Method 6 or 6C, incorporated in Chapter 62-297, F.A.C., or by calculation based on fuel analysis for sulfur content of the oil and natural gas. Certified analyses by the appropriate test method(s) from the fuel supplier is acceptable. See specific condition **D.22.**

[AC 56-141460A]

D.22. The fuel sulfur content of the oil or natural gas shall be evaluated using ASTM D1552, ASTM D1072, ASTM D3031, ASTM D4084, or ASTM D3246.

[AC 56-141460A]

D.23. The test method for nitrogen oxides shall be EPA Method 7 or 7E, incorporated in Chapter 62-297, F.A.C.

[AC 56-141460A]

D.24. The test method for volatile organic compounds shall be EPA Method 25A, incorporated in Chapter 62-297, F.A.C.

[AC 56-141460A]

D.25. The test method for carbon monoxide shall be EPA Method 10, incorporated in Chapter 62-297, F.A.C.

[AC 56-141460A]

D.26. The owner or operator shall determine compliance with the particulate matter, SO₂, and NO_x standards as follows:

(1) The emission rate (E) of particulate matter, SO₂, or NO_x shall be computed for each run using the following equation:

$$E = C F_d (20.9)/(20.9 - \% O_2)$$

E = emission rate of pollutant, ng/J (1b/million Btu).

C = concentration of pollutant, ng/dscm (1b/dscf).

% O₂ = oxygen concentration, percent dry basis.

F_d = factor as determined from Method 19.

(2) Method 5 shall be used to determine the particulate matter concentration (C) at affected facilities without wet flue-gas-desulfurization (FGD) systems.

(i) The sampling time and sample volume for each run shall be at least 60 minutes and 0.85 dscm (30 dscf). The probe and filter holder heating systems in the sampling train may be set to provide a gas temperature no greater than 160 ± 14 °C (320 ± 25 °F).

(ii) The emission rate correction factor, integrated or grab sampling and analysis procedure of Method 3B shall be used to determine the O₂ concentration (%O₂). The O₂ sample shall be obtained simultaneously with, and at the same traverse points as, the particulate sample. If the grab sampling procedure is used, the O₂ concentration for the run shall be the arithmetic mean of all the individual O₂ sample concentrations at each traverse point.

(iii) If the particulate run has more than 12 traverse points, the O₂ traverse points may be reduced to 12 provided that Method 1 is used to locate the 12 O₂ traverse points.

(3) Method 9 and the procedures in 40 CFR 60.11 shall be used to determine opacity.

(4) Method 6 shall be used to determine the SO₂ concentration.

(i) The sampling site shall be the same as that selected for the particulate sample. The sampling location in the duct shall be at the centroid of the cross section or at a point no closer to the walls than 1 m (3.28 ft). The sampling time and sample volume for each sample run shall be at least 20 minutes and 0.020 dscm (0.71 dscf). Two samples shall be taken during a 1-hour period, with each sample taken within a 30-minute interval.

(ii) The emission rate correction factor, integrated sampling and analysis procedure of Method 3B shall be used to determine the O₂ concentration (%O₂). The O₂ sample shall be taken simultaneously with, and at the same point as, the SO₂ sample. The SO₂ emission rate shall be computed for each pair of SO₂ and O₂ samples. The SO₂ emission rate (E) for each run shall be the arithmetic mean of the results of the two pairs of samples.

(5) Method 7 shall be used to determine the NO_x concentration.

(i) The sampling site and location shall be the same as for the SO₂ sample. Each run shall consist of four grab samples, with each sample taken at about 15-minute intervals.

(ii) For each NO_x sample, the emission rate correction factor, grab sampling and analysis procedure of Method 3B shall be used to determine the O₂ concentration (%O₂). The sample shall be taken simultaneously with, and at the same point as, the NO_x sample.

(iii) The NO_x emission rate shall be computed for each pair of NO_x and O₂ samples. The NO_x emission rate (E) for each run shall be the arithmetic mean of the results of the four pairs of samples.

[40 CFR 60.46(b)(1), (2), (3), (4), & (5)]

D.27. The owner or operator may use the following as alternatives to the reference methods and procedures in 40 CFR 60.46 or in other sections as specified:

(1) The emission rate (E) of particulate matter, SO₂ and NO_x may be determined by using the F_c factor, provided that the following procedure is used:

(i) The emission rate (E) shall be computed using the following equation:

$$E = C F_c (100 / \% \text{ CO}_2)$$

where:

E = emission rate of pollutant, ng/J (lb/million Btu).

C = concentration of pollutant, ng/dscm (lb/dscf).

% CO₂ = carbon dioxide concentration, percent dry basis.

F_c = factor as determined in appropriate sections of Method 19.

(ii) If and only if the average F_c factor in Method 19 is used to calculate E and either E is from 0.97 to 1.00 of the emission standard or the relative accuracy of a continuous emission monitoring system is from 17 to 20 percent, then three runs of Method 3B shall be used to determine the O₂ and CO₂ concentration according to the procedures in 40 CFR 60.46(b)(2)(ii), (4)(ii), or (5)(ii). Then if F_o (average of three runs), as calculated from the equation in Method 3B, is more than ± 3 percent than the average F_o value, as determined from the average values of F_d and F_c in Method 19, i.e., $F_{oa} = 0.209 (F_{da} / F_{ca})$, then the following procedure shall be followed:

(A) When F_o is less than 0.97 F_{oa}, then E shall be increased by that proportion under 0.97 F_{oa}, e.g., if F_o is 0.95 F_{oa}, E shall be increased by 2 percent. This recalculated value shall be used to determine compliance with the emission standard.

(B) When F_o is less than 0.97 F_{oa} and when the average difference (\bar{d}) between the continuous monitor minus the reference methods is negative, then E shall be increased by that proportion under 0.97 F_{oa}, e.g., if F_o is 0.95 F_{oa}, E shall be increased by 2 percent. This recalculated value shall be used to determine compliance with the relative accuracy specification.

(C) When F_o is greater than $1.03 F_{oa}$ and when \bar{d} is positive, then E shall be decreased by that proportion over $1.03 F_{oa}$, e.g., if F_o is $1.05 F_{oa}$, E shall be decreased by 2 percent. This recalculated value shall be used to determine compliance with the relative accuracy specification.

(2) For Method 5 or 5B, Method 17 may be used at facilities with or without wet FGD systems if the stack gas temperature at the sampling location does not exceed an average temperature of 160°C (320°F). Method 17 shall not be used after wet FGD systems if the effluent gas is saturated or laden with water droplets.

(3) Particulate matter and SO_2 may be determined simultaneously with the Method 5 train provided that the following changes are made:

(i) The filter and impinger apparatus in sections 2.1.5 and 2.1.6 of Method 8 is used in place of the condenser (section 2.1.7) of Method 5.

(ii) All applicable procedures in Method 8 for the determination of SO_2 (including moisture) are used.

(4) For Method 6, Method 6C may be used. Method 6A may also be used whenever Methods 6 and 3B data are specified to determine the SO_2 emission rate, under the conditions in 40 CFR 60.46(d)(1).

(5) For Method 7, Method 7A, 7C, 7D, or 7E may be used. If Method 7C, 7D, or 7E is used, the sampling time for each run shall be at least 1 hour and the integrated sampling approach shall be used to determine the O_2 concentration ($\%\text{O}_2$) for the emission rate correction factor.

(6) For Method 3, Method 3A or 3B may be used.

(7) For Method 3B, Method 3A may be used.

[40 CFR 60.46(d)(1), (2), (3), (4), (5), (6), & (7)]

D.28. Required Number of Test Runs. For mass emission limitations, a compliance test shall consist of three complete and separate determinations of the total air pollutant emission rate through the test section of the stack or duct and three complete and separate determinations of any applicable process variables corresponding to the three distinct time periods during which the stack emission rate was measured provided, however, that three complete and separate determinations shall not be required if the process variables are not subject to variation during a compliance test, or if three determinations are not necessary in order to calculate the unit's emission rate. The three required test runs shall be completed within one consecutive five day period. In the event that a sample is lost or one of the three runs must be discontinued because of circumstances beyond the control of the owner or operator, and a valid third run cannot be obtained within the five day period allowed for the test, the Secretary or his or her designee may accept the results of the two complete runs as proof of compliance, provided that the arithmetic mean of the results of the two complete runs is at least 20 percent below the allowable emission limiting standards.

[Rule 62-297.310(1), F.A.C.]

D.29. Operating Rate During Testing. Testing of emissions shall be conducted with the emissions unit operation at permitted capacity, which is defined as 90 to 100 percent of the maximum operation rate allowed by the permit. If it is impracticable to test at permitted capacity, an emissions unit may be tested at less than the minimum permitted capacity; in this case, subsequent emissions unit operation is limited to 110 percent of the test load until a new test is conducted. Once the emissions unit is so limited, operation at higher capacities is allowed for no more than 15 consecutive days for the purpose of additional compliance testing to regain the authority to operate at the permitted capacity.
[Rules 62-297.310(2) & (2)(b), F.A.C.]

D.30. Calculation of Emission Rate. The indicated emission rate or concentration shall be the arithmetic average of the emission rate or concentration determined by each of the separate test runs unless otherwise specified in a particular test method or applicable rule.
[Rule 62-297.310(3), F.A.C.]

D.31. Applicable Test Procedures.

(a) Required Sampling Time.

1. Unless otherwise specified in the applicable rule, the required sampling time for each test run shall be no less than one hour and no greater than four hours, and the sampling time at each sampling point shall be of equal intervals of at least two minutes.
2. Opacity Compliance Tests. When either EPA Method 9 or DEP Method 9 is specified as the applicable opacity test method, the required minimum period of observation for a compliance test shall be sixty (60) minutes for emissions units which emit or have the potential to emit 100 tons per year or more of particulate matter, and thirty (30) minutes for emissions units which have potential emissions less than 100 tons per year of particulate matter and are not subject to a multiple-valued opacity standard. The opacity test observation period shall include the period during which the highest opacity emissions can reasonably be expected to occur. Exceptions to these requirements are as follows:

- c. The minimum observation period for opacity tests conducted by employees or agents of the Department to verify the day-to-day continuing compliance of a unit or activity with an applicable opacity standard shall be twelve minutes.

(b) Minimum Sample Volume. Unless otherwise specified in the applicable rule, the minimum sample volume per run shall be 25 dry standard cubic feet.

(c) Required Flow Rate Range. For EPA Method 5 particulate sampling, acid mist/sulfur dioxide, and fluoride sampling which uses Greenburg Smith type impingers, the sampling nozzle and sampling time shall be selected such that the average sampling rate will be between 0.5 and 1.0 actual cubic feet per minute, and the required minimum sampling volume will be obtained.

(d) Calibration of Sampling Equipment. Calibration of the sampling train equipment shall be conducted in accordance with the schedule shown in Table 297.310-1, attached to this permit.

(e) Allowed Modification to EPA Method 5. When EPA Method 5 is required, the following modification is allowed: the heated filter may be separated from the impingers by a flexible tube.

[Rule 62-297.310(4), F.A.C.]

D.32. Required Stack Sampling Facilities. When a mass emissions stack test is required, the permittee shall comply with the requirements contained in Appendix SS-1, Stack Sampling Facilities, attached to this permit.

[Rule 62-297.310(6), F.A.C.]

D.33. Frequency of Compliance Tests. The following provisions apply only to those emissions units that are subject to an emissions limiting standard for which compliance testing is required.

(a) General Compliance Testing.

2. For excess emission limitations for particulate matter specified in Rule 62-210.700, F.A.C., a compliance test shall be conducted annually while the emissions unit is operating under soot blowing conditions in each federal fiscal year during which soot blowing is part of normal emissions unit operation, except that such test shall not be required in any federal fiscal year in which a fossil fuel steam generator does not burn liquid fuel for more than 400 hours other than during startup.

3. The owner or operator of an emissions unit that is subject to any emission limiting standard shall conduct a compliance test that demonstrates compliance with the applicable emission limiting standard prior to obtaining a renewed operation permit. Emissions units that are required to conduct an annual compliance test may submit the most recent annual compliance test to satisfy the requirements of this provision. In renewing an air operation permit pursuant to Rule 62-210.300(2)(a)3.b., c., or d., F.A.C., the Department shall not require submission of emission compliance test results for any emissions unit that, during the year prior to renewal:

a. Did not operate; or

b. In the case of a fuel burning emissions unit, burned liquid fuel for a total of no more than 400 hours.

4. During each federal fiscal year (October 1 - September 30), unless otherwise specified by rule, order, or permit, the owner or operator of each emissions unit shall have a formal compliance test conducted for:

a. Visible emissions, if there is an applicable standard;

b. Each of the following pollutants, if there is an applicable standard, and if the emissions unit emits or has the potential to emit: 5 tons per year or more of lead or lead compounds measured as elemental lead; 30 tons per year or more of acrylonitrile; or 100 tons per year or more of any other regulated air pollutant; and

c. Each NESHAP pollutant, if there is an applicable emission standard.

5. An annual compliance test for particulate matter emissions shall not be required for any fuel burning emissions unit that, in a federal fiscal year, does not burn liquid fuel, other than during startup, for a total of more than 400 hours.

9. The owner or operator shall notify the Department, at least 15 days prior to the date on which each formal compliance test is to begin, of the date, time, and place of each such test, and the test contact person who will be responsible for coordinating and having such test conducted for the owner or operator.

(b) Special Compliance Tests. When the Department, after investigation, has good reason (such as complaints, increased visible emissions or questionable maintenance of control equipment) to believe

that any applicable emission standard contained in a Department rule or in a permit issued pursuant to those rules is being violated, it may require the owner or operator of the emissions unit to conduct compliance tests which identify the nature and quantity of pollutant emissions from the emissions unit and to provide a report on the results of said tests to the Department.

(c) Waiver of Compliance Test Requirements. If the owner or operator of an emissions unit that is subject to a compliance test requirement demonstrates to the Department, pursuant to the procedure established in Rule 62-297.620, F.A.C., that the compliance of the emissions unit with an applicable weight emission limiting standard can be adequately determined by means other than the designated test procedure, such as specifying a surrogate standard of no visible emissions for particulate matter sources equipped with a bag house or specifying a fuel analysis for sulfur dioxide emissions, the Department shall waive the compliance test requirements for such emissions units and order that the alternate means of determining compliance be used, provided, however, the provisions of Rule 62-297.310(7)(b), F.A.C., shall apply.

[Rule 62-297.310(7), F.A.C.; and, SIP approved]

D.34. By this permit, annual emissions compliance testing for visible emissions is not required for these emissions units while burning:

- a. only gaseous fuel(s); or
- b. gaseous fuel(s) in combination with any amount of liquid fuel(s) for less than 400 hours per year; or
- c. only liquid fuel(s) for less than 400 hours per year.

[Rule 62-297.310(7)(a)4., F.A.C.]

D.35. Annual and permit renewal compliance testing for particulate matter emissions is not required for these emissions units while burning:

- a. only gaseous fuel(s); or
- b. gaseous fuel(s) in combination with any amount of liquid fuel(s) for less than 400 hours per year; or
- c. only liquid fuel(s) for less than 400 hours per year.

[Rules 62-297.310(7)(a)3. & 5., F.A.C.; and, ASP Number 97-B-01.]

Continuous Monitoring Requirements

D.36. The owner or operator shall install, calibrate, maintain, and operate continuous monitoring systems for measuring nitrogen oxide emissions, and oxygen or carbon dioxide.

[40 CFR 60.45(a) & (b)]

D.37. For performance evaluations under 40 CFR 60.13(c) and calibration checks under 40 CFR 60.13(d), the following procedures shall be used:

(2) Sulfur dioxide or nitric oxide, as applicable, shall be used for preparing calibration gas mixtures under Performance Specification 2 of Appendix B to 40 CFR 60.

(3) For affected facilities burning fossil fuel(s), the span value for a continuous monitoring system measuring the opacity of emissions shall be 80, 90, or 100 percent and for a continuous monitoring system measuring sulfur oxides or nitrogen oxides the span value shall be determined as follows:

[In parts per million]

Fossil fuel	Span value for sulfur dioxide	Span value for nitrogen oxides
Gas.....	{1}	500
Liquid.....	1,000	500
Solid.....	1,500	1000
Combinations.....	$1,000y+1,500z$	$500(x+y)+1,000z$

{1} Not applicable.

where:

x = the fraction of total heat input derived from gaseous fossil fuel, and

y = the fraction of total heat input derived from liquid fossil fuel, and

z = the fraction of total heat input derived from solid fossil fuel.

[40 CFR 60.45(c)(2) & (3)]

D.38. For any continuous monitoring system installed under 40 CFR 60.45(a), the following conversion procedures shall be used to convert the continuous monitoring data into units of the applicable standards (ng/J, lb/million Btu):

(1) When a continuous monitoring system for measuring oxygen is selected, the measurement of the pollutant concentration and oxygen concentration shall each be on a consistent basis (wet or dry). Alternative procedures approved by the Administrator shall be used when measurements are on a wet basis. When measurements are on a dry basis, the following conversion procedure shall be used:

$$E = CF[20.9/(20.9 - \text{percent } O_2)]$$

where:

E, C, F, and % O_2 are determined under 40 CFR 60.45(f).

[40 CFR 60.45(e)(1)]

D.39. The values used in the equations under 40 CFR 60.45(e) (1) are derived as follows:

(1) E = pollutant emissions, ng/J (lb/million Btu).

(2) C = pollutant concentration, ng/dscm (lb/dscf), determined by multiplying the average concentration (ppm) for each one-hour period by 4.15×10^4 M ng/dscm per ppm (2.59×10^{-9} M lb/dscf per ppm) where M = pollutant molecular weight, g/g-mole (lb/lb-mole). M = 64.07 for sulfur dioxide and 46.01 for nitrogen oxides.

(3) % O₂, % CO₂ = oxygen or carbon dioxide volume (expressed as percent), determined with equipment specified under 40 CFR 60.45(a).

(4) F, F_c = a factor representing a ratio of the volume of dry flue gases generated to the calorific value of the fuel combusted (F), and a factor representing a ratio of the volume of carbon dioxide generated to the calorific value of the fuel combusted (F_c), respectively. Values of F and F_c are given as follows:

(iii) For liquid fossil fuels including crude, residual, and distillate oils, $F = 2.476 \times 10^{-7}$ dscm/J (9,220 dscf/million Btu) and $F_c = 0.384 \times 10^{-7}$ scm CO₂ /J (1,430 scf CO₂ /million Btu).

(iv) For gaseous fossil fuels, $F = 2.347 \times 10^{-7}$ dscm/J (8,740 dscf/million Btu). For natural gas, propane, and butane fuels, $F_c = 0.279 \times 10^{-7}$ scm CO₂ /J (1,040 scf CO₂ /million Btu) for natural gas, 0.322×10^{-7} scm CO₂ /J (1,200 scf CO₂ /million Btu) for propane, and 0.338×10^{-7} scm CO₂ /J (1,260 scf CO₂ /million Btu) for butane.

(5) The owner or operator may use the following equation to determine an F factor (dscm/J or dscf/million Btu) on a dry basis (if it is desired to calculate F on a wet basis, consult the Administrator) or F_c factor (scm CO₂ /J, or scf CO₂ /million Btu) on either basis in lieu of the F or F_c factors specified in 40 CFR 60.45(f)(4):

$$F = 10^{-6} \frac{[227.2 (\text{pct. H}) + 95.5 (\text{pct. C}) + 35.6 (\text{pct. S}) + 8.7 (\text{pct. N}) - 28.7 (\text{pct. O})]}{\text{GCV}}$$

$$F_c = \frac{2.0 \times 10^{-5} (\text{pct. C})}{\text{GCV}} \\ (\text{SI units})$$

$$F = 10^6 \frac{3.64(\%H) + 1.53(\%C) + 0.57(\%S) + 0.14(\%N) - 0.46(\%O)}{\text{GCV}} \\ (\text{English units})$$

$$F_c = \frac{321 \times 10^3 (\%C)}{\text{GCV}} \\ (\text{English units})$$

(i) H, C, S, N, and O are content by weight of hydrogen, carbon, sulfur, nitrogen, and oxygen (expressed as percent), respectively, as determined on the same basis as GCV by ultimate analysis of the fuel fired, using ASTM method D3178-74 or D3176 (solid fuels) or computed from results using ASTM method D1137-53(75), D1945-64(76), or D1946-77 (gaseous fuels) as applicable. (These five methods are incorporated by reference-see 40 CFR 60.17.)

(ii) GCV is the gross calorific value (kJ/kg, Btu/lb) of the fuel combusted determined by the ASTM test methods D2015-77 for solid fuels and D1826-77 for gaseous fuels as applicable.

(These two methods are incorporated by reference-see 40 CFR 60.17.)

(6) For affected facilities firing combinations of fossil fuels, the F or F_c factors determined by paragraphs 40 CFR 60.45(f)(4) or (f)(5) shall be prorated in accordance with the applicable formula as follows:

$$F = \sum_{i=1}^n X_i F_i \quad \text{or} \quad F_c = \sum_{i=1}^n X_i (F_c)_i$$

where:

X_i = the fraction of total heat input derived from each type of fuel (e.g. natural gas, bituminous coal, wood residue, etc.)

F_i or $(F_c)_i$ = the applicable F or F_c factor for each fuel type determined in accordance with paragraphs (f)(4) and (f)(5) of this section.

n = the number of fuels being burned in combination.

[40 CFR 60.45(f)(1), (2), (3), (4), (5), & (6)]

Recordkeeping and Reporting Requirements

D.40. Excess emission and monitoring system performance reports shall be submitted to the Administrator for every calendar quarter. All quarterly reports shall be postmarked by the 30th day following the end of each calendar quarter. Each excess emission and monitoring systems performance report shall include the information required in 40 CFR 60.7(c). The summary report form shall contain the information and be in the format shown in figure 1 (attached to this permit) unless otherwise specified by the Administrator. One summary report form shall be submitted for each pollutant monitored at each affected facility.

[40 CFR 60.7(d) & 60.45(g)]

D.41. In the case of excess emissions resulting from malfunctions, each owner or operator shall notify the Department in accordance with Rule 62-4.130, F.A.C. A full written report on the malfunctions shall be submitted in a quarterly report, if requested by the Department.

[Rule 62-210.700(6), F.A.C.]

D.42. All recorded data shall be maintained on file by the Source for a period of five years.

[Rule 62-213.440, F.A.C.]

D.43. Submit to the Department a written report of emissions in excess of emission limiting standards as set forth in Rule 62-296.405(1), F.A.C., for each calendar quarter. The nature and cause of the excess emissions shall be explained. This report does not relieve the owner or operator of the legal liability for violations. All recorded data shall be maintained on file by the Source for a period of five years. [Rules 62-213.440 and 62-296.405(1)(g), F.A.C.]

D.44. Test Reports.

- (a) The owner or operator of an emissions unit for which a compliance test is required shall file a report with the Department on the results of each such test.
- (b) The required test report shall be filed with the Department as soon as practical but no later than 45 days after the last sampling run of each test is completed.
- (c) The test report shall provide sufficient detail on the emissions unit tested and the test procedures used to allow the Department to determine if the test was properly conducted and the test results properly computed. As a minimum, the test report, other than for an EPA or DEP Method 9 test, shall provide the following information:
 - 1. The type, location, and designation of the emissions unit tested.
 - 2. The facility at which the emissions unit is located.
 - 3. The owner or operator of the emissions unit.
 - 4. The normal type and amount of fuels used and materials processed, and the types and amounts of fuels used and material processed during each test run.
 - 5. The means, raw data and computations used to determine the amount of fuels used and materials processed, if necessary to determine compliance with an applicable emission limiting standard.
 - 6. The type of air pollution control devices installed on the emissions unit, their general condition, their normal operating parameters (pressure drops, total operating current and GPM scrubber water), and their operating parameters during each test run.
 - 7. A sketch of the duct within 8 stack diameters upstream and 2 stack diameters downstream of the sampling ports, including the distance to any upstream and downstream bends or other flow disturbances.
 - 8. The date, starting time and duration of each sampling run.
 - 9. The test procedures used, including any alternative procedures authorized pursuant to Rule 62-297.620, F.A.C. Where optional procedures are authorized in this chapter, indicate which option was used.
 - 10. The number of points sampled and configuration and location of the sampling plane.
 - 11. For each sampling point for each run, the dry gas meter reading, velocity head, pressure drop across the stack, temperatures, average meter temperatures and sample time per point.
 - 12. The type, manufacturer and configuration of the sampling equipment used.
 - 13. Data related to the required calibration of the test equipment.
 - 14. Data on the identification, processing and weights of all filters used.
 - 15. Data on the types and amounts of any chemical solutions used.

16. Data on the amount of pollutant collected from each sampling probe, the filters, and the impingers, are reported separately for the compliance test.

17. The names of individuals who furnished the process variable data, conducted the test, analyzed the samples and prepared the report.

18. All measured and calculated data required to be determined by each applicable test procedure for each run.

19. The detailed calculations for one run that relate the collected data to the calculated emission rate.

20. The applicable emission standard, and the resulting maximum allowable emission rate for the emissions unit, plus the test result in the same form and unit of measure.

21. A certification that, to the knowledge of the owner or his authorized agent, all data submitted are true and correct. When a compliance test is conducted for the Department or its agent, the person who conducts the test shall provide the certification with respect to the test procedures used. The owner or his authorized agent shall certify that all data required and provided to the person conducting the test are true and correct to his knowledge.

[Rules 62-213.440 and 62-297.310(8), F.A.C.]

D.45. The permittee must notify the DEP within 24 hours after commencement of oil firing and furnish the following information:

- a. Duration or projected duration of the event.
- b. Quantity of fuel oil burned or projected to be burned.
- c. A description of significant circumstances precipitating the event, which shall include:
 - (1) Availability of power for purchase
 - (2) Availability of electric transmission capacity relating to power purchases
 - (3) Availability of natural gas
 - (4) Availability of the permittee's generation sources

[OGC Case No. 91-1610: Final Order filed 7/21/92]

Miscellaneous Requirements.

D.46. Definitions. For the purposes of Rule 62-204.800(7), F.A.C., the definitions contained in the various provisions of 40 CFR 60, shall apply except that the term "Administrator" when used in 40 CFR 60, shall mean the Secretary or the Secretary's designee.

[40 CFR 60.2; and, Rule 62-204.800(7)(a), F.A.C.]

D.47. Circumvention. No owner or operator subject to the provisions of 40 CFR 60 shall build, erect, install, or use any article, machine, equipment or process, the use of which conceals an emission which would otherwise constitute a violation of an applicable standard. Such concealment includes, but is not limited to, the use of gaseous diluents to achieve compliance with an opacity standard or with a standard which is based on the concentration of a pollutant in the gases discharged to the atmosphere.

[40 CFR 60.12]

Subsection E. Common Conditions.

E.U.

<u>ID No.</u>	<u>Brief Description</u>
-004	16.5 MW Boiler - Unit #6
-007	33.0 MW Boiler - Unit #7
-008	56.1 MW Boiler - Unit #8

The following conditions apply to the emissions units listed above:

Essential Potential to Emit (PTE) Parameters

E.1. The total combined heat input for Emissions Units -004, -007 and -008 (Units #6, #7, and #8) shall not exceed 4,534,930 million Btu per year.
[AC 56-141460, amended 11/9/90; and, OGC Case No. 91-1610: Final Order filed 7/21/92]

E.2. No. 6 residual fuel oil can be fired as a standby fuel for up to a combined total of 400 hours per year, when necessary in order to avoid curtailing electric power to its customers.
[OGC Case No. 91-1610: Final Order filed 7/21/92]

Emission Limitations and Standards

E.3. The total combined emissions from Emissions Units -004, -007 and -008 (Units #6, #7, and #8) shall not exceed:

PARAMETER	TONS PER YEAR
Particulate Matter	16.0
Sulfur Dioxide	101.6
Nitrogen Oxides	622.0
Volatile Organic Compounds	2.3
Carbon Monoxide	45.3

[OGC Case No. 91-1610: Final Order filed 7/21/92]

Section IV. This section is the Acid Rain Part.

Operated by: Fort Pierce Utilities Authority
ORIS code: 658

Subsection A. This subsection addresses Acid Rain, Phase II.

The emissions units listed below are regulated under Acid Rain, Phase II.

E.U.

<u>ID No.</u>	<u>Brief Description</u>
-007	33.0 MW Boiler - Unit #7
-008	56.1 MW Boiler - Unit #8

A.1. The Phase II permit application(s) submitted for this facility, as approved by the Department, are a part of this permit. The owners and operators of these Phase II acid rain unit(s) must comply with the standard requirements and special provisions set forth in the application(s) listed below:

- a. DEP Form No. 62-210.900(1)(a), dated 07/01/95.
[Chapter 62-213, F.A.C. and Rule 62-214.320, F.A.C.]

A.2. Sulfur dioxide (SO₂) allowance allocations requirements for each Acid Rain unit is as follows:

<u>E.U. ID</u> <u>No.</u>	<u>EPA ID</u>	<u>Year</u>	2000	2001	2002
-007	ID No. 07	SO₂ allowances, under Table 2 or 3 of 40 CFR Part 73	63*	63*	63*
-008	ID No. 08	SO₂ allowances, under Table 2 or 3 of 40 CFR Part 73	26*	26*	26*

* The number of allowances held by an Acid Rain source in a unit account may differ from the number allocated by the USEPA under Table 2 or 3 of 40 CFR 73.]

A.3. Emission Allowances. Emissions from sources subject to the Federal Acid Rain Program (Title IV) shall not exceed any allowances that the source lawfully holds under the Federal Acid Rain Program. Allowances shall not be used to demonstrate compliance with a non-Title IV applicable requirement of the Act.

1. No permit revision shall be required for increases in emissions that are authorized by allowances acquired pursuant to the Federal Acid Rain Program, provided that such increases do not require a permit revision pursuant to Rule 62-213.400(3), F.A.C.

2. No limit shall be placed on the number of allowances held by the source under the Federal Acid Rain Program.

3. Allowances shall be accounted for under the Federal Acid Rain Program.

[Rule 62-213.440(1)(c), F.A.C.]

A.4. Statement of Compliance. The annual statement of compliance pursuant to Rule 62-213.440(3), F.A.C., shall be submitted within 60 (sixty) days after the end of the calendar year. {See condition 51., APPENDIX TV-1, TITLE V CONDITIONS}

[Rule 62-214.420(11), F.A.C.]

A.5. Comments, notes, and justifications:

None

Appendix U-1, List of Unregulated Emissions Units and/or Activities.

Ft. Pierce Utilities Authority
H. D. King Power Plant

PROPOSED Permit No.: 1110003-003-AV
Facility ID No.: 1110003

Unregulated Emissions Units and/or Activities. An emissions unit which emits no “emissions-limited pollutant” and which is subject to no unit-specific work practice standard, though it may be subject to regulations applied on a facility-wide basis (e.g., unconfined emissions, odor, general opacity) or to regulations that require only that it be able to prove exemption from unit-specific emissions or work practice standards.

The below listed emissions units and/or activities are neither ‘regulated emissions units’ nor ‘exempt emissions units’.

E.U. ID

<u>No.</u>	<u>Brief Description of Emissions Units and/or Activity</u>
-001	2.75 MW West Diesel #1
-002	2.75 MW East Diesel #2
-xxx	Cooling Tower
-xxx	General Purpose Internal Combustion Engines

[electronic file name: 1110003u.doc]

Appendix E-1, List of Exempt Emissions Units and/or Activities.

Ft. Pierce Utilities Authority
H. D. King Power Plant

PROPOSED Permit No.: 1110003-003-AV
Facility ID No.: 1110003

The facilities, emissions units, or pollutant-emitting activities listed in Rule 62-210.300(3)(a), F.A.C., Full Exemptions, are exempt from the permitting requirements of Chapters 62-210 and 62-4, F.A.C.; provided, however, that exempt emissions units shall be subject to any applicable emission limiting standards and the emissions from exempt emissions units or activities shall be considered in determining whether a facility containing such emissions units or activities would be subject to any applicable requirements. Emissions units and pollutant-emitting activities exempt from permitting under Rule 62-210.300(3)(a), F.A.C., are also exempt from the permitting requirements of Chapter 62-213, F.A.C., provided such emissions units and activities also meet the exemption criteria of Rule 62-213.430(6)(b), F.A.C. The below listed emissions units and/or activities are hereby exempt pursuant to Rule 62-213.430(6), F.A.C.

Brief Description of Emissions Units and/or Activities

1. No. 2 Fuel Oil Storage Tank #5
2. Diesel Fuel Storage Tank
3. No. 6 Fuel Oil Storage Tank #6
4. No. 6 Fuel Oil Storage Tank #7
5. Waste Oil Storage Tank
6. Compressed Nitrogen Bottles
7. Storage and Use of Water Treatment Chemicals
8. 55 Gallon Drum of Trichloroethylene and Perchloroethylene
9. Lube Oil Storage
10. Parts Washer
11. Miscellaneous Painting Activities
12. Miscellaneous Welding Activities
13. Oil/Water Separator

[electronic file name: 1110003e.doc]

Table 1-1, Summary of Air Pollutant Standards and Terms

Ft. Pierce Utilities Authority
H. D. King Power Plant

PROPOSED Permit No.: 1110003-003-AV
Facility ID No.: 1110003

This table summarizes information for convenience purposes only. This table does not supersede any of the terms or conditions of this permit.

E.U. ID No. [003] **Brief Description** 23.4 MW Combined Cycle Gas Turbine with 8.2 MW HRSG - Unit #9

Pollutant Name	Fuel(s)	Hours/Year	Allowable Emissions		TPY	Equivalent Emissions*		Regulatory Citation(s)	See permit condition(s)
			Standard(s)	lbs./hour		lbs./hour	TPY		
NO _x	All	8,760	STD = 0.0075(14.4)/Y + F (Max 84 ppm)			135.69	592.69	40 CFR 60.332(a)(1) & AC 56-141460	A.5.
SO ₂	All	8,760	0.015% vol. @ 15% Oxygen			319.51	1,395.62	40 CFR 60.332(a)(1) & AC 56-141460	A.6.
SO ₂	Oil	8,760	0.5% S by weight			319.51	1,395.62	AC 56-141460	A.7.
VE	All	8,760	Not to exceed 15%					AC 56-141460	A.8.
CO	All	8,760		32.85	110.4			AC 56-141460	A.9.

Notes:

* The "Equivalent Emissions" listed are for informational purposes only.

[electronic file name: 11100031.xls]

Table 1-1, Summary of Air Pollutant Standards and Terms

Ft. Pierce Utilities Authority
H. D. King Power Plant

PROPOSED Permit No.: 1110003-003-AV
Facility ID No.: 1110003

This table summarizes information for convenience purposes only. This table does not supersede any of the terms or conditions of this permit.

E.U. ID No. Brief Description
[-004] 16.5 MW Boiler - Unit #6

Pollutant Name	Fuel(s)	Hours/Year	Allowable Emissions			Equivalent Emissions*		Regulatory Citation(s)	See permit condition(s)
			Standard(s)	lbs./hour	TPY	lbs./hour	TPY		
VE	Gas	8,760	Not Exceed 5%					OGC Case#91-1610	B.5.
VE	Oil	8,760	20% except 40% 2 min/hr					OGC Case#91-1610	B.5.
VE	All	8,760	60% 3 hrs/24 hrs					62-210.700(3), FAC	B.6.
PM	Gas	8,760		0.4	16.0**			OGC Case#91-1610	B.7. & E.3.
PM	Oil		0.3 lb/MMBtu 3hrs/24 hrs		16.0**			62-210.700(3), FAC	B.8. & E.3.
SO ₂	Gas	8,760		2.5	101.6**			OGC Case#91-1610	B.9. & E.3.
SO ₂	Oil	8,760	0.80 lb/MMBtu		101.6**			OGC Case#91-1610	B.9. & E.3.
NO _x	Gas	8,760		1.31	622.0**			OGC Case#91-1610	B.10. & E.3.
VOC	Gas	8,760		0.0236	2.3**			OGC Case#91-1610	B.11. & E.3.
CO	Gas	8,760		0.15	45.3**			OGC Case#91-1610	B.12. & E.3.

Notes:

* The "Equivalent Emissions" listed are for informational purposes only.

** The total combined emissions from EU [-004], [-007], and [-008]

[electronic file name: 11100031.xls]

Table 1-1, Summary of Air Pollutant Standards and Terms

Ft. Pierce Utilities Authority
H. D. King Power Plant

PROPOSED Permit No.: 1110003-003-AV
Facility ID No.: 1110003

This table summarizes information for convenience purposes only. This table does not supersede any of the terms or conditions of this permit.

E.U. ID No. **Brief Description**

[-007] 33.0 MW Boiler - Unit #7

Pollutant Name	Fuel(s)	Hours/Year	Allowable Emissions			Equivalent Emissions*		Regulatory Citation(s)	See permit condition(s)
			Standard(s)	lbs./hour	TPY	lbs./hour	TPY		
VE	Gas	8,760	Not Exceed 5%					OGC Case#91-1610	C.5.
VE	Oil	8,760	20% except 40% 2 min/hr					OGC Case#91-1610	C.5.
VE	All	8,760	60% 3 hrs/24 hrs					62-210.700(3), FAC	C.6.
PM	Gas	8,760		0.568	16.0 **			OGC Case#91-1610	C.7. & E.3.
PM	Oil		0.1 lb/MMBtu		16.0 **			OGC Case#91-1610	C.7. & E.3.
PM	Oil		0.3 lb/MMBtu 3hrs/24 hrs		16.0 **			62-210.700(3), FAC	C.8. & E.3.
SO ₂	Gas	8,760		2.5	101.6 **			OGC Case#91-1610	C.9. & E.3.
SO ₂	Oil	8,760	0.80 lb/MMBtu		101.6 **			OGC Case#91-1610	C.9. & E.3.
NO _x	Gas	8,760		104.35	622.0 **			OGC Case#91-1610	C.10. & E.3.
VOC	Gas	8,760		0.266	2.3 **			OGC Case#91-1610	C.11. & E.3.
CO	Gas	8,760		7.589	45.3 **			OGC Case#91-1610	C.12. & E.3.

Notes:

* The "Equivalent Emissions" listed are for informational purposes only.

** The total combined emissions from EU [-004], [-007], and [-008]

[electronic file name: 11100031.xls]

Table 1-1, Summary of Air Pollutant Standards and Terms

Ft. Pierce Utilities Authority
H. D. King Power Plant

PROPOSED Permit No.: 1110003-003-AV
Facility ID No.: 1110003

This table summarizes information for convenience purposes only. This table does not supersede any of the terms or conditions of this permit.

E.U. ID No. Brief Description
[-008] 56.1 MW Boiler - Unit #8

Pollutant Name	Fuel(s)	Hours/Year	Allowable Emissions			Equivalent Emissions*		Regulatory Citation(s)	See permit condition(s)
			Standard(s)	lbs./hour	TPY	lbs./hour	TPY		
VE	Gas	8,760	Not Exceed 5%					OGC Case#91-1610	D.5.
VE	Oil	8,760	20% except 27% 6 min/hr					OGC Case#91-1610	D.5.
VE	All	8,760	60% 3 hrs/24 hrs					62-210.700(3), FAC	D.6.
PM	Gas	8,760		0.945	16.0 "			OGC Case#91-1610	D.7. & E.3.
PM	Oil		0.1 lb/MMBtu		16.0 "			OGC Case#91-1610	D.7. & E.3.
PM	Oil		0.3 lb/MMBtu 3hrs/24 hrs		16.0 "			62-210.700(3), FAC	D.8. & E.3.
SO ₂	Gas	8,760		2.5	101.6 "			OGC Case#91-1610	D.9. & E.3.
SO ₂	Oil	8,760	0.80 lb/MMBtu		101.6 "			OGC Case#91-1610	D.9. & E.3.
NO _x	Gas	8,760	0.20 lb/MMBtu		622.0 "			OGC Case#91-1610 & 40 CFR 60.44(a)(1)	D.10. & E.3.
NO _x	Oil	8,760	0.30 lb/MMBtu		622.0 "			OGC Case#91-1610 & 40 CFR 60.44(a)(2)	D.10. & E.3.
VOC	Gas	8,760		0.441	2.3 "			OGC Case#91-1610	D.11. & E.3.
CO	Gas	8,760		12.59	45.3 "			OGC Case#91-1610	D.12. & E.3.

Notes:
 * The "Equivalent Emissions" listed are for informational purposes only.
 " The total combined emissions from EU [-004], [-007], and [-008]

[electronic file name: 11100031.xls]

Table 2-1, Summary of Compliance Requirements

Ft. Pierce Utilities Authority
H. D. King Power Plant

PROPOSED Permit No.: 1110003-003-AV
Facility ID No.: 1110003

This table summarizes information for convenience purposes only. This table does not supersede any of the terms or conditions of this permit.

E.U. ID No. **Brief Description**
[-003] 23.4 MW Combined Cycle Gas Turbine with 8.2 MW HRSG - Unit #9

Pollutant Name or Parameter	Fuel(s)	Compliance Method	Testing Time Frequency	Frequency Base Date *	Min. Compliance Test Duration	CMS**	
						CMS**	See permit condition(s)
NO _x	All	EPA Method 20	Annual	9/30/90	1 hr	Yes	A.14., A.18, A.19., & A.22.
SO ₂	All	EPA Method 20	Annual	9/30/90	1 hr		A.14., A.18, A.19., & A.22.
SO ₂	Oil	Fuel Analysis		9/30/90			A.21.
VE	All	EPA Method 9	Annual	9/30/90	60 min		A.23.
CO	All	EPA Method 10	Annual	9/30/90	1 hr		A.24.
Notes: * The frequency base date is established for planning purposes only; see Rule 62-297.310, F.A.C. ** CMS [=] continuous monitoring system							

[electronic file name: 11100032.xls]

Table 2-1, Summary of Compliance Requirements

Ft. Pierce Utilities Authority
H. D. King Power Plant

PROPOSED Permit No.: 1110003-003-AV
Facility ID No.: 1110003

This table summarizes information for convenience purposes only. This table does not supersede any of the terms or conditions of this permit.

E.U. ID No. **Brief Description**
[-004] 16.5 MW Boiler - Unit #6

Pollutant Name or Parameter	Fuel(s)	Compliance Method	Testing Time	Frequency Base	Min. Compliance Test	CMS **	See permit condition(s)
			Frequency	Date *	Duration		
VE	Gas	EPA Method 9	Annual	6/24/83	30 min		B.17. & B.31.
VE	Oil	DEP Method 9	Annual	6/24/83	60 min		B.17. & B.18.
PM	All	EPA Method 5	Renewal	6/24/83	60 min		B.18., B.30. & B.32.
SO ₂	All	EPA Method 6 or 6C or Fuel Analysis	Annual	6/24/83	60 min		B.20., B.21. & B.30.
NO _x	Gas	EPA Method 7 or 7E	Annual	6/24/83	60 min		B.22. & B.30.
VOC	Gas	EPA Method 25A	Renewal	6/24/83	60 min		B.23. & B.30.
CO	Gas	EPA Method 10	Renewal	6/24/83	60 min		B.24. & B.30.

Notes:

* The frequency base date is established for planning purposes only; see Rule 62-297.310, F.A.C.

**CMS [=] continuous monitoring system

[electronic file name: 11100032.xls]

Table 2-1, Summary of Compliance Requirements

Ft. Pierce Utilities Authority
H. D. King Power Plant

PROPOSED Permit No.: 1110003-003-AV
Facility ID No.: 1110003

This table summarizes information for convenience purposes only. This table does not supersede any of the terms or conditions of this permit.

E.U. ID No. **Brief Description**
[-007] 33.0 MW Boiler - Unit #7

Pollutant Name or Parameter	Fuel(s)	Compliance Method	Testing Time	Frequency Base	Min. Compliance Test	CMS**	See permit condition(s)
			Frequency	Date *	Duration		
VE	Gas	EPA Method 9	Annual	9/30/91	30 min		C.17. & C.31.
VE	Oil	DEP Method 9	Annual	9/30/91	60 min		C.17. & C.18.
PM	All	EPA Method 5	Renewal	9/30/91	60 min		C.19., C.30. & C.32.
SO ₂	All	EPA Method 6 or 6C or Fuel Analysis	Annual	9/30/91	60 min		C.20., C.21. & C.30.
NO _x	Gas	EPA Method 7 or 7E	Annual	9/30/91	60 min		C.22. & C.30.
VOC	Gas	EPA Method 25A	Renewal	9/30/91	60 min		C.23. & C.30.
CO	Gas	EPA Method 10	Renewal	9/30/91	60 min		C.24. & C.30.

Notes:

* The frequency base date is established for planning purposes only; see Rule 62-297.310, F.A.C.

**CMS [=] continuous monitoring system

[electronic file name: 11100032.xls]

Table 2-1, Summary of Compliance Requirements

Ft. Pierce Utilities Authority
H. D. King Power Plant

PROPOSED Permit No.: 1110003-003-AV
Facility ID No.: 1110003

This table summarizes information for convenience purposes only. This table does not supersede any of the terms or conditions of this permit.

E.U. ID No. **Brief Description**
[-008] 56.1 MW Boiler - Unit #8

Pollutant Name or Parameter	Fuel(s)	Compliance Method	Testing Time	Frequency Base	Min. Compliance Test	CMS**	See permit condition(s)
			Frequency	Date *	Duration		
VE	Gas	EPA Method 9	Annual	9/30/91	30 min	Yes	D.18.. & D.34.
VE	Oil	DEP Method 9	Annual	9/30/91	60 min		D.18.. & D.19.
PM	All	EPA Method 5	Renewal	9/30/91	60 min		D.20., D.33. & D.35.
SO ₂	All	EPA Method 6 or 6C or Fuel Analysis	Annual	9/30/91	60 min		D.21., D.22. & D.33.
NO _x	Gas	EPA Method 7 or 7E	Annual	9/30/91	60 min		D.23. & D.33.
VOC	Gas	EPA Method 25A	Renewal	9/30/91	60 min		D.24. & D.33.
CO	Gas	EPA Method 10	Renewal	9/30/91	60 min		D.25. & D.33.
Notes:							
* The frequency base date is established for planning purposes only; see Rule 62-297.310, F.A.C.							
**CMS [=] continuous monitoring system							

[electronic file name: 11100032.xls]

Appendix H-1, Permit History/ID Number Changes

Ft. Pierce Utilities Authority

DRAFT Permit No.: 1110003-003-AV

Facility ID No.: 1110003

Permit History (for tracking purposes):

E.U.

<u>ID No</u>	<u>Description</u>	<u>Permit No.</u>	<u>Issue Date</u>	<u>Expiration Date</u>	<u>Extended Date</u> ^{1,2}	<u>Revised Date(s)</u>
-001	Diesel Generator #1	AO56-190275	05/23/91	02/28/96	08/14/96	06/27/96
		1110003-002-AO	06/21/96	08/15/96		
-002	Diesel Generator #2	AO56-190275	05/23/91	02/28/96	08/14/96	06/27/96
		1110003-002-AO	06/21/96	08/15/96		
-003	Combined Cycle Gas Turbine	AC56-141460A		07/01/96		04/18/90 11/09/90 06/28/91
		1110003-002-AO	06/21/96	08/15/96		
-004	Boiler #6 (Backup Only)	AO56-190275	05/23/91	02/28/96	08/14/96	06/27/96
		1110003-002-AO	06/21/96	08/15/96		
-007	Boiler (Unit #7)	AO56-190275	05/23/91	02/28/96	08/14/96	06/27/96
		1110003-002-AO	06/21/96	08/15/96		
-008	Boiler (Unit #8)	AO56-190275	05/23/91	02/28/96	08/14/96	06/27/96
		1110003-002-AO	06/21/96	08/15/96		

(if applicable) ID Number Changes (for tracking purposes):

From: Facility ID No.: 50WPB560003

To: Facility ID No.: 1110003

Notes:

1 - AO permit(s) automatic extension(s) in Rule 62-210.300(2)(a)3.a., F.A.C., effective 03/21/96.

2 - AC permit(s) automatic extension(s) in Rule 62-213.420(1)(a)4., F.A.C., effective 03/20/96.

{Rule 62-213.420(1)(b)2., F.A.C., effective 03/20/96, allows Title V Sources to operate under existing valid permits}

APPENDIX TV-1, TITLE V CONDITIONS (version dated 08/11/97)

[Note: This attachment includes "canned conditions" developed from the "Title V Core List."]

{Permitting note: APPENDIX TV-1, TITLE V CONDITIONS, is distributed to the permittee only. Other persons requesting copies of these conditions shall be provided one copy when requested or otherwise appropriate.}

Chapter 62-4, F.A.C.

1. General Prohibition. Any stationary installation which will reasonably be expected to be a source of pollution shall not be operated, maintained, or modified without the appropriate and valid permits issued by the Department, unless the source is exempted by Department rule. The Department may issue a permit only after it receives reasonable assurance that the installation will not cause pollution in violation of any of the provisions of Chapter 403, F.S., or the rules promulgated thereunder. A permitted installation may only be operated, maintained, constructed, expanded or modified in a manner that is consistent with the terms of the permit.

[Rule 62-4.030, Florida Administrative Code (F.A.C.); Section 403.087, Florida Statute (F.S.)]

2. Not federally enforceable. Procedure to Obtain Permits: Application.

(1) Any person desiring to obtain a permit from the Department shall apply on forms prescribed by the Department and shall submit such additional information as the Department by law may require.

(2) All applications and supporting documents shall be filed in quadruplicate with the Department.

(3) To ensure protection of public health, safety, and welfare, any construction, modification, or operation of an installation which may be a source of pollution shall be in accordance with sound professional engineering practices pursuant to Chapter 471, F.S. All applications for a Department permit shall be certified by a professional engineer registered in the State of Florida except when the application is for renewal of an air pollution operation permit at a minor facility as defined in Rule 62-210.200, F.A.C., or where professional engineering is not required by Chapter 471, F.S. Where required by Chapter 471 or 492, F.S., applicable portions of permit applications and supporting documents which are submitted to the Department for public record shall be signed and sealed by the professional(s) who prepared or approved them.

(4) Processing fees for air construction permits shall be in accordance with Rule 62-4.050(4), F.A.C.

(5)(a) To be considered by the Department, each application must be accompanied by the proper processing fee. The fee shall be paid by check, payable to the Department of Environmental Protection. The fee is non-refundable except as provided in Section 120.60, F.S., and in this section.

(c) Upon receipt of the proper application fee, the permit processing time requirements of Sections 120.60(2) and 403.0876, F.S., shall begin.

(d) If the applicant does not submit the required fee within ten days of receipt of written notification, the Department shall either return the unprocessed application or arrange with the applicant for the pick up of the application.

(e) If an applicant submits an application fee in excess of the required fee, the permit processing time requirements of Sections 120.60(2) and 403.0876, F.S., shall begin upon receipt, and the Department shall refund to the applicant the amount received in excess of the required fee.

(6) Any substantial modification to a complete application shall require an additional processing fee determined pursuant to the schedule set forth in Rule 62-4.050, F.A.C., and shall restart the time requirements of Sections 120.60 and 403.0876, F.S. For purposes of this Subsection, the term "substantial modification" shall mean a modification which is reasonably expected to lead to substantially different environmental impacts which require a detailed review.

(7) Modifications to existing permits proposed by the permittee which require substantial changes in the existing permit or require substantial evaluation by the Department of potential impacts of the proposed modifications shall require the same fee as a new application.

[Rule 62-4.050, F.A.C.]

3. Standards for Issuing or Denying Permits. Except as provided at Rule 62-213.460, F.A.C., the issuance of a permit does not relieve any person from complying with the requirements of Chapter 403, F.S., or Department rules.

[Rule 62-4.070(7), F.A.C.]

4. Modification of Permit Conditions.

(1) For good cause and after notice and an administrative hearing, if requested, the Department may require the permittee to conform to new or additional conditions. The Department shall allow the permittee a reasonable time to conform to the new or additional conditions and on application of the permittee the Department may grant additional time. For the purpose of this section, good cause shall include, but not be limited to, any of the following:

- (a) A showing that an improvement in effluent or emission quality or quantity can be accomplished because of technological advances without unreasonable hardship.
- (b) A showing that a higher degree of treatment is necessary to effect the intent and purpose of Chapter 403, F.S.
- (c) A showing of any change in the environment or surrounding conditions that requires a modification to conform to applicable air or water quality standards.
- (e) Adoption or revision of Florida Statutes, rules, or standards which require the modification of a permit condition for compliance.

(2) A permittee may request a modification of a permit by applying to the Department.

(3) A permittee may request that a permit be extended as a modification of the permit. Such a request must be submitted to the Department in writing before the expiration of the permit. Upon timely submittal of a request for extension, unless the permit automatically expires by statute or rule, the permit will remain in effect until final agency action is taken on the request. For construction permits, an extension shall be granted if the applicant can demonstrate reasonable assurances that, upon completion, the extended permit will comply with the standards and conditions required by applicable regulation. For all other permits, an extension shall be granted if the applicant can demonstrate reasonable assurances that the extended permit will comply with the standards and conditions applicable to the original permit. A permit for which the permit application fee was prorated in accordance with Rule 62-4.050(4)(1), F.A.C., shall not be extended. In no event shall a permit be extended or remain in effect longer than the time limits established by statute or rule.

[Rule 62-4.080, F.A.C.]

5. Renewals. Prior to one hundred eighty (180) days before the expiration of a permit issued pursuant to Chapter 62-213, F.A.C., the permittee shall apply for a renewal of a permit using forms incorporated by reference in the specific rule chapter for that kind of permit. A renewal application shall be timely and sufficient. If the application is submitted prior to 180 days before expiration of the permit, it will be considered timely and sufficient. If the renewal application is submitted at a later date, it will not be considered timely and sufficient unless it is submitted and made complete prior to the expiration of the operation permit. When the application for renewal is timely and sufficient, the existing permit shall remain in effect until the renewal application has been finally acted upon by the Department or, if there is court review of the Department's final agency action, until a later date is required by Section 120.60, F.S., provided that, for renewal of a permit issued pursuant to Chapter 62-213, F.A.C., the applicant complies with the requirements of Rules 62-213.420(1)(b)3. and 4., F.A.C.

[Rule 62-4.090(1), F.A.C.]

6. Suspension and Revocation.

(1) Permits shall be effective until suspended, revoked, surrendered, or expired and shall be subject to the provisions of Chapter 403, F.S., and rules of the Department.

(2) Failure to comply with pollution control laws and rules shall be grounds for suspension or revocation.

(3) A permit issued pursuant to Chapter 62-4, F.A.C., shall not become a vested property right in the permittee. The Department may revoke any permit issued by it if it finds that the permit holder or the permit holder's agent:

- (a) Submitted false or inaccurate information in application or operational reports.
- (b) Has violated law, Department orders, rules or permit conditions.
- (c) Has failed to submit operational reports or other information required by Department rules.
- (d) Has refused lawful inspection under Section 403.091, F.S.

[Rule 62-4.100, F.A.C.]

7. **Not federally enforceable.** Financial Responsibility. The Department may require an applicant to submit proof of financial responsibility and may require the applicant to post an appropriate bond to guarantee compliance with the law and Department rules.

[Rule 62-4.110, F.A.C.]

8. Transfer of Permits.

- (1) Within 30 days after the sale or legal transfer of a permitted facility, an "Application for Transfer of Permit" (DEP Form 62-1.201(1)) must be submitted to the Department. This form must be completed with the notarized signatures of both the permittee and the proposed new permittee.
- (2) The Department shall approve the transfer of a permit unless it determines that the proposed new permittee cannot provide reasonable assurances that conditions of the permit will be met. The determination shall be limited solely to the ability of the new permittee to comply with the conditions of the existing permit, and it shall not concern the adequacy of these permit conditions. If the Department proposes to deny the transfer, it shall provide both the permittee and the proposed new permittee a written objection to such transfer together with notice of a right to request a Chapter 120, F.S., proceeding on such determination.
- (3) Within 30 days of receiving a properly completed Application for Transfer of Permit form, the Department shall issue a final determination. The Department may toll the time for making a determination on the transfer by notifying both the permittee and the proposed new permittee that additional information is required to adequately review the transfer request. Such notification shall be served within 30 days of receipt of an Application for Transfer of Permit form, completed pursuant to Rule 62-4.120(1), F.A.C. If the Department fails to take action to approve or deny the transfer within 30 days of receipt of the completed Application for Transfer of Permit form, or within 30 days of receipt of the last item of timely requested additional information, the transfer shall be deemed approved.
- (4) The permittee is encouraged to apply for a permit transfer prior to the sale or legal transfer of a permitted facility. However, the transfer shall not be effective prior to the sale or legal transfer.
- (5) Until this transfer is approved by the Department, the permittee and any other person constructing, operating, or maintaining the permitted facility shall be liable for compliance with the terms of the permit. The permittee transferring the permit shall remain liable for corrective actions that may be required as a result of any violations occurring prior to the sale or legal transfer of the facility.

[Rule 62-4.120, F.A.C.]

9. Plant Operation-Problems. If the permittee is temporarily unable to comply with any of the conditions of the permit due to breakdown of equipment or destruction by hazard of fire, wind or by other cause, the permittee shall immediately notify the Department. Notification shall include pertinent information as to the cause of the problem, and what steps are being taken to correct the problem and to prevent its recurrence, and where applicable, the owner's intent toward reconstruction of destroyed facilities. Such notification does not release the permittee from any liability for failure to comply with Department rules.

[Rule 62-4.130, F.A.C.]

10. For purposes of notification to the Department pursuant to Rule 62-4.130, F.A.C., Plant Operation-Problems, "immediately" shall mean the same day, if during a workday (i.e., 8:00 a.m. - 5:00 p.m.), or the first business day after the incident, excluding weekends and holidays.

[40 CFR 70.6(a)(3)(iii)(B)]

11. **Not federally enforceable.** Review. Failure to request a hearing within 14 days of receipt of notice of proposed or final agency action on a permit application or as otherwise required in Chapter 62-103, F.A.C., shall be deemed a waiver of the right to an administrative hearing.

[Rule 62-4.150, F.A.C.]

12. Permit Conditions. All permits issued by the Department shall include the following general conditions:

- (1) The terms, conditions, requirements, limitations and restrictions set forth in this permit, are "permit conditions" and are binding and enforceable pursuant to Sections 403.141, 403.727, or 403.859 through 403.861, F.S. The permittee is placed on notice that the Department will review this permit periodically and may initiate enforcement action for any violation of these conditions.
- (2) This permit is valid only for the specific processes and operations applied for and indicated in the approved drawings or exhibits. Any unauthorized deviation from the approved drawings, exhibits, specifications, or conditions of this permit may constitute grounds for revocation and enforcement action by the Department.
- (3) As provided in subsections 403.087(6) and 403.722(5), F.S., the issuance of this permit does not convey any vested rights or any exclusive privileges. Neither does it authorize any injury to public or private property or any invasion of personal rights, nor any infringement of federal, state, or local laws or regulations. This permit is not a waiver of or approval of any other Department permit that may be required for other aspects of the total project which are not addressed in this permit.

- (4) This permit conveys no title to land or water, does not constitute State recognition or acknowledgment of title, and does not constitute authority for the use of submerged lands unless herein provided and the necessary title or leasehold interests have been obtained from the State. Only the Trustees of the Internal Improvement Trust Fund may express State opinion as to title.
- (5) This permit does not relieve the permittee from liability for harm or injury to human health or welfare, animal, or plant life, or property caused by the construction or operation of this permitted source, or from penalties therefore; nor does it allow the permittee to cause pollution in contravention of F.S. and Department rules, unless specifically authorized by an order from the Department.
- (6) The permittee shall properly operate and maintain the facility and systems of treatment and control (and related appurtenances) that are installed and used by the permittee to achieve compliance with the conditions of this permit, as required by Department rules. This provision includes the operation of backup or auxiliary facilities or similar systems when necessary to achieve compliance with the conditions of the permit and when required by Department rules.
- (7) The permittee, by accepting this permit, specifically agrees to allow authorized Department personnel, upon presentation of credentials or other documents as may be required by law and at reasonable times, access to the premises where the permitted activity is located or conducted to:
- (a) Have access to and copy any records that must be kept under conditions of the permit;
 - (b) Inspect the facility, equipment, practices, or operations regulated or required under this permit; and,
 - (c) Sample or monitor any substances or parameters at any location reasonable necessary to assure compliance with this permit or Department rules. Reasonable time may depend on the nature of the concern being investigated.
- (8) If, for any reason, the permittee does not comply with or will be unable to comply with any condition or limitation specified in this permit, the permittee shall immediately provide the Department with the following information:
- (a) A description of and cause of noncompliance; and,
 - (b) The period of noncompliance, including dates and times; or, if not corrected, the anticipated time the noncompliance is expected to continue, and steps being taken to reduce, eliminate, and prevent recurrence of the noncompliance. The permittee shall be responsible for any and all damages which may result and may be subject to enforcement action by the Department for penalties or for revocation of this permit.
- (9) In accepting this permit, the permittee understands and agrees that all records, notes, monitoring data and other information relating to the construction or operation of this permitted source which are submitted to the Department may be used by the Department as evidence in any enforcement case involving the permitted source arising under the F.S. or Department rules, except where such use is prescribed by Sections 403.111 and 403.73, F.S. Such evidence shall only be used to the extent it is consistent with the Florida Rules of Civil Procedure and appropriate evidentiary rules.
- (10) The permittee agrees to comply with changes in Department rules and F.S. after a reasonable time for compliance; provided, however, the permittee does not waive any other rights granted by F.S. or Department rules.
- (11) This permit is transferable only upon Department approval in accordance with Rule 62-4.120, F.A.C., as applicable. The permittee shall be liable for any non-compliance of the permitted activity until the transfer is approved by the Department.
- (12) This permit or a copy thereof shall be kept at the work site of the permitted activity.
- (14) The permittee shall comply with the following:
- (a) Upon request, the permittee shall furnish all records and plans required under Department rules. During enforcement actions, the retention period for all records will be extended automatically unless otherwise stipulated by the Department.
 - (b) The permittee shall hold at the facility or other location designated by this permit records of all monitoring information (including all calibration and maintenance records and all original strip chart recordings for continuous monitoring instrumentation) required by the permit, copies of all reports required by this permit, and records of all data used to complete the application for this permit. These materials shall be retained at least five (5) years from the date of the sample, measurement, report, or application unless otherwise specified by Department rule.
 - (c) Records of monitoring information shall include:
 - 1. the date, exact place, and time of sampling or measurements;
 - 2. the person responsible for performing the sampling or measurements;
 - 3. the dates analyses were performed;
 - 4. the person responsible for performing the analyses;
 - 5. the analytical techniques or methods used; and,
 - 6. the results of such analyses.
- (15) When requested by the Department, the permittee shall within a reasonable time furnish any information required by law which is needed to determine compliance with the permit. If the permittee becomes aware the relevant facts were not submitted or were incorrect in the permit application or in any report to the Department, such facts or information shall be corrected promptly.
- [Rules 62-4.160 and 62-213.440(1)(b), F.A.C.]

13. Construction Permits.

(1) No person shall construct any installation or facility which will reasonably be expected to be a source of air or water pollution without first applying for and receiving a construction permit from the Department unless exempted by statute or Department rule. In addition to the requirements of Chapter 62-4, F.A.C., applicants for a Department Construction Permit shall submit the following as applicable:

- (a) A completed application on forms furnished by the Department.
- (b) An engineering report covering:
 - 1. plant description and operations,
 - 2. types and quantities of all waste material to be generated whether liquid, gaseous or solid,
 - 3. proposed waste control facilities,
 - 4. the treatment objectives,
 - 5. the design criteria on which the control facilities are based, and,
 - 6. other information deemed relevant.

Design criteria submitted pursuant to Rule 62-4.210(1)(b)5., F.A.C., shall be based on the results of laboratory and pilot-plant scale studies whenever such studies are warranted. The design efficiencies of the proposed waste treatment facilities and the quantities and types of pollutants in the treated effluents or emissions shall be indicated. Work of this nature shall be subject to the requirements of Chapter 471, F.S. Where confidential records are involved, certain information may be kept confidential pursuant to Section 403.111, F.S.

- (c) The owners' written guarantee to meet the design criteria as accepted by the Department and to abide by Chapter 403, F.S. and the rules of the Department as to the quantities and types of materials to be discharged from the installation. The owner may be required to post an appropriate bond or other equivalent evidence of financial responsibility to guarantee compliance with such conditions in instances where the owner's financial resources are inadequate or proposed control facilities are experimental in nature.

(2) The construction permit may contain conditions and an expiration date as determined by the Secretary or the Secretary's designee.

(3) When the Department issues a permit to construct, the permittee shall be allowed a period of time, specified in the permit, to construct, and to operate and test to determine compliance with Chapter 403, F.S., and the rules of the Department and, where applicable, to apply for and receive an operation permit. The Department may require tests and evaluations of the treatment facilities by the permittee at his/her expense.

[Rule 62-4.210, F.A.C.]

14. Operation Permit for New Sources. To properly apply for an operation permit for new sources, the applicant shall submit certification that construction was completed noting any deviations from the conditions in the construction permit and test results where appropriate.

[Rule 62-4.220, F.A.C.]

Chapter 62-103, F.A.C.

15. Public Notice, Public Participation, and Proposed Agency Action. The permittee shall comply with all of the requirements for public notice, public participation, and proposed agency action pursuant to Rule 62-103.150 and Rule 62-210.350, F.A.C.

[Rules 62-103.150, 62-210.350 and 62-213.430(1)(b), F.A.C.]

16. Administrative Hearing. The permittee shall comply with all of the requirements for a petition for administrative hearing or waiver of right to administrative proceeding pursuant to Rule 61-103.155, F.A.C.

[Rule 62-103.155, F.A.C.]

Chapter 62-204, F.A.C.

17. Asbestos. This permit does not authorize any demolition or renovation of the facility or its parts or components which involves asbestos removal. This permit does not constitute a waiver of any of the requirements of Chapter 62-257, F.A.C., and 40 CFR Part 61, Subpart M, National Emission Standard for Asbestos, adopted and incorporated by reference in Rule 62-204.800, F.A.C. Compliance with Chapter 62-257, F.A.C., and 40 CFR 61, Subpart M, Section 61.145, is required for any asbestos demolition or renovation at the source.

[40 CFR 61; Rule 62-204.800, F.A.C.; and, Chapter 62-257, F.A.C.]

Chapter 62-210. F.A.C.

18. Permits Required. The owner or operator of any emissions unit which emits or can reasonably be expected to emit any air pollutant shall obtain an appropriate permit from the Department prior to beginning construction, modification, or initial or continued operation of the emissions unit unless exempted pursuant to Department rule or statute. All emissions limitations, controls, and other requirements imposed by such permits shall be at least as stringent as any applicable limitations and requirements contained in or enforceable under the State Implementation Plan (SIP) or that are otherwise federally enforceable. Except as provided at Rule 62-213.460, F.A.C., issuance of a permit does not relieve the owner or operator of any emissions unit from complying with applicable emission limiting standards or other requirements of the air pollution rules of the Department, or any other applicable requirements under federal, state, or local law.

(1) Air Construction Permits. An air construction permit shall be obtained by the owner or operator of any proposed new or modified facility or emissions unit prior to the beginning of construction or modification, in accordance with all applicable provisions of Chapters 62-210, 62-212 and 62-4, F.A.C. The construction permit shall be issued for a period of time sufficient to allow construction or modification of the facility or emissions unit and operation while the new or modified facility or emissions unit is conducting tests or otherwise demonstrating initial compliance with the conditions of the construction permit.

(2) Air Operation Permits. Upon expiration of the air operation permit for any existing facility or emissions unit, subsequent to construction or modification and demonstration of initial compliance with the conditions of the construction permit for any new or modified facility or emissions unit, or as otherwise provided in Chapter 62-210 or Chapter 62-213, the owner or operator of such facility or emissions unit shall obtain a renewal air operation permit, an initial air operation permit, or an administrative correction or revision of an existing air operation permit, whichever is appropriate, in accordance with all applicable provisions of Chapter 62-210, Chapter 62-213, and Chapter 62-4, F.A.C.

(a) Minimum Requirements for All Air Operation Permits. At a minimum, a permit issued pursuant to this subsection shall:

1. Specify the manner, nature, volume and frequency of the emissions permitted, and the applicable emission limiting standards or performance standards, if any;
2. Require proper operation and maintenance of any pollution control equipment by qualified personnel, where applicable in accordance with the provisions of any operation and maintenance plan required by the air pollution rules of the Department.
3. Contain an effective date stated in the permit which shall not be earlier than the date final action is taken on the application and be issued for a period, beginning on the effective date, as provided below:
 - a. The operation permit for an emissions unit which is in compliance with all applicable rules and in operational condition, and which the owner or operator intends to continue operating, shall be issued or renewed for a five-year period, except that, for Title V sources subject to Rule 62-213.420(1)(a)1., F.A.C., operation permits shall be extended until 60 days after the due date for submittal of the facility's Title V permit application as specified in Rule 62-213.420(1)(a)1., F.A.C.
 - b. Except as provided in Rule 62-210.300(2)(a)3.d., F.A.C., the operation permit for an emissions unit which has been shut down for six months or more prior to the expiration date of the current operation permit, shall be renewed for a period not to exceed five years from the date of shutdown, even if the emissions unit is not maintained in operational condition, provided:
 - (i) the owner or operator of the emissions unit demonstrates to the Department that the emissions unit may need to be reactivated and used, or that it is the owner's or operator's intent to apply to the Department for a permit to construct a new emissions unit at the facility before the end of the extension period; and,
 - (ii) the owner or operator of the emissions unit agrees to and is legally prohibited from providing the allowable emission permitted by the renewed permit as an emissions offset to any other person under Rule 62-212.500, F.A.C.; and,
 - (iii) the emissions unit was operating in compliance with all applicable rules as of the time the source was shut down.
 - c. Except as provided in Rule 62-210.300(2)(a)3.d., F.A.C., the operation permit for an emissions unit which has been shut down for five years or more prior to the expiration date of the current operation permit shall be renewed for a maximum period not to exceed ten years from the date of shutdown, even if the emissions unit is not maintained in operational condition, provided the conditions given in Rule 62-210.300(2)(a)3.b., F.A.C., are met and the owner or operator demonstrates to the Department that failure to renew the permit would constitute a hardship, which may include economic hardship.

d. The operation permit for an electric utility generating unit on cold standby or long-term reserve shutdown shall be renewed for a five-year period, and additional five-year periods, even if the unit is not maintained in operational condition, provided the conditions given in Rules 62-210.300(2)(a)3.b.(i) through (iii), F.A.C., are met.

4. In the case of an emissions unit permitted pursuant to Rules 62-210.300(2)(a)3.b., c., and d., F.A.C., include reasonable notification and compliance testing requirements for reactivation of such emissions unit and provide that the owner or operator demonstrate to the Department prior to reactivation that such reactivation would not constitute reconstruction pursuant to Rule 62-204.800(7), F.A.C.

[Rules 62-210.300(1) & (2), F.A.C.]

19. Notification of Startup. The owner or operator of any emissions unit or facility which has a valid air operation permit and which has been shut down more than one (1) year, shall notify the Department in writing of the intent to start up such emissions unit or facility, a minimum of sixty (60) days prior to the intended startup date.

(a) The notification shall include the planned startup date, anticipated emission rates or pollutants released, changes to processes or control devices which will result in changes to emission rates, and any other conditions which may differ from the valid outstanding operation permit.

(b) If, due to an emergency, a startup date is not known 60 days prior thereto, the owner shall notify the Department as soon as possible after the date of such startup is ascertained.

[Rule 62-210.300(5), F.A.C.]

20. Emissions Unit Reclassification.

(a) Any emissions unit whose operation permit has been revoked as provided for in Chapter 62-4, F.A.C., shall be deemed permanently shut down for purposes of Rule 62-212.500, F.A.C. Any emissions unit whose permit to operate has expired without timely renewal or transfer may be deemed permanently shut down, provided, however, that no such emissions unit shall be deemed permanently shut down if, within 20 days after receipt of written notice from the Department, the emissions unit owner or operator demonstrates that the permit expiration resulted from inadvertent failure to comply with the requirements of Rule 62-4.090, F.A.C., and that the owner or operator intends to continue the emissions unit in operation, and either submits an application for an air operation permit or complies with permit transfer requirements, if applicable.

(b) If the owner or operator of an emissions unit which is so permanently shut down, applies to the Department for a permit to reactivate or operate such emissions unit, the emissions unit will be reviewed and permitted as a new emissions unit.

[Rule 62-210.300(6), F.A.C.]

21. Public Notice and Comment.

(1) Public Notice of Proposed Agency Action.

(a) Notwithstanding any discretionary public notice requirements contained in Rule 62-103.150(2)(a), F.A.C., a notice of proposed agency action on permit application, where the proposed agency action is to issue the permit, shall be published by any applicant for:

1. A construction permit for any proposed new or modified facility or emissions unit;
2. An operation permit, permit renewal or permit revision subject to Rule 62-210.300(2)(b), F.A.C.; or
3. An operation permit, permit renewal, or permit revision subject to Chapter 62-213, F.A.C., except those permit revisions meeting the requirements of Rule 62-213.412(1), F.A.C.

(b) The notice required by Rule 62-210.350(1)(a), F.A.C., shall be published in accordance with all otherwise applicable provisions of Rule 62-103.150, F.A.C.

(2) Additional Public Notice Requirements for Emissions Units Subject to Prevention of Significant Deterioration or Nonattainment-Area Preconstruction Review.

(a) Before taking final agency action on a construction permit application for any proposed new or modified facility or emissions unit subject to the preconstruction review requirements of Rule 62-212.400 or 62-212.500, F.A.C., the Department shall comply with all applicable provisions of Rule 62-103.150, F.A.C., and provide an opportunity for public comment which shall include as a minimum the following:

1. A complete file available for public inspection in at least one location in the district affected which includes the information submitted by the owner or operator, exclusive of confidential records under Section 403.111, F.S., and the Department's analysis of the effect of the proposed construction or modification on ambient air quality, including the Department's preliminary determination of whether the permit should be approved or disapproved;
2. A 30-day period for submittal of public comments; and,

3. A notice, by advertisement in a newspaper of general circulation in the county affected, specifying the nature and location of the proposed facility or emissions unit, whether BACT or LAER has been determined, the degree of PSD increment consumption expected, if applicable, and the location of the information specified in paragraph 1. above; and notifying the public of the opportunity for submitting comments and requesting a public hearing.
 - (b) The notice provided for in Rule 62-210.350(2)(a)3., F.A.C., shall be prepared by the Department and published by the applicant in accordance with all applicable provisions of Rule 62-103.150, F.A.C., except that the applicant shall cause the notice to be published no later than thirty (30) days prior to final agency action.
 - (c) A copy of the notice provided for in Rule 62-210.350(2)(a)3., F.A.C., shall also be sent by the Department to the Regional Office of the U. S. Environmental Protection Agency and to all other state and local officials or agencies having cognizance over the location of such new or modified facility or emissions unit, including local air pollution control agencies, chief executives of city or county government, regional land use planning agencies, and any other state, Federal Land Manager, or Indian Governing Body whose lands may be affected by emissions from the new or modified facility or emissions unit.
 - (d) A copy of the notice provided for in Rule 62-210.350(2)(a)3., F.A.C., shall be displayed in the appropriate district, branch and local program offices.
 - (e) An opportunity for public hearing shall be provided in accordance with Chapter 120, F.S., and Rule 62-103.150, F.A.C.
 - (f) Any public comments received shall be made available for public inspection in the location where the information specified in Rule 62-210.350(2)(a)1., F.A.C., is available and shall be considered by the Department in making a final determination to approve or deny the permit.
 - (g) The final determination shall be made available for public inspection at the same location where the information specified in Rule 62-210.350(2)(a)1., F.A.C., was made available.
 - (h) For a proposed new or modified emissions unit which would be located within 100 kilometers of any Federal Class I area or whose emissions may affect any Federal Class I area, and which would be subject to the preconstruction review requirements of Rule 62-212.400, F.A.C., or Rule 62-212.500, F.A.C.:
 1. The Department shall mail or transmit to the Administrator a copy of the initial application for an air construction permit and notice of every action related to the consideration of the permit application.
 2. The Department shall mail or transmit to the Federal Land Manager of each affected Class I area a copy of any written notice of intent to apply for an air construction permit; the initial application for an air construction permit, including all required analyses and demonstrations; any subsequently submitted information related to the application; the preliminary determination and notice of proposed agency action on the permit application; and any petition for an administrative hearing regarding the application or the Department's proposed action. Each such document shall be mailed or transmitted to the Federal Land Manager within fourteen (14) days after its receipt by the Department.
- (3) Additional Public Notice Requirements for Facilities Subject to Operation Permits for Title V Sources.
- (a) Before taking final agency action to issue a new, renewed, or revised air operation permit subject to Chapter 62-213, F.A.C., the Department shall comply with all applicable provisions of Rule 62-103.150, F.A.C., and provide an opportunity for public comment which shall include as a minimum the following:
 1. A complete file available for public inspection in at least one location in the district affected which includes the information submitted by the owner or operator, exclusive of confidential records under Section 403.111, F.S.; and,
 2. A 30-day period for submittal of public comments.
 - (b) The notice provided for in Rule 62-210.350(3)(a), F.A.C., shall be prepared by the Department and published by the applicant in accordance with all applicable provisions of Rule 62-103.150, F.A.C., except that the applicant shall cause the notice to be published no later than thirty (30) days prior to final agency action.
 - (c) The notice shall identify:
 1. The facility;
 2. The name and address of the office at which processing of the permit occurs;
 3. The activity or activities involved in the permit action;
 4. The emissions change involved in any permit revision;
 5. The name, address, and telephone number of a Department representative from whom interested persons may obtain additional information, including copies of the permit draft, the application, and all relevant supporting materials, including any permit application, compliance plan, permit, monitoring report, and compliance statement required pursuant to Chapter 62-213, F.A.C. (except for information entitled to confidential treatment pursuant to Section 403.111, F.S.), and all other materials available to the Department that are relevant to the permit decision;
 6. A brief description of the comment procedures required by Rules 62-103.150 and 62-210.350(3), F.A.C.;
 7. The time and place of any hearing that may be held, including a statement of procedure to request a hearing (unless a hearing has already been scheduled); and,

8. The procedures by which persons may petition the Administrator to object to the issuance of the proposed permit after expiration of the Administrator's 45-day review period.

[Rule 62-210.350, F.A.C.]

22. Administrative Permit Corrections.

(1) A facility owner shall notify the Department by letter of minor corrections to information contained in a permit. Such notifications shall include:

- (a) Typographical errors noted in the permit;
- (b) Name, address or phone number change from that in the permit;
- (c) Any other similar minor administrative change at the source; and,
- (d) A change requiring more frequent monitoring or reporting by the permittee.
- (e) Changes listed at 40 CFR 72.83(a)(1), (2), (6), (9) and (10), hereby adopted and incorporated by reference, to Title V sources subject to emissions limitations or reductions pursuant to 42 USC ss. 7651-7651o;
- (f) Changes listed at 40 CFR 72.83(a)(11), hereby adopted and incorporated by reference, to Title V sources subject to emissions limitations or reductions pursuant to 42 USC ss. 7651-7651o, provided the notification is accompanied by a copy of any EPA determination concerning the similarity of the change to those listed at Rule 17-210.360(1)(e).

(2) Upon receipt of such notifications the Department shall within 60 days correct the permit and provide a corrected copy to the owner.

(3) For facilities subject to Chapter 62-213, F.A.C., a copy shall be provided to EPA and any approved local air program in the county where the facility or any part of the facility is located.

(4) The Department shall incorporate requirements resulting from issuance of new or revised construction permits into existing operation permits issued pursuant to Chapter 62-213, F.A.C., if the construction permit revisions incorporate requirements of federally enforceable preconstruction review and if the applicant requests at the time of application that all of the requirements of Rule 62-213.430(1), F.A.C., be complied with in conjunction with the processing of the construction permit application.

[Rule 62-210.360, F.A.C.]

23. Reports.

(3) Annual Operating Report for Air Pollutant Emitting Facility.

- (a) The Annual Operating Report for Air Pollutant Emitting Facility (DEP Form No. 62-210.900(5)) shall be completed each year.
- (c) The annual operating report shall be submitted to the appropriate Department District or Department approved local air pollution control program office by March 1 of the following year unless otherwise indicated by permit condition or Department request.

[Rule 62-210.370(3), F.A.C.]

24. Circumvention. No person shall circumvent any air pollution control device, or allow the emission of air pollutants without the applicable air pollution control device operating properly.

[Rule 62-210.650, F.A.C.]

25. Forms and Instructions. The forms used by the Department in the stationary source control program are adopted and incorporated by reference in this section. The forms are listed by rule number, which is also the form number, with the subject, title and effective date. Copies of forms may be obtained by writing to the Department of Environmental Protection, Division of Air Resources Management, 2600 Blair Stone Road, Tallahassee, Florida 32399-2400.

(1) Application for Air Permit - Long Form, Form and Instructions.

- (a) Acid Rain Part (Phase II), Form and Instructions.
 - 1. Repowering Extension Plan, Form and Instructions.
 - 2. New Unit Exemption, Form and Instructions.
 - 3. Retired Unit Exemption, Form and Instructions.
- (b) Reserved.

(5) Annual Operating Report (AOR) for Air Pollutant Emitting Facility, Form and Instructions.

[Rule 62-210.900, F.A.C.]

Chapter 62-213, F.A.C.

26. Annual Emissions Fee. Each Title V source permitted to operate in Florida must pay between January 15 and March 1 of each year, upon written notice from the Department, an annual emissions fee in accordance with Rule 62-213.205, F.A.C., and the appropriate form and associated instructions.

[Rules 62-213.205 and 62-213.900(1), F.A.C.]

27. Annual Emissions Fee. Failure to pay timely any required annual emissions fee, penalty, or interest constitutes grounds for permit revocation pursuant to Rule 62-4.100, F.A.C.

[Rule 62-213.205(1)(g), F.A.C.]

28. Annual Emissions Fee. Any documentation of actual hours of operation, actual material or heat input, actual production amount, or actual emissions used to calculate the annual emissions fee shall be retained by the owner for a minimum of five (5) years and shall be made available to the Department upon request.

[Rule 62-213.205(1)(j), F.A.C.]

29. Annual Emissions Fee. DEP Form 62-213.900(1), F.A.C., "Major Air Pollution Source Annual Emissions Fee Form", must be completed by the permittee and submitted with the annual emissions fee.

[Rule 62-213.205(4), F.A.C.]

30. Air Operation Permit Fees. After December 31, 1992, no permit application processing fee, renewal fee, modification fee or amendment fee is required for an operation permit for a Title V source.

[Rule 62-213.205(5), F.A.C.]

31. Permits and Permit Revisions Required. All Title V sources are subject to the permit requirements of Chapter 62-213, F.A.C.

[Rule 62-213.400, F.A.C.]

32. No Title V source may operate except in compliance with Chapter 62-213, F.A.C.

[Rule 62-213.400(1), F.A.C.]

33. Changes Without Permit Revision. Title V sources having a valid permit issued pursuant to Chapter 62-213, F.A.C., may make the following changes without permit revision, provided that sources shall maintain source logs or records to verify periods of operation in each alternative method of operation:

(1) Permitted sources may change among those alternative methods of operation allowed by the source's permit as provided by the terms of the permit;

(2) Permitted sources may implement the terms or conditions of a new or revised construction permit if;

(a) The application for construction permit complied with the requirements of Rule 62-213.420(3) and (4), F.A.C.;

(b) The terms or conditions were subject to federally enforceable preconstruction review pursuant to Chapter 62-212, F.A.C.; and,

(c) The new or revised construction permit was issued after the Department and the applicant complied with all the requirements of Rule 62-213.430(1), F.A.C.;

(3) A permitted source may implement operating changes after the source submits any forms required by any applicable requirement and provides the Department and EPA with at least 7 days written notice prior to implementation. The source and the Department shall attach each notice to the relevant permit;

(a) The written notice shall include the date on which the change will occur, and a description of the change within the permitted source, the pollutants emitted and any change in emissions, and any term or condition becoming applicable or no longer applicable as a result of the change;

(b) The permit shield described in Rule 62-213.460, F.A.C., shall not apply to such changes;

(4) Permitted sources may implement changes involving modes of operation only in accordance with Rule 62-213.415, F.A.C.

[Rule 62-213.410, F.A.C.]

34. Immediate Implementation Pending Revision Process.

(1) Those permitted Title V sources making any change that constitutes a modification pursuant to paragraph (a) of the definition of modification at Rule 62-210.200, F.A.C., but which would not constitute a modification pursuant to paragraph (b) of the same definition, may implement such change prior to final issuance of a permit revision in accordance with Rule 62-213.412, F.A.C., provided the change:

- (a) Does not violate any applicable requirement;
- (b) Does not contravene any permit term or condition for monitoring, testing, recordkeeping or reporting, or any compliance certification requirement;
- (c) Does not require or change a case-by-case determination of an emission limitation or other standard, or a source-specific determination of ambient impacts, or a visibility or increment analysis under the provisions of Chapter 62-212 or 62-296, F.A.C.;
- (d) Does not seek to establish or change a permit term or condition for which there is no corresponding underlying applicable requirement and that the source has assumed to avoid an applicable requirement to which the source would otherwise be subject including any federally enforceable emissions cap or federally enforceable alternative emissions limit.

(2) A Title V source may immediately implement such changes after they have been incorporated into the terms and conditions of a new or revised construction permit issued pursuant to Chapter 62-212, F.A.C., and after the source provides to EPA, the Department, each affected state and any approved local air program having geographic jurisdiction over the source, a copy of the source's application for operation permit revision. The Title V source may conform its application for construction permit to include all information required by Rule 62-213.420, F.A.C., in lieu of submitting separate application forms.

(3) The Department shall process the application for operation permit revision in accordance with the provisions of Chapter 62-213, F.A.C., except that the Department shall issue a draft permit revision or a determination to deny the revision within 60 days of receipt of a complete application for operation permit revision or, if the Title V source has submitted a construction permit application conforming to the requirements of Rule 62-213.420, F.A.C., the Department shall issue a draft permit or a determination to deny the revision at the same time the Department issues its determination on issuance or denial of the construction permit application. The Department shall not take final action until all the requirements of Rule 62-213.430(1)(a), (c), (d), and (e), F.A.C., have been complied with.

(4) Pending final action on the operation permit revision application, the source shall implement the changes in accordance with the terms and conditions of the source's new or revised construction permit.

(5) The permit shield described in Rule 62-213.460, F.A.C., shall not apply to such changes until after the Department takes final action to issue the operation permit revision.

(6) If the Department denies the source's application for operation permit revision, the source shall cease implementation of the proposed changes.

[Rule 62-213.412, F.A.C.]

35. Permit Applications.

(1) Duty to Apply. For each Title V source, the owner or operator shall submit a timely and complete permit application in compliance with the requirements of Rules 62-213.420, 62-4.050(1) & (2), and 62-210.900, F.A.C.

(a) Timely Application.

3. For purposes of permit renewal, a timely application is one that is submitted in accordance with Rule 62-4.090, F.A.C.

(b) Complete Application.

1. Any applicant for a Title V permit, permit revision or permit renewal must submit an application on DEP Form No. 62-210.900(1), which must include all the information specified by Rule 62-213.420(3), F.A.C., except that an application for permit revision must contain only that information related to the proposed change. The applicant shall include information concerning fugitive emissions and stack emissions in the application. Each application for permit, permit revision or permit renewal shall be certified by a responsible official in accordance with Rule 62-213.420(4), F.A.C.

2. For those applicants submitting initial permit applications pursuant to Rule 62-213.420(1)(a)1., F.A.C., a complete application shall be an application that substantially addresses all the information required by the application form number 62-210.900(1), and such applications shall be deemed complete within sixty days of receipt of a signed and certified application unless the Department notifies the applicant of incompleteness within that time. For all other applicants, the applications shall be deemed complete sixty days after receipt, unless the Department, within sixty days after receipt of a signed application for permit, permit revision or permit renewal, requests additional documentation or information needed to process the application. An applicant making timely and complete application for permit, or timely application for permit renewal as described by Rule 62-4.090(1), F.A.C., shall continue to operate the source

under the authority and provisions of any existing valid permit or Florida Electrical Power Plant Siting Certification, provided the applicant complies with all the provisions of Rules 62-213.420(1)(b)3. and 4., F.A.C. Failure of the Department to request additional information within sixty days of receipt of a properly signed application shall not impair the Department's ability to request additional information pursuant to Rules 62-213.420(1)(b)3. and 4., F.A.C.

3. For those permit applications submitted pursuant to the provisions of Rule 62-213.420(1)(a)1., F.A.C., the Department shall notify the applicant if the Department becomes aware at any time during processing of the application that the application contains incorrect or incomplete information. The applicant shall submit the corrected or supplementary information to the Department within ninety days unless the applicant has requested and been granted additional time to submit the information. Failure of an applicant to submit corrected or supplementary information requested by the Department within ninety days or such additional time as requested and granted shall render the application incomplete.

4. For all applications other than those addressed at Rule 62-213.420(1)(b)3., F.A.C., should the Department become aware, during processing of any application that the application contains incorrect information, or should the Department become aware, as a result of comment from an affected State, an approved local air program, EPA, or the public that additional information is needed to evaluate the application, the Department shall notify the applicant within 30 days. When an applicant becomes aware that an application contains incorrect or incomplete information, the applicant shall submit the corrected or supplementary information to the Department. If the Department notifies an applicant that corrected or supplementary information is necessary to process the permit, and requests a response, the applicant shall provide the information to the Department within ninety days of the Department request unless the applicant has requested and been granted additional time to submit the information or, the applicant shall, within ninety days, submit a written request that the Department process the application without the information. Failure of an applicant to submit corrected or supplementary information requested by the Department within ninety days, or such additional time as requested and granted, or to demand in writing within ninety days that the application be processed without the information shall render the application incomplete. Nothing in this section shall limit any other remedies available to the Department.

[Rules 62-213.420(1)(a)3. and 62-213.420(1)(b)1., 2., 3. & 4.; F.A.C.]

36. Confidential Information. Whenever an applicant submits information under a claim of confidentiality pursuant to Section 403.111, F.S., the applicant shall also submit a copy of all such information and claim directly to EPA.

[Rule 62-213.420(2), F.A.C.]

37. Standard Application Form and Required Information. Applications shall be submitted under Chapter 62-213, F.A.C., on forms provided by the Department and adopted by reference in Rule 62-210.900(1), F.A.C. The information as described in Rule 62-210.900(1), F.A.C., shall be included for the Title V source and each emissions unit. An application must include information sufficient to determine all applicable requirements for the Title V source and each emissions unit and to evaluate a fee amount pursuant to Rule 62-213.205, F.A.C.

[Rule 62-213.420(3), F.A.C.]

38. Certification by Responsible Official (RO). In addition to the professional engineering certification required for applications by Rule 62-4.050(3), F.A.C., any application form, report, compliance statement, compliance plan and compliance schedule submitted pursuant to Chapter 62-213, F.A.C., shall contain a certification signed by a responsible official that, based on information and belief formed after reasonable inquiry, the statements and information in the document are true, accurate, and complete.

[Rule 62-213.420(4), F.A.C.]

39.a. Permit Renewal and Expiration. Permits being renewed are subject to the same requirements that apply to permit issuance at the time of application for renewal. Permit renewal applications shall contain that information identified in Rules 62-210.900(1) and 62-213.420(3), F.A.C. Unless a Title V source submits a timely application for permit renewal in accordance with the requirements of Rule 62-4.090(1), F.A.C., the existing permit shall expire and the source's right to operate shall terminate.

b. Permit Revision Procedures. Permit revisions shall meet all requirements of Chapter 62-213, F.A.C., including those for content of applications, public participation, review by approved local programs and affected states, and review by EPA, as they apply to permit issuance and renewal, except that permit revisions for those activities implemented pursuant to Rule 62-213.412, F.A.C., need not meet the requirements of Rule 62-213.430(1)(b), F.A.C. The Department shall require permit revision in accordance with the provisions of Rule 62-4.080, F.A.C., and 40 CFR 70.7(f), whenever any source becomes

subject to any condition listed at 40 CFR 70.7(f)(1), hereby adopted and incorporated by reference. The below requirements from 40 CFR 70.7(f) are adopted and incorporated by reference in Rule 62-213.430(4), F.A.C.:

o 40 CFR 70.7(f): Reopening for Cause.

(1) This section contains provisions from 40 CFR 70.7(f) that specify the conditions under which a Title V permit shall be reopened prior to the expiration of the permit. A Title V permit shall be reopened and revised under any of the following circumstances:

(i) Additional applicable requirements under the Act become applicable to a major Part 70 source with a remaining permit term of 3 or more years. Such a reopening shall be completed not later than 18 months after promulgation of the applicable requirement. No such reopening is required if the effective date of the requirement is later than the date on which the permit is due to expire, unless the original permit or any of its terms and conditions has been extended pursuant to 40 CFR 70.4(b)(10)(i) or (ii).

(ii) Additional requirements (including excess emissions requirements) become applicable to an affected source under the acid rain program. Upon approved by the Administrator, excess emissions offset plans shall be deemed to be incorporated into the permit.

(iii) The permitting authority or EPA determines that the permit contains a material mistake or that inaccurate statements were made in establishing the emissions standards or other terms or conditions of the permit.

(iv) The Administrator or the permitting authority determines that the permit must be revised or revoked to assure compliance with the applicable requirements.

(2) Proceedings to reopen and issue a permit shall follow the same procedures as apply to initial permit issuance and shall affect only those parts of the permit for which cause to reopen exists. Such reopening shall be made as expeditiously as practicable.

(3) Reopenings under 40 CFR 70.7(f)(1) shall not be initiated before a notice of such intent is provided to the Part 70 source by the permitting authority at least 30 days in advance of the date that the permit is to be reopened, except that the permitting authority may provide a shorter time period in the case of an emergency.

[Rules 62-213.430(3) & (4), F.A.C.; and, 40 CFR 70.7(f)]

40. Permit Duration. Operation permits for Title V sources may not be extended as provided in Rule 62-4.080(3), F.A.C., if such extension will result in a permit term greater than five (5) years.

[Rule 62-213.440(1)(a), F.A.C.]

41. Monitoring Information. All records of monitoring information shall specify the date, place, and time of sampling or measurement and the operating conditions at the time of sampling or measurement, the date(s) analyses were performed, the company or entity that performed the analyses, the analytical techniques or methods used, and the results of such analyses.

[Rule 62-213.440(1)(b)2.a., F.A.C.]

42. Retention of Records. Retention of records of all monitoring data and support information shall be for a period of at least 5 years from the date of the monitoring sample, measurement, report, or application. Support information includes all calibration and maintenance records and all original strip-chart recordings for continuous monitoring instrumentation, and copies of all reports required by the permit.

[Rule 62-213.440(1)(b)2.b., F.A.C.]

43. Monitoring Reports. The permittee shall submit reports of any required monitoring at least every six (6) months. All instances of deviations from permit requirements must be clearly identified in such reports.

[Rule 62-213.440(1)(b)3.a., F.A.C.]

44. Deviation from Permit Requirements Reports. The permittee shall report in accordance with the requirements of Rules 62-210.700(6) and 62-4.130, F.A.C., any deviations from permit requirements, including those attributable to upset conditions as defined in the permit. Reports shall include the probable cause of such deviations, and any corrective actions or preventive measures taken.

[Rule 62-213.440(1)(b)3.b., F.A.C.]

45. Reports. All reports shall be accompanied by a certification by a responsible official, pursuant to Rule 62-213.420(4), F.A.C.

[Rule 62-213.440(1)(b)3.c., F.A.C.]

46. If any portion of the final permit is invalidated, the remainder of the permit shall remain in effect.

[Rule 62-213.440(1)(d)1., F.A.C.]

47. It shall not be a defense for a permittee in an enforcement action that maintaining compliance with any permit condition would necessitate halting of or reduction of the source activity.

[Rule 62-213.440(1)(d)3., F.A.C.]

48. A Title V source shall comply with all the terms and conditions of the existing permit until the Department has taken final action on any permit renewal or any requested permit revision, except as provided at Rule 62-213.412(2), F.A.C.

[Rule 62-213.440(1)(d)4., F.A.C.]

49. A situation arising from sudden and unforeseeable events beyond the control of the source which causes an exceedance of a technology-based emissions limitation because of unavoidable increases in emissions attributable to the situation and which requires immediate corrective action to restore normal operation, shall be an affirmative defense to an enforcement action in accordance with the provisions and requirements of 40 CFR 70.6(g)(2) and (3), hereby adopted and incorporated by reference.

[Rule 62-213.440(1)(d)5., F.A.C.]

50. Confidentiality Claims. Any permittee may claim confidentiality of any data or other information by complying with Rule 62-213.420(2), F.A.C.

[Rule 62-213.440(1)(d)6., F.A.C.]

51. Statement of Compliance. The permittee shall submit a statement of compliance with all terms and conditions of the permit. Such statement shall be submitted to the Department and EPA annually, or more frequently if specified by Rule 62-213.440(2), F.A.C., or by any other applicable requirement. The statement of compliance shall include the identity of each term or condition of the permit for which each unit has remained in compliance during the period covered by the statement. The statement shall include identification of all methods used to demonstrate compliance and identification of each term or condition of the permit for which any unit has not remained in compliance during the period covered by the statement. For each term or condition for which the source has not remained in compliance during the period covered by the statement, the statement shall also identify each unit not in compliance and each term and condition with which the unit was not in compliance and state the inclusive dates that the source was not in compliance, the actions taken to achieve compliance and the method used to demonstrate compliance. Such statement shall be accompanied by a certification by a responsible official, in accordance with Rule 62-213.420(4), F.A.C.

[Rule 62-213.440(3), F.A.C.]

52. Permit Shield. Except as provided in Chapter 62-213, F.A.C., compliance with the terms and conditions of a permit issued pursuant to Chapter 62-213, F.A.C., shall be deemed compliance with any applicable requirements in effect as of the date of permit issuance, provided that the source included such applicable requirements in the permit application. Nothing in Rule 62-213.460, F.A.C., or in any permit shall alter or affect the ability of EPA or the Department to deal with an emergency, the liability of an owner or operator of a source for any violation of applicable requirements prior to or at the time of permit issuance, or the requirements of the Federal Acid Rain Program.

[Rule 62-213.460, F.A.C.]

53. Forms and Instructions. The forms used by the Department in the Title V source operation program are adopted and incorporated by reference in Rule 62-213.900, F.A.C. The form is listed by rule number, which is also the form number, and with the subject, title, and effective date. Copies of forms may be obtained by writing to the Department of Environmental Protection, Division of Air Resources Management, 2600 Blair Stone Road, Tallahassee, Florida 32399-2400, or by contacting the appropriate permitting authority.

(1) Major Air Pollution Source Annual Emissions Fee (AEF) Form.

[Rule 62-213.900(1), F.A.C.]

Chapter 62-256, F.A.C.

54. **Not federally enforceable.** Open Burning. This permit does not authorize any open burning nor does it constitute any waiver of the requirements of Chapter 62-256, F.A.C. Source shall comply with Chapter 62-256, F.A.C., for any open burning at the source.

[Chapter 62-256, F.A.C.]

Chapter 62-281, F.A.C.

55. Refrigerant Requirements. Any facility having refrigeration equipment, including air conditioning equipment, which uses a Class I or II substance (listed at 40 CFR 82, Subpart A, Appendices A and B), and any facility which maintains, services, or repairs motor vehicles using a Class I or Class II substance as refrigerant must comply with all requirements of 40 CFR 82, Subparts B and F, and with Rule 62-281.100, F.A.C. Those requirements include the following restrictions:

- (1) Any facility having any refrigeration equipment normally containing 50 (fifty) pounds of refrigerant, or more, must keep servicing records documenting the date and type of all service and the quantity of any refrigerant added pursuant to 40 CFR 82.166;
 - (2) No person repairing or servicing a motor vehicle may perform any service on a motor vehicle air conditioner (MVAC) involving the refrigerant for such air conditioner unless the person has been properly trained and certified as provided at 40 CFR 82.34 and 40 CFR 82.40, and properly uses equipment approved pursuant to 40 CFR 82.36 and 40 CFR 82.38, and complies with 40 CFR 82.42;
 - (3) No person may sell or distribute, or offer for sale or distribution, any substance listed as a Class I or Class II substance at 40 CFR 82, Subpart A, Appendices A and B, except in compliance with Rule 62-281.100, F.A.C., and 40 CFR 82.34(b), 40 CFR 82.42, and/or 40 CFR 82.166;
 - (4) No person maintaining, servicing, repairing, or disposing of appliances may knowingly vent or otherwise release into the atmosphere any Class I or Class II substance used as a refrigerant in such equipment and no other person may open appliances (except MVACs as defined at 40 CFR 82.152) for service, maintenance or repair unless the person has been properly trained and certified pursuant to 40 CFR 82.161 and unless the person uses equipment certified for that type of appliance pursuant to 40 CFR 82.158 and unless the person observes the practices set forth at 40 CFR 82.156 and 40 CFR 82.166;
 - (5) No person may dispose of appliances (except small appliances, as defined at 40 CFR 82.152) without using equipment certified for that type of appliance pursuant to 40 CFR 82.158 and without observing the practices set forth at 40 CFR 82.156 and 40 CFR 82.166;
 - (6) No person may recover refrigerant from small appliances, MVACs and MVAC-like appliances (as defined at 40 CFR 82.152), except in compliance with the requirements of 40 CFR 82, Subpart F.
- [40 CFR 82; and, Chapter 62-281, F.A.C. (Chapter 62-281, F.A.C., is not federally enforceable)]

Chapter 62-296, F.A.C.

56. Not federally enforceable until SIP approved. Industrial, Commercial, and Municipal Open Burning Prohibited. Open burning in connection with industrial, commercial, or municipal operations is prohibited, except when:

- (a) Open burning is determined by the Department to be the only feasible method of operation and is authorized by an air permit issued pursuant to Chapter 62-210 or 62-213, F.A.C.; or
- (b) An emergency exists which requires immediate action to protect human health and safety; or
- (c) A county or municipality would use a portable air curtain incinerator to burn yard trash generated by a hurricane, tornado, fire or other disaster and the air curtain incinerator would otherwise be operated in accordance with the permitting exemption criteria of Rule 62-210.300(3), F.A.C.

[Rule 62-296.320(3), F.A.C.]

57. Unconfined Emissions of Particulate Matter.

(4)(c)1. No person shall cause, let, permit, suffer or allow the emissions of unconfined particulate matter from any emissions unit whatsoever, including, but not limited to, vehicular movement, transportation of materials, construction, alteration, demolition or wrecking, or industrially related activities such as loading, unloading, storing or handling, without taking reasonable precautions to prevent such emission.

3. Reasonable precautions may include, but shall not be limited to the following:

- a. Paving and maintenance of roads, parking areas and yards.
- b. Application of water or chemicals to control emissions from such activities as demolition of buildings, grading roads, construction, and land clearing.
- c. Application of asphalt, water, oil, chemicals or other dust suppressants to unpaved roads, yards, open stock piles and similar emissions units.
- d. Removal of particulate matter from roads and other paved areas under the control of the owner or operator of the emissions unit to prevent reentrainment, and from buildings or work areas to prevent particulate from becoming airborne.
- e. Landscaping or planting of vegetation.
- f. Use of hoods, fans, filters, and similar equipment to contain, capture and/or vent particulate matter.
- g. Confining abrasive blasting where possible.
- h. Enclosure or covering of conveyor systems.

4. In determining what constitutes reasonable precautions for a particular facility, the Department shall consider the cost of the control technique or work practice, the environmental impacts of the technique or practice, and the degree of reduction of emissions expected from a particular technique or practice.

[Rules 62-296.320(4)(c)1., 3., & 4. F.A.C.]

[electronic file name: tv-1.doc]

APPENDIX SS-1, STACK SAMPLING FACILITIES (version dated 10/07/96)

Stack Sampling Facilities Provided by the Owner of an Emissions Unit. This section describes the minimum requirements for stack sampling facilities that are necessary to sample point emissions units. Sampling facilities include sampling ports, work platforms, access to work platforms, electrical power, and sampling equipment support. Emissions units must provide these facilities at their expense. All stack sampling facilities must meet any Occupational Safety and Health Administration (OSHA) Safety and Health Standards described in 29 CFR Part 1910, Subparts D and E.

(a) Permanent Test Facilities. The owner or operator of an emissions unit for which a compliance test, other than a visible emissions test, is required on at least an annual basis, shall install and maintain permanent stack sampling facilities.

(b) Temporary Test Facilities. The owner or operator of an emissions unit that is not required to conduct a compliance test on at least an annual basis may use permanent or temporary stack sampling facilities. If the owner chooses to use temporary sampling facilities on an emissions unit, and the Department elects to test the unit, such temporary facilities shall be installed on the emissions unit within 5 days of a request by the Department and remain on the emissions unit until the test is completed.

(c) Sampling Ports.

1. All sampling ports shall have a minimum inside diameter of 3 inches.
2. The ports shall be capable of being sealed when not in use.
3. The sampling ports shall be located in the stack at least 2 stack diameters or equivalent diameters downstream and at least 0.5 stack diameter or equivalent diameter upstream from any fan, bend, constriction or other flow disturbance.
4. For emissions units for which a complete application to construct has been filed prior to December 1, 1980, at least two sampling ports, 90 degrees apart, shall be installed at each sampling location on all circular stacks that have an outside diameter of 15 feet or less. For stacks with a larger diameter, four sampling ports, each 90 degrees apart, shall be installed. For emissions units for which a complete application to construct is filed on or after December 1, 1980, at least two sampling ports, 90 degrees apart, shall be installed at each sampling location on all circular stacks that have an outside diameter of 10 feet or less. For stacks with larger diameters, four sampling ports, each 90 degrees apart, shall be installed. On horizontal circular ducts, the ports shall be located so that the probe can enter the stack vertically, horizontally or at a 45 degree angle.

5. On rectangular ducts, the cross sectional area shall be divided into the number of equal areas in accordance with EPA Method 1. Sampling ports shall be provided which allow access to each sampling point. The ports shall be located so that the probe can be inserted perpendicular to the gas flow.

(d) Work Platforms.

1. Minimum size of the working platform shall be 24 square feet in area. Platforms shall be at least 3 feet wide.

2. On circular stacks with 2 sampling ports, the platform shall extend at least 110 degrees around the stack.

3. On circular stacks with more than two sampling ports, the work platform shall extend 360 degrees around the stack.

4. All platforms shall be equipped with an adequate safety rail (ropes are not acceptable), toeboard, and hinged floor-opening cover if ladder access is used to reach the platform. The safety rail directly in line with the sampling ports shall be removable so that no obstruction exists in an area 14 inches below each sample port and 6 inches on either side of the sampling port.

(e) Access to Work Platform.

APPENDIX SS-1, STACK SAMPLING FACILITIES (version dated 10/07/96)
(continued)

1. Ladders to the work platform exceeding 15 feet in length shall have safety cages or fall arresters with a minimum of 3 compatible safety belts available for use by sampling personnel.

2. Walkways over free-fall areas shall be equipped with safety rails and toeboards.

(f) Electrical Power.

1. A minimum of two 120-volt AC, 20-amp outlets shall be provided at the sampling platform within 20 feet of each sampling port.

2. If extension cords are used to provide the electrical power, they shall be kept on the plant's property and be available immediately upon request by sampling personnel.

(g) Sampling Equipment Support.

1. A three-quarter inch eyebolt and an angle bracket shall be attached directly above each port on vertical stacks and above each row of sampling ports on the sides of horizontal ducts.

a. The bracket shall be a standard 3 inch x 3 inch x one-quarter inch equal-legs bracket which is 1 and one-half inches wide. A hole that is one-half inch in diameter shall be drilled through the exact center of the horizontal portion of the bracket. The horizontal portion of the bracket shall be located 14 inches above the centerline of the sampling port.

b. A three-eighth inch bolt which protrudes 2 inches from the stack may be substituted for the required bracket. The bolt shall be located 15 and one-half inches above the centerline of the sampling port.

c. The three-quarter inch eyebolt shall be capable of supporting a 500 pound working load. For stacks that are less than 12 feet in diameter, the eyebolt shall be located 48 inches above the horizontal portion of the angle bracket. For stacks that are greater than or equal to 12 feet in diameter, the eyebolt shall be located 60 inches above the horizontal portion of the angle bracket. If the eyebolt is more than 120 inches above the platform, a length of chain shall be attached to it to bring the free end of the chain to within safe reach from the platform.

2. A complete monorail or dualrail arrangement may be substituted for the eyebolt and bracket.

3. When the sample ports are located in the top of a horizontal duct, a frame shall be provided above the port to allow the sample probe to be secured during the test.

[Rule 62-297.310(6), F.A.C.]

TABLE 297.310-1 CALIBRATION SCHEDULE
(version dated 10/07/96)

[Note: This table is referenced in Rule 62-297.310, F.A.C.]

ITEM	MINIMUM CALIBRATION FREQUENCY	REFERENCE INSTRUMENT	TOLERANCE
Liquid in glass thermometer	Annually	ASTM Hg in glass ref. thermometer or equivalent, or thermometric points	+/-2%
Bimetallic thermometer	Quarterly	Calib. liq. in glass thermometer	5 degrees F
Thermocouple	Annually	ASTM Hg in glass ref. thermometer, NBS calibrated reference and potentiometer	5 degrees F
Barometer	Monthly	Hg barometer or NOAA station	+/-1% scale
Pitot Tube	When required or when damaged	By construction or measurements in wind tunnel D greater than 16" and standard pitot tube	See EPA Method 2, Fig. 2-2 & 2-3
Probe Nozzles	Before each test or when nicked, dented, or corroded	Micrometer	+/-0.001" mean of at least three readings Max. deviation between readings .004"
Dry Gas Meter and Orifice Meter	1. Full Scale: When received, When 5% change observed, Annually 2. One Point: Semiannually 3. Check after each test series	Spirometer or calibrated wet test or dry gas test meter	2%
		Comparison check	5%

FIGURE 1--SUMMARY REPORT--GASEOUS AND OPACITY EXCESS EMISSION AND MONITORING SYSTEM PERFORMANCE (version dated 7/96)

[Note: This form is referenced in 40 CFR 60.7, Subpart A-General Provisions]

Pollutant (Circle One): SO₂ NO_x TRS H₂S CO Opacity

Reporting period dates: From _____ to _____

Company: _____

Emission Limitation: _____

Address: _____

Monitor Manufacturer: _____

Model No.: _____

Date of Latest CMS Certification or Audit: _____

Process Unit(s) Description: _____

Total source operating time in reporting period ¹: _____

Emission data summary ¹	CMS performance summary ¹
1. Duration of excess emissions in reporting period due to: a. Startup/shutdown b. Control equipment problems c. Process problems d. Other known causes e. Unknown causes 2. Total duration of excess emissions 3. Total duration of excess emissions x (100) / [Total source operating time] % ²	1. CMS downtime in reporting period due to: a. Monitor equipment malfunctions b. Non-Monitor equipment malfunctions c. Quality assurance calibration d. Other known causes e. Unknown causes 2. Total CMS Downtime 3. [Total CMS Downtime] x (100) / [Total source operating time] % ²

¹ For opacity, record all times in minutes. For gases, record all times in hours.

² For the reporting period: If the total duration of excess emissions is 1 percent or greater of the total operating time or the total CMS downtime is 5 percent or greater of the total operating time, both the summary report form and the excess emission report described in 40 CFR 60.7(c) shall be submitted.

Note: On a separate page, describe any changes since last quarter in CMS, process or controls.

I certify that the information contained in this report is true, accurate, and complete.

Name: _____

Signature: _____ Date: _____

Title: _____

Appendix A-1, Abbreviations, Acronyms, Citations, and Identification Numbers (version dated 02/05/97)

Abbreviations and Acronyms:

°F: Degrees Fahrenheit
BACT: Best Available Control Technology
CFR: Code of Federal Regulations
DEP: State of Florida, Department of Environmental Protection
DARM: Division of Air Resource Management
EPA: United States Environmental Protection Agency
F.A.C.: Florida Administrative Code
F.S.: Florida Statute
ISO: International Standards Organization
LAT: Latitude
LONG: Longitude
MMBtu: million British thermal units
MW: Megawatt
ORIS: Office of Regulatory Information Systems
SOA: Specific Operating Agreement
UTM: Universal Transverse Mercator

Citations:

The following examples illustrate the methods used in this permit to abbreviate and cite the references of rules, regulations, guidance memorandums, permit numbers, and ID numbers.

Code of Federal Regulations:

Example: [40 CFR 60.334]

Where:	40	reference to	Title 40
	CFR	reference to	Code of Federal Regulations
	60	reference to	Part 60
	60.334	reference to	Regulation 60.334

Florida Administrative Code (F.A.C.) Rules:

Example: [Rule 62-213, F.A.C.]

Where:	62	reference to	Title 62
	62-213	reference to	Chapter 62-213
	62-213.205	reference to	Rule 62-213.205, F.A.C.

ISO: International Standards Organization refers to those conditions at 288 degrees K, 60 percent relative humidity, and 101.3 kilopascals pressure.

Appendix A-1, Abbreviations, Acronyms, Citations, and Identification Numbers
(version dated 02/05/97) (continued)

Identification Numbers:

Facility Identification (ID) Number:

Example: Facility ID No.: 1050221

Where:

105 = 3-digit number code identifying the facility is located in Polk County
0221 = 4-digit number assigned by state database.

Permit Numbers:

Example: 1050221-002-AV, or
1050221-001-AC

Where:

AC = Air Construction Permit
AV = Air Operation Permit (Title V Source)
105 = 3-digit number code identifying the facility is located in Polk County
0221 = 4-digit number assigned by permit tracking database
001 or 002 = 3-digit sequential project number assigned by permit tracking database

Example: PSD-FL-185
PA95-01
AC53-208321

Where:

PSD = Prevention of Significant Deterioration Permit
PA = Power Plant Siting Act Permit
AC = old Air Construction Permit numbering

STATE OF FLORIDA
DEPARTMENT OF ENVIRONMENTAL PROTECTION

In the matter of:

Florida Electric Power Coordinating Group, Inc.,)

Petitioner.)

ASP No. 97-B-01

ORDER ON REQUEST
FOR
ALTERNATE PROCEDURES AND REQUIREMENTS

Pursuant to Rule 62-297.620, Florida Administrative Code (F.A.C.), the Florida Electric Coordinating Group, Incorporated, (FCG) petitioned for approval to: (1) Exempt fossil fuel steam generators which burn liquid and/or solid fuel for less than 400 hours during the federal fiscal year from the requirement to conduct an annual particulate matter compliance test; and, (2) Exempt fossil fuel steam generators which burn liquid and/or solid fuel for less than 400 hours during the federal fiscal year from the requirement to conduct an annual particulate matter compliance test during the year prior to renewal of an operation permit. This Order is intended to clarify particulate testing requirements for those fossil fuel steam generators which primarily burn gaseous fuels including, but not necessarily limited to natural gas.

Having considered the provisions of Rule 62-296.405(1), F.A.C., Rule 62-297.310(7), F.A.C., and all supporting documentation, the following Findings of Fact, Conclusions of Law, and Order are entered:

FINDINGS OF FACT

1. The Florida Electric Power Coordinating Group, Incorporated, petitioned the Department to exempt those fossil fuel steam generators which have a heat input of more than 250 million Btu per hour and burn solid and/or liquid fuel less than 400 hours during the year from the requirement to conduct an annual particulate matter compliance test. [Exhibit 1]

2. Rule 62-296.405(1)(a), F.A.C., applies to those fossil fuel steam generators that are not subject to the federal standards of performance for new stationary sources (NSPS) in 40 CFR 60 and which have a heat input of more than 250 million Btu per hour.

3. Rule 62-296.405(1)(a), F.A.C., limits visible emissions from affected fossil fuel steam generators to, "20 percent opacity except for either one six-minute period per hour during which

required for any six-month period in which liquid and/or solid fuel is not burned for more than 200 hours other than during startup."

11. Rule 297.310(7)(a)7., F.A.C., states, "For emissions units electing to conduct particulate matter emission compliance testing quarterly pursuant to Rule 62-296.405(2)(a), F.A.C., a compliance test shall not be required for any quarter in which liquid and/or solid fuel is not burned for more than 100 hours other than during startup." [Note: The reference should be to Rule 62-296.405(1)(a), F.A.C., rather than Rule 62-296.405(2)(a), F.A.C.]

12. The fifth edition of the U. S. Environmental Protection Agency's Compilation of Air Pollutant Emission Factors, AP-42, that emissions of filterable particulate from gas-fired fossil fuel steam generators with a heat input of more than about 10 million Btu per hour may be expected to range from 0.001 to 0.006 pound per million Btu. [Exhibit 2]

13. Rule 62-296.405(1)(b), F.A.C. and the federal standards of performance for new stationary sources in 40 CFR 60.42, Subpart D, limit particulate emissions from uncontrolled fossil fuel fired steam generators with a heat input of more than 250 million Btu to 0.1 pound per million Btu.

CONCLUSIONS OF LAW

1. The Department has jurisdiction to consider the matter pursuant to Section 403.061, Florida Statutes (F.S.), and Rule 62-297.620, F.A.C.

2. Pursuant to Rule 62-297.310(7), F.A.C., the Department may require Petitioner to conduct compliance tests that identify the nature and quantity of pollutant emissions, if, after investigation, it is believed that any applicable emission standard or condition of the applicable permits is being violated.

3. There is reason to believe that a fossil fuel steam generator which does not burn liquid and/or solid fuel (other than during startup) for a total of more than 400 hours in a federal fiscal year and complies with all other applicable limits and permit conditions is in compliance with the applicable particulate mass emission limiting standard.

ORDER

Having considered the requirements of Rule 62-296.405, F.A.C., Rule 62-297.310, F.A.C., and supporting documentation, it is hereby ordered that:

1. An annual compliance test for particulate matter emissions shall not be required for any fuel burning emissions unit that, in a federal fiscal year, does not burn liquid and/or solid fuel, other than during startup, for a total of more than 400 hours;

the Florida Statutes, or to intervene in this proceeding and participate as a party to it. Any subsequent intervention will be only at the approval of the presiding officer upon the filing of a motion in compliance with Rule 28-5.207 of the Florida Administrative Code.

A petition must contain the following information:

- (a) The name, address, and telephone number of each petitioner, the applicant's name and address, the Department File Number, and the county in which the project is proposed;
- (b) A statement of how and when each petitioner received notice of the Department's action or proposed action;
- (c) A statement of how each petitioner's substantial interests are affected by the Department's action or proposed action;
- (d) A statement of the material facts disputed by each petitioner, if any;
- (e) A statement of facts that the petitioner contends warrant reversal or modification of the Department's action or proposed action;
- (f) A statement identifying the rules or statutes each petitioner contends require reversal or modification of the Department's action or proposed action; and,
- (g) A statement of the relief sought by each petitioner, stating precisely the action each petitioner wants the Department to take with respect to the Department's action or proposed action in the notice of intent.

Because the administrative hearing process is designed to formulate final agency action, the filing of a petition means that the Department's final action may be different from the position taken by it in this Order. Persons whose substantial interests will be affected by any such final decision of the Department on the application have the right to petition to become a party to the proceeding, in accordance with the requirements set forth above.

A person whose substantial interests are affected by the Department's proposed decision, may elect to pursue mediation by asking all parties to the proceeding to agree to such mediation and by filing with the Department a request for mediation and the written agreement of all such parties to mediate the dispute. The request and agreement must be filed in (received by) the Office of General Counsel of the Department at 3900 Commonwealth Boulevard, Mail Station 35, Tallahassee, Florida 32399-3000, by the same deadline as set forth above for the filing of a petition.

A request for mediation must contain the following information:

specify the deadlines that then will apply for challenging the agency action and electing remedies under those two statutes.

In addition to the above, a person subject to regulation has a right to apply for a variance from or waiver of the requirements of particular rules, on certain conditions, under section 120.542 of the Florida Statutes. The relief provided by this state statute applies only to state rules, not statutes, and not to any federal regulatory requirements. Applying for a variance or waiver does not substitute or extend the time for filing a petition for an administrative hearing or exercising any other right that a person may have in relation to the action proposed in this notice of intent.

The application for a variance or waiver is made by filing a petition with the Office of General Counsel of the Department, 3900 Commonwealth Boulevard, Mail Station 35, Tallahassee, Florida 32399-3000.

The petition must specify the following information:

- (a) The name, address, and telephone number of the petitioner;
- (b) The name, address, and telephone number of the attorney or qualified representative of the petitioner, if any;
- (c) Each rule or portion of a rule from which a variance or waiver is requested;
- (d) The citation to the statute underlying (implemented by) the rule identified in (c) above;
- (e) The type of action requested;
- (f) The specific facts that would justify a variance or waiver for the petitioner;
- (g) The reason why the variance or waiver would serve the purposes of the underlying statute (implemented by the rule); and
- (h) A statement whether the variance or waiver is permanent or temporary and, if temporary, a statement of the dates showing the duration of the variance or waiver requested.

The Department will grant a variance or waiver, when the petition demonstrates both that the application of the rule would create a substantial hardship or violate principles of fairness, as each of those terms is defined in section 120.542(2) of the Florida Statutes, and that the purpose of the underlying statute will be or has been achieved by other means by the petitioner. Persons subject to regulation pursuant to any federally delegated or approved air program should be aware that Florida is specifically not authorized to issue variances or waivers from any requirements of any such federally delegated or approved program. The requirements of the program remain fully

CERTIFICATE OF SERVICE


The undersigned duly designated deputy clerk hereby certifies that a copy of the foregoing was mailed to Rich Piper, Chair, Florida Power Coordinating Group, Inc., 405 Reo Street, Suite 100, Tampa, Florida 33609-1004, on this 18th day of March 1997.

Clerk Stamp

FILING AND ACKNOWLEDGMENT

FILED, on this date, pursuant to §120.52(7), Florida Statutes, with the designated Department Clerk, receipt of which is hereby acknowledged.

Martha O. Wise 3-18-97
Clerk Date



January 28, 1997

Clair H. Fancy, P.E.
Chief, Bureau of Air Regulation
Florida Department of Environmental Protection
2600 Blair Stone Road, MS 5505
Tallahassee, FL 32301

RECEIVED

JAN 28 1997

BUREAU OF
AIR REGULATION

RE: Comments Regarding Draft Title V Permits

Dear Mr. Fancy:

The Florida Electric Power Coordinating Group, Inc. (FCG), which is made up of 36 utilities owned by investors, municipalities, and cooperatives, has been following the implementation of Title V in Florida and recently submitted comments to you on draft Title V permit conditions by letter dated December 4, 1996. As indicated in that letter, representatives from the FCG would like to meet with you and other members of your air permitting staff to discuss some significant concerns that FCG member companies have regarding conditions that may be included in Title V permits issued by your office. While we will be discussing these issues with you and your staff in greater detail at that meeting, we would like to explain some of our concerns in this letter.

Primarily, the FCG members are concerned that the Title V permits may contain conditions that are much different in important respects than those conditions currently included in existing air permits. During the rulemaking workshops and seminars conducted by the Department to discuss the rules implementing the Title V permitting program, representations were made on several occasions that industry could expect to see permit conditions that were substantively similar to existing permit conditions and that primarily the format was changing. Representations were also made to industry that Title V did not impose additional substantive requirements beyond what was already required under the Department's rules. Based on the first draft Title V permit that we have reviewed, we are concerned that there may be some attempt to change the substantive requirements on existing facilities through the Title V permitting process, and we would like to discuss this with you at the meeting we have scheduled for January 30, 1997.

1. Federal Enforceability--The FCG has long been concerned about the designation of non-federally enforceable permit terms and conditions. We are concerned about this issue because the Department's first draft Title V permits have included language stating that *all* terms and conditions would become federally enforceable once the permit is issued. This approach is consistent with the Department's guidance memorandum dated September 13, 1996 (DARM-PER/V-18), but we understand that the Department may now intend to remove all references to

Clair H. Fancy, P.E.
Chief, Bureau of Air Regulation
Florida Department of Environmental Protection
January 28, 1997
Page 3

excess emissions and because these rules have been approved as part of Florida's State Implementation Plan, the permit conditions are appropriate to be included in the permit. We understand that the Department intends to include as applicable requirements in Title V permit conditions the provisions of Rule 62-210.700, F.A.C. If the Department receives any further adverse comments regarding the excess emissions rule under 62-210.700, F.A.C., we would appreciate your contacting us. Because this issue is so important to us, we would like to discuss it with you in greater detail at our meeting on January 30.

4. Compliance Testing for Combustion Turbines--While the Department's November 22, 1995, guidance regarding the compliance testing requirements for combustion turbines clearly states that the use of heat input curves based on ambient temperatures and humidities is to be included as a permit condition *only* if requested by a permittee, we understand that the Department may intend to include this requirement in Title V permits for all combustion turbines. As we are sure you recall, the FCG worked over a period of several months with the Department on the development of the guidance memorandum and it was clearly understood by FCG members that the heat input curves would not be mandated but would remain voluntary for any existing combustion turbine. It was also understood by FCG members that the requirement to conduct testing at 95 to 100 percent of capacity would be required only if the permit applicant requested the use of heat input curves. We understand that the Department may be interpreting the requirement to use heat input curves and to test at 95 to 100 percent of permitted capacity to be mandatory for all combustion turbines. We would like to clarify this with you during our meeting. Also, we would like to confirm that, regardless of whether a combustion turbine uses heat input curves or tests at 95 to 100 percent of permitted capacity, it is necessary to test at four load points and correct to ISO *only* to determine compliance with the nitrogen oxides (NOx) standard under New Source Performance Standard Subpart GG under 40 CFR § 60.532 and not annually thereafter.

5. Test Methods--The FCG is concerned about the possibility of the Department requiring a full permit revision to authorize the use of an approved test method not specifically identified in a Title V permit, even though the Department may have separately approved the use of the particular test method for a unit (i.e., through a compliance test protocol). It is the FCG's position that language should be included in all Title V permits indicating that other test methods approved by the Department may be used. Further, a full permit revision (including public notice) should *not* be necessary when a test method not previously identified in the permit is approved for use by a unit. The Department's subsequent approval of test methods should simply be included in the next permit renewal cycle. The FCG understands that the Department planned to confirm this approach with the U.S. Environmental Protection Agency Region IV, and we would like to discuss this issue with you at the January 30 meeting to learn of the agency's response.

Clair H. Fancy, P.E.
Chief, Bureau of Air Regulation
Florida Department of Environmental Protection
January 28, 1997
Page 5

Title V implementation process, and we look forward to our meeting later this week. If you have any questions in the meantime, please call me at 561-625-7661.

Sincerely,

Rich Piper

Rich Piper, Chair *hgm*
FCG Air Subcommittee

Enclosures

cc: Howard L. Rhodes, DEP
John Brown, DEP
Pat Comer, DEP OGC
Scott M. Sheplak, DEP
Edward Svec, DEP
FCG Air Subcommittee
Angela Morrison, HGSS

83601

COMPILATION OF AIR POLLUTANT EMISSION FACTORS

VOLUME I: STATIONARY POINT AND AREA SOURCES

Office Of Air Quality Planning And Standards
Office Of Air And Radiation
U. S. Environmental Protection Agency
Research Triangle Park, NC 27711

January 1995

Exhibit 2

recirculation is normally used in combination with low NO_x burners. When used in combination, these techniques are capable of reducing uncontrolled NO_x emissions by 60 to 90 percent.

Two post-combustion technologies that may be applied to natural gas-fired boilers to reduce NO_x emissions by further amounts are selective noncatalytic reduction and selective catalytic reduction. These systems inject ammonia (or urea) into combustion flue gases to reduce inlet NO_x emission rates by 40 to 70 percent.

Although not measured, all particulate matter (PM) from natural gas combustion has been estimated to be less than 1 micrometer in size. Particulate matter is composed of filterable and condensable fractions, based on the EPA sampling method. Filterable and condensable emission rates are of the same order of magnitude for boilers; for residential furnaces, most of the PM is in the form of condensable material.

The rates of CO and trace organic emissions from boilers and furnaces depend on the efficiency of natural gas combustion. These emissions are minimized by combustion practices that promote high combustion temperatures, long residence times at those temperatures, and turbulent mixing of fuel and combustion air. In some cases, the addition of NO_x control systems such as FGR and low NO_x burners reduces combustion efficiency (due to lower combustion temperatures), resulting in higher CO and organic emissions relative to uncontrolled boilers.

Emission factors for natural gas combustion in boilers and furnaces are presented in Tables 1.4-1, 1.4-2, and 1.4-3.⁶ For the purposes of developing emission factors, natural gas combustors have been organized into four general categories: utility/large industrial boilers, small industrial boilers, commercial boilers, and residential furnaces. Boilers and furnaces within these categories share the same general design and operating characteristics and hence have similar emission characteristics when combusting natural gas. The primary factor used to demarcate the individual combustor categories is heat input.

Table 1.4-2 (Metric And English Units). EMISSION FACTORS FOR SULFUR DIOXIDE (SO₂), NITROGEN OXIDES (NO_x), AND CARBON MONOXIDE (CO) FROM NATURAL GAS COMBUSTION^a

Combustor Type (Size, 10 ⁶ Btu/hr Heat Input) (SCC) ^b	SO ₂ ^c			NO _x ^d			CO ^e		
	kg/10 ⁶ m ³	lb/10 ⁶ ft ³	RATING	kg/10 ⁶ m ³	lb/10 ⁶ ft ³	RATING	kg/10 ⁶ m ³	lb/10 ⁶ ft ³	RATING
Utility/Large Industrial Boilers (> 100) (1-01-006-01, 1-01-006-04)									
Uncontrolled	9.6	0.6	A	8800	550 ^f	A	640	40	A
Controlled - Low NO _x burners	9.6	0.6	A	1300	81 ^f	D	ND	ND	NA
Controlled - Flue gas recirculation	9.6	0.6	A	850	53 ^f	D	ND	ND	NA
Small Industrial Boilers (10 - 100) (1-02-006-02)									
Uncontrolled	9.6	0.6	A	2240	140	A	560	35	A
Controlled - Low NO _x burners	9.6	0.6	A	1300	81 ^f	D	980	61	D
Controlled - Flue gas recirculation	9.6	0.6	A	480	30	C	590	37	C
Commercial Boilers (0.3 - < 10) (1-03-006-03)									
Uncontrolled	9.6	0.6	A	1600	100	B	330	21	C
Controlled - Low NO _x burners	9.6	0.6	A	270	17	C	425	27	C
Controlled - Flue gas recirculation	9.6	0.6	A	580	36	D	ND	ND	NA
Residential Furnaces (<0.3) (No SCC)									
Uncontrolled	9.6	0.6	A	1500	94	B	640	40	B

^a Units are kg of pollutant/10⁶ cubic meters natural gas fired and lb of pollutant/10⁶ cubic feet natural gas fired. Based on an average natural gas fired higher heating value of 8270 kcal/m³ (1000 Btu/scf). The emission factors in this table may be converted to other natural gas heating values by multiplying the given emission factor by the ratio of the specified heating value to this average heating value. ND = no data. NA = not applicable.

^b SCC = Source Classification Code.

^c Reference 7. Based on average sulfur content of natural gas, 4600 g/10⁶ Nm³ (2000 gr/10⁶ scf).

Table 1.4-3 (Metric And English Units). EMISSION FACTORS FOR CARBON DIOXIDE (CO₂) AND TOTAL ORGANIC COMPOUNDS (TOC) FROM NATURAL GAS COMBUSTION^a

Combustor Type (Size, 10 ⁶ Btu/hr Heat Input) (SCC) ^b	CO ₂ ^c			TOC ^d		
	kg/10 ⁶ m ³	lb/10 ⁶ ft ³	RATING	kg/10 ⁶ m ³	lb/10 ⁶ ft ³	RATING
Utility/large industrial boilers (> 100) (1-01-006-01, 1-01-006-04)	ND ^e	ND	NA	28 ^f	1.7 ^f	C
Small industrial boilers (10 - 100) (1-02-006-02)	1.9 E+06	1.2 E+05	D	92 ^g	5.8 ^g	C
Commercial boilers (0.3 - < 10) (1-03-006-03)	1.9 E+06	1.2 E+05	C	128 ^h	8.0 ^h	C
Residential furnaces (No SCC)	2.0 E+06	1.3 E+05	D	180 ^h	11 ^h	D

^a All factors represent uncontrolled emissions. Units are kg of pollutant/10⁶ cubic meters and lb of pollutant/10⁶ cubic feet. Based on an average natural gas higher heating value of 8270 kcal/m³ (1000 Btu/scf). The emission factors in this table may be converted to other natural gas heating values by multiplying the given factor by the ratio of the specified heating value to this average heating value. NA = not applicable.

^b SCC = Source Classification Code.

^c References 10,22-23.

^d References 9-10,18.


^e ND = no data.

^f Reference 8: methane comprises 17% of organic compounds.

^g Reference 8: methane comprises 52% of organic compounds.

^h Reference 8: methane comprises 34% of organic compounds.

9. J. L. Muhlbaier, "Particulate and Gaseous Emissions From Natural Gas Furnaces and Water Heaters", *Journal of the Air Pollution Control Association*, December 1981.
10. *Field Investigation of Emissions From Combustion Equipment for Space Heating*, EPA-R2-73-084a, U. S. Environmental Protection Agency, Research Triangle Park, NC, June 1973.
11. N. F. Suprenant, et al., *Emissions Assessment of Conventional Stationary Combustion Systems, Volume I: Gas and Oil Fired Residential Heating Sources*, EPA-600/7-79-029b, U. S. Environmental Protection Agency, Washington, DC, May 1979.
12. C. C. Shih, et al., *Emissions Assessment of Conventional Stationary Combustion Systems, Volume III: External Combustion Sources for Electricity Generation*, EPA Contract No. 68-02-2197, TRW, Inc., Redondo Beach, CA, November 1980.
13. N. F. Suprenant, et al., *Emissions Assessment of Conventional Stationary Combustion Systems, Volume IV: Commercial/Institutional Combustion Sources*, EPA Contract No. 68-02-2197, GCA Corporation, Bedford, MA, October 1980.
14. N. F. Suprenant, et al., *Emissions Assessment of Conventional Stationary Combustion Systems, Volume V: Industrial Combustion Sources*, EPA Contract No. 68-02-2197, GCA Corporation, Bedford, MA, October 1980.
15. *Emission Test on 200 HP Boiler at Kaiser Hospital in Woodland Hills*, Energy Systems Associates, Tustin, CA, June 1986.
16. *Results From Performance Tests: California Milk Producers Boiler No. 5*, Energy Systems Associates, Tustin, CA, November 1984.
17. *Source Test For Measurement of Nitrogen Oxides and Carbon Monoxide Emissions From Boiler Exhaust at GAF Building Materials*, Pacific Environmental Services, Inc., Baldwin Park, CA, May 1991.
18. J. P. Kesselring and W. V. Krill, "A Low-NO_x Burner For Gas-Fired Firetube Boilers", *Proceedings: 1985 Symposium on Stationary Combustion NO_x Contr.*, Volume 2, EPRI CS-4360, Electric Power Research Institute, Palo Alto, CA, January 1986.
19. *NO_x Emission Control Technology Update*, EPA Contract No. 68-01-6558, Radian Corporation, Research Triangle Park, NC, January 1984.
20. *Background Information Document For Small Steam Generating Units*, EPA-450/3-87-000, U. S. Environmental Protection Agency, Research Triangle Park, NC, 1987.
21. *Evaluation of the Pollutant Emissions From Gas-Fired Forced Air Furnaces: Research Report No. 1503*, American Gas Association Laboratories, Cleveland, OH, May 1975.
22. *Thirty-day Field Tests of Industrial Boilers: Site 5 - Gas-fired Low-NO_x Burner*, EPA-600/7-81-085a, U. S. Environmental Protection Agency, Research Triangle Park, NC, May 1981.
23. Private communication from Kim Black (Industrial Combustion) to Ralph Harris (MRI), Independent Third Party Source Tests, February 7, 1992.



Department of Environmental Protection

Lawton Chiles
Governor

Twin Towers Office Building
2600 Blair Stone Road
Tallahassee, Florida 32399-2400

Virginia B. Wetherell
Secretary

July 9, 1997

Certified Mail - Return Receipt Requested

Mr. Rich Piper, Chair
Florida Power Coordinating Group, Inc.
405, Reo Street, Suite 100
Tampa, Florida 33609-1004

Dear Mr. Piper:

Enclosed is a copy of a Scrivener's Order correcting an error in the Order concerning particulate matter testing of natural gas fired boilers.

If you have any questions concerning the above, please call Yogesh Manocha at 904/488-6140, or write to me.

Sincerely,

M. D. Harley, P.E., DEE
P.E. Administrator
Emissions Monitoring Section
Bureau of Air Monitoring and
Mobile Sources

MDH:ym

cc: Dotty Diltz, FDEP
Pat Comer, FDEP

STATE OF FLORIDA
DEPARTMENT OF ENVIRONMENTAL PROTECTION

In the matter of:

Florida Electric Power Coordinating Group, Inc.,)

Petitioner.)

ASP No. 97-B-01


ORDER CORRECTING SCRIVENER'S ERROR

The Order which authorizes owners of natural gas fired fossil fuel steam generators to forgo particulate matter compliance testing on an annual basis and prior to renewal of an operation permit entered on the 17th day of March, 1997, is hereby corrected on page 4, paragraph number 4, by deleting the words "pursuant to Rule 62-210.300(2)(a)3.b., c., or d., F.A.C.":

4. In renewing an air operation permit ~~pursuant to Rule 62-210.300(2)(a)3.b., c., or d., F.A.C.~~, the Department shall not require submission of particulate matter emission compliance test results for any fossil fuel steam generator emissions unit that burned liquid and/or solid fuel for a total of no more than 400 hours during the year prior to renewal.

DONE AND ORDERED this 2 day of July, 1997 in Tallahassee, Florida.

STATE OF FLORIDA DEPARTMENT
OF ENVIRONMENTAL PROTECTION



HOWARD L. RHODES, Director
Division of Air Resources Management
Twin Towers Office Building
2600 Blair Stone Road
Tallahassee, Florida 32399-2400
(904) 488-0114

CERTIFICATE OF SERVICE

The undersigned duly designated deputy clerk hereby certifies that a copy of the foregoing was mailed to Rich Piper, Chair, Florida Power Coordinating Group, Inc., 405 Reo Street, Suite 100, Tampa, Florida 33609-1004, on this 10th day of July 1997.

Clerk Stamp

FILED AND ACKNOWLEDGMENT

FILED, on this date, pursuant to,
§120.52(7), Florida Statutes, with the
designated Department Clerk, receipt of
which is hereby acknowledged.

Martina J. Wells 7/10/97
Clerk Date

RECEIVED

ATTACHMENT "C"

RECEIVED

JUL 23 1992

AUG 03 1992

POWER PLANT

STATE OF FLORIDA
DEPARTMENT OF ENVIRONMENTAL REGULATIONHopping Boyd
Green & Sams

FORT PIERCE UTILITIES AUTHORITY,

Petitioner,

vs.

OGC CASE NO. 91-1610
DOAH CASE NO. 91-6989STATE OF FLORIDA DEPARTMENT
OF ENVIRONMENTAL REGULATION,

Respondent.

FINAL ORDER

On October 28, 1991, the State of Florida Department of Environmental Regulation ("Department") received a Petition for administrative hearing from Petitioner, FORT PIERCE UTILITIES AUTHORITY. The Petitioner challenged the Department's decision to issue Permit No. AO 56-190275 to Fort Pierce Utilities Authority, to operate an air pollution source in St. Lucie County.

On July 10, 1992, after receiving a Stipulation for Dismissal and the Settlement Agreement the assigned Hearing Officer issued an Order which closed the Division of Administrative Hearings file and relinquished jurisdiction back to the Department. (Exhibit 1)
There being no further matters to consider,

IT IS ORDERED:

The petition is hereby dismissed and the Department's Southeast District Office is directed to issue Permit No. AO 56-190275 in accordance with the Settlement Agreement. (Exhibit 2)

Any party to this Order has the right to seek judicial review of the Order pursuant to Section 120.68, Florida Statutes, by the

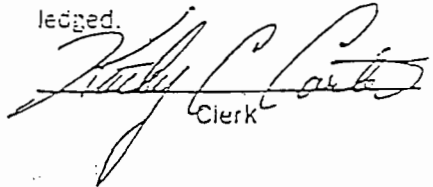
filing of a Notice of Appeal pursuant to Rule 9.110, Florida Rules of Appellate Procedure, with the clerk of the Department in the Office of General Counsel, 2600 Blair Stone Road, Tallahassee, Florida 32399-2400; and by filing a copy of the Notice of Appeal accompanied by the applicable filing fees with the appropriate District Court of Appeal. The Notice of Appeal must be filed within 30 days from the date this Order is filed with the clerk of the Department.

DONE AND ORDERED this 28th day of July, 1992, in Tallahassee, Florida.

STATE OF FLORIDA DEPARTMENT
OF ENVIRONMENTAL REGULATION

FILING AND ACKNOWLEDGEMENT

FILED, on this date, pursuant to S120.52
Florida Statutes, with the designated Department Clerk, receipt of which is hereby acknowledged.

 7.21.92
Clerk Date


CAROL M. BROWNER
Secretary

Twin Towers Office Building
2600 Blair Stone Road
Tallahassee, FL 32399-2400
Telephone: (904) 488-4805

CERTIFICATE OF SERVICE

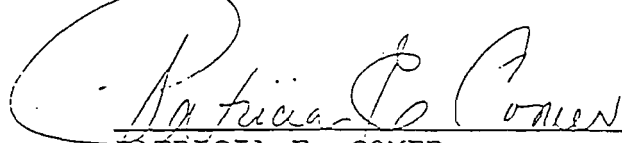
I HEREBY CERTIFY that a true and correct copy of the foregoing
has been furnished by U.S. Mail to:

Peter C. Cunningham, Esq.
Gary V. Perko, Esq.
Post Office Box 6526
Tallahassee, Florida 32314

Linda Rigot, Hearing Officer
Ann Cole, Clerk
Division of Administrative Hearing
The DeSoto Building
1230 Apalachee Parkway
Tallahassee, Florida 32399-1550

on this 22 day of July, 1992.

STATE OF FLORIDA DEPARTMENT
OF ENVIRONMENTAL REGULATION


PATRICIA E. COMER
Assistant General Counsel

Twin Towers Office Building
2600 Blair Stone Road
Tallahassee, FL 32399-2400
Telephone: (904) 488-9730



Department of Environmental Protection

Lawton Chiles
Governor

Twin Towers Office Building
2600 Blair Stone Road
Tallahassee, Florida 32399-2400

Virginia B. Wetherell
Secretary

STATE OF FLORIDA DEPARTMENT OF ENVIRONMENTAL PROTECTION

Mr. Thomas W. Richards
Director of Operations
Fort Pierce Utilities Authority
P.O. Box 3191
Fort Pierce, Florida 34948

ORDER EXTENDING PERMIT EXPIRATION DATE

H. D. King Power Plant, **Facility ID No.:** 1110003

Section 403.0872(2)(b), Florida Statutes (F.S.), specifies that any facility which submits to the Department of Environmental Protection (Department) a timely and complete application for a Title V permit "is entitled to operate in compliance with its existing air permit pending the conclusion of proceedings associated with its application."

Section 403.0872(6), F.S., provides that a proposed Title V permit which is not objected to by the United States Environmental Protection Agency (EPA) "must become final no later than fifty-five (55) days after the date on which the proposed permit was mailed" to the EPA.

Pursuant to the Federal Acid Rain Program as defined in rule 62-210.200, Florida Administrative Code (F.A.C.), all Acid Rain permitting must become effective on January 1 of a given year.

This facility which will be permitted pursuant to section 403.0872, F.S., (Title V permit) will be required to have a permit effective date subsequent to the final processing date of the facility's Title V permit.

To prevent misunderstanding and to assure that the above identified facility continues to comply with existing permit terms and conditions until its Title V permit becomes effective, it is necessary to extend the expiration date(s) of its existing valid permit(s) until the effective date of its Title V permit. Therefore, under the authority granted to the Department by section 403.061(8), F.S., **IT IS ORDERED:**

1. The expiration date(s) of the existing valid permit(s) under which the above identified facility is currently operating is (are) hereby extended until the effective date of its permit issued pursuant to section 403.0872, F.S., (Title V permit);
2. The facility shall comply with all terms and conditions of its existing valid permit(s) until the effective date of its Title V permit;
3. The facility will continue to comply with the requirements of Chapter 62-214, F.A.C., and the Federal Acid Rain Program, as defined in rule 62-210.200, F.A.C., pending final issuance of its Title V permit.

PETITION FOR ADMINISTRATIVE REVIEW

The Department will take the action described in this Order unless a timely petition for an administrative hearing is filed pursuant to sections 120.569 and 120.57 of the Florida Statutes (F.S.). Mediation under Section 120.573, F.S., will not be available for this proposed action.

A person whose substantial interests are affected by the Department's proposed decision may petition for an administrative hearing in accordance with sections 120.569 and 120.57 of the Florida Statutes. The petition must contain the information set forth below and must be filed (received) in the Office of General Counsel of the Department at 3900 Commonwealth Boulevard, Mail Station 35, Tallahassee, Florida 32399-3000. Petitions must be filed within 21 days of receipt of this Order. A petitioner must mail a copy of the petition to the applicant at the address indicated above, at the time of filing. The failure of any person to file a petition within the appropriate time period shall constitute a waiver of that person's right to request an administrative determination (hearing) under sections 120.569 and 120.57 of the Florida Statutes, or to intervene in this proceeding and participate as a party to it. Any subsequent intervention will be only at the approval of the presiding officer upon the filing of a motion in compliance with rule 28-5.207 of the Florida Administrative Code.

A petition must contain the following information:

- (a) The name, address, and telephone number of each petitioner, the applicant's name and address, the Department File Number, and the county in which the project is proposed;
- (b) A statement of how and when each petitioner received notice of the Department's action or proposed action;
- (c) A statement of how each petitioner's substantial interests are affected by the Department's action or proposed action;
- (d) A statement of the material facts disputed by the petitioner, if any;
- (e) A statement of the facts that the petitioner contends warrant reversal or modification of the Department's action or proposed action;
- (f) A statement identifying the rules or statutes that the petitioner contends require reversal or modification of the Department's action or proposed action; and
- (g) A statement of the relief sought by the petitioner, stating precisely the action that the petitioner wants the Department to take with respect to the action or proposed action addressed in this notice of intent.

Because the administrative hearing process is designed to formulate final agency action, the filing of a petition means that the Department's final action may be different from the position taken by it in this Order. Persons whose substantial interests will be affected by any such final decision of the Department on the application have the right to petition to become a party to the proceeding, in accordance with the requirements set forth above.

In addition to the above, a person subject to regulation has a right to apply for a variance from or waiver of the requirements of particular rules, on certain conditions, under section 120.542 of the Florida Statutes. The relief provided by this state statute applies only to state rules, not statutes, and not to any federal regulatory requirements. Applying for a variance or waiver does not substitute or extend the time for filing a petition for an administrative hearing or exercising any other right that a person may have in relation to the action proposed in this notice of intent.

The application for a variance or waiver is made by filing a petition with the Office of General Counsel of the Department, 3900 Commonwealth Boulevard, Mail Station 35, Tallahassee, Florida 32399-3000. The petition must specify the following information:

- (a) The name, address, and telephone number of the petitioner;
- (b) The name, address, and telephone number of the attorney or qualified representative of the petitioner, if any;
- (c) Each rule or portion of a rule from which a variance or waiver is requested;
- (d) The citation to the statute underlying (implemented by) the rule identified in (c) above;
- (e) The type of action requested;
- (f) The specific facts that would justify a variance or waiver for the petitioner;
- (g) The reason why the variance or waiver would serve the purposes of the underlying statute (implemented by the rule); and
- (h) A statement whether the variance or waiver is permanent or temporary and, if temporary, a statement of the dates showing the duration of the variance or waiver requested.

The Department will grant a variance or waiver when the petition demonstrates both that the application of the rule would create a substantial hardship or violate principles of fairness, as each of those terms is defined in section 120.542(2) of the Florida Statutes, and that the purpose of the underlying statute will be or has been achieved by other means by the petitioner.

Persons subject to regulation pursuant to any federally delegated or approved air program should be aware that Florida is specifically not authorized to issue variances or waivers from any requirements of any such federally delegated or approved program. The requirements of the program remain fully enforceable by the Administrator of EPA and by any person under the Clean Air Act unless and until the Administrator separately approves any variance or waiver in accordance with the procedures of the federal program.

This Order constitutes final agency action unless a petition is filed in accordance with the above paragraphs.

RIGHT TO APPEAL

Any party to this Order has the right to seek judicial review of the Order pursuant to Section 120.68, F.S., by the filing of a Notice of Appeal pursuant to Rule 9.110, Florida Rules of Appellate Procedure, with the Clerk of the Department in the Office of General Counsel, 3900 Commonwealth Boulevard, Tallahassee, Florida 32399-3000; and, by filing a copy of the Notice of Appeal accompanied by the applicable filing fees with the appropriate District Court of Appeal. The Notice of Appeal must be filed within 30 days from the date the Notice of Agency Action is filed with the Clerk of the Department.

DONE AND ORDERED this 12 day of Nov, 1997 in Tallahassee, Florida.

STATE OF FLORIDA DEPARTMENT
OF ENVIRONMENTAL PROTECTION



HOWARD L. RHODES, Director
Division of Air Resources Management
Twin Towers Office Building
Mail Station 5500
2600 Blair Stone Road
Tallahassee, Florida 32399-2400
850/488-0114

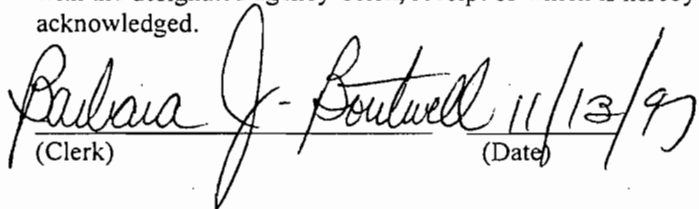
CERTIFICATE OF SERVICE

The undersigned duly designated deputy agency clerk hereby certifies that this order and all copies were sent by certified mail before the close of business on 11/13/97 to the person(s) listed:

Mr. Thomas W. Richards, Fort Pierce Utilities Authority
Mr. Isidore Goldman, PE, FDEP, SED

Clerk Stamp

FILING AND ACKNOWLEDGMENT FILED, on
this date, pursuant to Section 120.52(7), Florida Statutes,
with the designated agency Clerk, receipt of which is hereby
acknowledged.


(Clerk) (Date)

Phase II Permit Application

Page 1

For more information, see instructions and refer to 40 CFR 72.30 and 72.31 and Chapter 62-214, F.A.C.

This submission is: ☒ New ☐ Revised

STEP 1
Identify the source by
plant name, State, and
ORIS code from NADB

H. D. King Power Plant	FL	658
Plant Name	State	ORIS Code

Compliance Plan

STEP 2
Enter the boiler ID#
from NADB for each
affected unit, and
indicate whether a
repowering plan is
being submitted for
the unit by entering
"yes" or "no" at
column c. For new
units, enter the re-
quested information
in columns d and e

a	b	c	d	e
Boiler ID#	Unit Will Hold Allow- ances in Accordance with 40 CFR 72.9(c)(1)	Repowering Plan	New Units Commence Operation Date	New Units Monitor Certification Deadline
8	Yes	No		
7	Yes	No		
	Yes			
	Yes			
	Yes			
	Yes			
	Yes			
	Yes			
1	Yes			
	Yes			
	Yes			
	Yes			

STEP 3
Check the box if the
response in column c
of Step 2 is "Yes"
for any unit

☐

For each unit that will be repowered, the Repowering Extension Plan form is included and the Repowering Technology Petition form has been submitted or will be submitted by June 1, 1997.

Plant Name (from Step 1)

STEP 4

Read the standard requirements and certification, enter the name of the designated representative, and sign and date

Standard RequirementsPermit Requirements.

- (1) The designated representative of each Acid Rain source and each Acid Rain unit at the source shall:
 - (i) Submit a complete Acid Rain part application (including a compliance plan) under 40 CFR part 72, Rules 62-214.320 and 330, F.A.C. in accordance with the deadlines specified in Rule 62-214.320, F.A.C.; and
 - (ii) Submit in a timely manner any supplemental information that the permitting authority determines is necessary in order to review an Acid Rain part application and issue or deny an Acid Rain permit;
- (2) The owners and operators of each Acid Rain source and each Acid Rain unit at the source shall:
 - (i) Operate the unit in compliance with a complete Acid Rain part application or a superseding Acid Rain part issued by the permitting authority; and
 - (ii) Have an Acid Rain Part.

Monitoring Requirements.

- (1) The owners and operators and, to the extent applicable, designated representative of each Acid Rain source and each Acid Rain unit at the source shall comply with the monitoring requirements as provided in 40 CFR part 75, and Rule 62-214.420, F.A.C.
- (2) The emissions measurements recorded and reported in accordance with 40 CFR part 75 shall be used to determine compliance by the unit with the Acid Rain emissions limitations and emissions reduction requirements for sulfur dioxide and nitrogen oxides under the Acid Rain Program.
- (3) The requirements of 40 CFR part 75 shall not affect the responsibility of the owners and operators to monitor emissions of other pollutants or other emissions characteristics at the unit under other applicable requirements of the Act and other provisions of the operating permit for the source.

Sulfur Dioxide Requirements.

- (1) The owners and operators of each source and each Acid Rain unit at the source shall:
 - (i) Hold allowances, as of the allowance transfer deadline, in the unit's compliance subaccount (after deductions under 40 CFR 73.34(c)) not less than the total annual emissions of sulfur dioxide for the previous calendar year from the unit; and
 - (ii) Comply with the applicable Acid Rain emissions limitations for sulfur dioxide.
- (2) Each ton of sulfur dioxide emitted in excess of the Acid Rain emissions limitations for sulfur dioxide shall constitute a separate violation of the Act.
- (3) An Acid Rain unit shall be subject to the requirements under paragraph (1) of the sulfur dioxide requirements as follows:
 - (i) Starting January 1, 2000, an Acid Rain unit under 40 CFR 72.5(a)(2); or
 - (ii) Starting on the later of January 1, 2000 or the deadline for monitor certification under 40 CFR part 75, an Acid Rain unit under 40 CFR 72.6(a)(3).
- (4) Allowances shall be held in, deducted from, or transferred among Allowance Tracking System accounts in accordance with the Acid Rain Program.
- (5) An allowance shall not be deducted in order to comply with the requirements under paragraph (1)(i) of the sulfur dioxide requirements prior to the calendar year for which the allowance was allocated.
- (6) An allowance allocated by the Administrator under the Acid Rain Program is a limited authorization to emit sulfur dioxide in accordance with the Acid Rain Program. No provision of the Acid Rain Program, the Acid Rain permit application, the Acid Rain permit, or the written exemption under 40 CFR 72.7 and 72.8 and no provision of law shall be construed to limit the authority of the United States to terminate or limit such authorization.
- (7) An allowance allocated by the Administrator under the Acid Rain Program does not constitute a property right.

Nitrogen Oxides Requirements. The owners and operators of the source and each Acid Rain unit at the source shall comply with the applicable Acid Rain emissions limitation for nitrogen oxides.

Excess Emissions Requirements.

- (1) The designated representative of an Acid Rain unit that has excess emissions in any calendar year shall submit a proposed offset plan, as required under 40 CFR part 77.
- (2) The owners and operators of an Acid Rain unit that has excess emissions in any calendar year shall:
 - (i) Pay without demand the penalty required, and pay upon demand the interest on that penalty, as required by 40 CFR part 77; and
 - (ii) Comply with the terms of an approved offset plan, as required by 40 CFR part 77.

Recordkeeping and Reporting Requirements.

- (1) Unless otherwise provided, the owners and operators of the source and each Acid Rain unit at the source shall keep on site at the source each of the following documents for a period of 5 years from the date the document is created. This period may be extended for cause, at any time prior to the end of 5 years, in writing by the Administrator or permitting authority:
 - (i) The certificate of representation for the designated representative for the source and each Acid Rain unit at the source and all documents that demonstrate the truth of the statements in the certificate of representation, in accordance with Rule 62-214.350, F.A.C.; provided that the certificate and documents shall be retained on site at the source beyond such 5-year period until such documents are superseded because of the submission of a new certificate of representation changing the designated representative;
 - (ii) All emissions monitoring information, in accordance with 40 CFR part 75;
 - (iii) Copies of all reports, compliance certifications, and other submissions and all records made or required under the Acid Rain Program; and,

Plant Name (from Step 1)

Recordkeeping and Reporting Requirements (cont.)

(iv) Copies of all documents used to complete an Acid Rain part application and any other submission under the Acid Rain Program or to demonstrate compliance with the requirements of the Acid Rain Program.

(2) The designated representative of an Acid Rain source and each Acid Rain unit at the source shall submit the reports and compliance certifications required under the Acid Rain Program, including those under 40 CFR part 72 subpart I and 40 CFR part 75.

Liability.

(1) Any person who knowingly violates any requirement or prohibition of the Acid Rain Program, a complete Acid Rain part application, an Acid Rain part, or a written exemption under 40 CFR 72.7 or 72.8, including any requirement for the payment of any penalty owed to the United States, shall be subject to enforcement pursuant to section 113(c) of the Act.

(2) Any person who knowingly makes a false, material statement in any record, submission, or report under the Acid Rain Program shall be subject to criminal enforcement pursuant to section 113(c) of the Act and 18 U.S.C. 1001.

(3) No permit revision shall excuse any violation of the requirements of the Acid Rain Program that occurs prior to the date that the revision takes effect.

(4) Each Acid Rain source and each Acid Rain unit shall meet the requirements of the Acid Rain Program.

(5) Any provision of the Acid Rain Program that applies to an Acid Rain source (including a provision applicable to the designated representative of an Acid Rain source) shall also apply to the owners and operators of such source and of the Acid Rain units at the source.

(6) Any provision of the Acid Rain Program that applies to an Acid Rain unit (including a provision applicable to the designated representative of an Acid Rain unit) shall also apply to the owners and operators of such unit. Except as provided under 40 CFR 72.44 (Phase II repowering extension plans), and except with regard to the requirements applicable to units with a common stack under 40 CFR part 75 (including 40 CFR 75.16, 75.17, and 75.18), the owners and operators and the designated representative of one Acid Rain unit shall not be liable for any violation by any other Acid Rain unit of which they are not owners or operators or the designated representative and that is located at a source of which they are not owners or operators or the designated representative.

(7) Each violation of a provision of 40 CFR parts 72, 73, 75, 77, and 78 by an Acid Rain source or Acid Rain unit, or by an owner or operator or designated representative of such source or unit, shall be a separate violation of the Act.

Effect on Other Authorities. No provision of the Acid Rain Program, an Acid Rain part application, an Acid Rain part, or a written exemption under 40 CFR 72.7 or 72.8 shall be construed as:

(1) Except as expressly provided in title IV of the Act, exempting or excluding the owners and operators and, to the extent applicable, the designated representative of an Acid Rain source or Acid Rain unit from compliance with any other provision of the Act, including the provisions of title I of the Act relating to applicable National Ambient Air Quality Standards or State Implementation Plans;

(2) Limiting the number of allowances a unit can hold; *provided*, that the number of allowances held by the unit shall not affect the source's obligation to comply with any other provisions of the Act;

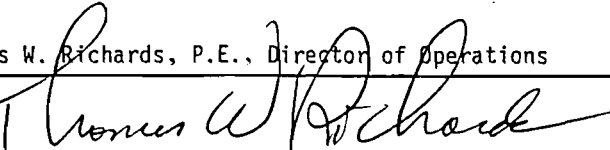
(3) Requiring a change of any kind in any State law regulating electric utility rates and charges, affecting any State law regarding such State regulation, or limiting such State regulation, including any prudence review requirements under such State law;

(4) Modifying the Federal Power Act or affecting the authority of the Federal Energy Regulatory Commission under the Federal Power Act; or,

(5) Interfering with or impairing any program for competitive bidding for power supply in a State in which such program is established.

Certification

I am authorized to make this submission on behalf of the owners and operators of the Acid Rain source or Acid Rain units for which the submission is made. I certify under penalty of law that I have personally examined, and am familiar with, the statements and information submitted in this document and all its attachments. Based on my inquiry of those individuals with primary responsibility for obtaining the information, I certify that the statements and information are to the best of my knowledge and belief true, accurate, and complete. I am aware that there are significant penalties for submitting false statements and information or omitting required statements and information, including the possibility of fine or imprisonment.

Name Thomas W. Richards, P.E., Director of Operations	
Signature 	Date 12/14/95

STEP 5 (optional)
Enter the source AIRS
and FINDS identification
numbers, if known

AIRS
FINDS 50WPB560003

Allowance Tracking System Report

Date: 08/25/94

Page: 1

AUTHORIZED ACCOUNT REPRESENTATIVE INFORMATION

AAR Number 000357
AAR Name Thomas W. Richards
Firm Name
Address 1 P.O. Box 3191
Address 2
City/State/Zip Fort Pierce, FL 34948-3191
Phone 407/466-1600 Extension: 3400
Fax 407/466-0396

Account Num	Plant/Account Name	AAR/Alternate	AAR Start Date
000658000007	Henry D King	AAR	07/19/94
000658000008	Henry D King	AAR	07/19/94

Please review the information shown above and report any errors, along with supporting documentation, to the address listed below, or call the Acid Rain Hotline.



Acid Rain Hotline: (202) 233-9620

U.S. Environmental Protection Agency
Acid Rain Division
401 M Street, SW
Mail Code 6204J
Washington, DC 20460